



CFR 47 Part 2, 22, and 24 Test Report

Test Report Number: WR646.001

Terminal device: FCC ID: QMNRH-77 Model: 2118 Type: RH-77 HW: 4.501 SW: 0100V0800.nep
(Detailed information is listed in section 4).

Originator: Engineer / Technician
Function: TCC - Dallas – EMC
Version/Status: 2.0 Approved
Location: TCC Directories
Date: March 18, 2005

Change History:

Version	Date	Status	Handled By	Comments
0.1	1/17/05	Draft	Mark Severson	
0.2	1/17/05	Proposal	Mark Severson	
0.3	1/17/05	Reviewed	Mark Severson	
1.0	2/08/05	Approved	Mark Severson	
1.1	3/18/05	Revised	Mark Severson	
2.0	3/18/05	Approved	Nerina Walton	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.

Tel. 972-894-5000

Client:

Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1 858 831 5000
Fax. +1 858 831 6500

Date and signatures:**March 18, 2005**

For the contents:

Mark Severson
Technical Review

Nerina Walton
Manager Review

**TABLE OF CONTENTS**

1. GENERAL	4
1.1 QUALITY SYSTEM	4
1.2 LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION	4
1.3 OBJECTIVE	7
1.4 TEST SUMMARY	7
2. STANDARDS BASIS	8
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	9
3.1 ABBREVIATIONS	9
3.2 ACRONYMS	9
3.3 TERMS	9
4. EQUIPMENT-UNDER-TEST (EUT)	10
4.1 DESCRIPTION OF TESTED DEVICE(S):	10
4.2 PHOTOGRAPH OF TESTED DEVICE(S):	10
5. TEST EQUIPMENT LIST	11
6. RF POWER OUTPUT (CONDUCTED)	12
6.1 SETUP	12
6.2 PASS/FAIL CRITERIA	12
6.3 DETAILED TEST RESULTS	12
7. RF POWER OUTPUT (RADIATED)	13
7.1 SETUP	13
7.2 PASS/FAIL CRITERIA	13
7.3 DETAILED TEST RESULTS	14
7.4 MEASUREMENT UNCERTAINTY	14
8. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)	15
8.1 SETUP	15
8.2 PASS/FAIL CRITERIA	15
8.3 DETAILED TEST RESULTS	16
8.4 MEASUREMENT UNCERTAINTY	18
9. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	19
9.1 SETUP	19
9.2 PASS/FAIL CRITERIA	19
9.3 DETAILED TEST RESULTS	19
9.4 MEASUREMENT UNCERTAINTY	22
10. FIELD STRENGTH OF SPURIOUS RADIATION	23
10.1 SETUP	23
10.2 PASS/FAIL CRITERIA	23
10.3 DETAILED TEST RESULTS	24
10.4 MEASUREMENT UNCERTAINTY	24
11. FREQUENCY STABILITY (TEMPERATURE VARIATION)	25
11.1 SETUP	25
11.2 PASS/FAIL CRITERIA	25



11.3	DETAILED TEST RESULTS.....	25
12.	FREQUENCY STABILITY (VOLTAGE VARIATION).....	26
12.1	SETUP.....	26
12.2	PASS/FAIL CRITERIA	26
12.3	DETAILED TEST RESULTS.....	26

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.



1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661.

1.2 List of General Information Required for Certification

This list is in accordance with FCC Rules and Regulations, CFR 47, Part 2, and to 22H, 24E, Confidentiality.

1.2.1 Sub-part 2.1033(c)(1)

Name and Address of Applicant: Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Manufacturer: Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

1.2.2 Sub-part 2.1033(c)(2)

FCC ID: QMNRH-77

Model No.: 2118



1.2.3 Sub-part 2.1033(c)(3)

Instruction Manual(s): Refer to attached EXHIBITS

1.2.4 Sub-part 2.1033(c)(4)

Type of Emission: 1M25F9W

1.2.5 Sub-part 2.1033(c)(5)

Frequency Range, MHz: 824.7-848.31 MHz

1.2.6 Sub-part 2.1033(c)(6)

Power Rating, Watts: 0.178W Cellular

Switchable Variable N/A

FCC Grant Note: BC- The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.



1.2.7 Sub-part 2.1033(c)(7)

Maximum Power Rating, Watts: 0.178W

1.2.8 Sub-part 2.1033(c)(8)

Voltages & Currents in all elements in final R.F. Stage, including final transistor or solid-state device:

Collector Current, A = 0.48
Collector Voltage, Vdc = 3.7
Supply Voltage, Vdc = 3.7

1.2.9 Sub-part 2.1033(c)(9)

Tune-up Procedure: Refer to attached EXHIBITS

1.2.10 Sub-part 2.1033(c)(10)

Circuit Diagram/Circuit Description:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Refer to attached EXHIBITS

1.2.11 Sub-part 2.1033(c)(11)

Label Information: Refer to attached EXHIBITS

1.2.12 Sub-part 2.1033(c)(12)

Photographs: Refer to attached EXHIBITS

1.2.13 Sub-part 2.1033(c)(13)

Digital Modulation Description: N/A

1.2.14 Sub-part 2.1033(c)(14)

Test and Measurement Data: FOLLOWS



1.3 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057 and Part 22.

1.4 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
RF Power Output (Conducted)	FCC Part 2.1046(a) / 22.913(a)	6	Complies
RF Power Output (Radiated)	FCC Part 22.913(a)	7	Complies
Occupied Bandwidth: Transmitter Conducted Measurements	FCC Part 2.1049(c)(1)	8	Complies
Spurious Emissions at Antenna Terminals	FCC Part 2.1051	9	Complies
Field Strength of Spurious Radiation	FCC Part 2.1053	10	Test Report WR575.001
Frequency Stability (Temperature Variation)	FCC Part 2.1055(a)(1)(b)	11	Complies
Frequency Stability (Voltage Variation)	FCC Part 2.1055(d)(1)(2)	12	Complies



2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 2	Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures
3	FCC: CFR 47 Part 22	Code of Federal Regulations (CFR) Title 47, Part 22 – Public Mobile Services: Subpart H – Cellular Radiotelephone Service
4	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
5	RSS-132	800 MHz Cellular Telephones Employing New Technologies
6	RSS-133	2 GHz Personal Communications Services, Industry Canada
7	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
8	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.



3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

dB - decibel

dBc - decibels from carrier

dBm - decibels per milliwatt (absolute measurement)

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

3.2 Acronyms

AMPS - Advanced Mobile Phone System

BSS - Base Station Simulator

CDMA - Code Division Multiple Access

EDRP - Effective Dipole Radiated Power

EIRP - Effective Isotropic Radiated Power

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

ERP - Effective Radiated Power

EUT - Equipment under Test

GSM - Global System for Mobile communications

PCS - Personal Communications Services

RF - Radio Frequency

TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.



4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC Parts 2.1046(a), 22.913(a) 2.1049(c)(1), 2.1051, 2.1055(d)(1)(2), 24.235	CDMA Cellular	27 Dec 04	Operational	Handset	Model: 2118 Type: RH-77 SW: 0100V0800.nep HWID: 4.501 ESN: 044/01208885 Code: 0517533HL06CP
N/A	N/A	27 Dec 04	Operational	Battery	Type: BL-5C Other: 3.7 vdc

4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-77

Test Report #: WR646.001

March 18, 2005

Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
6, 8,	02663 02661	EMI Receiver	Agilent	85460A	3/23/2005	12mos
6, 8, 9	02625	Base Station	Rhode & Schwarz	CMU200	6/30/2005	12mos
9	03155	Temperature/ Humidity Sensor	Pinnacle	ID/TRH	7/15/2005	12mos
9	02680	EMI Analyzer	Agilent	E7405A	12/29/2005	12mos
7	01472	Biconilog Antenna	EMC Test Systems	3142B	4/08/2005	12mos
7	02846	Turntable and Tower Controller	Sunol	FM2022 & 2846	N/A	N/A
7	00065	Horn Antenna	EMCO	3115	7/16/2005	12mos
7	02664	EMI Receiver	Agilent	8546A / 85460A	2/23/2005	12mos
7	02665	EMI Receiver	Agilent	8546A / 85460A	2/23/2005	12mos
7	02679	EMI Analyzer	Agilent	E7405	3/13/2005	12mos
12	00837	Temperature Chamber	Tenney	Tenney Environmental	1/20/2006	12mos
12	00627	DC Power Supply	HP	E3631A	NCR	NCR
6	02681	Power Meter	Agilent	E4419B	9/09/05	12mos
6	02676	Power Sensor	Agilent	E9304	3/06/05	12mos



6. RF POWER OUTPUT (CONDUCTED)

Specification: FCC Part 2.1046(a), 22.913(a)

6.1 Setup

Testing was performed with the EUT connected to a 6dB splitter and then to the RF Power Meter to measure the conducted RF power output. The base station simulator was connected to the other port of the splitter to establish a call.

6.2 Pass/Fail Criteria

Not Applicable

6.3 Detailed Test Results

Test Technician / Engineer	Cindy Trinh
Date of Measurement	December 08, 2004
Temperature	22.0°C
Humidity	23%RH
Test Result	Was operated at max power and tested in accordance with FCC Part 2.1046(a), 22.913(a),

CDMA 800


Channel	Freq Max (MHz)	Max (mW)	Max (dBm)
1013	824.04 MHz	331.1	25.2
384	836.52 MHz	363.1	25.6
777	848.97 MHz	257.0	24.1



7. RF POWER OUTPUT (RADIATED)

Specification: FCC Part 22.913(a)

7.1 Setup

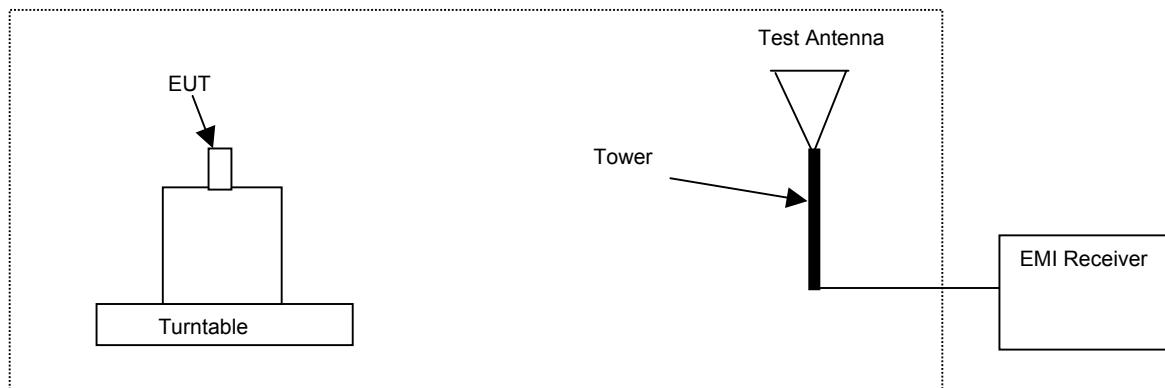

7.2 Pass/Fail Criteria

Band	FCC Limit (dBm)
Cellular	38.5 (EDRP)
PCS	33.0 (EIRP)



7.3 Detailed Test Results

Test Technician / Engineer	Bob Alexander
Date of Measurement	January 04, 2005
Temperature	22°C
Humidity	32%RH
Test Result	Complies with FCC Part 22.913(a)

Note: measurements were performed with 1MHz RBW/VBW.

Cellular Band, CDMA 800

Channel	Freq Max (MHz)	EDRP EMI (mW)	EDRP EMI (dBm)	Pol.
1013	824.7	90.2	19.55	V
384	836.52	71.3	18.53	V
777	848.31	64.4	18.06	V

Test Technician / Engineer	Mark Severson
Date of Measurement	March 18, 2005
Temperature	23°C
Humidity	36%RH
Test Result	Complies with FCC Part 22.913(a)

Note: measurements were performed with 3MHz RBW/VBW.

Cellular Band, CDMA 800

Channel	Freq Max (MHz)	EDRP EMI (mW)	EDRP EMI (dBm)	Pol.
1013	824.7	178	22.5	V
384	836.52	155	22.0	V
777	848.31	135	21.3	V

7.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 2.4dB for 800 to 2000 MHz.

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-77

Test Report #: WR646.001

March 18, 2005

Accredited Laboratory
Certificate Number: 1819-01


Ver 2.0

8. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

Specification: FCC Part 2.1049(c)(1)

8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

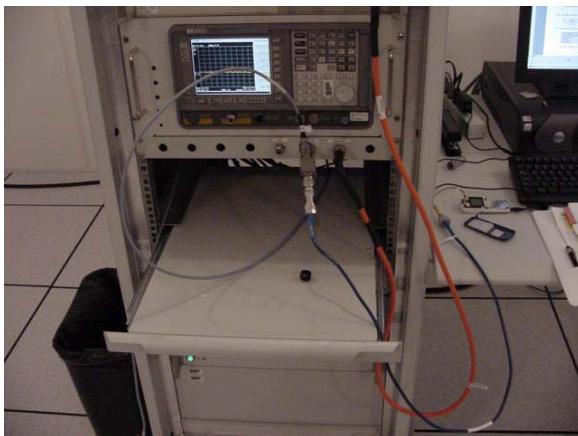

8.2 Pass/Fail Criteria

Occupied Bandwidth, Out of Band

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular 800, Low Channel	< 824	-13
Cellular 800, High Channel	> 849	-13
PCS 1900, Low Channel	< 1850	-13
PCS 1900, High Channel	> 1910	-13

Occupied Bandwidth, In Band

No pass/fail, these plots are used to determine the emission designators.





8.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts
Date of Measurement	January 19, 2005
Temperature	21.0°C
Humidity	32.0%RH
Test Result	Complies comply with FCC Part 2.1049(c)(1), 24.238(a)(b)

Occupied Bandwidth, In Band; Cellular, CDMA 800, Channel 384

3 kHz RBW/VBW, 100ms Sweep Time

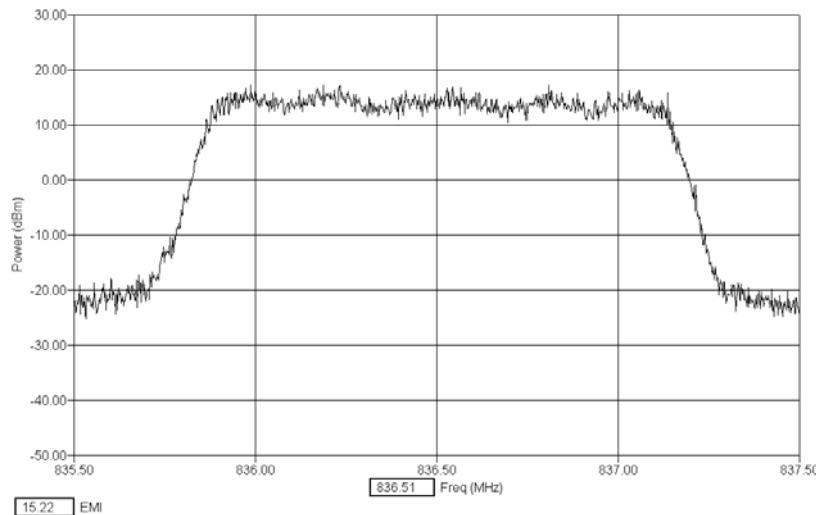


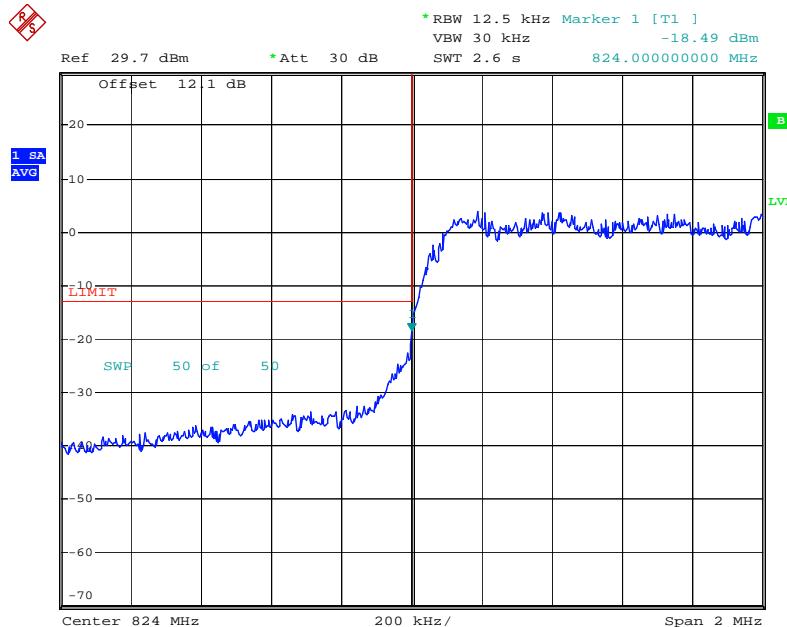**CDMA800 Low ch1013**

Date: 9.FEB.2005 12:36:33



CDMA800 High ch 777

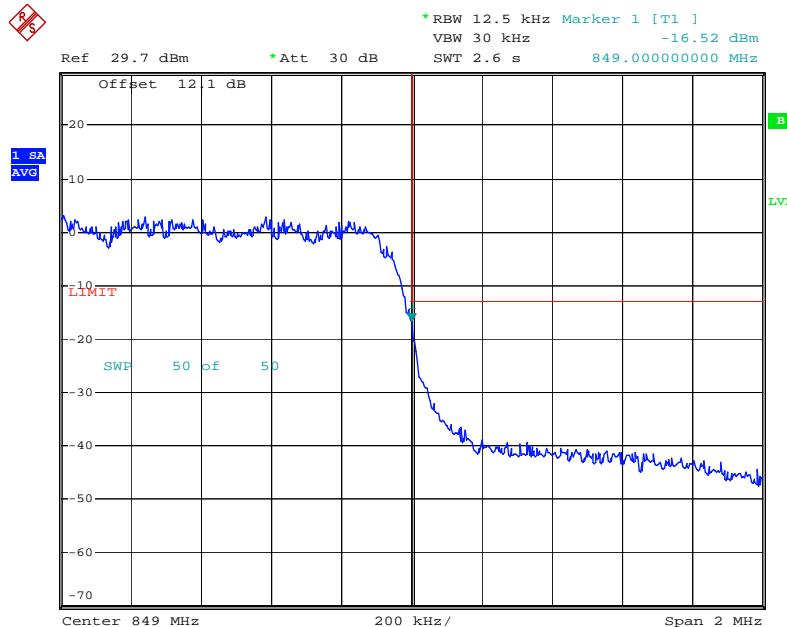

Date: 9.FEB.2005 12:33:21

8.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.




9. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Specification: FCC Part 2.1051

9.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

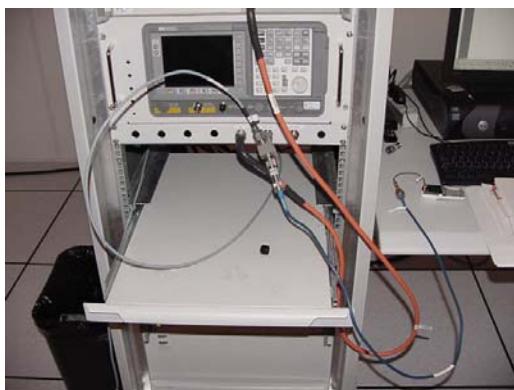

9.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular / PCS	30 – 18000 *	-13

* Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

9.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts
Date of Measurement	January 17, 2005
Temperature	21.0°C
Humidity	32.0%RH
Test Result	Complies /with FCC Part 2.1051

Note 1: EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Note 2: measurements were performed with 3MHz RBW/VBW.

**CDMA 800 Low Ch1013**

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1649.4	-47.52	-13
2474.1	-49.02	-13
3298.8	-49.17	-13
4123.5	-50.54	-13
4948.2	-50.53	-13
5772.9	-49.84	-13
6597.6	-49.51	-13
7422.3	-47.11	-13
8247	-46.81	-13

**CDMA 800 Mid Ch384**

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1673.04	-49.2	-13
2509.56	-49.44	-13
3346.08	-49.63	-13
4182.6	-48.84	-13
5019.12	-50.18	-13
5855.64	-49.86	-13
6692.16	-48.29	-13
7528.68	-47.35	-13
8365.2	-49.68	-13



CDMA 800 High Ch777

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1696.62	-46.89	-13
2544.93	-47.68	-13
3393.24	-48.23	-13
4241.55	-49.07	-13
5089.86	-48.93	-13
5938.17	-49.08	-13
6786.48	-47.28	-13
7634.79	-47.29	-13
8483.1	-47.78	-13

9.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.




10. FIELD STRENGTH OF SPURIOUS RADIATION

Specification: FCC Part 2.1053

10.1 Setup

Test equipment set-up.

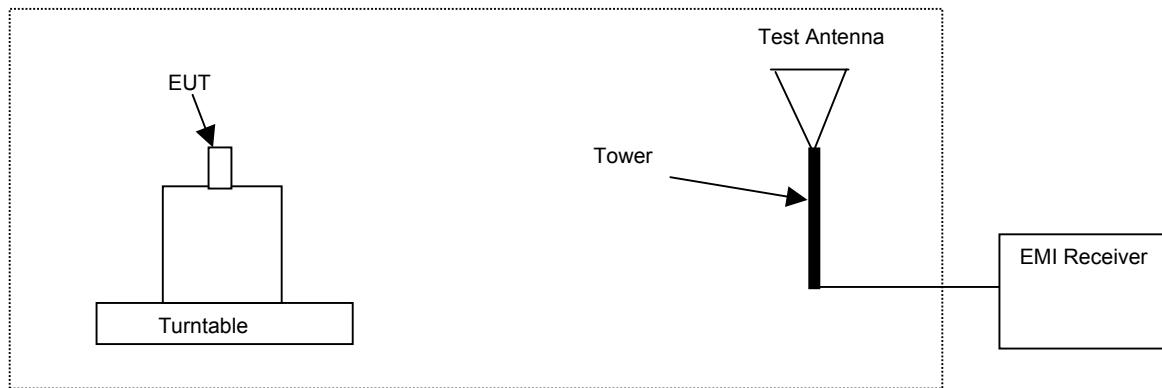

10.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limit (dBm)
Cellular / PCS	30 – 18000*	-13

- Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

Substitution method according to ANSI C63.4 2001, TIA/EIA 603-B was used for final measurements.



10.3 Detailed Test Results

Refer To Test Report WR575.001

10.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 5.2dB for 30-1000MHz, +/- 5.6dB for 1-6GHz and +/-6.8 for 6-18GHz.



11. FREQUENCY STABILITY (TEMPERATURE VARIATION)

Specification: FCC Part 2.1055(a)(1)(b), 24.235

11.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

11.2 Pass/Fail Criteria

Not Applicable

11.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts
Date of Measurement	January 27, 2005
Temperature	15.0 ° - 28.0 ° C
Humidity	15.0 % - 85.0% RH
Test Result	Tested in accordance with 2.1055(a)(1)(b), 24.235 at maximum power setting.

Temp. (°C)	CDMA 800, Channel 384
	Change (Hz)
-30	23Hz
-20	32 Hz
-10	37 Hz
0	30 Hz
10	31 Hz
20	29 Hz
30	31 Hz
40	32 Hz
50	37 Hz

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-77

Test Report #: WR646.001

March 18, 2005

Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

12. FREQUENCY STABILITY (VOLTAGE VARIATION)

Specification: FCC Part 2.1055(d)(1)(2), 24.235

12.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

12.2 Pass/Fail Criteria

Not Applicable

12.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts
Date of Measurement	January 28, 2005
Temperature	15.0 ° - 28.0 ° C
Humidity	15.0 % - 85.0% RH
Test Result	Tested in accordance with 2.1055(d)(1)(2), 24.235 at maximum power setting.

CDMA 800, Call Mode, Channel 384

% of STV	Voltage	Change (Hz)
85	3.14vdc	N/A
100 (Nominal)	3.7vdc	27Hz
115	4.3vdc	18Hz
Battery End Point	3.2vdc	22Hz