



CFR 47 Part 2 and 24 Test Report

Test Report Number: WR-1018.002

Terminal device: FCC ID: QMNRH-90 Model: 2127i Type: RH-90 HW: 7000 SW: R220_03w24_45_34.nep
(Detailed information is listed in section 4).

Originator: Cindy Trinh
Function: TCC - Dallas – EMC
Version/Status: 1.0 Approved
Location: TCC Directories
Date: February 23, 2006

Change History:

Version	Date	Status	Handled By	Comments
0.1	22-Feb-06	Draft	Cindy Trinh	
0.2	23-Feb-06	Proposal	Cindy Trinh	
0.3	23-Feb-06	Reviewed	Mark Severson	
1.0	23-Feb-06	Approved	Mark Severson	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia, Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.
Tel. 972-894-5000

Client:

Nokia, Inc.
12278 Scripps Summit Dr.
San Diego, CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Date and signatures:

February 23, 2006

For the contents:

Cindy Trinh
Test Engineer

Mark Severson
Technical Review

**TABLE OF CONTENTS**

1. GENERAL	3
1.1. QUALITY SYSTEM.....	3
1.2. LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION	3
1.3. OBJECTIVE	6
1.4. TEST SUMMARY	6
2. STANDARDS BASIS	7
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	8
3.1. ABBREVIATIONS	8
3.2. ACRONYMS.....	8
3.3. TERMS	8
4. EQUIPMENT-UNDER-TEST (EUT)	9
4.1. DESCRIPTION OF TESTED DEVICE(S):.....	9
4.2. PHOTOGRAPH OF TESTED DEVICE(S):.....	9
5. TEST EQUIPMENT LIST	10
6. RF POWER OUTPUT (RADIATED)	11
6.1. SETUP	11
TEST METHOD.....	11
6.2.....	11
6.3. DETAILED TEST RESULTS	12
7. FIELD STRENGTH OF SPURIOUS RADIATION	13
7.1. SETUP	13
7.2. TEST METHOD AND LIMIT.....	13
7.3. PASS/FAIL CRITERIA	14
7.4. DETAILED TEST RESULTS	15

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.

Test & Certification Center (TCC) - Dallas
DTX15927-EN-2.0

FCC ID: QMNRH-90
Test Report: WR-1018.002
February 23, 2006



Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

1. GENERAL

1.1. Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661N.

1.2. List of General Information Required for Certification

This list is in accordance with FCC Rules and Regulations, CFR 47, Part 2, and to 22H, 24E, Confidentiality.

Sub-part 2.1033(c)(1)

Name and Address of Applicant:

Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Manufacturer:

Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Sub-part 2.1033(c)(2)

FCC ID: QMNRH-90

Model No.: 2127i

Sub-part 2.1033(c)(3)

Instruction Manual(s): Refer to attached EXHIBITS

Sub-part 2.1033(c)(4)

Type of Emission: 1M25F9W

Test & Certification Center (TCC) - Dallas
DTX15927-EN-2.0

FCC ID: QMNRH-90
Test Report: WR-1018.002
February 23, 2006

Sub-part 2.1033(c)(5)

Frequency Range, MHz: 1851.25-1908.75MHz

Sub-part 2.1033(c)(6)

Power Rating, Watts: **0.468** W PCS

Switchable Variable N/A

FCC Grant Note: BC- The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.



Test & Certification Center (TCC) - Dallas
DTX15927-EN-2.0

FCC ID: QMNRH-90
Test Report: WR-1018.002
February 23, 2006



Accredited Laboratory
Certificate Number: 1819-01

Sub-part 2.1033(c)(7)

Maximum Power Rating, Watts: 0.468 W

Sub-part 2.1033(c)(8)

Voltages & Currents in all elements in final R.F. Stage, including final transistor or solid-state device:

Collector Current, A = **0.126**
Collector Voltage, Vdc = 3.7
Supply Voltage, Vdc = 3.7

Sub-part 2.1033(c)(9)

Tune-up Procedure: Refer to attached EXHIBITS

Sub-part 2.1033(c)(10)

Circuit Diagram/Circuit Description:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Refer to attached EXHIBITS

Sub-part 2.1033(c)(11)

Label Information: Refer to attached EXHIBITS

Sub-part 2.1033(c)(12)

Photographs: Refer to attached EXHIBITS

Sub-part 2.1033(c)(13)

Digital Modulation Description: N/A

Sub-part 2.1033(c)(14)

Test and Measurement Data: FOLLOWS



1.3. Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1046, 2.1053, Part 22, and Part 24.

1.4. Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
RF Power Output (Radiated)	FCC Part 24.232(b)	6	Complies
Field Strength of Spurious Radiation	FCC Part 2.1053	7	Complies



2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 2	Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures
3	FCC: CFR 47 Part 22	Code of Federal Regulations (CFR) Title 47, Part 22 – Public Mobile Services: Subpart H – Cellular Radiotelephone Service
4	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
5	RSS-128	800 MHz Dual-Mode TDMA Cellular Telephones
6	RSS-129	800 MHz Dual-Mode CDMA Cellular Telephones
7	RSS-132	800 MHz Cellular Telephones Employing New Technologies
8	RSS-133	2 GHz Personal Communications Services, Industry Canada
9	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
10	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.

3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1. Abbreviations

dB - decibel
dBc - decibels from carrier
dBm - decibels per milliwatt (absolute measurement)
GHz - gigahertz or 1000000000 hertz
kHz - kilohertz or 1000 hertz
MHz - megahertz or 1000000 hertz

3.2. Acronyms

AMPS - Advanced Mobile Phone System
BSS - Base Station Simulator
CDMA - Code Division Multiple Access
EDRP - Effective Dipole Radiated Power
EIRP - Effective Isotropic Radiated Power
EMC - Electromagnetic Compatibility
EMI - Electromagnetic Interference
ERP - Effective Radiated Power
EUT - Equipment under Test
GSM - Global System for Mobile communications
PCS - Personal Communications Services
RF - Radio Frequency
TDMA - Time Division Multiple Access

3.3. Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.

Test & Certification Center (TCC) - Dallas
DTX15927-EN-2.0

FCC ID: QMNRH-90
Test Report: WR-1018.002
February 23, 2006



Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1. Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC part 24.232(b) FCC part 2.1053	CDMA1900	20-Feb-06	Functional	Phone	FCC ID: QMNRH-90 Type: RH-90 HW: 7000 SW: R220_03w24_45_34.nep ESN: 02604483368
N/A	N/A	20-Feb-06	N/A	Battery	Type: BL-6C Other: 3.7 Vdc
N/A	N/A	20-Feb-06	N/A	Headset	Type: HS-5
N/A	N/A	20-Feb-06	N/A	Charger	Type: ACP-12U

4.2. Photograph of Tested Device(s):

Refer to attached EXHIBITS

Test & Certification Center (TCC) - Dallas
DTX15927-EN-2.0

FCC ID: QMNRH-90
Test Report: WR-1018.002
February 23, 2006



Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

5. TEST EQUIPMENT LIST

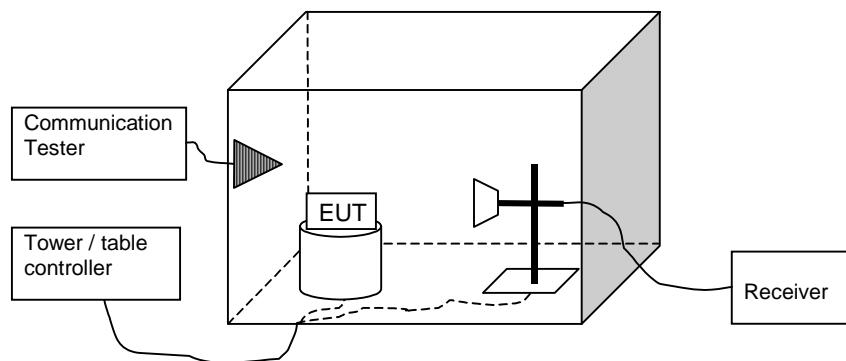
The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
6,7	04073	EMI Receiver	Rhode & Schwarz	ESIB 26	03-Aug-06	12 months
6,7	02625	Base Station	Rhode & Schwarz	CMU-200	30-Aug-06	12 months
6,7	02871	Biconilog Antenna	EMC Automation	3003C	08-July-06	12 months
6,7	04076	Horn Antenna	ETS	3117	18-Aug-06	12 months
6,7	02836	Turntable and Tower Controller	Sunol	FM2022 & 2846	N/A	N/A

6. RF POWER OUTPUT (RADIATED)

Specification: FCC Part 24.232(b)

6.1. Setup



6.2. Test method

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequency are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

**Pass/Fail Criteria**

Band	FCC Limit (dBm)
Cellular	38.5 (EDRP)
PCS	33.0 (EIRP)

6.3. Detailed Test Results

Test Technician / Engineer	Cindy Trinh
Date of Measurement	22-Feb-06
Temperature	23°C
Humidity	26 to 28%RH
Test Result	Complies with FCC Part 24.232(b)

CDMA 1900

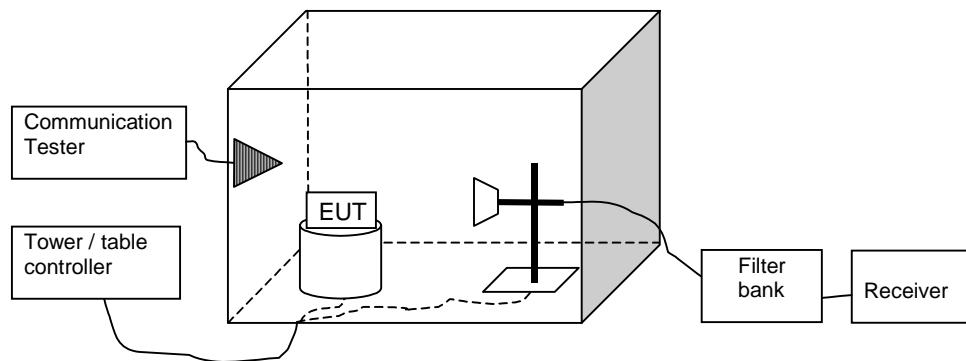
Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
25	26.40	0.437	-21.20	47.60	VERTICAL	PASSED
600	26.70	0.468	-21.40	48.10	VERTICAL	PASSED
1175	24.70	0.295	-21.30	46.00	VERTICAL	PASSED

RBW=3 MHz and VBW=3 MHz

7. FIELD STRENGTH OF SPURIOUS RADIATION

Specification: FCC Part 2.1053

7.1. Setup



7.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.



The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

7.3. Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limit (dBm)
Cellular / PCS	30 – 20000*	-13

- Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

Substitution method according to ANSI/TIA/EIA 603-1 was used for final measurements.



7.4. Detailed Test Results

Test Technician / Engineer	Cindy Trinh
Date of Measurement	22-Feb-06
Temperature	23 to 24°C
Humidity	24 to 27%RH
Test Result	Complies with FCC Part 2.1053

Note: 30MHz to 18GHz were performed with 1MHz RBW/VBW.

CDMA 1900, Channel 600

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3760.523046	-36.60	0.21878	-54.90	18.30	VERTICAL	PASSED
5639.278557	-24.10	3.89045	-44.80	20.70	VERTICAL	PASSED
7521.042084	-40.10	0.09772	-63.20	23.10	HORIZONTAL	PASSED



CFR 47, 24 Test Report

Test Report Number: WR1018.003

Terminal device: FCC ID: QMNRH-90 Model: 2127i Type: RH-90 HW: 7000 SW: R220_03w24_45_34.nep
(Detailed information is listed in section 4).

Originator: Hai To
Function: TCC - Dallas – EMC
Version/Status: 1.0 Approved
Location: QATrax Directories
Date: 24-Feb-06

Change History:

Version	Date	Status	Handled By	Comments
0.1	23-Feb-06	Draft	Hai To	
0.2	23-Feb-06	Proposal	Hai To	
0.3	24-Feb-06	Reviewed	Viet Do	
1.0	24-Feb-06	Approved	Viet Do	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.

Tel. 972-894-5000

Client:

Nokia Inc.
San Diego
12278 Script Summit Drive.
San Diego, Ca 92131
USA
Tel. +1858 831 5000
Fax. +1858 8316500

Date and signatures:**24-Feb-06**

For the contents:

Hai To
Test Operator

Viet Do
Technical Review



TABLE OF CONTENTS

1. GENERAL	4
1.1 QUALITY SYSTEM	4
1.2 OBJECTIVE	4
1.3 TEST SUMMARY	4
2. STANDARDS BASIS	5
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	6
3.1 ABBREVIATIONS	6
3.2 ACRONYMS	6
3.3 TERMS	6
4. EQUIPMENT-UNDER-TEST (EUT)	7
4.1 DESCRIPTION OF TESTED DEVICE(S)	7
4.2 PHOTOGRAPH OF TESTED DEVICE(S)	7
5. TEST EQUIPMENT LIST	8
6. RF POWER OUTPUT (CONDUCTED)	9
6.1 SETUP	9
6.2 PASS/FAIL CRITERIA	9
6.3 DETAILED TEST RESULTS	9
7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)	10
7.1 SETUP	10
7.2 PASS/FAIL CRITERIA	10
7.3 DETAILED TEST RESULTS	10
8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	13
8.1 SETUP	13
8.2 PASS/FAIL CRITERIA	13
8.3 DETAILED TEST RESULTS	13
9. FREQUENCY STABILITY (TEMPERATURE VARIATION)	17
9.1 SETUP	17
9.2 PASS/FAIL CRITERIA	17
9.3 DETAILED TEST RESULTS	17
10. FREQUENCY STABILITY (VOLTAGE VARIATION)	18
10.1 SETUP	18
10.2 PASS/FAIL CRITERIA	18
10.3 DETAILED TEST RESULTS	18

TCC

Test & Certification Center (TCC) - Dallas

Company Confidential

FCC ID: QMNRH-90
Test Report #: WR1018.003
24-Feb-06



Accredited Laboratory
Certificate Number: 1819-01

3 (18)

Ver 1.0

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.



1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661N.

1.2 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, Part 22, and Part 24.

1.3 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
RF Power Output (Conducted)	FCC Part 2.1046(a) /	6	Complies
Occupied Bandwidth: Transmitter Conducted Measurements	FCC Part 2.1049	7	Complies
Spurious Emissions at Antenna Terminals	FCC Part 2.1051	8	Complies
Frequency Stability (Temperature Variation)	FCC Part 2.1055(a)	9	Complies
Frequency Stability (Voltage Variation)	FCC Part 2.1055(d)	10	Complies



2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
3	RSS-129	800 MHz Dual-Mode CDMA Cellular Telephones
4	RSS-132	800 MHz Cellular Telephones Employing New Technologies
5	RSS-133	2 GHz Personal Communications Services, Industry Canada
6	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
7	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.



3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

dB - decibel

dBc - decibels from carrier

dBm - decibels per milliwatt (absolute measurement)

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

3.2 Acronyms

AMPS - Advanced Mobile Phone System

BSS - Base Station Simulator

CDMA - Code Division Multiple Access

EDRP - Effective Dipole Radiated Power

EIRP - Effective Isotropic Radiated Power

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

ERP - Effective Radiated Power

EUT - Equipment under Test

GSM - Global System for Mobile communications

PCS - Personal Communications Services

RF - Radio Frequency

TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.



4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC Part 2.1049 FCC Part 2.1051 FCC Part 2.1055 FCC Part 2.1046	CDMA 1900	21-Feb-06	Working	Phone	FCC ID: QMNRH-90 Type: RH-90 HW: 7000 SW: 220_03w24_45_34.nep ESN: 2 02604483370
FCC Part 2.1049 FCC Part 2.1051 FCC Part 2.1055 FCC Part 2.1046	CDMA 1900	21-Feb-06	Working	Battery	Type: BL-6C Other:

4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS

**5. TEST EQUIPMENT LIST**

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
6,7,8,9,10	N/A	6dB Attenuator	Weinshcel	Model 2	Na	12 months
6,7,8,9,10	02666	Base Station	R&S	CMU200	30 Jun 06	12 months
6,7,8,9,10	02680	EMI Receiver	Agilent	E7405A	01 Jun 06	12 Months
6,7,8,9,10	00087	Synthesized Fun/Sweep Generator	HP	3324A	03 Mar 06	12Months
9,10	00837	Temperature Chamber	Tenney Environmental	N/A	20 Mar 06	12 months



6. RF POWER OUTPUT (CONDUCTED)

Specification: FCC Part 2.1046(a), 22.913(a), 24.232(b)(c)

6.1 Setup

Testing was performed with the EUT connected to a 6dB splitter and then to the RF Power Meter to measure the conducted RF power output. The base station simulator was connected to the other port of the splitter to establish a call.

6.2 Pass/Fail Criteria

Not Applicable

6.3 Detailed Test Results

Test Technician / Engineer	Julian Kim
Date of Measurement	20 Feb 2006
Temperature	24°C
Humidity	37 %RH
Test Result	Was operated at max power and tested in accordance with FCC Part 2.1046(a), 22.913(a), 24.232(b)(c).

CDMA 1900

Channel	Freq Max (MHz)	Max (mW)	Max (dBm)
25	1851.25 MHz	229.1	23.6
600	1880.00 MHz	218.8	23.4
1175	1908.75 MHz	204.8	23.1

7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

Specification: FCC Part 2.1049(c)(1), 24.238(a)(b)

7.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

7.2 Pass/Fail Criteria

Occupied Bandwidth, Out of Band

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular 800, Low Channel	< 824	-13
Cellular 800, High Channel	> 849	-13
PCS 1900, Low Channel	< 1850	-13
PCS 1900, High Channel	> 1910	-13

Occupied Bandwidth, In Band

No pass/fail, these plots are used to determine the emission designators.

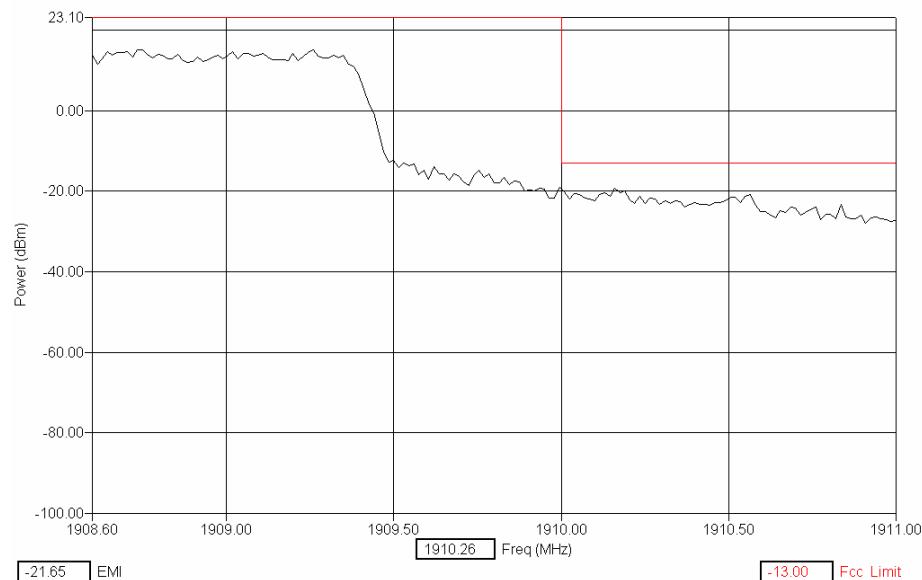
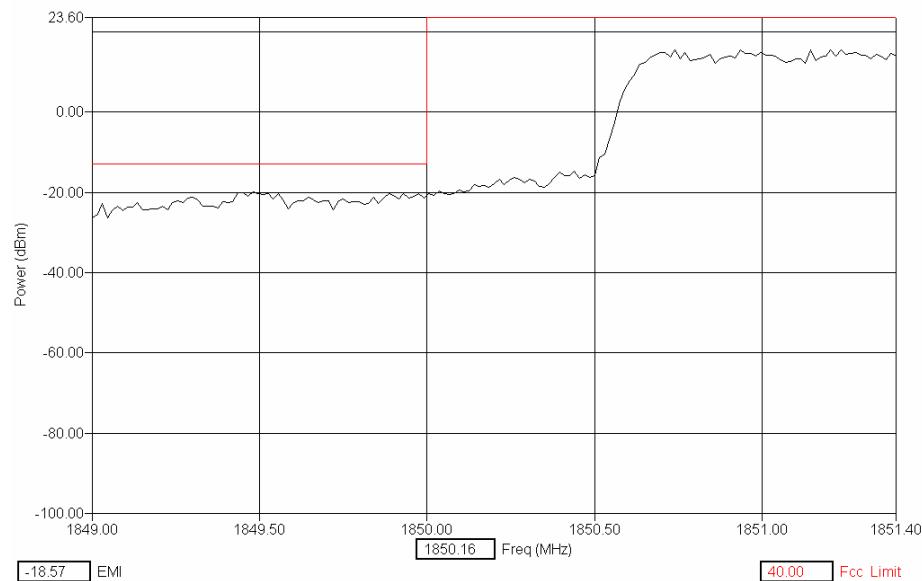
7.3 Detailed Test Results

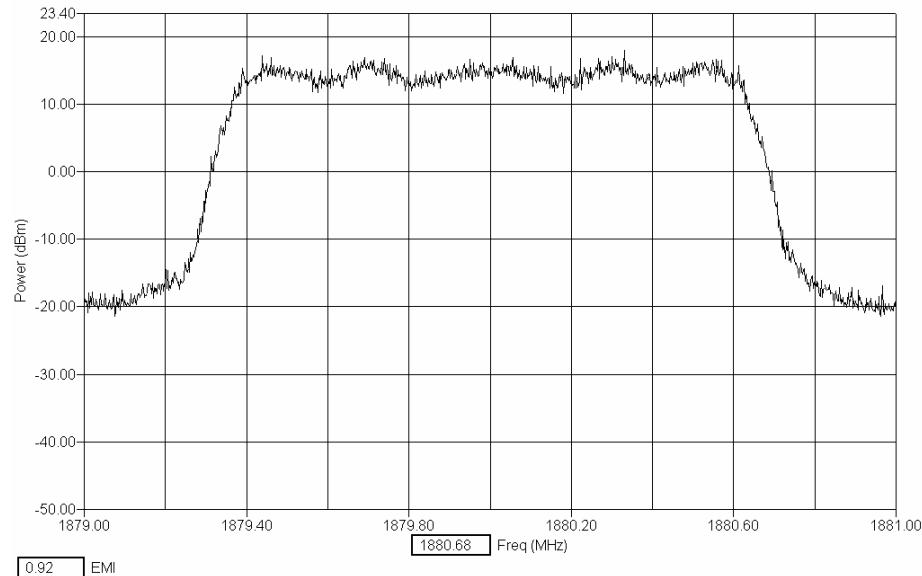
Test Technician / Engineer	Hai To
Date of Measurement	22-Feb-06
Temperature	21°C
Humidity	38%RH
Test Result	Complies with FCC Part 2.1049(c)(1), 24.238(a)(b)

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-90
Test Report #: WR1018.003
24-Feb-06Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

Occupied Bandwidth, Out of Band**CDMA 1900 - Channel 1175 (1908.75 MHz)****CDMA 1900 - Channel 25 (1851.25 MHz)**

**Occupied Bandwidth, In Band****CDMA 1900 - Channel 600**

8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Specification: FCC Part 2.1051

8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

8.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular / PCS	30 – 20000 *	-13

* Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

8.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	02-22-06
Temperature	21 °C
Humidity	37 %RH
Test Result	Complies with FCC Part 2.1051

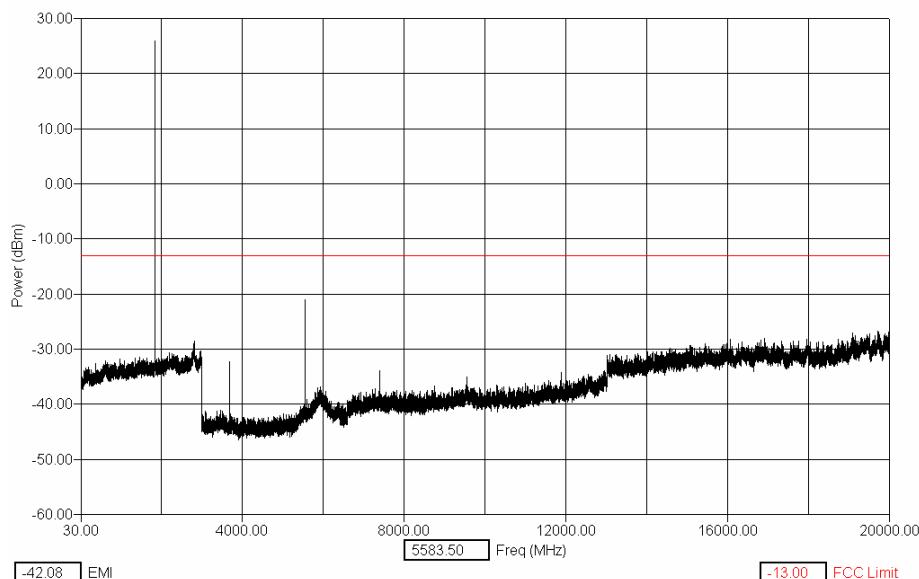
Note 1: EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Note 2: measurements were performed with 3MHz RBW/VBW.

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-90
Test Report #: WR1018.003
24-Feb-06Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

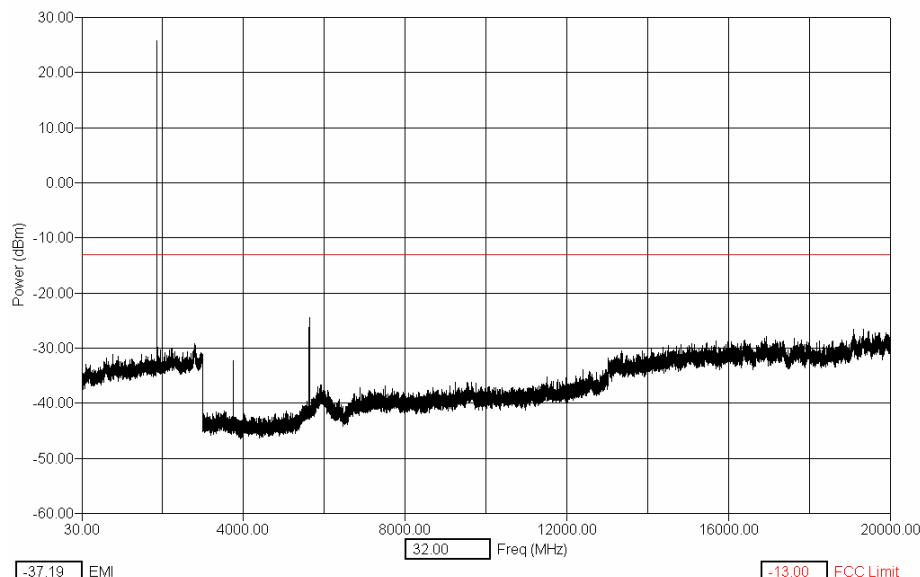
CDMA 1900 - Channel 25, 1851.25 MHz

Freq (Max) [MHz]	(PEAK) Trace [dBm]	Cable [dB]	Filter [dB]	(PEAK) EMI [dBm]	Limit [dBm]
3701.4	-50.7	0.85	16.2	-33.6	-13.0
5552.9	-41.9	1.13	18.4	-22.3	-13.0
7404.1	-56.2	1.32	18.4	-36.5	-13.0
9258.1	-62.1	1.48	19.5	-41.1	-13.0
11107.7	-62.3	1.60	20.2	-40.5	-13.0
12958.0	-62.6	1.71	22.6	-38.2	-13.0
14809.9	-59.5	1.80	22.8	-35.0	-13.0
16662.3	-60.2	1.88	23.8	-34.6	-13.0
18511.6	-61.3	1.95	24.9	-34.5	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-90
Test Report #: WR1018.003
24-Feb-06Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

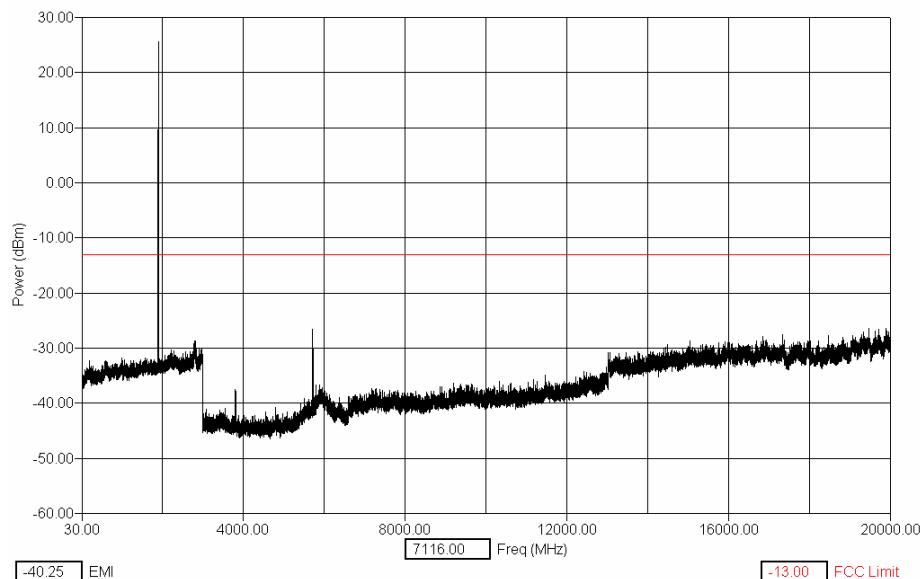
CDMA 1900 - Channel 600, 1880.00 MHz

Freq (Max) (MHz)	(PEAK) Trace (dBm)	Cable (dB)	Filter (dB)	(PEAK) EMI (dBm)	Limit (dBm)
3760.1	-51.8	0.86	16.8	-34.2	-13.0
5639.1	-45.8	1.14	18.5	-26.2	-13.0
7519.9	-58.2	1.34	18.1	-38.7	-13.0
9400.2	-61.3	1.49	18.9	-40.9	-13.0
11279.3	-63.3	1.61	20.2	-41.5	-13.0
13158.3	-63.0	1.72	21.8	-39.5	-13.0
15039.9	-58.9	1.81	23.7	-33.4	-13.0
16920.2	-59.1	1.89	25.0	-32.2	-13.0
18801.5	-59.5	1.96	25.1	-32.4	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-90
Test Report #: WR1018.003
24-Feb-06Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

CDMA 1900 - Channel 1175, 1908.75 MHz

Freq (Max) (MHz)	(PEAK) Trace (dBm)	Cable (dB)	Filter (dB)	(PEAK) EMI (dBm)	Limit (dBm)
3818.1	-57.9	0.87	16.7	-40.3	-13.0
5726.4	-48.3	1.15	19.4	-27.8	-13.0
7636.0	-59.5	1.35	18.0	-40.2	-13.0
9542.7	-62.2	1.50	20.3	-40.4	-13.0
11451.0	-62.8	1.62	20.5	-40.6	-13.0
13362.9	-59.0	1.73	22.0	-35.2	-13.0
15268.6	-59.0	1.82	23.3	-33.9	-13.0
17178.2	-59.7	1.90	24.3	-33.6	-13.0
19087.3	-60.7	1.97	26.3	-32.5	-13.0



9. FREQUENCY STABILITY (TEMPERATURE VARIATION)

Specification: FCC Part 2.1055(a)(1)(b), 24.235

9.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

9.2 Pass/Fail Criteria

Not Applicable

9.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	23-Feb-06
Temperature	21°C
Humidity	37 %RH
Test Result	Tested in accordance with 2.1055(a)(1)(b), 24.235 at maximum power setting.

Temp. (°C)	CDMA 1900, Channel 600
	Change (Hz)
-30	31
-20	31
-10	27
0	28
10	28
20	28
30	30
40	31
50	27

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRH-90
Test Report #: WR1018.003
24-Feb-06Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

10. FREQUENCY STABILITY (VOLTAGE VARIATION)

Specification: FCC Part 2.1055(d)(1)(2), 24.235

10.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

10.2 Pass/Fail Criteria

Not Applicable

10.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	22-Feb-06
Temperature	24 °C
Humidity	37 %RH
Test Result	Tested in accordance with 2.1055(d)(1)(2), 24.235 at maximum power setting.

CDMA 1900, Call Mode, Channel 600

% of STV	Voltage	Change (Hz)
85	4.2	41
100 (Nominal)	3.7	34
115	3.2	32