



CFR 47 Part 22, 24 Test Report

Test Report Number: WR1124.201

Terminal device: FCC ID: QMNRM-155 Model: 2365i HW: B3.0 SW: PR100_05w21_46
(Detailed information is listed in section 4).

Originator: Hai To
Function: TCC - Dallas – EMC
Version/Status: 2.0 Approved
Location: QATrax Directories
Date: 26-Jun-06

Change History:

Version	Date	Status	Handled By	Comments
0.1	5-Jun-06	Draft	Hai To	
0.2	5-Jun-06	Proposal	Hai To	
0.3	6-Jun-06	Reviewed	Viet Do	
1.0	6-Jun-06	Approved	Viet Do	
1.1	26-Jun-06	Draft	Hai To	
2.0	26-Jun-06	Approved	Cindy Trinh	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.

Tel. 972-894-5000

Client:

Nokia Inc.
San Diego
12278 Script Summit Drive.
San Diego, Ca 92131
USA
Tel. +1858 831 5000
Fax. +1858 8316500

Date and signatures:

26-Jun-06

For the contents:

Hai To
Test Engineer

Cindy Trinh
Technical Review



TABLE OF CONTENTS

1. GENERAL	4
1.1 QUALITY SYSTEM	4
1.2 OBJECTIVE	4
1.3 TEST SUMMARY	4
2. STANDARDS BASIS	5
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	6
3.1 ABBREVIATIONS	6
3.2 ACRONYMS	6
3.3 TERMS	6
4. EQUIPMENT-UNDER-TEST (EUT)	7
4.1 DESCRIPTION OF TESTED DEVICE(S)	7
4.2 PHOTOGRAPH OF TESTED DEVICE(S)	7
5. TEST EQUIPMENT LIST	8
6. RF POWER OUTPUT (CONDUCTED)	9
6.1 SETUP	9
6.2 PASS/FAIL CRITERIA	9
6.3 DETAILED TEST RESULTS	9
7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)	10
7.1 SETUP	10
7.2 PASS/FAIL CRITERIA	10
7.3 DETAILED TEST RESULTS	10
8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	15
8.1 SETUP	15
8.2 PASS/FAIL CRITERIA	15
8.3 DETAILED TEST RESULTS	15
9. EMISSIONS IN RECEIVER CRITICAL BAND	22
9.1 SETUP	22
9.2 PASS/FAIL CRITERIA	22
9.3 DETAILED TEST RESULTS	22
10. FREQUENCY STABILITY (TEMPERATURE VARIATION)	25
10.1 SETUP	25
10.2 PASS/FAIL CRITERIA	25
10.3 DETAILED TEST RESULTS	25
11. FREQUENCY STABILITY (VOLTAGE VARIATION)	26
11.1 SETUP	26
11.2 PASS/FAIL CRITERIA	26
11.3 DETAILED TEST RESULTS	26

TCC

Test & Certification Center (TCC) - Dallas

Company Confidential

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06



Accredited Laboratory
Certificate Number: 1819-01

3 (26)

Ver 2.0

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.



1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661N.

1.2 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, Part 22, and Part 24.

1.3 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
RF Power Output (Conducted)	FCC Part 2.1046	6	Complies
Occupied Bandwidth: Transmitter Conducted Measurements	FCC Part 2.1049	7	Complies
Spurious Emissions at Antenna Terminals	FCC Part 2.1051	8	Complies
Emission In Receiver Critical Band	FCC 22.917	9	Complies
Frequency Stability (Temperature Variation)	FCC Part 2.1055(a)	10	Complies
Frequency Stability (Voltage Variation)	FCC Part 2.1055(d)	11	Complies

2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 2	Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures
3	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
4	RSS-129	800 MHz Dual-Mode CDMA Cellular Telephones
5	RSS-132	800 MHz Cellular Telephones Employing New Technologies
6	RSS-133	2 GHz Personal Communications Services, Industry Canada
7	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
8	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.



3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

dB - decibel

dBc - decibels from carrier

dBm - decibels per milliwatt (absolute measurement)

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

3.2 Acronyms

AMPS - Advanced Mobile Phone System

BSS - Base Station Simulator

CDMA - Code Division Multiple Access

EDRP - Effective Dipole Radiated Power

EIRP - Effective Isotropic Radiated Power

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

ERP - Effective Radiated Power

EUT - Equipment under Test

GSM - Global System for Mobile communications

PCS - Personal Communications Services

RF - Radio Frequency

TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.



4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC Part 2.1049 FCC Part 2.1051 FCC Part 22.917 FCC Part 2. 1055 FCC Part 2. 1046	CDMA 800/1900	5-Jun-06	Working	Phone	FCC ID: QMNRM-155 Type: RM-155 Model: 2365i HW: B3.0 SW: PR100_05w21_46 ESN:02601180557
FCC Part 2.1046 FCC Part 2.1049 FCC Part 2.1051 FCC Part 22.917 FCC Part. 2. 1055	CDMA 800/1900	5-Jun-06	Working	Battery	Type: BL-5b

4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS



5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
6,7,8	N/A	6dB Attenuator	Weinshcel	Model 2	Na	12 months
6,7,8,9,10,11	03461	Base Station	R&S	CMU200	6-Sept 06	12 months
6,7,8,9,10,11	02679	EMI Receiver	HP	E7405A	6-Sept-07	12 Months
10,11	00837	Temperature Chamber	Tenney Environmental	N/A	20 Oct-06	12 months



6. RF POWER OUTPUT (CONDUCTED)

Specification: FCC Part 2.1046(a), 22.913(a), 24.232(b)(c)

6.1 Setup

Testing was performed with the EUT connected to a 6dB splitter and then to the RF Power Meter to measure the conducted RF power output. The base station simulator was connected to the other port of the splitter to establish a call.

6.2 Pass/Fail Criteria

Not Applicable

6.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	31-May-06
Temperature	24°C
Humidity	27 %RH
Test Result	Was operated at max power and tested in accordance with FCC Part 2.1046(a), 22.913(a), 24.232(b)(c).

Note: RF Conducted measurements were performed with, Average Power reading.

CDMA 800

Channel	Freq Max (MHz)	Max (mW)	Max (dBm)
1013	824.70 MHz	213.8	23.3
384	836.52 MHz	208.9	23.2
777	848.31 MHz	213.8	23.3

CDMA 1900

Channel	Freq Max (MHz)	Max (mW)	Max (dBm)
25	1851.25 MHz	199.5	23.0
600	1880.00 MHz	204.2	23.1
1175	1908.75 MHz	199.5	23.0



7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

Specification: FCC Part 2.1049(c)(1), 24.238(a)(b)

7.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

7.2 Pass/Fail Criteria

Occupied Bandwidth, Out of Band

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular 800, Low Channel	< 824	-13
Cellular 800, High Channel	> 849	-13
PCS 1900, Low Channel	< 1850	-13
PCS 1900, High Channel	> 1910	-13

Occupied Bandwidth, In Band

No pass/fail, these plots are used to determine the emission designators.

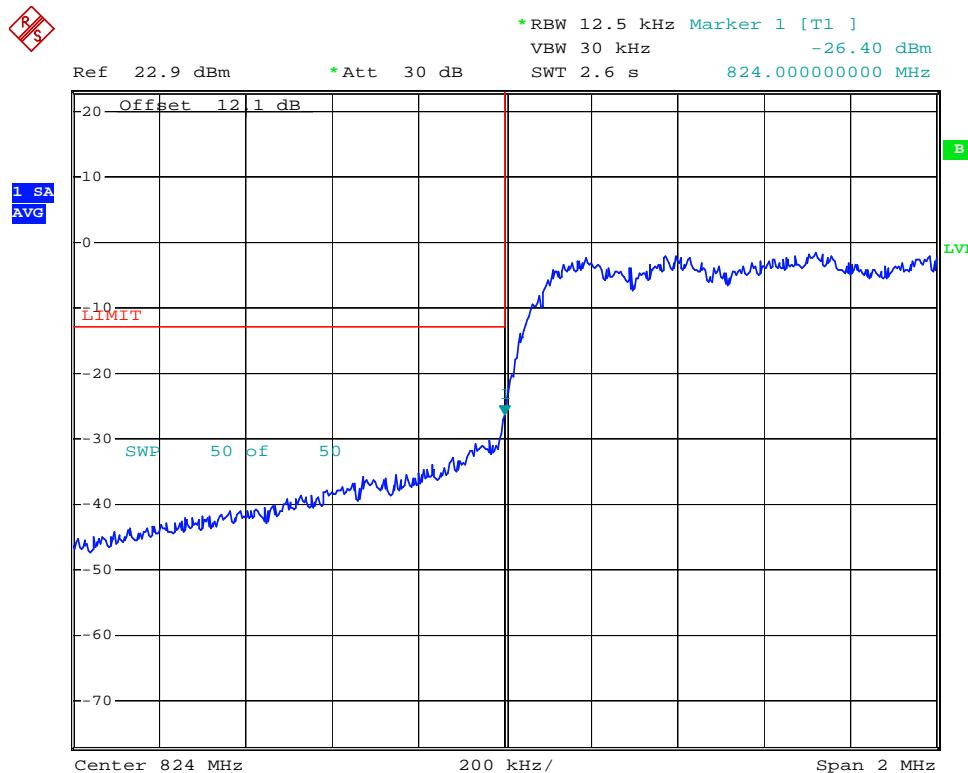
7.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	6-Jun-06
Temperature	23 °C
Humidity	46 %RH
Test Result	Complies with FCC Part 2.1049(c)(1), 24.238(a)(b)

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

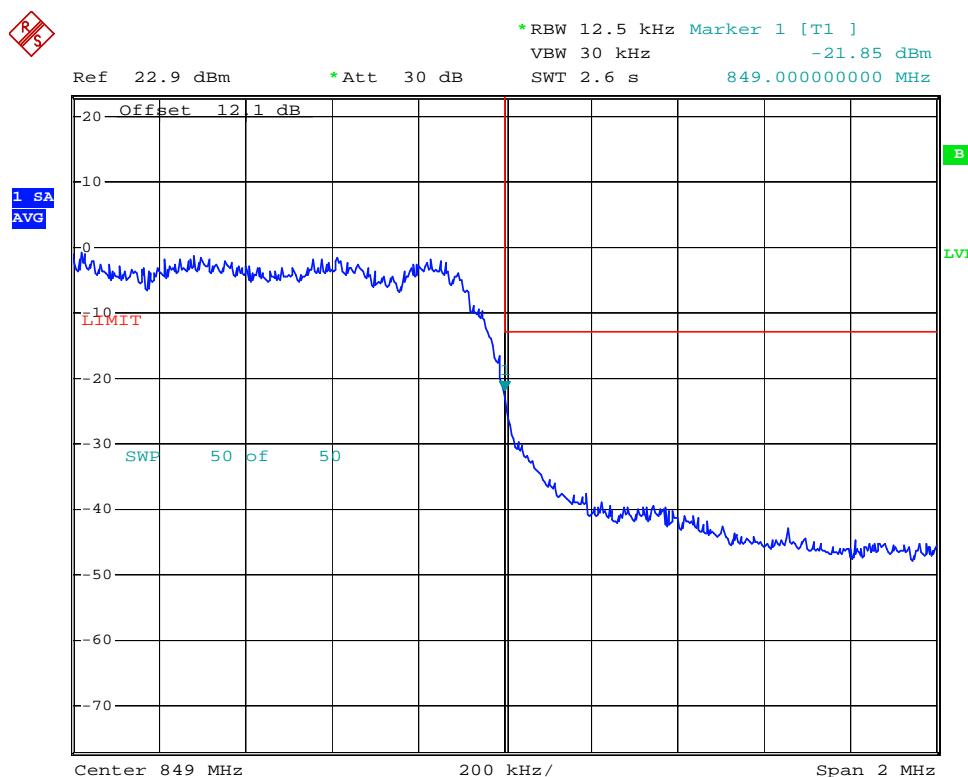
Occupied Bandwidth, Out of Band**CDMA 800 - Channel 1013 (824.70 MHz)**

Date: 6.JUN.2006 16:36:13

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

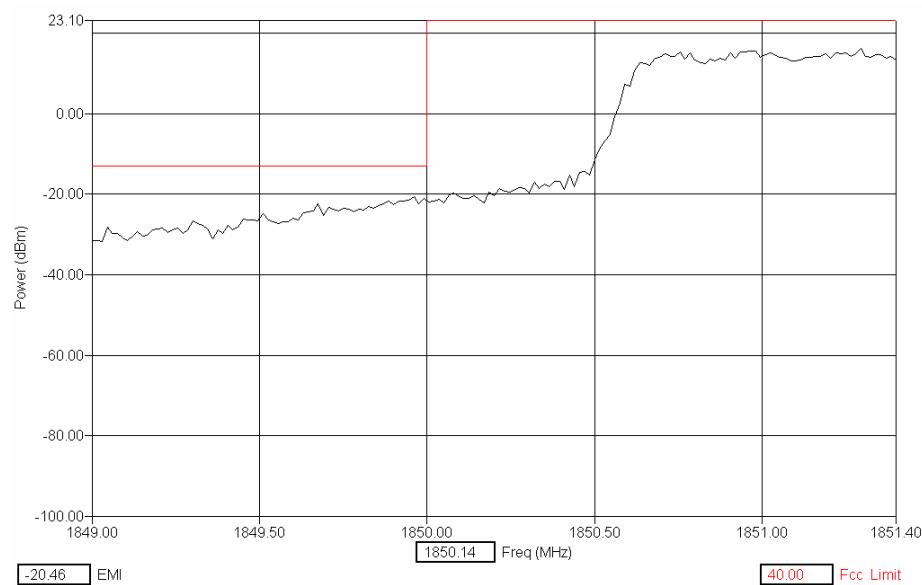
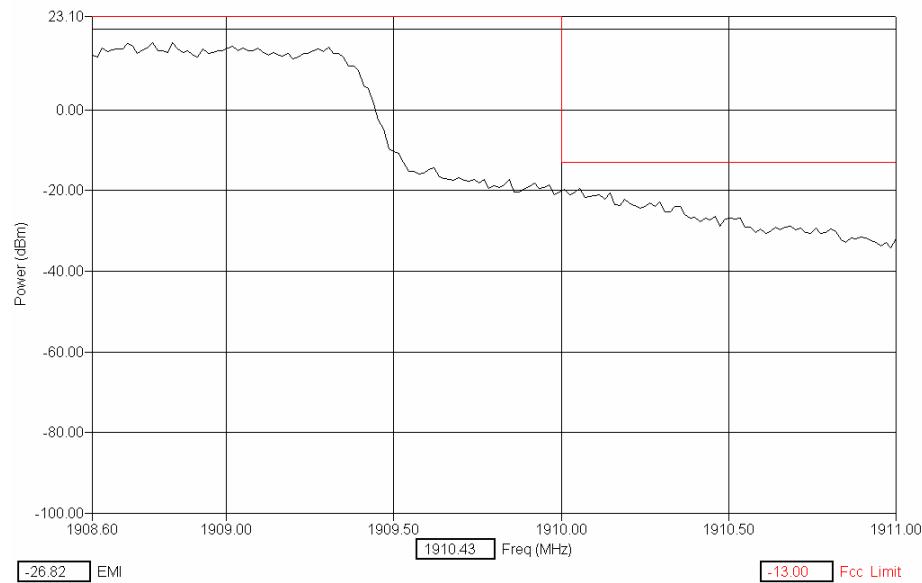
CDMA 800 – Channel 777 (848.31 MHz)

Date: 6.JUN.2006 16:30:55

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

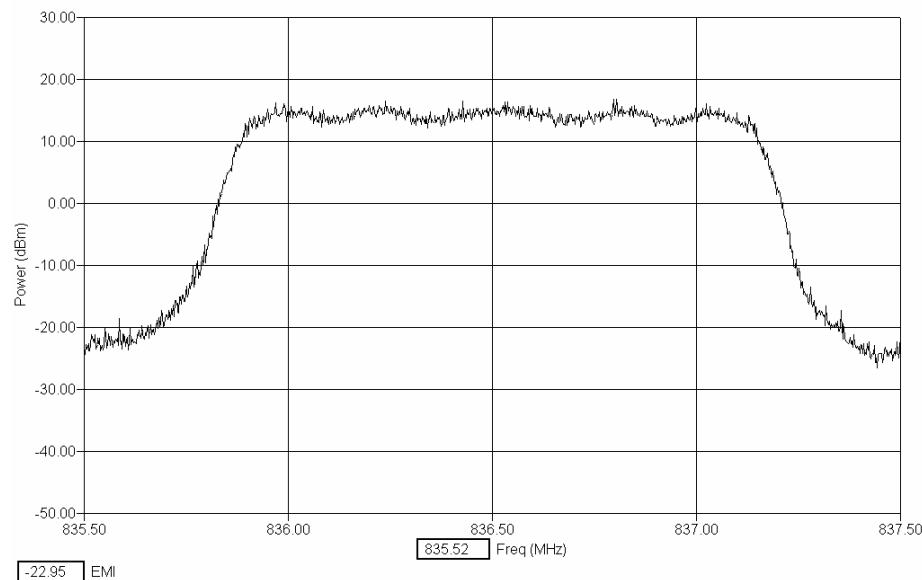
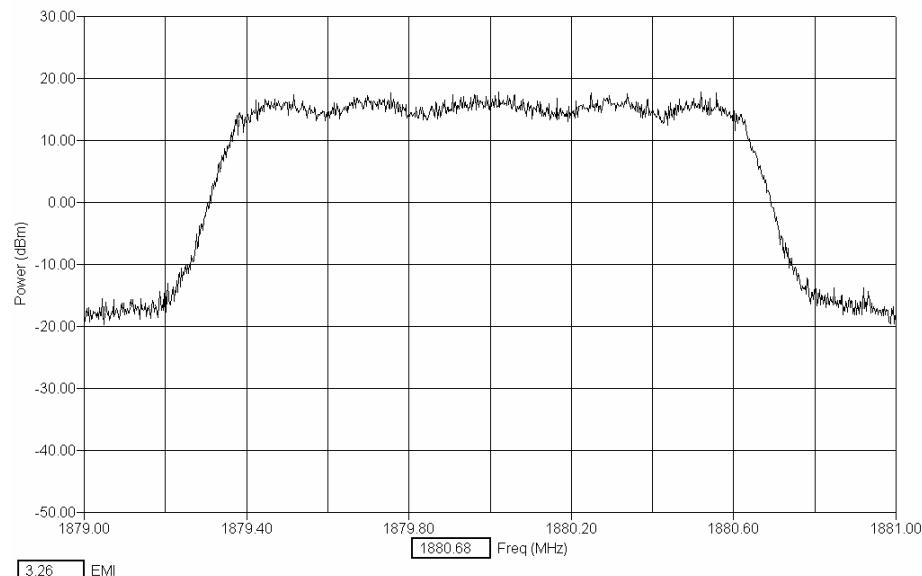
Ver 2.0

CDMA 1900 – Channel 25 (1851.25 MHz)**CDMA 1900 – Channel 1175 (1908.75)**

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

Occupied Bandwidth, In Band**CDMA 800 - Channel 384****30KHz RBW/VBW****CDMA 1900 - Channel 600**

8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Specification: FCC Part 2.1051

8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

8.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular / PCS	30 – 20000 *	-13

* Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

8.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	5-Jun-06
Temperature	24 °C
Humidity	46 %RH
Test Result	Complies with FCC Part 2.1051

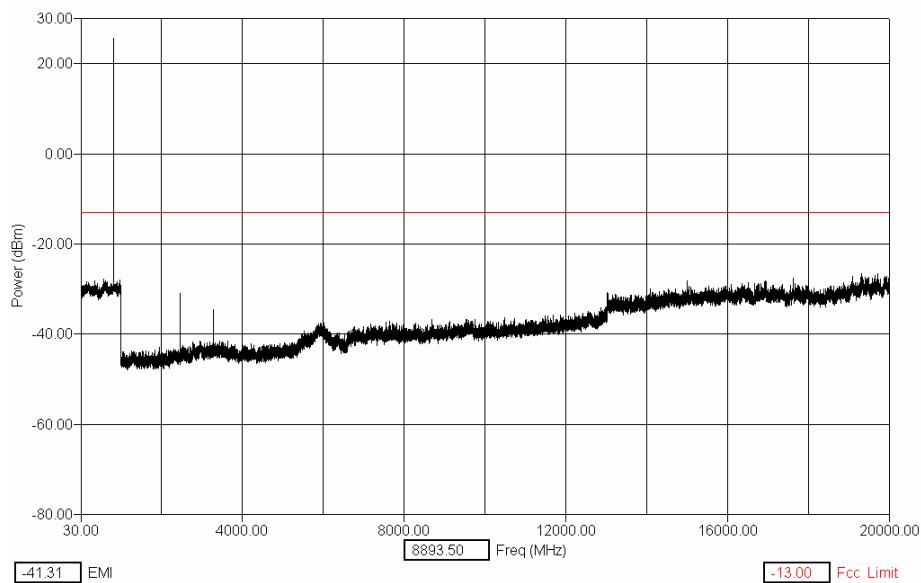
Note 1: EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Note 2: measurements were performed with 3MHz RBW/VBW.

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

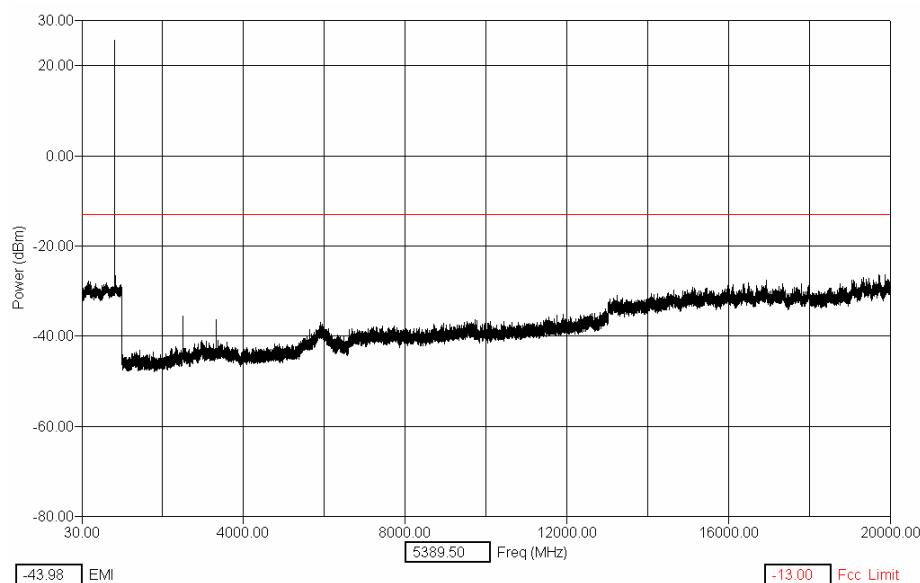
CDMA 800 - Channel 1013, 824.70 MHz

Freq (Max) (MHz)	(PEAK) Trace (dBm)	Cable (dB)	Filter (dB)	(PEAK) EMI (dBm)	Limit (dBm)
1651.0	-64.8	0.4	14.67	-49.8	-13.0
2474.1	-47.7	0.6	15.46	-31.7	-13.0
3299.6	-55.3	0.8	15.98	-38.6	-13.0
4122.9	-64.9	0.9	16.09	-47.9	-13.0
4947.6	-64.6	1.1	17.03	-46.5	-13.0
5773.9	-66.3	1.2	19.98	-45.1	-13.0
6597.6	-63.1	1.2	18.06	-43.8	-13.0
7421.4	-62.3	1.3	17.98	-43.0	-13.0
8246.9	-63.1	1.4	18.97	-42.7	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

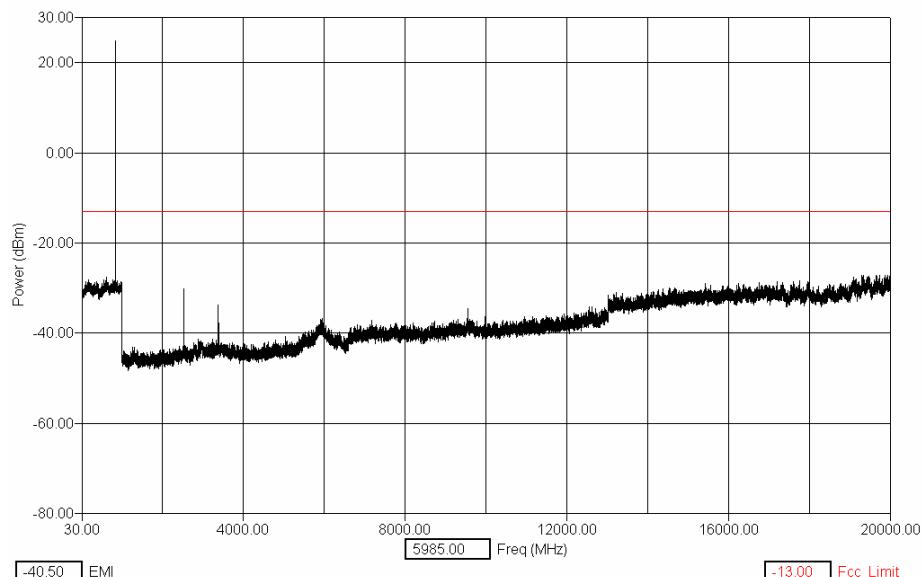
CDMA 800 - Channel 384, 836.52 MHz

Freq (Max) (MHz)	(PEAK) Trace (dBm)	Cable (dB)	Filter (dB)	(PEAK) EMI (dBm)	Limit (dBm)
1674.7	-64.6	0.4	14.60	-49.6	-13.0
2509.4	-53.3	0.6	15.65	-37.1	-13.0
3345.3	-56.7	0.8	16.10	-39.8	-13.0
4183.7	-65.0	0.9	16.12	-47.9	-13.0
5019.4	-65.1	1.1	17.16	-46.9	-13.0
5856.9	-66.3	1.2	21.33	-43.9	-13.0
6691.3	-64.7	1.3	17.75	-45.7	-13.0
7526.8	-62.1	1.3	18.06	-42.7	-13.0
8366.7	-62.5	1.4	19.00	-42.1	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

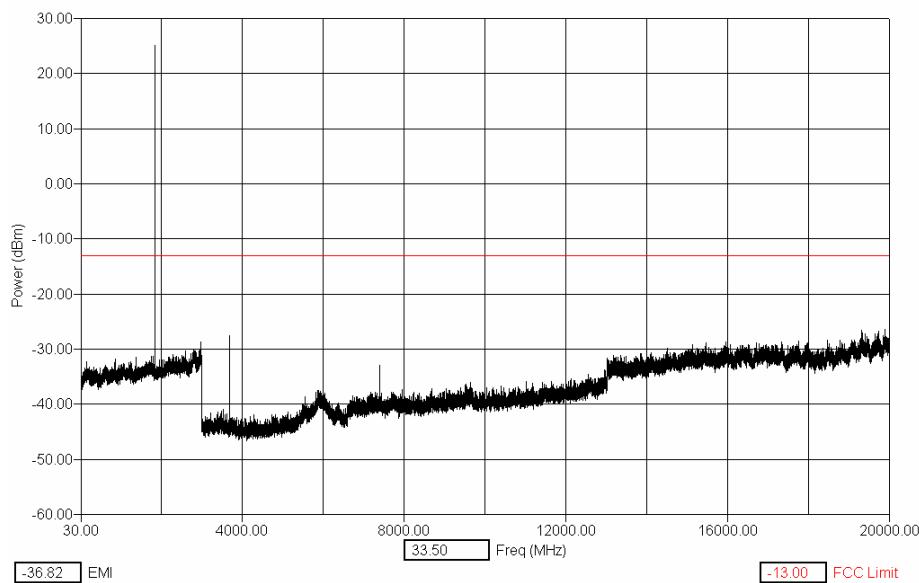
CDMA 800 - Channel 777, 848.31 MHz

Freq (Max) (MHz)	(PEAK) Trace (dBm)	Cable (dB)	Filter (dB)	(PEAK) EMI (dBm)	Limit (dBm)
1695.6	-63.3	0.4	14.59	-48.4	-13.0
2543.8	-48.6	0.6	15.53	-32.5	-13.0
3392.3	-52.5	0.8	16.05	-35.7	-13.0
4243.4	-66.5	0.9	16.35	-49.2	-13.0
5089.6	-64.0	1.1	17.26	-45.7	-13.0
5938.2	-63.7	1.2	22.09	-40.5	-13.0
6786.8	-61.9	1.3	17.96	-42.7	-13.0
7636.0	-61.1	1.3	17.98	-41.8	-13.0
8482.7	-62.3	1.4	18.53	-42.4	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

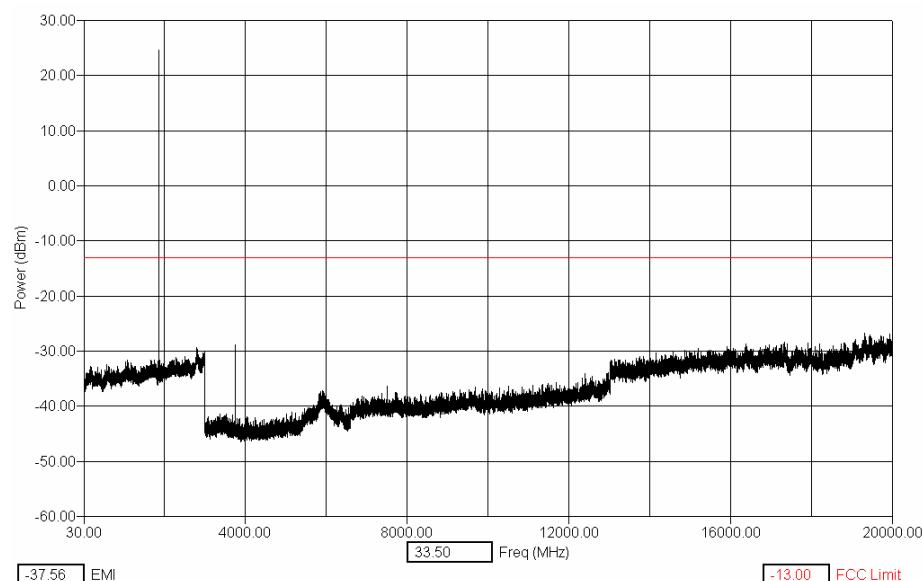
CDMA 1900 - Channel 25, 1851.25 MHz

Freq (Max) [MHz]	(PEAK) Trace [dBm]	Cable [dB]	Filter [dB]	(PEAK) EMI [dBm]	Limit [dBm]
3701.7	-46.9	0.85	16.2	-29.8	-13.0
5554.5	-62.5	1.13	18.4	-42.9	-13.0
7404.8	-56.6	1.32	18.4	-37.0	-13.0
9256.4	-63.2	1.48	19.5	-42.2	-13.0
11108.7	-64.0	1.60	20.2	-42.1	-13.0
12957.4	-62.5	1.71	22.6	-38.2	-13.0
14809.0	-59.4	1.80	22.8	-34.9	-13.0
16661.6	-59.3	1.88	23.8	-33.7	-13.0
18513.8	-60.3	1.95	24.9	-33.5	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

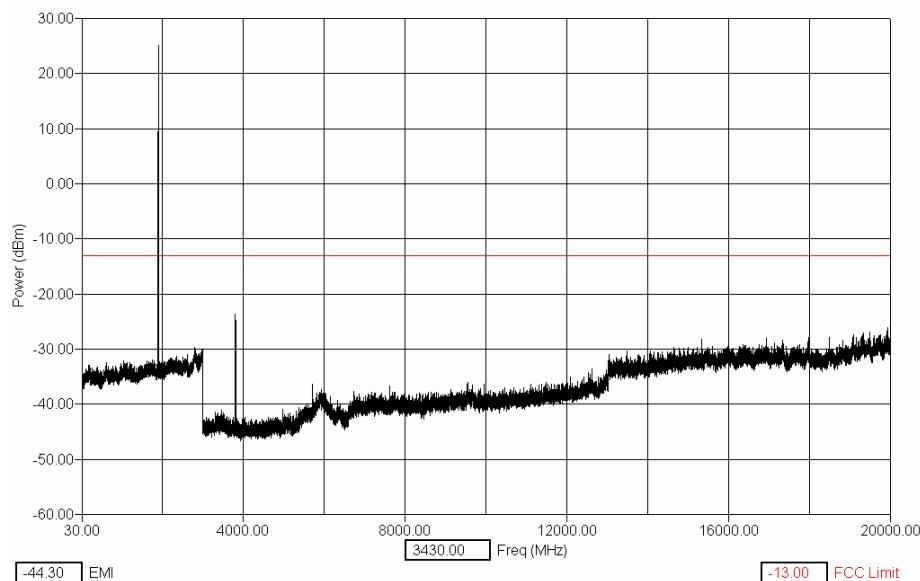
CDMA 1900 - Channel 600, 1880.00 MHz

Freq (Max) [MHz]	(PEAK) Trace [dBm]	Cable [dB]	Filter [dB]	(PEAK) EMI [dBm]	Limit [dBm]
3759.2	-47.5	0.86	16.8	-29.9	-13.0
5640.2	-64.4	1.14	18.5	-44.7	-13.0
7520.2	-57.6	1.34	18.1	-38.2	-13.0
9398.1	-63.5	1.49	18.9	-43.0	-13.0
11279.8	-63.6	1.61	20.2	-41.8	-13.0
13159.6	-61.8	1.72	21.8	-38.3	-13.0
15039.8	-59.4	1.81	23.7	-33.9	-13.0
16920.3	-57.6	1.89	25.0	-30.7	-13.0
18798.6	-59.9	1.96	25.1	-32.9	-13.0

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

CDMA 1900 - Channel 1175, 1908.75 MHz

Freq (Max) [MHz]	(PEAK) Trace [dBm]	Cable [dB]	Filter [dB]	(PEAK) EMI [dBm]	Limit [dBm]
3816.7	-41.8	0.87	16.7	-24.2	-13.0
5725.6	-59.0	1.15	19.4	-38.5	-13.0
7636.5	-62.6	1.35	18.0	-43.3	-13.0
9544.7	-63.1	1.50	20.3	-41.3	-13.0
11451.5	-63.4	1.62	20.5	-41.3	-13.0
13363.1	-60.1	1.73	22.0	-36.3	-13.0
15270.2	-60.7	1.82	23.3	-35.7	-13.0
17177.9	-59.1	1.90	24.3	-33.0	-13.0
19087.4	-60.9	1.97	26.3	-32.6	-13.0

9. EMISSIONS IN RECEIVER CRITICAL BAND

Specification: FCC Part 22.917(f)

9.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

9.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular	869 - 894	-80

9.3 Detailed Test Results

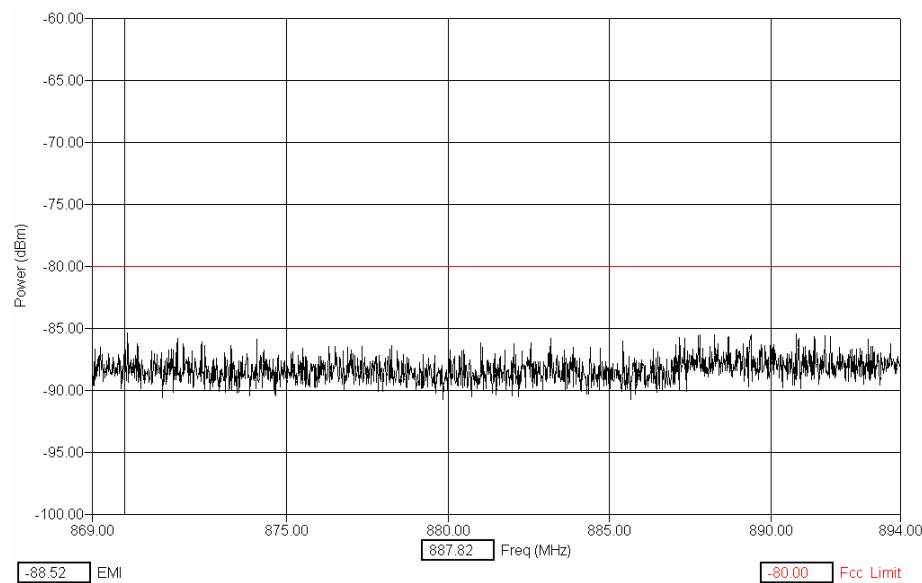
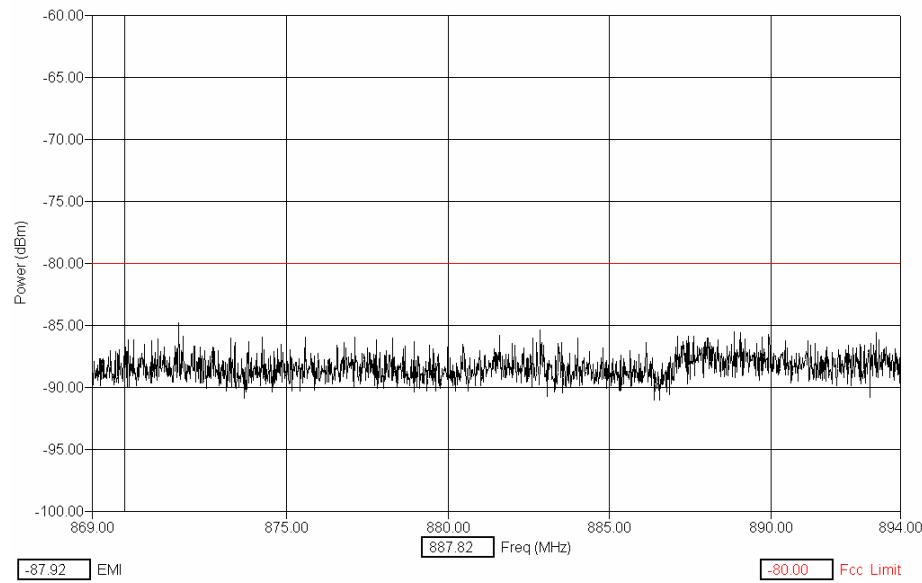
Test Technician / Engineer	Hai To
Date of Measurement	6-Jun-06
Temperature	22 °C
Humidity	41 %RH
Test Result	Complies with FCC Part 22.917(f)

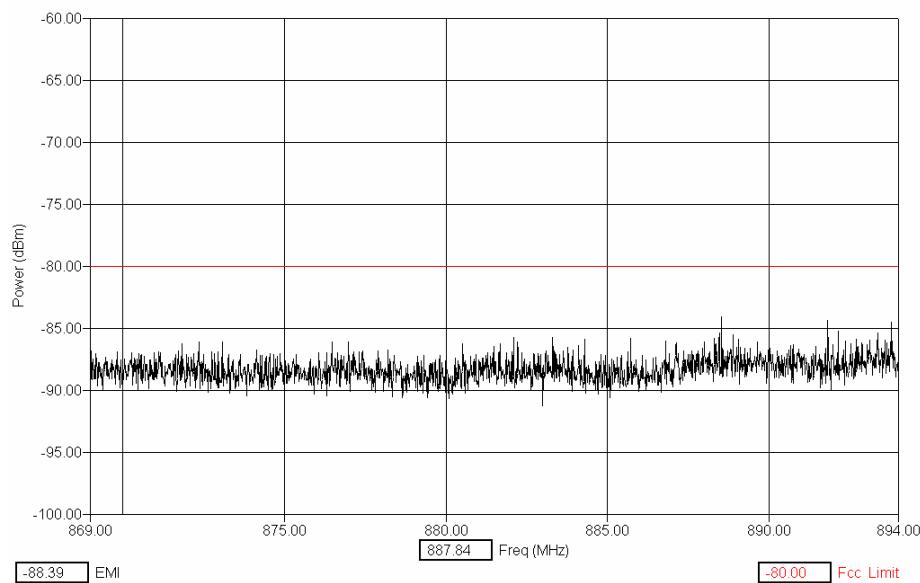
Note1: Measurements were performed with 30 kHz RBW/VBW, 100ms Sweep Time.

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-155
Test Report #: WR1124.201
26-Jun-06Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

CDMA 800, Channel 1013**CDMA 800, Channel 384**

Accredited Laboratory
Certificate Number: 1819-01**CDMA 800, Channel 777**



10. FREQUENCY STABILITY (TEMPERATURE VARIATION)

Specification: FCC Part 2.1055(a)(1)(b), 24.235

10.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

10.2 Pass/Fail Criteria

Not Applicable

10.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	15-Jun-06
Temperature	22°C
Humidity	44 %RH
Test Result	Tested in accordance with 2.1055(a)(1)(b), 24.235 at maximum power setting.

Temp. (°C)	CDMA 800, Channel 384	CDMA 1900, Channel 600
	Change (Hz)	Change (Hz)
-30	13	24
-20	10	25
-10	12	25
0	12	26
10	13	25
20	12	26
30	13	25
40	12	25
50	13	25

11. FREQUENCY STABILITY (VOLTAGE VARIATION)

Specification: FCC Part 2.1055(d)(1)(2), 24.235

11.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

11.2 Pass/Fail Criteria

Not Applicable

11.3 Detailed Test Results

Test Technician / Engineer	Hai To
Date of Measurement	15-Jun-06
Temperature	22 °C
Humidity	44 %RH
Test Result	Tested in accordance with 2.1055(d)(1)(2), 24.235 at maximum power setting.

CDMA 800, Call Mode, Channel 384

% of STV	Voltage	Change (Hz)
85	3.2	15
100 (Nominal)	3.7	15
115	4.2	16

CDMA 1900, Call Mode, Channel 600

% of STV	Voltage	Change (Hz)
85	3.2	17
100 (Nominal)	3.7	16
115	4.2	19