

**SAR Compliance Test Report**

<b>Test report no.:</b>	WR480.001	<b>Date of report:</b>	24-Jan-05
<b>Template version:</b>	3	<b>Number of pages:</b>	23
<b>Testing laboratory:</b>	Test & Certification Center (TCC) Dallas Nokia, Inc. 6021 Connection Drive Irving, TX 75039, USA Tel. +1 972 894 5000 Fax +1 972 894 4988	<b>Client:</b>	Nokia, Inc. 12278 Scripps Summit Dr. San Diego, CA 92131 Tel. +1 858 831 5955 Fax +1 858 831 6500
<b>Responsible test engineer:</b>	Jesse Torres	<b>Product contact person:</b>	Willie Williams
<b>Measurements made by:</b>	Cindy Trinh		
<b>Tested device:</b>	RM-18		
<b>FCC ID:</b>	QMNRM-18	<b>IC:</b>	661X-RM18
<b>Supplement reports:</b>	-		
<b>Testing has been carried out in accordance with:</b>	<p><b>47CFR §2.1093</b> Radiofrequency Radiation Exposure Evaluation: Portable Devices</p> <p><b>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p><b>RSS-102</b> Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields</p> <p><b>IEEE 1528 - 2003</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p>		
<b>Documentation:</b>	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Dallas.		
<b>Test results:</b>	<p><b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.</p>		

**Date and signatures:**

24-Jan-05

For the contents:

Nerina Walton  
Lab ManagerJesse Torres  
Test Engineer

SAR Report

Type: RM-18

WR480.001

Applicant: Nokia, Inc.

Copyright © 2005 TCC Dallas



---

**CONTENTS**

<b>1. SUMMARY OF SAR TEST REPORT.....</b>	<b>3</b>
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration.....	3
1.2.3 Maximum Drift .....	4
1.2.4 Measurement Uncertainty .....	4
<b>2. DESCRIPTION OF THE DEVICE UNDER TEST.....</b>	<b>5</b>
2.1 PICTURE OF THE DEVICE.....	5
2.2 DESCRIPTION OF THE ANTENNA.....	5
<b>3. TEST CONDITIONS .....</b>	<b>6</b>
3.1 TEMPERATURE AND HUMIDITY.....	6
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER .....	6
<b>4. DESCRIPTION OF THE TEST EQUIPMENT .....</b>	<b>7</b>
4.1 MEASUREMENT SYSTEM AND COMPONENTS .....	7
4.1.1 Isotropic E-field Probe SN1504.....	8
4.2 PHANTOMS .....	9
4.3 SIMULATING LIQUIDS .....	9
4.3.1 Liquid Recipes.....	9
4.3.2 Verification of the System.....	10
4.3.3 Tissue Simulants used in the Measurements.....	11
<b>5. DESCRIPTION OF THE TEST PROCEDURE .....</b>	<b>12</b>
5.1 DEVICE HOLDER.....	12
5.2 TEST POSITIONS.....	13
5.2.1 Against Phantom Head.....	13
5.2.2 Body Worn Configuration .....	14
5.3 SCAN PROCEDURES.....	15
5.4 SAR AVERAGING METHODS.....	15
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>16</b>
<b>7. RESULTS .....</b>	<b>17</b>
<b>APPENDIX A: VALIDATION SCANS .....</b>	<b>20</b>
<b>APPENDIX B: MEASUREMENT SCANS.....</b>	<b>21</b>
<b>APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S) .....</b>	<b>22</b>
<b>APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S) .....</b>	<b>23</b>

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

Period of test	04-Jan-05 to 17-Jan-05
SN, HW and SW numbers of tested device	SN: 044/00485679 HW: B3.5 SW: L100_04w43_01.nbp
Batteries used in testing	BL-6C
Headsets used in testing	HS-3, HS-9
Other accessories used in testing	DTS-64 (MMC)
State of sample	Prototype unit
Notes	-

### 1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

#### 1.2.1 Head Configuration

Mode	Ch / f(MHz)	Conducted Power	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
CDMA800	777 / 848.31	25.1 dBm	Left Tilt	1.6 W/kg	0.89 W/kg	PASSED
CDMA1900	600 / 1880.00	23.0 dBm	Left Tilt	1.6 W/kg	1.20 W/kg	PASSED

#### 1.2.2 Body Worn Configuration

Mode	Ch / f(MHz)	Conducted Power	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
CDMA800	777 / 848.31	25.1 dBm	2.2 cm	1.6 W/kg	0.84 W/kg	PASSED
CDMA1900	25 / 1851.25	23.1 dBm	2.2 cm	1.6 W/kg	0.67 W/kg	PASSED



Accredited Laboratory  
Certificate Number: 1819-01

---

### 1.2.3 Maximum Drift

Maximum drift during measurements	0.24 dB
-----------------------------------	---------

### 1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	± 29.8 %
--------------------------------	----------

---

**2. DESCRIPTION OF THE DEVICE UNDER TEST**

Device category	Portable
Exposure environment	Uncontrolled

Modes and Bands of Operation	CDMA800	CDMA1900	BT
Modulation Mode	QPSK	QPSK	GFSK
Duty Cycle	1	1	
Transmitter Frequency Range (MHz)	824.7 – 848.31	1851.25 – 1908.75	2400.0 – 2483.5

**2.1 Picture of the Device****2.2 Description of the Antenna**

The device has a retractable and internal patch antenna.



---

### 3. TEST CONDITIONS

#### 3.1 Temperature and Humidity

Period of measurement:	04-Jan-05 to 17-Jan-05
Ambient temperature (°C):	22.0 to 23.0
Ambient humidity (RH %):	30.0 to 60.0

#### 3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.




---

## 4. DESCRIPTION OF THE TEST EQUIPMENT

### 4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DASY4 DAE V1	377	12 months	22-Sep-05
E-field Probe ET3DV6	1504	12 months	22-Sep-05
Dipole Validation Kit, D835V2	455	24 months	03-Oct-05
Dipole Validation Kit, D1900V2	504	24 months	16-Jul-05

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Amplifier	AR 5S1G2	25583	-	-
Dielectric Probe Kit	Agilent 85070D	US01440005	-	-
Signal Generator	R&S SMT06	100243	12 months	01-Jun-05
Vector Network Analyzer	Agilent 8753ES	US39174932	12 months	19-Feb-05
Power Meter	Boonton 4232A	26001	12 months	08-Jun-05
Power Sensor	Boonton 51015	31143	12 months	08-Jun-05
Power Sensor	Boonton 51015	31144	12 months	08-Jun-05
Call Tester	R&S CMU200	101055	12 months	29-Jun-05



---

#### 4.1.1 Isotropic E-field Probe SN1504

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
<b>Calibration</b>	Calibration certificate in Appendix C
<b>Frequency</b>	10 MHz to 3 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
<b>Optical Surface Detection</b>	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to $> 100$ mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
<b>Application</b>	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



## 4.2 Phantoms

The phantom used for all tests i.e. for both validation testing and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

Validation tests were performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

## 4.3 Simulating Liquids

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using liquids whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the liquid was  $15.0 \pm 0.5$  cm measured from the ear reference point during validation and device measurements.

### 4.3.1 Liquid Recipes

The following recipes were used for Head and Body liquids:

**800MHz Band**

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	51.07	65.45
HEC	0.23	-
Sugar	47.31	34.31
Preservative	0.24	0.10
Salt	1.15	0.62

**1900MHz Band**

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

### 4.3.2 Verification of the System

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids were measured every day using the dielectric probe kit and the network analyser. A SAR measurement was made following the determination of the dielectric parameters of the liquids, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The validation results (dielectric parameters and SAR values) are given in the table below.

**System verification, head tissue simulant**

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			$\epsilon_r$	$\sigma$ [S/m]	
835	Reference result	2.37	43.0	0.90	N/A
	± 10% window	2.13 to 2.61			
	04-Jan-05	2.35	41.6	0.90	21.5
	05-Jan-05	2.41	41.4	0.89	21.4
	06-Jan-05	2.32	41.3	0.90	21.2
1900	Reference result	10.2	40.2	1.46	N/A
	± 10% window	9.18 to 11.22			
	10-Jan-05	9.43	38.7	1.45	20.1
	11-Jan-05	9.50	38.5	1.45	21.4

**System verification, body tissue simulant**

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			$\epsilon_r$	$\sigma$ [S/m]	
835	Reference result	2.48	55.0	0.98	N/A
	± 10% window	2.23 to 2.73			
	07-Jan-05	2.49	53.2	0.94	21.5
	10-Jan-05	2.48	53.0	0.94	21.5
	17-Jan-05	2.45	52.9	0.93	21.6
1900	Reference result	10.5	50.9	1.60	N/A
	± 10% window	9.45 to 11.55			
	12-Jan-05	9.75	51.3	1.59	21.2
	13-Jan-05	9.67	51.0	1.60	21.2
	17-Jan-05	9.79	50.9	1.59	20.7

Plots of the Verification scans are given in Appendix A.

### 4.3.3 Tissue Simulants used in the Measurements

#### Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		$\epsilon_r$	$\sigma$ [S/m]	
836.5	Recommended value	41.5	0.90	N/A
	$\pm 5\%$ window	39.4 – 43.6	0.86 – 0.95	
	04-Jan-05	41.6	0.90	21.5
	05-Jan-05	41.3	0.89	21.4
	06-Jan-05	41.3	0.90	21.2
	11-Jan-05	41.7	0.90	21.5
1880	Recommended value	40.0	1.40	N/A
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	10-Jan-05	38.8	1.43	20.1
	11-Jan-05	38.6	1.43	21.4

#### Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		$\epsilon_r$	$\sigma$ [S/m]	
836.5	Recommended value	55.2	0.97	N/A
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	07-Jan-05	53.2	0.95	21.5
	10-Jan-05	53.0	0.94	21.5
	17-Jan-05	52.9	0.93	21.6
	Recommended value	53.3	1.52	N/A
1880	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	12-Jan-05	51.4	1.57	21.2
	13-Jan-05	51.1	1.58	21.2
	17-Jan-05	51.0	1.58	20.7

---

## 5. DESCRIPTION OF THE TEST PROCEDURE


### 5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

---

## 5.2 Test Positions

### 5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

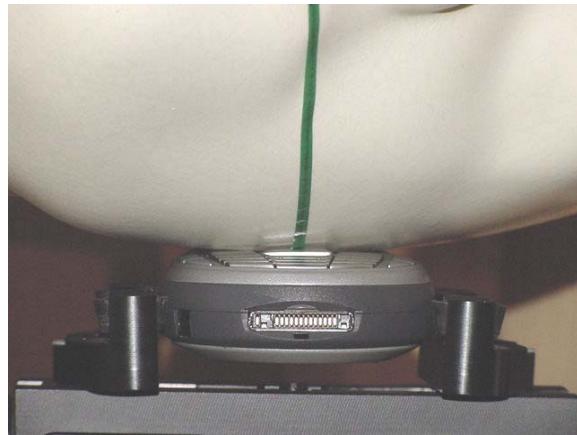


Photo of the device in “cheek” position

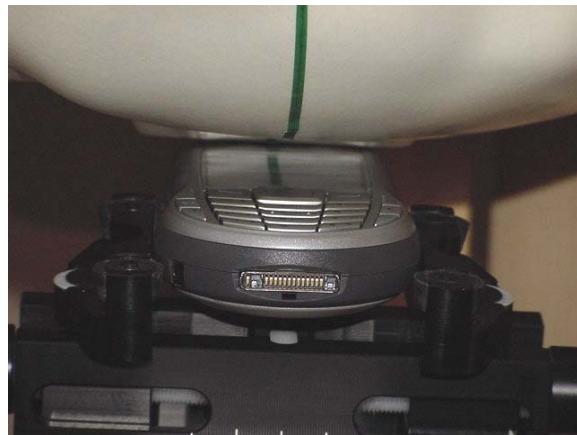


Photo of the device in “tilt” position

## 5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gave higher results.



Photo of the device positioned for Body SAR measurement.  
The spacer was removed for the tests.



### 5.3 Scan Procedures

First coarse scans were used for determination of the field distribution. Next a cube scan, a minimum of 5x5x7 points covering a volume of at least 32x32x30mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

### 5.4 SAR Averaging Methods

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.



## 6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	$C_i$	$C_i \cdot U_i$ (%)	$V_i$
<b>Measurement System</b>							
Probe Calibration	E2.1	$\pm 5.8$	N	1	1	$\pm 5.8$	$\infty$
Axial Isotropy	E2.2	$\pm 4.7$	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Hemispherical Isotropy	E2.2	$\pm 9.6$	R	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary Effect	E2.3	$\pm 8.3$	R	$\sqrt{3}$	1	$\pm 4.8$	$\infty$
Linearity	E2.4	$\pm 4.7$	R	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
System Detection Limits	E2.5	$\pm 1.0$	R	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout Electronics	E2.6	$\pm 1.0$	N	1	1	$\pm 1.0$	$\infty$
Response Time	E2.7	$\pm 0.8$	R	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration Time	E2.8	$\pm 2.6$	R	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF Ambient Conditions - Noise	E6.1	$\pm 3.0$	R	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
RF Ambient Conditions - Reflections	E6.1	$\pm 3.0$	R	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Probe Positioner Mechanical Tolerance	E6.2	$\pm 0.4$	R	$\sqrt{3}$	1	$\pm 0.2$	$\infty$
Probe Positioning with respect to Phantom Shell	E6.3	$\pm 2.9$	R	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	$\pm 3.9$	R	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
<b>Test sample Related</b>							
Test Sample Positioning	E4.2.1	$\pm 6.0$	N	1	1	$\pm 6.0$	11
Device Holder Uncertainty	E4.1.1	$\pm 5.0$	N	1	1	$\pm 5.0$	7
Output Power Variation - SAR drift measurement	6.6.3	$\pm 10.0$	R	$\sqrt{3}$	1	$\pm 5.8$	$\infty$
<b>Phantom and Tissue Parameters</b>							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	$\pm 4.0$	R	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid Conductivity Target - tolerance	E3.2	$\pm 5.0$	R	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid Conductivity - measurement uncertainty	E3.3	$\pm 5.5$	N	1	0.64	$\pm 3.5$	5
Liquid Permittivity Target tolerance	E3.2	$\pm 5.0$	R	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid Permittivity - measurement uncertainty	E3.3	$\pm 2.9$	N	1	0.6	$\pm 1.7$	5
<b>Combined Standard Uncertainty</b>			RSS			<b><math>\pm 14.9</math></b>	206
<b>Coverage Factor for 95%</b>			<b>k=2</b>				
<b>Expanded Standard Uncertainty</b>						<b><math>\pm 29.8</math></b>	




---

## 7. RESULTS

The measured Head SAR values for the test device are tabulated below:

**CDMA800 Head SAR results**

Antenna Position	Position	SAR, averaged over 1g (W/kg)		
		Ch 1013 824.7 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
Retracted	<b>Power level</b>		25.0 dBm	25.2 dBm
	Left	Cheek	0.53	0.86
		Tilt	-	0.67
	Right	Cheek	0.53	0.80
		Tilt	-	0.64
Extended	Left	Cheek	0.70	0.79
		Tilt	0.73	0.84
	Right	Cheek	-	0.74
		Tilt	0.57	0.80
Extended	Left Tilt with MMC		0.71	0.86
Extended	Left Tilt with MMC and Bluetooth active		-	<b>0.89</b>



### CDMA1900 Head SAR results

Antenna Position	Position	SAR, averaged over 1g (W/kg)		
		Ch 25 1851.25 MHz	Ch 600 1880.00 MHz	Ch 1175 1908.75 MHz
Retracted	Power level		23.1 dBm	23.0 dBm
	Left	Cheek	-	0.70
		Tilt	0.81	0.84
	Right	Cheek	-	0.59
		Tilt	-	0.74
	Extended	Cheek	0.96	0.98
		Tilt	1.18	1.20
Extended	Right	Cheek	0.77	0.84
		Tilt	1.02	1.09
Extended	Left Tilt with MMC		1.13	1.18
Extended	Left Tilt with Bluetooth active		-	1.14

The measured Body SAR values for the test device are tabulated below:

### CDMA800 Body SAR results

Antenna Position	Body-worn location setup	Ch 1013 824.7 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
Retracted	Power level	25.0 dBm	25.2 dBm	25.1 dBm
	Without Headset	0.78	0.83	0.84
	HS-3 Headset	0.51	0.54	0.56
	HS-9 Headset	0.78	0.83	0.82
Extended	Without Headset	0.57	0.71	0.69
	HS-3 Headset	0.44	0.57	0.53
	HS-9 Headset	0.61	0.65	0.62
Retracted	Without Headset with MMC	0.74	0.82	0.81
Retracted	Without Headset with Bluetooth active	-	-	0.82

### CDMA1900 Body SAR results

Antenna Position	Body-worn location setup	SAR, averaged over 1g (W/kg)		
		Ch 25 1851.25 MHz	Ch 600 1880.00 MHz	Ch 1175 1908.75 MHz
Retracted	Power level	23.1 dBm	23.0 dBm	23.1 dBm
	Without Headset	0.67	0.62	0.60
	HS-3 Headset	0.67	0.64	0.64
	HS-9 Headset	0.54	0.55	0.65
Extended	Without Headset	0.44	0.45	0.50
	HS-3 Headset	0.44	0.44	0.47
	HS-9 Headset	0.47	0.47	0.50
Retracted	Without Headset with MMC	0.60	0.61	0.62
Retracted	Without Headset with Bluetooth active	0.65	-	-

Plots of the Measurement scans are given in Appendix B.



Accredited Laboratory  
Certificate Number: 1819-01

---

## APPENDIX A: VALIDATION SCANS

Date: 01/04/05

## 835MHz Head Validation

Phantom: SAM1 Cellular Head, Phantom section: Flat Section

Medium: 835MHz Head, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.896$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.4 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 3.5 W/kg

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.54 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.53 mW/g

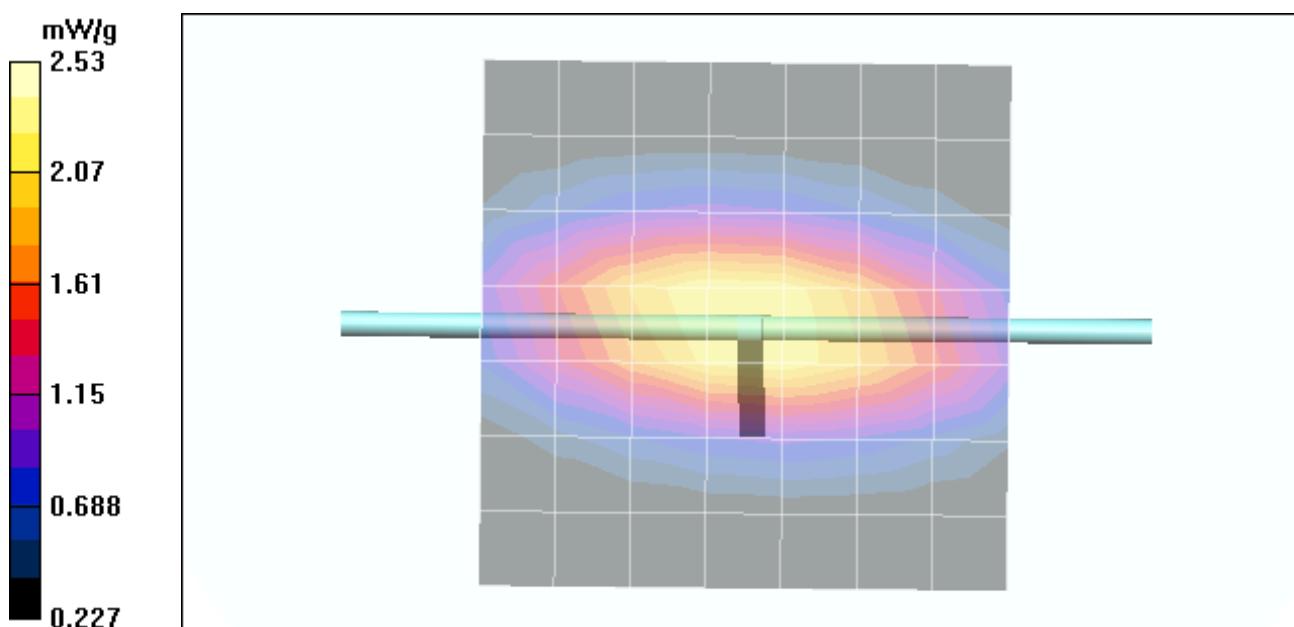

Date: 01/05/05

## 835MHz Head Validation

Phantom: SAM1 Cellular Head, Phantom section: Flat Section

Medium: 835MHz Head, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.891$  mho/m;  $\epsilon_r = 41.4$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.4 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.56 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.59 mW/g

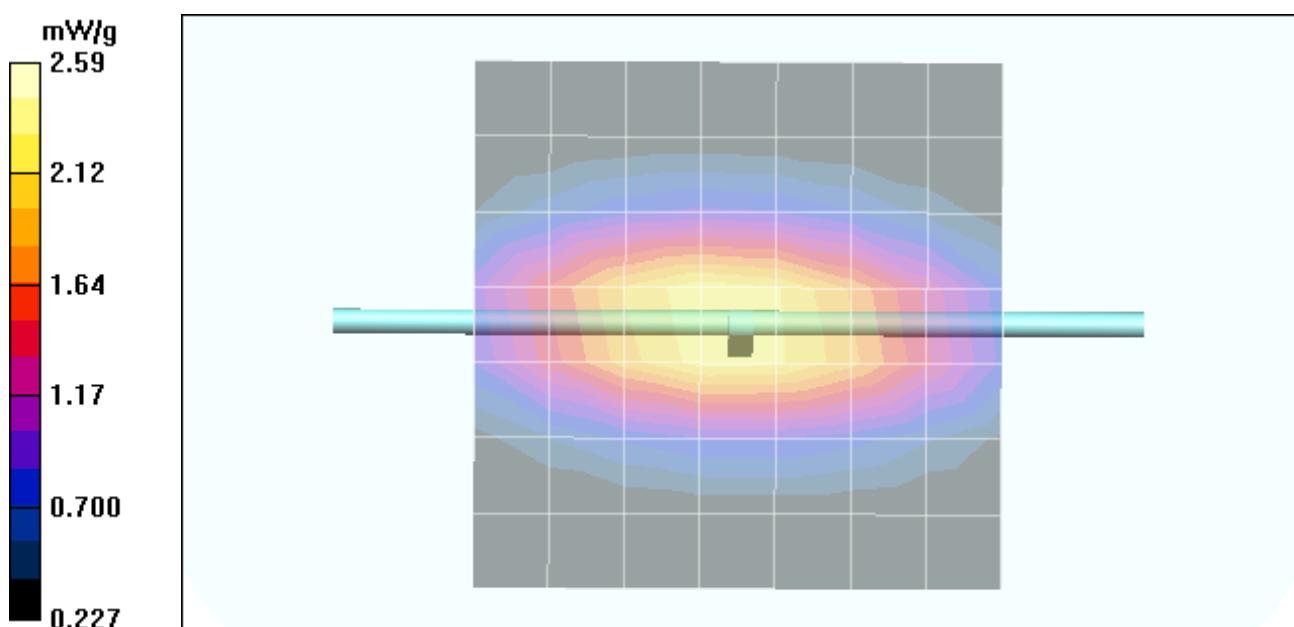

Date: 01/06/05

## 835MHz Head Validation

Phantom: SAM1 Cellular Head, Phantom section: Flat Section

Medium: 835MHz Head, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.895$  mho/m;  $\epsilon_r = 41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.9 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.52 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.52 mW/g

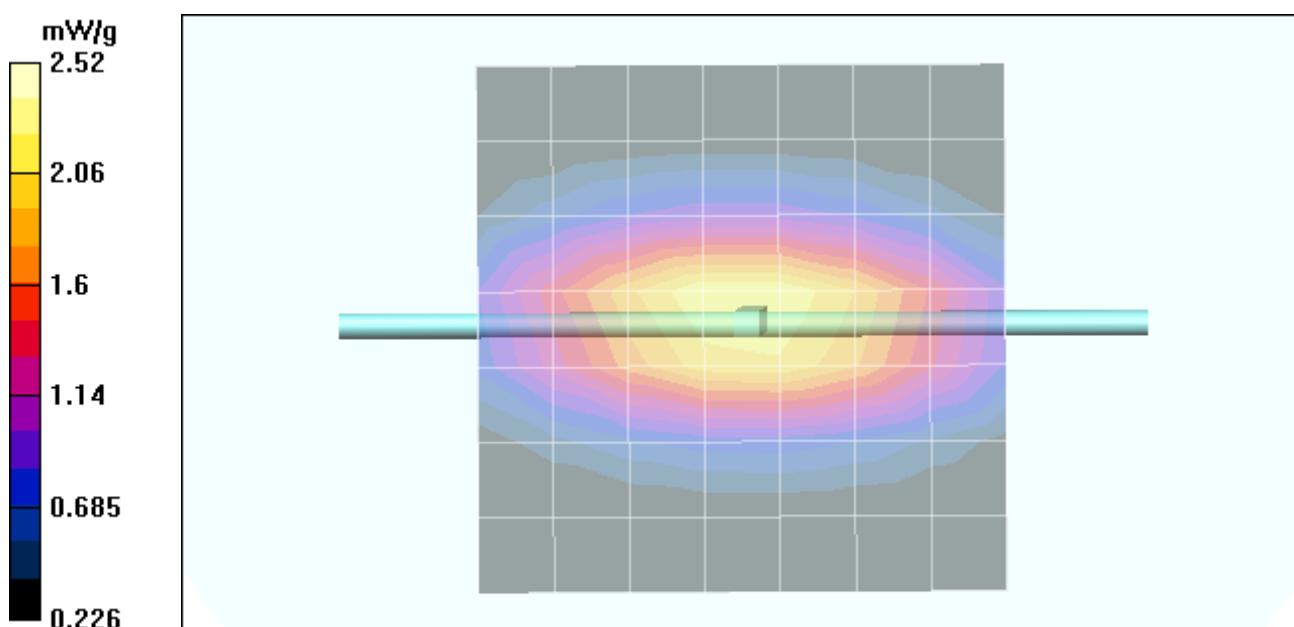

Date: 01/11/05

## 835MHz Head Validation

Phantom: SAM1 Cellular Head, Phantom section: Flat Section

Medium: 835MHz Head, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.898$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.55 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.57 mW/g

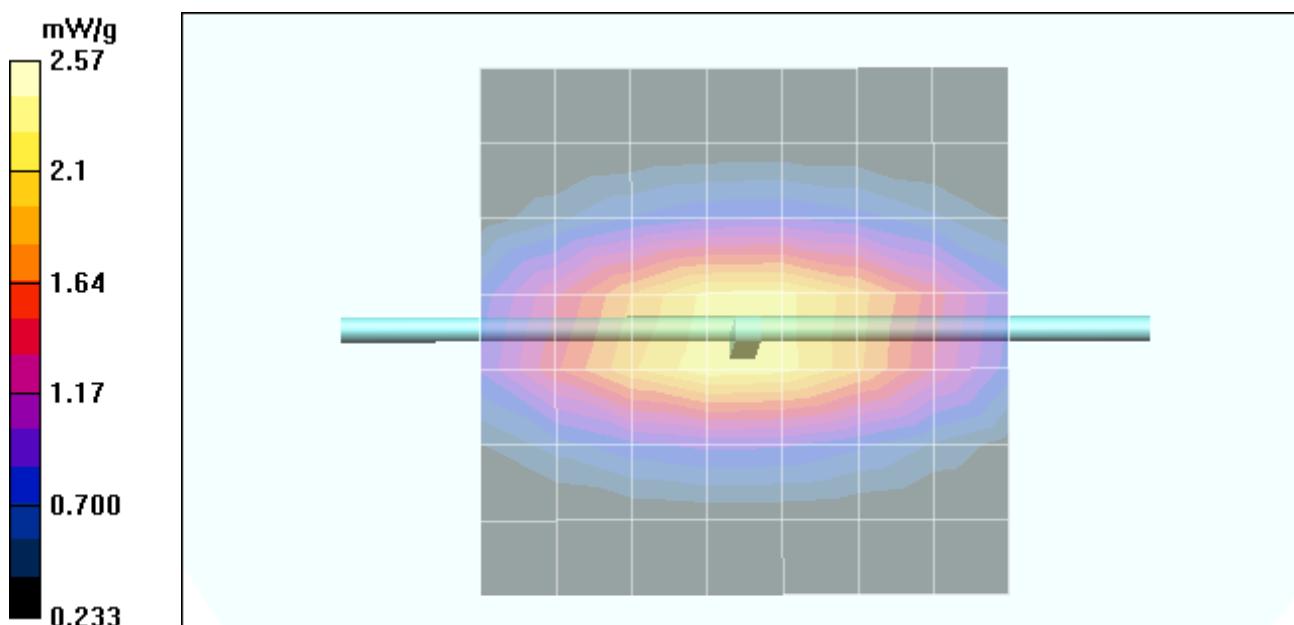

Date: 01/10/05

## 1900MHz Head Validation

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Head, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 20.1

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.9 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 17 W/kg

SAR(1 g) = 9.43 mW/g; SAR(10 g) = 4.9 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 10.7 mW/g

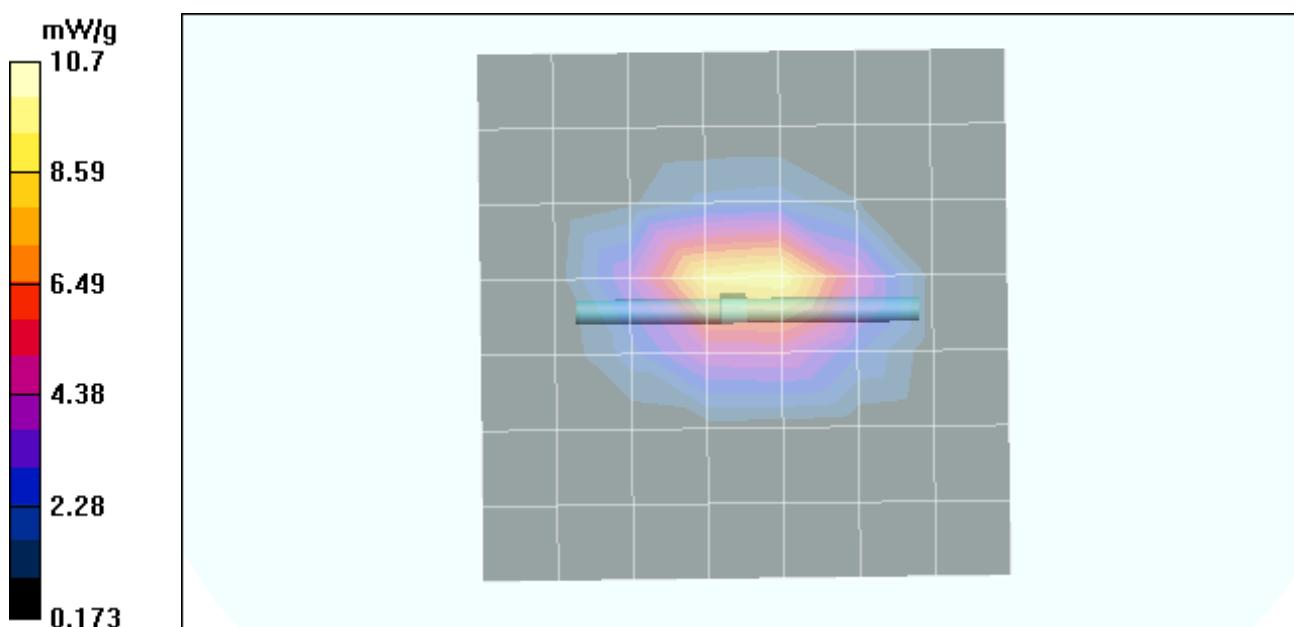

Date: 01/11/05

## 1900MHz Head Validation

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Head, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.45 \text{ mho/m}$ ;  $\epsilon_r = 38.5$ ;  $\rho = 1000 \text{ kg/m}^3$ , Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 88.1 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.5 mW/g; SAR(10 g) = 4.98 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 10.8 mW/g

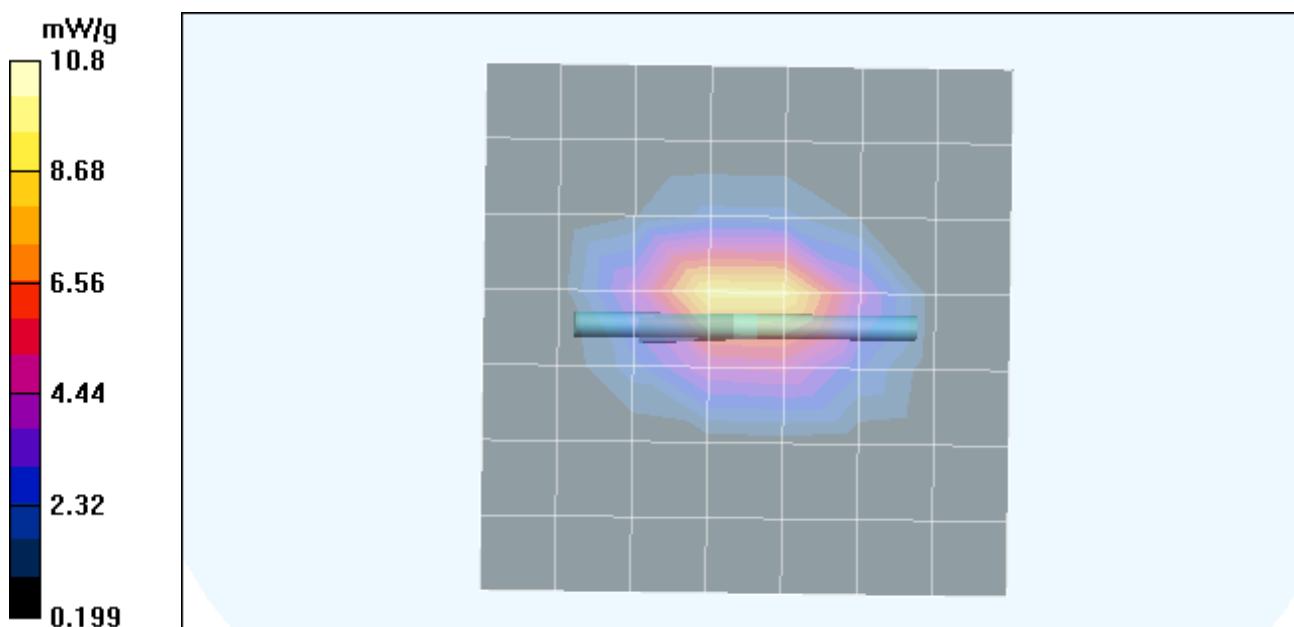

Date: 01/07/05

## 835MHz Body Validation

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.943$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.64 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.7 mW/g

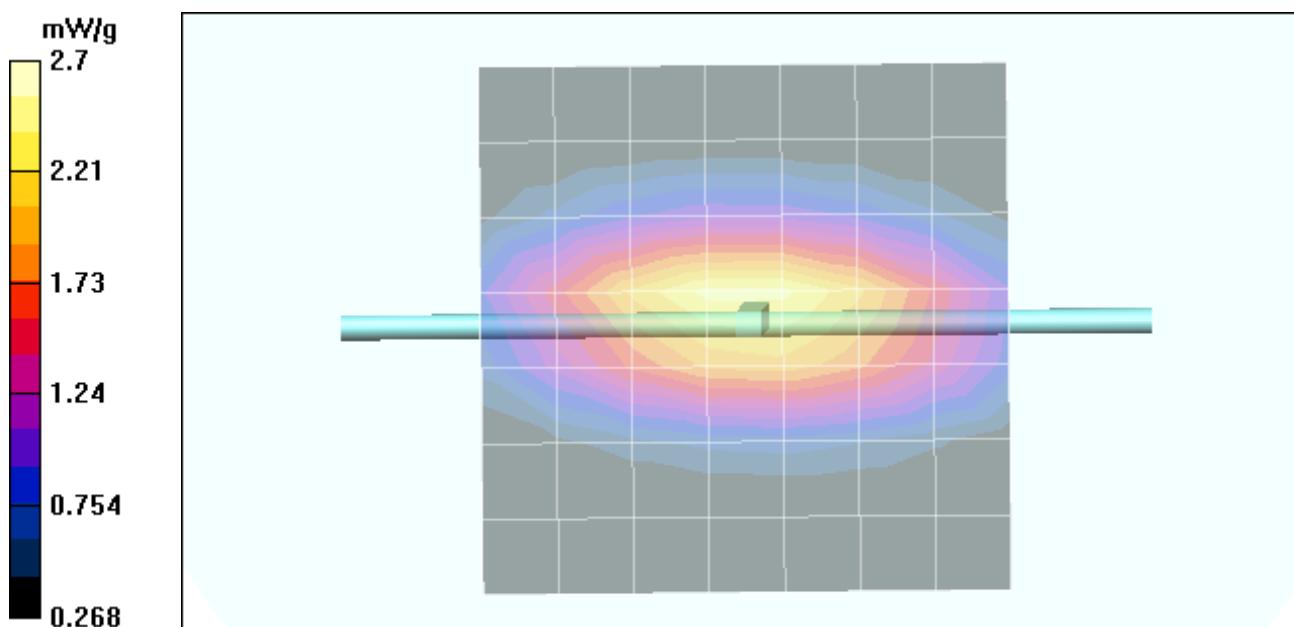

Date: 01/10/05

## 835MHz Body Validation

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.936$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.64 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.68 mW/g

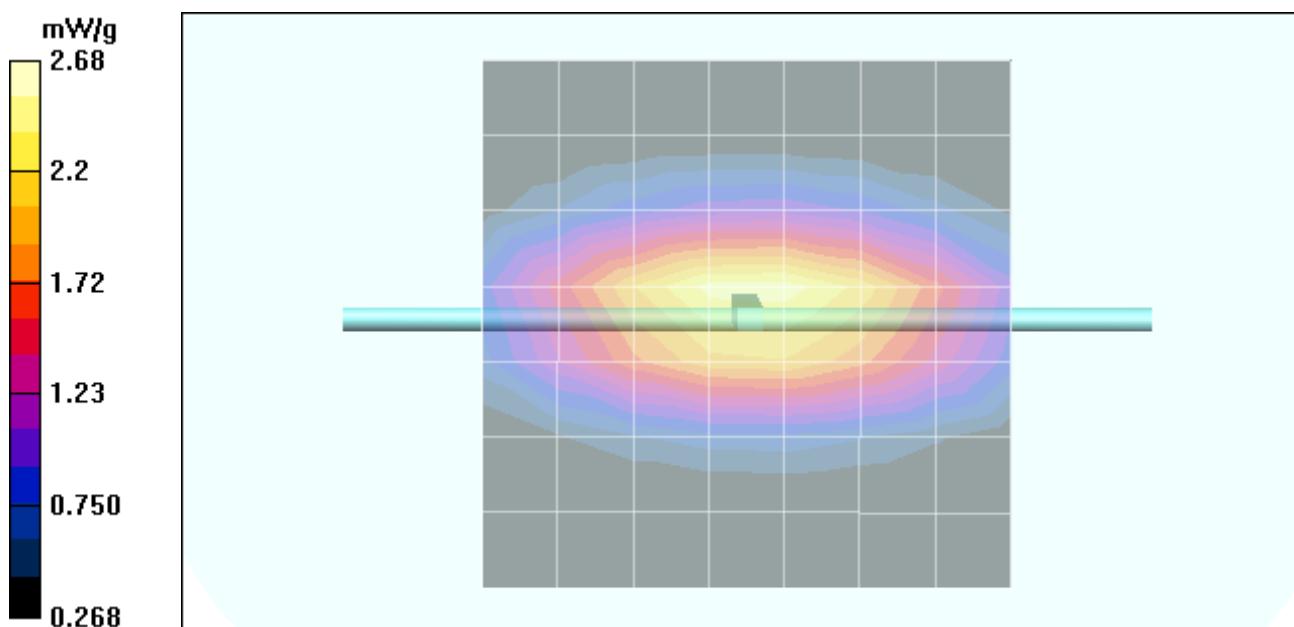

Date: 01/17/05

## 835MHz Body Validation

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 835 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.932$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.6

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.62 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 2.66 mW/g

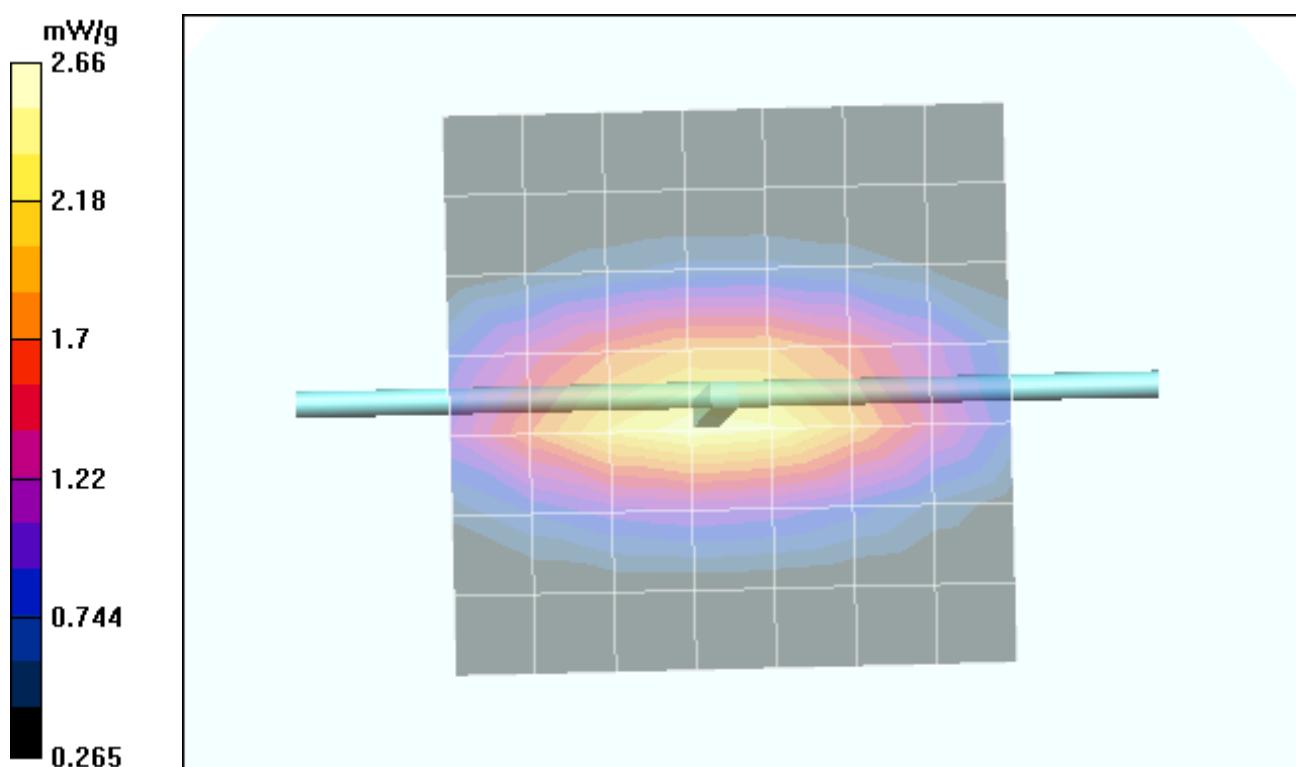

Date: 01/12/05

## 1900MHz Body Validation

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 835MHz Head, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.59$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.9 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.75 mW/g; SAR(10 g) = 5.13 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 11.2 mW/g

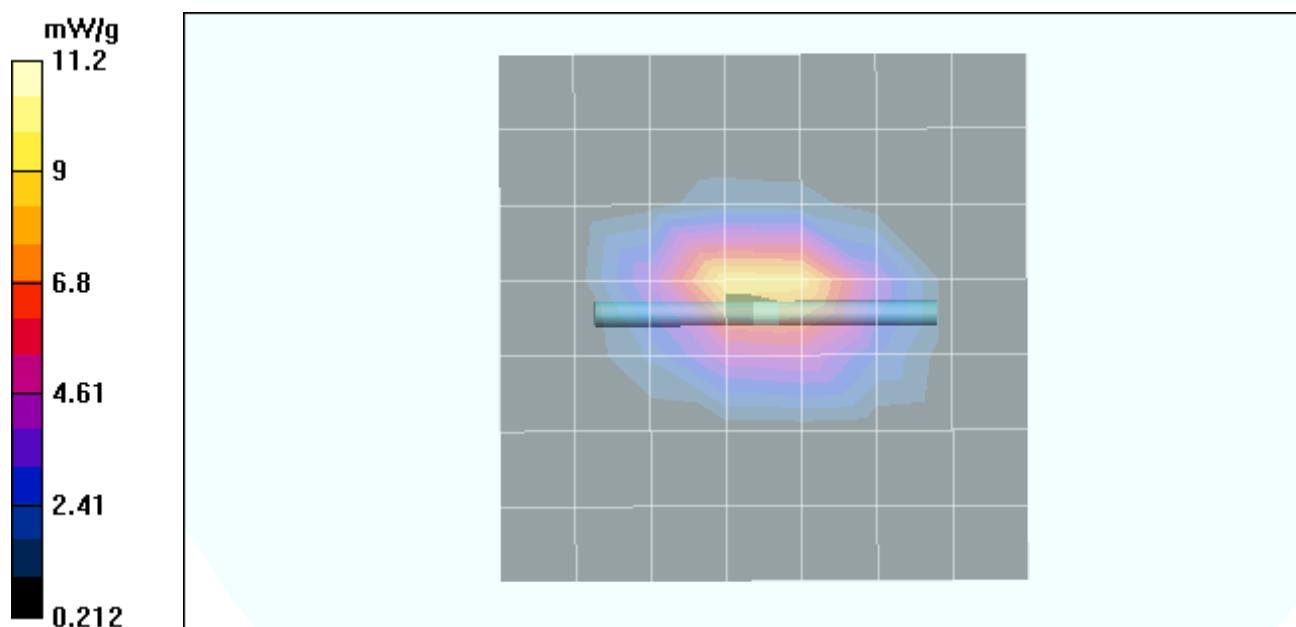

Date: 01/13/05

## 1900MHz Body Validation

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Body, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.6 \text{ mho/m}$ ;  $\epsilon_r = 51$ ;  $\rho = 1000 \text{ kg/m}^3$ , Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 86.6 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.67 mW/g; SAR(10 g) = 5.08 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 11 mW/g

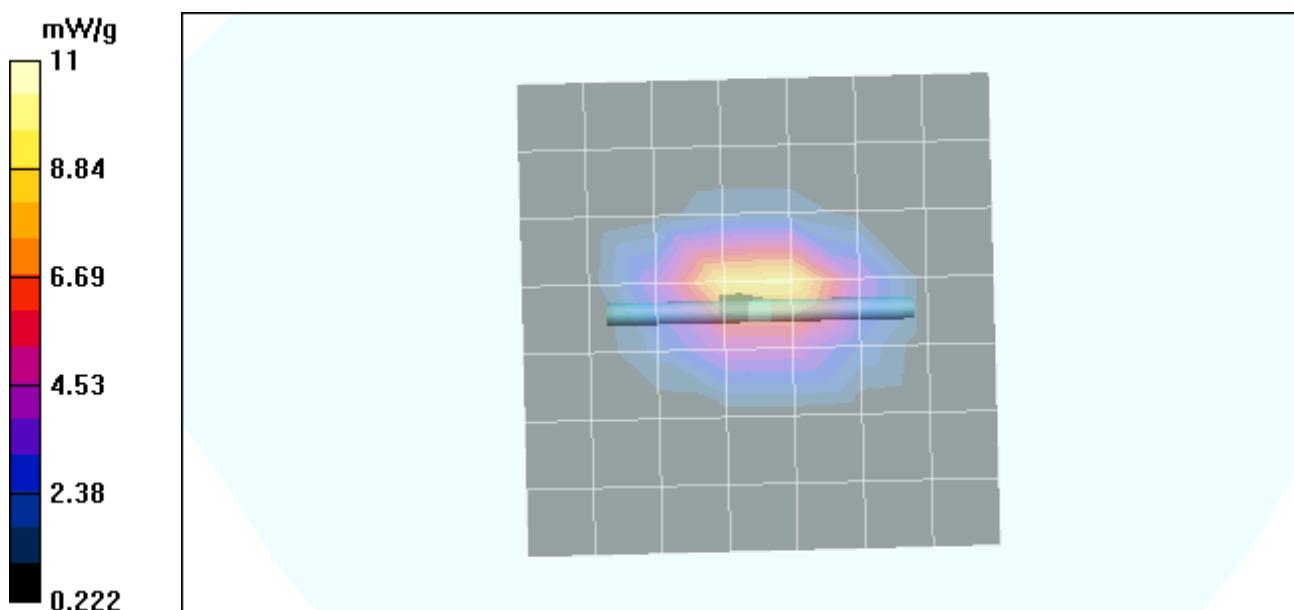

Date: 01/17/05

## 1900MHz Body Validation

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Body, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.59 \text{ mho/m}$ ;  $\epsilon_r = 50.9$ ;  $\rho = 1000 \text{ kg/m}^3$ , Temperature: 20.7

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 85 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 17 W/kg

SAR(1 g) = 9.79 mW/g; SAR(10 g) = 5.12 mW/g (Advance Extrapolation)

Maximum value of SAR (measured) = 11.2 mW/g

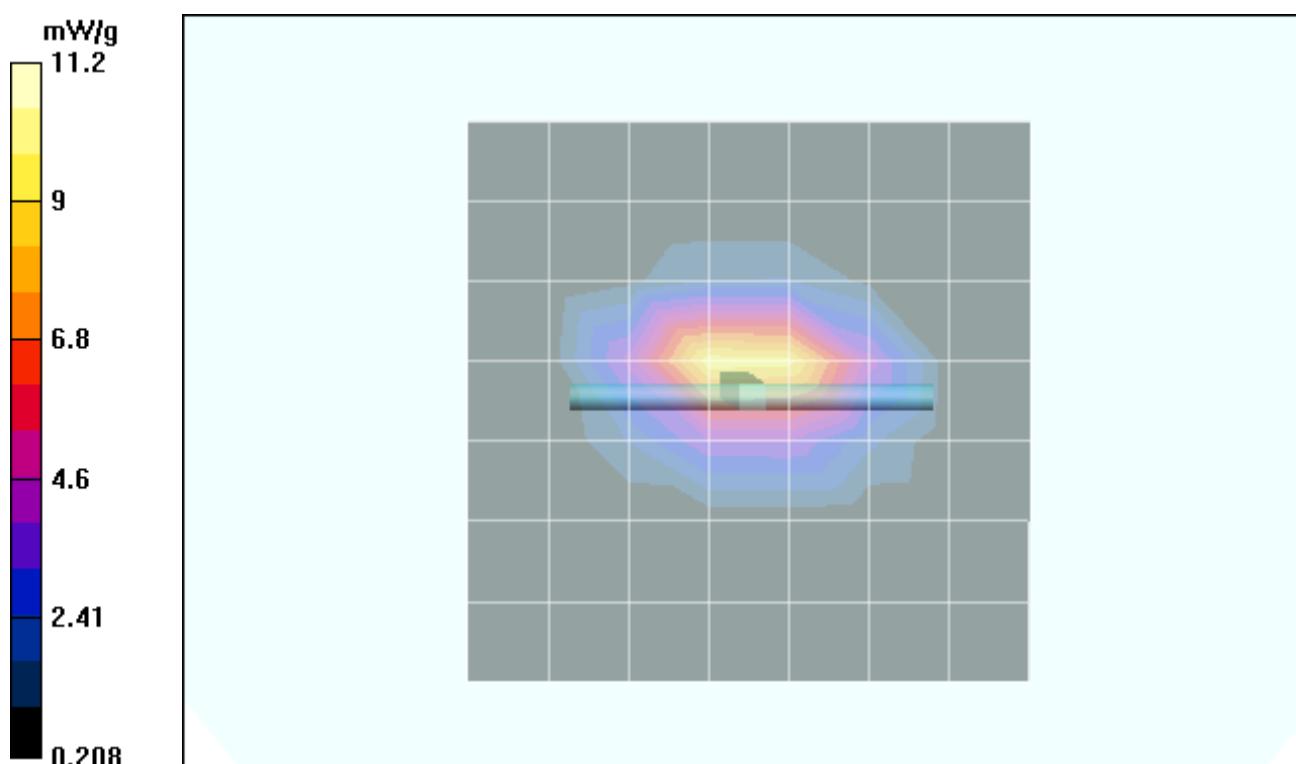



Accredited Laboratory  
Certificate Number: 1819-01

---

## APPENDIX B: MEASUREMENT SCANS

Date: 01/04/05

## RM-18, CDMA800, Channel 384, Left Cheek Position with Whip Retracted and BL-6C Battery

Phantom: SAM1 Cellular Head, Phantom section: Left Section

Medium: 835MHz Head, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.897$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.4 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.856 mW/g; SAR(10 g) = 0.587 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.898 mW/g

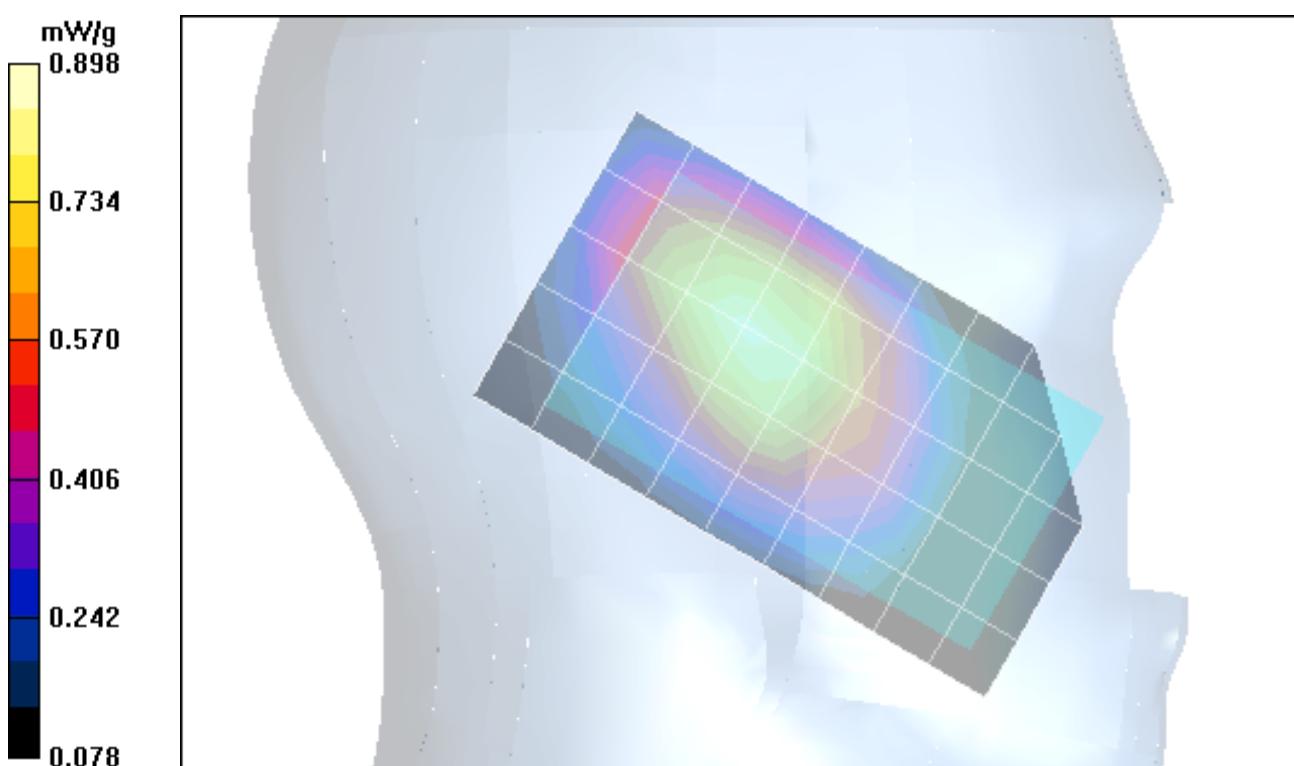

Date: 01/05/05

## RM-18, CDMA800, Channel 777, Left Tilt Position with Whip Extended and BL-6C Battery

Phantom: SAM1 Cellular Head, Phantom section: Left Section

Medium: 835MHz Head, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.545 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.918 mW/g

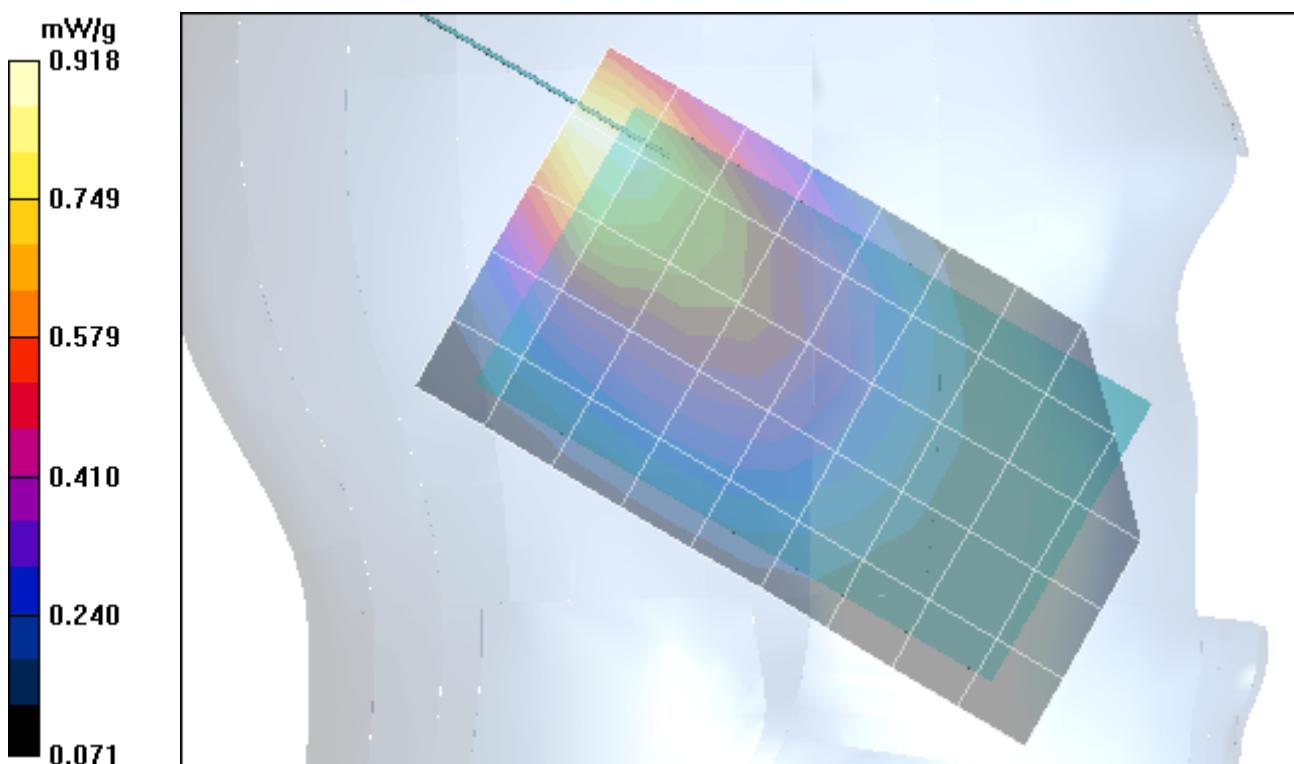

Date: 01/04/05

## RM-18, CDMA800, Channel 777, Right Cheek Position with Whip Retracted and BL-6C Battery

Phantom: SAM1 Cellular Head, Phantom section: Right Section

Medium: 835MHz Head, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.555 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.845 mW/g

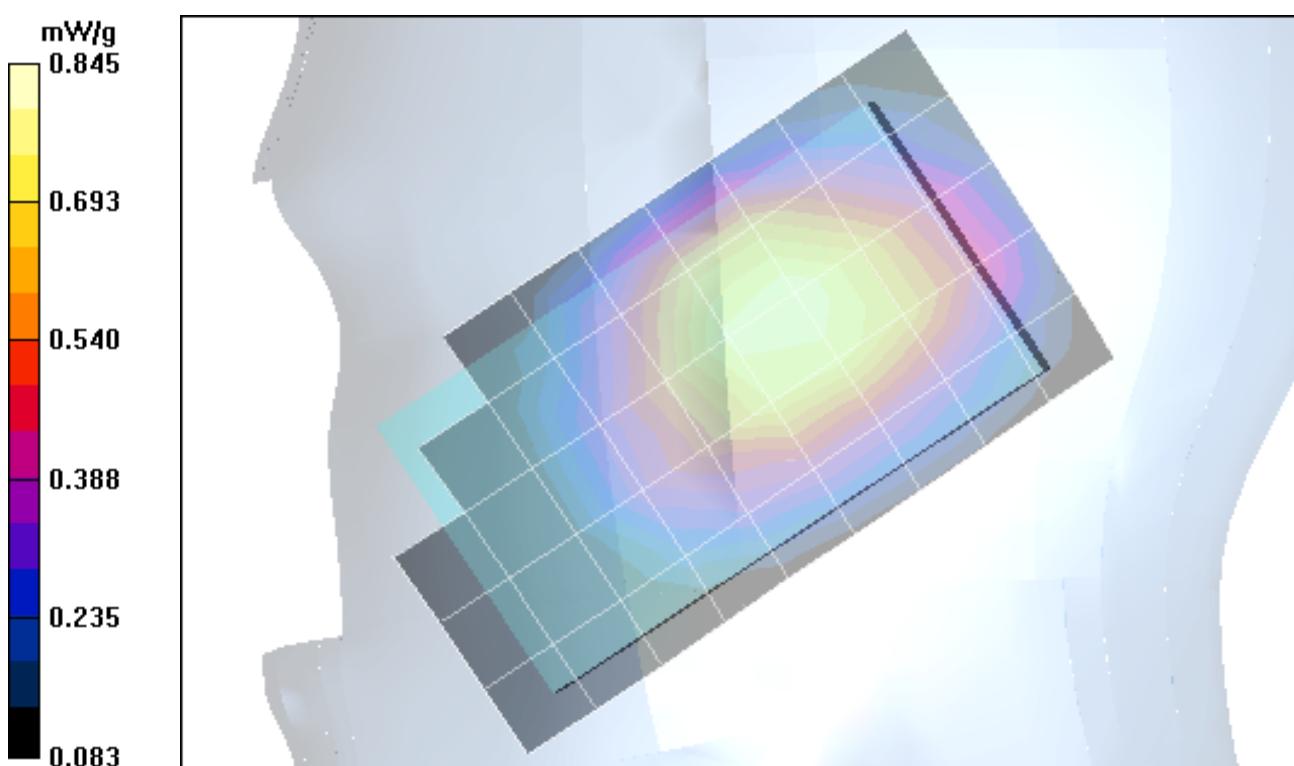

Date: 01/05/05

## RM-18, CDMA800, Channel 384, Right Tilt Position with Whip Extended and BL-6C Battery

Phantom: SAM1 Cellular Head, Phantom section: Right Section

Medium: 835MHz Head, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.894$  mho/m;  $\epsilon_r = 41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 3 (8x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.800 mW/g; SAR(10 g) = 0.497 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.852 mW/g

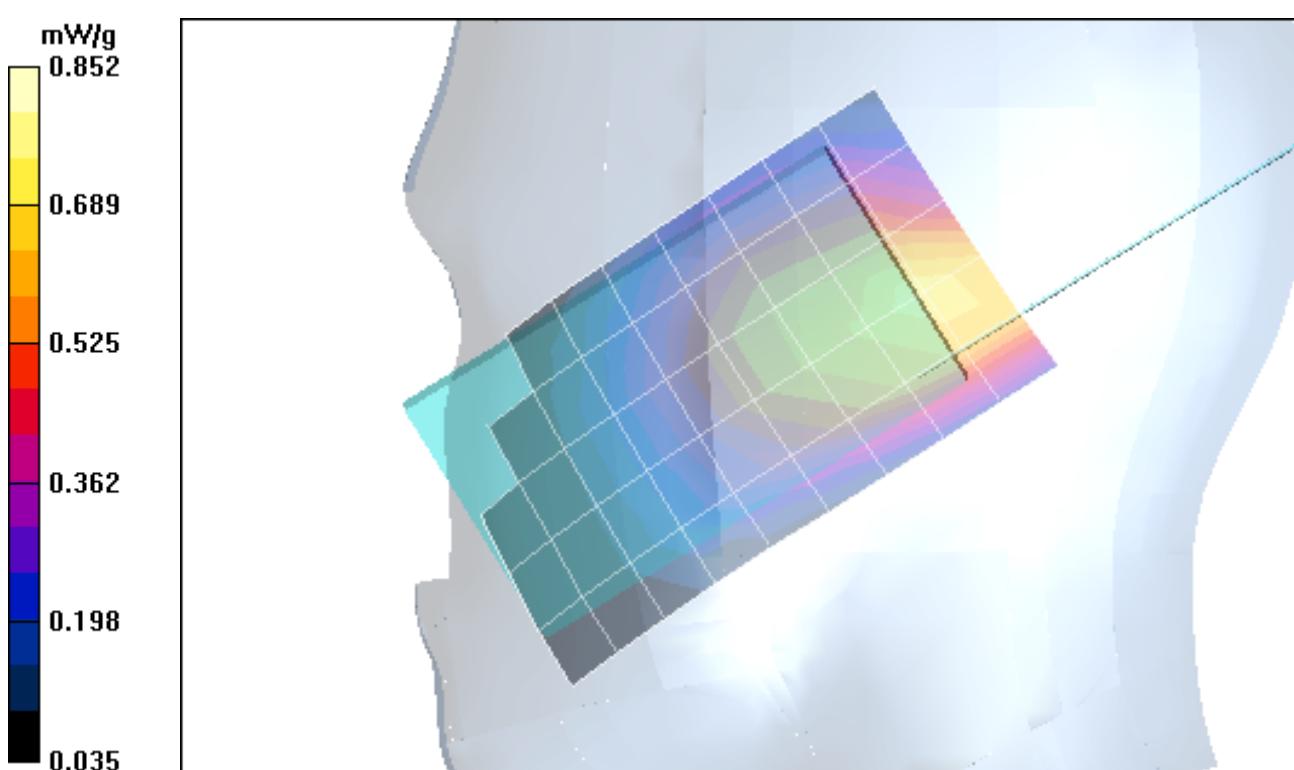

Date: 01/06/05

RM-18, CDMA800, Channel 777, Left Tilt Position with Whip Extended, BL-6C Battery and MMC Installed

Phantom: SAM1 Cellular Head, Phantom section: Left Section

Medium: 835MHz Head, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.558 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.931 mW/g

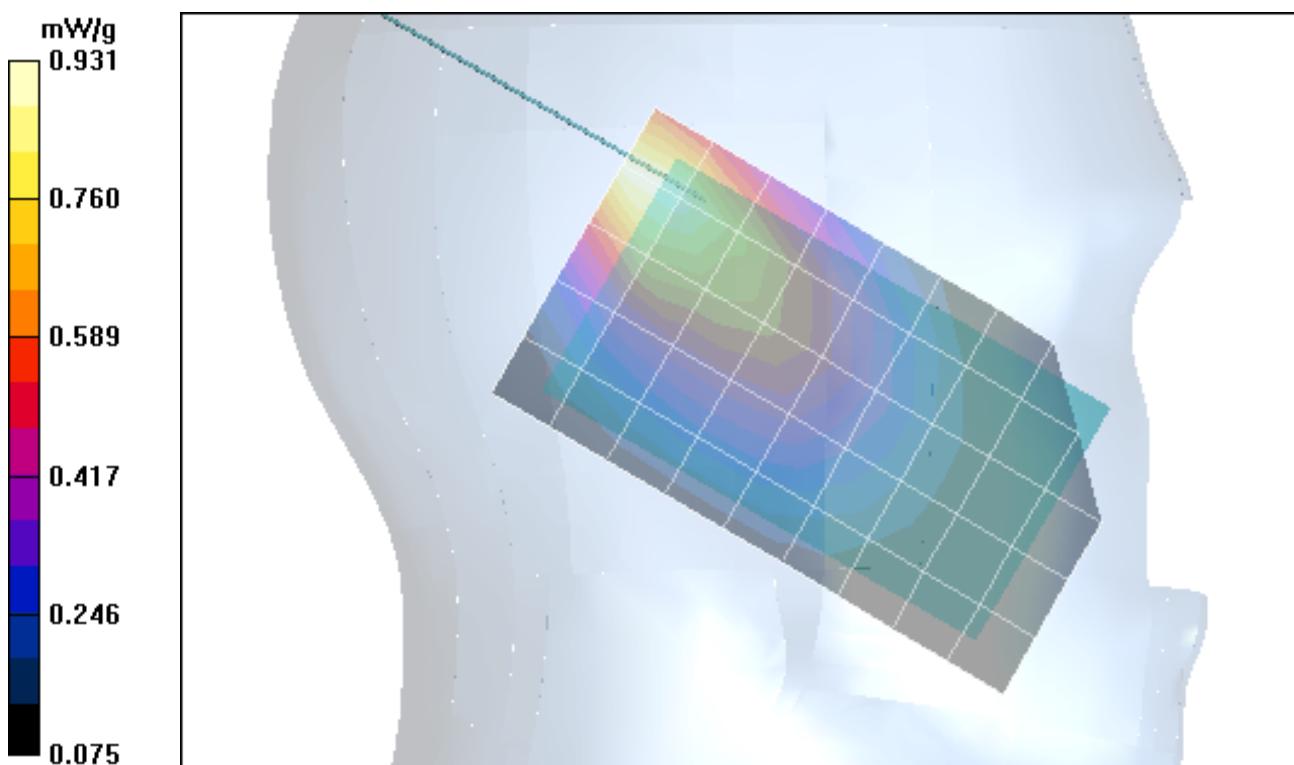

Date: 01/06/05

RM-18, CDMA800, Channel 777, Left Tilt Position with Whip Extended, BL-6C Battery, MMC installed and Bluetooth active

Phantom: SAM1 Cellular Head, Phantom section: Left Section

Medium: 835MHz Head, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.558 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.943 mW/g

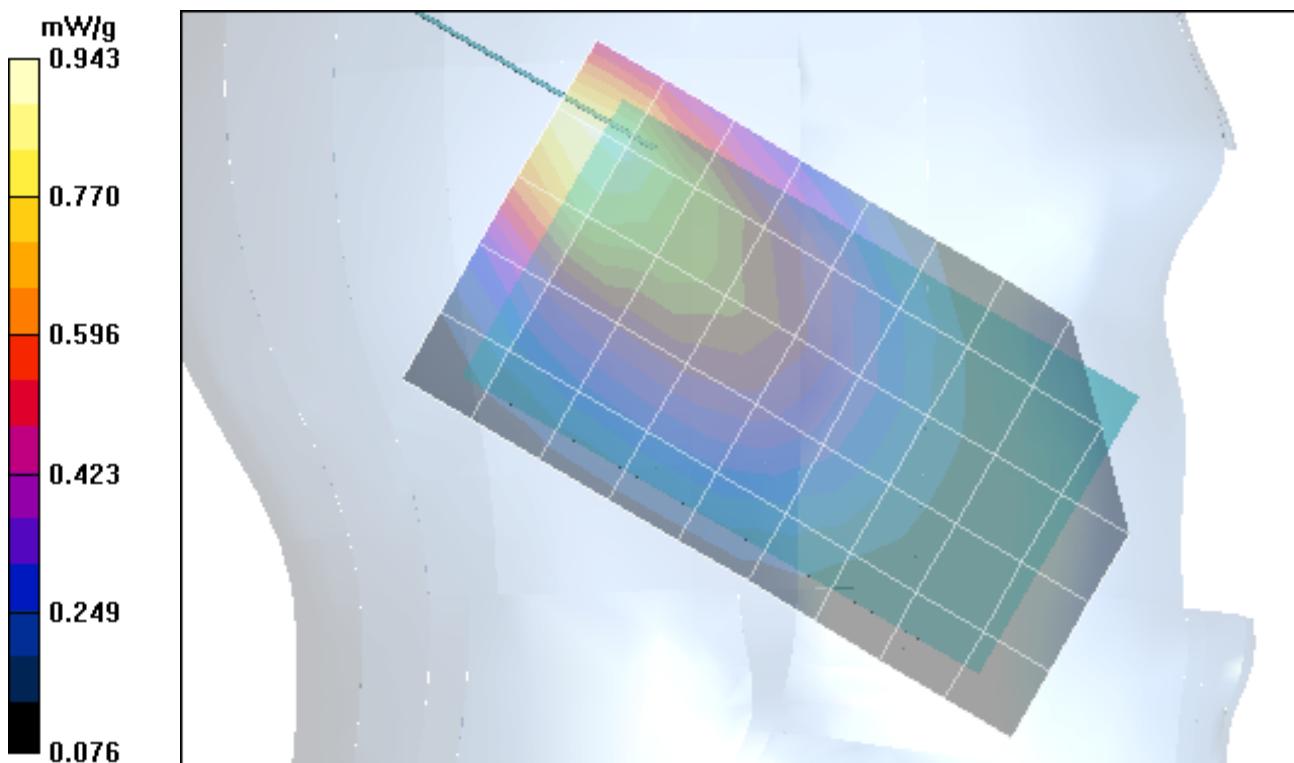

Date: 01/06/05

RM-18, CDMA800, Channel 777, Left Tilt Position with Whip Extended, BL-6C Battery, MMC installed and Bluetooth active

Phantom: SAM1 Cellular Head, Phantom section: Left Section

Medium: 835MHz Head, Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(6.73, 6.73, 6.73)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.558 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.943 mW/g

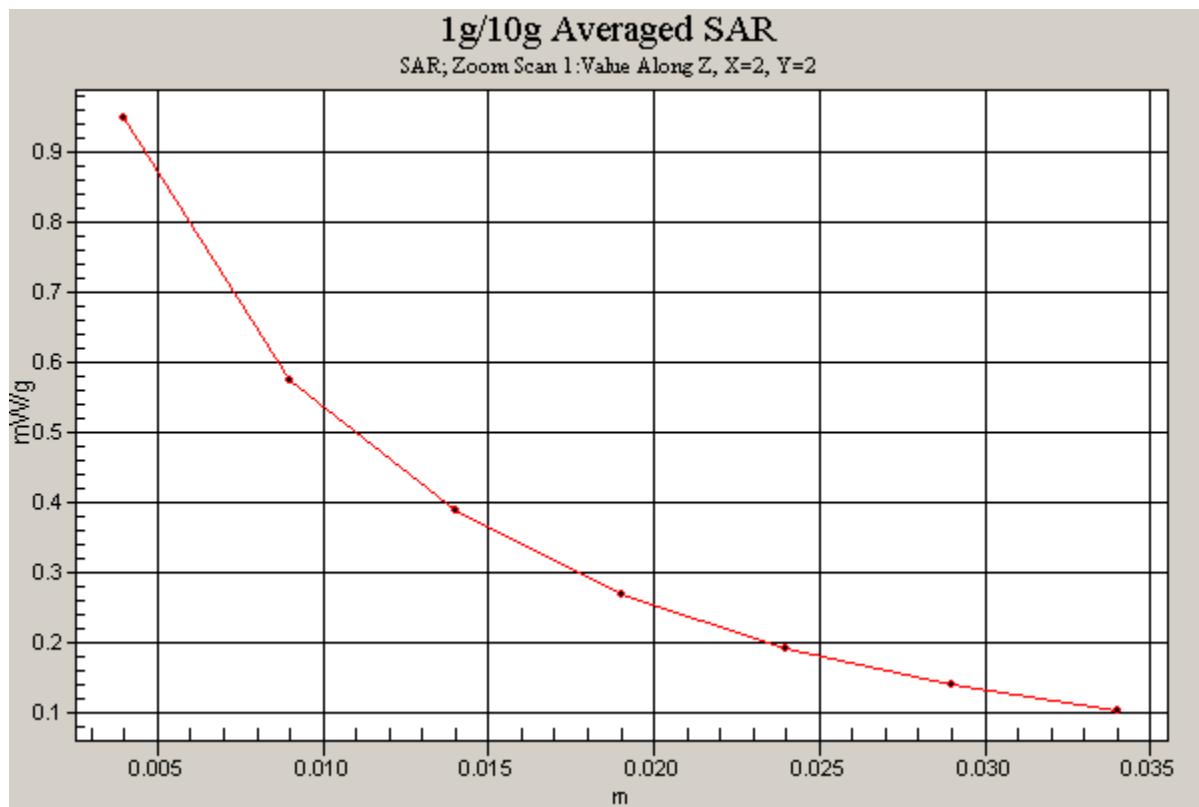

Date: 01/10/05

## RM-18, CDMA1900, Channel 600, Left Cheek Position with Whip Extended and BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Left Section

Medium: 1900MHz Head, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 20.1

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.984 mW/g; SAR(10 g) = 0.546 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 1.05 mW/g

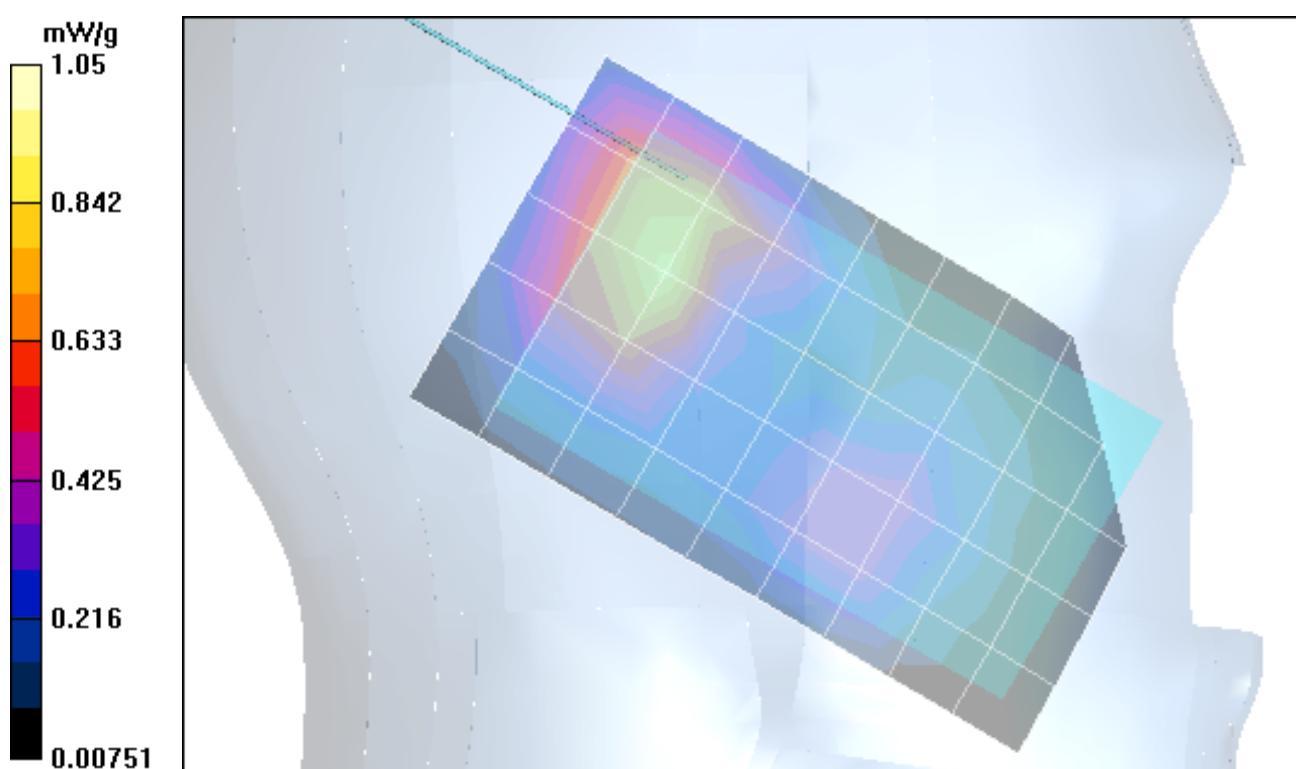

Date: 01/10/05

## RM-18, CDMA1900, Channel 600, Left Tilt Position with Whip Extended and BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Left Section

Medium: 1900MHz Head, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 20.1

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.8 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.665 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 1.33 mW/g

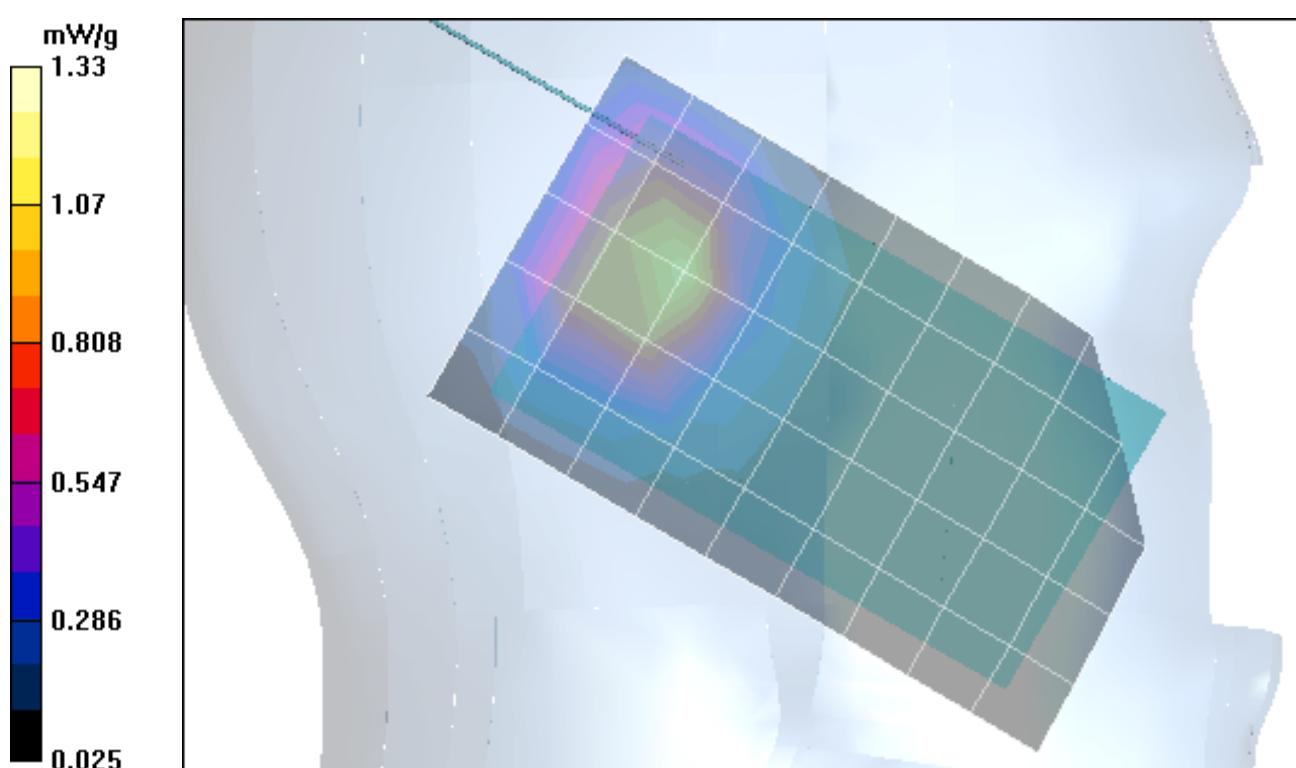

Date: 01/10/05

## RM-18, CDMA1900, Channel 600, Left Tilt Position with Whip Extended and BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Left Section

Medium: 1900MHz Head, Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>; Temperature: 20.1

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.8 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.665 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 1.33 mW/g

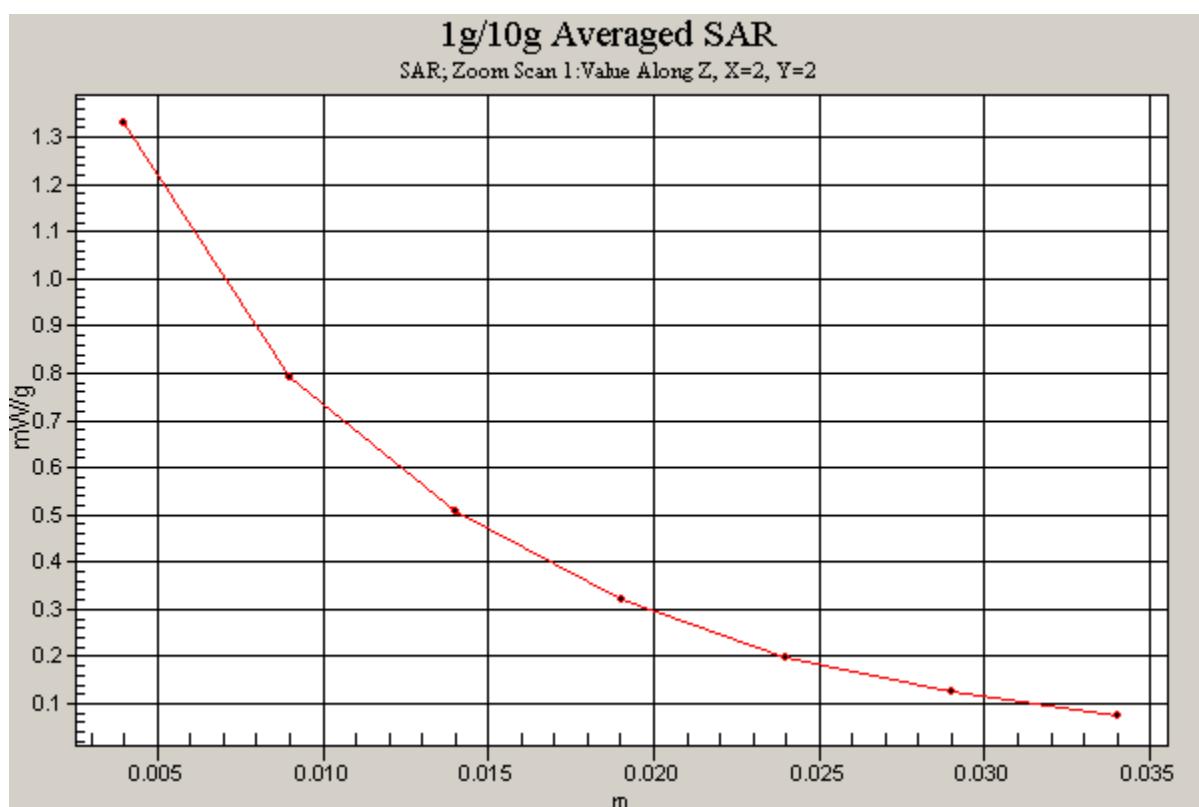

Date: 01/11/05

## RM-18, CDMA1900, Channel 600, Right Cheek Position with Whip Extended and BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Right Section

Medium: 1900MHz Head, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


**Zoom Scan 1 (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.464 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.901 mW/g

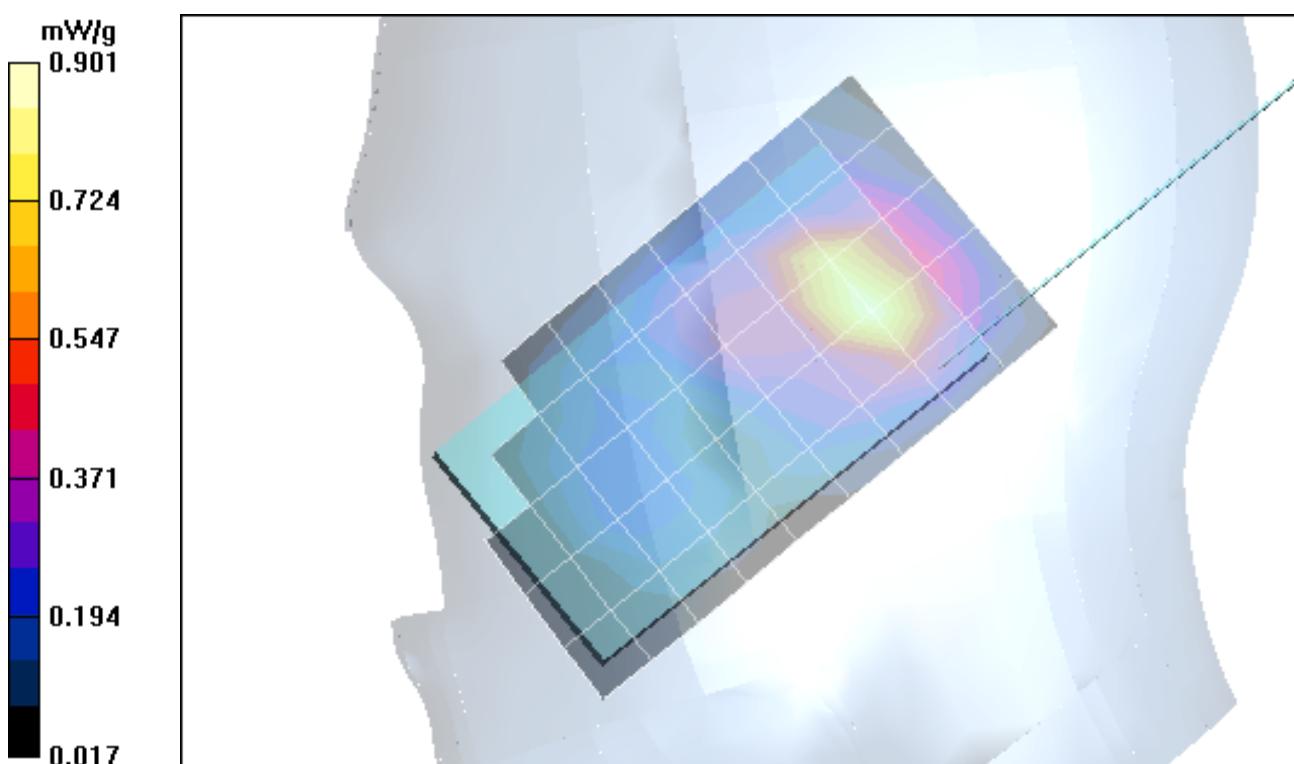

Date: 01/11/05

## RM-18, CDMA1900, Channel 600, Right Tilt Position with Whip Extended and BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Right Section

Medium: 1900MHz Head, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> , Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.608 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 1.19 mW/g

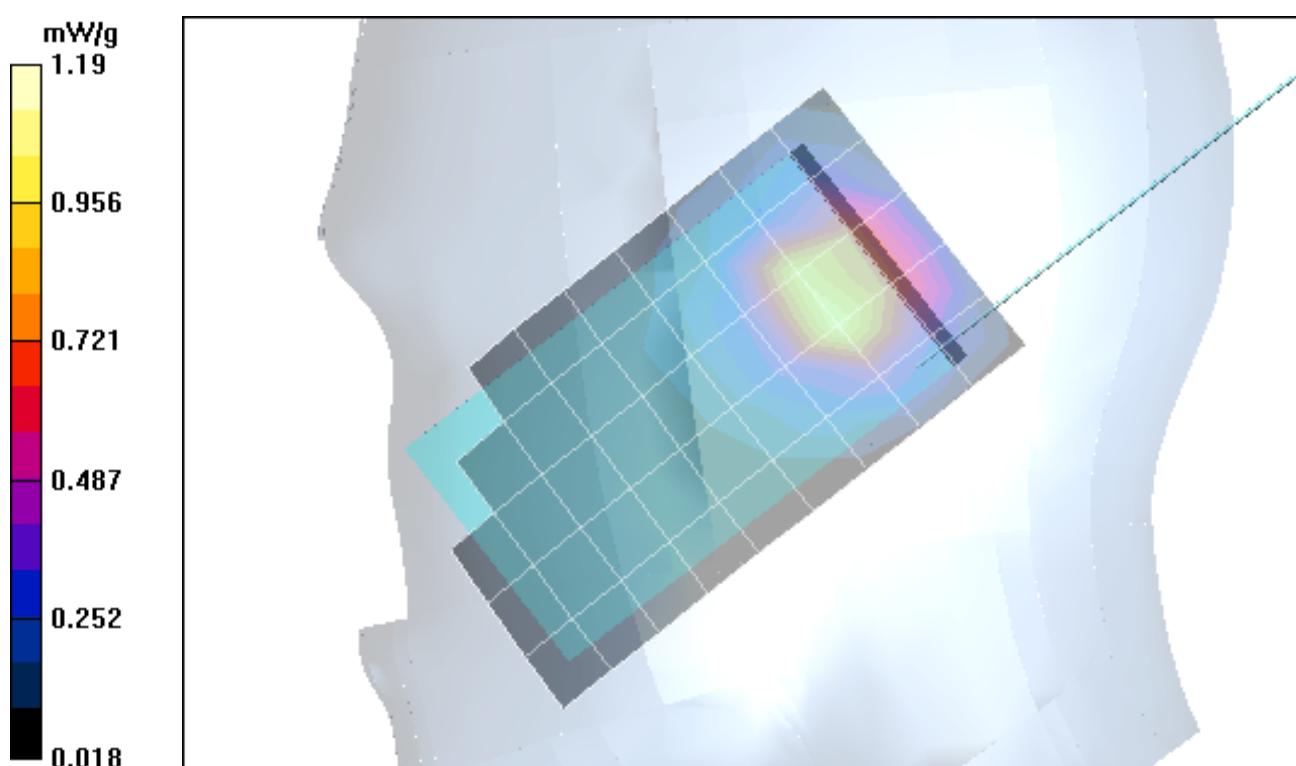

Date: 01/11/05

RM-18, CDMA1900, Channel 600, Left Tilt Position with Whip Extended, BL-6C Battery and MMC installed

Phantom: SAM3 PCS Head and Body, Phantom section: Left Section

Medium: 1900MHz Head, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.9 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.655 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 1.31 mW/g

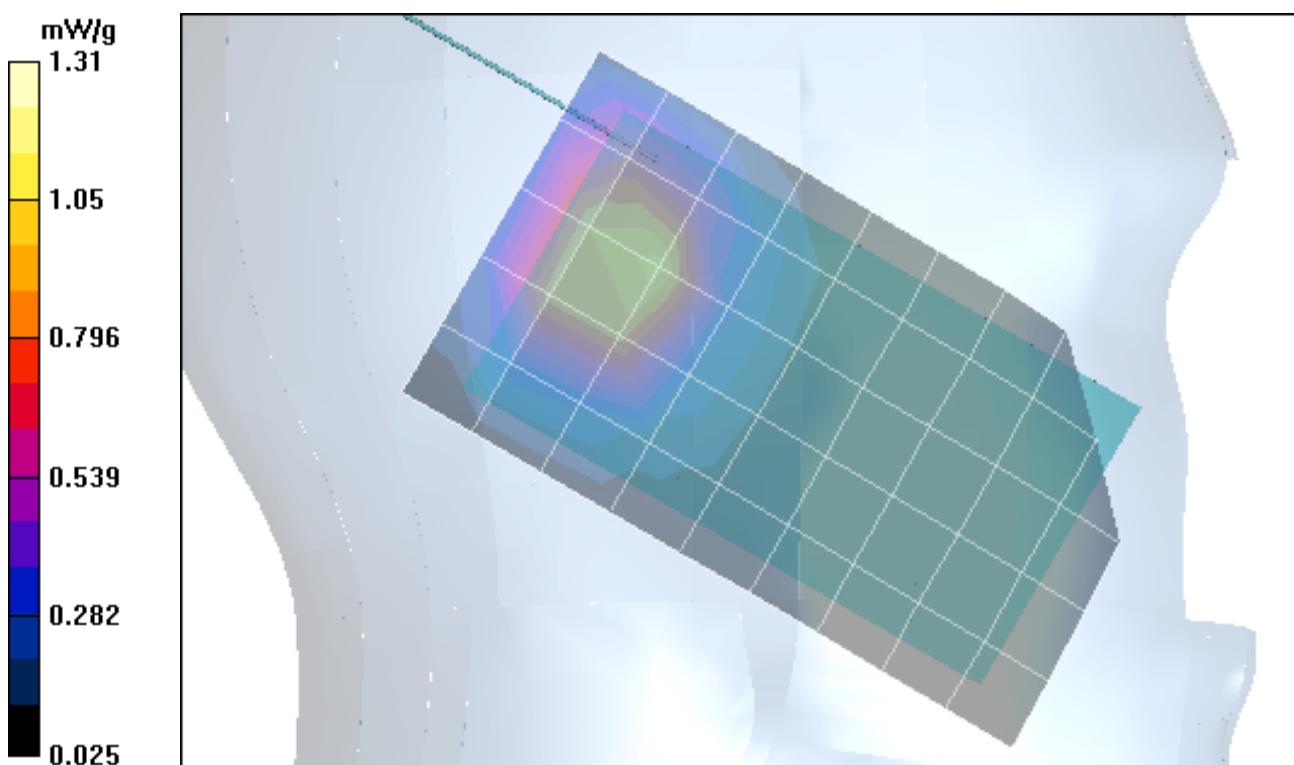

Date: 01/11/05

RM-18, CDMA1900, Channel 600, Left Tilt Position with Whip Extended, BL-6C Battery and Bluetooth active

Phantom: SAM3 PCS Head and Body, Phantom section: Left Section

Medium: 1900MHz Head, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 21.4

Probe: ET3DV6 - SN1504, ConvF(5.13, 5.13, 5.13)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.5 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.636 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 1.26 mW/g

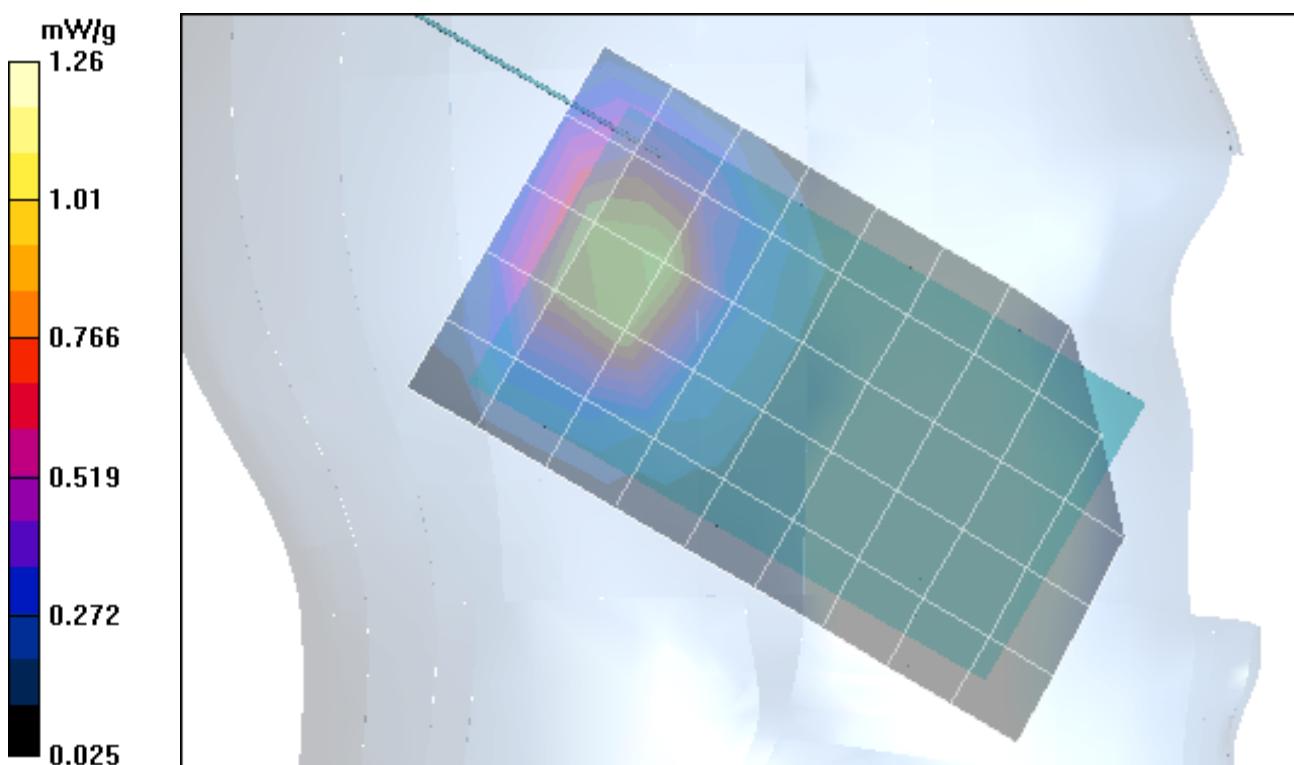

Date: 01/07/05

RM-18, CDMA800, Channel 777, Flat Position with 2.2cm Spacer, Whip Retracted and BL-6C Battery

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.957$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.593 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.880 mW/g

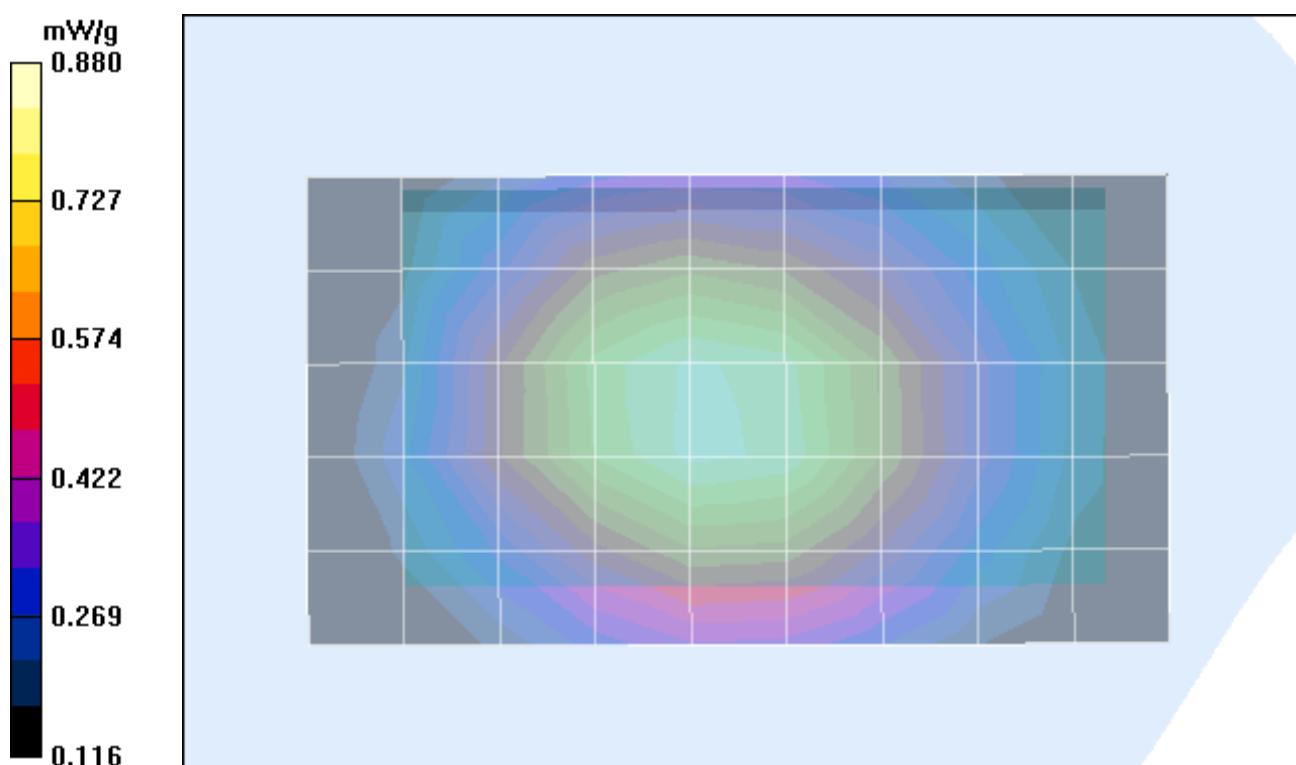

Date: 01/07/05

RM-18, CDMA800, Channel 777, Flat Position with 2.2cm Spacer, Whip Retracted and BL-6C Battery

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.957$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.593 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.880 mW/g

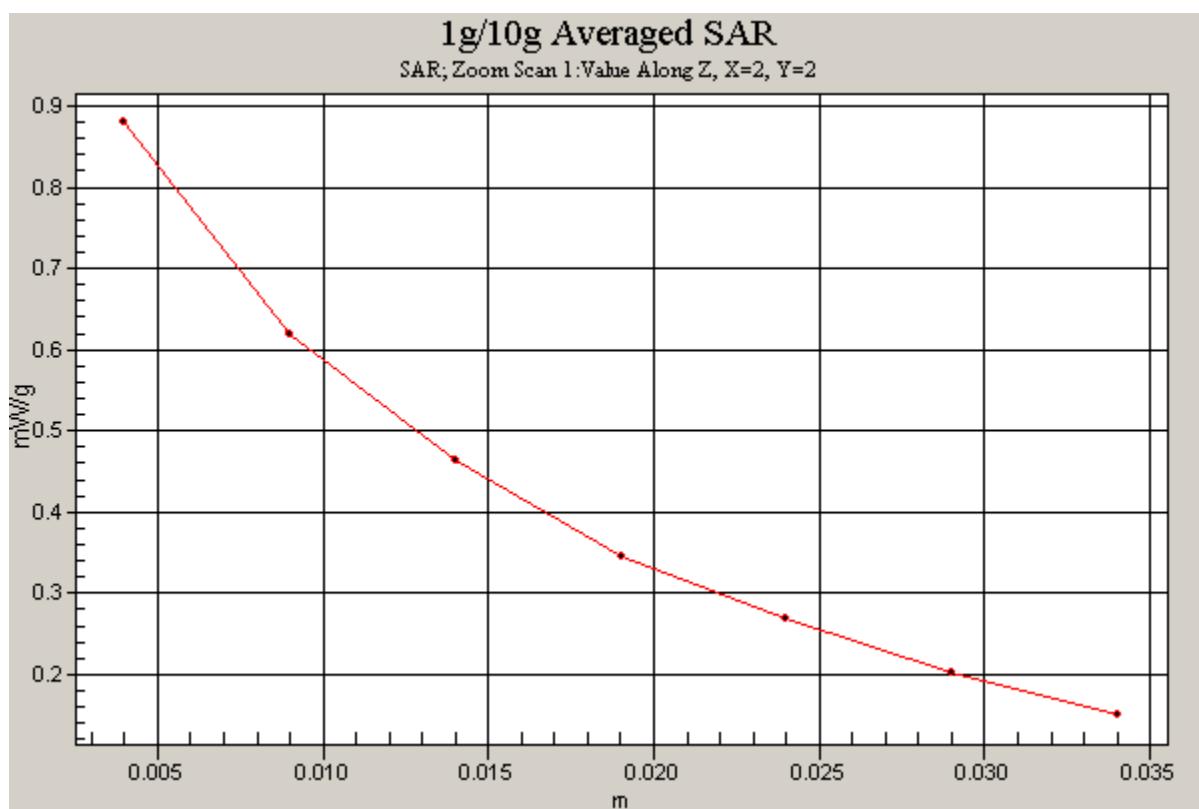

Date: 01/10/05

RM-18, CDMA800, Channel 384, Flat Position with 2.2cm Spacer, Whip Retracted, BL-6C  
Battery and MMC installed

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.937$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.819 mW/g; SAR(10 g) = 0.580 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.863 mW/g

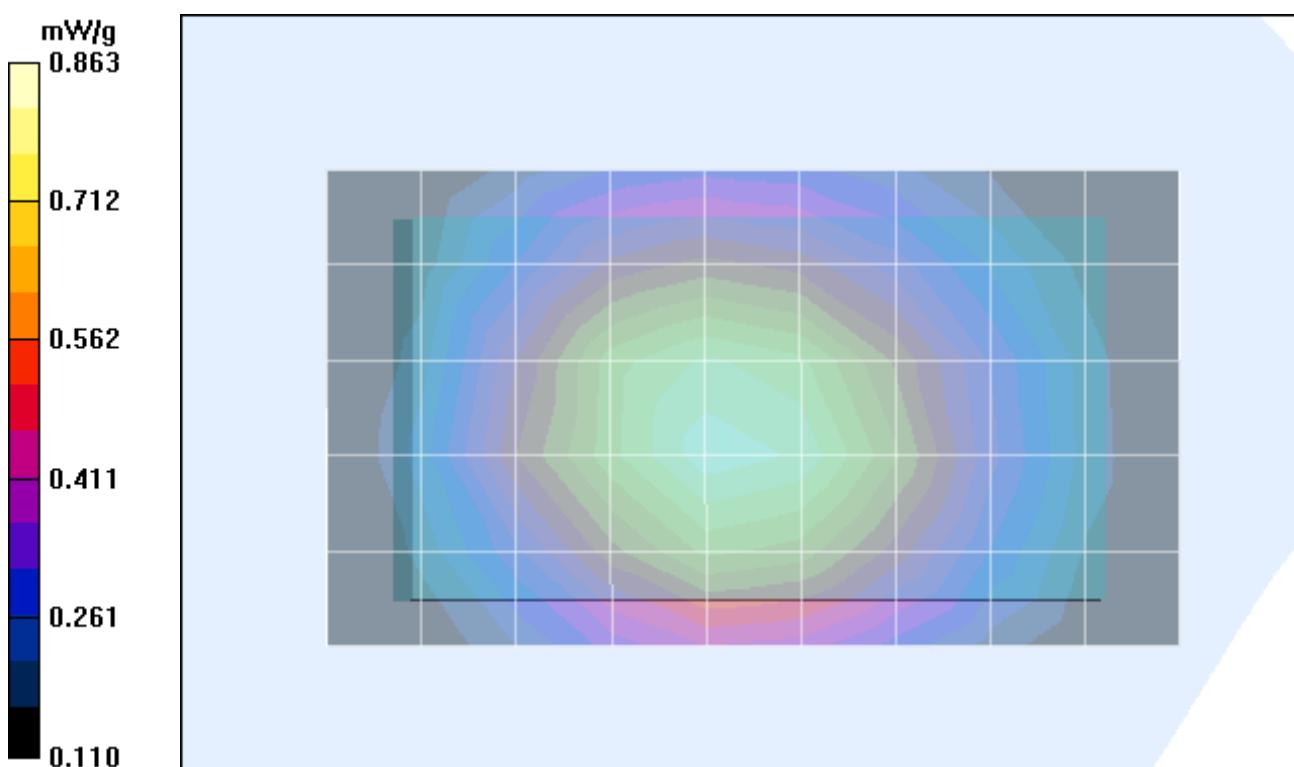

Date: 01/10/05

RM-18, CDMA800, Channel 777, Flat Position with 2.2cm Spacer, Whip Retracted, BL-6C  
Battery and Bluetooth active

Phantom: SAM2 Cellular Body, Phantom section: Flat Section

Medium: 835MHz Body, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.95$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup> ,

Temperature: 21.5

Probe: ET3DV6 - SN1504, ConvF(6.3, 6.3, 6.3)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.582 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.857 mW/g

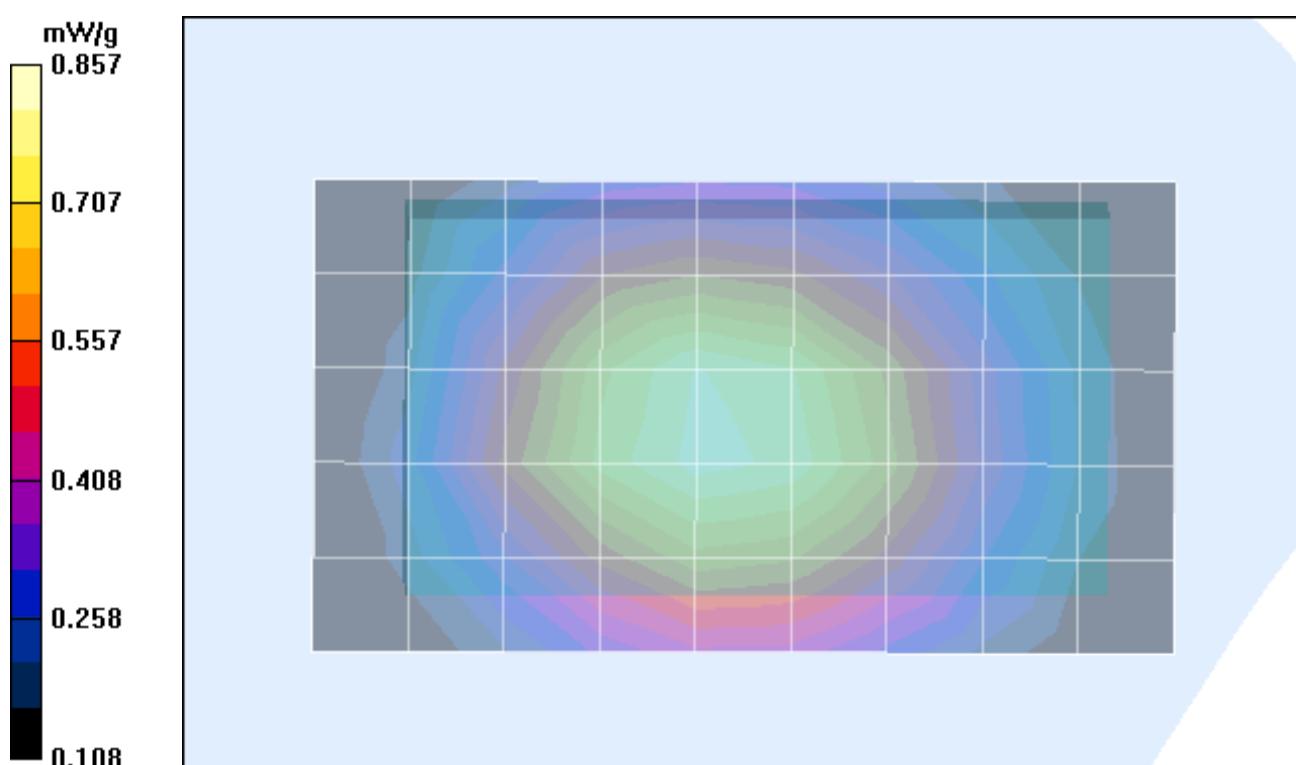

Date: 01/12/05

RM-18, CDMA1900, Channel 25, Flat Position with 2.2cm Spacer, Whip Retracted, BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Body, Frequency: 1851.25 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.381 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.686 mW/g

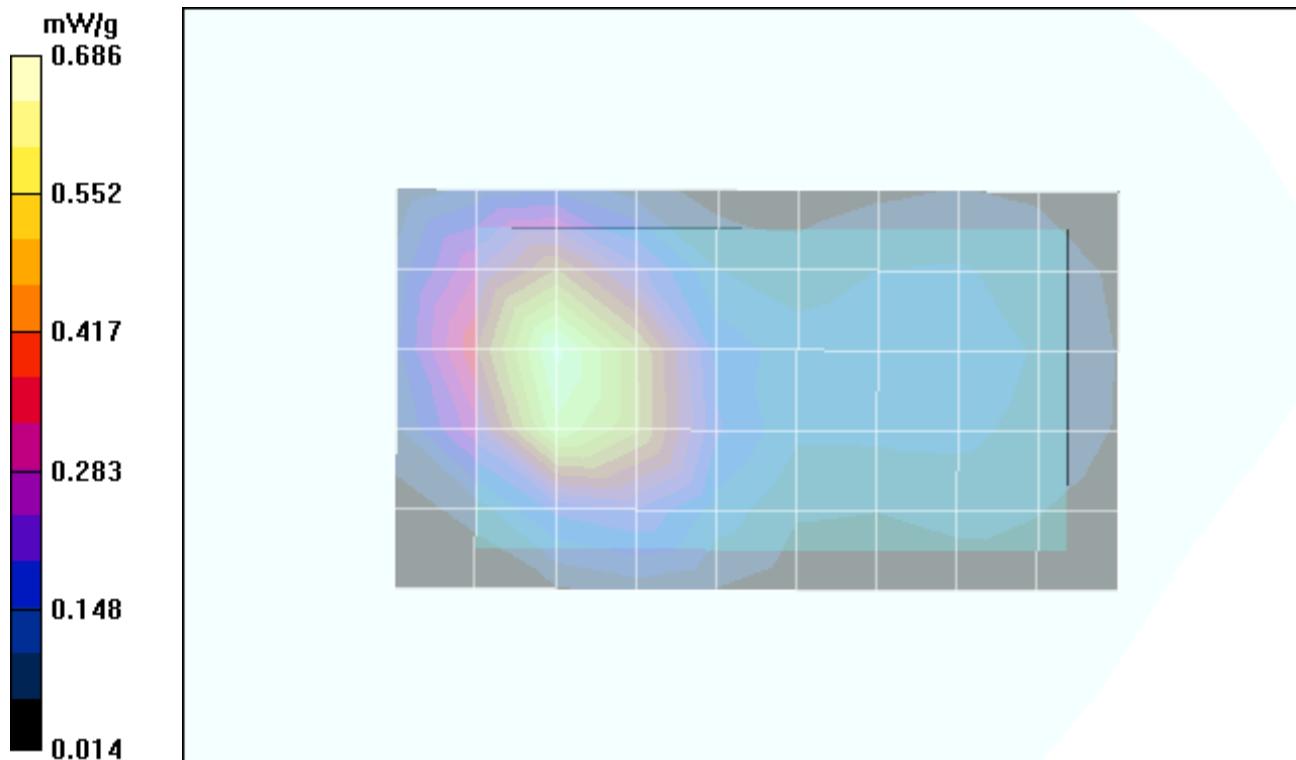

Date: 01/12/05

RM-18, CDMA1900, Channel 25, Flat Position with 2.2cm Spacer, Whip Retracted, BL-6C Battery

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Body, Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.5$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.381 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.686 mW/g

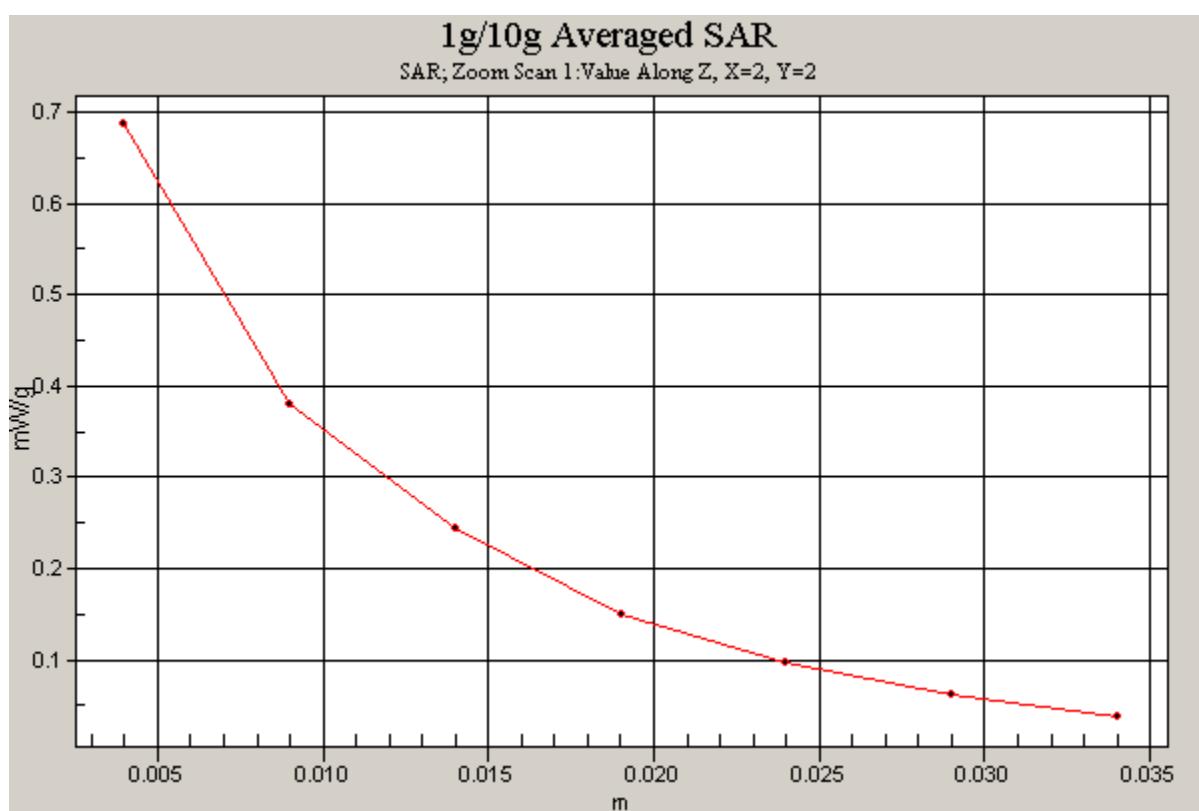

Date: 01/13/05

RM-18, CDMA1900, Channel 1175, Flat Position with 2.2cm Spacer, Whip Retracted, BL-6C  
Battery and MMC installed

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Body, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.359 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.632 mW/g

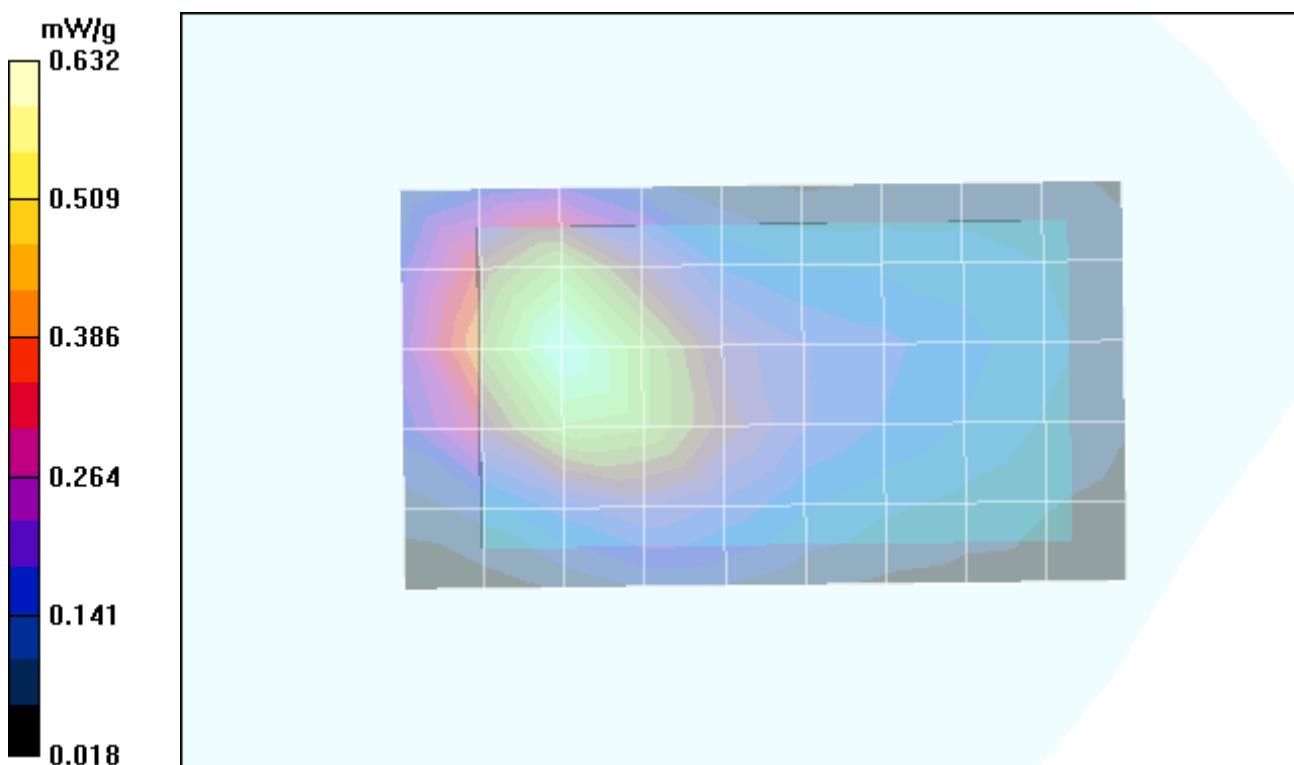

Date: 01/13/05

RM-18, CDMA1900, Channel 25, Flat Position with 2.2cm Spacer, Whip Retracted, BL-6C  
Battery and Bluetooth active

Phantom: SAM3 PCS Head and Body, Phantom section: Flat Section

Medium: 1900MHz Body, Frequency: 1851.25 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Temperature: 21.2

Probe: ET3DV6 - SN1504, ConvF(4.56, 4.56, 4.56)


Zoom Scan 1 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.369 mW/g (Worst Case Extrapolation)

Maximum value of SAR (measured) = 0.674 mW/g

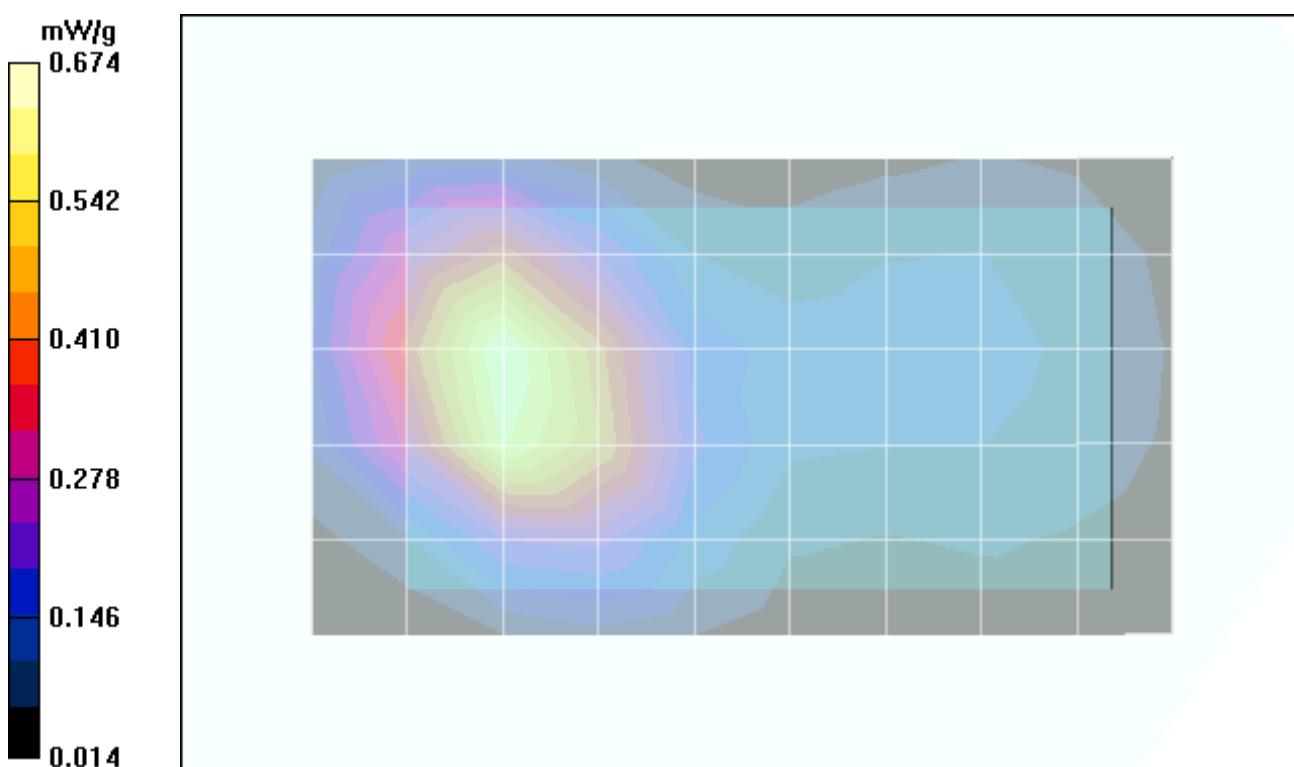



Accredited Laboratory  
Certificate Number: 1819-01

---

**APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)**

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Medela PX**

Certificate No. **ET3-1504\_Sep04**

CALIBRATION CERTIFICATE			
Object	<b>ET3DV6 SN-1504</b>		
Calibration procedure(s)	<b>CA.CAL.01.v5</b> Calibration procedure for dosimetric E-field probes		
Calibration date:	<b>September 22, 2004</b>		
Condition of the calibrated item	<b>In Tolerance</b>		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	3-Apr-03 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	3-Apr-03 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN:3013	8-Jan-04 (SPEAG, No. ES3-3013_Jan04)	Jan-05
DAE4	SN: 617	26-May-04 (SPEAG, No. DAE4-617_May04)	May-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04
Calibrated by:	Name <b>Nico Vetterli</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pukovic</b>	Function <b>Technical Manager</b>	Signature 
Issued: September 24, 2004			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

## DASY - Parameters of Probe: ET3DV6 SN:1504

### Sensitivity in Free Space<sup>A</sup>

NormX	<b>2.18</b> $\pm$ 9.9%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>1.82</b> $\pm$ 9.9%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>1.72</b> $\pm$ 9.9%	$\mu\text{V}/(\text{V}/\text{m})^2$

### Diode Compression<sup>B</sup>

DCP X	<b>91</b> mV
DCP Y	<b>91</b> mV
DCP Z	<b>91</b> mV

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

TSL                    900 MHz                    Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	<b>3.7</b> mm	<b>4.7</b> mm
SAR <sub>be</sub> [%]                    Without Correction Algorithm	9.3	4.8
SAR <sub>be</sub> [%]                    With Correction Algorithm	0.1	0.1

TSL                    1900 MHz                    Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance	<b>3.7</b> mm	<b>4.7</b> mm
SAR <sub>be</sub> [%]                    Without Correction Algorithm	13.9	9.3
SAR <sub>be</sub> [%]                    With Correction Algorithm	0.7	0.2

### Sensor Offset


Probe Tip to Sensor Center                    **2.7** mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

## Conversion Factor Assessment

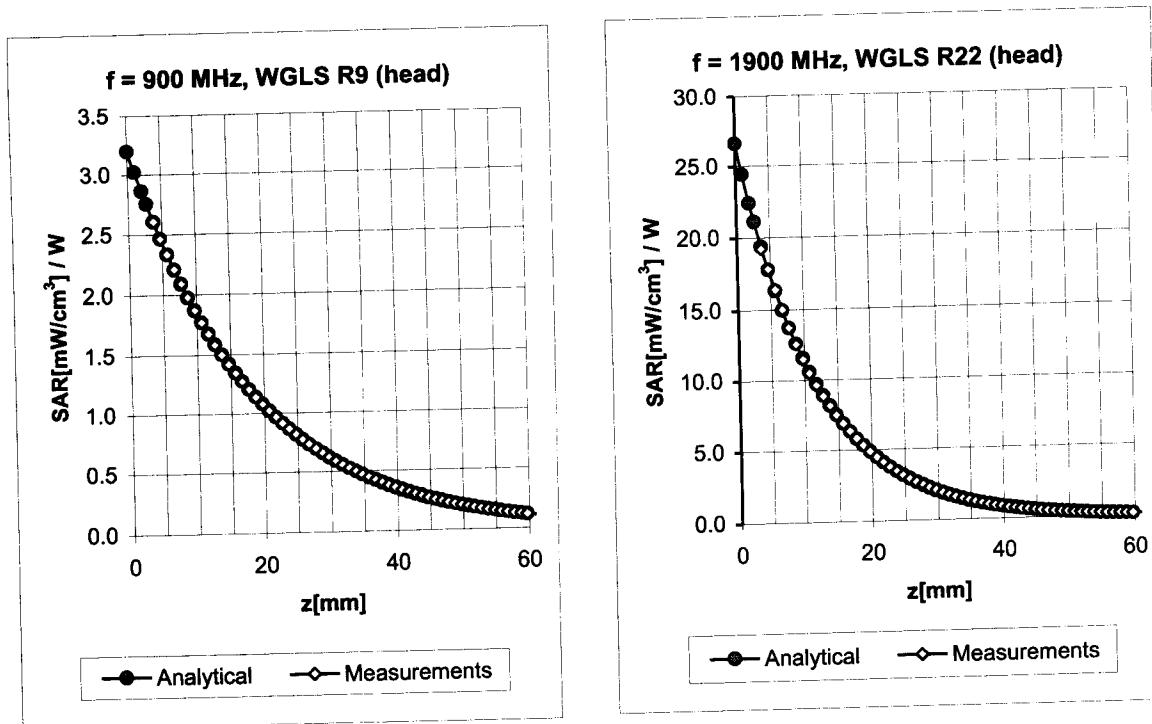

$f$ [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.90 \pm 5\%$	0.77	1.65	$6.73 \pm 11.0\% (k=2)$
900	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	0.73	1.73	$6.42 \pm 11.0\% (k=2)$
1750	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.72	2.06	$5.30 \pm 11.0\% (k=2)$
1900	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.64	2.30	$5.13 \pm 11.0\% (k=2)$
2450	$\pm 50 / \pm 100$	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	0.74	2.24	$4.54 \pm 11.8\% (k=2)$

$f$ [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	$\pm 50 / \pm 100$	Body	$55.2 \pm 5\%$	$0.97 \pm 5\%$	0.60	1.94	$6.30 \pm 11.0\% (k=2)$
900	$\pm 50 / \pm 100$	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	0.59	2.00	$6.03 \pm 11.0\% (k=2)$
1750	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.63	2.55	$4.67 \pm 11.0\% (k=2)$
1900	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.62	2.65	$4.56 \pm 11.0\% (k=2)$
2450	$\pm 50 / \pm 100$	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	0.80	1.95	$4.32 \pm 11.8\% (k=2)$

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY 4.3 B17 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited Laboratory  
Certificate Number: 1819-01



---

## APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland**

**Client** **Nokia Inc., Texas**

**CALIBRATION CERTIFICATE**

Object(s)	<b>D835V2 - SN:455</b>		
Calibration procedure(s)	<b>QA CAL-05.v2 Calibration procedure for dipole validation kits</b>		
Calibration date:	<b>October 3, 2003</b>		
Condition of the calibrated item	<b>In Tolerance (according to the specific calibration document)</b>		
<p>This calibration statement documents traceability of M&amp;TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity &lt; 75%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03
Calibrated by:	Name <b>Judith Mueller</b>	Function <b>Technician</b>	Signature 
Approved by:	Name <b>Katja Prokovic</b>	Function <b>Laboratory Director</b>	Signature 
Date issued: October 10, 2003			
<p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid &amp; Partner Engineering AG is completed.</p>			

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN455**

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz ( $\sigma = 0.9$  mho/m,  $\epsilon_r = 43$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.7, 6.7, 6.7); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 60

**Pin = 250 mW; d = 15 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 55.4 V/m

Power Drift = -0.007 dB

Maximum value of SAR = 2.56 mW/g

**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.56 mW/g

Reference Value = 55.4 V/m

Power Drift = -0.007 dB

Maximum value of SAR = 2.56 mW/g

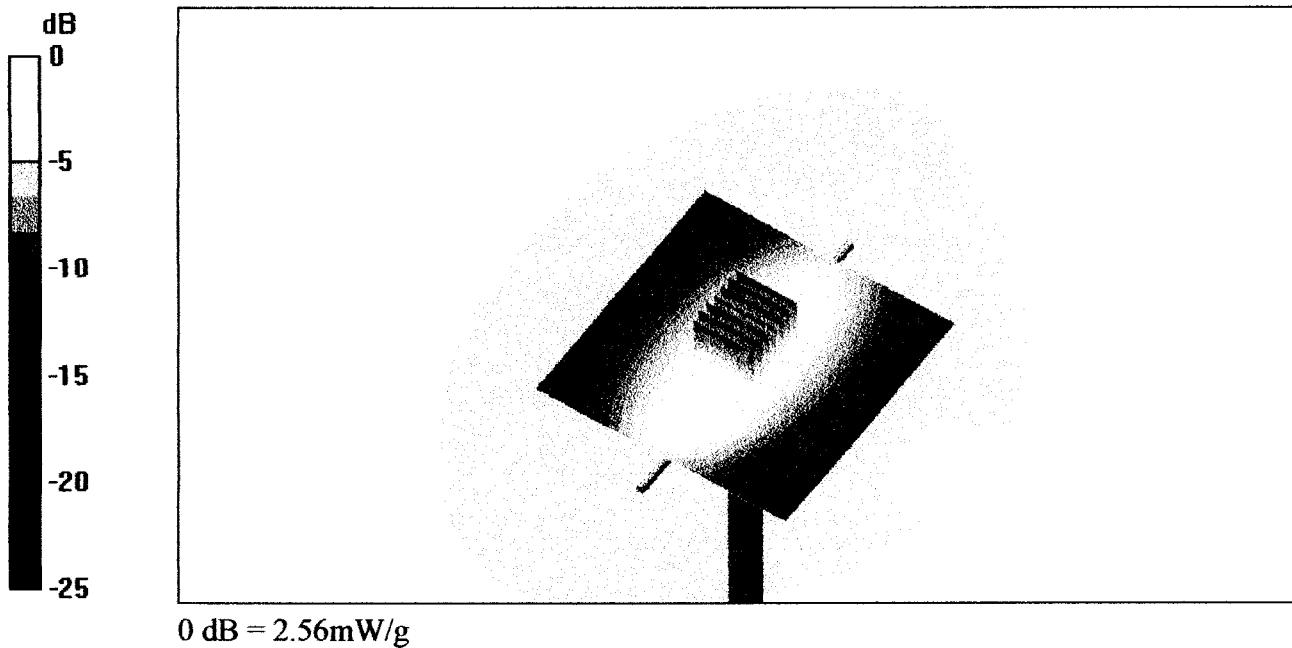

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN455**

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: Muscle 835 MHz ( $\sigma = 0.98 \text{ mho/m}$ ,  $\epsilon_r = 54.98$ ,  $\rho = 1000 \text{ kg/m}^3$ )

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 60

**Pin = 250 mW; d = 15 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.8 V/m

Power Drift = -0.006 dB

Maximum value of SAR = 2.66 mW/g

**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.6 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.64 mW/g

Reference Value = 54.8 V/m

Power Drift = -0.006 dB

Maximum value of SAR = 2.68 mW/g

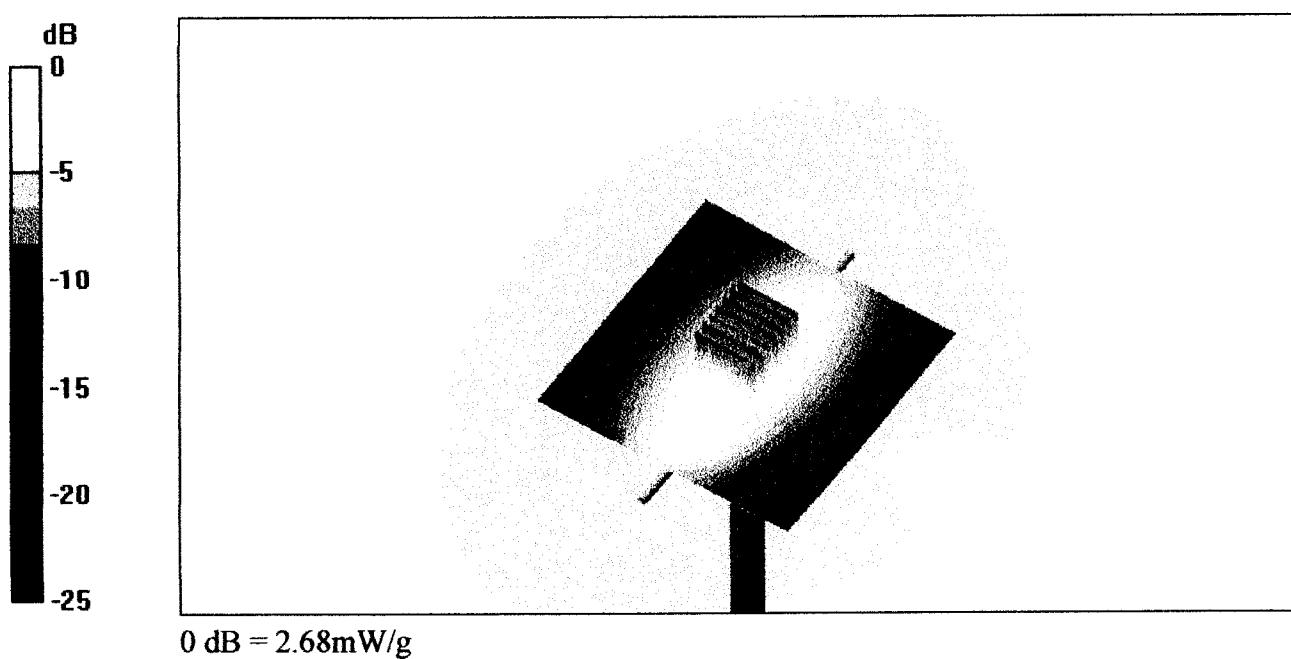

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**Client**

**Nokia Inc. Texas**

## **CALIBRATION CERTIFICATE**

Object(s) **D1900V2 - SN:504**

Calibration procedure(s) **QA CAL-05.v2**  
**Calibration procedure for dipole validation kits**

Calibration date: **July 16, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**


This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03

Calibrated by:	Name	Function	Signature
	Judith Mueller	Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Laboratory Director	

Date issued: July 17, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 07/16/03 17:31:56

Test Laboratory: SPEAG, Zurich, Switzerland  
File Name: SN504 SN1507 HSL1900 160703.da4

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN504**  
**Program: Dipole Calibration**

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz ( $\sigma = 1.46 \text{ mho/m}$ ,  $\epsilon_r = 40.17$ ,  $\rho = 1000 \text{ kg/m}^3$ )

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Pin = 250 mW; d = 10 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 93.5 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 11.4 mW/g

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.29 mW/g

Reference Value = 93.5 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 11.4 mW/g

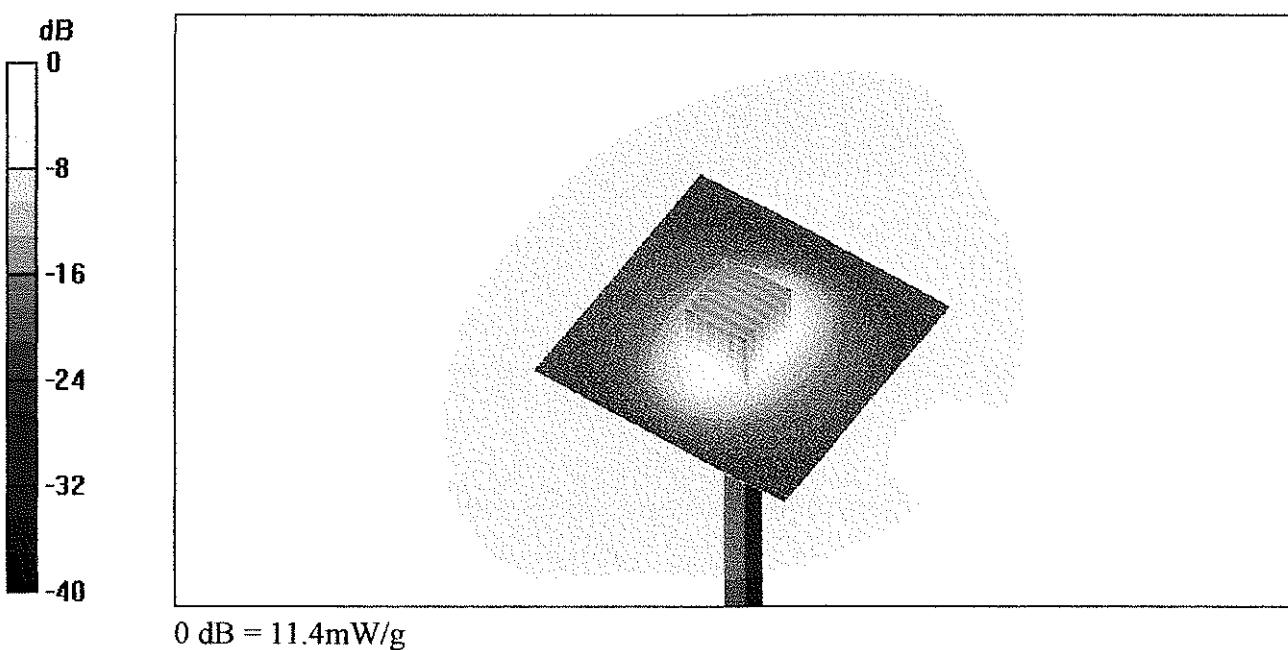

Date/Time: 07/16/03 11:37:18

Test Laboratory: SPEAG, Zurich, Switzerland  
File Name: SN504 SN1507 M1900 160703.da4

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN504**  
**Program: Dipole Calibration**

Communication System: CW-1900; Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: Muscle 1900 MHz ( $\sigma = 1.6 \text{ mho/m}$ ,  $\epsilon_r = 50.87$ ,  $\rho = 1000 \text{ kg/m}^3$ )

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Pin = 250 mW; d = 10 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 92 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 11.7 mW/g

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.45 mW/g

Reference Value = 92 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 11.8 mW/g

