

# TCC

Company Confidential



1 (30)

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-18  
Test Report #: WR479.001  
March 23, 2005

Accredited Laboratory  
Certificate Number: 1819-01

Ver 2.0

## CFR 47 Part 2, 22, and 24 Test Report

Test Report Number: WR479.001

**Terminal device:**

FCC ID: QMNRM-18 Model: 6638 Type: RM-18 HW: B3.5 SW: L125b004  
(Detailed information is listed in section 4).

Originator: Engineer / Technician  
Function: TCC - Dallas – EMC  
Version/Status: 2.0 Approved  
Location: TCC Directories  
Date: March 23, 2005

**Change History:**

| Version | Date    | Status   | Handled By    | Comments |
|---------|---------|----------|---------------|----------|
| 0.1     | 1/17/05 | Draft    | Mark Severson |          |
| 0.2     | 1/17/05 | Proposal | Mark Severson |          |
| 0.3     | 1/17/05 | Reviewed | Mark Severson |          |
| 1.0     | 1/17/05 | Approved | Mark Severson |          |
| 1.1     | 3/23/05 | Reviewed | Nerina Walton |          |
| 2.0     | 3/23/05 | Approved | Nerina Walton |          |

**Testing laboratory:**

Test & Certification Center (TCC) Dallas  
Nokia Inc  
6021 Connection Drive  
Irving, Texas 75039  
U.S.A.  
  
Tel. 972-894-5000

**Client:**

Nokia Inc.  
San Diego  
12278 Scripps Summit Dr.  
San Diego  
CA 92131  
USA  
Tel. +1858 831 5000  
Fax. +1 858 831 6500

**Date and signatures:**

March 23, 2005

For the contents:

**Mark Severson**  
Technical Review

**Nerina Walton**  
Manager Review

## TABLE OF CONTENTS

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1. GENERAL</b>                                                 | <b>4</b>  |
| 1.1 QUALITY SYSTEM                                                | 4         |
| 1.2 LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION        | 4         |
| 1.3 OBJECTIVE                                                     | 6         |
| 1.4 TEST SUMMARY                                                  | 6         |
| <b>2. STANDARDS BASIS</b>                                         | <b>7</b>  |
| <b>3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS</b>               | <b>8</b>  |
| 3.1 ABBREVIATIONS                                                 | 8         |
| 3.2 ACRONYMS                                                      | 8         |
| 3.3 TERMS                                                         | 8         |
| <b>4. EQUIPMENT-UNDER-TEST (EUT)</b>                              | <b>9</b>  |
| 4.1 DESCRIPTION OF TESTED DEVICE(S)                               | 9         |
| 4.2 PHOTOGRAPH OF TESTED DEVICE(S)                                | 9         |
| <b>5. TEST EQUIPMENT LIST</b>                                     | <b>10</b> |
| <b>6. RF POWER OUTPUT (CONDUCTED)</b>                             | <b>11</b> |
| 6.1 SETUP                                                         | 11        |
| 6.2 PASS/FAIL CRITERIA                                            | 11        |
| 6.3 DETAILED TEST RESULTS                                         | 11        |
| <b>7. RF POWER OUTPUT (RADIATED)</b>                              | <b>12</b> |
| 7.1 SETUP                                                         | 12        |
| 7.2 PASS/FAIL CRITERIA                                            | 12        |
| 7.3 DETAILED TEST RESULTS                                         | 13        |
| 7.4 MEASUREMENT UNCERTAINTY                                       | 13        |
| <b>8. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)</b> | <b>14</b> |
| 8.1 SETUP                                                         | 14        |
| 8.2 PASS/FAIL CRITERIA                                            | 14        |
| 8.3 DETAILED TEST RESULTS                                         | 15        |
| 8.4 MEASUREMENT UNCERTAINTY                                       | 18        |
| <b>9. SPURIOUS EMISSIONS AT ANTENNA TERMINALS</b>                 | <b>19</b> |
| 9.1 SETUP                                                         | 19        |
| 9.2 PASS/FAIL CRITERIA                                            | 19        |
| 9.3 DETAILED TEST RESULTS                                         | 19        |
| 9.4 MEASUREMENT UNCERTAINTY                                       | 25        |
| <b>10. FIELD STRENGTH OF SPURIOUS RADIATION</b>                   | <b>26</b> |
| 10.1 SETUP                                                        | 26        |
| 10.2 PASS/FAIL CRITERIA                                           | 26        |
| 10.3 DETAILED TEST RESULTS                                        | 27        |
| 10.4 MEASUREMENT UNCERTAINTY                                      | 28        |



Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-18

Test Report #: WR479.001

March 23, 2005

Accredited Laboratory  
Certificate Number: 1819-01

Ver 2.0

|            |                                                    |           |
|------------|----------------------------------------------------|-----------|
| <b>11.</b> | <b>FREQUENCY STABILITY (TEMPERATURE VARIATION)</b> | <b>29</b> |
| 11.1       | SETUP                                              | 29        |
| 11.2       | PASS/FAIL CRITERIA                                 | 29        |
| 11.3       | DETAILED TEST RESULTS                              | 29        |
| <b>12.</b> | <b>FREQUENCY STABILITY (VOLTAGE VARIATION)</b>     | <b>30</b> |
| 12.1       | SETUP                                              | 30        |
| 12.2       | PASS/FAIL CRITERIA                                 | 30        |
| 12.3       | DETAILED TEST RESULTS                              | 30        |

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.

Test &amp; Certification Center (TCC) - Dallas

FCC ID: QMNRM-18

Test Report #: WR479.001

March 23, 2005

Accredited Laboratory  
Certificate Number: 1819-01

Ver 2.0

## 1. GENERAL

### 1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661.

### 1.2 List of General Information Required for Certification

This list is in accordance with FCC Rules and Regulations, CFR 47, Part 2, and to 22H, 24E, Confidentiality.

#### 1.2.1 Sub-part 2.1033(c)(1)

Name and Address of Applicant:

Nokia Inc.  
San Diego  
12278 Scripps Summit Dr.  
San Diego  
CA 92131  
USA  
Tel. +1858 831 5000  
Fax. +1 858 831 6500

Manufacturer:

Nokia Inc.  
San Diego  
12278 Scripps Summit Dr.  
San Diego  
CA 92131  
USA  
Tel. +1858 831 5000  
Fax. +1 858 831 6500

#### 1.2.2 Sub-part 2.1033(c)(2)

FCC ID: QMNRM-18

Model No: 6638

#### 1.2.3 Sub-part 2.1033(c)(3)

Instruction Manual(s): Refer to attached EXHIBITS

#### 1.2.4 Sub-part 2.1033(c)(4)

Type of Emission: 1M25F9W

## 1.2.5 Sub-part 2.1033(c)(5)

Frequency Range, MHz: 824.7-848.31 MHz  
1851.25-1908.75 MHz

## 1.2.6 Sub-part 2.1033(c)(6)

Power Rating, Watts: 0.195W Cellular  
0.347W PCS

☐ Switchable ☒ Variable ☐ N/A

FCC Grant Note: BC- The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

## 1.2.7 Sub-part 2.1033(c)(7)

Maximum Power Rating, Watts: 0.347W

## 1.2.8 Sub-part 2.1033(c)(8)

Voltages & Currents in all elements in final R.F. Stage, including final transistor or solid-state device:  
Collector Current, A = 0.49  
Collector Voltage, Vdc = 3.7  
Supply Voltage, Vdc = 3.7

## 1.2.9 Sub-part 2.1033(c)(9)

Tune-up Procedure: Refer to attached EXHIBITS

## 1.2.10 Sub-part 2.1033(c)(10)

Circuit Diagram/Circuit Description:  
Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.  
Refer to attached EXHIBITS

## 1.2.11 Sub-part 2.1033(c)(11)

Label Information: Refer to attached EXHIBITS

## 1.2.12 Sub-part 2.1033(c)(12)

Photographs: Refer to attached EXHIBITS

## 1.2.13 Sub-part 2.1033(c)(13)

Digital Modulation Description: N/A

## 1.2.14 Sub-part 2.1033(c)(14)

Test and Measurement Data: FOLLOWS

## 1.3 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, Part 22, and Part 24.

## 1.4 Test Summary

**Test Results:** *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

| Test Performed                                         | Reference                                     | Section of Report | Complies / Does not comply / Not Tested |
|--------------------------------------------------------|-----------------------------------------------|-------------------|-----------------------------------------|
| RF Power Output (Conducted)                            | FCC Part 2.1046(a) / 22.913(a) / 24.232(b)(c) | 6                 | Complies                                |
| RF Power Output (Radiated)                             | FCC Part 22.913(a) / 24.232(b)                | 7                 | Complies                                |
| Occupied Bandwidth: Transmitter Conducted Measurements | FCC Part 2.1049(c)(1), 24.238(a)(b)           | 8                 | Complies                                |
| Spurious Emissions at Antenna Terminals                | FCC Part 2.1051                               | 9                 | Complies                                |
| Field Strength of Spurious Radiation                   | FCC Part 2.1053                               | 10                | Complies                                |
| Frequency Stability (Temperature Variation)            | FCC Part 2.1055(a)(1)(b), 24.235              | 11                | Complies                                |
| Frequency Stability (Voltage Variation)                | FCC Part 2.1055(d)(1)(2), 24.235              | 12                | Complies                                |



## 2. STANDARDS BASIS

*Testing has been carried out in accordance with:*

| REF. | Code of the standard | Name of the standard                                                                                                                                                               |
|------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | ANSI C63.4           | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.                 |
| 2    | FCC: CFR 47 Part 2   | Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures |
| 3    | FCC: CFR 47 Part 22  | Code of Federal Regulations (CFR) Title 47, Part 22 – Public Mobile Services: Subpart H – Cellular Radiotelephone Service                                                          |
| 4    | FCC: CFR 47 Part 24  | Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS                                                                  |
| 5    | RSS-132              | 800 MHz Cellular Telephones Employing New Technologies                                                                                                                             |
| 6    | RSS-133              | 2 GHz Personal Communications Services, Industry Canada                                                                                                                            |
| 7    | RSS-212              | Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)                                                                                                |
| 8    | RSP-100              | Radio Equipment Certification Procedure                                                                                                                                            |

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

### **Deviations:**

Not Applicable.

### 3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

#### 3.1 Abbreviations

dB - decibel

dBc - decibels from carrier

dBm - decibels per milliwatt (absolute measurement)

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

#### 3.2 Acronyms

AMPS - Advanced Mobile Phone System

BSS - Base Station Simulator

CDMA - Code Division Multiple Access

EDRP - Effective Dipole Radiated Power

EIRP - Effective Isotropic Radiated Power

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

ERP - Effective Radiated Power

EUT - Equipment under Test

GSM - Global System for Mobile communications

PCS - Personal Communications Services

RF - Radio Frequency

TDMA - Time Division Multiple Access

#### 3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.

## 4. EQUIPMENT-UNDER-TEST (EUT)

*The results in this report relate only to the items listed below:*

### 4.1 Description of Tested Device(s):

| Test Performed                                             | Mode of Operation       | Date of Receipt | Condition of Sample | Item    | Identifying Information                                                                              |
|------------------------------------------------------------|-------------------------|-----------------|---------------------|---------|------------------------------------------------------------------------------------------------------|
| FCC Parts<br>2.10646(a), 22.913(a) /<br>24.232(b), 2.1053  | CDMA 1900 /<br>CDMA 800 | 27 Dec 04       | Operational         | Handset | Model: 6638<br>Type: RM-18<br>SW: L125b004<br>HWID: B3.5<br>ESN: 044/00485679<br>Code: 0518212LL10EZ |
| FCC Parts<br>2.1049(c)(1), 24.238(a)(b),<br>2.1051, 2.1055 | CDMA 1900 /<br>CDMA 800 | 7-Jan-05        | Operational         | Handset | Model: 6638<br>Type: RM-18<br>SW: L125b004<br>HWID: B3.5<br>ESN: 044/00485685<br>Code: 0518212LL10EZ |
| N/A                                                        | N/A                     | 27 Dec 04       | Operational         | Battery | Type: BL-6C<br>Other: 3.7 vdc                                                                        |

Note: phones used for test were configured for FBUS functionality by installing zero Ohm jumpers on the PWB at the flash pins. This configuration was chosen to support FBUS functionality at the bottom connector instead of the USB.

### 4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS

## 5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

| Section of Report | NMP#           | Test Equipment                  | Mfr. #           | Model #              | Calibration Due Date | Calibration Interval |
|-------------------|----------------|---------------------------------|------------------|----------------------|----------------------|----------------------|
| 8, 9              | 02663<br>02661 | EMI Receiver                    | Agilent          | 85460A               | 3/23/2005            | 12mos                |
| 6, 8, 9           | 02625          | Base Station                    | Rhode & Schwarz  | CMU200               | 6/30/2005            | 12mos                |
| 9                 | 03155          | Temperature/<br>Humidity Sensor | Pinnacle         | ID/TRH               | 7/15/2005            | 12mos                |
| 9                 | 02680          | EMI Analyzer                    | Agilent          | E7405A               | 12/29/2005           | 12mos                |
| 7, 10             | 01472          | Biconilog Antenna               | EMC Test Systems | 3142B                | 4/08/2005            | 12mos                |
| 7, 10             | 02846          | Turntable and Tower Controller  | Sunol            | FM2022 & 2846        | N/A                  | N/A                  |
| 7, 10             | 00065          | Horn Antenna                    | EMCO             | 3115                 | 7/16/2005            | 12mos                |
| 7, 10             | 02664          | EMI Receiver                    | Agilent          | 8546A / 85460A       | 2/23/2005            | 12mos                |
| 7, 10             | 02665          | EMI Receiver                    | Agilent          | 8546A / 85460A       | 2/23/2005            | 12mos                |
| 7, 10             | 02679          | EMI Analyzer                    | Agilent          | E7405                | 3/13/2005            | 12mos                |
| 12                | 00837          | Temperature Chamber             | Tenney           | Tenney Environmental | 1/20/2006            | 12mos                |
| 6                 | 02549          | Power Meter                     | Agilent          | E4418B               | 10/06/2005           | 12mos                |
| 6                 | 02672          | Power Sensor                    | Agilent          | E9304A               | 9/21/2005            | 12mos                |

## 6. RF POWER OUTPUT (CONDUCTED)

**Specification: FCC Part 2.1046(a), 22.913(a), 24.232(b)(c)**

### 6.1 Setup

Testing was performed with the EUT connected to a 6dB splitter and then to the RF Power Meter to measure the conducted RF power output. The base station simulator was connected to the other port of the splitter to establish a call.

### 6.2 Pass/Fail Criteria

Not Applicable

### 6.3 Detailed Test Results

|                                   |                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------|
| <b>Test Technician / Engineer</b> | Darreyl Roberts                                                                                      |
| <b>Date of Measurement</b>        | 12/30/2004                                                                                           |
| <b>Temperature</b>                | 22.0°C                                                                                               |
| <b>Humidity</b>                   | 32.0%RH                                                                                              |
| <b>Test Result</b>                | Was operated at max power and tested in accordance with FCC Part 2.1046(a), 22.913(a), 24.232(b)(c). |

#### CDMA 800

| Channel | Freq Max (MHz) | Max (mW) | Max (dBm) |
|---------|----------------|----------|-----------|
| 1013    | 824.70 MHz     | 316.2    | 25.0      |
| 384     | 836.52 MHz     | 331.1    | 25.2      |
| 777     | 848.31 MHz     | 323.6    | 25.1      |



#### CDMA 1900

| Channel | Freq Max (MHz) | Max (mW) | Max (dBm) |
|---------|----------------|----------|-----------|
| 25      | 1851.25 MHz    | 204.2    | 23.1      |
| 600     | 1880.0 MHz     | 199.5    | 23.0      |
| 1175    | 1908.75 MHz    | 204.2    | 23.1      |

## 7. RF POWER OUTPUT (RADIATED)

*Specification: FCC Part 22.913(a), 24.232(b)(c)*

### 7.1 Setup

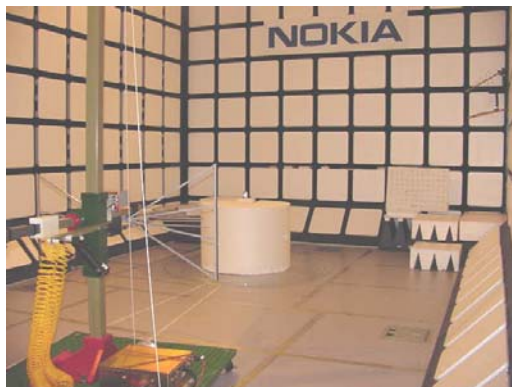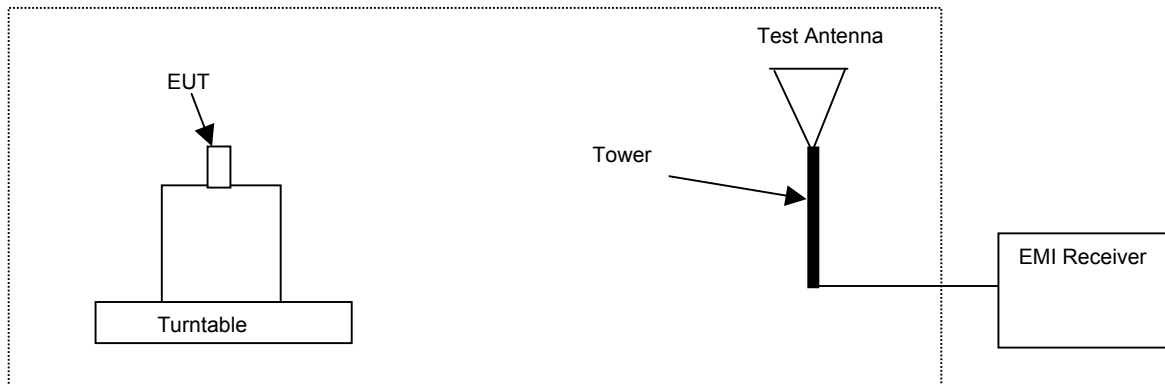

### 7.2 Pass/Fail Criteria

| Band     | FCC Limit (dBm) |
|----------|-----------------|
| Cellular | 38.5 (EDRP)     |
| PCS      | 33.0 (EIRP)     |

## 7.3 Detailed Test Results

|                                   |                                                         |
|-----------------------------------|---------------------------------------------------------|
| <b>Test Technician / Engineer</b> | Bob Alexander                                           |
| <b>Date of Measurement</b>        | 1/11/05                                                 |
| <b>Temperature</b>                | 22°C                                                    |
| <b>Humidity</b>                   | 42 %RH                                                  |
| <b>Test Result</b>                | Complies with FCC Part 22.913(a) and FCC Part 24.232(b) |

Note: measurements were performed with 3MHz RBW/VBW.

### Antenna Retracted

#### Cellular Band, CDMA 800

| Channel | Freq Max (MHz) | EDRP EMI (mW) | EDRP EMI (dBm) | Pol. |
|---------|----------------|---------------|----------------|------|
| 1013    | 824.70         | 104.7         | 20.2           | V    |
| 384     | 836.52         | 169.8         | 22.3           | V    |
| 777     | 848.31         | 141.3         | 21.5           | V    |

#### PCS Band, CDMA 1900

| Channel | Freq Max (MHz) | EIRP EMI (mW) | EIRP EMI (dBm) | Pol. |
|---------|----------------|---------------|----------------|------|
| 25      | 1851.25        | 195.0         | 22.9           | V    |
| 600     | 1880.00        | 257.0         | 24.4           | V    |
| 1175    | 1908.75        | 346.7         | 25.4           | V    |

### Antenna Extended

#### Cellular Band, CDMA 800

| Channel | Freq Max (MHz) | EDRP EMI (mW) | EDRP EMI (dBm) | Pol. |
|---------|----------------|---------------|----------------|------|
| 1013    | 824.70         | 144.5         | 21.6           | V    |
| 384     | 836.52         | 195.0         | 22.9           | V    |
| 777     | 848.31         | 190.5         | 22.8           | V    |

#### PCS Band, CDMA 1900

| Channel | Freq Max (MHz) | EIRP EMI (mW) | EIRP EMI (dBm) | Pol. |
|---------|----------------|---------------|----------------|------|
| 25      | 1851.25        | 141.3         | 21.5           | V    |
| 600     | 1880.00        | 166.0         | 22.2           | V    |
| 1175    | 1908.75        | 182.0         | 22.6           | V    |

## 7.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 2.4dB for 800 to 2000 MHz.

## 8. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

*Specification: FCC Part 2.1049(c)(1), 24.238(a)(b)*

### 8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

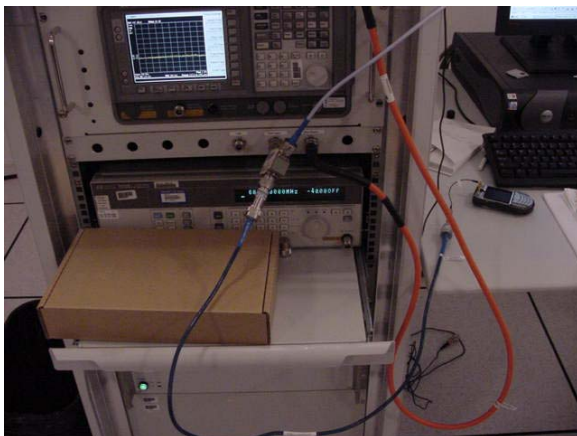

### 8.2 Pass/Fail Criteria

#### Occupied Bandwidth, Out of Band

| Band                       | Frequency Range (MHz) | FCC Limits (dBm) |
|----------------------------|-----------------------|------------------|
| Cellular 800, Low Channel  | < 824                 | -13              |
| Cellular 800, High Channel | > 849                 | -13              |
| PCS 1900, Low Channel      | < 1850                | -13              |
| PCS 1900, High Channel     | > 1910                | -13              |

#### Occupied Bandwidth, In Band


No pass/fail, these plots are used to determine the emission designators.

## 8.3 Detailed Test Results

|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Test Technician / Engineer | Darreyl Roberts                                   |
| Date of Measurement        | 1/07/05                                           |
| Temperature                | 22°C                                              |
| Humidity                   | 32.0%RH                                           |
| Test Result                | Complies with FCC Part 2.1049(c)(1), 24.238(a)(b) |

### Cellular Band, CDMA 800, Channel 1013


12.5 kHz RBW, 30 kHz VBW, 2.6s Sweep Time

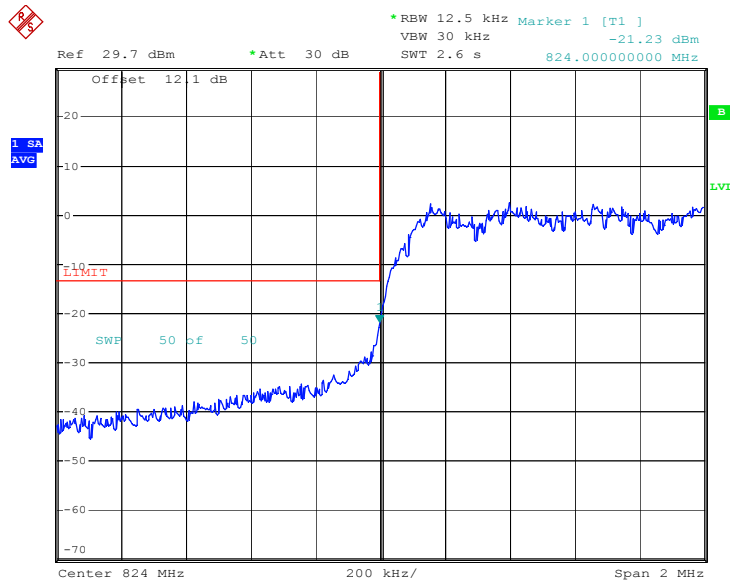

Date: 10.JAN.2005 10:52:07

**Cellular Band, CDMA, Channel 777**


12.5 kHz RBW, 30kHz VBW, 2.6s Sweep Time

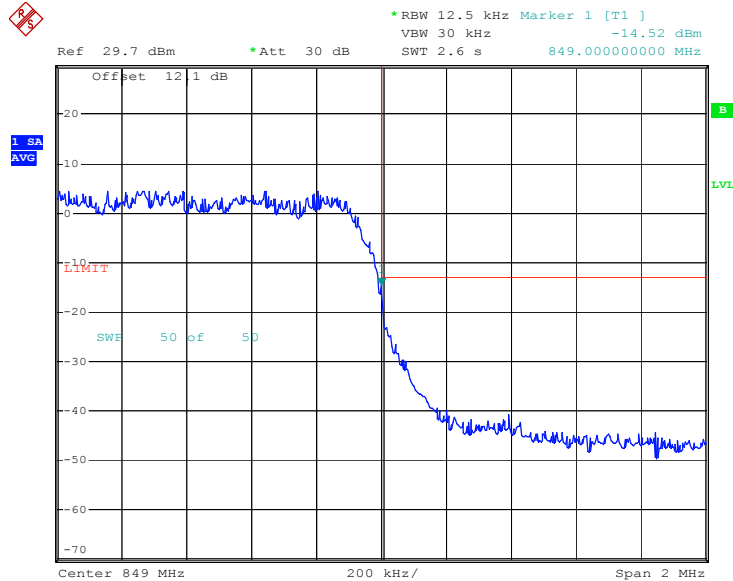

Date: 10.JAN.2005 10:48:52


**PCS Band, CDMA1900 Low ch25**

30 kHz RBW/VBW, 100ms Sweep Time

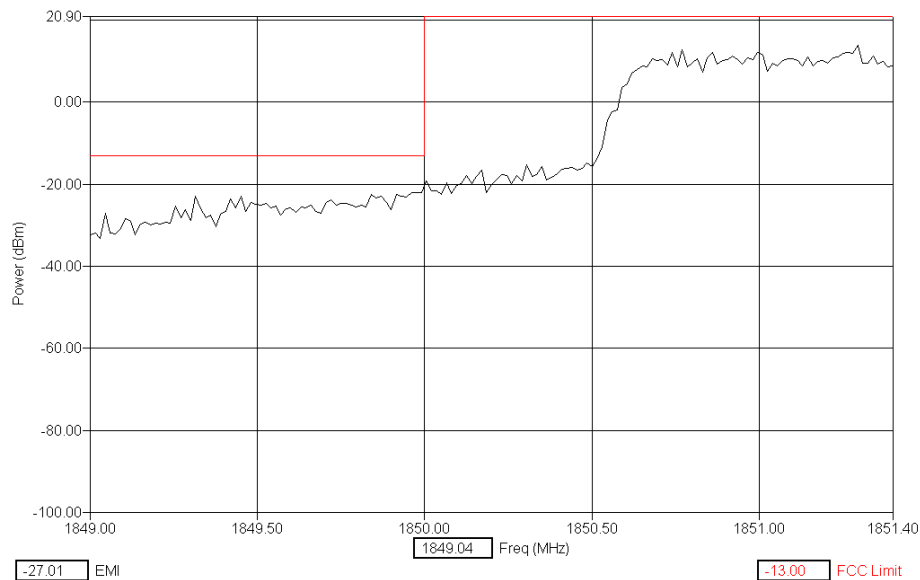


## PCS Band. CDMA 1900, Channel 1175

30 kHz RBW/VBW, 100ms Sweep Time

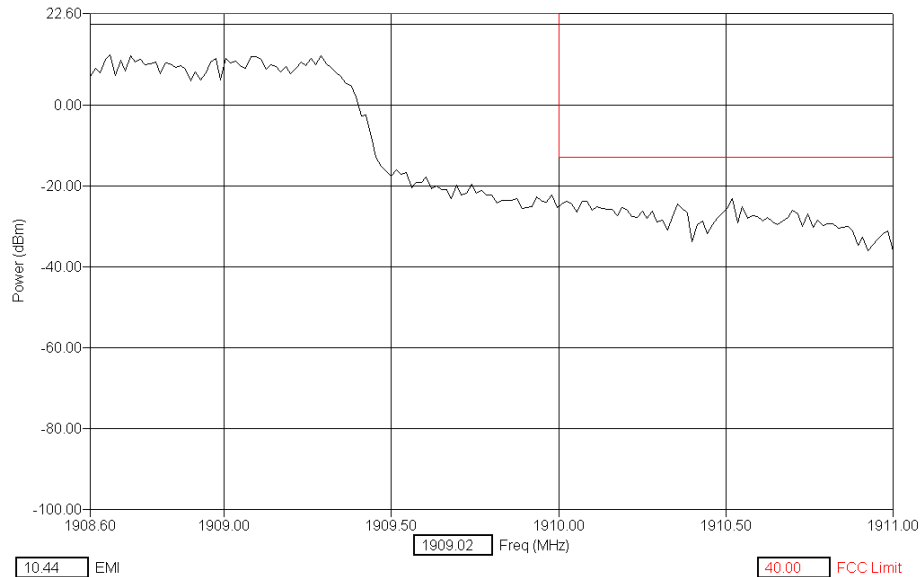


## Occupied Bandwidth, In Band; Cellular, CDMA 800, Channel 384

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

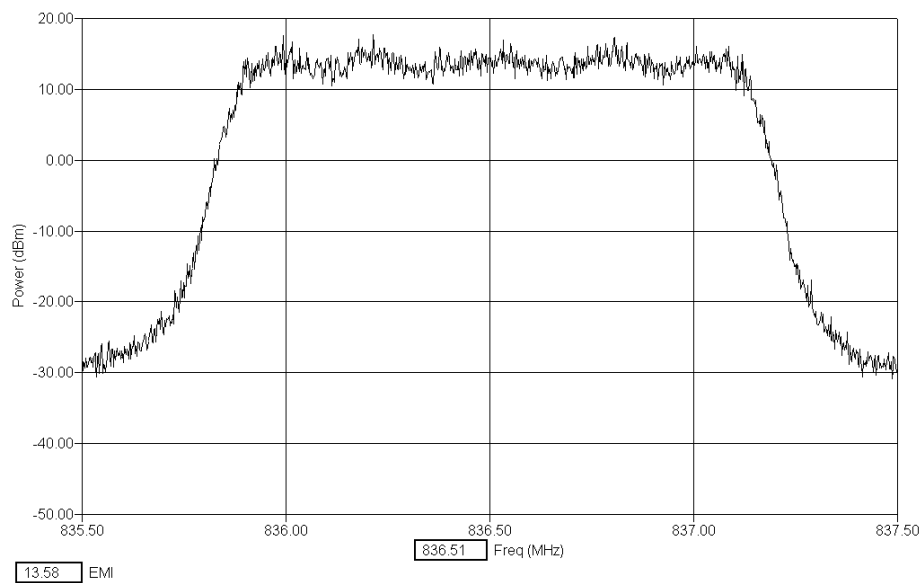

## Occupied Bandwidth, In Band; PCS, CDMA 1900, Channel 600

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

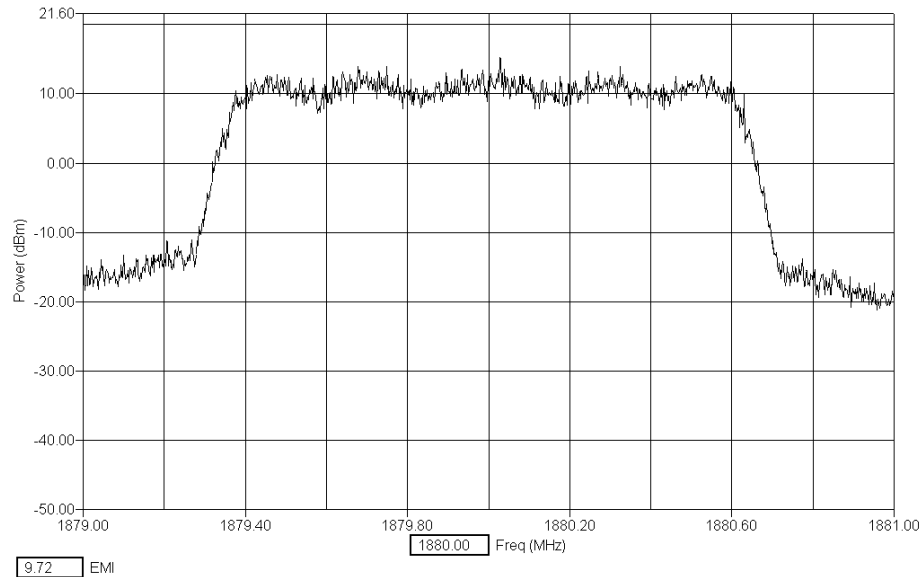

## 8.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

## 9. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

**Specification: FCC Part 2.1051**

### 9.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

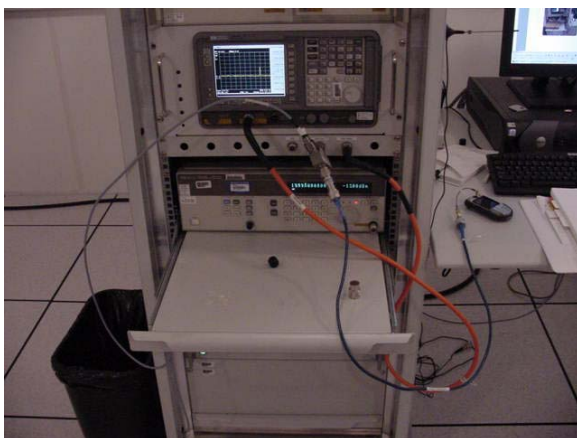

### 9.2 Pass/Fail Criteria

| Band           | Frequency Range (MHz) | FCC Limits (dBm) |
|----------------|-----------------------|------------------|
| Cellular / PCS | 30 – 18000 *          | -13              |

\* Frequency to be investigated up to the 10<sup>th</sup> harmonic of the highest clock or frequency used.

### 9.3 Detailed Test Results

|                            |                               |
|----------------------------|-------------------------------|
| Test Technician / Engineer | Darreyl Roberts               |
| Date of Measurement        | January 07, 2005              |
| Temperature                | 22.0 °C                       |
| Humidity                   | 32.0 %RH                      |
| Test Result                | Complies with FCC Part 2.1051 |

Note 1: EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Note 2: measurements were performed with 3MHz RBW/VBW.

**CDMA 1900 Low Ch25**

| Freq<br>Max<br>(MHz) | (Pk) EMI<br>(dBm) | FCC<br>Limit<br>(dBm) |
|----------------------|-------------------|-----------------------|
| 3702.5               | -37.12            | -13                   |
| 5553.75              | -45.15            | -13                   |
| 7405                 | -45.86            | -13                   |
| 9256.25              | -47.21            | -13                   |
| 11107.5              | -46.1             | -13                   |
| 12958.75             | -46.45            | -13                   |
| 14810                | -45.86            | -13                   |
| 16661.25             | -44.09            | -13                   |
| 18512.5              | -46.31            | -13                   |

**CDMA 1900 Mid Ch600**

| Freq<br>Max<br>(MHz) | (Pk) EMI<br>(dBm) | FCC<br>Limit<br>(dBm) |
|----------------------|-------------------|-----------------------|
| 3760                 | -40.2             | -13                   |
| 5640                 | -47.38            | -13                   |
| 7520                 | -46.51            | -13                   |
| 9400                 | -47.1             | -13                   |
| 11280                | -47.42            | -13                   |
| 13160                | -44.1             | -13                   |
| 15040                | -46.02            | -13                   |
| 16920                | -45.39            | -13                   |
| 18800                | -46.36            | -13                   |



**CDMA 1900 High Ch1175**

| Freq<br>Max<br>(MHz) | (Pk) EMI<br>(dBm) | FCC<br>Limit<br>(dBm) |
|----------------------|-------------------|-----------------------|
| 3817.5               | -40.64            | -13                   |
| 5726.25              | -48.49            | -13                   |
| 7635                 | -45.96            | -13                   |
| 9543.75              | -47.24            | -13                   |
| 11452.5              | -47.5             | -13                   |
| 13361.25             | -44.06            | -13                   |
| 15270                | -44.12            | -13                   |
| 17178.75             | -45.63            | -13                   |
| 19087.5              | -46.37            | -13                   |



**CDMA 800 Low Ch1013**

| Freq<br>Max<br>(MHz) | (Pk) EMI<br>(dBm) | FCC<br>Limit<br>(dBm) |
|----------------------|-------------------|-----------------------|
| 1649.4               | -48.37            | -13                   |
| 2474.1               | -48.61            | -13                   |
| 3298.8               | -49.38            | -13                   |
| 4123.5               | -49.37            | -13                   |
| 4948.2               | -49.86            | -13                   |
| 5772.9               | -49.66            | -13                   |
| 6597.6               | -49.42            | -13                   |
| 7422.3               | -46.41            | -13                   |
| 8247                 | -46.55            | -13                   |

**CDMA 800 Mid Ch384**

| Freq<br>Max<br>(MHz) | (Pk) EMI<br>(dBm) | FCC<br>Limit<br>(dBm) |
|----------------------|-------------------|-----------------------|
| 1673.04              | -47.66            | -13                   |
| 2509.56              | -48.26            | -13                   |
| 3346.08              | -49.33            | -13                   |
| 4182.6               | -49.94            | -13                   |
| 5019.12              | -49.87            | -13                   |
| 5855.64              | -49.79            | -13                   |
| 6692.16              | -46.72            | -13                   |
| 7528.68              | -47.53            | -13                   |
| 8365.2               | -46.94            | -13                   |

**CDMA 800 High Ch777**

| Freq<br>Max<br>(MHz) | (Pk) EMI<br>(dBm) | FCC<br>Limit<br>(dBm) |
|----------------------|-------------------|-----------------------|
| 1696.62              | -48.49            | -13                   |
| 2544.93              | -45.77            | -13                   |
| 3393.24              | -47.8             | -13                   |
| 4241.55              | -49.73            | -13                   |
| 5089.86              | -49.3             | -13                   |
| 5938.17              | -49.36            | -13                   |
| 6786.48              | -47.83            | -13                   |
| 7634.79              | -46.71            | -13                   |
| 8483.1               | -47.78            | -13                   |

**9.4 Measurement Uncertainty**


The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

## 10. FIELD STRENGTH OF SPURIOUS RADIATION

*Specification: FCC Part 2.1053*

### 10.1 Setup

Test equipment set-up.

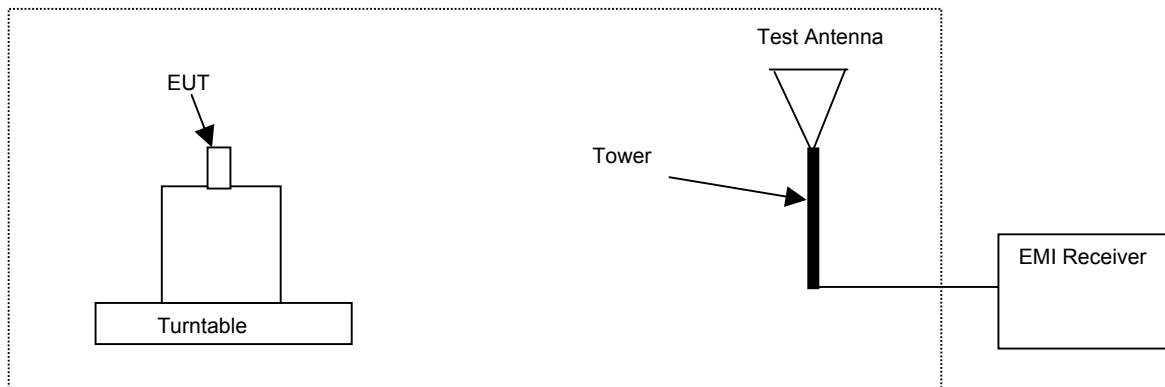

### 10.2 Pass/Fail Criteria

| Band           | Frequency Range (MHz) | FCC Limit (dBm) |
|----------------|-----------------------|-----------------|
| Cellular / PCS | 30 – 18000*           | -13             |

- Frequency to be investigated up to the 10<sup>th</sup> harmonic of the highest clock or frequency used.

Substitution method according to ANSI/TIA/EIA 603-1 was used for final measurements.

## 10.3 Detailed Test Results

|                            |                   |          |
|----------------------------|-------------------|----------|
| Test Technician / Engineer | Michael Sundstrom |          |
| Date of Measurement        | 27 December 2004  |          |
| Temperature / Humidity     | 23-24°C           | 24-33%RH |
| Test Result                | Complies          |          |

**Note: Measurements were performed with 1MHz RBW/VBW.**

### CDMA Cellular, Channel 384

**EDRP for Channel 384: 22.9 dBm**

| Freq Max (MHz) | (PK) EMI (dBm) | dBc   | FCC Limit (dBm) | Pol. |
|----------------|----------------|-------|-----------------|------|
| 1673.0         | -34.2          | -57.1 | -13.0           | H    |
| 1673.0         | -35.0          | -57.9 | -13.0           | V    |
| 2509.6         | -29.2          | -52.1 | -13.0           | H    |
| 2509.6         | -30.0          | -52.9 | -13.0           | V    |
| 3346.1         | -51.1          | -74.0 | -13.0           | H    |
| 3346.1         | -54.6          | -77.5 | -13.0           | V    |
| 4182.6         | -54.8          | -77.7 | -13.0           | H    |
| 4182.6         | -54.0          | -76.9 | -13.0           | V    |
| 5019.1         | -46.3          | -69.2 | -13.0           | H    |
| 5019.1         | -52.9          | -75.8 | -13.0           | V    |
| 5855.6         | -50.0          | -72.9 | -13.0           | H    |
| 5855.6         | -50.7          | -73.6 | -13.0           | V    |
| 6692.2         | -50.3          | -73.2 | -13.0           | H    |
| 6692.2         | -51.5          | -74.4 | -13.0           | V    |
| 7528.7         | -48.9          | -71.8 | -13.0           | H    |
| 7528.7         | -47.5          | -70.4 | -13.0           | V    |
| 8365.2         | -48.5          | -71.4 | -13.0           | H    |
| 8365.2         | -48.6          | -71.5 | -13.0           | V    |

## CDMA PCS, Channel 600

EIRP Value for Channel 600: 24.1 dBm

| Freq Max (MHz) | (PK) EMI (dBm) | dBc   | FCC Limit (dBm) | Pol. |
|----------------|----------------|-------|-----------------|------|
| 3760.0         | -33.2          | -57.3 | -13.0           | H    |
| 3760.0         | -43.9          | -68.0 | -13.0           | V    |
| 5640.0         | -37.5          | -61.6 | -13.0           | H    |
| 5640.0         | -35.6          | -59.7 | -13.0           | V    |
| 7520.0         | -35.8          | -59.9 | -13.0           | H    |
| 7520.0         | -42.1          | -66.2 | -13.0           | V    |
| 9400.0         | -42.4          | -66.5 | -13.0           | H    |
| 9400.0         | -47.1          | -71.2 | -13.0           | V    |
| 11280.0        | -44.1          | -68.2 | -13.0           | H    |
| 11280.0        | -45.4          | -69.5 | -13.0           | V    |
| 13160.0        | -40.3          | -64.4 | -13.0           | H    |
| 13160.0        | -42.0          | -66.1 | -13.0           | V    |
| 15040.0        | -42.8          | -66.9 | -13.0           | H    |
| 15040.0        | -42.7          | -66.8 | -13.0           | V    |
| 16920.0        | -44.3          | -68.4 | -13.0           | H    |
| 16920.0        | -40.9          | -65.0 | -13.0           | V    |

## 10.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 5.2dB for 30-300MHz; +/- 5.2dB for 300-1000MHz, +/- 5.6dB for 1-6GHz and +/-6.8 for 6-18GHz.

## 11. FREQUENCY STABILITY (TEMPERATURE VARIATION)

**Specification: FCC Part 2.1055(a)(1)(b), 24.235**

### 11.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

### 11.2 Pass/Fail Criteria

Not Applicable

### 11.3 Detailed Test Results

|                                   |                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------|
| <b>Test Technician / Engineer</b> | Darreyl Roberts                                                             |
| <b>Date of Measurement</b>        | 26-Jan-05 - 27-Jan-05                                                       |
| <b>Temperature</b>                | 24 °C                                                                       |
| <b>Humidity</b>                   | 32 %RH                                                                      |
| <b>Test Result</b>                | Tested in accordance with 2.1055(a)(1)(b), 24.235 at maximum power setting. |

| Temp.<br>(°C) | CDMA 800,<br>Channel 384 | CDMA 1900,<br>Channel 600 |
|---------------|--------------------------|---------------------------|
|               | Change<br>(Hz)           | Change<br>(Hz)            |
| -30           | 30Hz                     | 19Hz                      |
| -20           | 15Hz                     | 51Hz                      |
| -10           | 22Hz                     | 47Hz                      |
| 0             | 27Hz                     | 49Hz                      |
| 10            | 23Hz                     | 66Hz                      |
| 20            | 27Hz                     | 45Hz                      |
| 30            | 21Hz                     | 46Hz                      |
| 40            | 25Hz                     | 42Hz                      |
| 50            | 22Hz                     | 40Hz                      |

## 12. FREQUENCY STABILITY (VOLTAGE VARIATION)

*Specification: FCC Part 2.1055(d)(1)(2), 24.235*

### 12.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

### 12.2 Pass/Fail Criteria

Not Applicable

### 12.3 Detailed Test Results

|                            |                                                                             |
|----------------------------|-----------------------------------------------------------------------------|
| Test Technician / Engineer | Darreyl Roberts                                                             |
| Date of Measurement        | 28-Jan-05                                                                   |
| Temperature                | 15.0 ° - 28.0 ° C                                                           |
| Humidity                   | 15.0 % - 85.0% RH                                                           |
| Test Result                | Tested in accordance with 2.1055(d)(1)(2), 24.235 at maximum power setting. |

#### CDMA 800, Call Mode, Channel 384

| % of STV          | Voltage | Change (Hz) |
|-------------------|---------|-------------|
| 85                | 3.14vdc | N/A         |
| 100 (Nominal)     | 3.7vdc  | 29Hz        |
| 115               | 4.3vdc  | 22Hz        |
| Battery End Point | 3.2vdc  | 15Hz        |

#### CDMA 1900, Call Mode, Channel 600

| % of STV          | Voltage | Change (Hz) |
|-------------------|---------|-------------|
| 85                | 3.14vdc | N/A         |
| 100 (Nominal)     | 3.7vdc  | 41Hz        |
| 115               | 4.3vdc  | 28Hz        |
| Battery End Point | 3.2vdc  | 46Hz        |