



SAR Compliance Test Report

Test report no.:	SD-07-04	Date of report:	September 15, 2004
Template version:	2	Number of pages:	
Testing laboratory:	Nokia Mobile Phones, Inc 12278 Scripps Summit Drive San Diego, CA 92131	Client:	Nokia Mobile Phones, Inc 12278 Scripps Summit Drive San Diego, CA 92131

	Tel. 1-858-831-5000		Tel. 1-858-831-5000
	Fax 1-858-831-6500		Fax 1-858-831-6500
Responsible test engineer:	Dan Laramie	Product contact person:	Anish Adalja
Measurements made by:	Julian Kim		
Tested device:	RM-19		
FCC ID:	QMNRM-19	IC:	661X-RM19

Testing has been carried out in accordance with:

- 47CFR §2.1093**
Radiofrequency Radiation Exposure Evaluation: Portable Devices
- FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)**
Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
- RSS-102**
Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields
- IEEE 1528 - 2003**
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

Documentation: The documentation of the testing performed on the tested devices is archived for 15 years at TCC San Diego.

Test results: The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.

Date and signatures: September 15, 2004

For the contents:

Esa Kontkanen
Engineering Manager

Dan Laramie
Test Engineer



CONTENTS

1. SUMMARY OF SAR TEST REPORT	3
1.1 TEST DETAILS	3
1.2 MAXIMUM RESULTS	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration	3
1.2.3 Maximum Drift	4
1.2.4 Measurement Uncertainty	4
2. DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 PICTURE OF THE DEVICE	5
2.2 DESCRIPTION OF THE ANTENNA.....	6
3. TEST CONDITIONS	6
3.1 TEMPERATURE AND HUMIDITY	6
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	6
4. DESCRIPTION OF THE TEST EQUIPMENT.....	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 Isotropic E-field Probe 1805.....	7
4.2 PHANTOMS.....	7
4.3 SIMULATING LIQUIDS.....	8
4.3.1 Liquid Recipes.....	8
4.3.2 Verification of the System.....	8
4.3.3 Tissue Simulants used in the Measurements.....	10
5. DESCRIPTION OF THE TEST PROCEDURE	11
5.1 DEVICE HOLDER.....	11
5.2 TEST POSITIONS.....	12
5.2.1 Against Phantom Head.....	12
5.2.2 Body Worn Configuration	12
5.3 SCAN PROCEDURES	13
5.4 SAR AVERAGING METHODS.....	13
6. MEASUREMENT UNCERTAINTY	15
7. RESULTS	16
APPENDIX A: VALIDATION SCANS	19
APPENDIX B: MEASUREMENT SCANS.....	20
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S).....	21
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	22



1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	Jul 27, 2004 to Sep 11, 2004
SN, HW and SW numbers of tested device	Serial Number: 044/00224656 Hardware: 4106 Software: N100b16.nep
Batteries used in testing	
Headsets used in testing	HDS-3, HS-5, HS-9
Other accessories used in testing	MMC card
State of sample	prototype
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f (MHz)	Conducted power	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
AMPS	384/836.52	25.62 dBm	Right, Cheek, Retracted	1.6 W/kg	1.14 W/kg	PASSED
CDMA 800	1013/824.70	25.19 dBm	Right, Cheek, Retracted	1.6 W/kg	1.10 W/kg	PASSED
CDMA 1900	25/1851.25	23.04 dBm	Right, Cheek, Extended	1.6 W/kg	1.27 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	Conducted power	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
AMPS	799/848.97	25.67 dBm	2.2 cm	1.6 W/kg	0.78 W/kg	PASSED
CDMA 800	777/848.31	25.28 dBm	2.2 cm	1.6 W/kg	0.67 W/kg	PASSED
CDMA 1900	25/1851.25	23.04 dBm	2.2 cm	1.6 W/kg	0.49 W/kg	PASSED



1.2.3 Maximum Drift

Maximum drift during measurements	0.30 dB
-----------------------------------	---------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	$\pm 29.1 \%$
--------------------------------	---------------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	portable
Exposure environment	general population/uncontrolled

Modes and Bands of Operation	AMPS 800	CDMA 800 (IS-95/IS-2000)	CDMA1900 (IS-95/IS-2000)	BT
Modulation Mode	FM	QPSK	QPSK	GFSK
Duty Cycle	1	1	1	
Transmitter Frequency Range (MHz)	824.04 - 848.97	824.70 – 848.31	1851.25 – 1908.75	2400.0 – 2483.5

2.1 Picture of the Device



2.2 Description of the Antenna

The device has an external retractable + stubby antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Period of measurement:	Jul 27, 2004 to Sep 11, 2004
Ambient temperature (°C):	20.0 to 23.0
Ambient humidity (RH %):	30 to 60

3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester and control software for the BlueTooth function. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The power output was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 11.4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE4	604	12 months	10/2004
E-field Probe ET3DV6	1805	12 months	04/2006
Dipole Validation Kit, D835V2	479	24 months	11/2005
Dipole Validation Kit, D1900V2	534	24 months	09/2005

Additional test equipment used in testing:



Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	E4436B	US 39260114	24 months	05/2006
Amplifier	Milmega AS0822-8L	1004832	-	-
Power Meter	Agilent E4417A	GB41290918	12 months	11/2004
Power Sensor	Agilent E9327A	US 40440896	12 months	03/2005
Call Tester	Agilent 8960/E5515C	US 40440119	12 months	06/2006
Vector Network Analyzer	8753ES	MY 40002861	12 months	05/2005
Dielectric Probe Kit	HP85070D	US01440005	-	-

4.1.1 Isotropic E-field Probe 1805

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz. Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both validation testing and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.



Validation tests were performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Simulating Liquids

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using liquids whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the liquid was 15.0 ± 0.5 cm measured from the ear reference point during validation and device measurements.

4.3.1 Liquid Recipes

The following recipes were used for Head and Body liquids:

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	51.07	65.45
HEC	0.23	-
Sugar	47.31	34.31
Preservative	0.24	0.10
Salt	1.15	0.62

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 Verification of the System

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids were measured every day using the dielectric probe kit and the network analyser. A SAR measurement was made following the determination of the dielectric parameters of the liquids, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The validation results (dielectric parameters and SAR values) are given in the table below.



System verification, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.31	41.2	0.88	N/A
	± 10% window	2.08 to 2.54			
	8/10/04	2.46	41.3	0.89	22.3
	8/11/04	2.50	41.8	0.89	22.3
	8/12/04	2.42	41.3	0.89	22.6
	8/16/04	2.44	41.3	0.88	21.7
	8/17/04	2.35	41.1	0.88	22.3
	9/10/04	2.42	41.3	0.89	22.8
1900	Reference result	10.1	40.17	1.46	N/A
	± 10% window	9.09 – 11.11			
	7/27/04	9.93	39.0	1.42	21.4
	7/28/04	9.82	38.9	1.43	21.5
	7/29/04	9.94	39.2	1.45	21.6
	7/30/04	9.89	39.1	1.43	22.0

System verification, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.48	54.98	0.98	N/A
	± 10% window	2.23 – 2.73			
	8/12/04	2.52	54.6	0.93	21.5
	8/13/04	2.44	54.8	0.96	22.0
	8/16/04	2.38	54.8	0.95	21.3
	9/10/04	2.40	54.9	0.96	22.8
1900	Reference result	10.5	50.87	1.6	N/A
	± 10% window	9.45 – 11.55			
	8/03/04	10.6	51.7	1.6	21.6
	8/04/04	10.4	51.8	1.6	22.1
	9/11/04	9.97	51.9	1.6	21.6

Plots of the Verification scans are given in Appendix A.



4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

<i>f</i> [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836.5	Recommended value	41.5	0.90	N/A
	± 5% window	39.4 – 43.6	0.86 – 0.95	
	8/10/04	41.3	0.89	22.3
	8/11/04	41.8	0.89	22.3
	8/12/04	41.3	0.89	22.6
	8/16/04	41.3	0.88	21.7
	8/17/04	41.1	0.88	22.3
	9/10/04	41.3	0.89	22.8
1880	Recommended value	40.0	1.40	N/A
	± 5% window	38.0 – 42.0	1.33 – 1.47	
	7/27/04	39.1	1.40	21.4
	7/28/04	39.0	1.41	21.5
	7/29/04	39.3	1.43	21.6
	7/30/04	39.2	1.42	22.0

Body tissue simulant measurements

<i>f</i> [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836.5	Recommended value	55.2	0.97	N/A
	± 5% window	52.4 – 58.0	0.92 – 1.02	
	8/12/04	54.5	0.94	21.5
	8/13/04	54.8	0.96	22.0
	8/16/04	54.8	0.95	22.0
	9/10/04	54.9	0.96	22.8
1880	Recommended value	53.3	1.52	N/A
	± 5% window	50.6 – 56.0	1.44 – 1.60	
	8/03/04	51.8	1.58	21.6
	8/04/04	51.9	1.59	22.1
	9/11/04	52.0	1.58	21.6

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".



Photo of the device in “cheek” position



Photo of the device in “tilt” position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gave higher results.

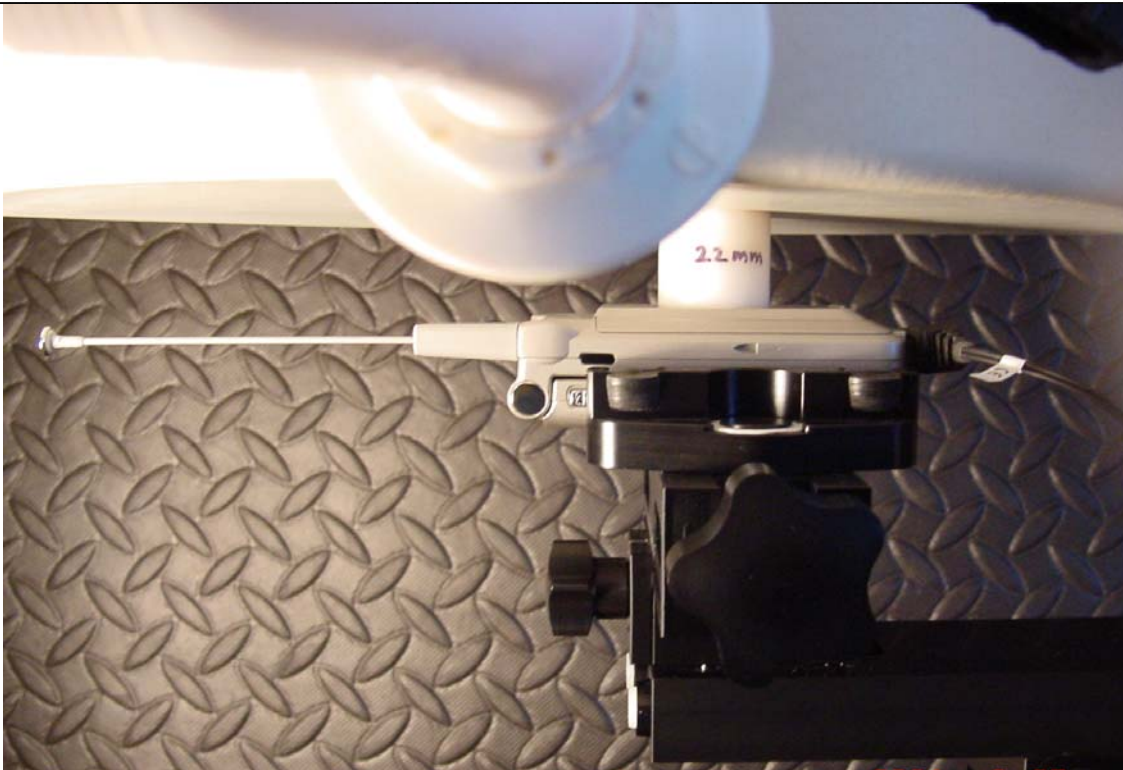


Photo of the device positioned for Body SAR measurement. The spacer was removed for the tests.

5.3 Scan Procedures

First coarse scans were used for determination of the field distribution. Next a cube scan, 5x5x7 points covering a volume of 30x30x30 mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to



fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.



6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	C_i	$C_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	±4.8	N	1	1	±4.8	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-C_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(C_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±8.3	R	√3	1	±4.8	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±10.0	R	√3	1	±5.8	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Liquid Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Liquid Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Liquid Permittivity Target tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Liquid Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±14.5	187
Coverage Factor for 95%			k=2				
Expanded Standard Uncertainty						±29.1	



7. RESULTS

The measured Head SAR values for the test device are tabulated below:

800MHz AMPS Head SAR results

Ant Position	Position		SAR, averaged over 1g (W/kg)		
			Ch 991 824.04 MHz	Ch 384 836.52 MHz	Ch 799 848.97 MHz
Retracted	Power level		25.54 dBm	25.62 dBm	25.67 dBm
	Left	Cheek	1.00	0.93	0.75
		Tilt		0.29	
	Right	Cheek	1.05	1.09	0.83
		Tilt		0.34	
Extended	Left	Cheek	0.57	0.69	0.69
		Tilt		0.31	
	Right	Cheek	0.80	0.98	0.95
		Tilt		0.34	
Retracted	Right Cheek with MMC card		0.95	0.90	0.75
Retracted	Right Cheek without MMC card and Bluetooth active			1.14	

800MHz CDMA Head SAR results

Ant Position	Position		SAR, averaged over 1g (W/kg)		
			Ch 1013 824.70 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
Retracted	Power level		25.19 dBm	25.45 dBm	25.28 dBm
	Left	Cheek	0.71	0.72	0.66
		Tilt		0.22	
	Right	Cheek	1.02	0.99	0.93
		Tilt		0.27	
Extended	Left	Cheek		0.61	
		Tilt		0.27	
	Right	Cheek	0.73	0.79	0.83
		Tilt		0.27	
Retracted	Right Cheek with MMC card		0.91	0.97	0.86
Retracted	Right Cheek without MMC card and Bluetooth active		1.10		



1900MHz Head SAR results

Ant Position	Position		SAR, averaged over 1g (W/kg)		
			Ch 25 1851.25 MHz	Ch 600 1880 MHz	Ch 1175 1908.75 MHz
Retracted	Power level		23.04 dBm	22.76 dBm	22.75 dBm
	Left	Cheek	1.05	1.02	1.06
		Tilt		0.32	
	Right	Cheek	1.19	1.23	1.25
		Tilt		0.42	
Extended	Left	Cheek	1.12	0.81	0.75
		Tilt		0.32	
	Right	Cheek	1.27	1.14	1.05
		Tilt		0.34	
Extended	Right Cheek with MMC card		1.27	1.15	1.06
Extended	Right Cheek with MMC card and Bluetooth active		1.27		

The measured Body SAR values for the test device are tabulated below:

800MHz AMPS Body SAR results

Ant Position	Body-worn location setup	SAR, averaged over 1g (W/kg)		
		Ch 991 824.04 MHz	Ch 384 836.52 MHz	Ch 799 848.97 MHz
Retracted	Power level	25.54 dBm	25.62 dBm	25.67 dBm
	Without headset		0.65	
	Headset HS-9		0.52	
	Headset HS-5		0.55	
	Headset HDS-3		0.47	
Extended	Without headset	0.61	0.74	0.77
	Headset HS-9		0.65	
	Headset HS-5		0.65	
	Headset HDS-3		0.56	
Extended	Without headset, with MMC card	0.65	0.71	0.75
Extended	Without headset, without MMC card and with BT active			0.78



800MHz CDMA Body SAR results

Ant Position	Body-worn location setup	SAR, averaged over 1g (W/kg)		
		Ch 1013 824.70 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
Retracted	Power level	25.19 dBm	25.45 dBm	25.28 dBm
	Without headset		0.55	
	Headset HS-9		0.52	
	Headset HS-5		0.41	
	Headset HDS-3		0.44	
Extended	Without headset	0.60	0.64	0.66
	Headset HS-9		0.62	
	Headset HS-5		0.52	
	Headset HDS-3		0.43	
Extended	Without headset, with MMC card	0.60	0.66	0.66
Extended	Without headset, with MMC card and with BT active			0.67

1900MHz CDMA Body SAR results

Ant Position	Body-worn location setup	SAR, averaged over 1g (W/kg)		
		Ch 25 1851.25 MHz	Ch 600 1880 MHz	Ch 1175 1908.75 MHz
Retracted	Power level	23.04 dBm	22.76 dBm	22.75 dBm
	Without headset		0.34	
	Headset HS-9		0.36	
	Headset HS-5	0.44	0.42	0.38
	Headset HDS-3		0.40	
Extended	Without headset		0.33	
	Headset HS-9		0.34	
	Headset HS-5		0.36	
	Headset HDS-3		0.35	
Retracted	With headset HS-5 and MMC card	0.40	0.37	0.34
Retracted	With headset HS-5 and without MMC card and BT active	0.49		

Plots of the Measurement scans are given in Appendix B.



APPENDIX A: VALIDATION SCANS

Date: 8/10/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Head Validation

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.888806$; mho/m, $\epsilon_r = 41.2891$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.3 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 56.6 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.67 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56.6 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.65 mW/g

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.61 mW/g

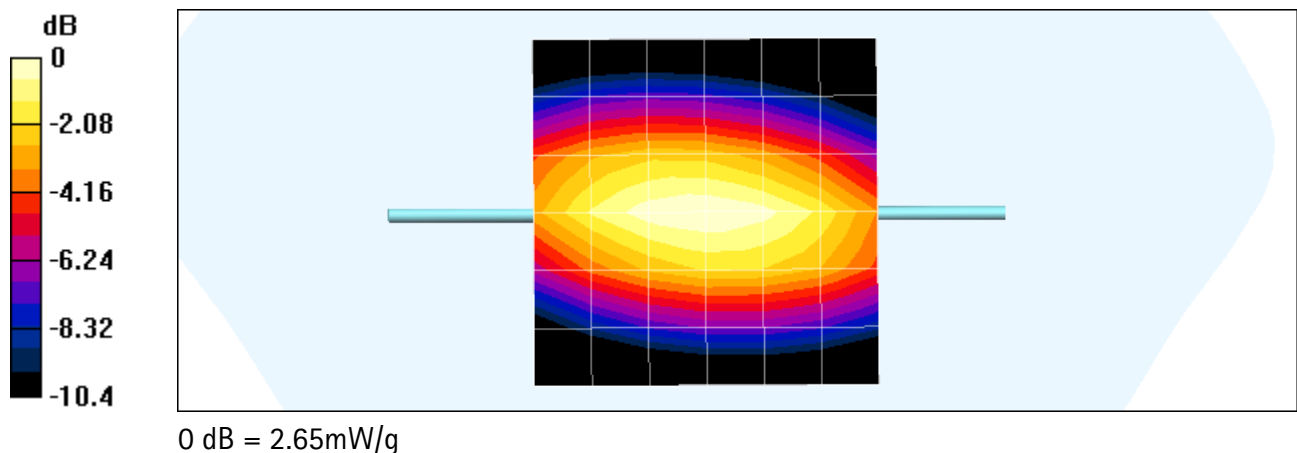

Date: 8/11/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Head Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.887394$; mho/m, $\epsilon_r = 41.8479$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.3 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 57.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.69 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 57.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.71 mW/g

Peak SAR (extrapolated) = 3.76 W/kg

SAR(1 g) = 2.5 mW/g; SAR(10 g) = 1.63 mW/g

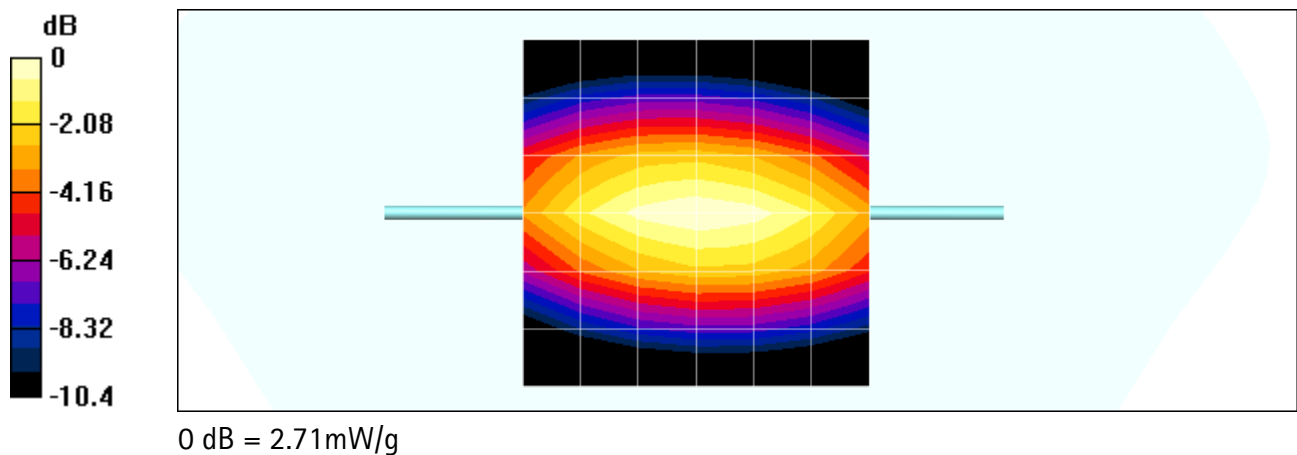

Date: 8/12/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Head Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.888026$; mho/m, $\epsilon_r = 41.2739$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.6 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 56 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.64 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.61 mW/g

Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g

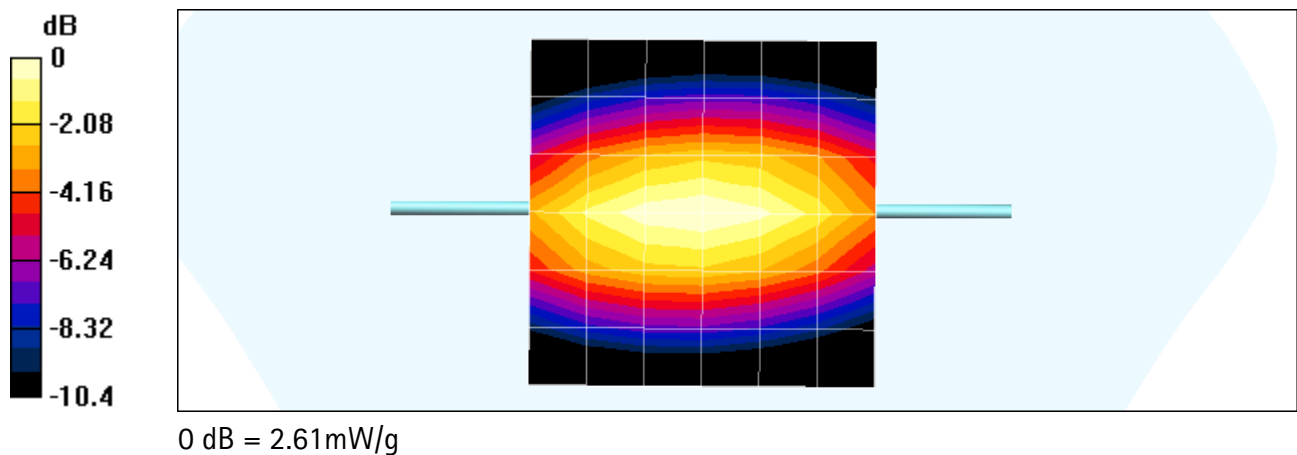

Date: 8/16/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Head Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.8833$; mho/m, $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.7 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 56.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.63 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.65 mW/g

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.6 mW/g

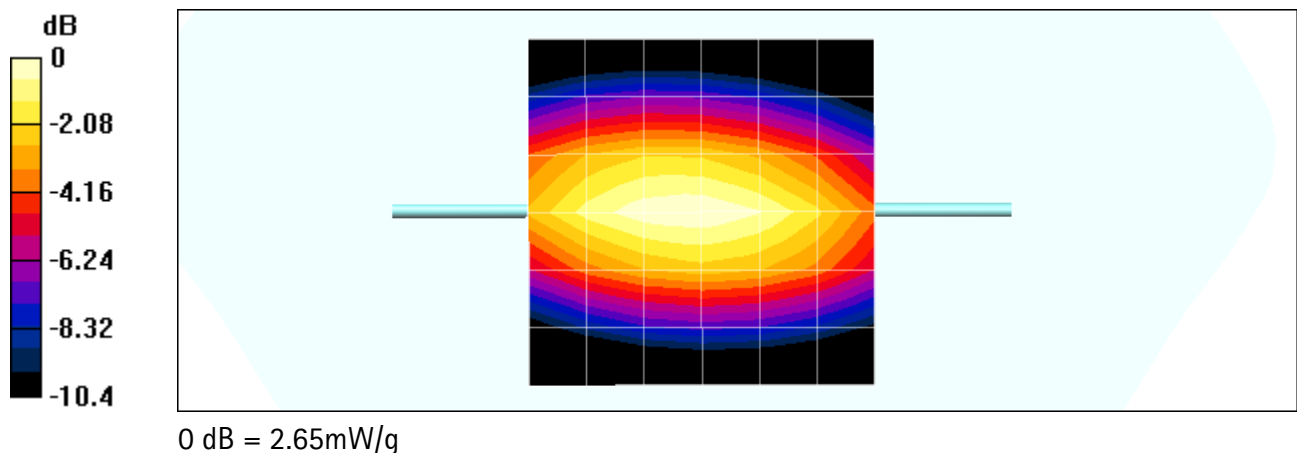

Date: 8/17/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Head Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.880807$; mho/m, $\epsilon_r = 41.1154$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.3 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 56.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.58 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.55 mW/g

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.55 mW/g

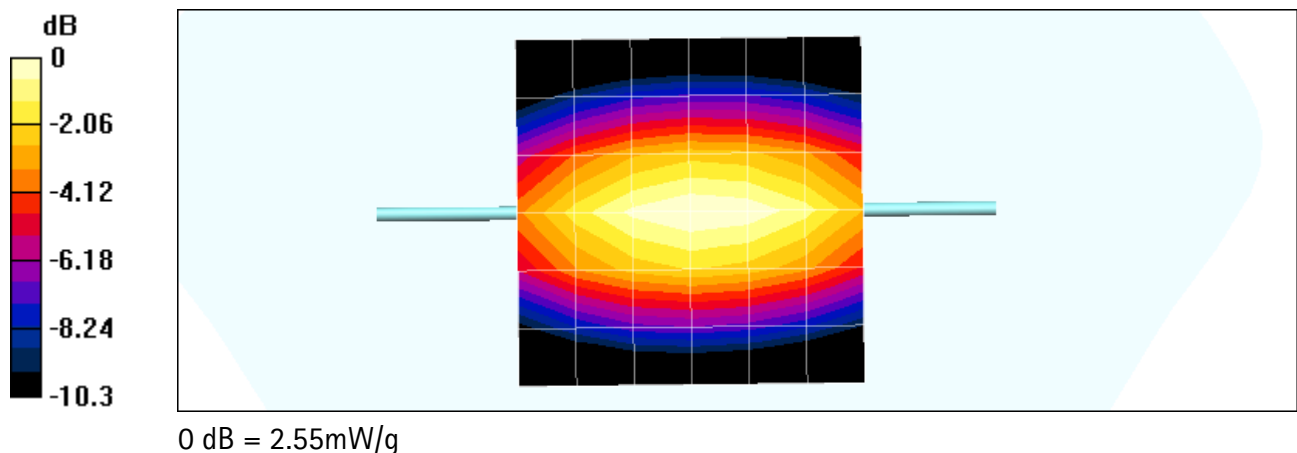

Date: 9/10/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Head Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.8898$; mho/m, $\epsilon_r = 41.25$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 56 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.63 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.61 mW/g

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.6 mW/g

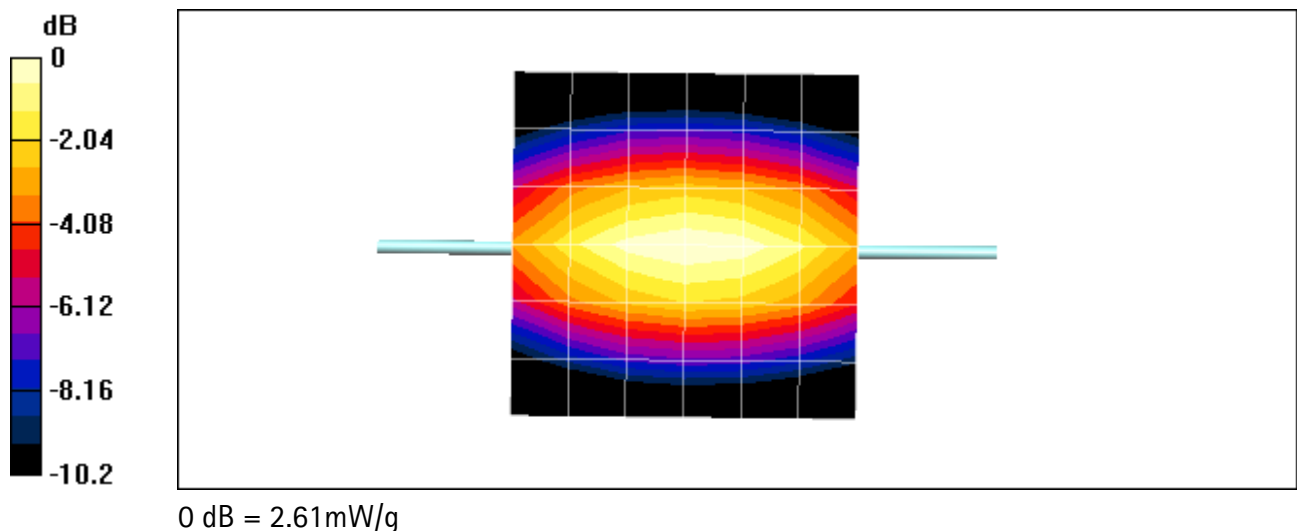

Date: 07/27/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 354; Head Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³ ; Temperature (liq.) = 21.4 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(5.08, 5.08, 5.08); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 94.3 V/m; Power Drift = -0.002 dB

Maximum value of SAR (measured) = 11.2 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 94.3 V/m; Power Drift = -0.002 dB

Maximum value of SAR (measured) = 11.2 mW/g

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 9.93 mW/g; SAR(10 g) = 5.19 mW/g

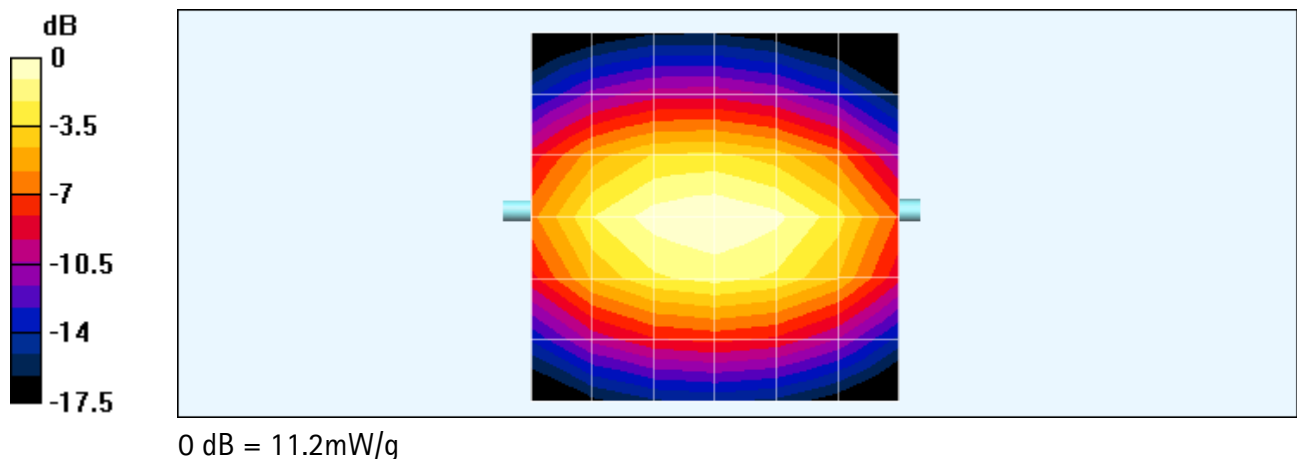

Date: 7/28/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Head Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³ ; Temperature (liq.) = 21.5 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(5.08, 5.08, 5.08); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 92.6 V/m; Power Drift = 0.007 dB

Maximum value of SAR (measured) = 10.8 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 92.6 V/m; Power Drift = 0.007 dB

Maximum value of SAR (measured) = 11.2 mW/g

Peak SAR (extrapolated) = 17 W/kg

SAR(1 g) = 9.82 mW/g; SAR(10 g) = 5.14 mW/g

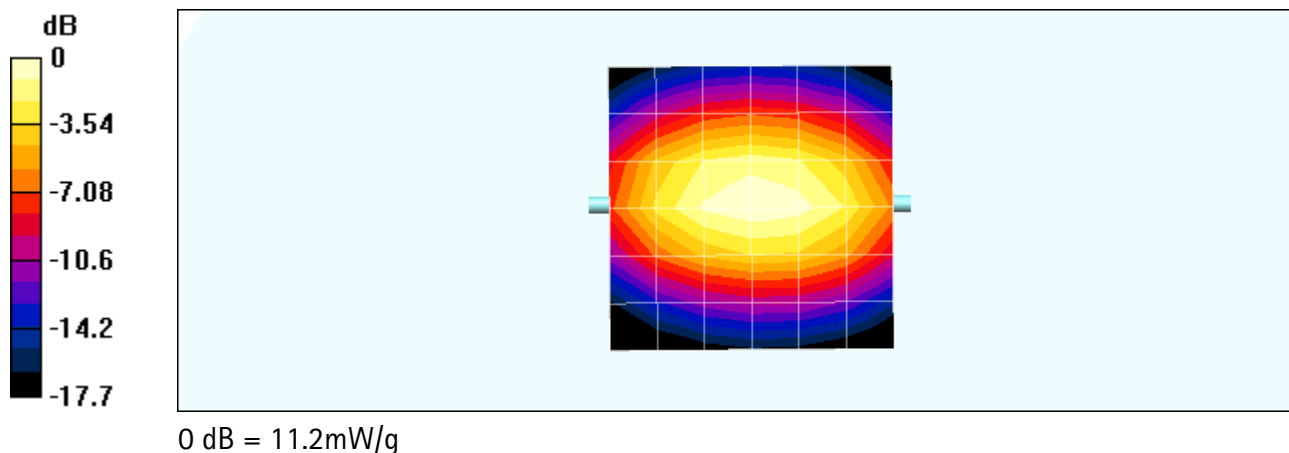

Date: 7/29/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Head Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.45086$; mho/m, $\epsilon_r = 39.1709$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(5.08, 5.08, 5.08); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 93.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 11.2 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 93.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 11.2 mW/g

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.94 mW/g; SAR(10 g) = 5.23 mW/g

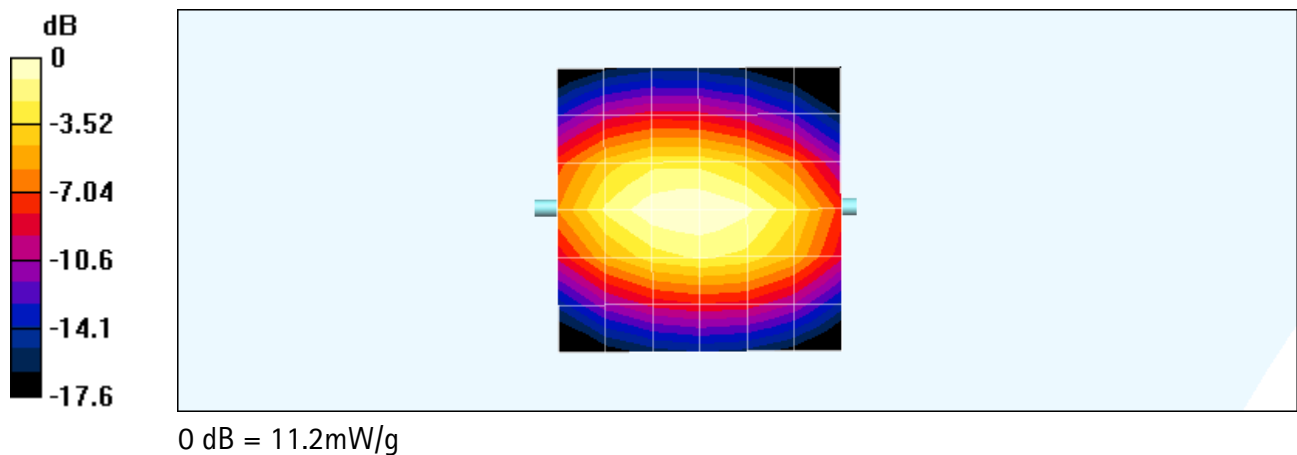

Date: 7/30/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Head Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³ ; Temperature (liq.) = 22.0 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(5.08, 5.08, 5.08); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 93.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 10.9 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 93.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 11.1 mW/g

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.89 mW/g; SAR(10 g) = 5.18 mW/g

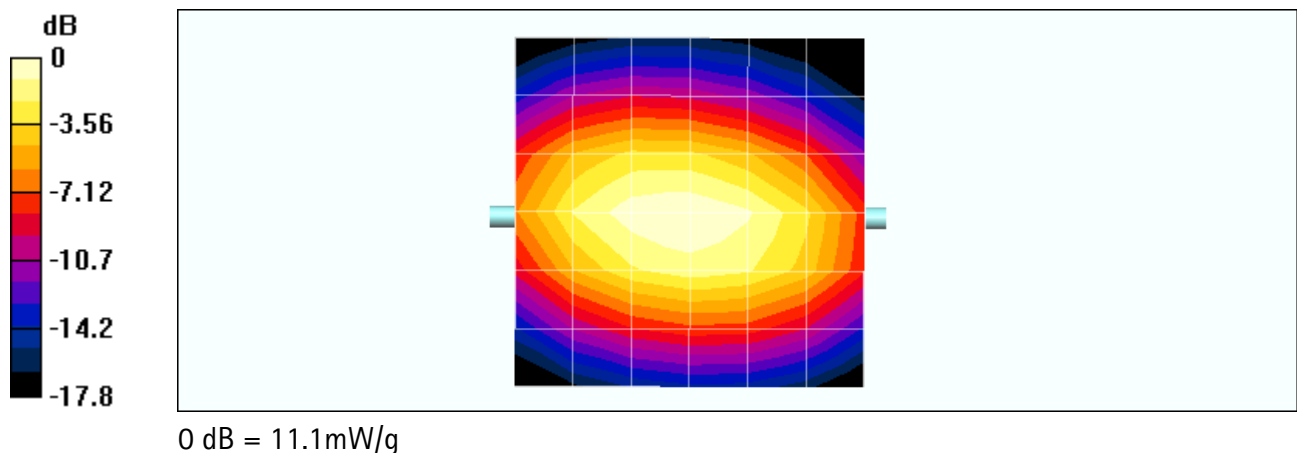

Date: 8/12/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Body Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.93$; mho/m, $\epsilon_r = 54.56$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.5 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.5 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 2.57 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.5 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 2.73 mW/g

Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.66 mW/g

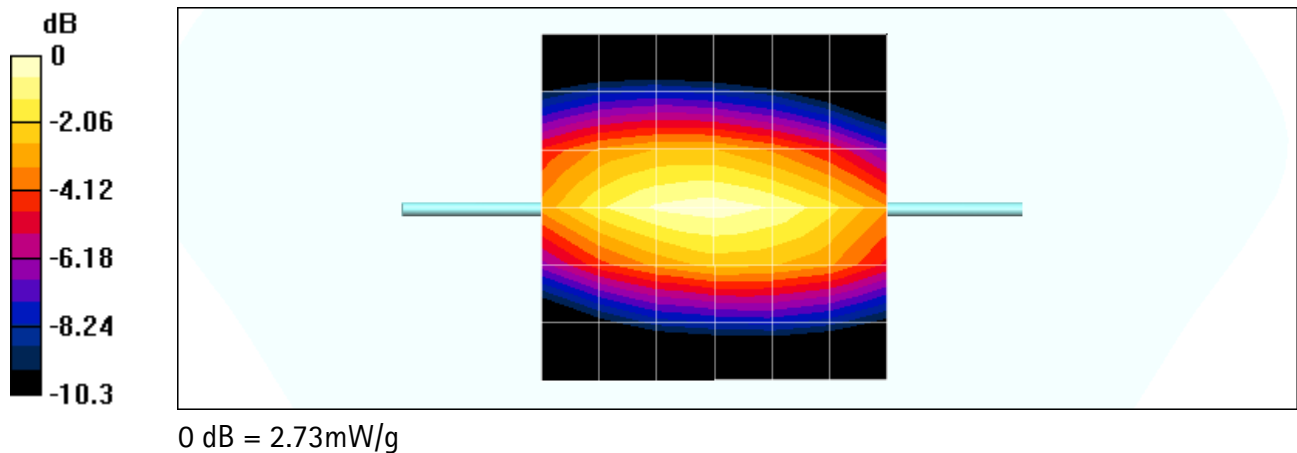

Date: 8/13/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Body Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.956798$; mho/m, $\epsilon_r = 54.8027$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.0 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.61 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.64 mW/g

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.62 mW/g

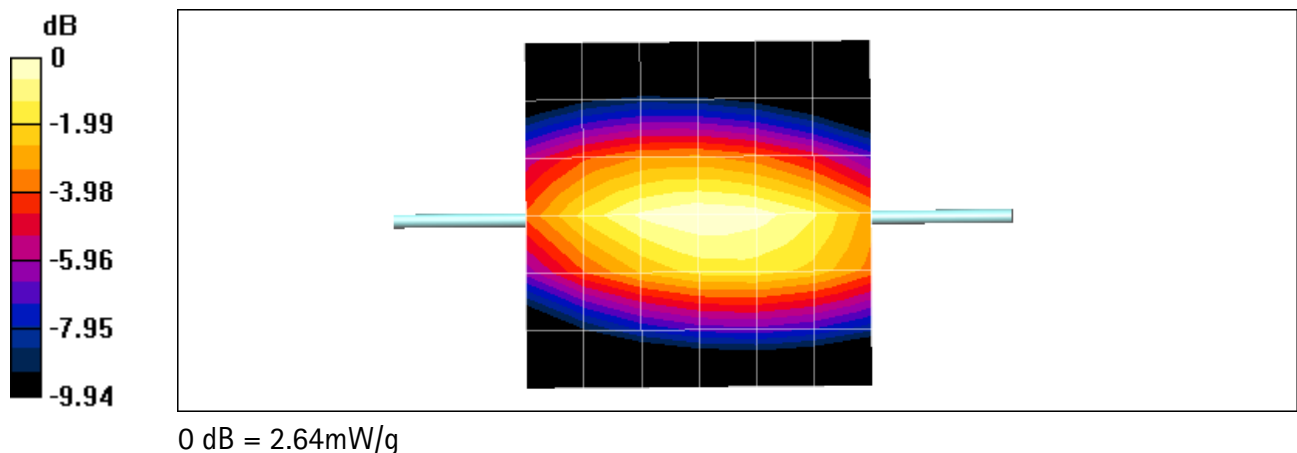

Date: 8/16/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Body Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.947931$; mho/m, $\epsilon_r = 54.8418$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.3 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.57 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.58 mW/g

Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.59 mW/g

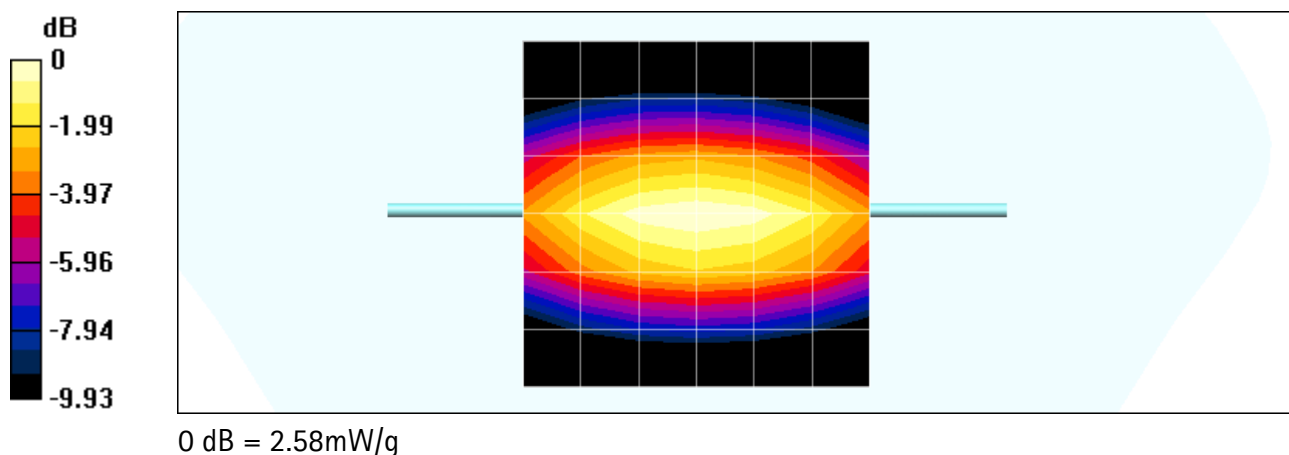

Date: 9/10/04; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 479; Body Validation

Communication System: AMPS 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.9601$; mho/m, $\epsilon_r = 54.91$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

835MHz validation/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 53.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.54 mW/g


835MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 53.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.6 mW/g

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.61 mW/g

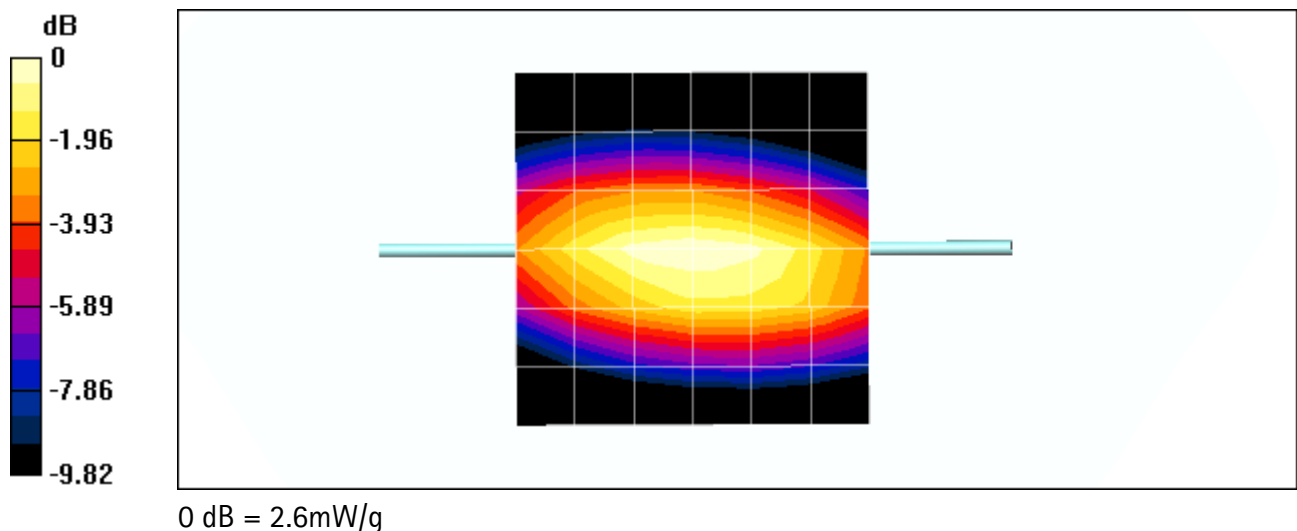

Date: 8/03/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Body Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.6$; mho/m, $\epsilon_r = 51.68$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(4.47, 4.47, 4.47); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 93.5 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 12 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 93.5 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 11.9 mW/g

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.56 mW/g

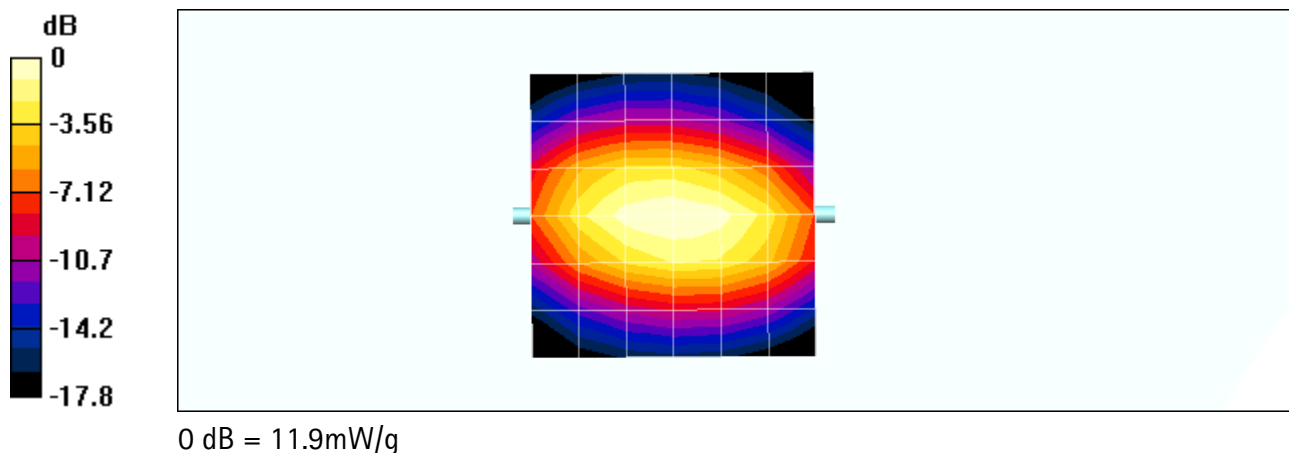

Date: 8/04/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Body Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.6$; mho/m, $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.1 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(4.47, 4.47, 4.47); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 91.8 V/m; Power Drift = 0.001 dB

Maximum value of SAR (measured) = 11.6 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 91.8 V/m; Power Drift = 0.001 dB

Maximum value of SAR (measured) = 11.8 mW/g

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.5 mW/g

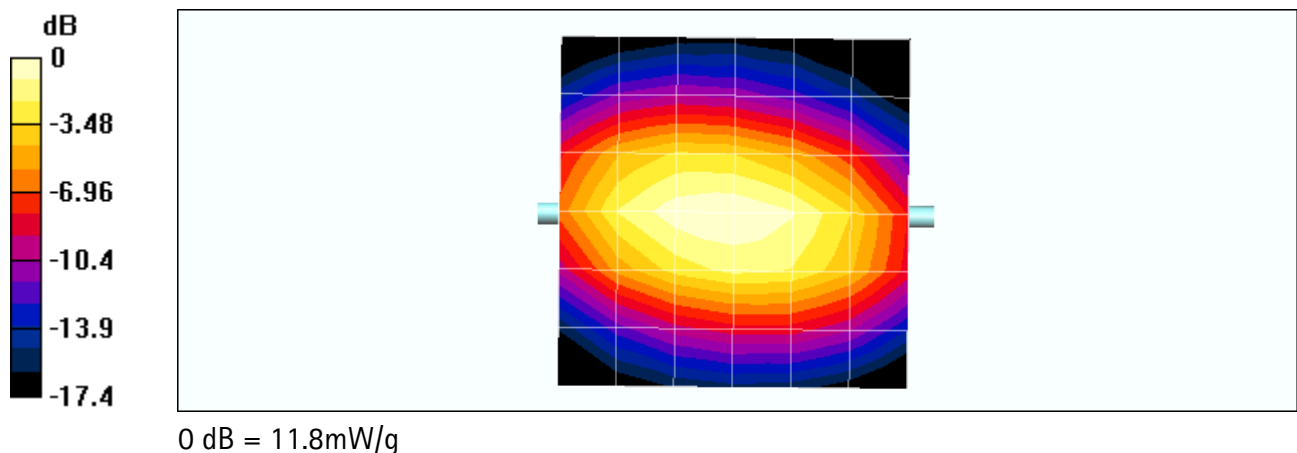

Date: 9/11/04; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Body Validation

Communication System: CDMA 1900 ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.599$; mho/m, $\epsilon_r = 51.86$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6 °C

Phantom section: Flat Section ; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(4.47, 4.47, 4.47); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

1900MHz validation/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 90.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 11.2 mW/g


1900MHz validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 90.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 11.2 mW/g

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.97 mW/g; SAR(10 g) = 5.35 mW/g

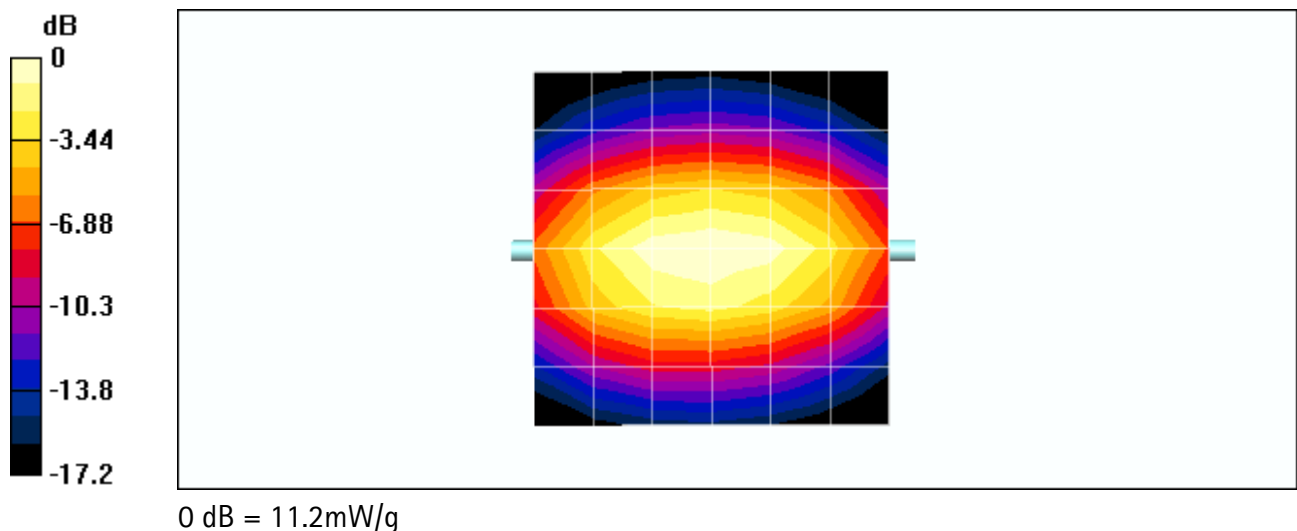



APPENDIX B: MEASUREMENT SCANS

Date: 9/10/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna retracted; with BT active.

Communication System: AMPS 835; Channel 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.8913$; mho/m, $\epsilon_r = 41.25$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Right Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Right cheek/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.16 mW/g


Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.21 mW/g

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.763 mW/g

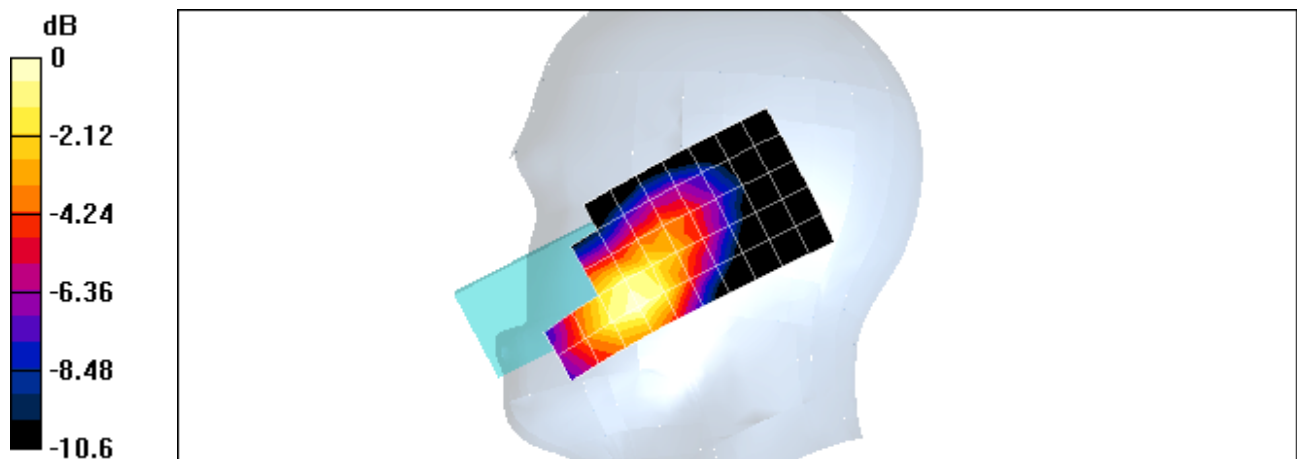

0 dB = 1.21mW/g

Date: 9/10/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna retracted; with BT active.

Communication System: AMPS 835; Channel 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.8913$; mho/m, $\epsilon_r = 41.25$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Right Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Right cheek/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.16 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.21 mW/g


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.763 mW/g

Right cheek/Zoom Scan (21x21x36)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 1.75 mW/g

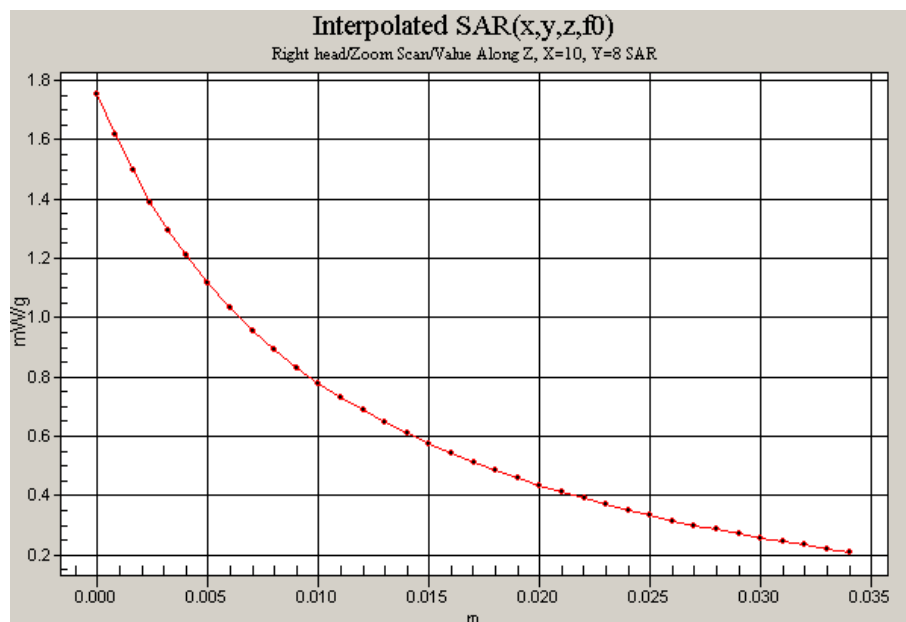

Date: 9/10/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna retracted; with BT active.

Communication System: CDMA800; Channel 1013; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.8913$; mho/m, $\epsilon_r = 41.25$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Right Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Right cheek/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.99 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.08 mW/g


Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.99 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.17 mW/g

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.736 mW/g

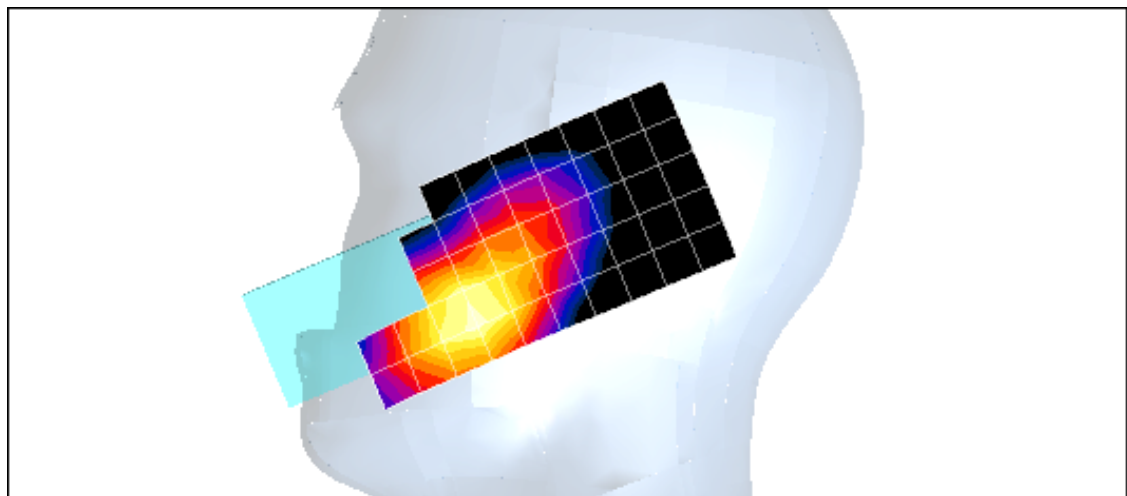

0 dB = 1.17mW/g

Date: 9/10/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna retracted; with BT active.

Communication System: CDMA800; Channel 1013; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.8913$; mho/m, $\epsilon_r = 41.25$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Right Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.32, 6.32, 6.32); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Right cheek/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.99 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.08 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.99 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.17 mW/g


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.736 mW/g

Right cheek/Zoom Scan (21x21x36)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.99 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 1.69 mW/g

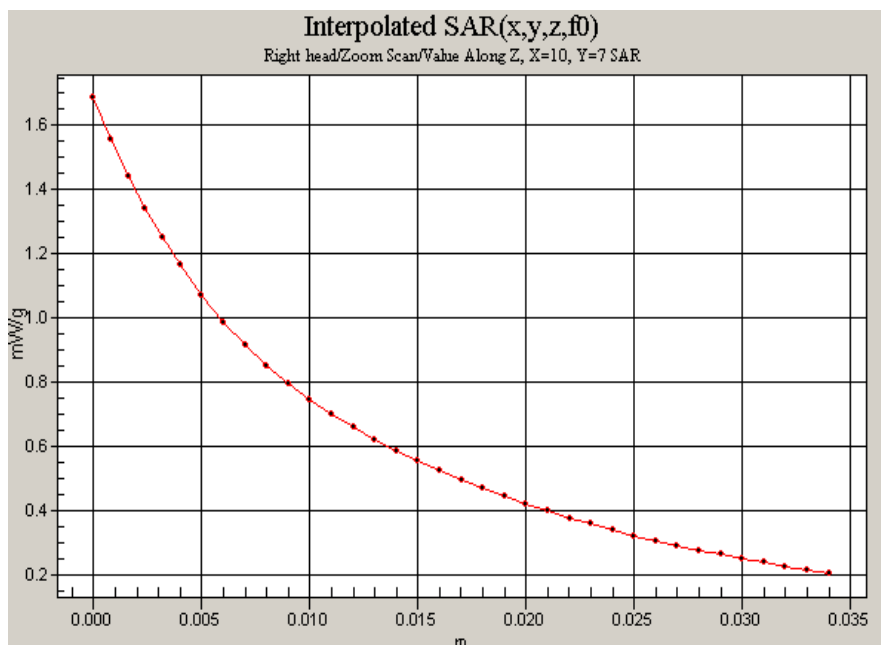

Date: 7/30/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; with MMC card and BT active.

Communication System: CDMA 1900 ; Channel 25; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.415$; mho/m, $\epsilon_r = 39.19$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.0°C

Phantom section: Right Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(5.08, 5.08, 5.08); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Right cheek/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.2 mW/g


Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.38 mW/g

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.698 mW/g

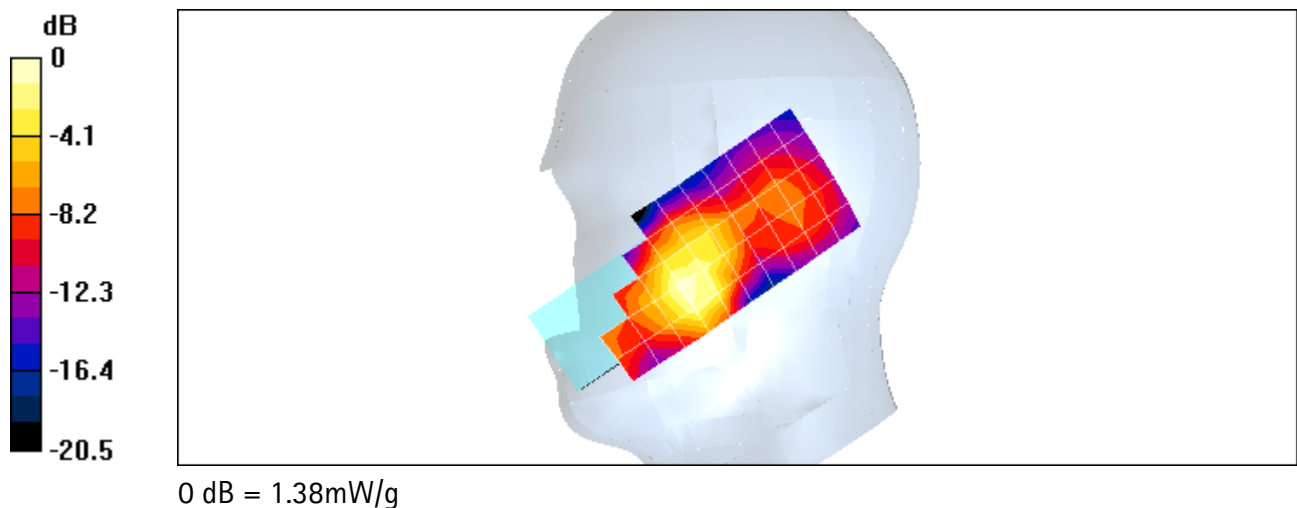

Date: 7/30/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; with MMC card and BT active.

Communication System: CDMA 1900 ; Channel 25; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.415$; mho/m, $\epsilon_r = 39.19$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.0 °C

Phantom section: Right Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(5.08, 5.08, 5.08); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Right cheek/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.2 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.38 mW/g


Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.698 mW/g

Right cheek/Zoom Scan (21x21x36)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 2.42 mW/g

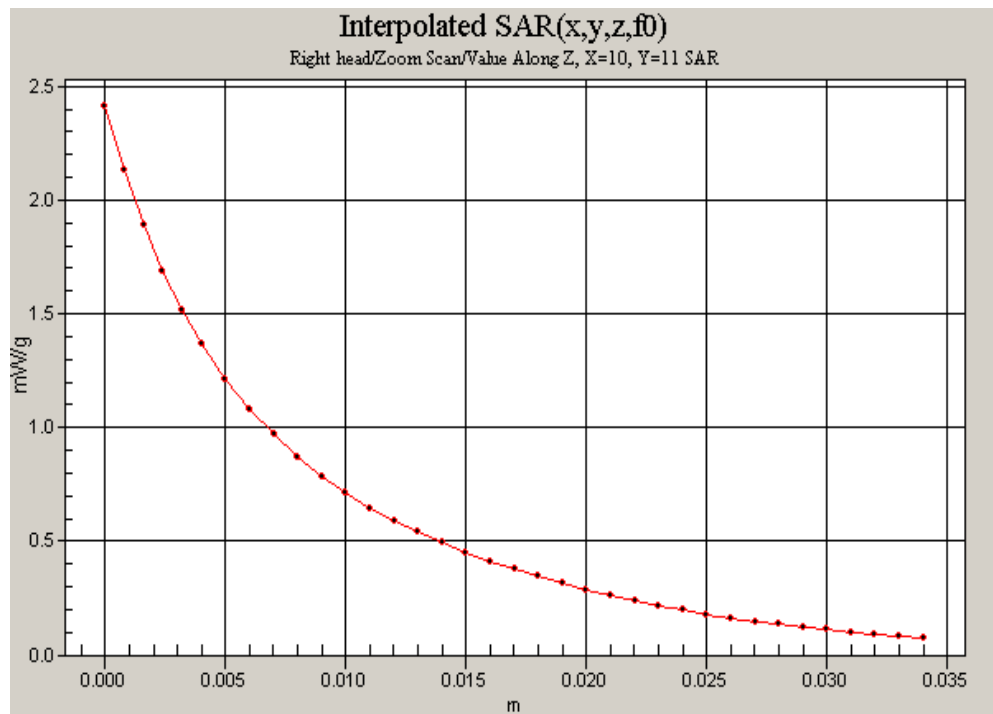

Date: 9/10/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; no headset and BT active.

Communication System: AMPS 835; Channel 799; Frequency: 848.97 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.9627$; mho/m, $\epsilon_r = 54.89$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8°C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 25.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.827 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.822 mW/g

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.552 mW/g

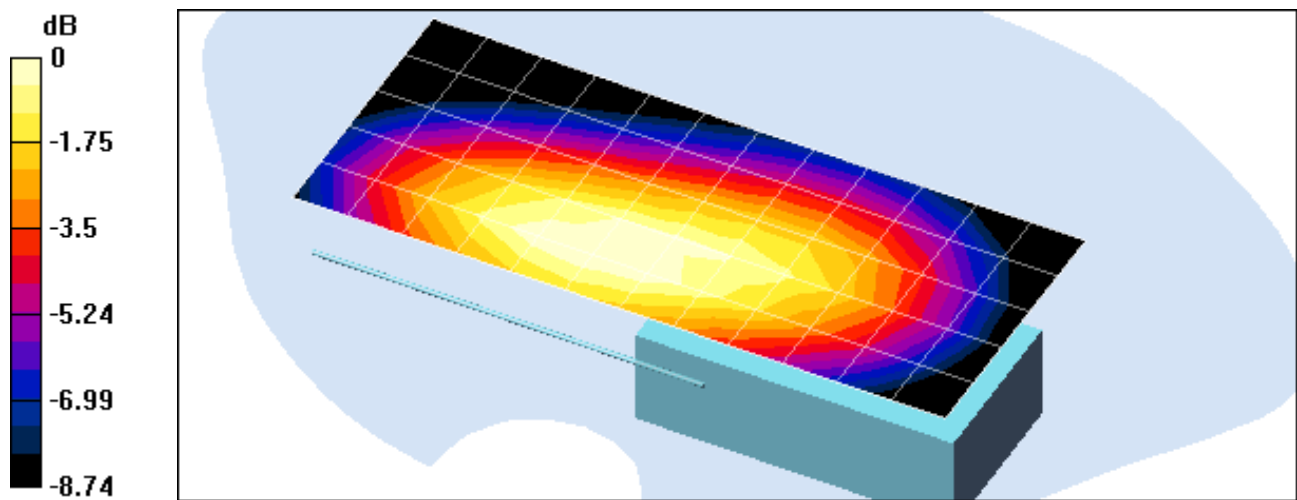

0 dB = 0.822mW/g

Date: 9/10/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; no headset and BT active.

Communication System: AMPS 835; Channel 799; Frequency: 848.97 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.9627$; mho/m, $\epsilon_r = 54.89$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 22.8 °C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 25.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.827 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.822 mW/g


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.552 mW/g

Body/Zoom Scan (21x21x36)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.15 mW/g

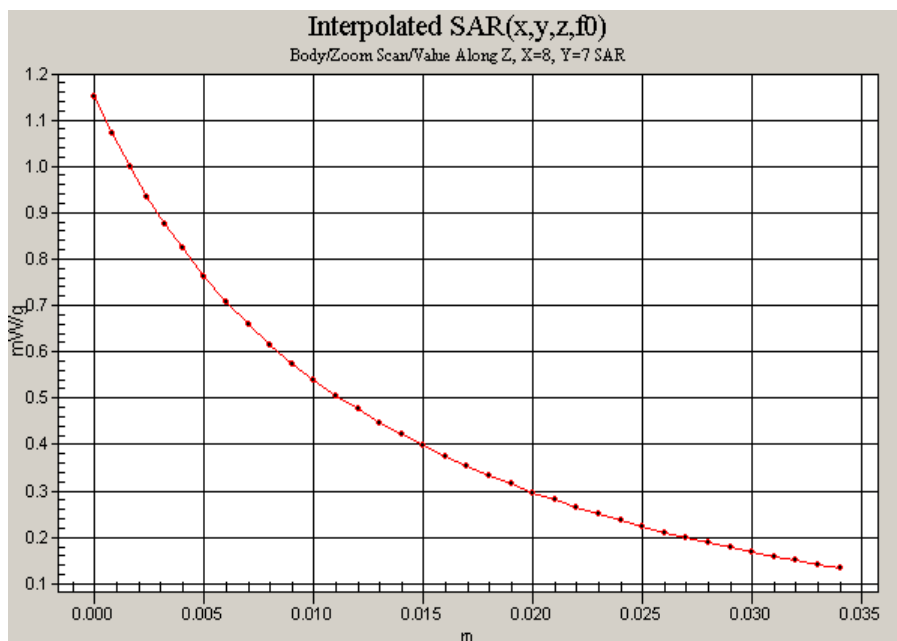

Date: 8/16/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; No Headset; with MMC card and BT active.

Communication System: CDMA800; Channel 777; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.949$; mho/m, $\epsilon_r = 54.83$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.3°C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 24.4 V/m; Power Drift = -0.005 dB

Maximum value of SAR (measured) = 0.689 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = -0.005 dB

Maximum value of SAR (measured) = 0.712 mW/g

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.469 mW/g

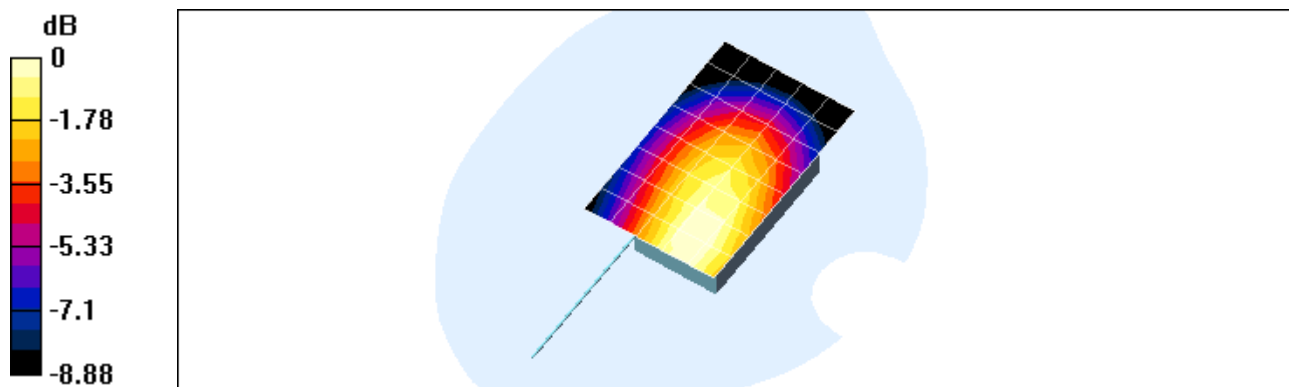

0 dB = 0.712mW/g

Date: 8/16/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; No Headset; with MMC card and BT active.

Communication System: CDMA800; Channel 777; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0.949$; mho/m, $\epsilon_r = 54.83$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.3°C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(6.17, 6.17, 6.17); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 24.4 V/m; Power Drift = -0.005 dB

Maximum value of SAR (measured) = 0.689 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = -0.005 dB

Maximum value of SAR (measured) = 0.712 mW/g


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.469 mW/g

Body/Zoom Scan (21x21x36)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = -0.005 dB

Maximum value of SAR (interpolated) = 1.03 mW/g

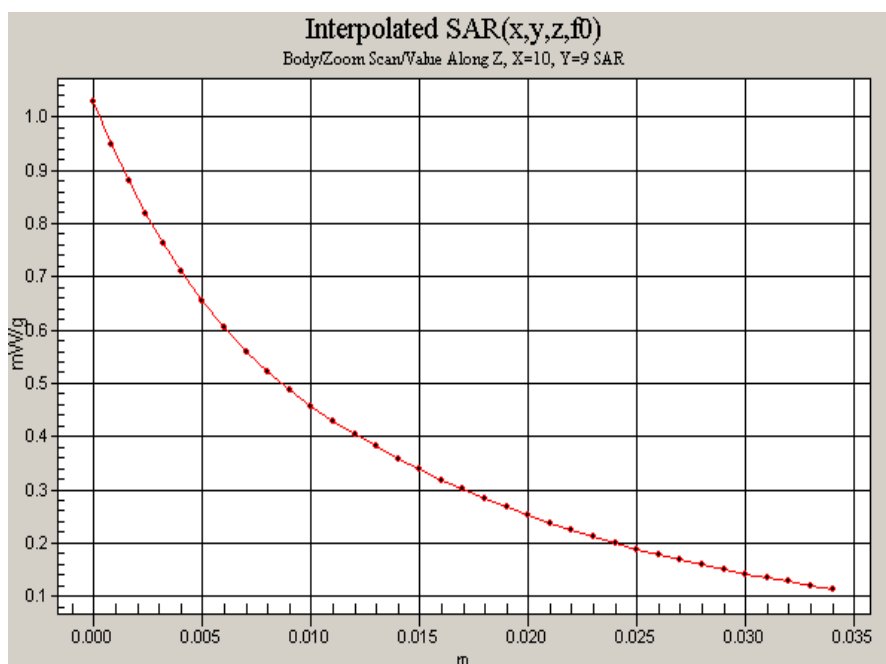

Date: 9/11/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna retracted; with HS-5 and BT active.

Communication System: CDMA 1900 ; Channel 25; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.576$; mho/m, $\epsilon_r = 51.96$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6 °C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(4.47, 4.47, 4.47); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 17.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.526 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.514 mW/g

Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.295 mW/g

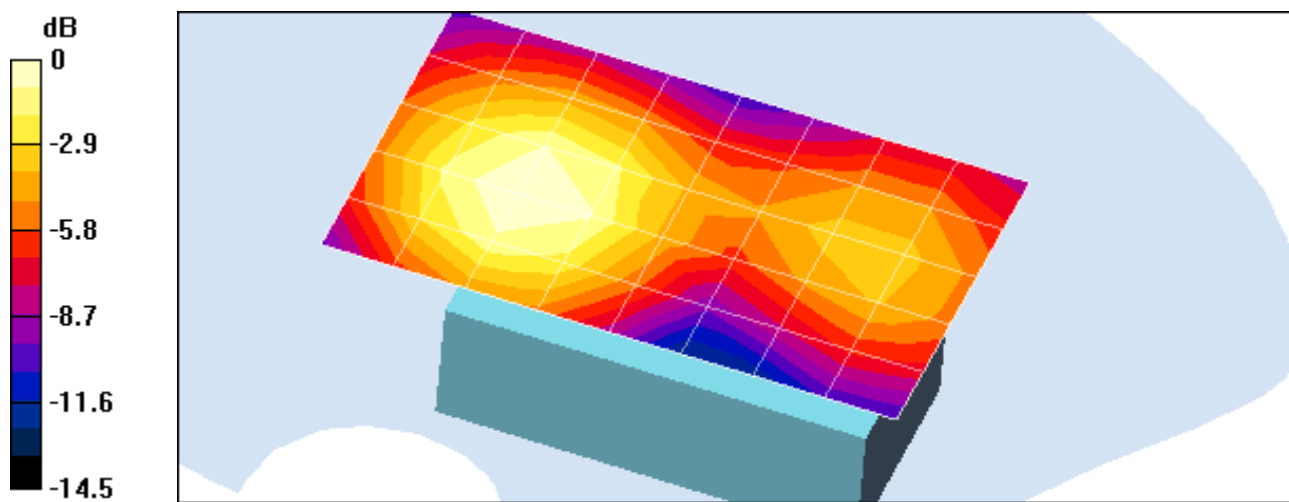

0 dB = 0.514mW/g

Date: 9/11/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna retracted; with HS-5 and BT active.

Communication System: CDMA 1900 ; Channel 25; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.576$; mho/m, $\epsilon_r = 51.96$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6°C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(4.47, 4.47, 4.47); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 17.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.526 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.514 mW/g


Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.295 mW/g

Body/Zoom Scan (21x21x36)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.943 mW/g

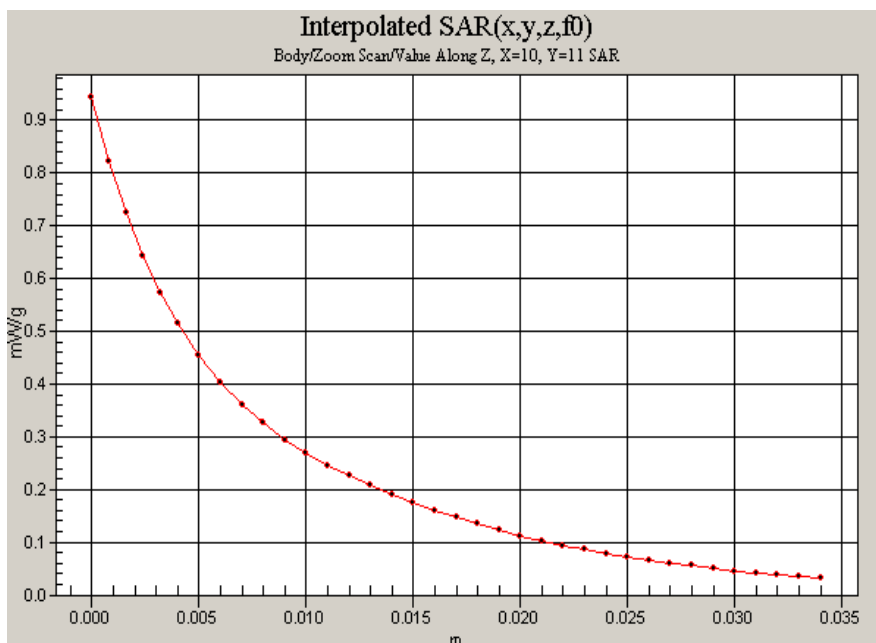

Date: 9/11/04; Test Laboratory: TCC San Diego

DUT: QMNRM-19; HWID: 4106; Serial No: 044/00224656; Antenna extended; with HS-5.

Communication System: CDMA 1900 ; Channel 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 1.576$; mho/m, $\epsilon_r = 51.96$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6 °C

Phantom section: Flat Section ; **Worst Case Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1805; ConvF(4.47, 4.47, 4.47); Calibrated: 04/27/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 10/15/2003
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.354 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.379 mW/g

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.218 mW/g


Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.335 mW/g

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.190 mW/g

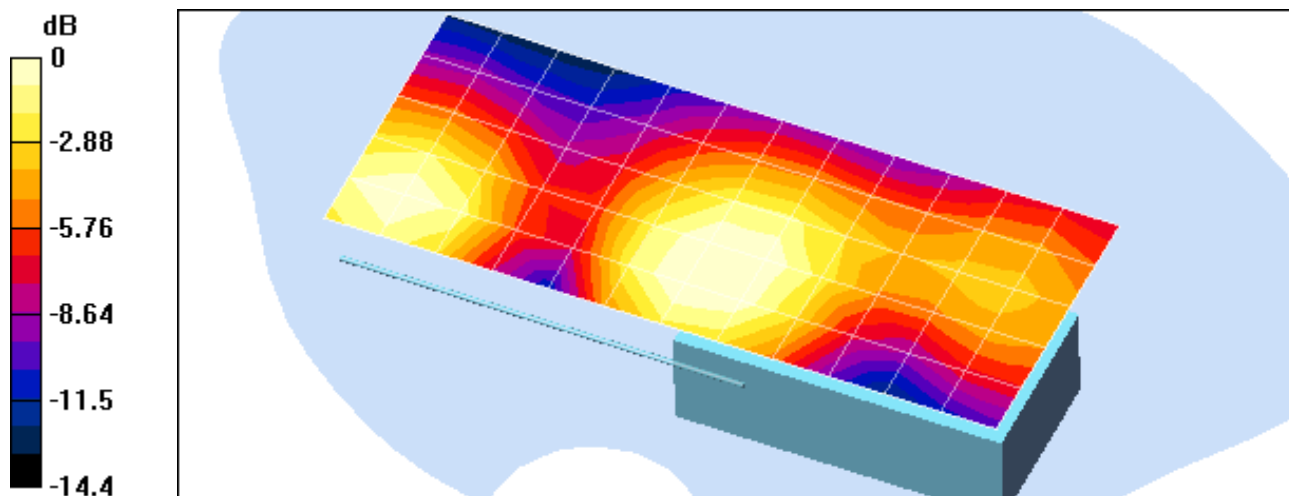

0 dB = 0.335mW/g



APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

Client

Nokia SD

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1805**

Calibration procedure(s) **QA CAL-01.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 27, 2004**


Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	6-Nov-03 (METAS, No. 252-0254)	Nov-04
Power sensor HP 8481A	US37292783	6-Nov-03 (METAS, No. 252-0254)	Nov-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Technician	
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: April 27, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

DASY - Parameters of Probe: ET3DV6 SN:1805

Sensitivity in Free Space

Diode Compression^A

NormX	$1.84 \mu\text{V}/(\text{V}/\text{m})^2$
NormY	$1.74 \mu\text{V}/(\text{V}/\text{m})^2$
NormZ	$2.14 \mu\text{V}/(\text{V}/\text{m})^2$

DCP X	95	mV
DCP Y	95	mV
DCP Z	95	mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	8.6	4.4
SAR _{be} [%]	With Correction Algorithm	0.0	0.1

Head 1800 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	12.8	8.7
SAR _{be} [%]	With Correction Algorithm	0.2	0.2



Sensor Offset

Probe Tip to Sensor Center	2.7 mm
Optical Surface Detection	in tolerance

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A numerical linearization parameter: uncertainty not required

Conversion Factor Assessment

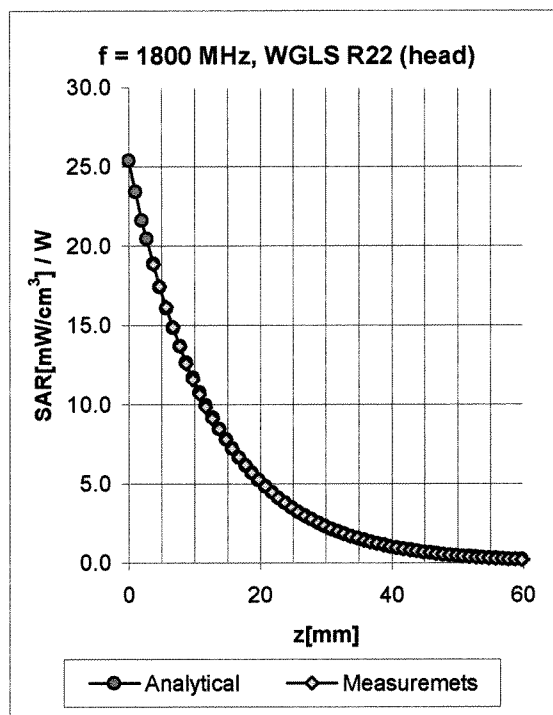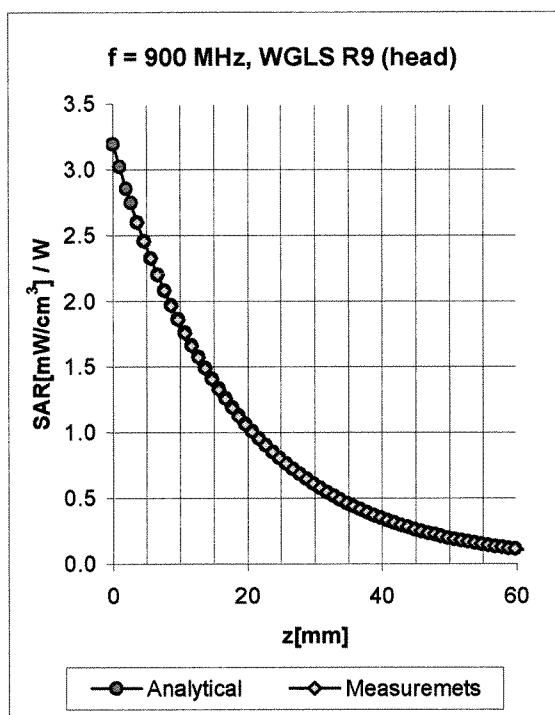

f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	785-885	Head	41.5 ± 5%	0.90 ± 5%	0.98	1.43	6.32 ± 9.7% (k=2)
900	850-950	Head	41.5 ± 5%	0.97 ± 5%	0.77	1.63	6.34 ± 9.7% (k=2)
1750	1700-1800	Head	40.0 ± 5%	1.40 ± 5%	0.50	2.63	5.26 ± 9.7% (k=2)
1900	1850-1950	Head	40.0 ± 5%	1.40 ± 5%	0.51	2.74	5.08 ± 9.7% (k=2)
835	785-885	Body	55.2 ± 5%	0.97 ± 5%	0.68	1.77	6.17 ± 9.7% (k=2)
900	850-950	Body	55.0 ± 5%	1.05 ± 5%	0.53	2.06	5.90 ± 9.7% (k=2)
1750	1700-1800	Body	53.3 ± 5%	1.52 ± 5%	0.55	2.73	4.60 ± 9.7% (k=2)
1900	1850-1950	Body	53.3 ± 5%	1.52 ± 5%	0.61	2.72	4.47 ± 9.7% (k=2)

^B The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.



APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

Client

Nokia San Diego

CALIBRATION CERTIFICATE

Object(s)

D835V2 - SN.479

Calibration procedure(s)

QA CAL-05.v2
Calibration procedure for dipole validation kits

Calibration date:

November 18, 2003

Condition of the calibrated item


In Tolerance (according to the specific calibration document)


This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	6-Nov-03 (METAS, No. 252-0254)	Nov-04
Power sensor HP 8481A	US37292783	6-Nov-03 (METAS, No. 252-0254)	Nov-04
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Oct 05

	Name	Function	Signature
Calibrated by:	Judith Mueller	Technician	

Approved by:	Katja Pokovic	Laboratory Director	
--------------	---------------	---------------------	---

Date issued: November 20, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN479

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz ($\sigma = 0.88$ mho/m, $\epsilon_r = 41.22$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.7, 6.7, 6.7); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 60

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.6 V/m

Power Drift = 0.0 dB

Maximum value of SAR = 2.47 mW/g

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.51 mW/g

Reference Value = 54.6 V/m

Power Drift = 0.0 dB

Maximum value of SAR = 2.5 mW/g

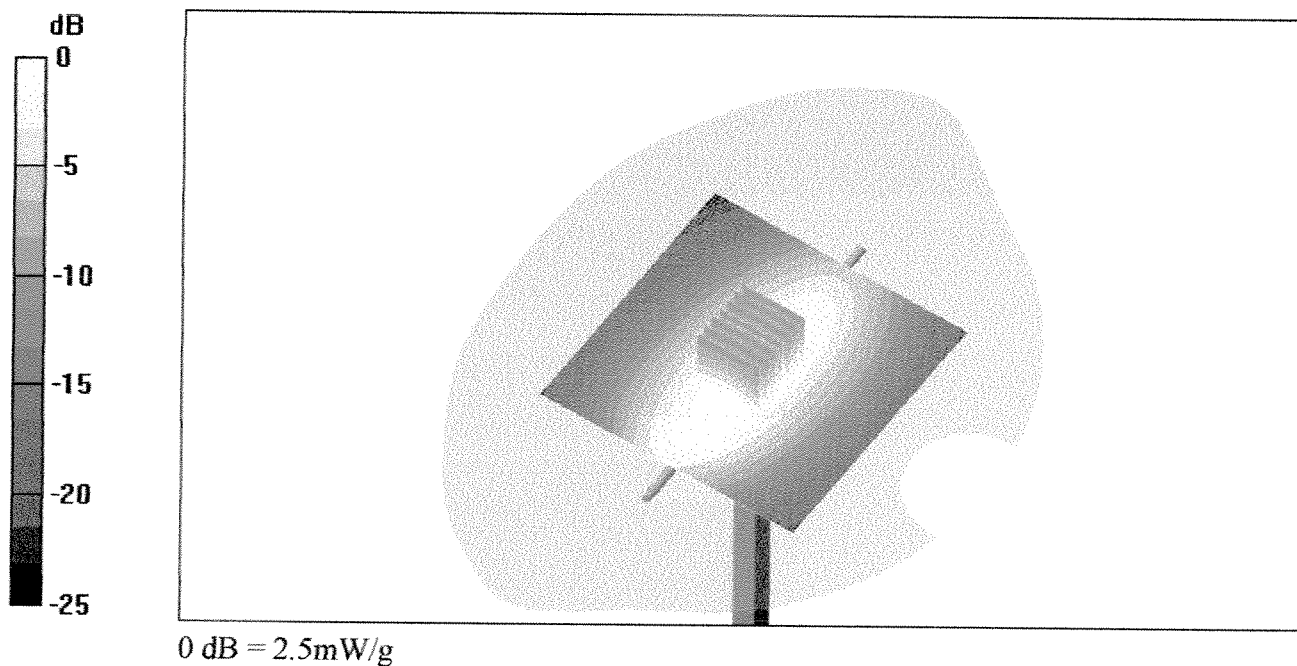

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN479

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Muscle 835 MHz ($\sigma = 0.98$ mho/m, $\epsilon_r = 54.98$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 60

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.4 V/m

Power Drift = -0.006 dB

Maximum value of SAR = 2.67 mW/g

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.63 mW/g

Reference Value = 54.4 V/m

Power Drift = -0.006 dB

Maximum value of SAR = 2.7 mW/g

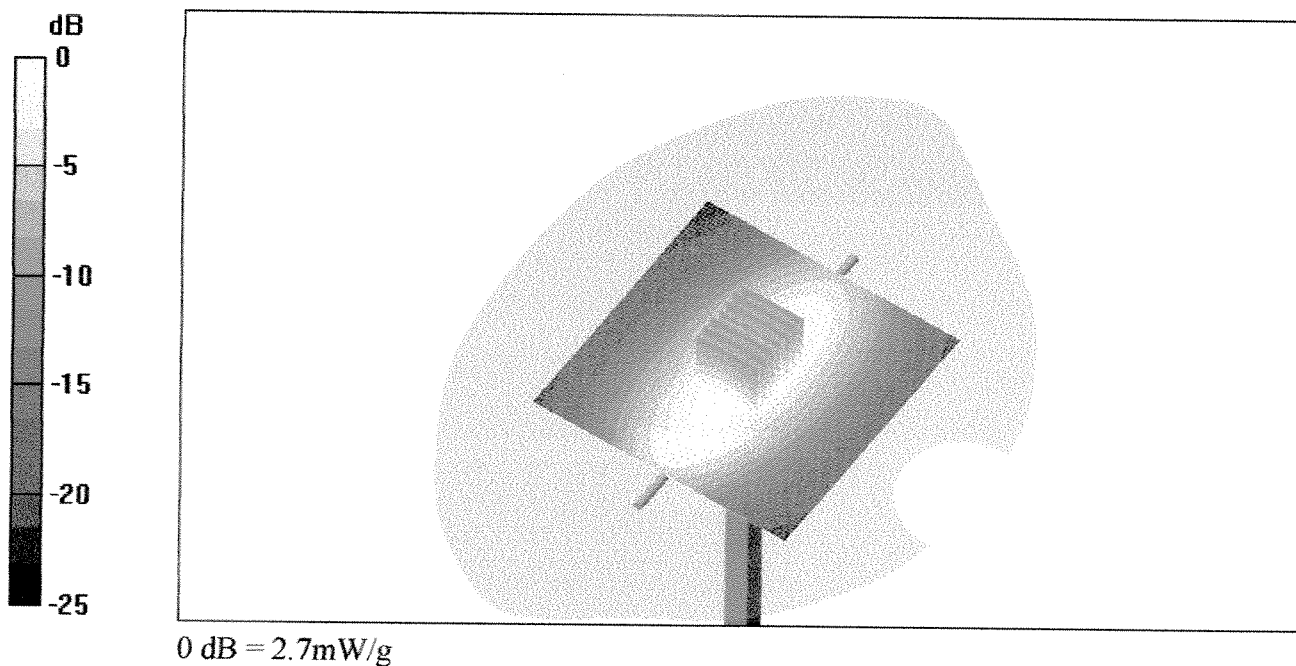

Client **Nokia Inc., San Diego**

CALIBRATION CERTIFICATE

Object(s) **D1900V2 - SN:534**

Calibration procedure(s) **QA CAL-05 v2
Calibration procedure for dipole validation kits**

Calibration date: **September 15, 2003**


Condition of the calibrated item **In Tolerance (according to the specific calibration document)**


This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03

Calibrated by:	Name	Function	Signature
	Nico Vetterli	Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Laboratory Director	

Date issued: September 15, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Test Laboratory: SPEAG, Zurich, Switzerland

File Name: SN534_SN1507_M1900_110903.da4

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN534

Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz ($\sigma = 1.6$ mho/m, $\epsilon_r = 50.87$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 91.7 V/m

Power Drift = -0.007 dB

Maximum value of SAR = 11.7 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.43 mW/g

Reference Value = 91.7 V/m

Power Drift = -0.007 dB

Maximum value of SAR = 11.6 mW/g

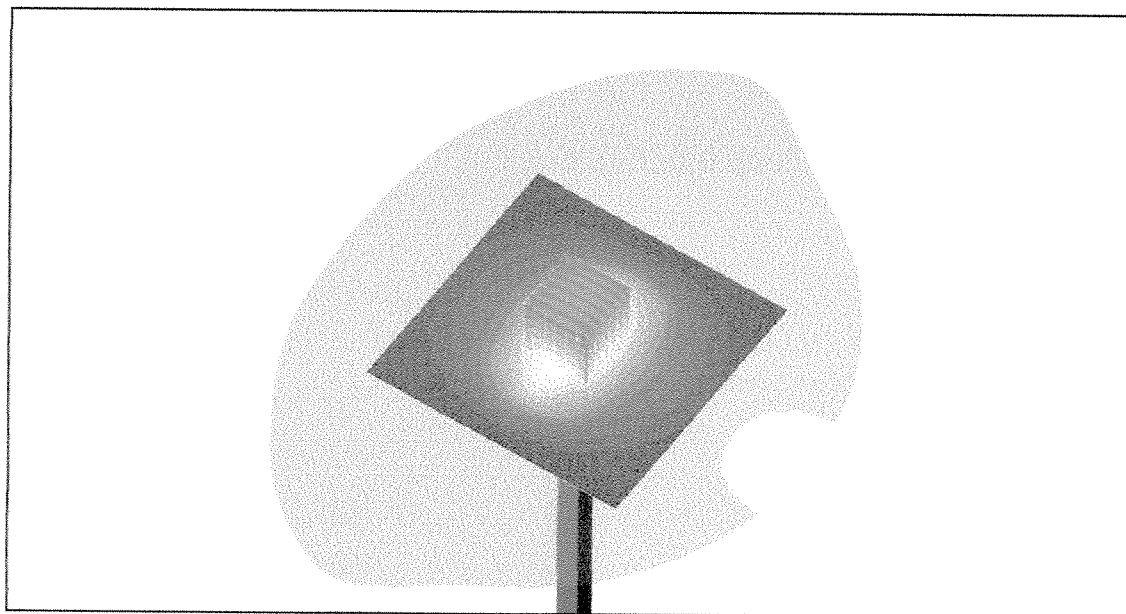

0 dB = 11.6mW/g

Test Laboratory: SPEAG, Zurich, Switzerland

File Name: SN534_SN1507_HSL1900_150903.da4

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN534

Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz ($\sigma = 1.46$ mho/m, $\epsilon_r = 40.17$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 93.7 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 11.3 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.24 mW/g

Reference Value = 93.7 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 11.3 mW/g

