

SAR Compliance Test Report

Test report no.:	Cph_SAR_0721_07	Date of report:	2007-05-18
Template version:	5.0	Number of pages:	68
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Jesper Nielsen	Product contact person:	Bill Griffin & Victoria Abadilla
Measurements made by:	Mia-Maria Nielsen, Leif Klysner & Jesper Nielsen		
Tested device:	RM-276		
FCC ID:	QMNRM-276	IC:	661X-RM276
Supplement reports:	Cph_SAR_0723_04		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration	4
1.2.3 Maximum Drift	4
1.2.4 Measurement Uncertainty	4
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 DESCRIPTION OF THE ANTENNA	5
3. TEST CONDITIONS	5
3.1 TEMPERATURE AND HUMIDITY	5
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	5
4. DESCRIPTION OF THE TEST EQUIPMENT	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 Isotropic E-field Probe Type ES3DV3	7
4.2 PHANTOMS	8
4.3 TISSUE SIMULANTS	8
4.3.1 Tissue Simulant Recipes	9
4.3.2 System Checking	9
4.3.3 Tissue Simulants used in the Measurements.....	11
5. DESCRIPTION OF THE TEST PROCEDURE	12
5.1 DEVICE HOLDER.....	12
5.2 TEST POSITIONS.....	13
5.2.1 Against Phantom Head.....	13
5.2.2 Body Worn Configuration	13
5.3 SCAN PROCEDURES	13
5.4 SAR AVERAGING METHODS.....	14
6. MEASUREMENT UNCERTAINTY	15
7. RESULTS	16
APPENDIX A: SYSTEM CHECKING SCANS	20
APPENDIX B: MEASUREMENT SCANS.....	28
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	67
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	68

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2007-05-07 to 2007-06-06
SN, HW and SW numbers of tested device	SN: 004401/01/248531/0, HW: 4053, SW: Vp cn3.01, DUT: 27500 SN: 004401/01/248522/9, HW: 4053, SW: Vp cn3.01, DUT: 27691
Batteries used in testing	BL-5C, DUT: 27957, 27958, 27959, 27960, 28722
Headsets used in testing	HS-40, DUT: 27694
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f (MHz)	Radiated power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM 850	251 / 848.8	31.9 dBm ERP	Left, Cheek	0.586 W/kg	0.66 W/kg	1.6 W/kg	PASSED
WCDMA 850	4175 / 835.0	23.7 dBm ERP	Left, Cheek	0.896 W/kg	1.00 W/kg	1.6 W/kg	PASSED
GSM 1900	661 / 1880.0	32.0 dBm EIRP	Left, Cheek	0.566 W/kg	0.63 W/kg	1.6 W/kg	PASSED
WCDMA 1900	9400 / 1880.0	24.5 dBm EIRP	Left, Cheek	1.19 W/kg	1.33 W/kg	1.6 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	Radiated power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM 850	251 / 848.8	32.6 dBm ERP	2.2 cm	0.680 W/kg	0.76 W/kg	1.6 W/kg	PASSED
WCDMA 850	4175 / 835.0	21.2 dBm ERP	2.2 cm	0.757 W/kg	0.85 W/kg	1.6 W/kg	PASSED
GSM 1900	661 / 1880.0	32.2 dBm EIRP	2.2 cm	0.130 W/kg	0.15 W/kg	1.6 W/kg	PASSED
WCDMA 1900	9262 / 1852.4	23.7 dBm EIRP	2.2 cm	0.256 W/kg	0.29 W/kg	1.6 W/kg	PASSED

*SAR values are scaled up by 12% to cover measurement drift.

1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.41 dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%
--------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes and Bands of Operation	GSM 850 / 1900	GPRS 850 / 1900	EGPRS 850 / 1900	WCDMA 850 / 1900	BT
Modulation Mode	GMSK	GMSK	GMSK / 8PSK	QPSK	GFSK
Duty Cycle	1/8	1/8 to 3/8	1/8 to 3/8	1	
Transmitter Frequency Range (MHz)	824 - 849 1850 - 1910	824 - 849 1850 - 1910	824 - 849 1850 - 1910	824 - 849 1850 - 1910	2402-2480

Outside of USA and Canada, the transmitter of the device is capable of operating also in 900 / 1800 MHz bands, which are not part of this filing.

This device has Push to Talk capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom.

2.1 Description of the Antenna

The device has an internal antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 to 22.5
Ambient humidity (RH %):	35 to 55

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	501	12 months	2008-02
DAE3	573	12 months	2007-09
DAE4	682	12 months	2007-08
DAE4	710	12 months	2007-09
E-field Probe ES3DV3	3116	12 months	2007-08
E-field Probe ES3DV3	3117	12 months	2007-08
E-field Probe ES3DV3	3118	12 months	2007-09
E-field Probe ES3DV3	3119	12 months	2007-09
Dipole Validation Kit, D835V2	4d042	24 months	2008-09
Dipole Validation Kit, D1900V2	5d026	24 months	2008-02
DASY4 software	Version 4.7	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SME06	848650/011	36 months	2008-07
Amplifier	2100-BBS3Q8CCJ	1003	-	-
Power Meter	NRP	100808	24 months	2008-03
Power Sensor	NRP-Z51	100412	24 months	2008-03
Call Tester	CMU200	110735	-	-
Call Tester	CMU200	831593	-	-
Call Tester	4400M	0411216	-	-
Call Tester	4400M	0211008	-	-
BT Tester	CBT	100263	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	2007-08
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm
Application	Distance from probe tip to dipole centers: 2.0 mm General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.33	42.2	0.90	
	$\pm 10\%$ window	2.10 - 2.56			
	2007-05-11	2.54	42.8	0.93	21.3
	2007-05-15	2.47	42.6	0.93	21.3
	2007-06-06	2.52	42.3	0.91	21.2
1900	Reference result	9.83	39.4	1.42	
	$\pm 10\%$ window	8.85 - 10.81			
	2007-05-07	10.1	40.3	1.42	21.6

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.45	53.8	0.98	
	$\pm 10\%$ window	2.20 - 2.70			
	2007-05-22	2.49	53.0	0.96	22.3
	2007-05-29	2.56	54.1	0.98	22.1
1900	Reference result	10.0	54.8	1.54	
	$\pm 10\%$ window	9.0 - 11.0			
	2007-05-16	10.4	53.8	1.51	22.2

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	41.5	0.90	
	$\pm 5\%$ window	39.4 – 43.6	0.86 – 0.95	
	2007-05-11	42.8	0.93	21.3
	2007-05-15	42.6	0.92	21.3
	2007-06-06	42.3	0.91	21.2
1880	Recommended value	40.0	1.40	
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	2007-05-07	40.4	1.39	21.6

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	55.2	0.97	
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	2007-05-22	52.9	0.96	22.3
	2007-05-29	54.1	0.98	22.1
1880	Recommended value	53.3	1.52	
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	2007-05-16	53.9	1.48	22.2

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	C_i	$C_i \cdot u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±12.9	116
Coverage Factor for 95%			k=2				
Expanded Uncertainty						±25.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

850 MHz Head SAR results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM	Power		32.1 dBm	32.2 dBm	31.9 dBm
Flip open	Left	Cheek	0.396	0.486	0.582
		Tilt	-	0.253	-
	Right	Cheek	-	0.433	-
		Tilt	-	0.237	-
2-slot GPRS	Power		29.3 dBm	28.8 dBm	28.3 dBm
Flip open	Left	Cheek	-	0.398	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	Power		27.0 dBm	27.2 dBm	27.0 dBm
Flip open	Left	Cheek	-	0.424	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot 8PSK EGPRS	Power		23.1 dBm	23.8 dBm	22.9 dBm
Flip open	Left	Cheek	-	-	0.229
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
GSM Flip open	Left Cheek, BT active		-	-	0.586

850 MHz Head SAR results - continued

Option used	Test configuration		Ch 4132 826.4 MHz	Ch 4175 835.0 MHz	Ch 4233 846.6 MHz
WCDMA	Power		21.4 dBm	23.7 dBm	22.4 dBm
Flip open	Left	Cheek	0.601	0.896	0.826
		Tilt	-	0.470	-
	Right	Cheek	0.550	0.895	0.784
		Tilt	-	0.447	-
WCDMA Flip open	Left Cheek, BT active		-	0.863	-

1900 MHz Head SAR results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	Power		32.9 dBm	32.0 dBm	30.2 dBm
Flip open	Left	Cheek	0.473	0.566	0.535
		Tilt	-	0.108	-
	Right	Cheek	-	0.316	-
		Tilt	-	0.106	-
2-slot GPRS	Power		29.9 dBm	29.0 dBm	27.4 dBm
Flip open	Left	Cheek	-	0.529	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	Power		27.1 dBm	27.9 dBm	27.3 dBm
Flip open	Left	Cheek	-	0.526	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot 8PSK EGPRS	Power		29.2 dBm	28.5 dBm	26.6 dBm
Flip open	Left	Cheek	-	0.377	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
GSM Flip open	Left Cheek, BT active		-	0.555	-
Option used	Test configuration		Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz
WCDMA	Power		23.5 dBm	24.5 dBm	23.4 dBm
Flip open	Left	Cheek	1.08	1.15	1.02
		Tilt	-	0.194	-
	Right	Cheek	-	0.673	-
		Tilt	-	0.211	-
WCDMA Flip open	Left Cheek, BT active		-	1.19	-

The measured Body SAR values for the test device are tabulated below:

850 MHz Body SAR results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM	Power	31.3 dBm	32.0 dBm	32.6 dBm
Flip closed	Without headset	0.443	0.579	0.633
	Headset HS-40	0.303	0.347	0.355
Flip closed	Without headset, BT active	-	-	0.680
Option used	Test configuration	Ch 4132 826.4 MHz	Ch 4175 835.0 MHz	Ch 4233 846.6 MHz
		Ch 4132 826.4 MHz	Ch 4175 835.0 MHz	Ch 4233 846.6 MHz
WCDMA	Power	19.7 dBm	21.2 dBm	21.2 dBm
Flip closed	Without headset	0.539	0.744	0.663
	Headset HS-40	0.390	0.577	0.521
Flip closed	Without headset, BT active	-	0.757	-

1900 MHz Body SAR results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	Power	32.7 dBm	32.2 dBm	31.4 dBm
Flip closed	Without headset	0.120	0.126	0.108
	Headset HS-40	0.116	0.121	0.101
Flip closed	Without headset, BT active	-	0.130	-
Option used	Test configuration	Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz
		Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz
WCDMA	Power	23.7 dBm	23.7 dBm	23.2 dBm
Flip closed	Without headset	0.256	0.241	0.189
	Headset HS-40	0.227	0.208	0.167
Flip closed	Without headset, BT active	0.248	-	-

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

See the following pages

Date/Time: 2007-05-11 12:44:29

Test Laboratory: TCC Nokia
Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.75 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m


Peak SAR (extrapolated) = 3.73 W/kg

SAR(1 g) = 2.54 mW/g

SAR(10 g) = 1.67 mW/g

Power Drift = -0.072 dB

Maximum value of SAR (measured) = 2.74 mW/g

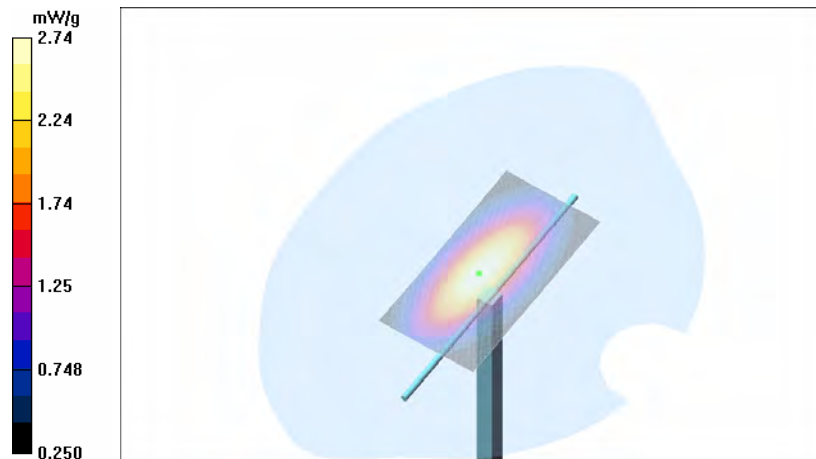

Date/Time: 2007-05-15 09:58:50

Test Laboratory: TCC Nokia
Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW 2/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.73 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.0 V/m


Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.47 mW/g

SAR(10 g) = 1.63 mW/g

Power Drift = -0.075 dB

Maximum value of SAR (measured) = 2.67 mW/g

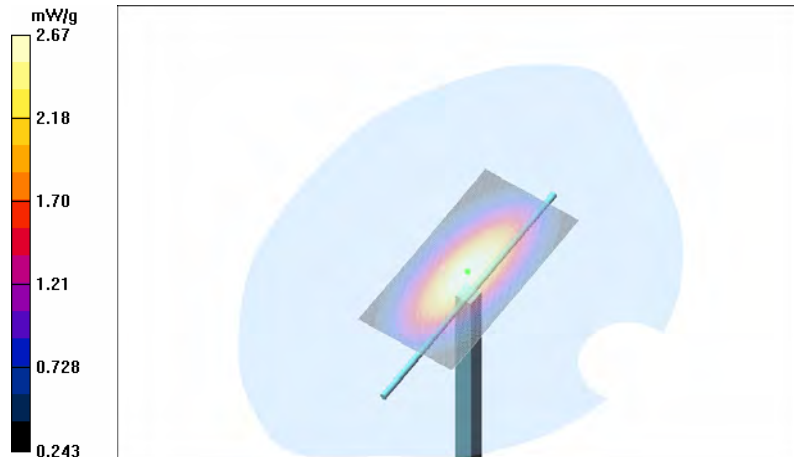

Date/Time: 2007-06-06 10:38:55

Test Laboratory: TCC Nokia
Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t = 21.2\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.913\text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.75 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.6 V/m


Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.52 mW/g

SAR(10 g) = 1.65 mW/g

Power Drift = -0.056 dB

Maximum value of SAR (measured) = 2.72 mW/g

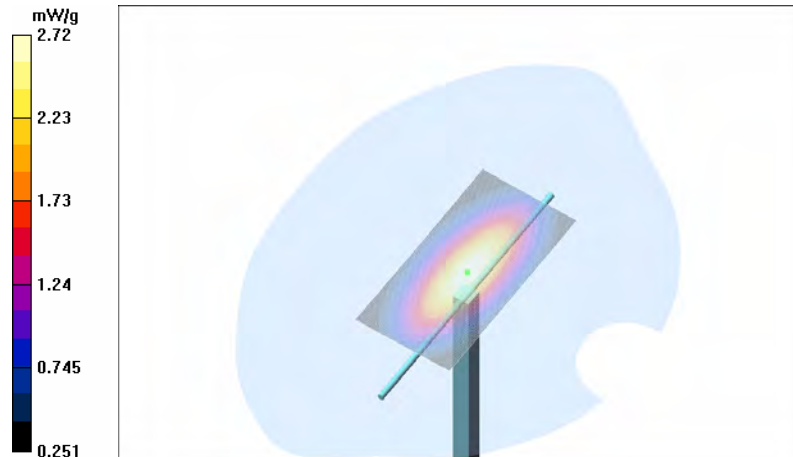

Date/Time: 2007-05-07 10:21:39

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: 5d026

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.6$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.7 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.0 V/m

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.1 mW/g

SAR(10 g) = 5.28 mW/g

Power Drift = -0.012 dB

Maximum value of SAR (measured) = 11.5 mW/g



Date/Time: 2007-05-22 10:00:57

Test Laboratory: TCC Nokia
Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.3\text{ C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.959\text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.68 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.7 V/m


Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.49 mW/g

SAR(10 g) = 1.64 mW/g

Power Drift = -0.029 dB

Maximum value of SAR (measured) = 2.70 mW/g

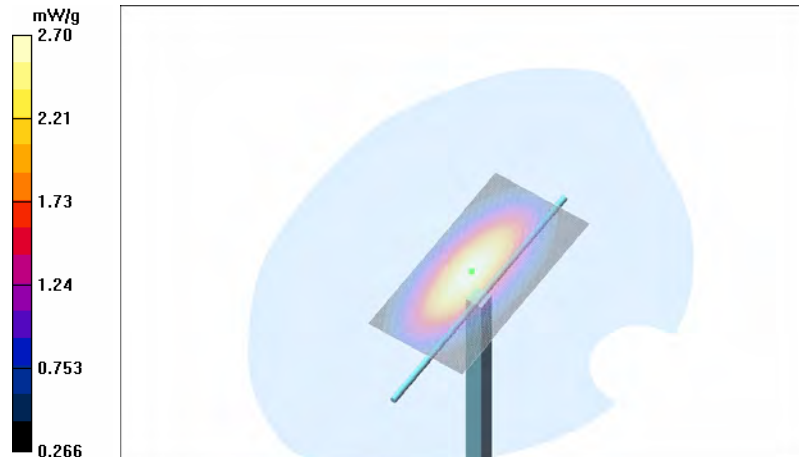

Date/Time: 2007-05-29 15:51:34

Test Laboratory: TCC Nokia
Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.1\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.977\text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.76 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.4 V/m


Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.56 mW/g

SAR(10 g) = 1.69 mW/g

Power Drift = -0.050 dB

Maximum value of SAR (measured) = 2.77 mW/g

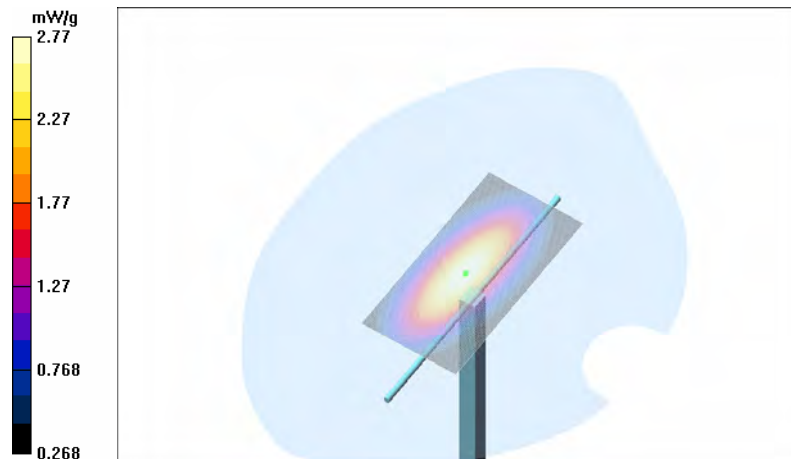

Date/Time: 2007-05-16 09:58:51

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: 5d026

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: $t=22.2\text{ C}$

Medium parameters used: $f = 1900\text{ MHz}$; $\sigma = 1.51\text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 12.1 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 90.1 V/m

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 10.4 mW/g

SAR(10 g) = 5.54 mW/g

Power Drift = -0.093 dB

Maximum value of SAR (measured) = 11.9 mW/g



APPENDIX B: MEASUREMENT SCANS

See the following pages

Date/Time: 2007-05-11 16:18:35

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM850

Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 849$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position – High – Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.633 mW/g

Cheek position - High – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.2 V/m

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.582 mW/g

SAR(10 g) = 0.419 mW/g

Power Drift = -0.039 dB

Maximum value of SAR (measured) = 0.614 mW/g

Cheek position - High/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.2 V/m


Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.549 mW/g

SAR(10 g) = 0.359 mW/g

Power Drift = -0.039 dB

Maximum value of SAR (measured) = 0.619 mW/g

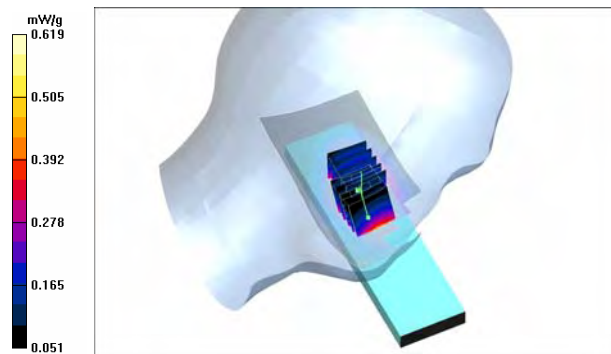

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-11 15:11:21

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 837$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle – Flip open/Area Scan (51x131x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.275 mW/g

Tilt position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 13.9 V/m


Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.253 mW/g

SAR(10 g) = 0.182 mW/g

Power Drift = -0.104 dB

Maximum value of SAR (measured) = 0.270 mW/g

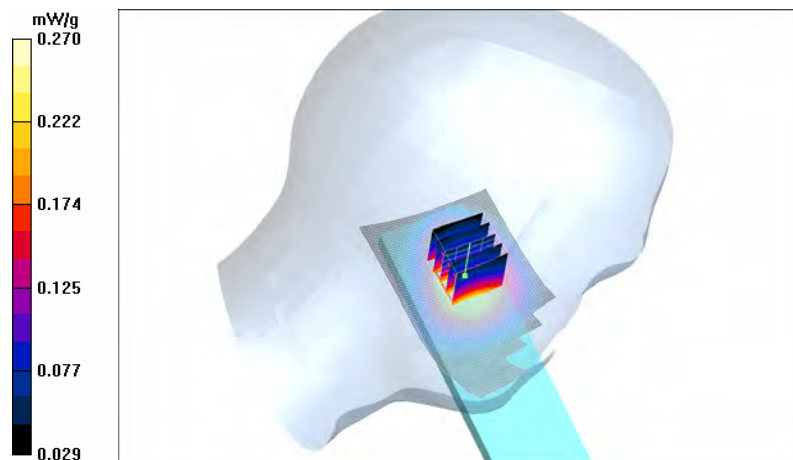

Date/Time: 2007-05-11 15:28:05

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 837$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.468 mW/g

Cheek position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.1 V/m


Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.433 mW/g

SAR(10 g) = 0.314 mW/g

Power Drift = -0.246 dB

Maximum value of SAR (measured) = 0.459 mW/g

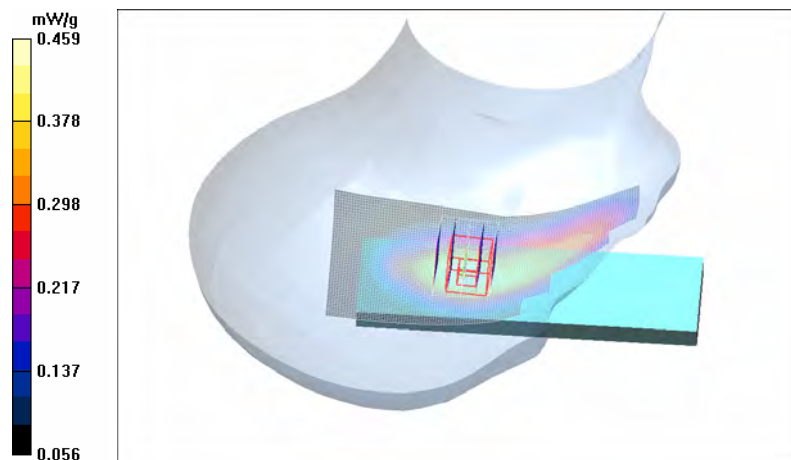

Date/Time: 2007-05-11 15:41:41

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 837$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.256 mW/g

Tilt position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.5 V/m


Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.237 mW/g

SAR(10 g) = 0.171 mW/g

Power Drift = 0.039 dB

Maximum value of SAR (measured) = 0.252 mW/g

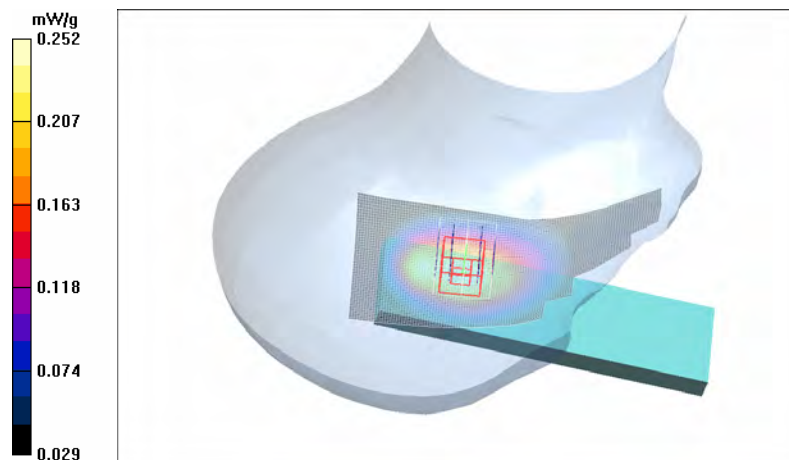

Date/Time: 2007-05-11 14:08:53

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: 2-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 837$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.443 mW/g

Cheek position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 11.4 V/m


Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.398 mW/g

SAR(10 g) = 0.287 mW/g

Power Drift = -0.102 dB

Maximum value of SAR (measured) = 0.416 mW/g

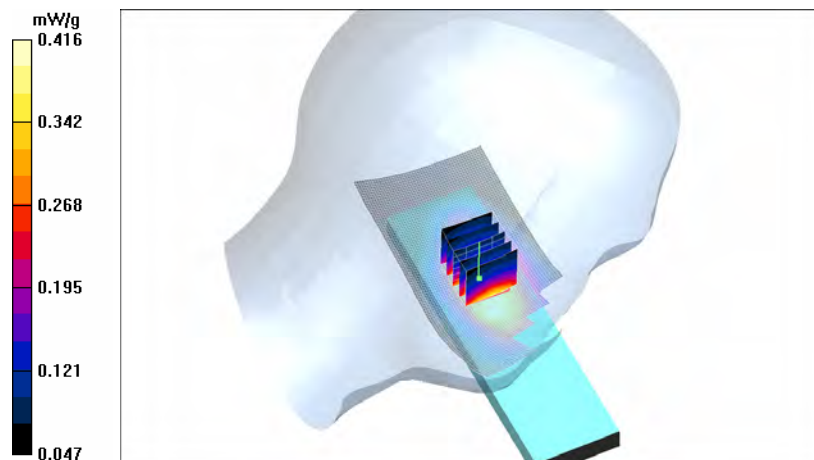

Date/Time: 2007-05-11 14:45:02

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: 3-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: Head 850; Medium Notes: Medium Temperature: t=21.3 C

Medium parameters used: f = 837 MHz; σ = 0.929 mho/m; ϵ_r = 42.8; ρ = 1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.462 mW/g

Cheek position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.7 V/m


Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.424 mW/g

SAR(10 g) = 0.304 mW/g

Power Drift = -0.097 dB

Maximum value of SAR (measured) = 0.448 mW/g

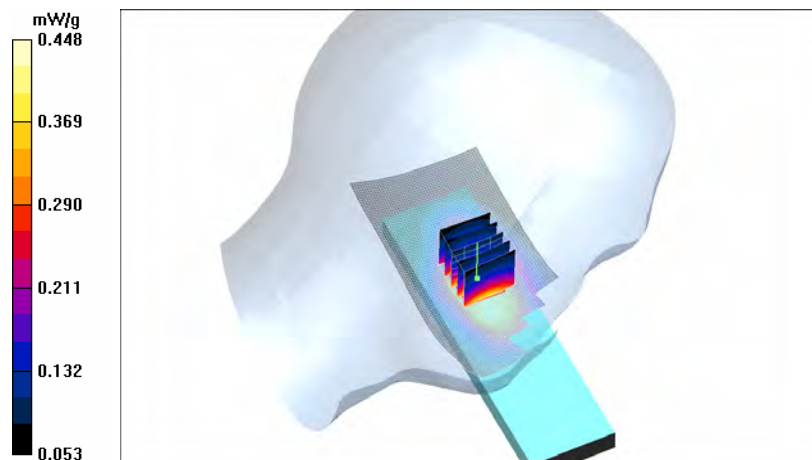

Date/Time: 2007-05-11 17:06:49

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: 2-slot 8PSK EGPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 849$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - High – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.261 mW/g

Cheek position - High – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.93 V/m


Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.229 mW/g

SAR(10 g) = 0.166 mW/g

Power Drift = 0.073 dB

Maximum value of SAR (measured) = 0.240 mW/g

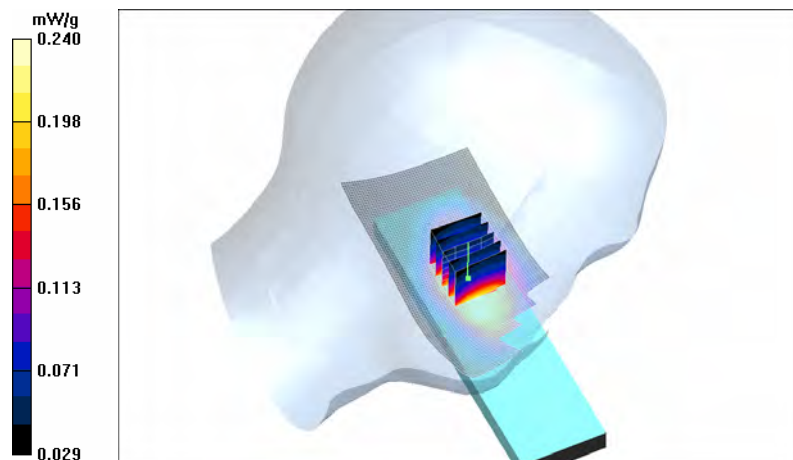

Date/Time: 2007-05-11 16:40:51

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM850

Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 849$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - High - Flip open - BT active/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.632 mW/g

Cheek position - High - Flip open - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.1 V/m

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.586 mW/g

SAR(10 g) = 0.419 mW/g

Power Drift = -0.128 dB

Maximum value of SAR (measured) = 0.619 mW/g

Cheek position - High - Flip open - BT active/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.1 V/m


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.562 mW/g

SAR(10 g) = 0.365 mW/g

Power Drift = -0.128 dB

Maximum value of SAR (measured) = 0.636 mW/g

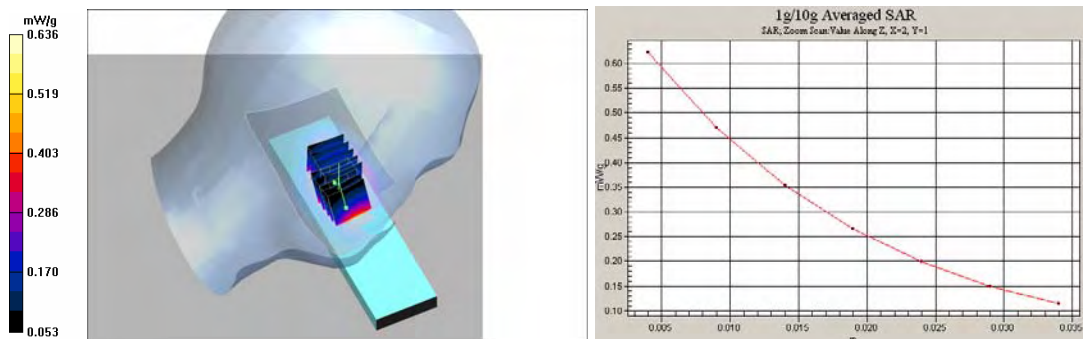

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-15 10:39:11

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.961 mW/g

Cheek position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.8 V/m

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.896 mW/g

SAR(10 g) = 0.644 mW/g

Power Drift = 0.080 dB

Maximum value of SAR (measured) = 0.944 mW/g

Cheek position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.8 V/m


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.844 mW/g

SAR(10 g) = 0.555 mW/g

Power Drift = 0.080 dB

Maximum value of SAR (measured) = 0.976 mW/g

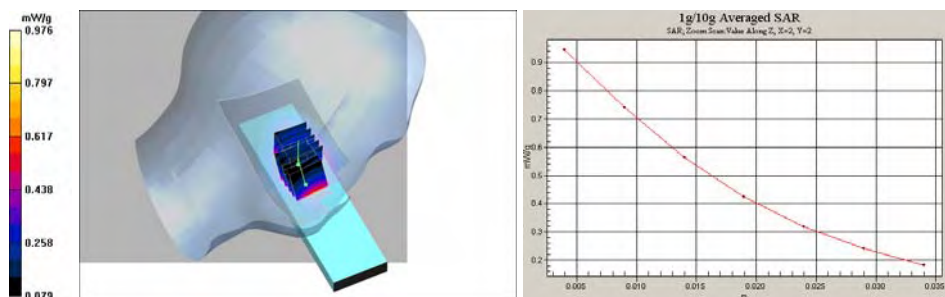

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-15 10:59:08

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.499 mW/g

Tilt position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.9 V/m


Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.470 mW/g

SAR(10 g) = 0.340 mW/g

Power Drift = -0.069 dB

Maximum value of SAR (measured) = 0.500 mW/g

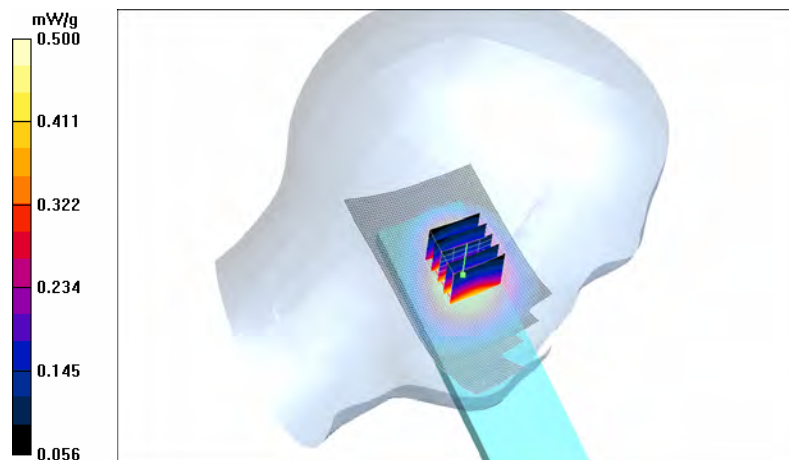

Date/Time: 2007-05-15 11:41:56

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.945 mW/g

Cheek position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.1 V/m


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.895 mW/g

SAR(10 g) = 0.643 mW/g

Power Drift = -0.117 dB

Maximum value of SAR (measured) = 0.955 mW/g

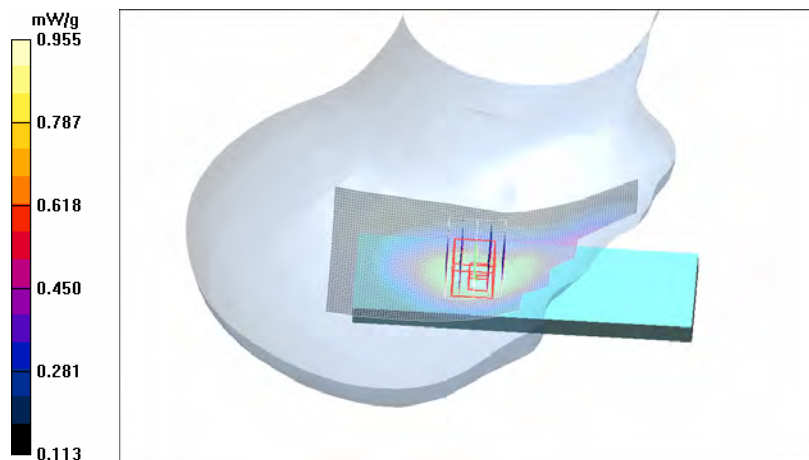

Date/Time: 2007-05-15 11:55:28

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle – Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.479 mW/g

Tilt position - Middle – Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.5 V/m


Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.447 mW/g

SAR(10 g) = 0.324 mW/g

Power Drift = 0.041 dB

Maximum value of SAR (measured) = 0.475 mW/g

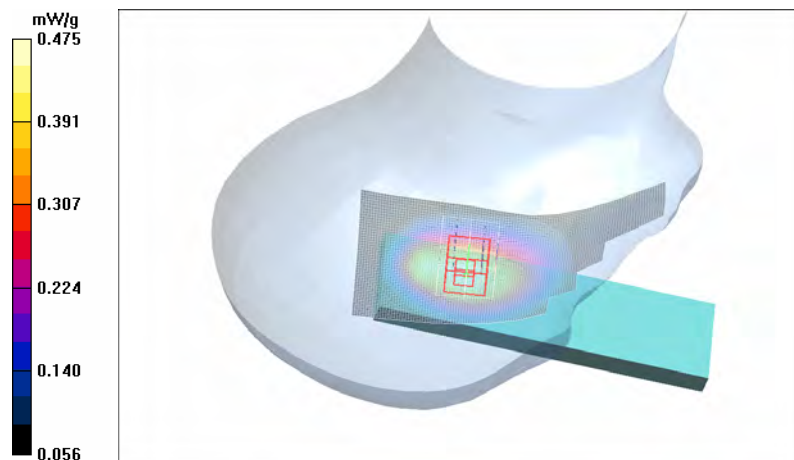

Date/Time: 2007-05-15 13:12:46

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.78, 5.78, 5.78); Calibrated: 2006-08-18
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2006-08-09
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open - BT active/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.939 mW/g

Cheek position - Middle - Flip open - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.3 V/m

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.863 mW/g

SAR(10 g) = 0.622 mW/g

Power Drift = -0.105 dB

Maximum value of SAR (measured) = 0.914 mW/g

Cheek position - Middle - Flip open - BT active/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.3 V/m


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.807 mW/g

SAR(10 g) = 0.530 mW/g

Power Drift = -0.105 dB

Maximum value of SAR (measured) = 0.893 mW/g

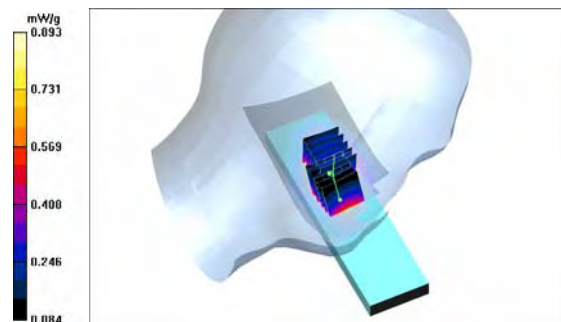

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-07 16:40:24

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.6\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.39\text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.595 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.57 V/m


Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.566 mW/g

SAR(10 g) = 0.332 mW/g

Power Drift = -0.223 dB

Maximum value of SAR (measured) = 0.627 mW/g

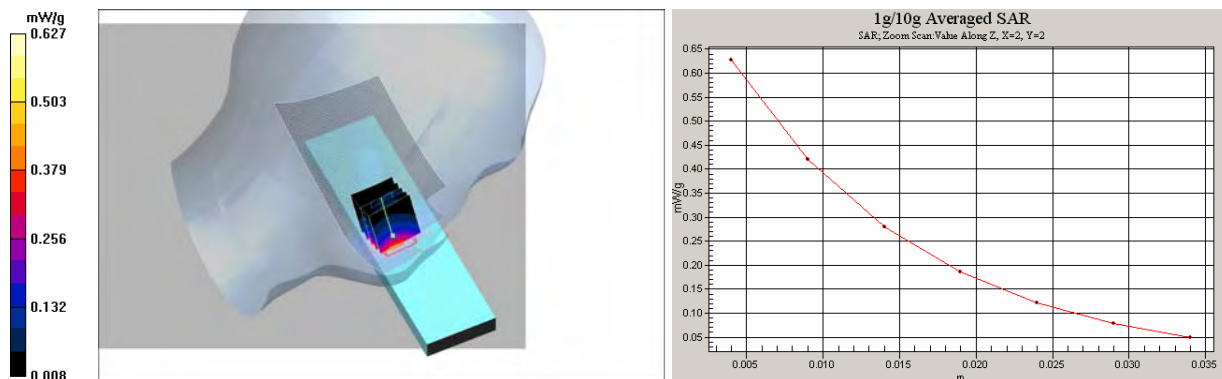

Date/Time: 2007-05-07 17:37:58

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; σ = 1.39 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position – Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.128 mW/g

Tilt position – Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.52 V/m


Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.108 mW/g

SAR(10 g) = 0.064 mW/g

Power Drift = -0.135 dB

Maximum value of SAR (measured) = 0.114 mW/g

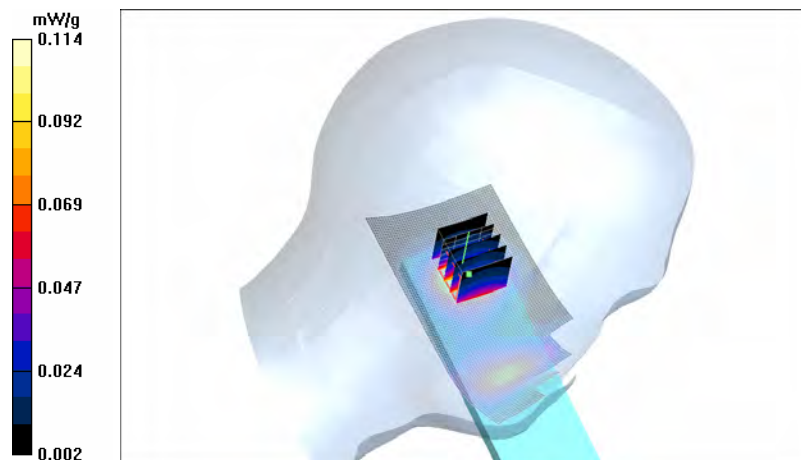

Date/Time: 2007-05-07 18:15:10

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; σ = 1.39 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.13 V/m


Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.316 mW/g

SAR(10 g) = 0.195 mW/g

Power Drift = 0.038 dB

Maximum value of SAR (measured) = 0.344 mW/g

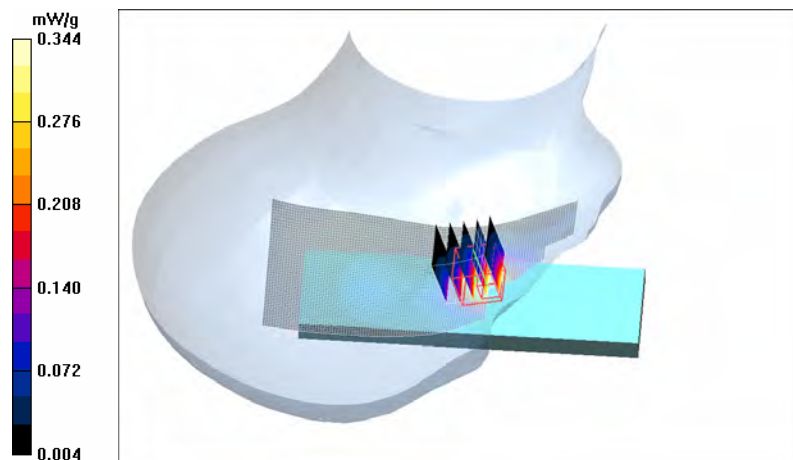

Date/Time: 2007-05-07 18:30:08

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.118 mW/g

Tilt position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.43 V/m


Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.106 mW/g

SAR(10 g) = 0.063 mW/g

Power Drift = -0.083 dB

Maximum value of SAR (measured) = 0.114 mW/g

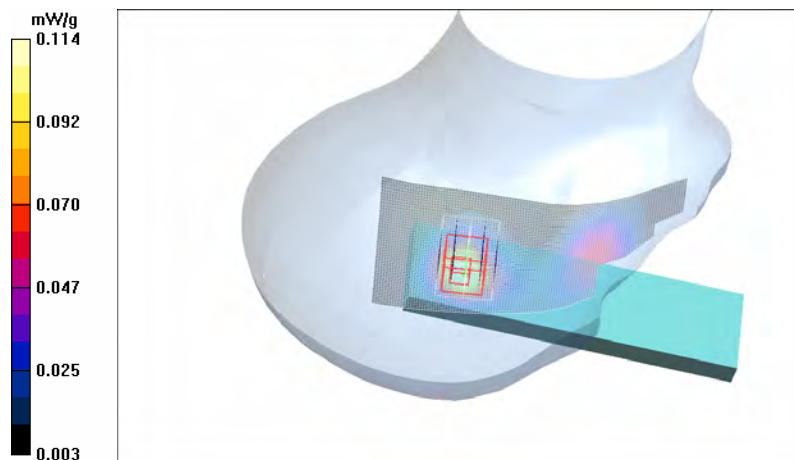

Date/Time: 2007-05-07 16:56:30

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; σ = 1.39 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.558 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.46 V/m


Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.529 mW/g

SAR(10 g) = 0.310 mW/g

Power Drift = -0.305 dB

Maximum value of SAR (measured) = 0.586 mW/g

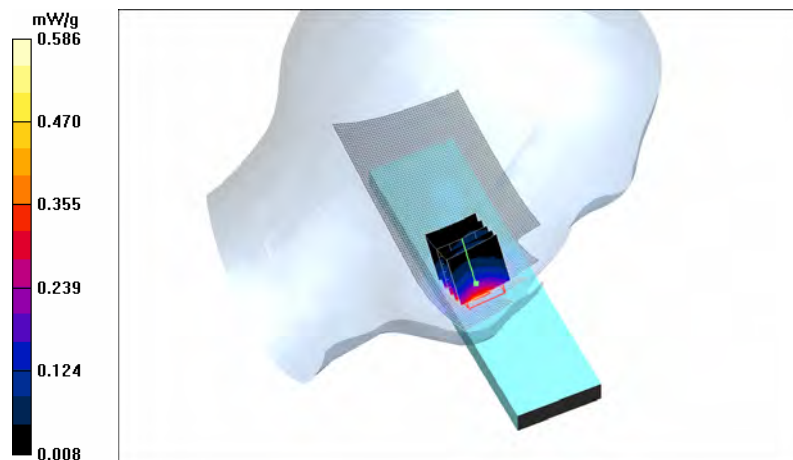

Date/Time: 2007-05-07 17:12:07

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: 3-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:2.8

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; σ = 1.39 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.554 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.44 V/m


Peak SAR (extrapolated) = 0.798 W/kg

SAR(1 g) = 0.526 mW/g

SAR(10 g) = 0.310 mW/g

Power Drift = -0.406 dB

Maximum value of SAR (measured) = 0.587 mW/g

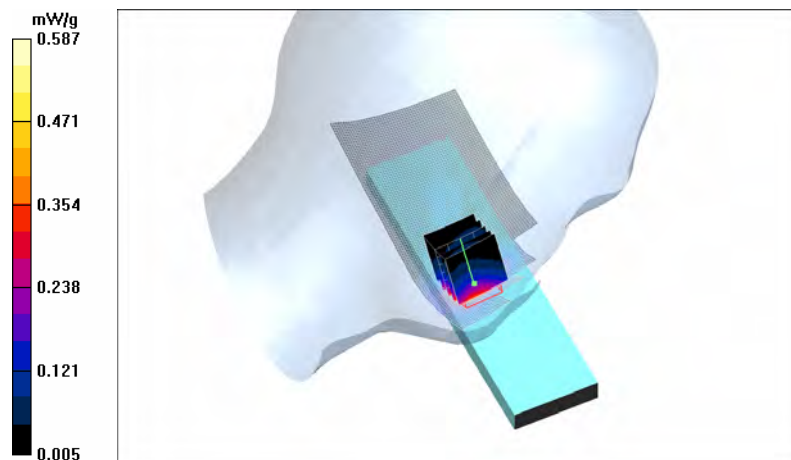

Date/Time: 2007-05-07 19:53:08

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: 2-slot 8PSK EGPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.6\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.39\text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.393 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.52 V/m


Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.377 mW/g

SAR(10 g) = 0.224 mW/g

Power Drift = 0.231 dB

Maximum value of SAR (measured) = 0.417 mW/g

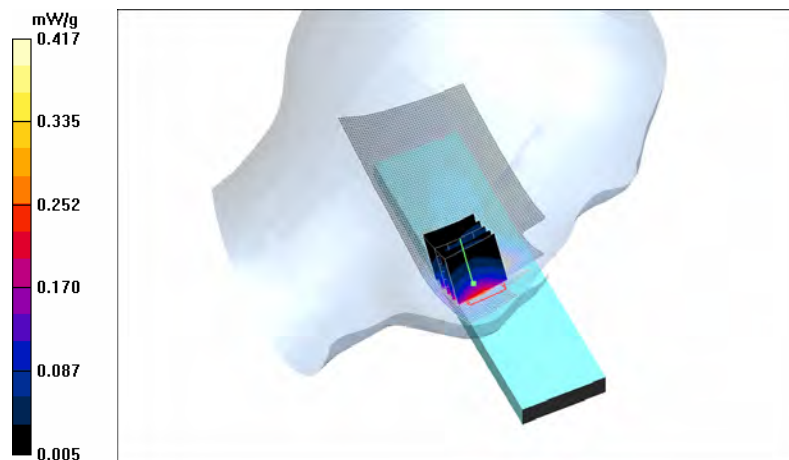

Date/Time: 2007-05-07 19:15:43

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; σ = 1.39 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open - BT active/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.589 mW/g

Cheek position - Middle - Flip open - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.67 V/m


Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.555 mW/g

SAR(10 g) = 0.327 mW/g

Power Drift = -0.140 dB

Maximum value of SAR (measured) = 0.621 mW/g

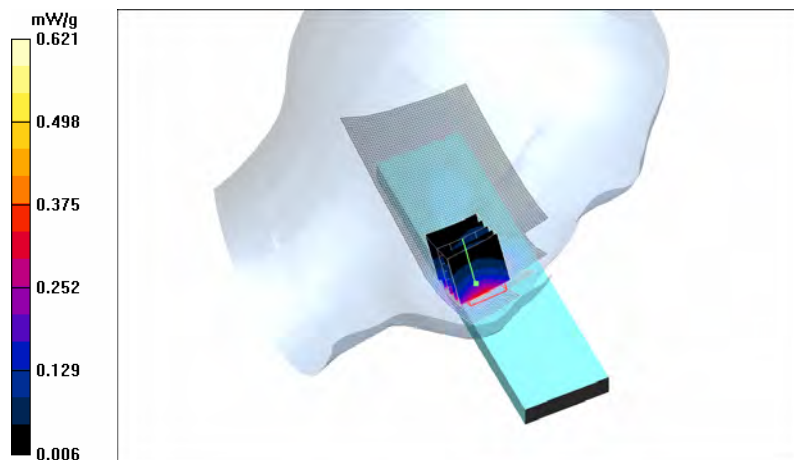

Date/Time: 2007-05-07 20:15:20

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.6$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.24 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.56 V/m


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.15 mW/g

SAR(10 g) = 0.677 mW/g

Power Drift = -0.342 dB

Maximum value of SAR (measured) = 1.26 mW/g

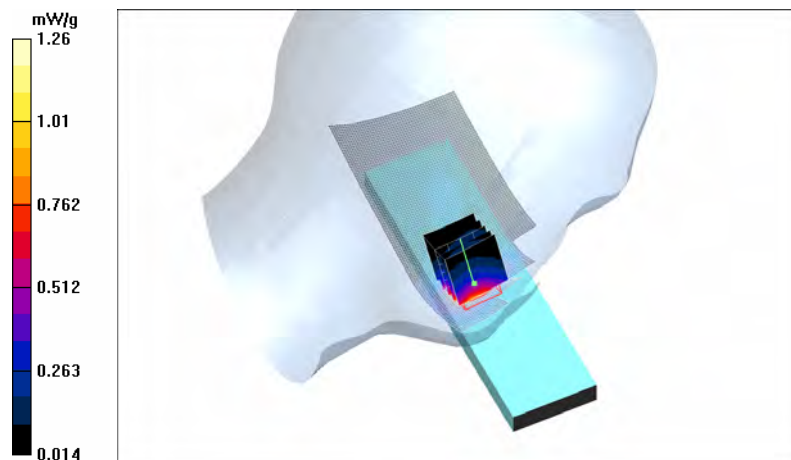

Date/Time: 2007-05-07 20:29:56

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; σ = 1.39 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.229 mW/g

Tilt position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.0 V/m


Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.194 mW/g

SAR(10 g) = 0.117 mW/g

Power Drift = -0.063 dB

Maximum value of SAR (measured) = 0.206 mW/g

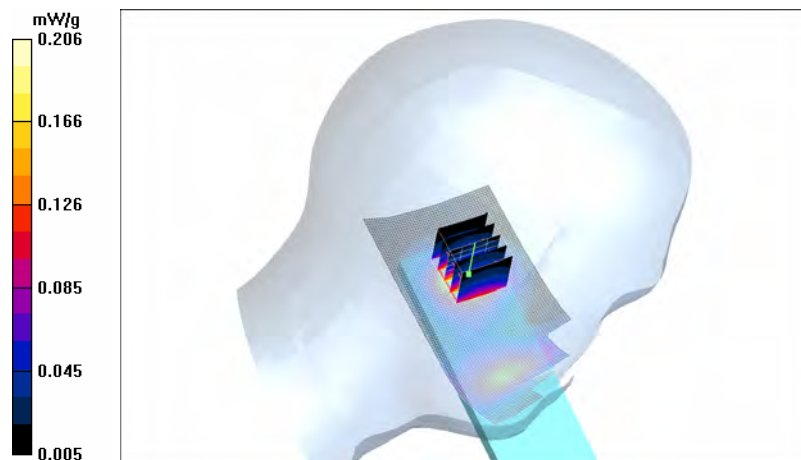

Date/Time: 2007-05-07 20:46:27

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: t=21.6 C

Medium parameters used: f = 1880 MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.849 mW/g

Cheek position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.77 V/m

Peak SAR (extrapolated) = 1.05 W/kg


SAR(1 g) = 0.673 mW/g

SAR(10 g) = 0.419 mW/g

Power Drift = -0.185 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.717 mW/g

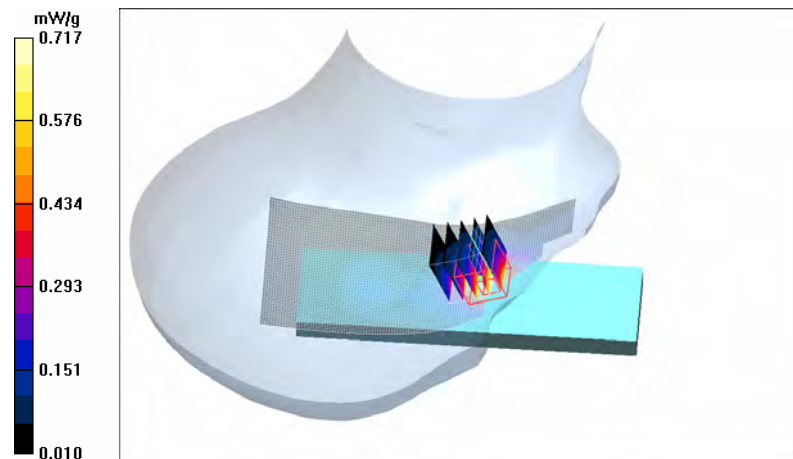

Date/Time: 2007-05-07 21:00:59

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.6$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle - Flip open/Area Scan (51x141x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.240 mW/g

Tilt position - Middle - Flip open/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.4 V/m


Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.211 mW/g

SAR(10 g) = 0.125 mW/g

Power Drift = -0.104 dB

Maximum value of SAR (measured) = 0.225 mW/g

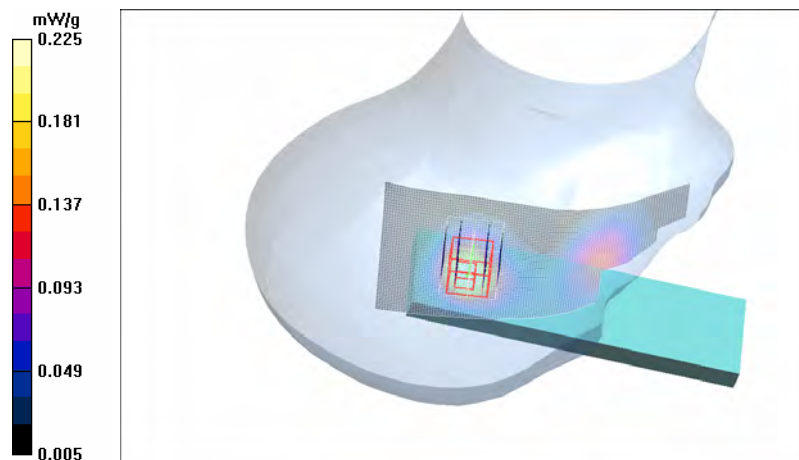

Date/Time: 2007-05-07 21:44:59

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.6\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.39\text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2006-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2006-09-13
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Cheek position - Middle - Flip open - BT active/Area Scan (51x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.21 mW/g

Cheek position - Middle - Flip open - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.37 V/m


Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.19 mW/g

SAR(10 g) = 0.698 mW/g

Power Drift = -0.154 dB

Maximum value of SAR (measured) = 1.34 mW/g

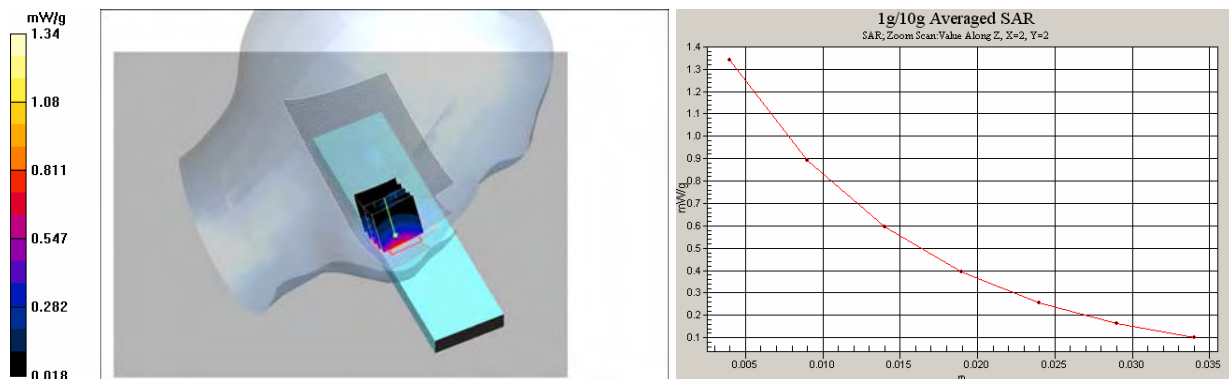

Date/Time: 2007-05-29 17:08:49

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248522/9

Communication System: GSM850

Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.1\text{ C}$

Medium parameters used: $f = 849\text{ MHz}$; $\sigma = 0.989\text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - High - No Accessory - Flip closed/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.673 mW/g

Body - High - No Accessory - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.8 V/m


Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.633 mW/g

SAR(10 g) = 0.456 mW/g

Power Drift = 0.023 dB

Maximum value of SAR (measured) = 0.672 mW/g

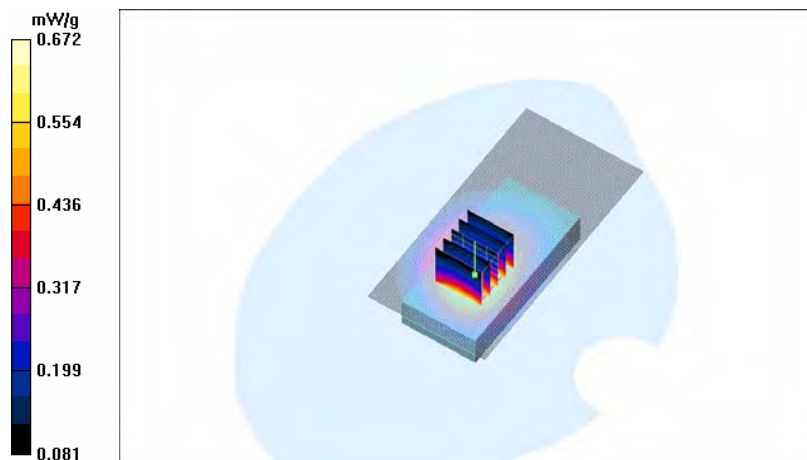

Date/Time: 2007-05-29 17:20:36

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248522/9

Communication System: GSM850

Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.1\text{ C}$

Medium parameters used: $f = 849\text{ MHz}$; $\sigma = 0.989\text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - High - HS-40 - Flip closed/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.374 mW/g

Body - High - HS-40 - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.3 V/m


Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.355 mW/g

SAR(10 g) = 0.254 mW/g

Power Drift = 0.068 dB

Maximum value of SAR (measured) = 0.378 mW/g

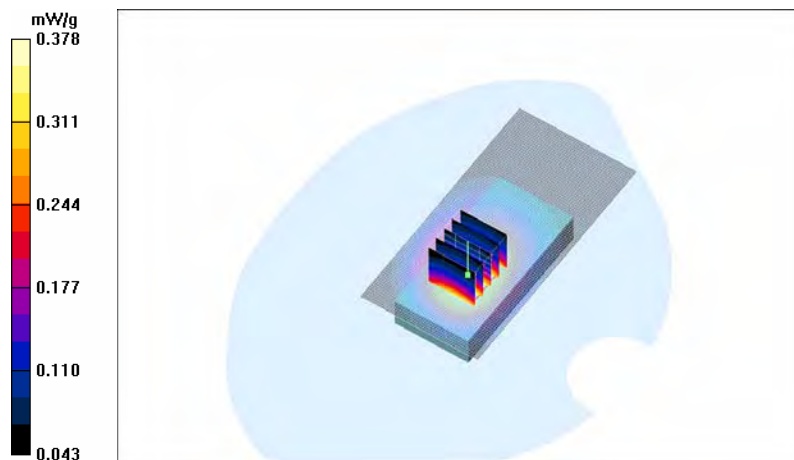

Date/Time: 2007-05-29 18:04:06

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248522/9

Communication System: GSM850

Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.1\text{ C}$

Medium parameters used: $f = 849\text{ MHz}$; $\sigma = 0.989\text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - High - No Accessory - Flip closed - BT active/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.728 mW/g

Body - High - No Accessory - Flip closed - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.0 V/m


Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.680 mW/g

SAR(10 g) = 0.489 mW/g

Power Drift = -0.062 dB

Maximum value of SAR (measured) = 0.721 mW/g

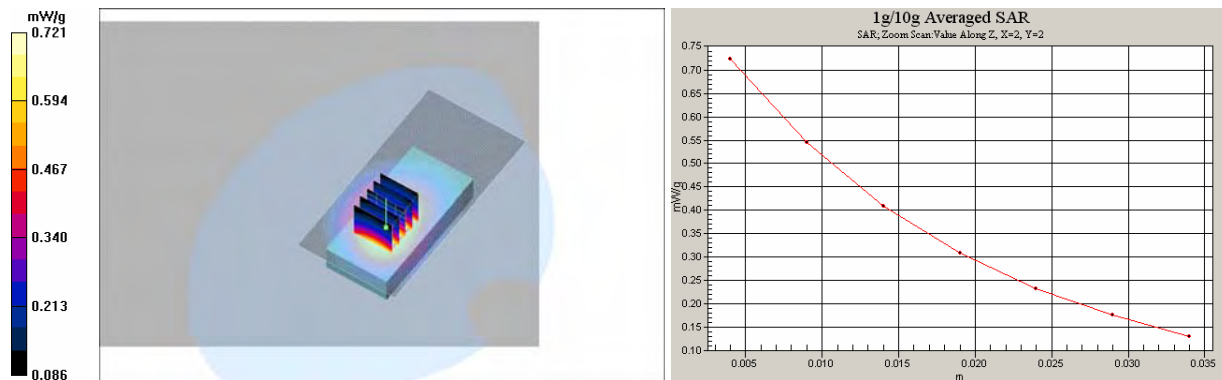

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-22 12:22:51

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.3\text{ C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.959\text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Middle - No Accessory - Flip closed/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.795 mW/g

Body - Middle - No Accessory - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.3 V/m


Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.744 mW/g

SAR(10 g) = 0.539 mW/g

Power Drift = -0.073 dB

Maximum value of SAR (measured) = 0.791 mW/g

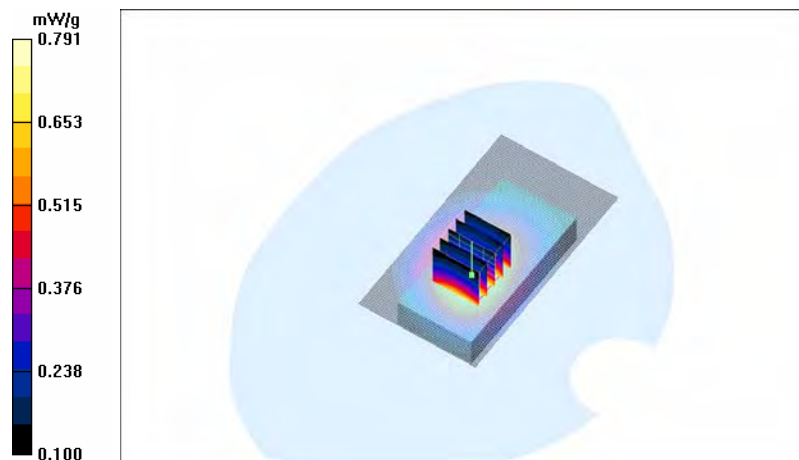

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-22 12:55:25

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.3\text{ C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.959\text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Middle - HS-40 - Flip closed/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.620 mW/g

Body - Middle - HS-40 - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.4 V/m


Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.577 mW/g

SAR(10 g) = 0.419 mW/g

Power Drift = -0.079 dB

Maximum value of SAR (measured) = 0.609 mW/g

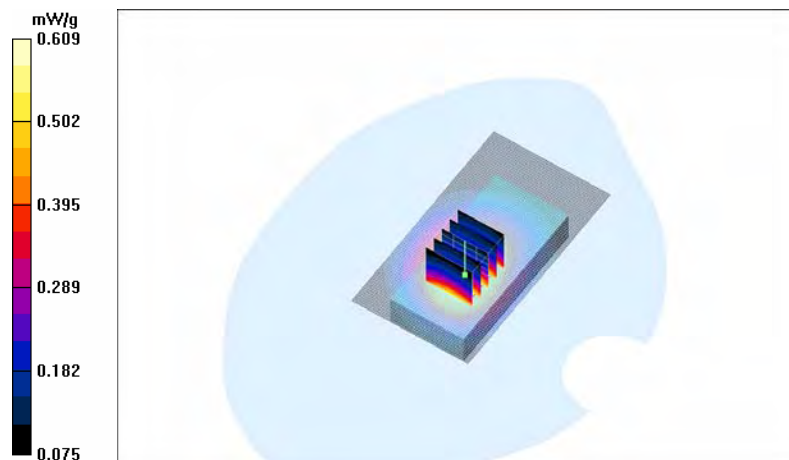

Date/Time: 2007-05-22 13:21:51

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 22.3\text{ C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.959\text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.7, 5.7, 5.7); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Middle - No Accessory - Flip closed - BT active/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.814 mW/g

Body - Middle - No Accessory - Flip closed - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.8 V/m


Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.757 mW/g

SAR(10 g) = 0.550 mW/g

Power Drift = -0.028 dB

Maximum value of SAR (measured) = 0.802 mW/g

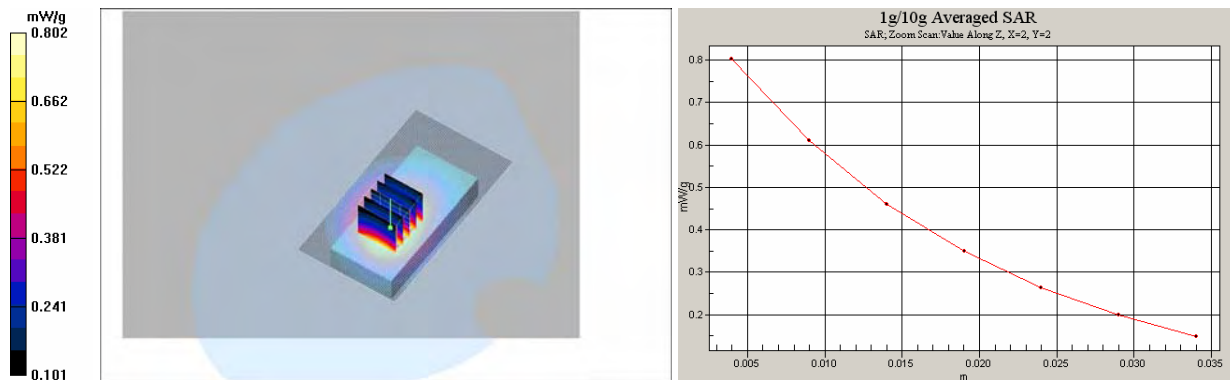

Date/Time: 2007-05-16 11:02:43

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: $t=22.2$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Middle - No Accessory - Flip closed/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.134 mW/g

Body - Middle - No Accessory - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 7.55 V/m


Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.126 mW/g

SAR(10 g) = 0.084 mW/g

Power Drift = 0.020 dB

Maximum value of SAR (measured) = 0.136 mW/g

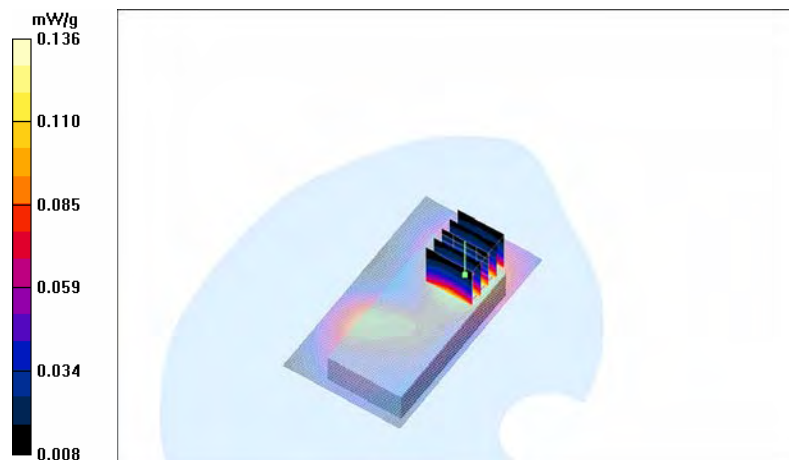

Date/Time: 2007-05-16 11:47:06

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: $t=22.2\text{ C}$

Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.48\text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Middle - HS-40 - Flip closed/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.131 mW/g

Body - Middle - HS-40 - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.33 V/m


Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.121 mW/g

SAR(10 g) = 0.080 mW/g

Power Drift = -0.022 dB

Maximum value of SAR (measured) = 0.129 mW/g

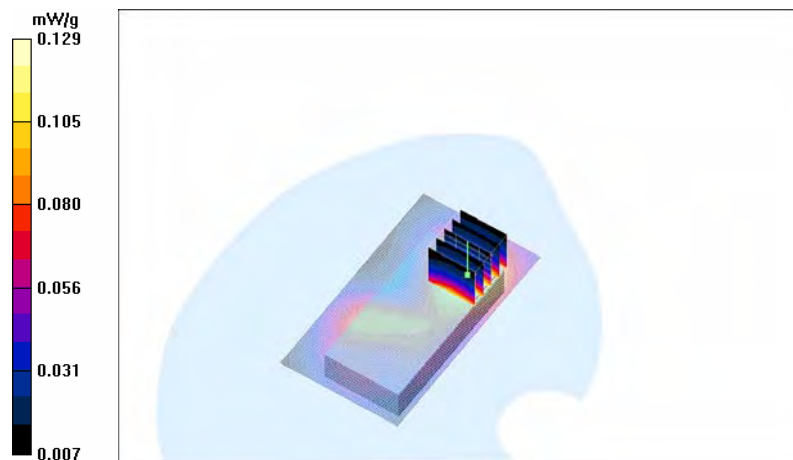

Date/Time: 2007-05-16 12:22:55

Test Laboratory: TCC Nokia
Type: RM-276; Serial: 004401/01/248531/0

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: $t=22.2\text{ C}$

Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.48\text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Middle - No Accessory - Flip closed - BT active/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.140 mW/g

Body - Middle - No Accessory - Flip closed - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.79 V/m


Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.130 mW/g

SAR(10 g) = 0.085 mW/g

Power Drift = 0.012 dB

Maximum value of SAR (measured) = 0.140 mW/g

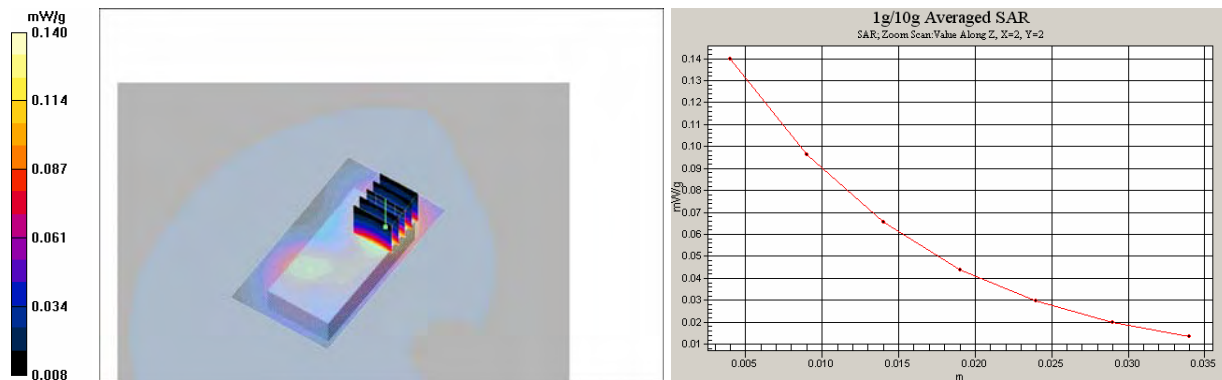

Date/Time: 2007-05-16 12:51:56

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: $t=22.2\text{ C}$

Medium parameters used (interpolated): $f = 1852.4\text{ MHz}$; $\sigma = 1.45\text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Low - No Accessory - Flip closed/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.278 mW/g

Body - Low - No Accessory - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.7 V/m


Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.256 mW/g

SAR(10 g) = 0.170 mW/g

Power Drift = -0.282 dB

Maximum value of SAR (measured) = 0.275 mW/g

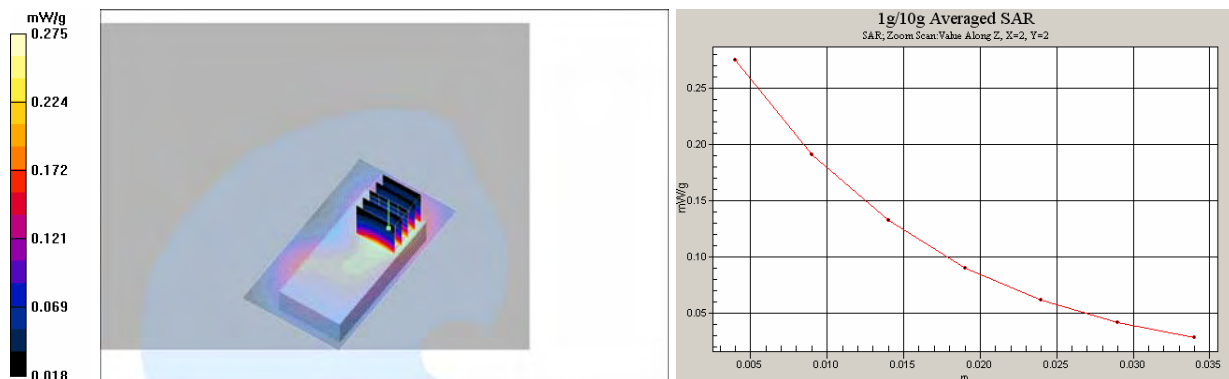

SAR Report

Cph_SAR_0721_07

Applicant: Nokia Corporation

Type: RM-276

Copyright © 2007 TCC Nokia

Date/Time: 2007-05-16 13:34:33

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: t=22.2 C

Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.45 mho/m; ϵ_r = 54; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Low - HS-40 - Flip closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.244 mW/g

Body - Low - HS-40 - Flip closed/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.7 V/m


Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.227 mW/g

SAR(10 g) = 0.151 mW/g

Power Drift = -0.111 dB

Maximum value of SAR (measured) = 0.245 mW/g

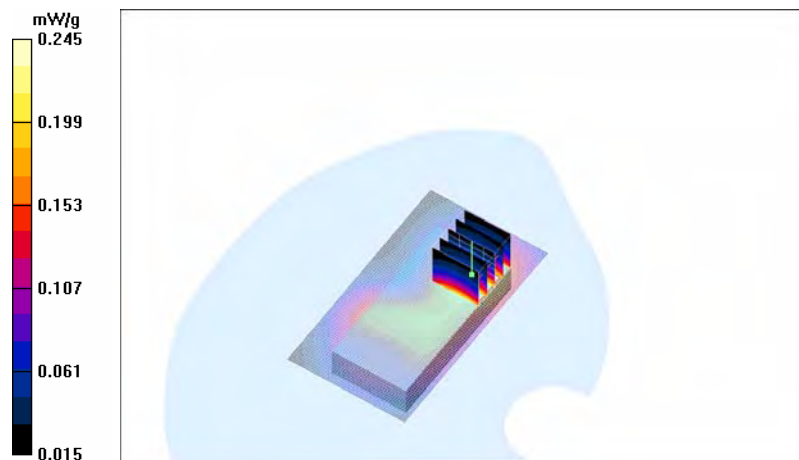

Date/Time: 2007-05-16 14:17:29

Test Laboratory: TCC Nokia

Type: RM-276; Serial: 004401/01/248531/0

Communication System: WCDMA1900

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: $t=22.2\text{ C}$

Medium parameters used (interpolated): $f = 1852.4\text{ MHz}$; $\sigma = 1.45\text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(4.62, 4.62, 4.62); Calibrated: 2006-08-31
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 2006-09-08
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body - Low - No Accessory - Flip closed - BT active/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.273 mW/g

Body - Low - No Accessory - Flip closed - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.0 V/m


Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.248 mW/g

SAR(10 g) = 0.164 mW/g

Power Drift = -0.195 dB

Maximum value of SAR (measured) = 0.268 mW/g

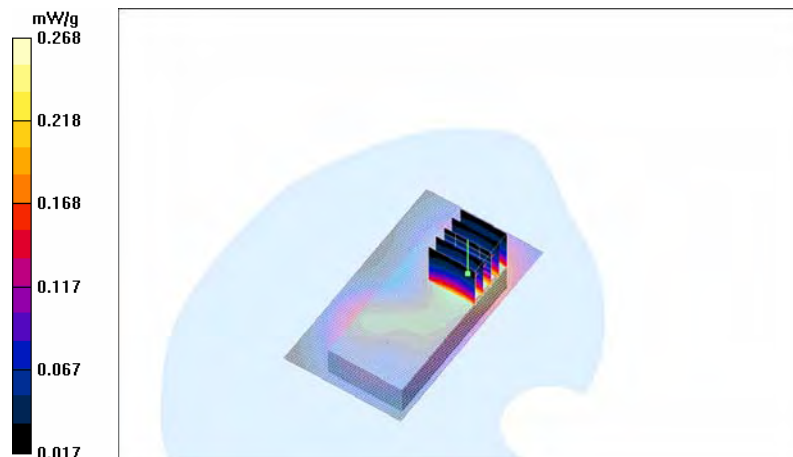

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

See the following pages



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK TCC**

Certificate No: **ES3-3116_Aug06**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3116**

Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 18, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)



Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: August 30, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Conversion Factor Assessment

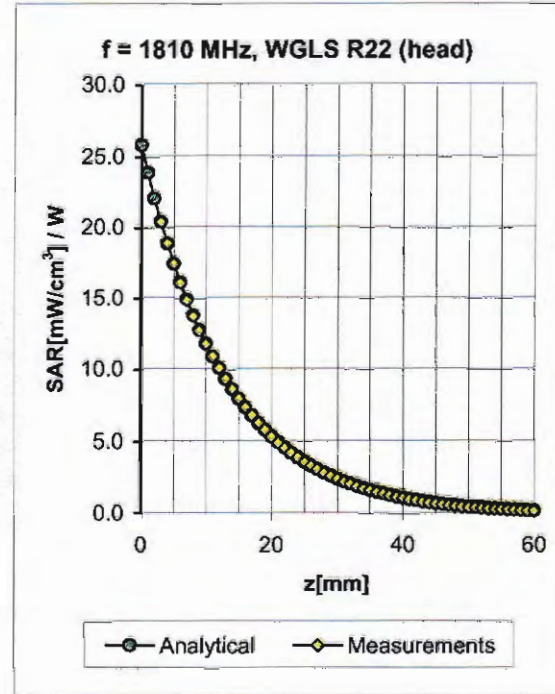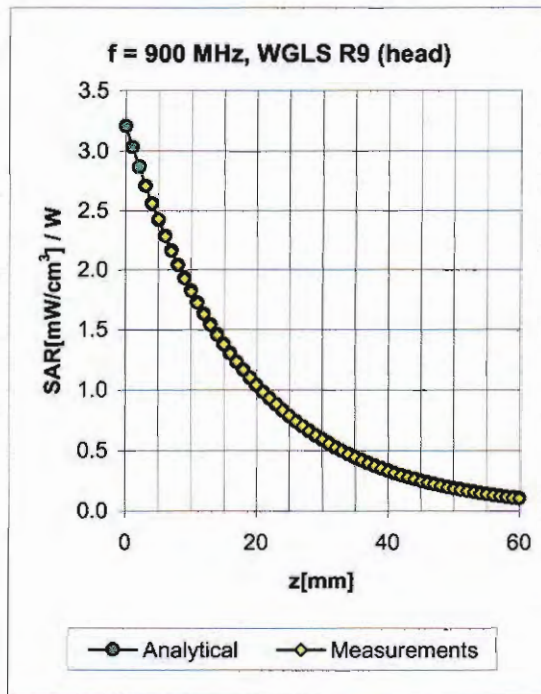

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.48	1.48	5.78 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.99	1.10	5.09 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.60	1.35	4.78 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.95	1.15	4.43 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.80	1.32	5.70 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.50	1.53	4.66 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.93	1.21	4.51 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.89	1.13	4.20 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK TCC**

Certificate No: **ES3-3117_Aug06**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3117**

Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 29, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)



Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: August 30, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Conversion Factor Assessment

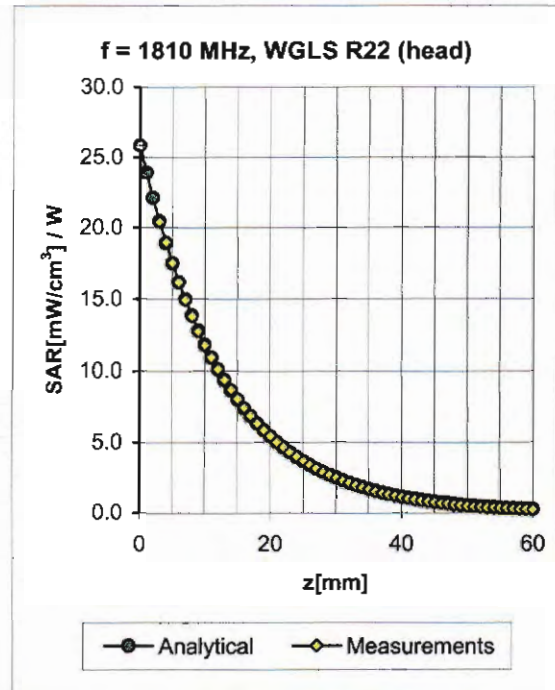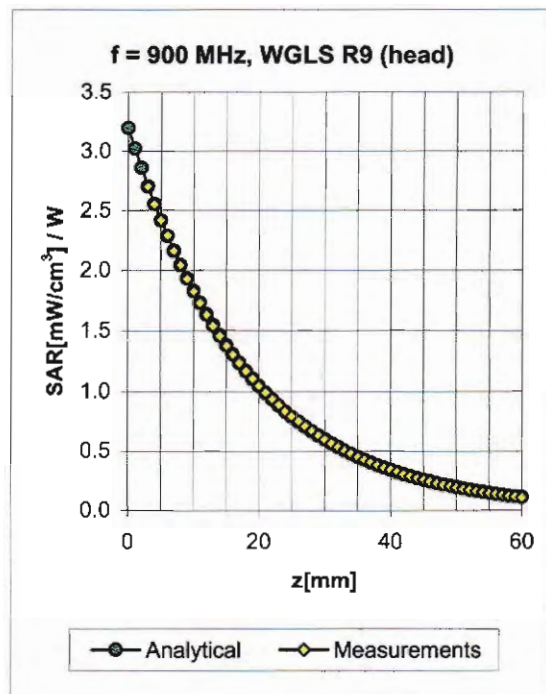

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.47	1.42	5.95 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.46	1.71	5.02 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.30	1.97	4.76 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.48	1.48	4.37 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.64	1.24	5.71 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.35	2.14	4.67 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.82	1.32	4.44 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.99	1.00	4.16 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK R&D**

Certificate No: **ES3-3118_Aug06**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3118**

Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 31, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)



Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: September 8, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Conversion Factor Assessment

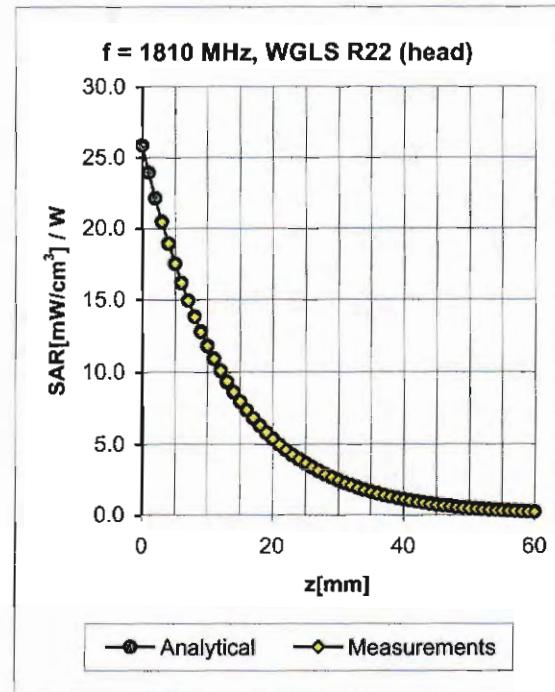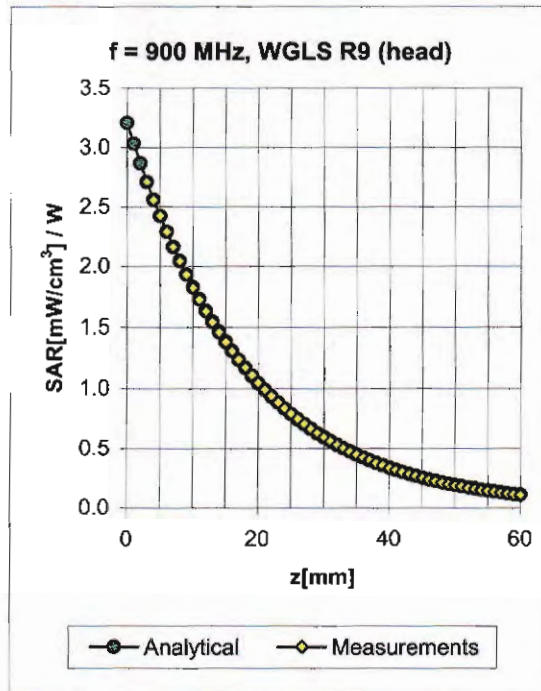

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.64	1.26	5.77 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.99	1.15	4.92 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.97	1.14	4.68 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.82	1.25	4.31 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.54	1.34	5.65 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.72	1.56	4.62 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.73	1.51	4.40 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.99	1.00	4.15 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK R&D**

Certificate No: **ES3-3119_Aug06**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3119**

Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 31, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07



Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: September 8, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Conversion Factor Assessment

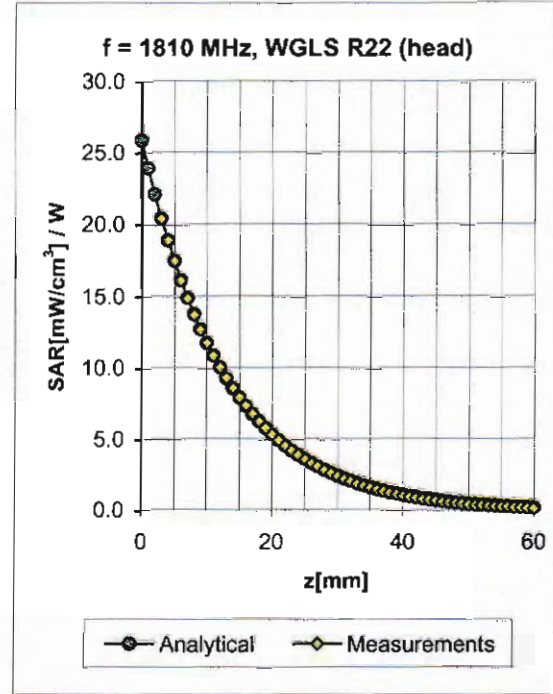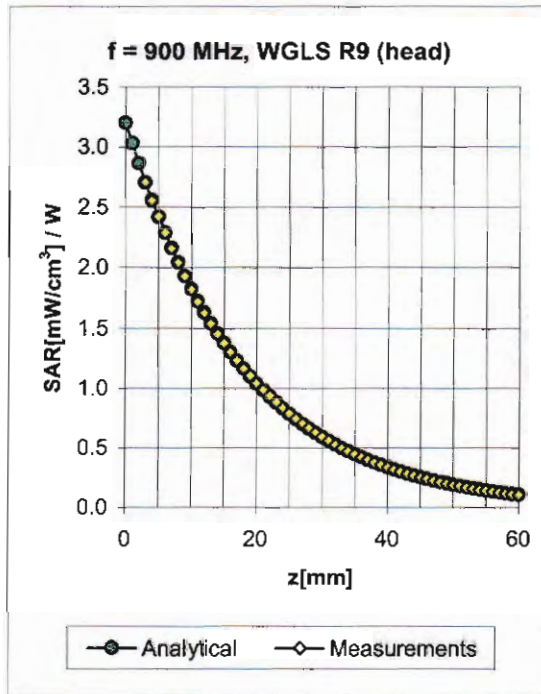

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.45	1.44	5.83 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.99	1.16	5.03 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.86	1.26	4.76 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.97	1.14	4.37 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.53	1.39	5.70 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.60	1.50	4.68 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.92	1.25	4.48 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.65	1.09	4.23 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

See the following pages



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK R&D**

Certificate No: **D835V2-4d042_Sep06**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d042**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **September 19, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6	SN 1507	28-Oct-05 (SPEAG, No. ET3-1507_Oct05)	Oct-06
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

	Name	Function	Signature
Calibrated by:	Mike Meili	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 19, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY4 Validation Report for Head TSL

Date/Time: 14.08.2006 14:29:57

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d042

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.09, 6.09, 6.09); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.3 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 3.46 W/kg

SAR(1 g) = 2.33 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.52 mW/g

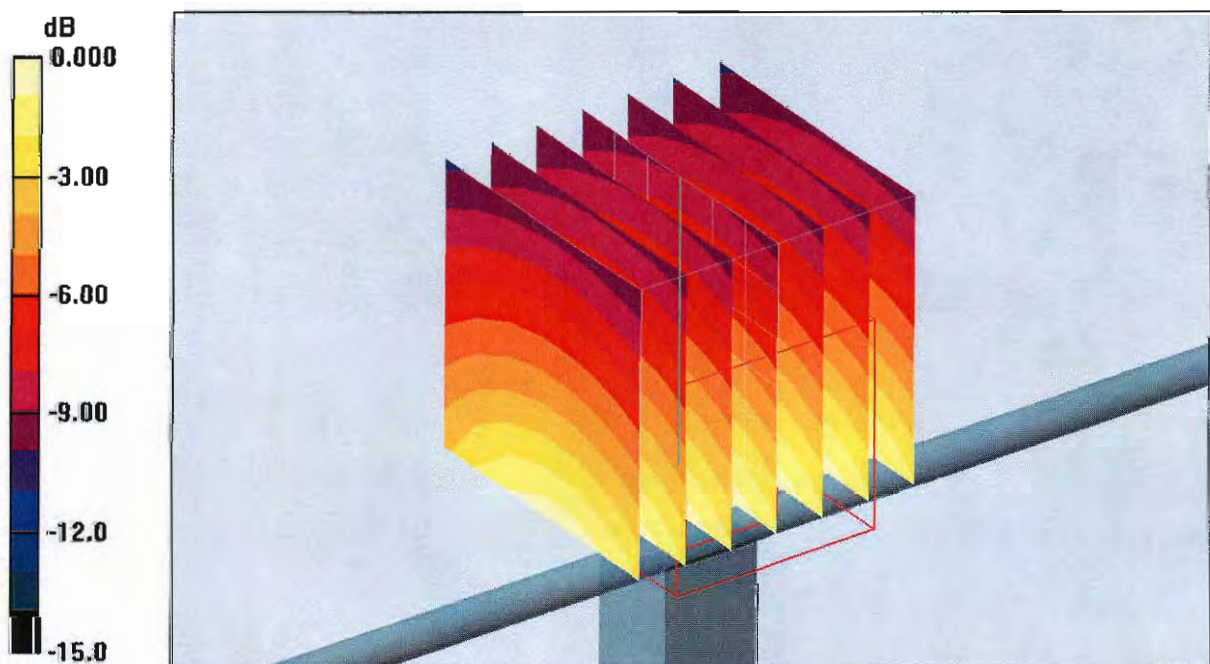

0 dB = 2.52mW/g

DASY4 Validation Report for Body TSL

Date/Time: 19.09.2006 15:10:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d042

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL 900;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.84, 5.84, 5.84); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.8 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.62 mW/g

Maximum value of SAR (measured) = 2.61 mW/g

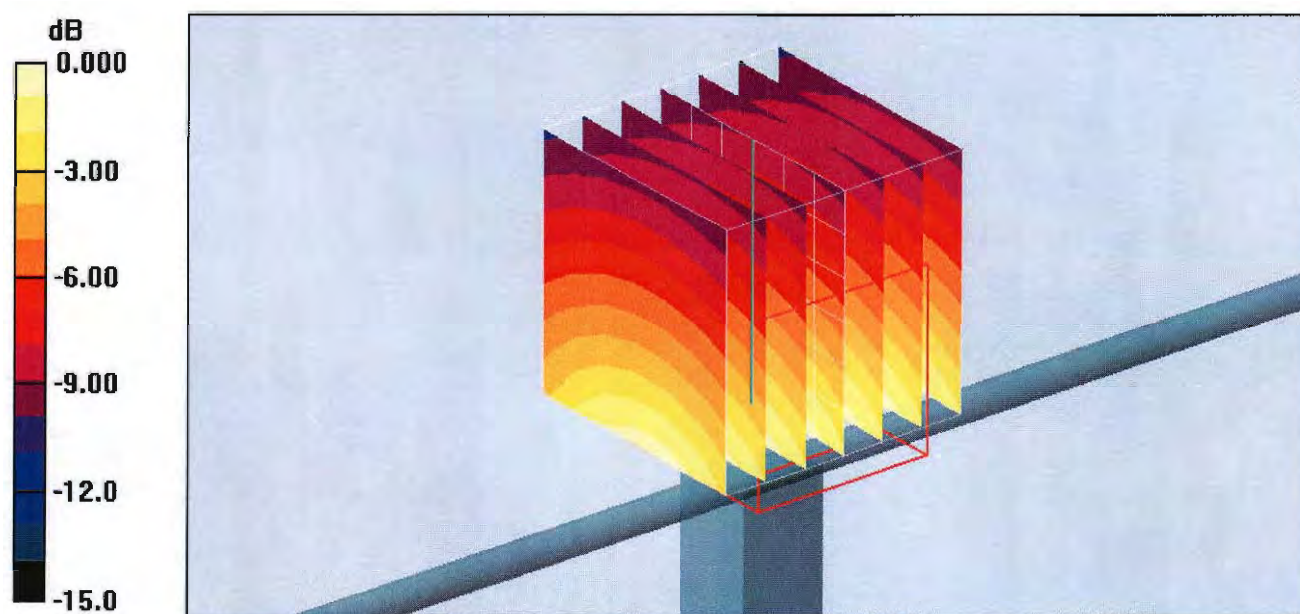

0 dB = 2.61mW/g



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Denmark A/S**

Certificate No: **D1900V2-5d026_Feb06/2**

CALIBRATION CERTIFICATE (Replacement of No: D1900V2-5d026_Feb06)

Object **D1900V2 - SN: 5d026**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **February 21, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference 10 dB Attenuator	SN: 5047.2 (10r)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference Probe ET3DV6	SN 1507	28-Oct-05 (SPEAG, No. ET3-1507_Oct05)	Oct-06
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

	Name	Function	Signature
Calibrated by:	Mike Meili	Laboratory Technician	<i>M. Meili</i>

Approved by:	Katja Pokovic	Technical Manager
--------------	---------------	-------------------

Issued: March 9, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY4 Validation Report for Head TSL

Date/Time: 21.02.2006 13:52:34

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.74, 4.74, 4.74); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.6 Build 57; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin = 250 mW; d = 10 mm/Area Scan (71x71x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.1 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.2 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.83 mW/g; SAR(10 g) = 5.2 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

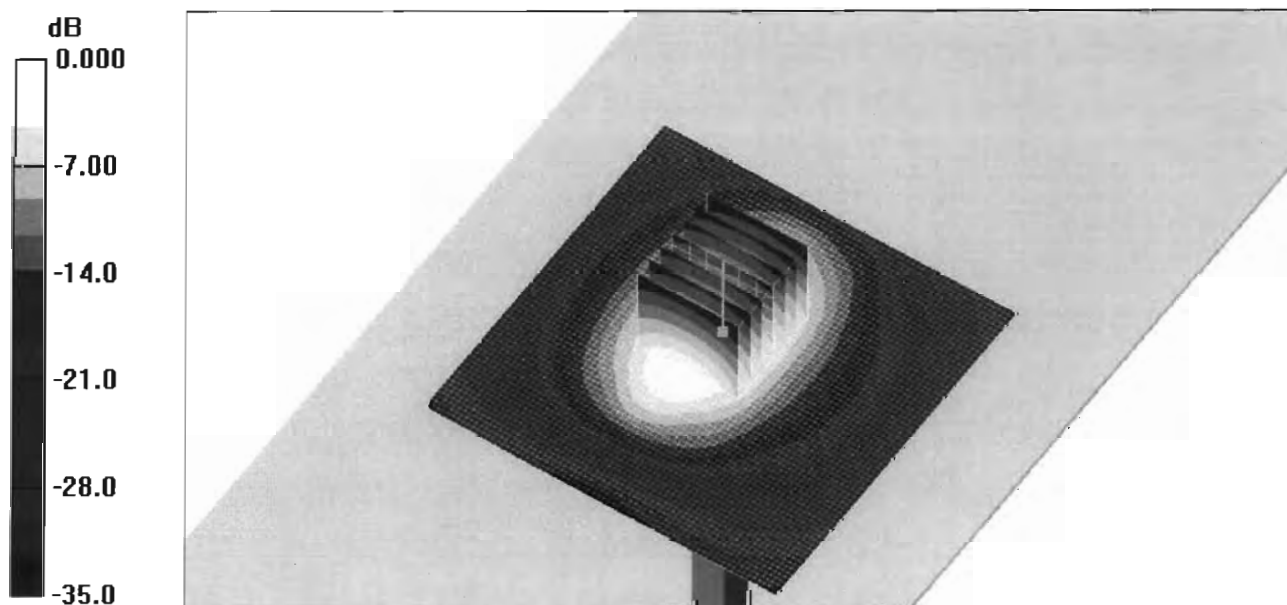

0 dB = 11.0mW/g

DASY4 Validation Report for Body TSL

Date/Time: 21.02.2006 15:46:28

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.3, 4.3, 4.3); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA
- Measurement SW: DASY4, V4.6 Build 57; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin = 250 mW; d = 10 mm/Area Scan (71x71x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.1 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan 2 (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.1 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.38 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

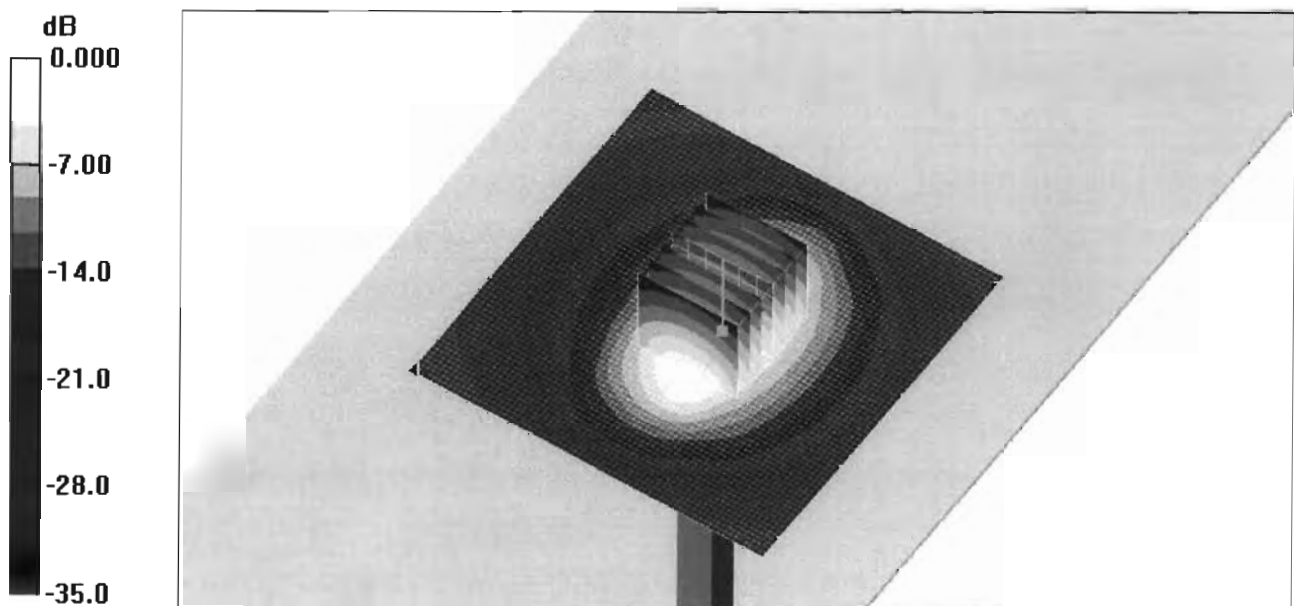

0 dB = 11.5mW/g