

FCC Part 15B Compliance Test Report

Test Report no.:	Cph_FCC_0711_12.doc	Date of Report:	21-03-2007
Number of pages:	15	Customer's Contact person:	Bill Griffin
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-277 (HW: 3150), Battery; BL-5C, AC-Charger; AC-3U, Data Cable; CA-101		
FCC ID:	QMNRM-277	IC:	661X-RM277
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	15-03-2007
Testing completed	20-03-2007
The customer's contact person	Bill Griffin
Test Plan referred to	T:\Projects\RM-277\TestPlan_RS\RS_Testplan_RM-277.xls
Notes	None
Document name	T:\Projects\RM-277\EMC\Results\FCC\Cph_FCC_0711_12.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II(1900)/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. GSM and WCDMA bands are tested in idle mode. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-277	004400/01/256223/3	3150	.	Vp bt06w47_07w06	27493
Battery	BL-5C	0670398380257N09632L168354	-	-	-	27494
AC-Charger	AC-3U	4090495305981007156;0675372	-	-	-	27495
Data Cable	CA-101	-	1.2	1.1	-	27491
Phone	RM-277	004400/01/256208/4	3150	-	Vp bt06w47_07w06	29160
Battery	BL-5C	0670398380257 N09632LI68348	-	-	-	29161
AC-Charger	AC-3U	4090495305981007149;0675372	-	-	-	29162

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	Passed
15.109, a	5.5 (6.6)	Radiated emissions	Passed

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	Passed
15.109, a	5.5 (9)	Radiated emissions	Passed

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	Passed
15.109, a	5.5	Radiated emissions	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	4
2.1. Test setup	4
2.2. Test method and limit.....	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	6
2.5. Bluetooth Test results	7
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9) 8	
3.1. Test setup	8
3.2. Test method and limit.....	8
3.3. GSM 850 Test results	9
3.4. GSM 1900 Test results	10
3.5. Bluetooth Test results	12
4. Test Equipment.....	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-277 Dut # 27493
Accessories with DUT numbers	BL-5C Dut # 27494 + AC-3U Dut # 27495 + CA-101 Dut # 27491
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.1 / 33.5 1023.0
Date of measurements	16-03-2007
Measured by	Allan F. Henriksen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

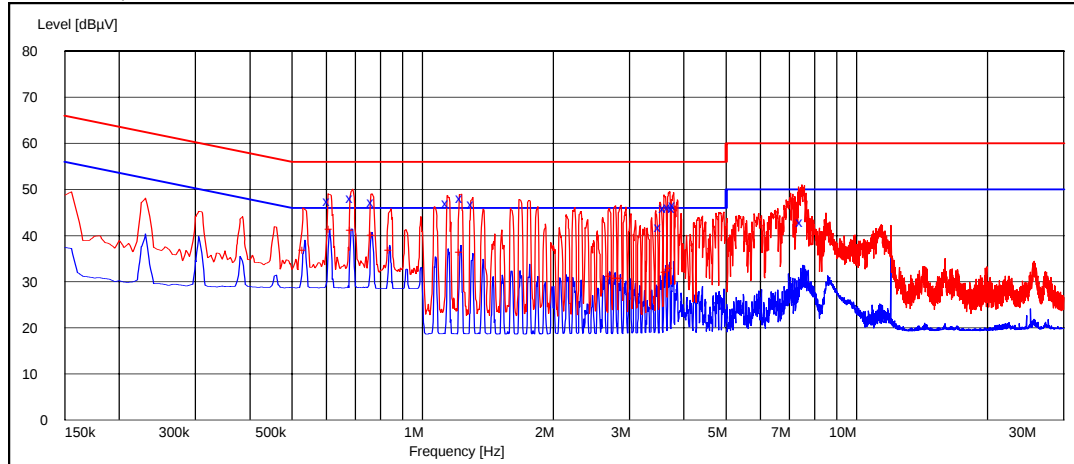

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.610000	47.50	N	Passed
0.690000	48.10	N	Passed
0.770000	47.30	N	Passed
1.145000	47.10	N	Passed
1.235000	48.10	N	Passed
1.310000	46.90	N	Passed
3.540000	41.90	N	Passed
3.625000	46.00	N	Passed
3.725000	46.10	N	Passed
3.810000	46.00	N	Passed
3.815000	46.60	N	Passed
7.500000	43.00	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.535000	36.80	N	Passed
0.615000	41.40	N	Passed
0.690000	41.30	N	Passed
0.770000	40.20	N	Passed
0.845000	36.90	N	Passed
1.230000	36.40	N	Passed
2.725000	31.30	N	Passed
2.800000	30.70	N	Passed
2.880000	30.80	N	Passed
3.660000	32.00	N	Passed
3.740000	32.90	N	Passed

2.4. GSM 1900 Test results

RX mode, channel 661 / 1960.0 MHz

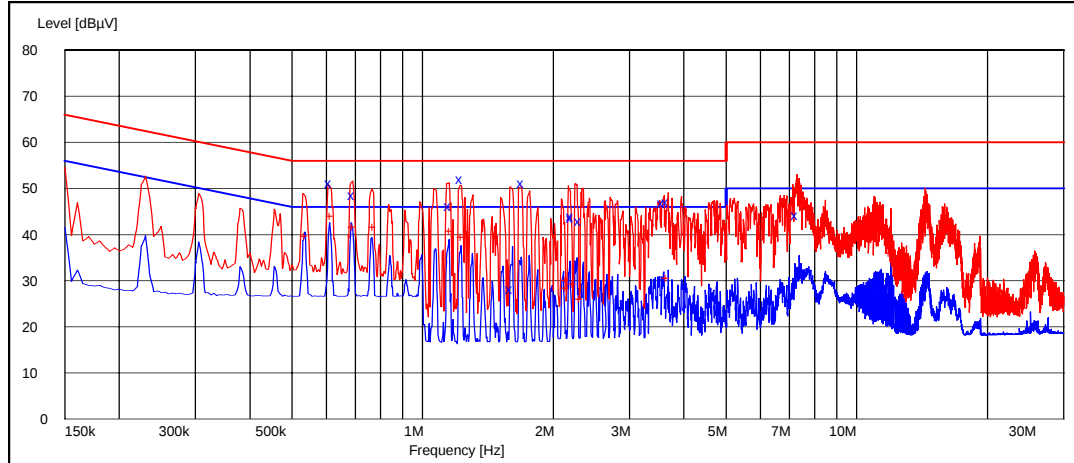

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.615000	51.10	N	Passed
0.695000	48.60	L1	Passed
1.160000	46.10	L1	Passed
1.235000	52.00	N	Passed
1.605000	28.10	N	Passed
1.705000	51.20	N	Passed
2.215000	44.00	N	Passed
2.220000	43.50	N	Passed
2.315000	43.00	N	Passed
3.595000	46.80	N	Passed
3.680000	47.00	N	Passed
7.310000	44.10	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.540000	39.60	N	Passed
0.620000	43.90	N	Passed
0.695000	41.60	N	Passed
0.775000	41.60	N	Passed
1.165000	40.80	N	Passed
1.240000	39.40	N	Passed
2.155000	28.40	N	Passed
2.160000	30.10	N	Passed
2.240000	29.20	N	Passed
2.320000	26.00	N	Passed
3.680000	30.50	N	Passed
12.000000	36.10	N	Passed

2.5. Bluetooth Test results

TX mode, channel 40 / 2442 MHz

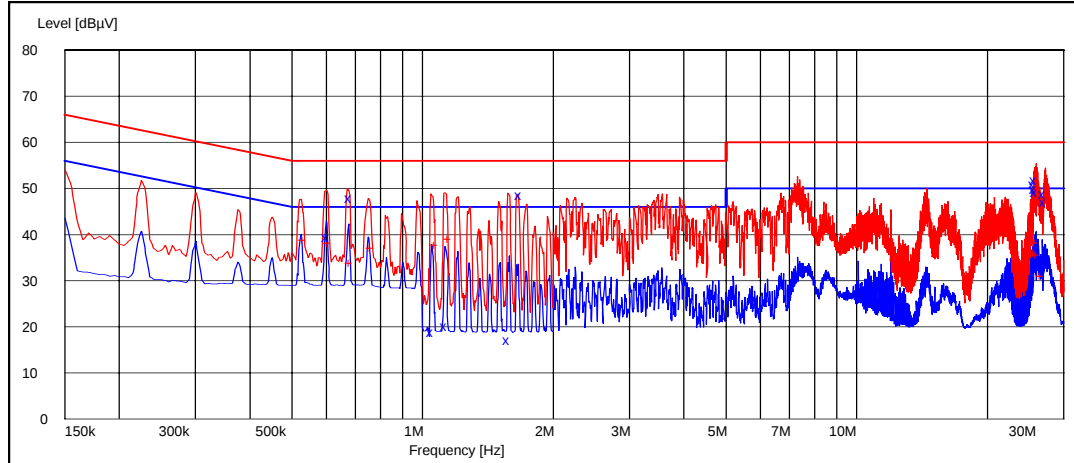

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.605000	39.50	N	Passed
0.685000	47.80	N	Passed
1.055000	18.90	L1	Passed
1.135000	20.10	N	Passed
1.585000	17.20	L1	Passed
1.685000	48.60	N	Passed
25.750000	50.90	N	Passed
25.840000	49.80	N	Passed
25.925000	51.90	N	Passed
26.015000	49.20	N	Passed
27.150000	48.80	N	Passed
27.240000	47.10	N	Passed

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.535000	38.80	N	Passed
0.610000	38.10	N	Passed
0.685000	33.80	N	Passed
0.765000	37.00	N	Passed
1.075000	37.60	N	Passed
1.155000	39.00	N	Passed
25.720000	38.90	N	Passed
25.805000	36.10	N	Passed
25.895000	38.40	N	Passed
25.975000	38.10	N	Passed
26.145000	35.50	N	Passed
26.800000	31.00	N	Passed

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RM-277 Dut#29160
Accessories with DUT numbers	BL-5C Dut#29161, AC-3U Dut#29162, CA-101 Dut#27491
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 1012
Date of measurements	20-03-2007
Measured by	Christian Andersen

3.1. Test setup

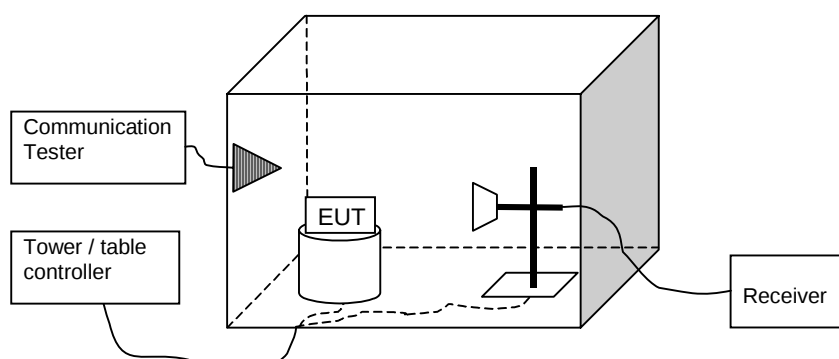

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	37.20	72.44	41.60	-4.40	VERTICAL	Passed
6953.600000	42.10	127.35	39.30	2.80	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	24.10	16.03	28.50	-4.40	VERTICAL	Passed
6953.600000	29.40	29.51	26.60	2.80	VERTICAL	Passed

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
35.890581	32.20	40.74	48.80	-16.60	VERTICAL	Passed
62.124449	16.70	6.84	47.30	-30.60	VERTICAL	Passed
796.995190	24.60	16.98	37.80	-13.20	HORIZONTAL	Passed
810.421242	15.30	5.82	28.10	-12.80	HORIZONTAL	Passed
864.729459	17.90	7.85	30.30	-12.40	VERTICAL	Passed
881.663527	62.20	1288.25	74.30	-12.10	VERTICAL	Passed

*881.6 MHz frequency is coming from communication tester and thus ignored.

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7840.681363	41.70	121.62	35.70	6.00	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
1617.232465	26.80	21.88	31.20	-4.40	VERTICAL	Passed
2294.589178	36.40	66.07	37.30	-0.90	VERTICAL	Passed
2900.809619	33.80	48.98	30.30	3.50	VERTICAL	Passed
7844.181363	29.00	28.18	22.80	6.20	VERTICAL	Passed

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3575.200000	36.90	69.98	40.80	-3.90	HORIZONTAL	Passed
7150.400000	40.00	100.00	36.00	4.00	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3575.200000	24.20	16.22	28.10	-3.90	VERTICAL	Passed
7150.400000	27.20	22.91	23.20	4.00	VERTICAL	Passed

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3860.000000	38.00	79.43	40.70	-2.70	VERTICAL	Passed
7720.000000	40.70	108.39	35.50	5.20	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3860.000000	25.50	18.84	28.20	-2.70	VERTICAL	Passed
7720.000000	27.90	24.83	22.70	5.20	VERTICAL	Passed

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
39.019238	30.60	33.88	49.30	-18.70	VERTICAL	Passed
61.964930	18.50	8.41	49.10	-30.60	VERTICAL	Passed
800.199198	20.70	10.84	33.80	-13.10	HORIZONTAL	Passed
872.043487	16.60	6.76	28.90	-12.30	VERTICAL	Passed
898.697595	18.20	8.13	30.10	-11.90	VERTICAL	Passed
924.849699	17.90	7.85	29.40	-11.50	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.919840	61.60	1202.26	64.70	-3.10	VERTICAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1592.178357	28.80	27.54	33.50	-4.70	VERTICAL	Passed
1606.214429	27.00	22.39	31.60	-4.60	VERTICAL	Passed
1959.919840	60.60	1071.52	63.70	-3.10	VERTICAL	Passed
2295.089178	38.30	82.22	39.20	-0.90	VERTICAL	Passed
2600.200401	32.30	41.21	31.00	1.30	VERTICAL	Passed
2909.313627	34.00	50.12	30.40	3.60	VERTICAL	Passed
7841.681363	29.20	28.84	23.10	6.10	VERTICAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	38.00	79.43	40.80	-2.80	VERTICAL	Passed
7960.000000	40.70	108.39	35.40	5.30	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	25.10	17.99	27.90	-2.80	VERTICAL	Passed
7960.000000	28.10	25.41	22.80	5.30	VERTICAL	Passed

3.5. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4804.000000	36.40	66.07	38.40	-2.00	VERTICAL	Passed
7206.000000	39.30	92.26	35.10	4.20	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4804.000000	23.50	14.96	25.50	-2.00	VERTICAL	Passed
7206.000000	26.60	21.38	22.40	4.20	VERTICAL	Passed

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
38.076353	27.30	23.17	45.30	-18.00	VERTICAL	Passed
265.332064	18.50	8.41	42.40	-23.90	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4917.833667	37.00	70.79	38.60	-1.60	HORIZONTAL	Passed
7313.125251	40.20	102.33	35.90	4.30	VERTICAL	Passed
7418.831663	41.70	121.62	36.70	5.00	VERTICAL	Passed
17873.745491	58.20	812.83	32.80	25.40	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4918.833667	24.00	15.85	25.50	-1.50	HORIZONTAL	Passed
7310.625251	27.60	23.99	23.20	4.40	VERTICAL	Passed
7416.831663	28.80	27.54	23.80	5.00	VERTICAL	Passed
17872.745491	44.90	175.79	19.50	25.40	HORIZONTAL	Passed

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	37.40	74.13	39.00	-1.60	VERTICAL	Passed
7440.000000	40.50	105.93	35.60	4.90	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	25.10	17.99	26.70	-1.60	VERTICAL	Passed
7440.000000	28.00	25.12	23.10	4.90	VERTICAL	Passed

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24, 15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24, 15C, 15B
14963	RF Preampifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
19830	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	22/24, 15C, 15B
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	22/24, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483- 2390/2493-35/10SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 4 filter	WRCG1737/1743- 1733/1747-40/6SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 5&6 filter	WRCG832/83/-825/845- 40/5SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 8 filter	WRCG894.6/900.6- 890.6/904.6-40/80SS	Wainwright	22/24, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	22/24, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24, 15C, 15B
15190	Infra Red Remote Control Unit	4630	Emco	22/24, 15C, 15B
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22/24, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24, 15C, 15B
15105	Attenuator 30dB DC-1000MHz 50 Ohm Nf - Nm	NAT-30	Mini-Circuits	22/24, 15C, 15B
13302	Spectrum Analyzer 9KHz- 12.8GHz	HP8596E	Hewlett Packard	22/24, 15C, 15B
11584	Spectrum analyzer 50Hz- 6,5GHz	HP8561B	Hewlett Packard	22/24, 15C, 15B
13134	Tracking generator	HP85645A	Hewlett Packard	22/24, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
11487	Network analyzer 300KHz- 3,0GHz	HP8753A	Hewlett Packard	22/24, 15C, 15B
14807	S - Parameter Test Set 300KHz- 6GHz	HP85047A	Hewlett Packard	22/24, 15C, 15B
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22/24, 15C, 15B