

FCC Part 15B Compliance Test Report

Test Report no.:	Tre_FCC_0707_03.doc	Date of Report:	27.2.2007
Number of pages:	14	Customer's Contact person:	Bill Griffin
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-289 / Battery BL-5C, AC charger AC-3, Headset HS-9, Data cable DKE-2, Laptop IBM Thinkpad T22, AC adapter 02K6543, Printer HP deskjet 1600CC3540A, Digital camera FUJI DS-7, Serial cable for camera, Parallel cable for printer		
FCC ID:	QMNRM-289	IC:	661X-RM289
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	14.2.2007
Testing completed	20.2.2007
The customer's contact person	Bill Griffin
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	-
Document name	T:\\Projects\\RM-289\\EMC\\Results\\FCC\\Tre_FCC_0707_03.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II(1900)/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. GSM and WCDMA bands are tested in idle mode. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-289	004400991750504	3130	-	Vp gr06w47_07w04	40962
Headset	HS-9	-	-	-	-	40961
Battery	BL-5C	-	-	-	-	40957
AC Charger	AC-3	-	-	-	-	40952
Data cable	DKE-2	-	-	-	-	40973
Laptop	IBM Thinkpad T22	555V2PT	-	-	-	40201
AC Adapter	02K6543	-	-	-	-	40202
Printer	HP deskjet 1600CC3540A	USB8302546	-	-	-	40077
Digital camera	FUJI DS-7	7102516	-	-	-	40076
Serial cable for camera	-	-	-	-	-	40088
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (9)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5	Radiated emissions	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	3
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	5
2.1. Test setup	5
2.2. Test method and limit.....	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
2.5. Bluetooth Test results	8
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9) 9	
3.1. Test setup	9
3.2. Test method and limit.....	9
3.3. GSM 850 Test results	10
3.4. GSM 1900 Test results	11
3.5. Bluetooth Test results	12
4. Test Equipment.....	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-289 DUT 40962
Accessories with DUT numbers	BL-5C DUT 40958, AC-3 DUT 40952, HS-9 DUT 40961, DKE-2 DUT 40973, IBM Thinkpad T22 DUT 40201, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, FUJI DS-7 DUT 40076, Serial cable for camera DUT 40088, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 51 / 103.2
Date of measurements	16.2.2007
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

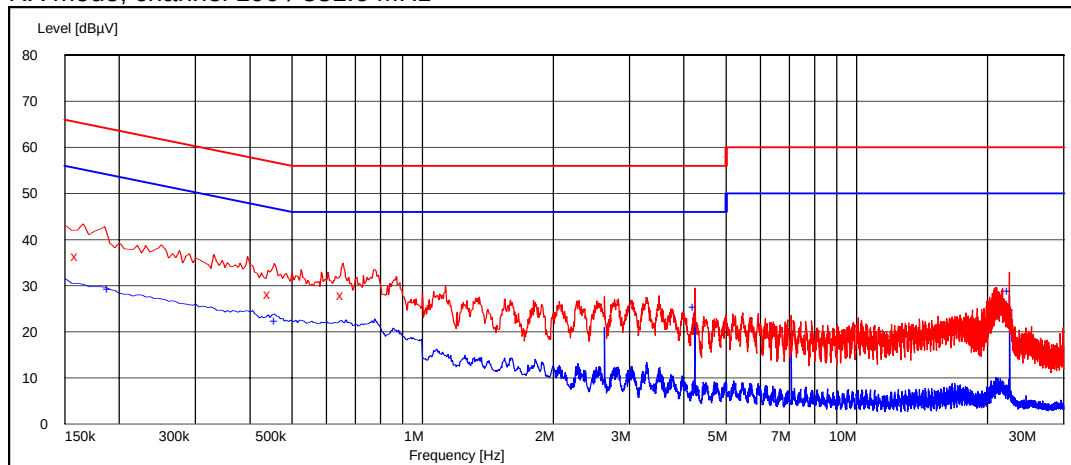

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.160000	36.40	N	PASSED
0.445000	28.10	L1	PASSED
0.655000	28.00	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.190000	29.40	L1	PASSED
0.460000	22.30	L1	PASSED
4.240000	25.40	L1	PASSED
22.500000	28.80	L1	PASSED

2.4. GSM 1900 Test results

RX mode, channel 661 / 1960.0 MHz

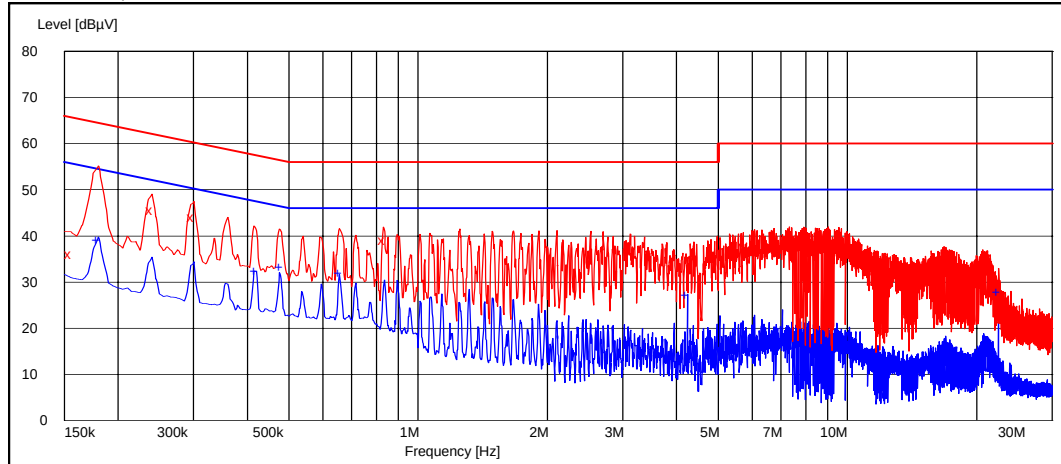

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.155000	36.10	N	PASSED
0.240000	45.50	L1	PASSED
0.300000	44.00	L1	PASSED
0.835000	39.10	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.180000	39.10	N	PASSED
0.420000	32.30	L1	PASSED
0.480000	33.20	L1	PASSED
0.660000	31.90	L1	PASSED
4.240000	27.20	N	PASSED
22.500000	27.90	L1	PASSED

2.5. Bluetooth Test results

TX mode, channel 40 / 2442 MHz

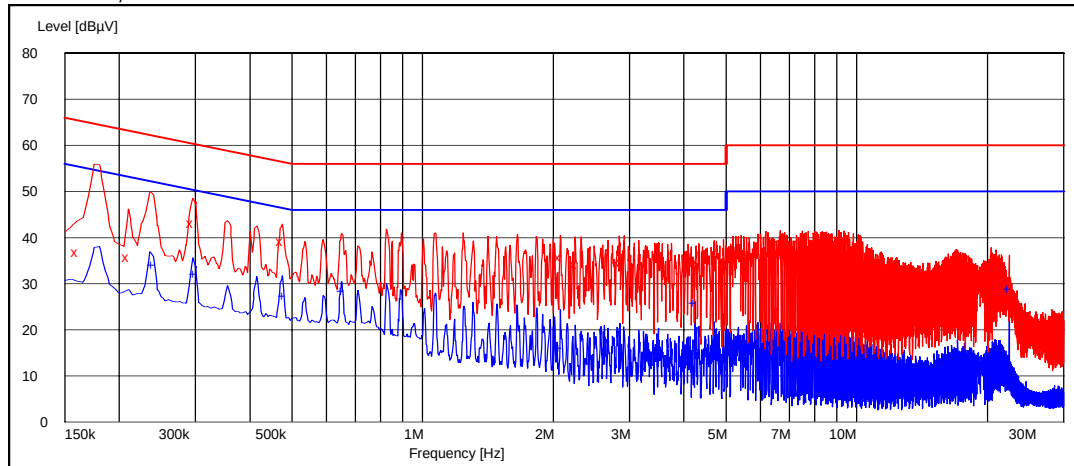

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.160000	36.80	N	PASSED
0.210000	35.80	L1	PASSED
0.295000	43.20	L1	PASSED
0.475000	39.20	L1	PASSED
2.080000	35.70	L1	PASSED
2.260000	34.20	L1	PASSED
2.840000	34.70	L1	PASSED
2.910000	35.00	L1	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.240000	33.90	L1	PASSED
0.300000	32.00	L1	PASSED
0.480000	27.30	N	PASSED
0.655000	28.40	L1	PASSED
2.085000	16.10	N	PASSED
4.240000	25.90	N	PASSED
22.500000	28.80	L1	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RM-289 DUT 40962
Accessories with DUT numbers	BL-5C DUT 40958, AC-3 DUT 40952, HS-9 DUT 40961, DKE-2 DUT 40973, IBM Thinkpad T22 DUT 40201, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, FUJI DS-7 DUT 40076, Serial cable for camera DUT 40088, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25-26 / 41-42 / 101.2-101.7
Date of measurements	19-20.2.2007
Measured by	Jari Jantunen

3.1. Test setup

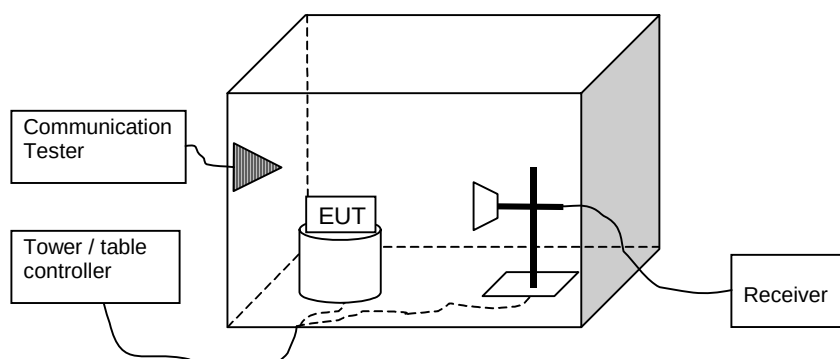

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	40.20	102.33	45.30	-5.1	HORIZONTAL	PASSED
6953.600000	43.30	146.22	42.40	0.9	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	26.30	20.65	31.40	-5.1	HORIZONTAL	PASSED
6953.600000	30.30	32.73	29.40	0.9	VERTICAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
448.397395	31.90	39.36	60.90	-29.0	HORIZONTAL	PASSED
548.096192	29.50	29.85	56.40	-26.9	VERTICAL	PASSED
645.490581	31.30	36.73	56.30	-25.0	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1295.089178	52.90	441.57	70.90	-18.0	VERTICAL	PASSED
1313.627255	53.50	473.15	71.50	-18.0	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1096.690381	29.80	30.90	49.70	-19.9	VERTICAL	PASSED
1166.332665	33.00	44.67	52.30	-19.3	VERTICAL	PASSED
1256.019038	23.90	15.67	42.60	-18.7	VERTICAL	PASSED
1270.533066	25.40	18.62	43.90	-18.5	VERTICAL	PASSED
1294.589178	32.20	40.74	50.20	-18.0	VERTICAL	PASSED
1296.599198	28.30	26.00	46.30	-18.0	VERTICAL	PASSED
1314.127255	27.20	22.91	45.20	-18.0	VERTICAL	PASSED
1991.983968	33.40	46.77	45.40	-12.0	VERTICAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	39.30	92.26	43.90	-4.6	HORIZONTAL	PASSED
7150.400000	41.50	118.85	40.00	1.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	26.40	20.89	31.00	-4.6	VERTICAL	PASSED
7150.400000	28.30	26.00	26.80	1.5	HORIZONTAL	PASSED

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	41.40	117.49	43.80	-2.4	HORIZONTAL	PASSED
7720.000000	42.50	133.35	39.80	2.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	27.80	24.55	30.20	-2.4	HORIZONTAL	PASSED
7720.000000	29.60	30.20	26.90	2.7	HORIZONTAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
35.231062	25.50	18.84	53.50	-28.0	VERTICAL	PASSED
249.298397	21.00	11.22	55.40	-34.4	HORIZONTAL	PASSED
347.795391	24.90	17.58	56.00	-31.1	VERTICAL	PASSED
398.497194	29.10	28.51	59.00	-29.9	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3920.000000	41.70	121.62	44.10	-2.40	HORIZONTAL	PASSED
7840.000000	43.40	147.91	40.60	2.80	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1166.832665	27.60	23.99	46.90	-19.3	HORIZONTAL	PASSED
1258.019038	26.60	21.38	45.30	-18.7	VERTICAL	PASSED
1266.033066	28.00	25.12	46.60	-18.6	VERTICAL	PASSED
1293.091182	29.60	30.20	47.60	-18.0	VERTICAL	PASSED
1314.129259	26.70	21.63	44.70	-18.0	VERTICAL	PASSED
1670.332665	25.10	17.99	40.30	-15.2	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	43.00	141.25	45.70	-2.7	VERTICAL	PASSED
7960.000000	43.70	153.11	40.60	3.1	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	29.10	28.51	31.80	-2.7	HORIZONTAL	PASSED
7960.000000	29.90	31.26	26.80	3.1	HORIZONTAL	PASSED

3.5. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.40	93.33	41.10	-1.7	HORIZONTAL	PASSED
7206.000000	42.50	133.35	40.80	1.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	26.60	21.38	28.30	-1.7	HORIZONTAL	PASSED
7206.000000	28.70	27.23	27.00	1.7	HORIZONTAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.935872	7.20	2.29	18.40	-11.20	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3984.461924	46.40	208.93	49.10	-2.70	HORIZONTAL	PASSED
4891.289579	40.90	110.92	42.40	-1.50	HORIZONTAL	PASSED
4952.903808	41.10	113.50	42.30	-1.20	HORIZONTAL	PASSED
7265.025050	42.80	138.04	40.50	2.30	HORIZONTAL	PASSED
7277.563126	42.80	138.04	40.40	2.40	VERTICAL	PASSED
7418.835671	43.50	149.62	40.70	2.80	HORIZONTAL	PASSED
17496.989980	51.90	393.55	33.80	18.10	HORIZONTAL	PASSED
17870.733467	54.70	543.25	33.80	20.90	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3984.461924	29.80	30.90	32.50	-2.70	HORIZONTAL	PASSED
4890.789579	27.50	23.71	29.00	-1.50	HORIZONTAL	PASSED
4951.903808	27.80	24.55	29.00	-1.20	HORIZONTAL	PASSED
7265.525050	29.70	30.55	27.40	2.30	HORIZONTAL	PASSED
7285.563126	29.90	31.26	27.50	2.40	VERTICAL	PASSED
7417.335671	30.10	31.99	27.30	2.80	HORIZONTAL	PASSED
17497.489980	38.80	87.10	20.70	18.10	HORIZONTAL	PASSED
17868.233467	41.80	123.03	20.90	20.90	HORIZONTAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.80	109.65	42.00	-1.2	HORIZONTAL	PASSED
7440.000000	43.30	146.22	40.60	2.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	28.40	26.30	29.60	-1.2	VERTICAL	PASSED
7440.000000	29.80	30.90	27.10	2.7	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B