

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-659_04.doc	Date of Report:	04-Jun-2010
Number of pages:	16	Customer's Contact person:	Sonja Länkinen
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-659 / Phone RM-659 / Charger AC-10UC / Data Cable CA-101 / Headset WH-702 / Laptop IBM Thinkpad T40, AC adapter 02K6543, Printer HP deskjet 1600CC3540A, Parallel cable for printer		
FCC ID:	QMNRM-659	IC:	661X-RM659
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Hannu Söderholm, Senior Engineer, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	07-Jun-2010
Testing completed	09-Jun-2010
The customer's contact person	Sonja Länkinen
Test Plan referred to	\\Satcc01nmp\tcc_salo\Projects\RM-659\TestPlan\RS_testplan_RM-659.xls
Notes	-
Document name	FCC15B_RM-659_04.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V(850)) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. GSM and WCDMA bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-659	004401019859244	0203	-	010.016	42231
Phone	RM-659	004402131034377	0203	-	010.016	42280
Charger	AC-10UC	3997910023090100916;0675474	-	-	-	42236
Data Cable	CA-101	07306349505Q1200465	-	-	-	42238
Headset	WH-702	0694894012602R00642	4.2	4.4	-	42237
Laptop	IBM Thinkpad T40	99ARTGD	-	-	-	41868
AC Adapter	02K6543	-	-	-	-	40202
Printer	HP deskjet 1600CC3540A	USB8302546	-	-	-	40077
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5	Radiated emissions	PASSED

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. Bluetooth Test results	6
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 850 Test results, FM-Radio active	9
3.4. GSM 1900 Test results, GPS active	10
3.5. WLAN Test results, GPS active	11
4. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)	12
4.1. Test setup	12
4.2. Test method and limit	12
4.3. Bluetooth Test results	14
5. Test Equipment.....	15
5.1. Conducted measurements	15
5.2. Radiated measurements	15

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-659 DUT42231
Accessories with DUT numbers	CA-101 DUT42238, WH-702 DUT42237, IBM Thinkpad T40 DUT 41868, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 99.8
Date of measurements	09-Jun-2010
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. Bluetooth Test results

TX mode, channel 40 / 2442 MHz

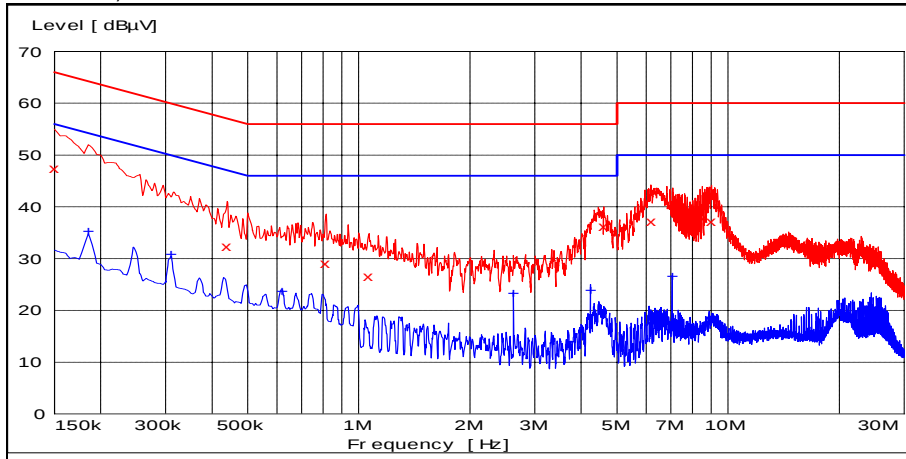

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.150000	47.60	L1	PASSED
0.440000	32.40	L1	PASSED
0.815000	29.10	L1	PASSED
1.065000	26.70	N	PASSED
4.605000	36.40	L1	PASSED
6.220000	37.20	N	PASSED
8.560000	37.80	N	PASSED
9.035000	37.30	N	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.185000	35.40	L1	PASSED
0.310000	30.80	L1	PASSED
0.620000	23.70	N	PASSED
2.625000	23.30	N	PASSED
4.240000	23.80	L1	PASSED
7.065000	26.60	N	PASSED

3. Radiated missions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)

EUT with DUT number	RM-659 DUT42231 and DUT42280
Accessories with DUT numbers	AC-10UC DUT42236, CA-101 DUT42238, WH-702 DUT42237
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Wlan tests done with DUT42280
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 47 / 101.6
Date of measurements	7-Jun-2010
Measured by	Hannu Söderholm

3.1. Test setup

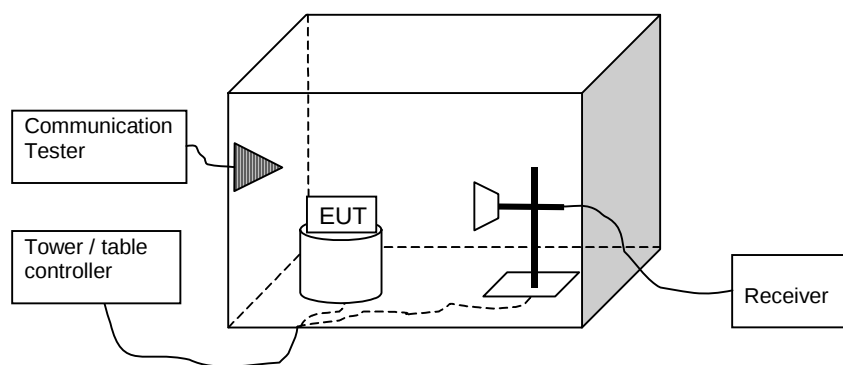

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results, FM-Radio active

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	39.10	90.16	43.50	-4.4	HORIZONTAL	PASSED
6953.600000	43.30	146.22	41.80	1.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	26.00	19.95	30.40	-4.4	HORIZONTAL	PASSED
6953.600000	30.00	31.62	28.50	1.5	HORIZONTAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
876.051503	31.90	39.36	56.40	-24.5	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3526.400000	40.10	101.16	44.30	-4.20	HORIZONTAL	PASSED
7052.800000	42.20	128.82	40.40	1.80	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3526.400000	26.10	20.18	30.30	-4.20	HORIZONTAL	PASSED
7052.800000	29.40	29.51	27.60	1.80	HORIZONTAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	38.90	88.10	43.10	-4.2	HORIZONTAL	PASSED
7150.400000	42.50	133.35	40.40	2.1	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	25.80	19.50	30.00	-4.2	HORIZONTAL	PASSED
7150.400000	29.40	29.51	27.30	2.1	HORIZONTAL	PASSED

3.4. GSM 1900 Test results, GPS active

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	39.90	98.86	42.10	-2.2	VERTICAL	PASSED
7720.000000	43.10	142.89	39.60	3.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	27.10	22.65	29.30	-2.2	HORIZONTAL	PASSED
7720.000000	30.60	33.88	27.10	3.5	HORIZONTAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.000000	12.40	4.17	38.10	-25.7	VERTICAL	PASSED
48.997996	12.00	3.98	47.10	-35.1	VERTICAL	PASSED
90.760721	11.80	3.89	47.60	-35.8	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
17753.511022	54.80	549.54	33.90	20.9	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	34.90	55.59	49.50	-14.6	VERTICAL	PASSED
17759.011022	42.00	125.89	21.10	20.9	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	40.50	105.93	42.20	-1.7	VERTICAL	PASSED
7960.000000	44.20	162.18	40.20	4.0	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	27.80	24.55	29.50	-1.7	HORIZONTAL	PASSED
7960.000000	31.30	36.73	27.30	4.0	HORIZONTAL	PASSED

3.5. WLAN Test results, GPS active

RX mode, channel 1

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	39.60	95.50	40.70	-1.10	VERTICAL	PASSED
7236.000000	43.20	144.54	40.60	2.60	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	26.70	21.63	27.80	-1.10	HORIZONTAL	PASSED
7236.000000	30.10	31.99	27.50	2.60	HORIZONTAL	PASSED

RX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.361924	12.40	4.17	38.30	-25.90	VERTICAL	PASSED
49.278958	12.70	4.32	48.00	-35.30	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
17852.205411	55.70	609.54	35.00	20.70	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1989.979960	38.10	80.35	52.20	-14.10	VERTICAL	PASSED
17848.705411	42.50	133.35	21.80	20.70	HORIZONTAL	PASSED

RX mode, channel 11

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	40.00	100.00	41.10	-1.10	HORIZONTAL	PASSED
7386.000000	42.60	134.90	39.40	3.20	HORIZONTAL	PASSED

Average (RBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	27.40	23.44	28.50	-1.10	HORIZONTAL	PASSED
7386.000000	30.00	31.62	26.80	3.20	HORIZONTAL	PASSED

4. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)

EUT with DUT number	RM-659 DUT42231
Accessories with DUT numbers	CA-101 DUT42238, WH-702 DUT42237, IBM Thinkpad T40 DUT 41868, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 47 / 101.6
Date of measurements	7-Jun-2010
Measured by	Hannu Söderholm

4.1. Test setup

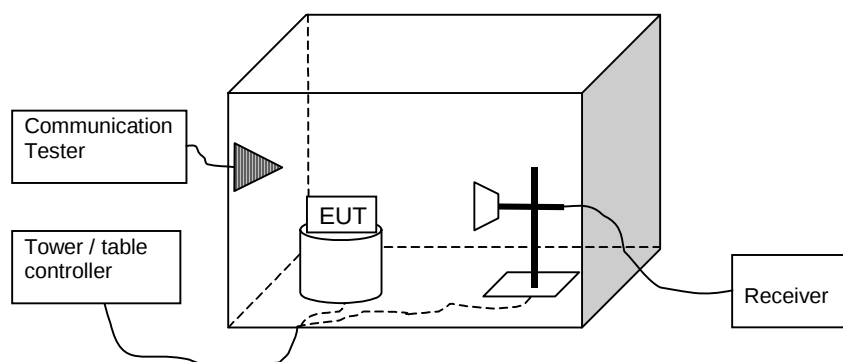

4.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

4.3. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	48.60	269.15	49.60	-1.0	VERTICAL	PASSED
7206.000000	44.60	169.82	42.20	2.4	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	36.10	63.83	37.10	-1.0	VERTICAL	PASSED
7206.000000	30.60	33.88	28.20	2.4	VERTICAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
150.000000	25.90	19.72	50.00	-24.1	VERTICAL	PASSED
170.641483	28.20	25.70	52.40	-24.2	VERTICAL	PASSED
245.791784	28.10	25.41	50.70	-22.6	HORIZONTAL	PASSED
257.014629	35.20	57.54	57.50	-22.3	HORIZONTAL	PASSED
278.457315	28.70	27.23	50.50	-21.8	HORIZONTAL	PASSED
400.501202	33.20	45.71	51.80	-18.6	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.269539	48.10	254.10	49.30	-1.2	VERTICAL	PASSED
7317.637275	43.20	144.54	40.10	3.1	VERTICAL	PASSED
7326.153307	44.50	167.88	41.60	2.9	VERTICAL	PASSED
17479.955912	52.30	412.10	33.60	18.7	VERTICAL	PASSED
17796.087174	54.70	543.25	33.90	20.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.269539	34.40	52.48	35.60	-1.2	VERTICAL	PASSED
7314.637275	30.20	32.36	27.20	3.0	VERTICAL	PASSED
7325.653307	31.70	38.46	28.80	2.9	VERTICAL	PASSED
17477.955912	39.40	93.33	20.70	18.7	VERTICAL	PASSED
17797.587174	42.00	125.89	21.20	20.8	VERTICAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	44.50	167.88	45.00	-0.5	VERTICAL	PASSED
7440.000000	43.20	144.54	40.00	3.2	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	32.00	39.81	32.50	-0.5	VERTICAL	PASSED
7440.000000	30.20	32.36	27.00	3.2	VERTICAL	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM0631 2	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM30642	Mast/turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM38990	Remote switching module	RSM1	EMC Automation	22/24/27, 15C, 15B
TM38341	System interface	SI-300	EMC Automation	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Controller	2090	Emco	22/24/27, 15C, 15B
TM39158	Antenna	3116	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AFS4-00100300-20-23P6	Miteq	15C
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Torqueleader	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870/	Wainwright	27
TM38215	Band reject filter	WRCD 1920/1980-1918/1982-40/20	Wainwright UMTS	27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30/	Wainwright ISM	15C
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	27
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
-	Antenna	SBA 9113	Schwarzbeck	22/24/27
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C