



Report No.: RZA2010-0326BV



Part 15B (Verification) TEST REPORT

Product Name CDMA Mobile phone

FCC ID QMNRM-685

Type RM-685

Applicant Nokia Inc.


TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY


Product Name	CDMA Mobile phone	Type	RM-685
FCC ID	QMNRM-685	Report No.	RZA2010-0326BV
Client	Nokia Inc.		
Manufacturer	BYD Precision Manufacture Company Limited.		
Reference Standard(s)	FCC Part 15 Subpart B Radio frequency device. (V10.1.07) ANSI C63.4 Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40GHz. (2003)		
Conclusion	This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards. General Judgment : Pass (Stamp) Date of issue: March 11th, 2010 		
Comment	The test result only responds to the measured sample.		

Approved by




Yang Weizhong

Revised by



Song Ming

Performed by



Liu Wei

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2010-0326BV

Registration Num:428261
Page 3 of 17

TABLE OF CONTENT

1. General Information.....	4
1.1. NOTES OF THE TEST REPORT	4
1.2. TESTING LABORATORY	4
1.3. APPLICANT INFORMATION	5
1.4. MANUFACTURER INFORMATION.....	5
1.5. INFORMATION OF EUT.....	6
1.6. TEST DATE	7
2. Test Information.....	8
2.1. SUMMARY OF TEST RESULTS.....	8
2.2. RADIATED EMISSION	9
2.3. CONDUCTED EMISSION.....	13
3. Main Test Instruments	17

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 4 of 17

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report can not be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Yang Weizhong
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 5 of 17

1.3. Applicant Information

Company: Nokia Inc.
Address: 12278 Scripps Summit Drive 92131
City: San Diego, CA
Postal Code: 92131
Country: USA
Telephone: +1 858 831 5000
Fax: +1 858 831 6500

1.4. Manufacturer Information

Company: BYD Precision Manufacture Company Limited.
Address: No.1, kechuang Dong 5 jie, Tongzhou District
City: Beijing
Postal Code: 101111
Country: China
Telephone: +86 10 58018888 ext.71763
Fax: +86 10 58018888 ext.73000

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 6 of 17

1.5. Information of EUT

General information

Device type:	Portable device		
Name of EUT:	CDMA Mobile phone		
Device operating configurations:			
MEID:	a0000001c8fb00		
Operating mode(s):	CDMA Cellular		
Test modulation:	OQPSK		
Emission Designator	1M25F9W		
Antenna type:	internal antenna		
Power supply:	Battery or Charger		
Rated Power Supply Voltage:	3.7V		
Extreme Voltage:	Minimum: 3.4V Maximum: 4.2V		
Extreme Temperature:	Lowest: -30°C Highest: +60°C		
Operating frequency range(s)	Band	Tx (MHz)	Rx (MHz)
	CDMA Cellular	824.7 ~ 848.31	869.7 ~ 893.31
Hardware version:	1000		
Software version:	WH_0100B07		

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 7 of 17

Auxiliary equipment details

AE1: Battery

Model:	BL-4C
Manufacture:	Nokia Inc.
IMEI or SN:	06703894175350454E21540910

AE2: Travel Adaptor

Model:	AC-6U
Manufacture:	Nokia Inc.
IMEI or SN:	4090499112961407567

AE3: Headset

Model:	WH-101 HS-105
IMEI or SN:	06942879184E2602777

Equipment Under Test (EUT) is CDMA Mobile Telephone with internal antenna. It consists of mobile phone, battery and adaptor and the detail about these is in chapter 1.5 in this report. The EUT supports CDMA Cellular.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test date is from March 9, 2010 to March 10, 2010.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2010-0326BV

Registration Num:428261
Page 8 of 17

2. Test Information

2.1. Summary of test results

Number	Test Case	Clause in FCC Rules	Verdict
1	Radiated Emission	15.109, ANSI C63.4-2003	PASS
2	Conducted Emission	15.107, ANSI C63.4-2003	PASS

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 9 of 17

2.2. Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
26°C	60%	102.5kPa


Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2003. Sweep the whole frequency band through the range from 30MHz to 5GHz. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing

Test Setup

Below 1GHz

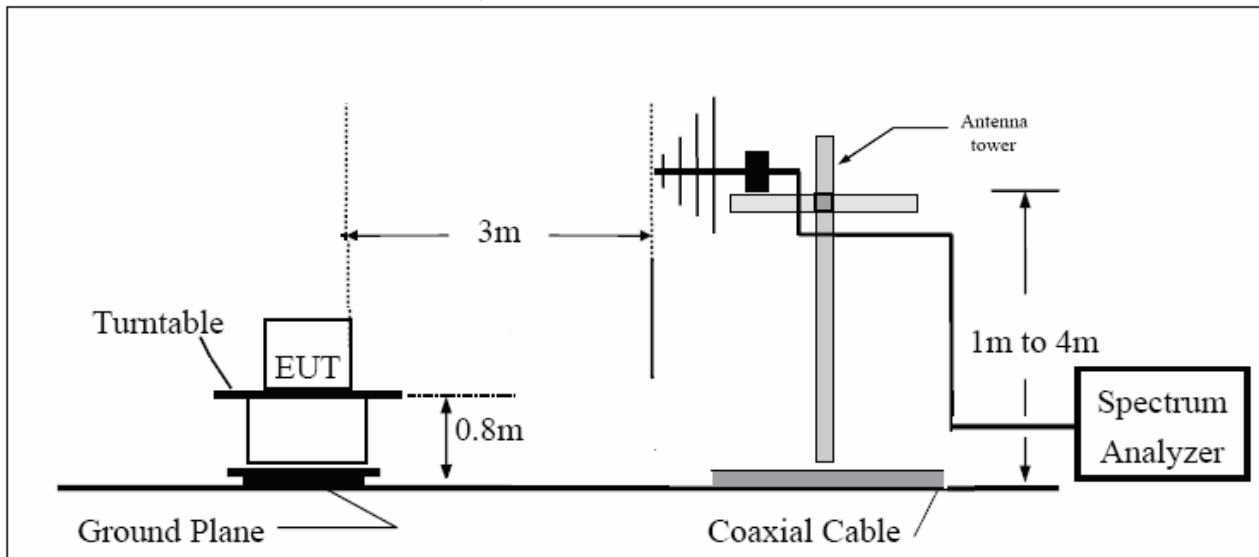

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 10 of 17

Above 1GHz

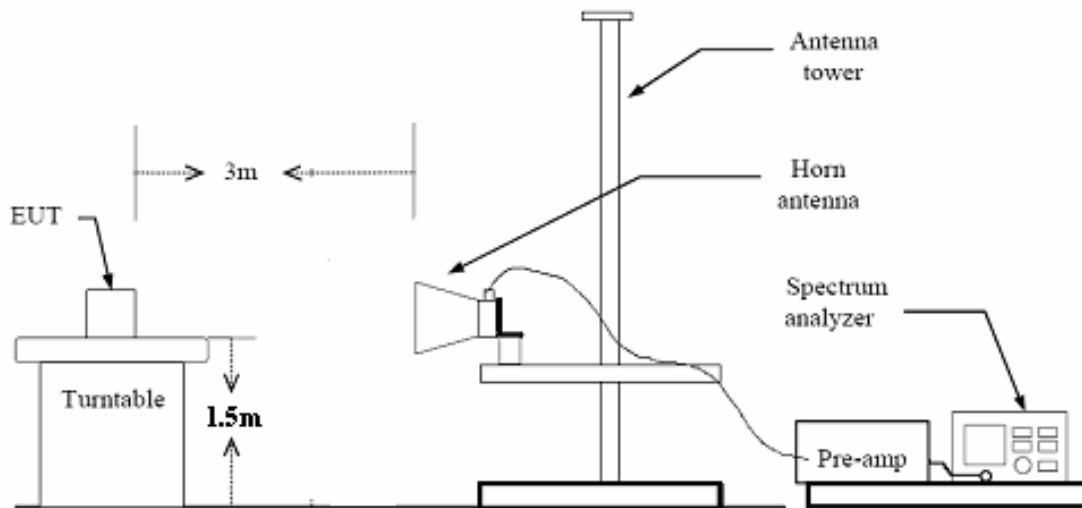

Limits

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.92$ dB.

TA Technology (Shanghai) Co., Ltd.

Test Report


Registration Num:428261

Report No.: RZA2010-0326BV

Page 11 of 17

Test Results

Charging Mode

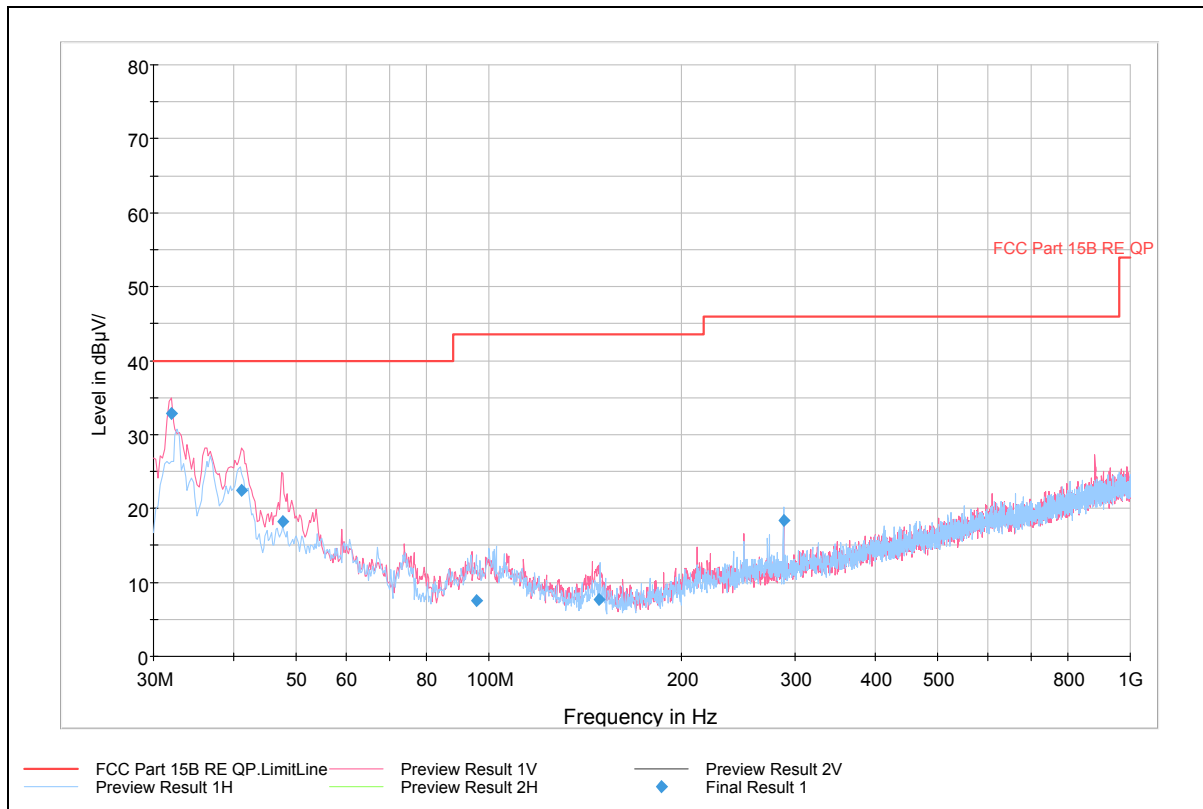

Note: Red trace is in vertical polarization Blue trace is in horizontal polarization

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Margin (dB)	Limit (dBµV/m)
31.940000	32.9	132.0	Vertical	197.0	7.1	40.0
41.155000	22.5	100.0	Vertical	2.0	17.5	40.0
47.702500	18.3	139.0	Vertical	158.0	21.7	40.0
95.475000	7.5	195.0	Horizontal	22.0	36.0	43.5
148.582500	7.7	100.0	Vertical	22.0	35.8	43.5
288.020000	18.3	116.0	Horizontal	2.0	27.7	46.0

Note: all emissions level measured above 1GHz was more than 10dB below the limit


TA Technology (Shanghai) Co., Ltd.

Test Report

Registration Num:428261


Report No.: RZA2010-0326BV

Page 12 of 17

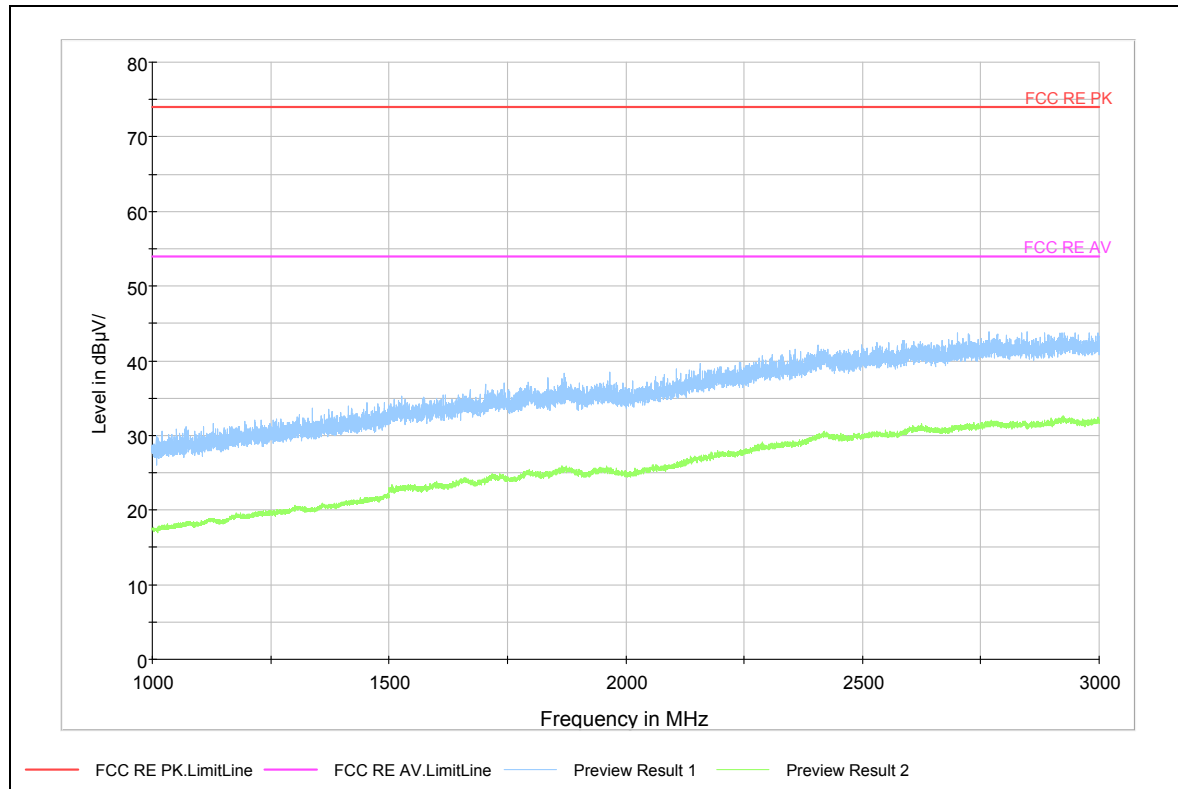

Note: Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 1GHz to 3GHz

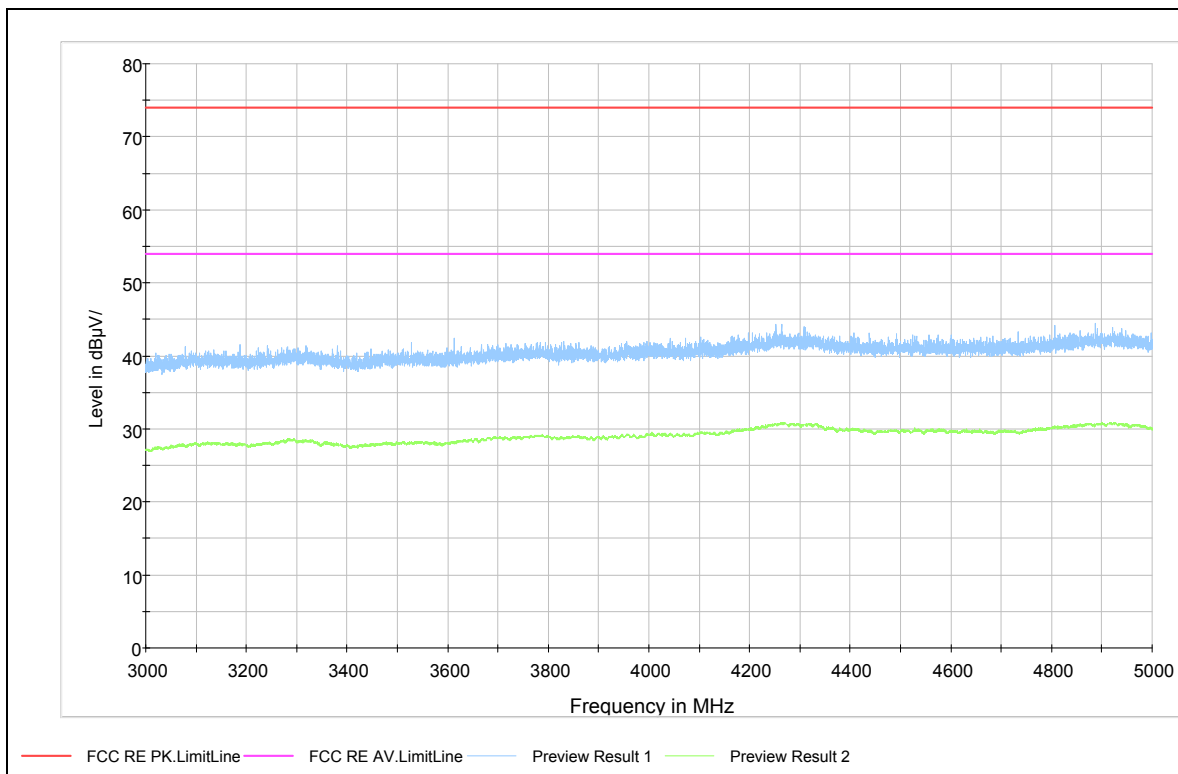

Note: Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 3GHz to 5GHz

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 13 of 17

2.3. Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
25°C	58%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2003. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. The measurement result should include both L line and N line.

Test Setup

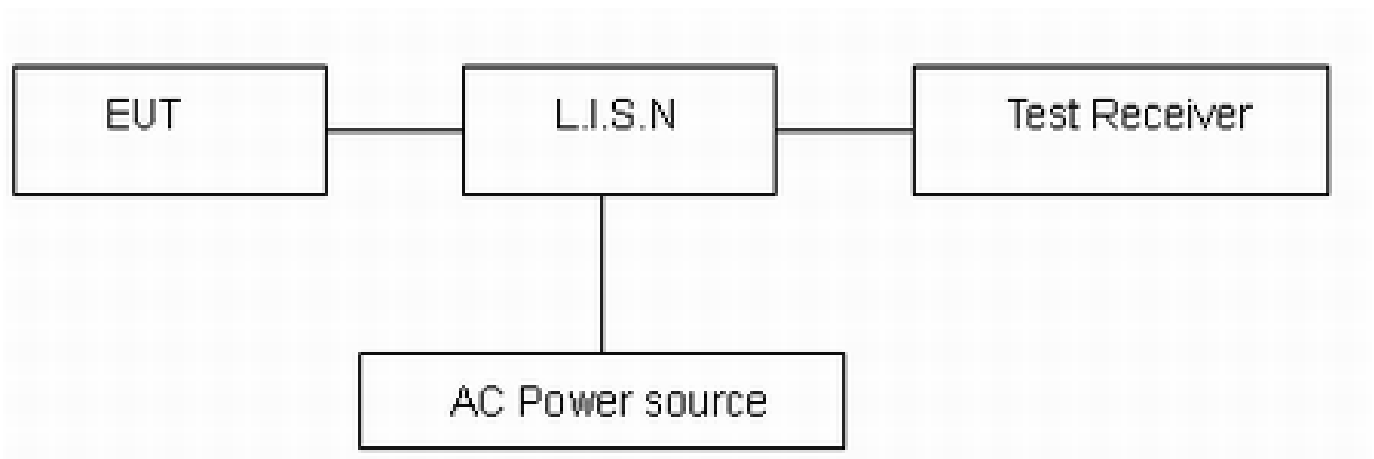

Note: AC Power source is used to change the voltage from 220V/50Hz to 110V/60Hz.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 14 of 17

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.69$ dB.

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RZA2010-0326BV

Registration Num:428261

Page 15 of 17

Test Results

Charging Mode

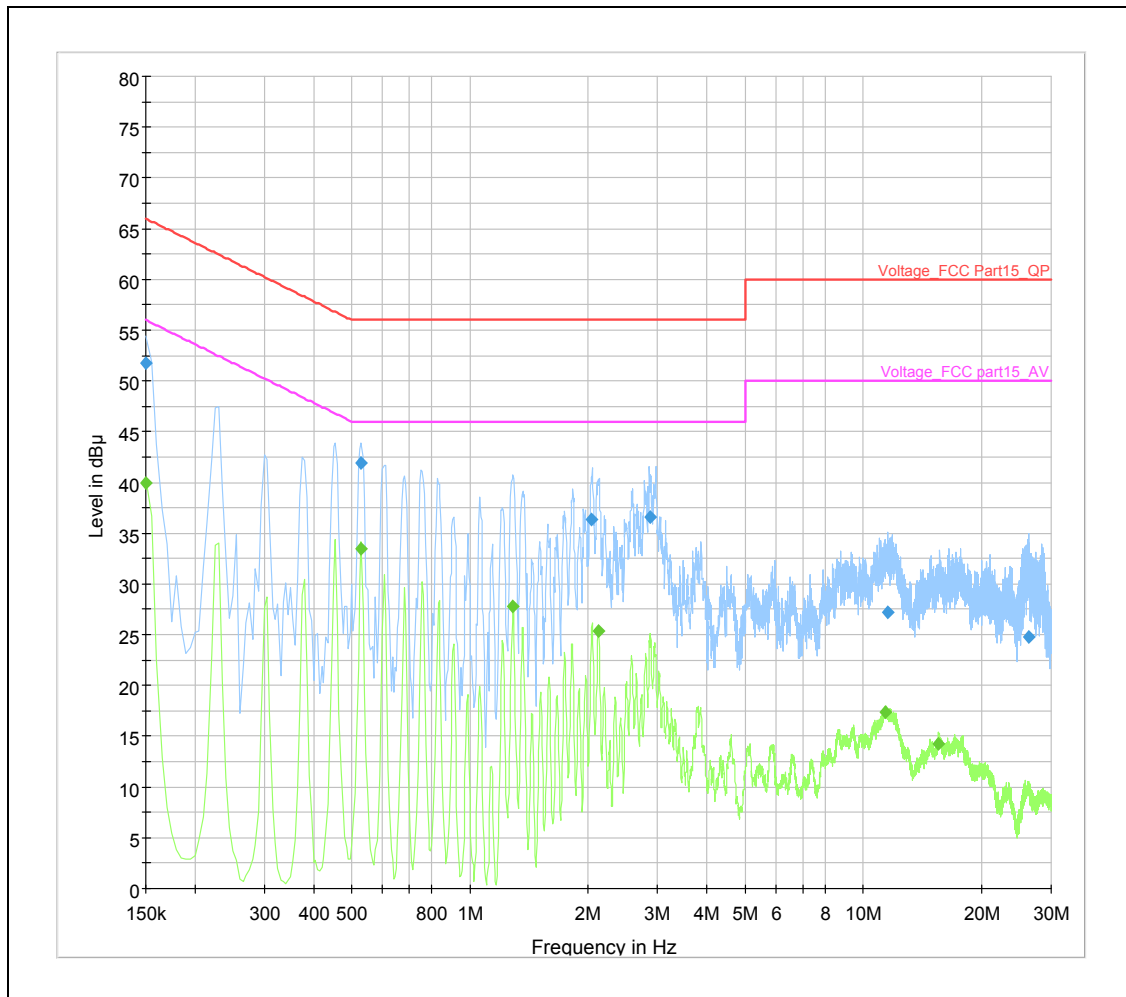

Note: Blue trace uses the peak detection Green trace uses the average detection
L line

Conducted Emission from 150 KHz to 30 MHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Registration Num:428261

Report No.: RZA2010-0326BV

Page 16 of 17

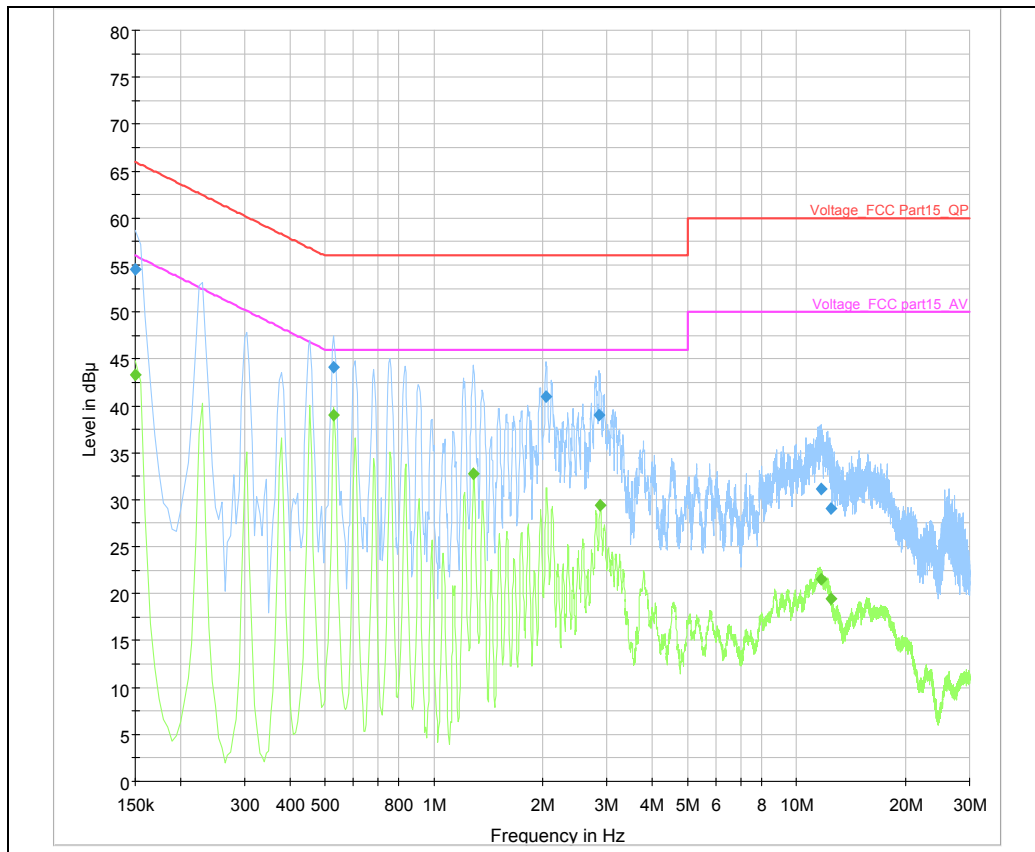

Note: Blue trace uses the peak detection Green trace uses the average detection
N line

Conducted Emission from 150 KHz to 30 MHz

Frequency (MHz)	Detector	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)
0.150000	Average	L	39.9	56.0	16.1
0.150000	Average	N	43.3	56.0	12.7
0.530000	Average	N	39.0	46.0	7.0
0.530000	Average	L	33.5	46.0	12.5
1.280000	Average	N	32.7	46.0	13.3
2.865000	Average	N	29.4	46.0	16.6
0.150000	Quasi-peak	L	51.7	66.0	14.3
0.150000	Quasi-peak	N	54.5	66.0	11.5
0.530000	Quasi-peak	N	44.1	56.0	11.9
0.530000	Quasi-peak	L	41.9	56.0	14.1
2.030000	Quasi-peak	N	41.0	56.0	15.0
2.860000	Quasi-peak	N	39.1	56.0	16.9

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2010-0326BV

Registration Num:428261

Page 17 of 17

3. Main Test Instruments

No.	Name	Type	Manufacturer	Serial Number	Calibration Date	Valid Period
01	Base Station Simulator	CMU200	R&S	118133	2009-06-02	One year
02	Signal Analyzer	FSV	R&S	100815	2009-06-29	One year
03	Signal generator	SMR27	R&S	100365	2009-07-02	One year
04	EMI Test Receiver	ESCI	R&S	100948	2009-07-02	One year
05	Trilog Antenna	VULB 9163	SCHWARZB ECK	9163-391	2009-05-14	Two years
06	Horn Antenna	HF907	R&S	100126	2009-07-02	Two years
07	LISN	EMCO	3816/2	00084033	2009-12-04	Two years
08	AC Power Source	AFC-11005G	APC	F309040118	2009-07-25	One year
09	Semi-Anechoic Chamber	9.6*6.7*6.6m	ETS-Lindgren	NA	NA	NA
10	Shielding room	5*4*4m	ETS-Lindgren	NA	NA	NA
11	EMI test software	ES-K1	R&S	NA	NA	NA

*****END OF REPORT BODY*****