

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-803_12.docx	Date of Report:	28-Sep-2011
Number of pages:	14	Customer's Contact person:	Abadilla Victoria
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-803 / Battery BP-3L		
FCC ID:	QMNRM-803	IC:	661X-RM803
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Zou Ming, EMC Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	07-Sep-2011
Testing completed	20-Sep-2011
The customer's contact person	Abadilla Victoria
Test Plan referred to	T:\Projects\RM-803\TestPlan\RS_testplan_RM-803.xls
Notes	-
Document name	FCC22&24_RM-803_12.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-803	004402/13/635625/4	0110	-	1600.2201.7 720.11350	52278
Battery	BP-3L	3932131154140103592;0670635	-	-	-	52281

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power	
(FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)	5
2.2. Test method and limit	5
2.3. GSM850 TX Test results	6
2.4. GSM1900 TX Test results	6
2.5. WCDMA 1900 (Band II) TX Test results	7
3. Band edge compliance	
(FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5).....	8
3.2. Test method and limit	8
3.3. GSM850 Test results	9
3.4. GSM1900 Test results	11
3.5. WCDMA 1900 (Band II) Test results	13
4. Test Equipment	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)

EUT with DUT number	RM-803, DUT 52278
Accessories with DUT numbers	BP-3L, DUT 52281
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 55 / 101.7
Date of measurements	19-Sep-2011
Measured by	Zou Ming

2.1.1 Test Setup

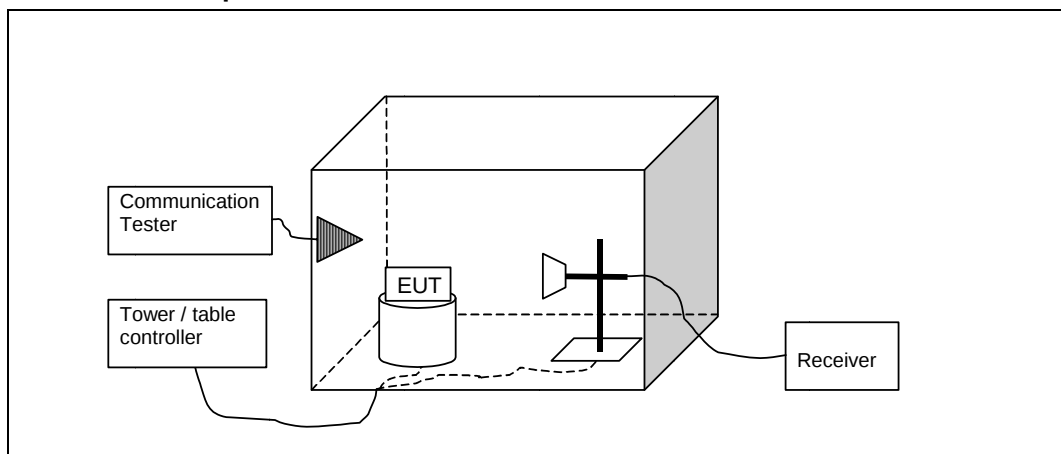

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used.

The measurement results are obtained as described below:

$$P [dBm] = P_{SUBST\ TX} + P_{MEAS} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where $P_{SUBST\ TX}$ is signal generator level. P_{MEAS} is measured power level from the EUT. $P_{SUBST\ RX}$ is measured power level in substitute measurement. $L_{SUBST\ CABLE}$ is the loss of the cable between the signal generator and the substitution antenna and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit[dBm]
824 - 849	7	38.5
1710 - 1755	1	30
1850 - 1910	2	33

2.3. GSM850 TX Test results

GSM mode

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dB]	L _{SUBST CABLE} [dB]	Polarisation	Result
128 / 824.2	30.59	1.146	-2.9	+10	-29.7	-2.85	3.36	VERTICAL	PASSED
190 / 836.6	31.84	1.528	-2.81	+10	-30.75	-2.73	3.37	HORIZONTAL	PASSED
251 / 848.8	29.92	0.982	-3.82	+10	-29.67	-2.56	3.37	HORIZONTAL	PASSED

EGPRS mode, 1 TX Slot

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
128 / 824.2	25.23	0.333	-8.26	+10	-29.7	-2.85	3.36	VERTICAL	PASSED
190 / 836.6	28.39	0.690	-6.26	+10	-30.75	-2.73	3.37	HORIZONTAL	PASSED
251 / 848.8	27.73	0.593	-6.01	+10	-29.67	-2.56	3.37	HORIZONTAL	PASSED

2.4. GSM1900 TX Test results

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	31.28	1.343	-14.58	+10	-32.65	8.14	4.93	VERTICAL	PASSED
661 / 1880	30.85	1.216	-14.77	+10	-32.33	8.27	4.98	VERTICAL	PASSED
810 / 1909.8	31.73	1.489	-14.23	+10	-32.54	8.43	5.01	VERTICAL	PASSED

EGPRS mode, 1 TX Slot

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	29.03	0.800	-16.83	+10	-32.65	8.14	4.93	VERTICAL	PASSED
661 / 1880	28.65	0.733	-16.97	+10	-32.33	8.27	4.98	VERTICAL	PASSED
810 / 1909.8	29.78	0.951	-16.18	+10	-32.54	8.43	5.01	VERTICAL	PASSED

2.5. WCDMA 1900 (Band II) TX Test results

Peak Detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST} CABLE [dB]	Polarisation	Result
9262 / 1852.4	29.54	0.899	-16.29	+10	-32.66	8.14	4.97	VERTICAL	PASSED
9400 / 1880	29.37	0.865	-16.16	+10	-32.34	8.27	5.08	VERTICAL	PASSED
9538 / 1907.6	30.21	1.050	-15.62	+10	-32.49	8.43	5.09	VERTICAL	PASSED


RMS Detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST} CABLE [dB]	Polarisation	Result
9262 / 1852.4	25.76	0.377	-20.07	+10	-32.66	8.14	4.97	VERTICAL	PASSED
9400 / 1880	25.51	0.356	-20.02	+10	-32.34	8.27	5.08	VERTICAL	PASSED
9538 / 1907.6	26.59	0.456	-19.24	+10	-32.49	8.43	5.09	VERTICAL	PASSED

3. Band edge compliance (FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-803, DUT 52278
Accessories with DUT numbers	BP-3L, DUT 52281
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 55 / 101.7
Date of measurements	19-Sep-2011
Measured by	Zou Ming

3.1.1 Test Setup

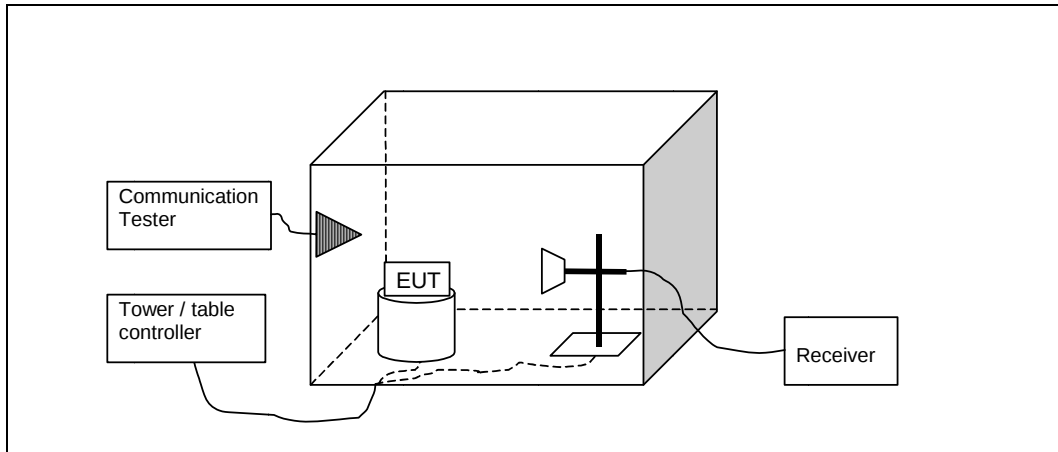

3.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and IC standards , RSS-132, RSS-133.


Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM850 / WCDMA 850	Below 824 and above 849	-13
WCDMA 1700	Below 1710 and above 1755	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13


3.3. GSM850 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]	Result
GSM	128 / 824.2	-15.01	PASSED
GSM	251 / 848.8	-16.5	PASSED

GSM, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

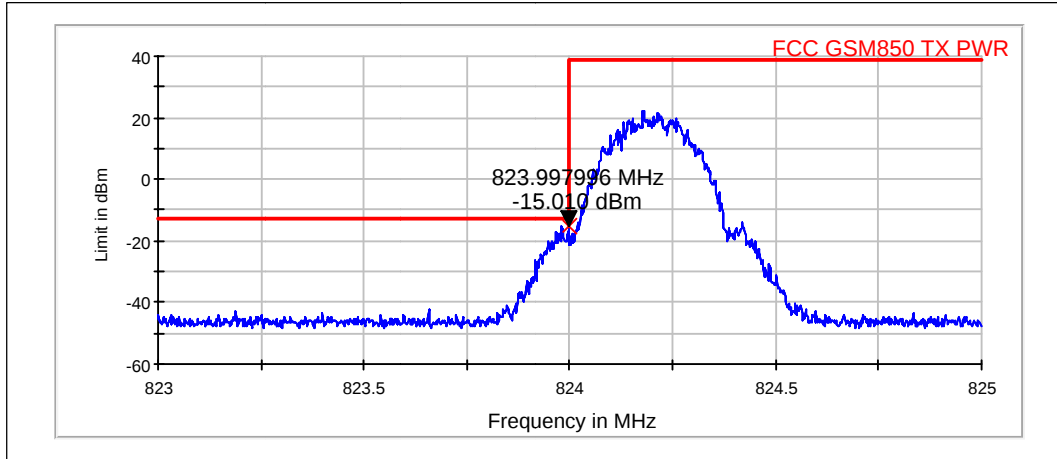


GSM, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

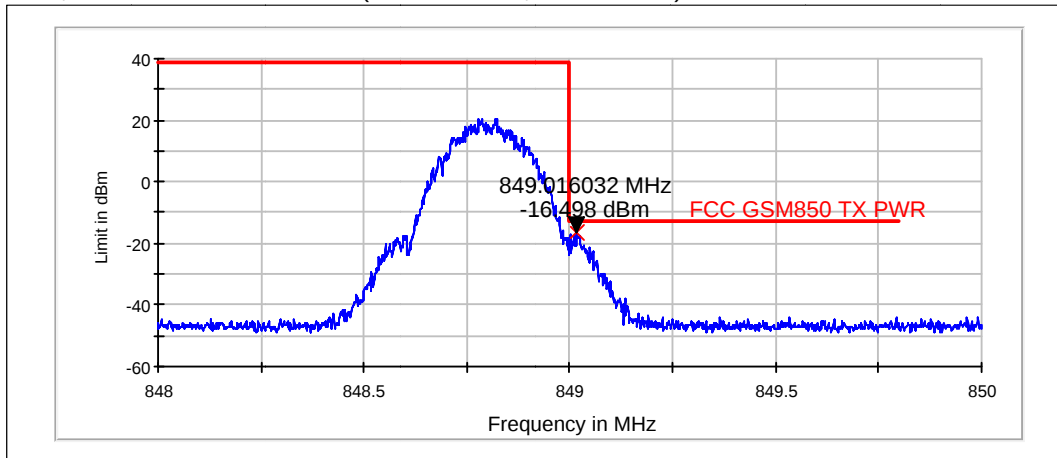


Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]	Result
EGPRS	128 / 824.2	-20.68	PASSED
EGPRS	251 / 848.8	-23.07	PASSED

EGPRS, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz)

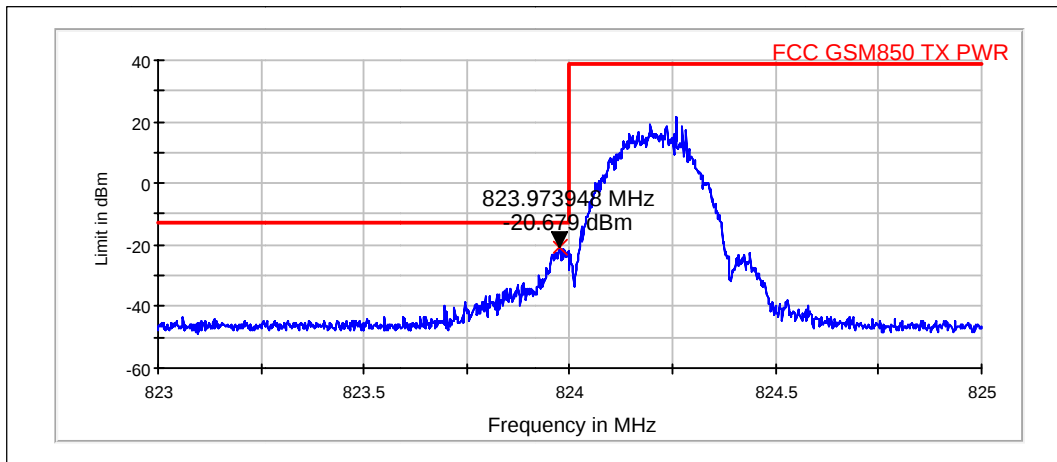


EGPRS, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz)

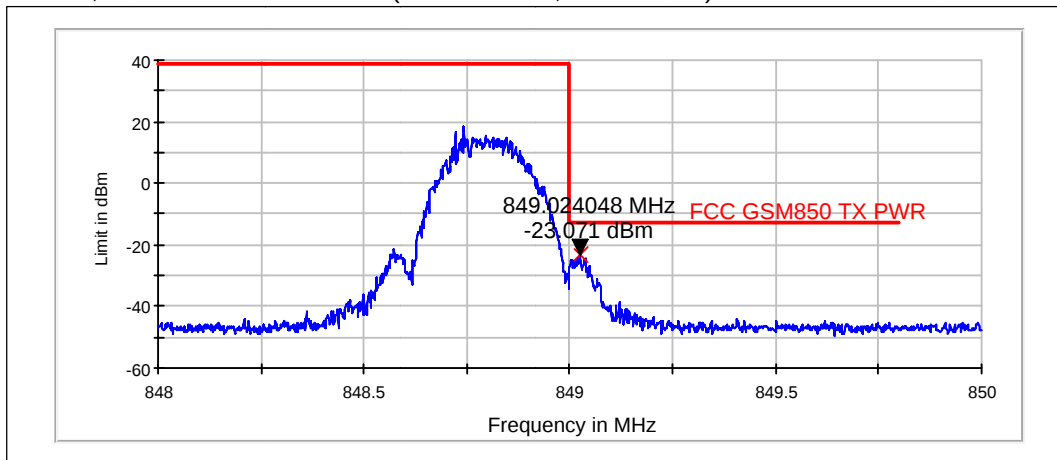


3.4. GSM1900 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]	Result
GSM	512 / 1850.2	-13.73	PASSED
GSM	810 / 1909.8	-14.19	PASSED

GSM, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

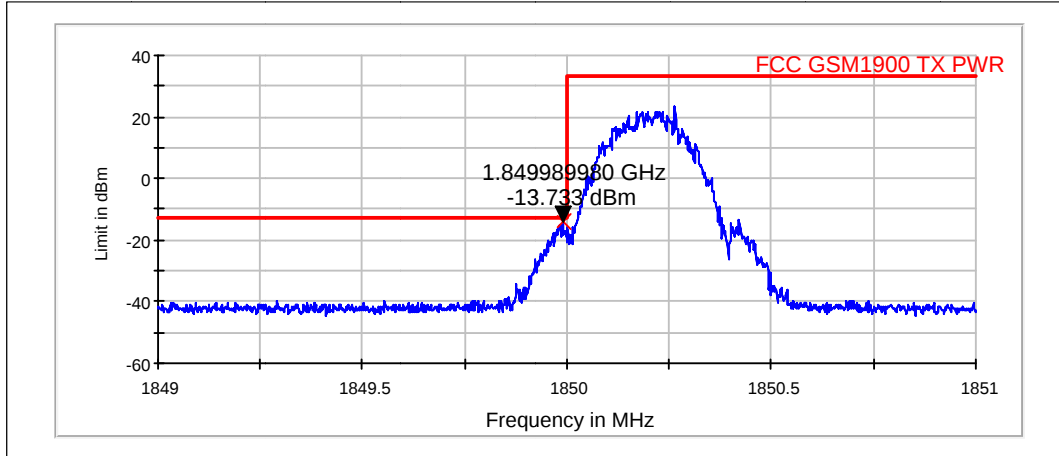


GSM, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

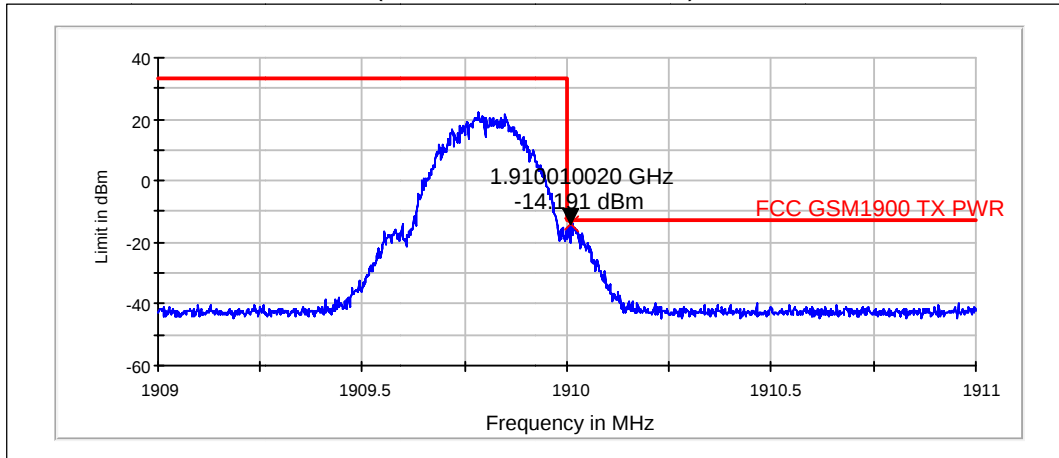


Operation mode (TX on)	Channel / f _c [MHz]	Level [dBm]	Result
EGPRS	512 / 1850.2	-22.57	PASSED
EGPRS	810 / 1909.8	-22.08	PASSED

EGPRS, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

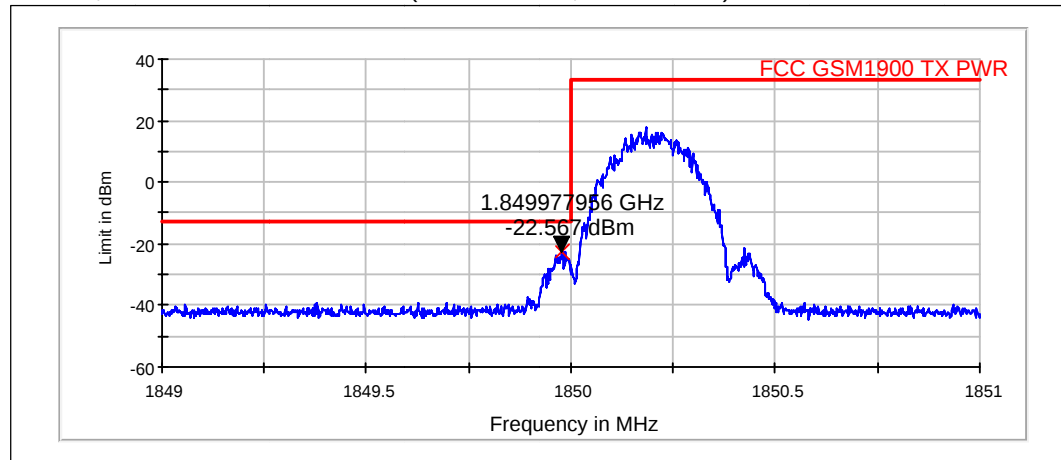


EGPRS, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

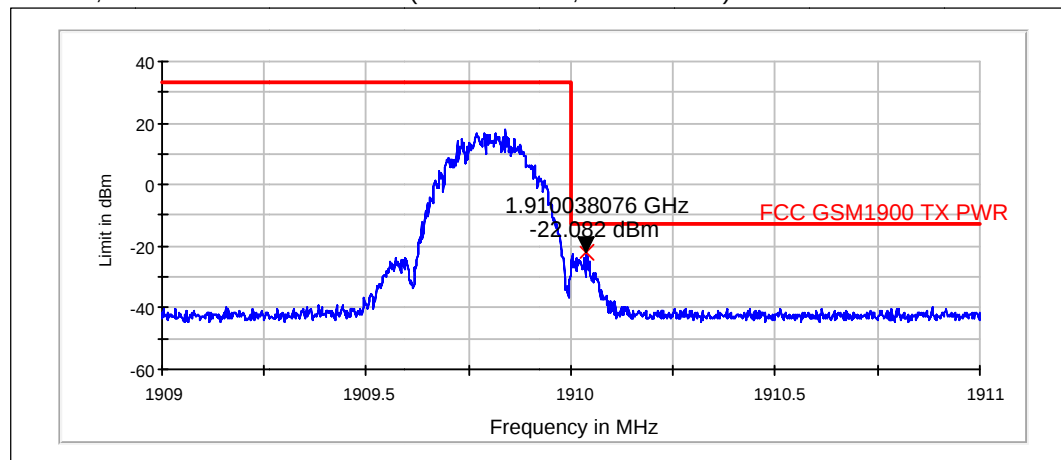


3.5. WCDMA 1900 (Band II) Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]	Result
FDD	9262 / 1852.4	-23.45	PASSED
FDD	9538 / 1907.6	-22.08	PASSED

FDD, channel 9262 / 1852.4 MHz (RMS detector, RBW: 50 kHz)

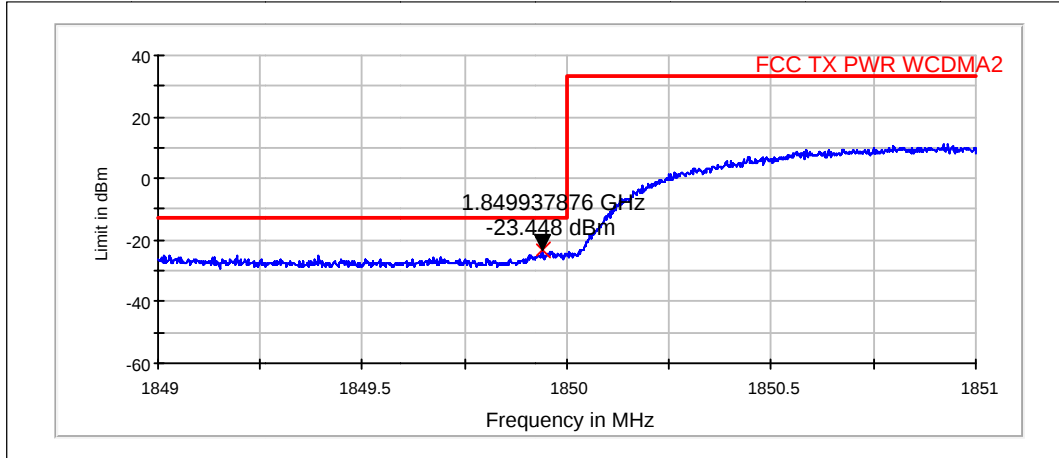

FDD, channel 9538 / 1907.6 MHz (RMS detector, RBW: 50 kHz)

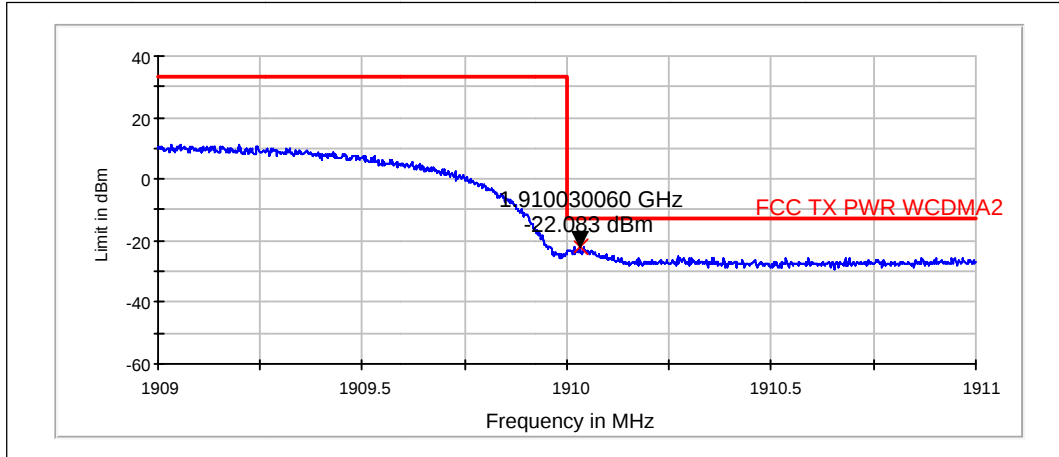

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 μ H	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0114	Signal Generator	E8357C	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-