

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-809_13.docx	Date of Report:	22-Sep-2011
Number of pages:	39	Customer's Contact person:	Abadilla Victoria
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:			
IC recognition no.:			
Tested devices/ accessories:	Phone RM-809 / Battery BP-3L / USB Cable CA-101 / Headset WH-208 / AC Charger AC-10UC		
FCC ID:	QMNRM-809	IC:	661X-RM809
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	08-Sep-2011
Testing completed	30-Sep-2011
The customer's contact person	Abadilla Victoria
Test Plan referred to	T:\Projects\RM-809\TestPlan\RS_testplan_RM-809.xls
Notes	-
Document name	T:\Projects\RM-809\EMC\FCC15CBT_RM-809_13.docx

1.1. EUT and Accessory Information

The EUT is a 10-band mobile phone:

GSM850/900/1800/1900/GPRS/EGPRS/Monopole without GND reflector (GSM/WCDMA)

WCDMA I/II(1900)/IV(1700)/V(850)/HSDPA/HSUPA/Monopole without GND reflector (GSM/WCDMA)

WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-809	004402/13/651115/5	0111	-	1600.2201.7 720.11350	23476
AC Charger	AC-10UC	3997910023090100772;0675474	-	-	-	23458
Phone	RM-809	004402/13/651134/6	0111	-	1600.2201.7 720.11350	23485
Battery	BP-3L	3932131282140100897;0670635	-	-	-	23467
Headset	WH-208	372	-	-	-	23454
USB Cable	CA-101	07306349204X1220633	-	-	-	23452

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))	5
2.1. Test Setup	5
2.2. Test method and limit	5
2.3. Bluetooth Test results	6
3. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	9
3.2. Test method and limit	9
3.3. Bluetooth Test results	10
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	14
4.1. Test Setup	14
4.2. Test method and limit	14
4.3. Bluetooth Test results	15
5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	18
5.2. Test method and limit	18
5.3. Bluetooth Test results	20
6. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	23
6.2. Test method and limit	23
6.3. Bluetooth Test Results	24
7. 20 dB bandwidth 15.247(a)(1), A8.1 (a)	25
7.1. Test Setup	25
7.2. Test method and limit	25
7.3. Bluetooth Test results	26
8. Carrier frequency separation 15.247(a)(1), A8.1 (b)	29
8.1. Test Setup	29
8.2. Test method and limit	29
8.3. Bluetooth Test results	30
9. Number of hopping frequencies 15.247(a)(1)(iii), A8.1 (d)	32
9.1. Test Setup	32
9.2. Test method and limit	32

9.3. Bluetooth Test results	33
10. Time of occupancy	
15.247(a)(1)(iii), A8.1 (d).....	35
10.1. Test Setup	35
10.2. Test method and limit	35
10.3. Bluetooth Test results	36
11. Test Equipment	38
11.1. Conducted measurements	38
11.2. Radiated measurements	38

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 102.0
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

2.1. Test Setup

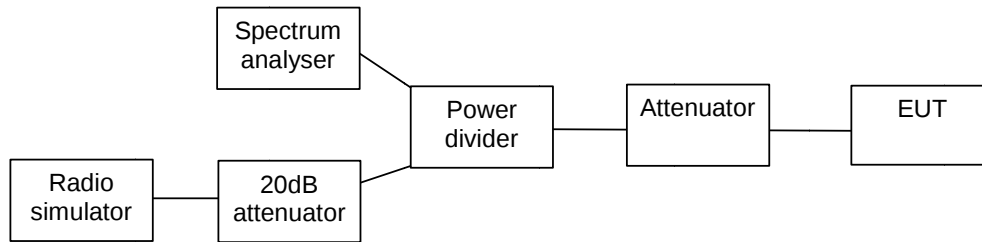

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	<= 1	<= 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.1	4.074	PASSED
40 / 2442	6.84	4.831	PASSED
78 / 2480	7.36	5.445	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

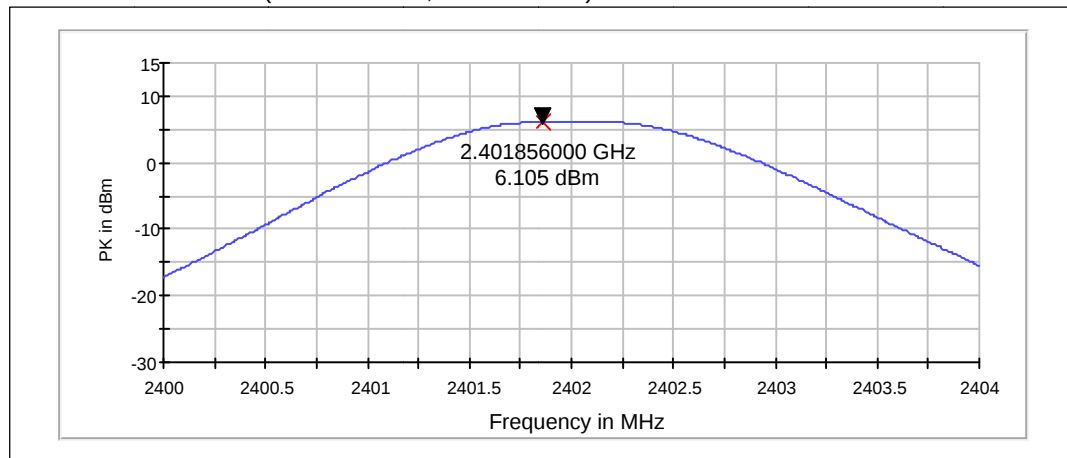

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

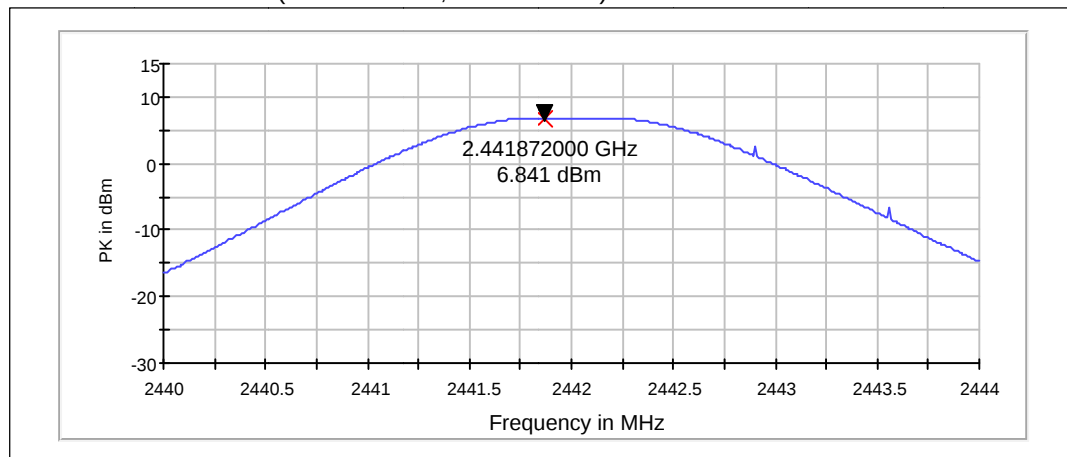


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

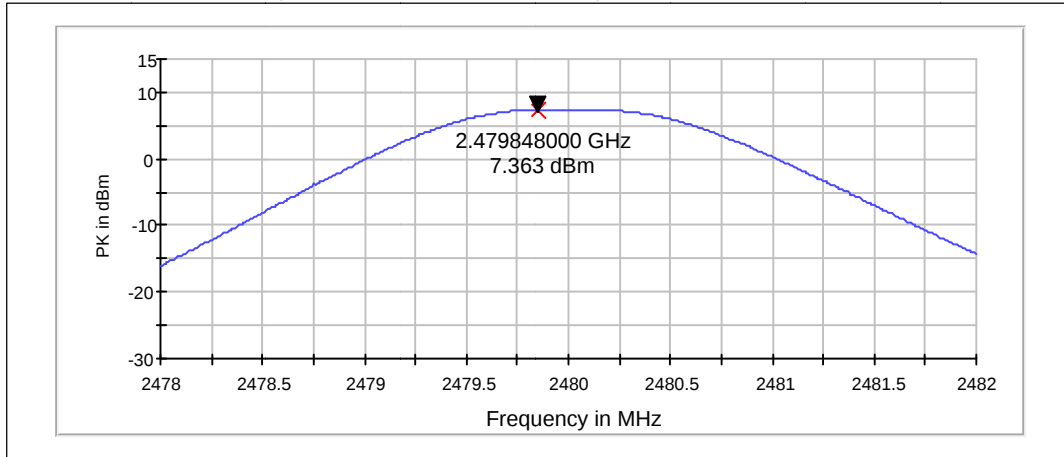


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	5.85	3.846	PASSED
40 / 2442	6.55	4.519	PASSED
78 / 2480	6.89	4.887	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

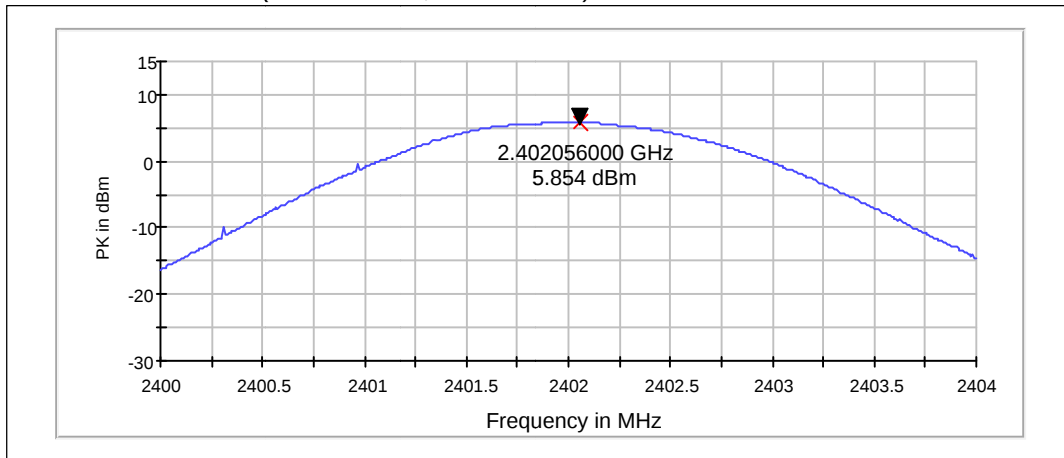

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

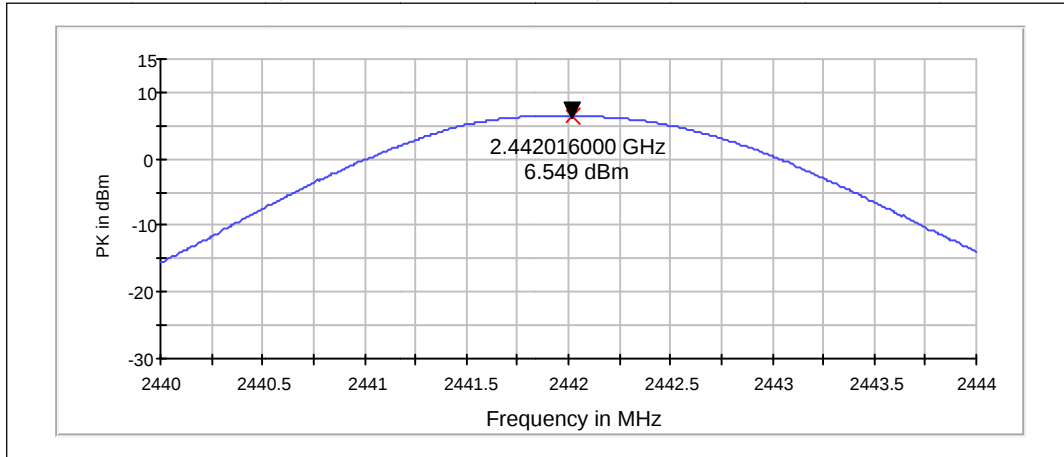


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

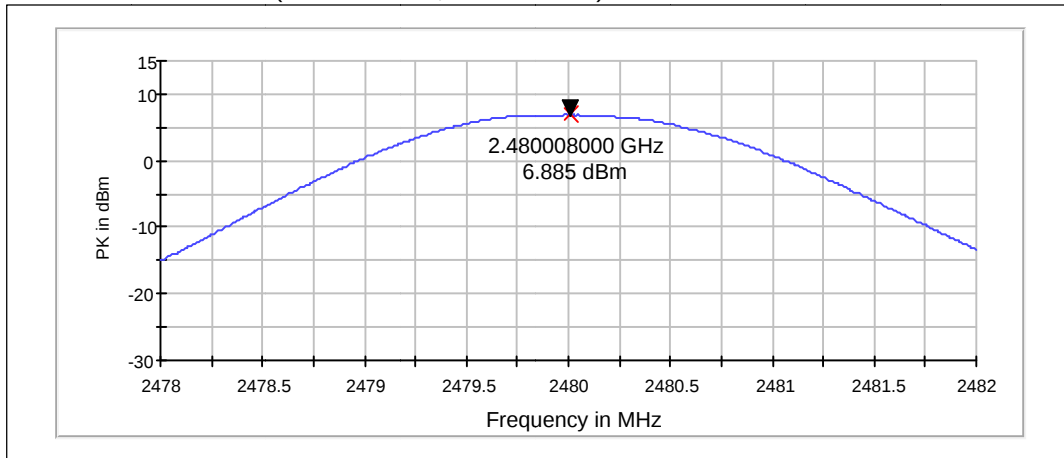

3. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-809, DUT 23485
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 98.9
Date of measurements	30-Sep-2011
Measured by	Christian Andersen

3.1.1 Test Setup

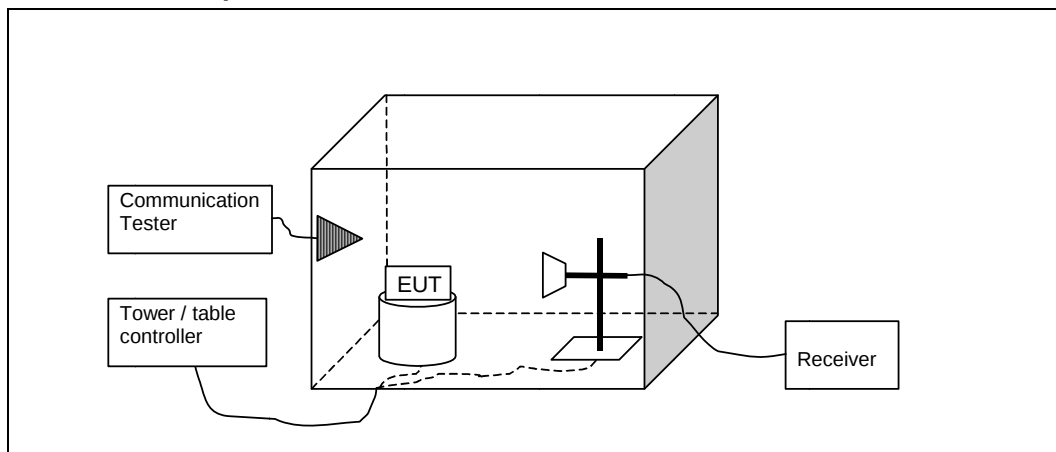

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	37.9	78.483	38.53	-0.63	PASSED
Hopping on, low end	38.42	83.393	39.05	-0.63	PASSED
78 / 2480	52.63	428.209	52.24	0.39	PASSED
Hopping on, high end	52.97	444.892	52.58	0.39	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	50.4	331.104	51.03	-0.63	PASSED
Hopping on, low end	49.53	299.648	50.16	-0.63	PASSED
78 / 2480	56.7	683.628	56.31	0.39	PASSED
Hopping on, high end	55.95	627.483	55.56	0.39	PASSED


GFSK mode. Channel 0 / 2402 MHz

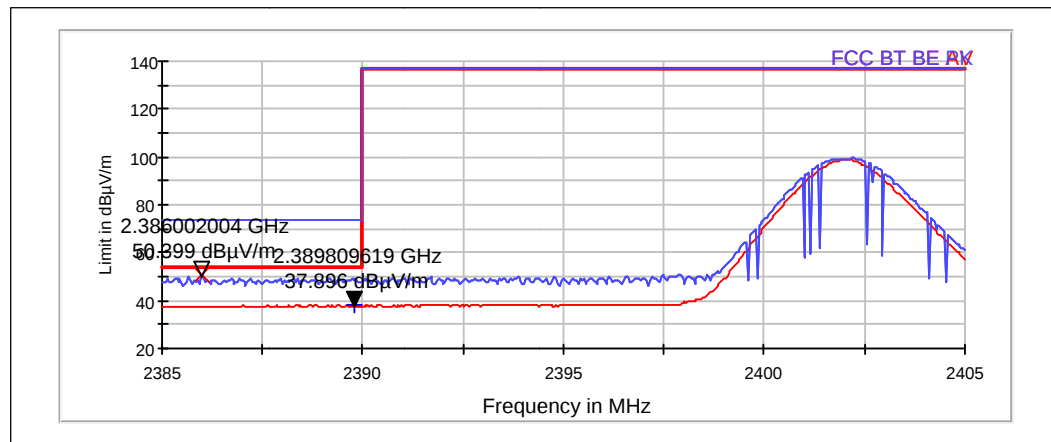


GFSK mode. Hopping on, low end

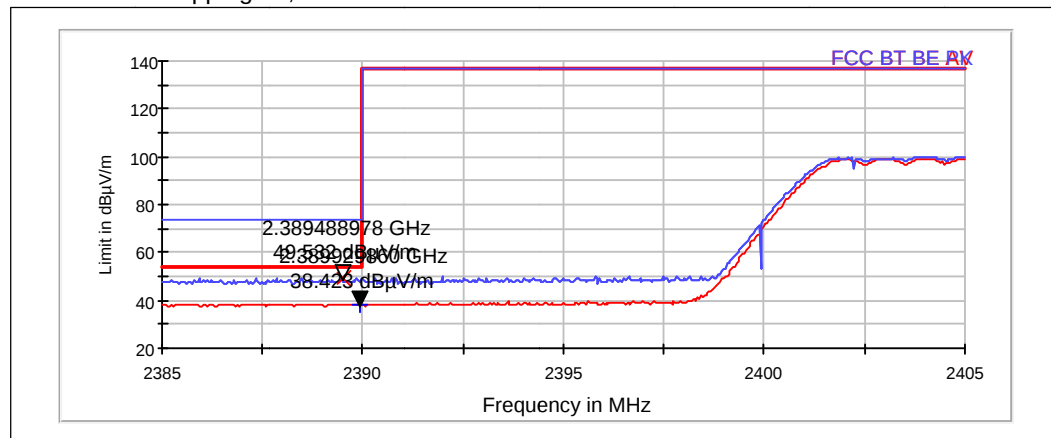

GFSK mode. Channel 78 / 2480 MHz

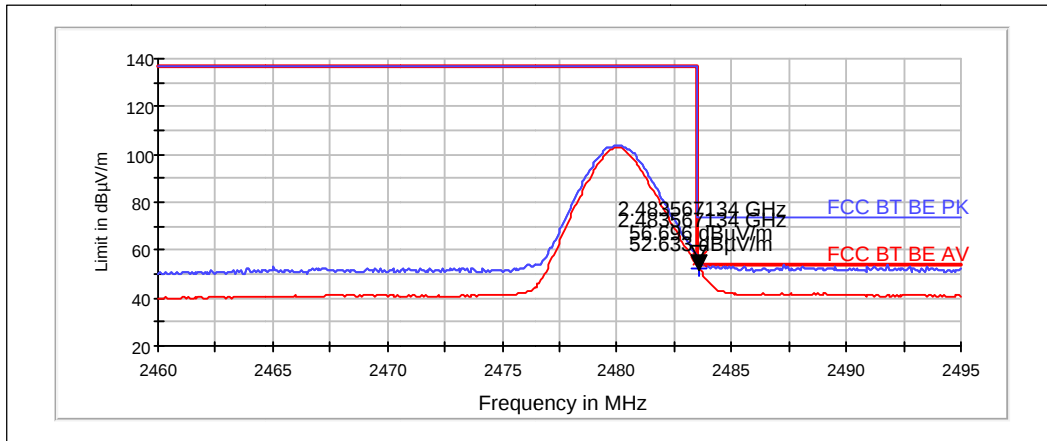

GFSK mode. Hopping on, high end

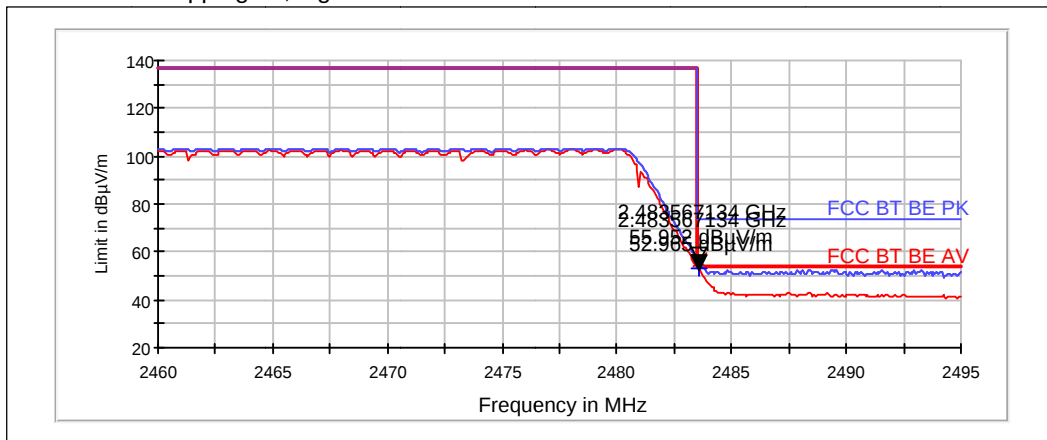

3.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	37.9	78.489	38.53	-0.63	PASSED
Hopping on, low end	38.91	88.213	39.54	-0.63	PASSED
78 / 2480	51.93	394.842	51.54	0.39	PASSED
Hopping on, high end	52.17	405.964	51.78	0.39	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	49.77	308.005	50.4	-0.63	PASSED
Hopping on, low end	49.5	298.485	50.13	-0.63	PASSED
78 / 2480	57.52	751.276	57.13	0.39	PASSED
Hopping on, high end	57.13	718.418	56.74	0.39	PASSED


8DPSK mode. Channel 0 / 2402 MHz

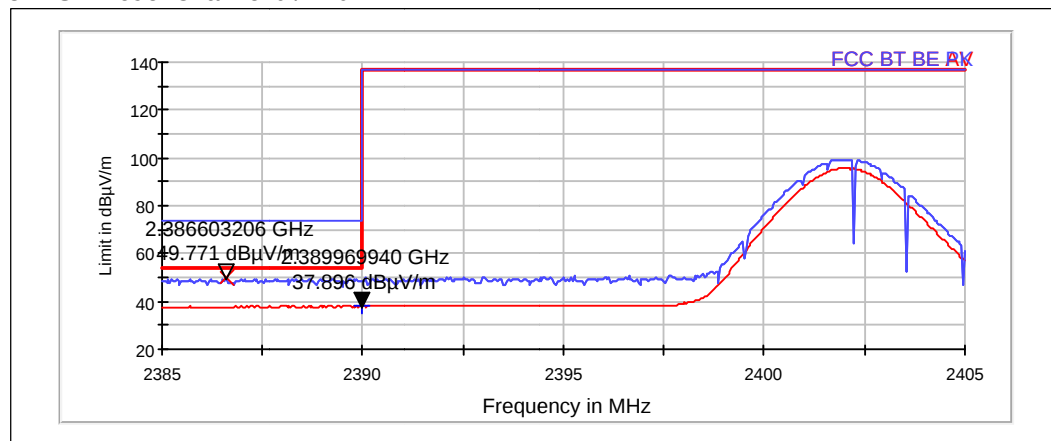


8DPSK mode. Hopping on, low end

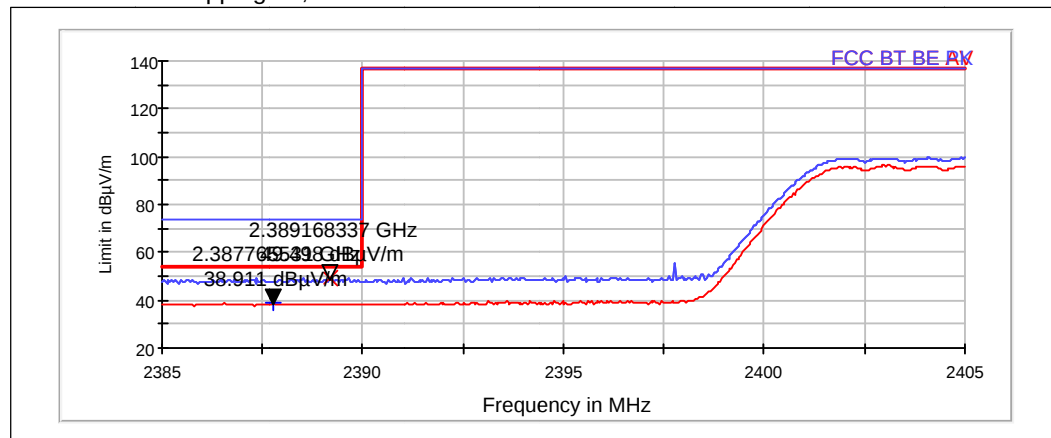

8DPSK mode. Channel 78 / 2480 MHz

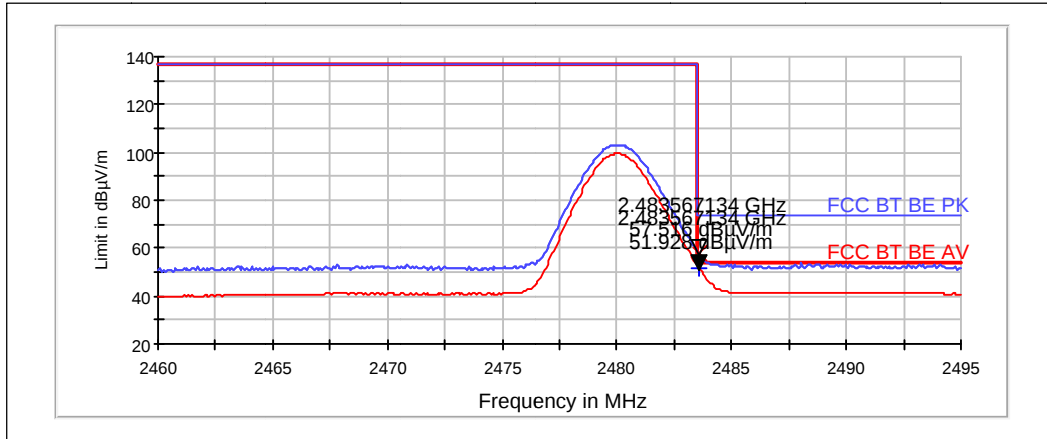


8DPSK mode. Hopping on, high end

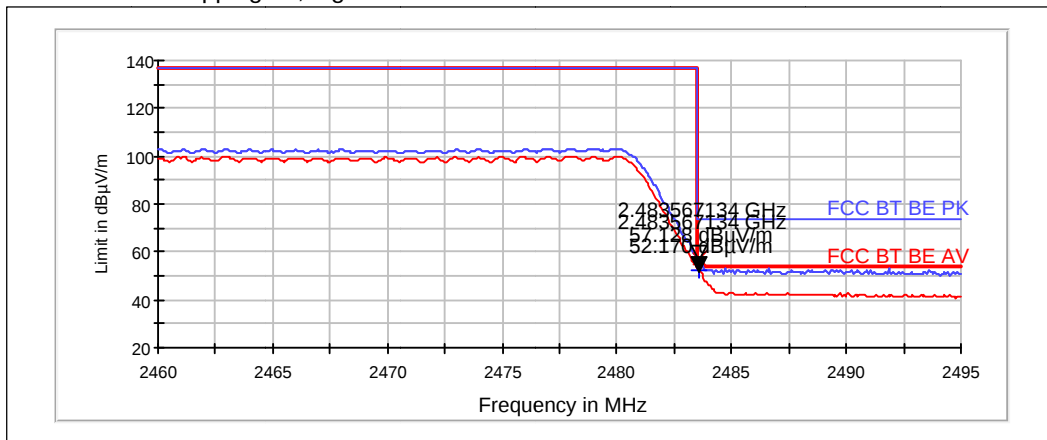

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 102.0
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

4.1. Test Setup

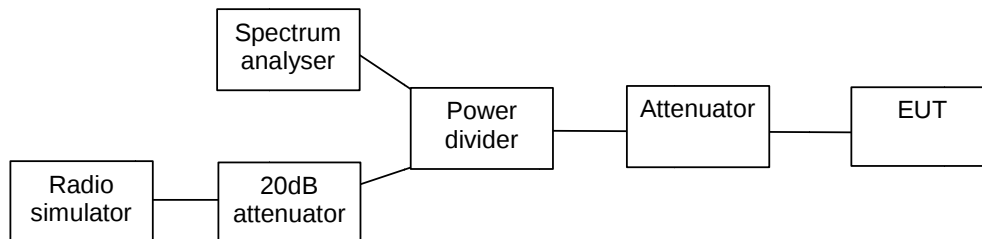

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

4.3. Bluetooth Test results

4.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

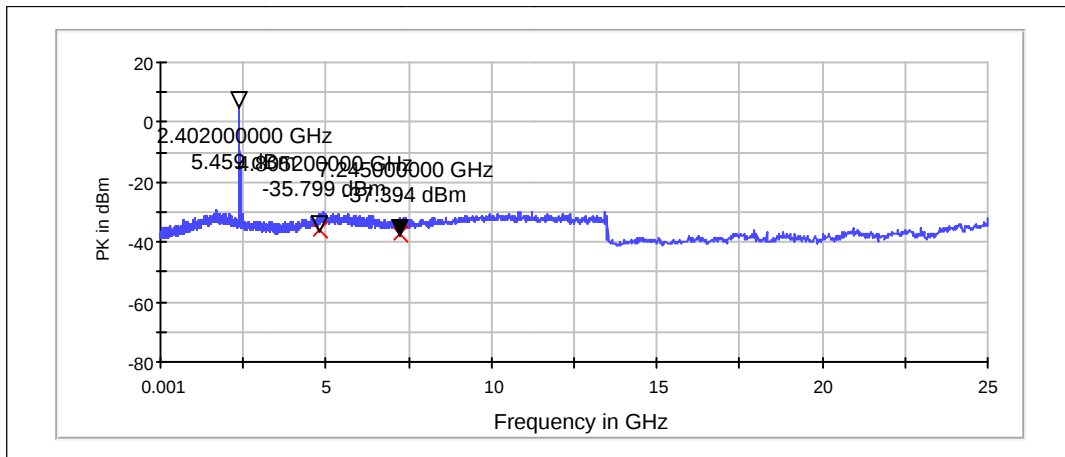

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4805.2	-35.8	PASSED
7245	-37.39	PASSED


Channel 40 / 2442 MHz

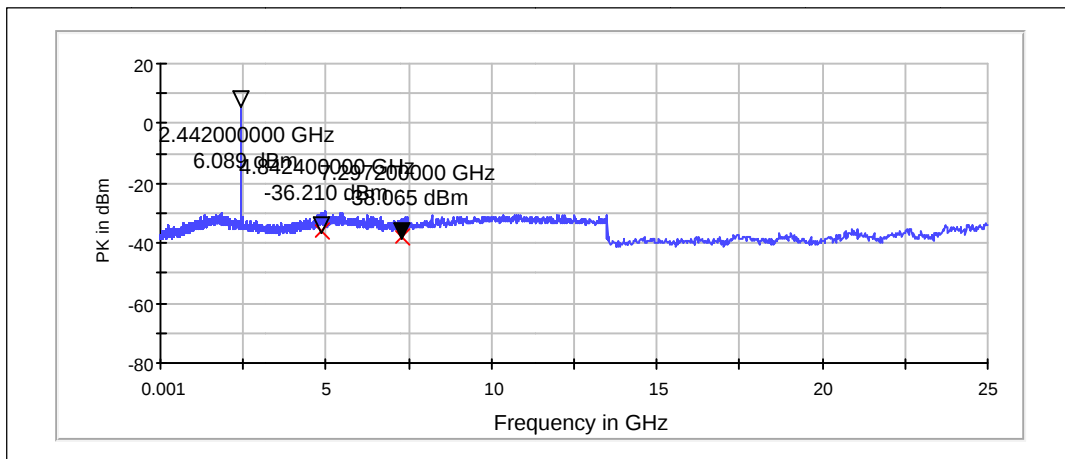

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4842.4	-36.21	PASSED
7297.2	-38.07	PASSED

Channel 78 / 2480 MHz

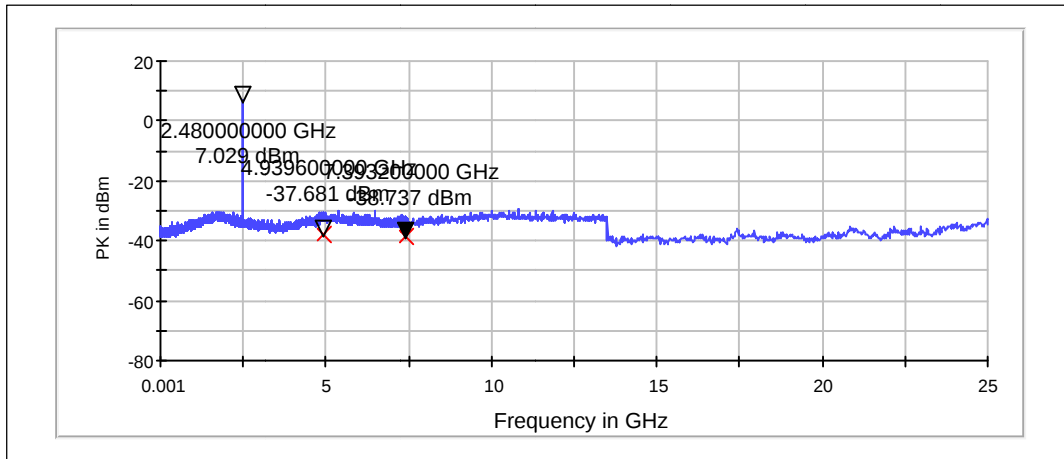


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4939.6	-37.68	PASSED
7393.2	-38.74	PASSED

4.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

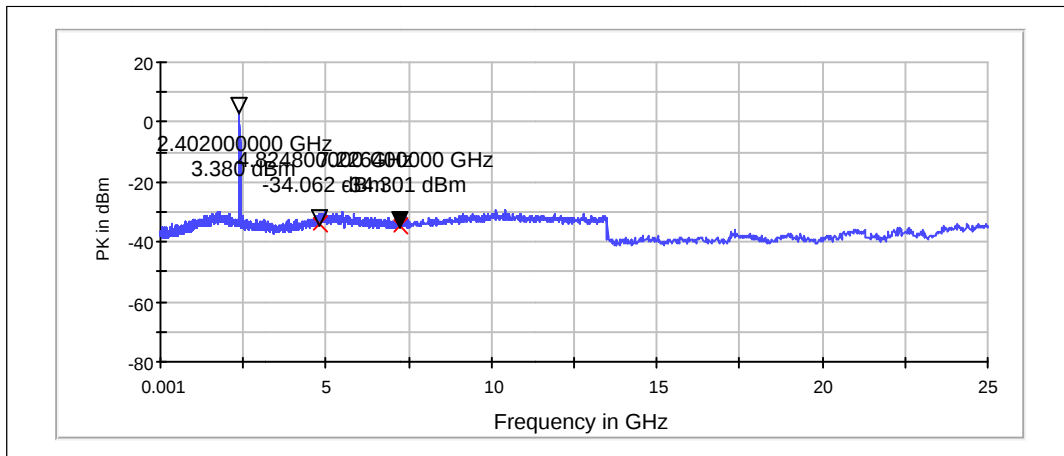

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4824.8	-34.06	PASSED
7226.4	-34.3	PASSED


Channel 40 / 2442 MHz

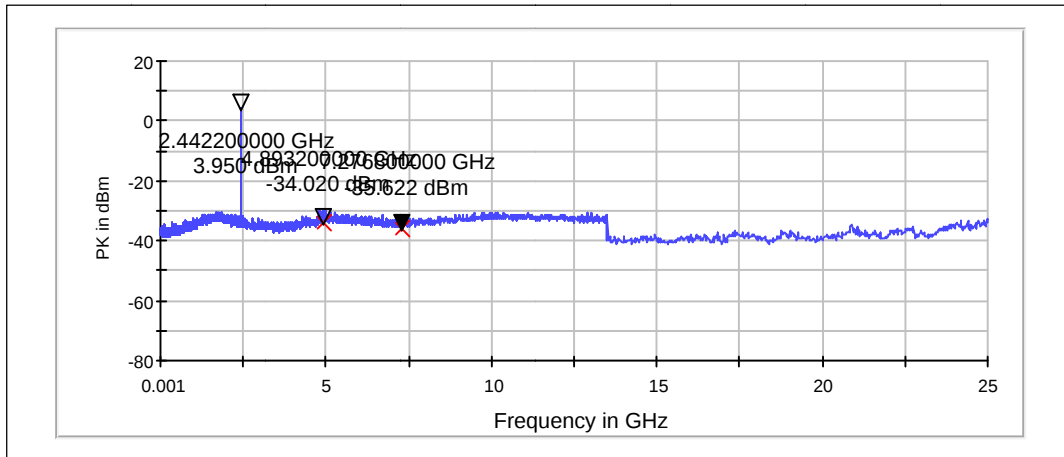

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4893.2	-34.02	PASSED
7276.8	-35.62	PASSED

Channel 78 / 2480 MHz

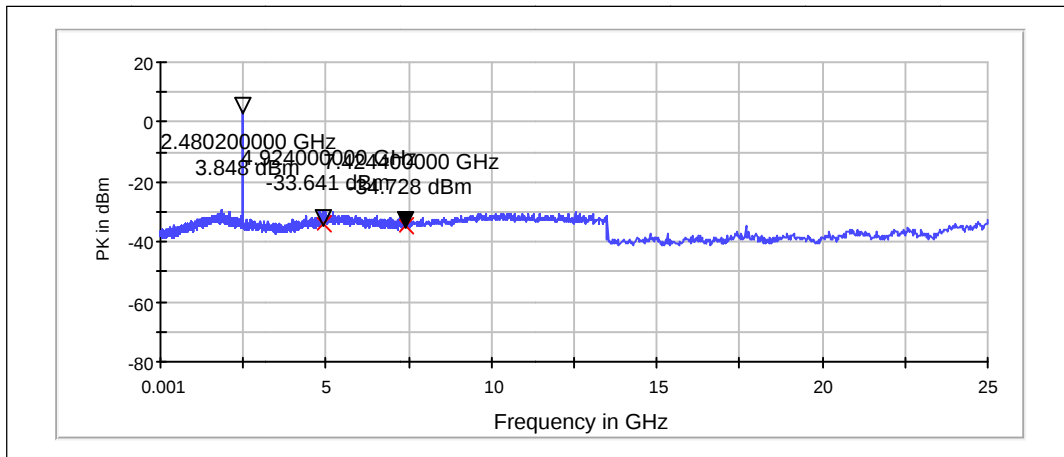


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4924	-33.64	PASSED
7424.4	-34.73	PASSED

5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-809, DUT 23485
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 98.9
Date of measurements	30-Sep-2011
Measured by	Christian Andersen

5.1.1 Test Setup

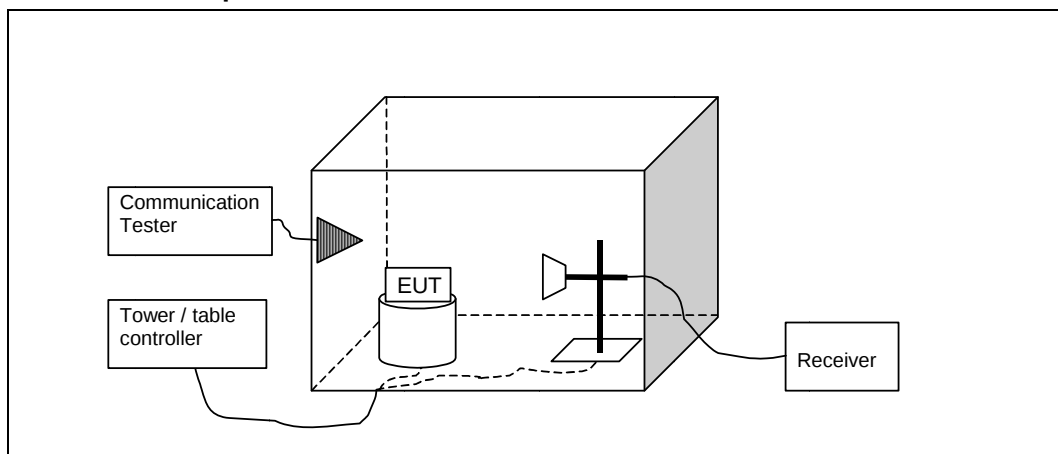

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.7	43.33	146.724	41.68	1.65	VERTICAL	Passed
7206.4	48.1	254.01	37.11	10.99	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.7	28.68	27.152	27.03	1.65	VERTICAL	Passed
7206.4	35.6	60.249	24.61	10.99	VERTICAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.3	20.95	11.153	25.65	-4.7	HORIZONTAL	Passed
69.099	23.35	14.699	44.72	-21.37	VERTICAL	Passed
69.199	23.23	14.506	44.56	-21.33	VERTICAL	Passed
103.026	27.44	23.545	43.54	-16.1	VERTICAL	Passed
103.045	27.44	23.556	43.54	-16.1	VERTICAL	Passed
103.138	27.33	23.259	43.41	-16.08	VERTICAL	Passed
103.156	26.93	22.195	43.01	-16.08	VERTICAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.313	39.78	97.544	40.93	-1.15	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.313	26.33	20.728	27.48	-1.15	VERTICAL	Passed

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.5	45.58	190.174	43.49	2.09	HORIZONTAL	Passed
7440.8	48.72	272.866	37.5	11.22	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.5	30.6	33.888	28.51	2.09	HORIZONTAL	Passed
7440.8	35.53	59.745	24.31	11.22	VERTICAL	Passed

5.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.3	42.2	128.884	40.55	1.65	HORIZONTAL	Passed
7206	48.5	265.981	37.5	11	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.3	28.32	26.053	26.67	1.65	HORIZONTAL	Passed
7206	35.46	59.258	24.46	11	VERTICAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
69.118	23.79	15.467	45.15	-21.36	VERTICAL	Passed
69.279	24.25	16.306	45.55	-21.3	VERTICAL	Passed
91.375	18.96	8.867	37.07	-18.11	HORIZONTAL	Passed
102.638	26.53	21.21	42.7	-16.17	VERTICAL	Passed
103.027	27.55	23.859	43.65	-16.1	VERTICAL	Passed
103.166	27.31	23.195	43.39	-16.08	VERTICAL	Passed
191.141	8.85	2.769	28.3	-19.45	HORIZONTAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3906.711	38.89	88.034	40.04	-1.15	VERTICAL	Passed
3940.385	39.82	97.949	40.93	-1.11	VERTICAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3906.711	26.26	20.547	27.41	-1.15	VERTICAL	Passed
3940.385	26.27	20.578	27.38	-1.11	VERTICAL	Passed

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.1	43.4	147.826	41.31	2.09	HORIZONTAL	Passed
7441.7	48.59	268.844	37.37	11.22	VERTICAL	Passed


Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.1	30.51	33.516	28.42	2.09	HORIZONTAL	Passed
7441.7	35.45	59.197	24.23	11.22	VERTICAL	Passed

6. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-809, DUT 23485
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 52 / 101.1
Date of measurements	13-Sep-2011
Measured by	Ruben Hansen

6.1.1 Test Setup

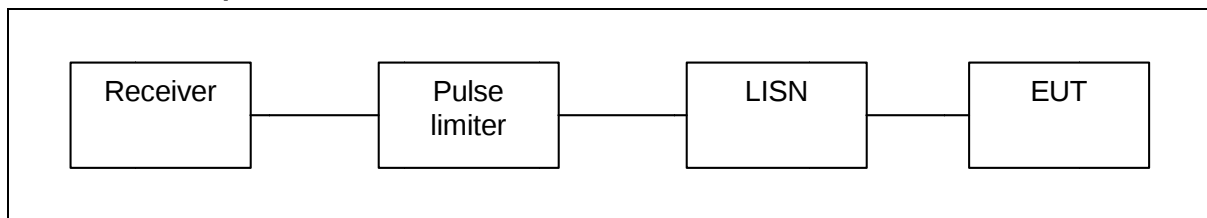

6.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V/m] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.3. Bluetooth Test Results

6.3.1 Bluetooth TX GFSK Mode

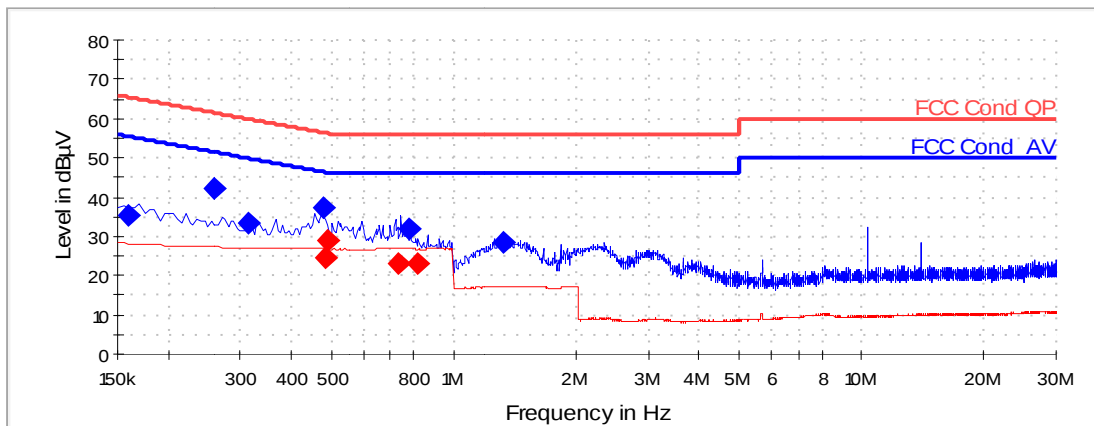

Quasi peak

Frequency [MHz]	U [dBµV]	Line	Result
0.26	42.31	L1	PASSED
0.16	35.556	L1	PASSED
0.315	33.502	N	PASSED
0.48	37.44	N	PASSED
1.325	28.466	N	PASSED


Average

Frequency [MHz]	U [dBµV]	Line	Result
0.485	24.56	N	PASSED
0.49	29.14	N	PASSED
0.73	22.835	N	PASSED
0.775	31.93	N	PASSED
0.815	23.297	N	PASSED

7. 20 dB bandwidth 15.247(a)(1), A8.1 (a)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 102.0
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

7.1. Test Setup

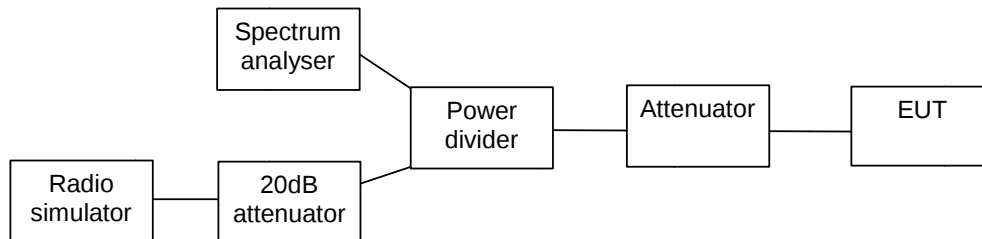

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	964
40 / 2442	996
78 / 2480	1008


Channel 0 / 2402 MHz

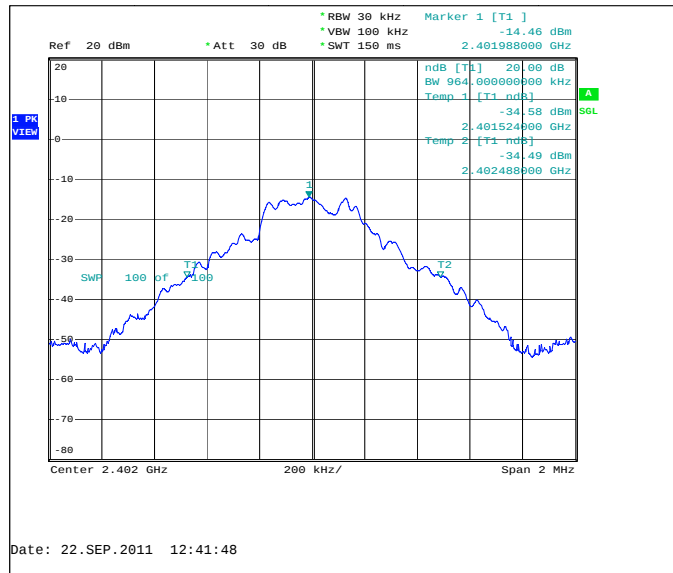

Channel 40 / 2442 MHz

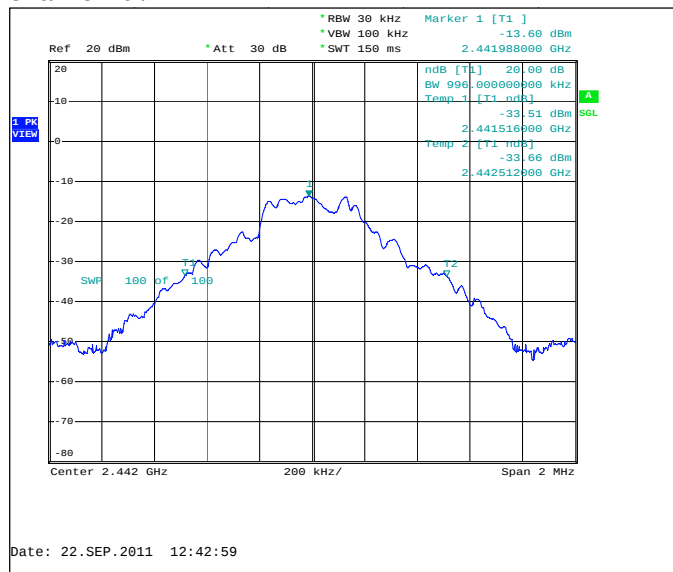


Channel 78 / 2480 MHz

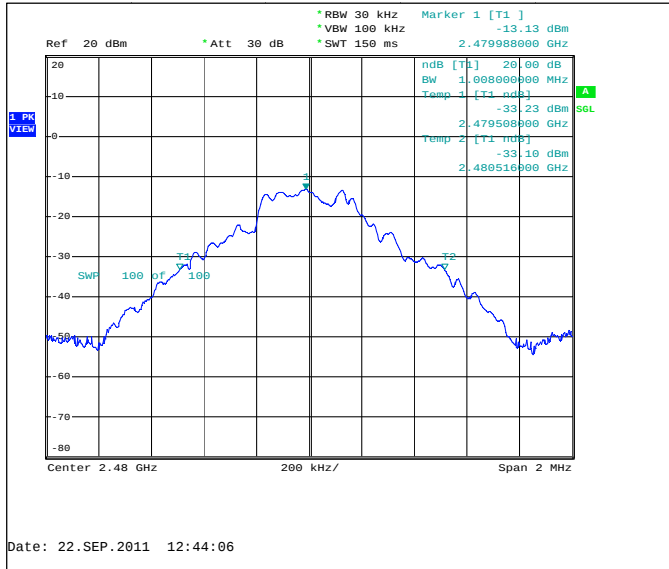


7.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1312
40 / 2442	1312
78 / 2480	1312


Channel 0 / 2402 MHz

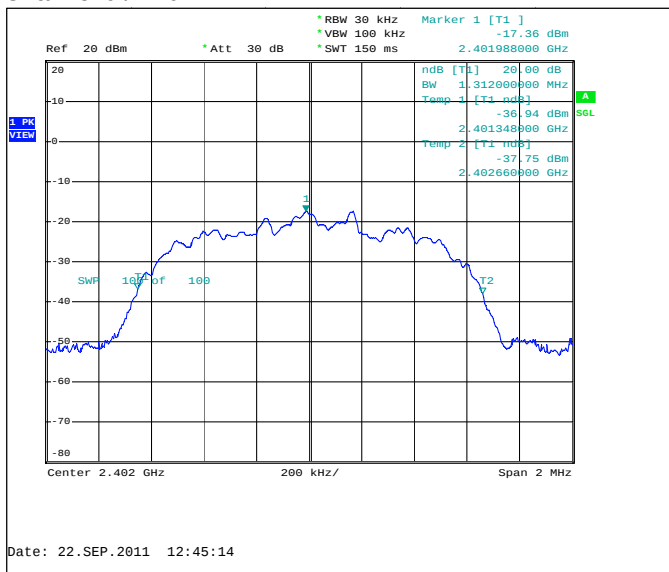

Channel 40 / 2442 MHz

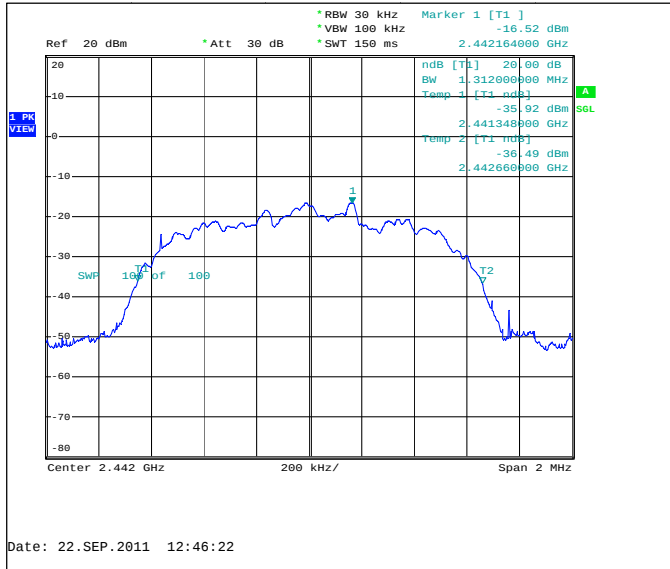

Channel 78 / 2480 MHz

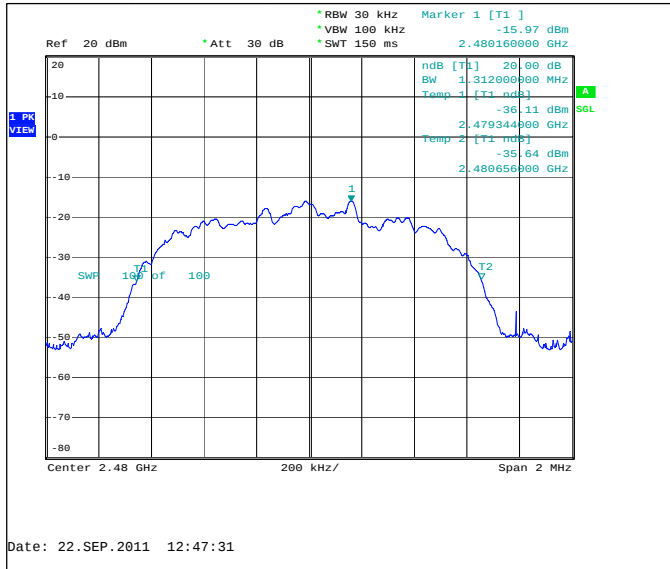


8. Carrier frequency separation

15.247(a)(1), A8.1 (b)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 102.0
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

8.1. Test Setup

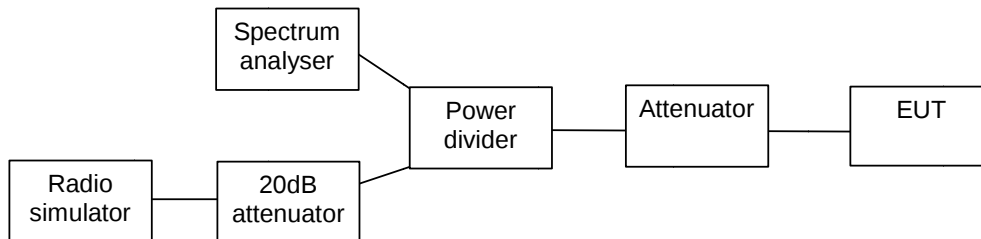

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.3. Bluetooth Test results

8.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1020	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

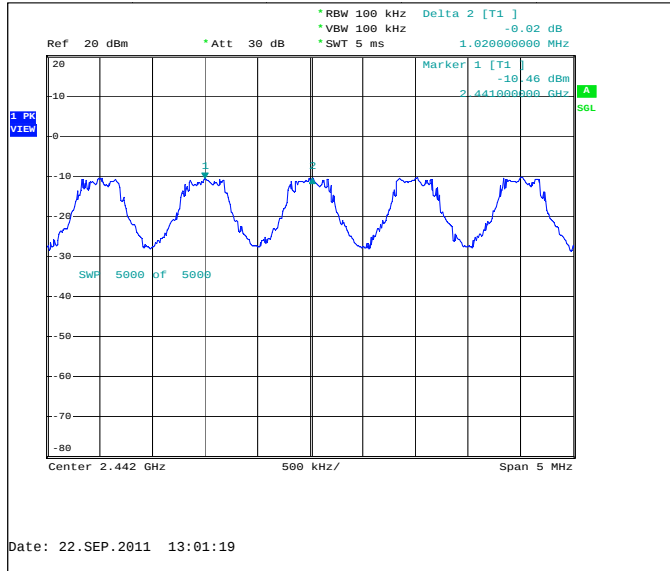

8.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
960	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

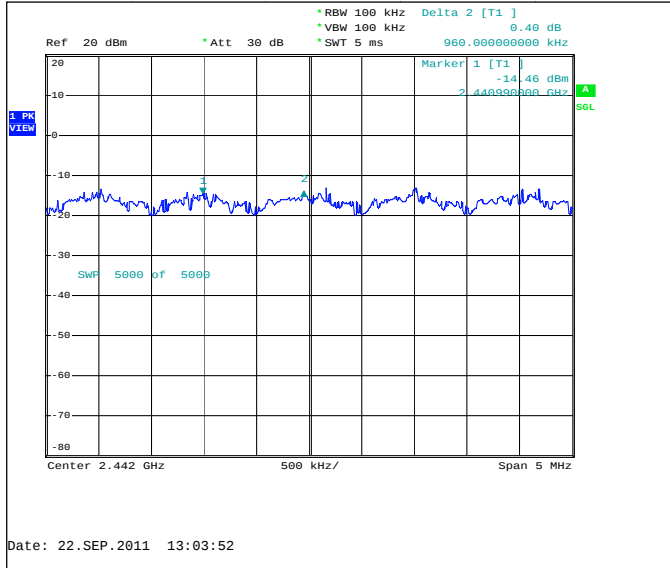


9. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 102.0
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

9.1. Test Setup

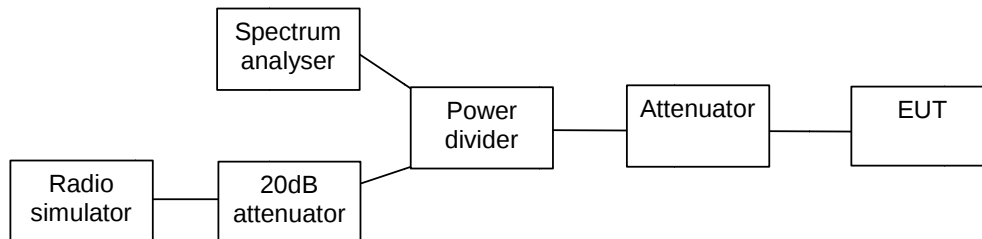

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
>= 15

9.3. Bluetooth Test results

9.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

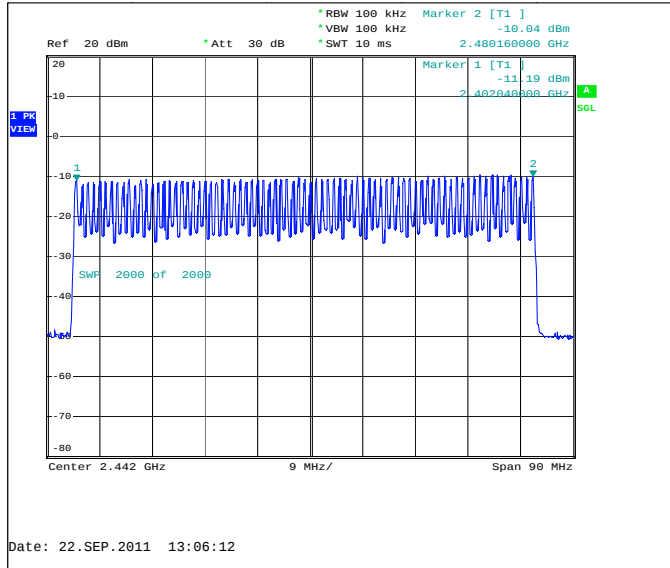

9.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
60	PASSED

Hopping on, number of hopping frequencies

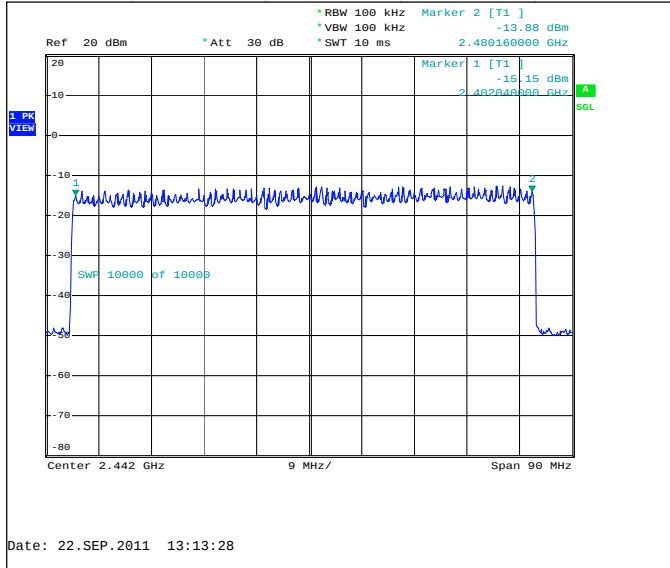


10. Time of occupancy

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 102.0
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

10.1. Test Setup

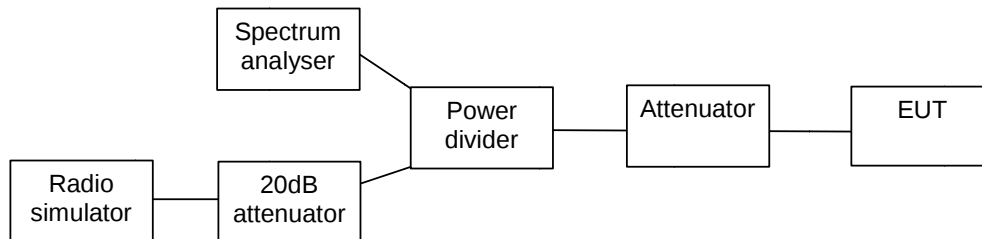

10.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
<= 0.4

10.3. Bluetooth Test results


10.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
83	2.92	0.242	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

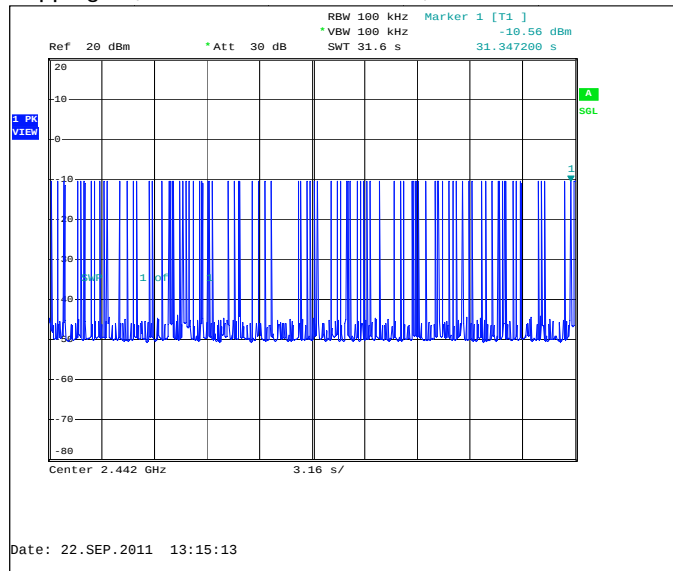


Hopping on, duration of one transmission, channel 40 / 2442 MHz

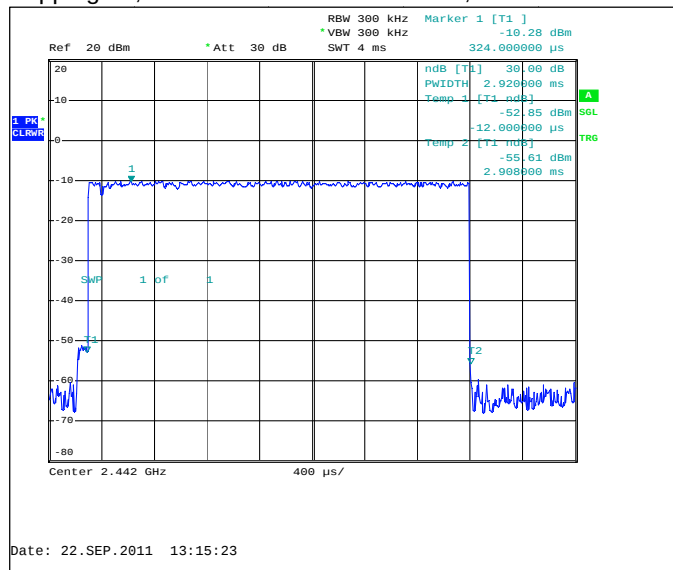


10.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
90	2.92	0.263	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

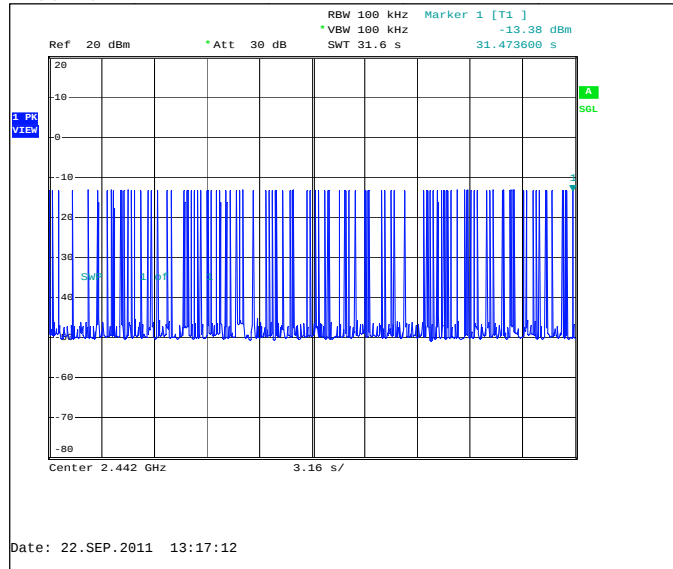

Hopping on, duration of one transmission, channel 40 / 2442 MHz

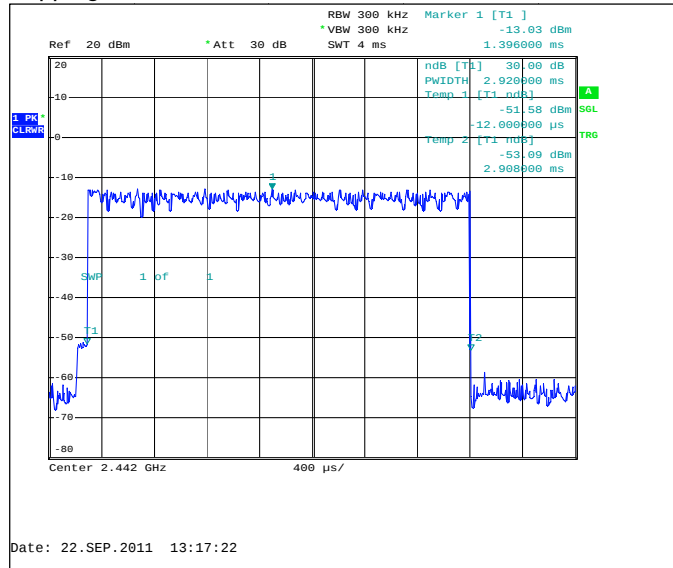

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
20682	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20739	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B