

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-809_15.docx	Date of Report:	13-Oct-2011
Number of pages:	18	Customer's Contact person:	Abadilla Victoria
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:			
IC recognition no.:			
Tested devices/ accessories:	Phone RM-809 / Battery BP-3L / USB Cable CA-101 / Headset WH-208 / AC Charger AC-10UC		
FCC ID:	QMNRM-809	IC:	661X-RM809
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27, TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	08-Sep-2011
Testing completed	23-Sep-2011
The customer's contact person	Abadilla Victoria
Test Plan referred to	T:\Projects\RM-809\TestPlan\RS_testplan_RM-809.xls
Notes	-
Document name	T:\Projects\RM-809\EMC\FCC22&24&27_RM-809_15.docx

1.1. EUT and Accessory Information

The EUT is a 10-band mobile phone:

GSM850/900/1800/1900/GPRS/EGPRS/Monopole without GND reflector (GSM/WCDMA)

WCDMA I/II(1900)/IV(1700)/V(850)/HSDPA/HSUPA/Monopole without GND reflector (GSM/WCDMA)

WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-809	004402/13/651115/5	0111	-	1600.2201.7720.11350	23476
Phone	RM-809	004402/13/651134/6	0111	-	1600.2201.7720.11350	23485
Battery	BP-3L	3932131282140100897;0670635	-	-	-	23467
USB Cable	CA-101	07306349204X1220633	-	-	-	23452
Headset	WH-208	-	-	-	-	23454
AC Charger	AC-10UC	3997910023090100772;0675474	-	-	-	23458

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§27.53(g)	6.5	Band edge compliance	NP
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24/27 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99% occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1).....	5
2.1. Test Setup	5
2.2. Test method and limit	5
2.3. GSM 1900 Test results	6
2.4. GSM 850 Test results	7
2.5. WCDMA 1900 Test results	8
2.6. WCDMA 1700 Test results	9
2.7. WCDMA 850 Test results	10
3. Spurious radiated emissions (FCC §22.917(a), §2.1053, RSS-132 4.5).....	11
3.2. Test method and limit	11
3.3. GSM850 TX Test results	13
3.4. GSM850-E1 TX Test results	13
3.5. GSM1900 TX Test results	13
3.6. GSM1900-E1 TX Test results	13
3.7. WCDMA 1900 (Band II) TX Test results	13
3.8. WCDMA 1700 (Band IV) TX Test results	14
3.9. WCDMA 850 (Band V) TX Test results	14
4. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)	15
4.1. Test Setup	15
4.2. Test method and limit	15
4.3. GSM 1900 Test results	16
4.4. GSM 850 Test results	16
4.5. WCDMA 1700 Test results	16
5. Test Equipment	17
5.1. Conducted measurements	17
5.2. Radiated measurements	17

2. 99% occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 48 / 102.1
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

2.1. Test Setup

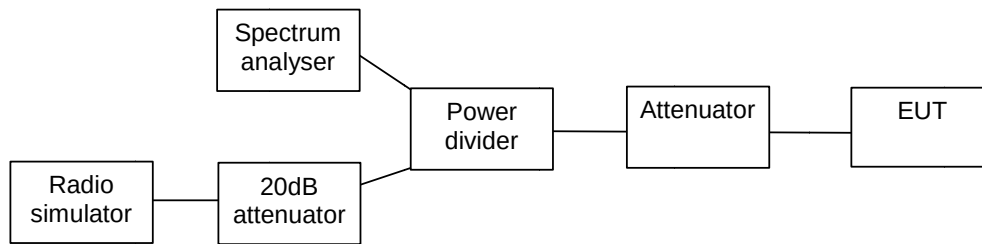


2.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standard RSS-GEN.


2.3. GSM 1900 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
GSM	244
GSM-E	250

GSM mode, channel 661 / 1880.0 MHz

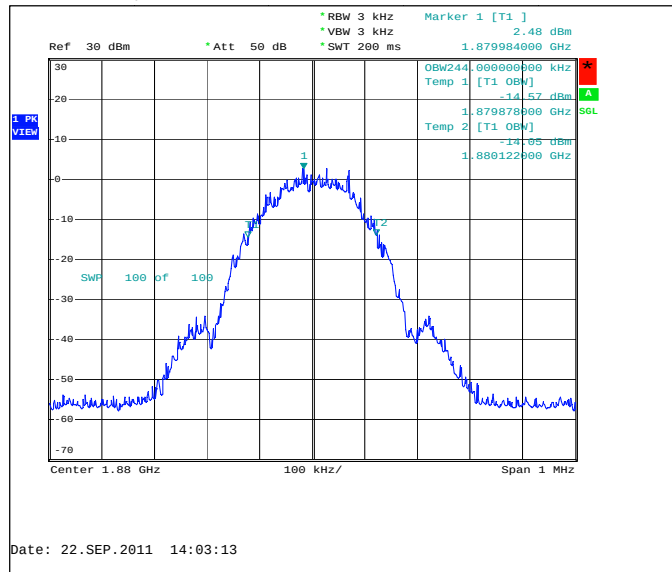


GSM-E mode, channel 661 / 1880.0 MHz

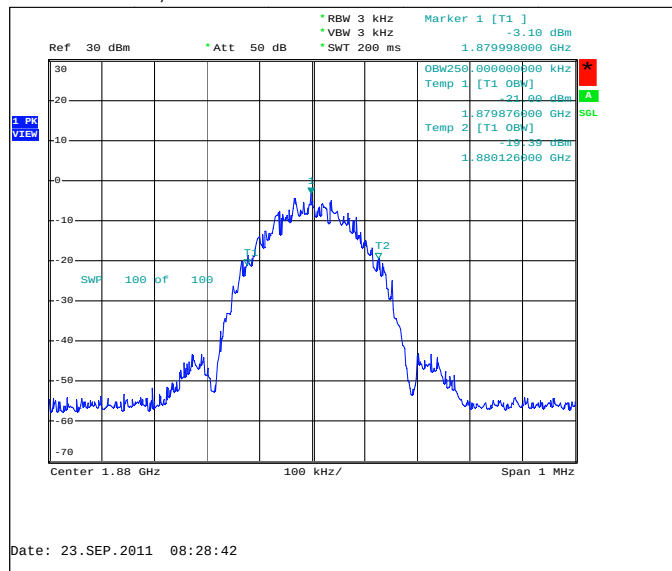


2.4. GSM 850 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
GSM	242
GSM-E	242

GSM mode, channel 190 / 836.6 MHz

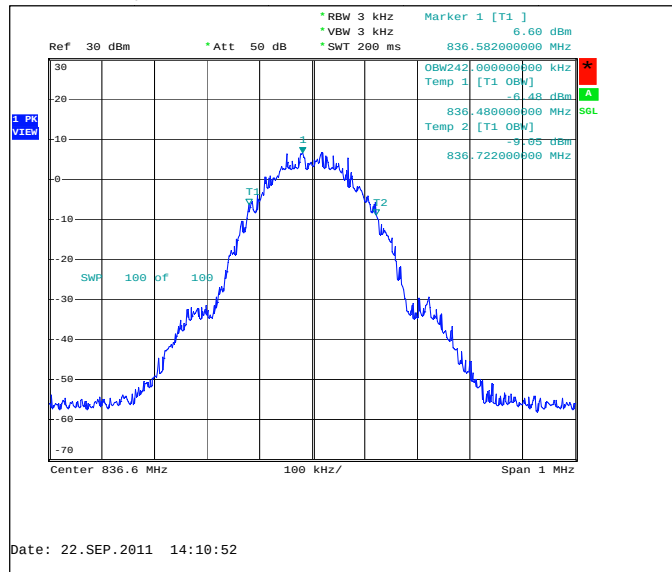


GSM-E mode, channel 190 / 836.6 MHz

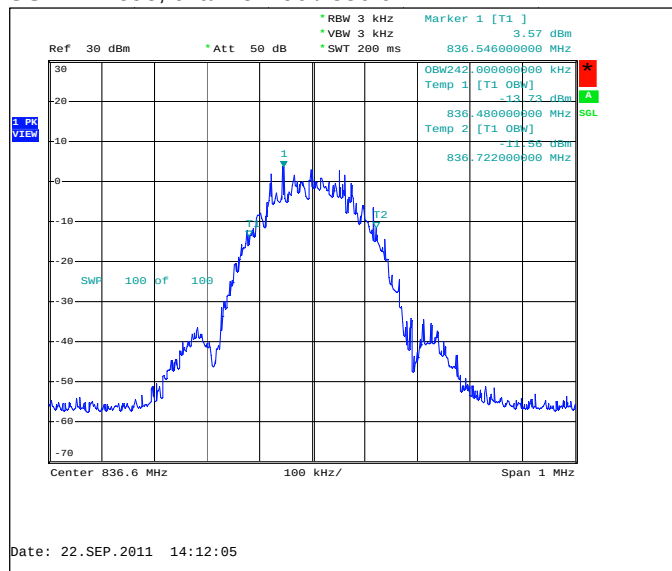

2.5. WCDMA 1900 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
FDD	4160


FDD mode, Channel 9400 / 1880.0 MHz

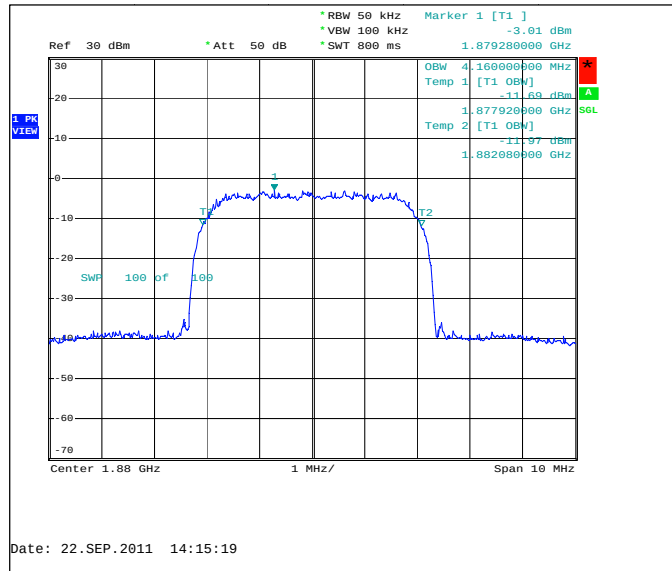

2.6. WCDMA 1700 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
FDD	4160


FDD mode, Channel 1412 / 1732.4 MHz

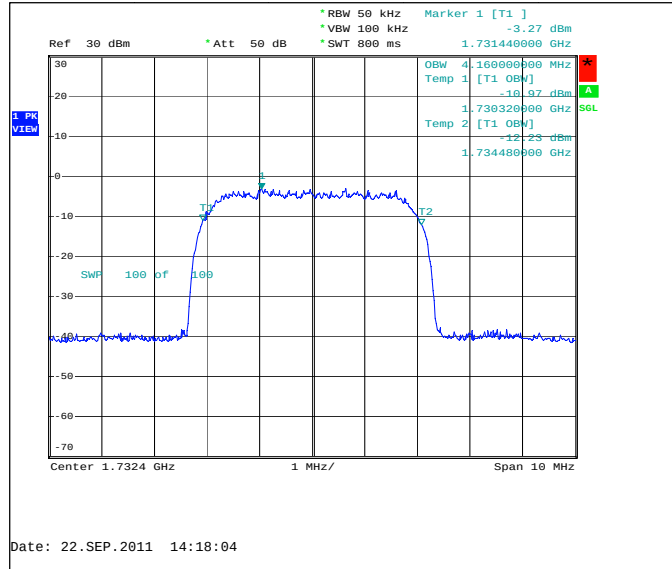

2.7. WCDMA 850 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
FDD	4160


FDD mode, Channel 4175 / 835.0 MHz

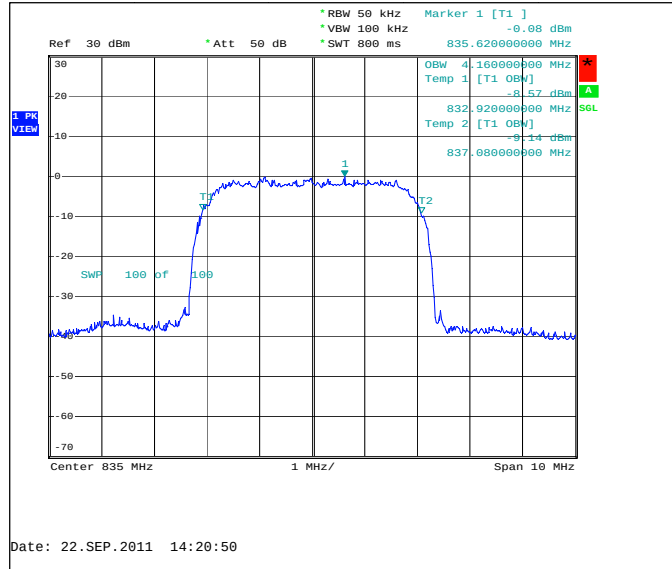

3. Spurious radiated emissions (FCC §22.917(a), §2.1053, RSS-132 4.5)

EUT with DUT number	RM-809, DUT 23485
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 102.0
Date of measurements	22-Sep-2011
Measured by	Christian Andersen

3.1.1 Test Setup

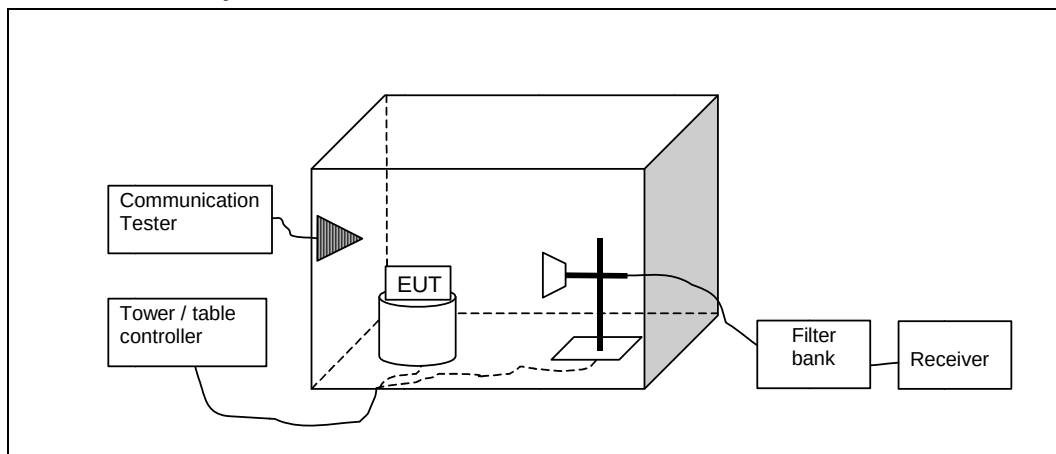

3.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used.

The measurement results are obtained as described below:

$$P [dBm] = P_{SUBST TX} + G_{SUBST TX ANT} - L_{SUBST CABLE}$$

FCC Part 22/24/27 Compliance Test Report
/ Template Version 15.0

FCC22&24&27_RM-809_15.docx
Copyright © TCC Nokia

Where $P_{SUBST\ TX}$ is signal generator level, which produces the same receiver reading P_{MEAS} in dBm as EUT. $G_{SUBST\ TX\ ANT}$ is substitution antenna gain and $L_{SUBST\ CABLE}$ is the loss of the cable between the signal generator and the substitution antenna.

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13

3.3. GSM850 TX Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
1673.304	-48.07	0.01560	-53.54	-20	-21.59	7.46	3.58	HORIZONTAL	Passed
2495.23	-52.17	0.00607	-63.3	-20	-27.1	8.33	4.3	HORIZONTAL	Passed
3342.806	-59.50	0.00112	-66.88	-20	-22.3	9.94	4.86	HORIZONTAL	Passed

3.4. GSM850-E1 TX Test results

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
1673.166	-52.95	0.00507	-58.42	-20	-21.59	7.46	3.58	HORIZONTAL	Passed
2504.389	-51.69	0.00678	-62.82	-20	-27.1	8.33	4.3	HORIZONTAL	Passed
3344.188	-58.66	0.00136	-66.04	-20	-22.3	9.94	4.86	HORIZONTAL	Passed

3.5. GSM1900 TX Test results

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
9382.565	-44.29	0.03724	-68.12	-20	-41.6	11.53	9.3	HORIZONTAL	Passed
9796.152	-42.86	0.05176	-68.41	-20	-43.6	11.45	9.5	HORIZONTAL	Passed

3.6. GSM1900-E1 TX Test results

EGPRS mode, Channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
9377.495	-44.75	0.03350	-68.58	-20	-41.6	11.53	9.3	HORIZONTAL	Passed
9778.858	-43.55	0.04416	-69.1	-20	-43.6	11.45	9.5	HORIZONTAL	Passed

3.7. WCDMA 1900 (Band II) TX Test results

FDD mode, Channel 9400 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
9376.633	-44.04	0.03945	-67.87	-20	-41.6	11.53	9.3	HORIZONTAL	Passed
9708.818	-42.71	0.05358	-68.26	-20	-43.6	11.45	9.5	VERTICAL	Passed

3.8. WCDMA 1700 (Band IV) TX Test results

FDD mode, 1412 / 1732.4 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
1713.749	-38.22	0.15066	-45.84	-20	-21.59	9.61	3.58	HORIZONTAL	Passed

3.9. WCDMA 850 (Band V) TX Test results


FDD mode, 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
1668.53	-52.64	0.00545	-58.07	-20	-21.59	7.41	3.57	HORIZONTAL	Passed
2516.914	-51.74	0.00670	-62.91	-20	-27.1	8.37	4.3	HORIZONTAL	Passed
3335.11	-59.01	0.00126	-66.39	-20	-22.3	9.94	4.86	HORIZONTAL	Passed

4. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-809, DUT 23476
Accessories with DUT numbers	BP-3L, DUT 23467 ; CA-101, DUT 23452 ; WH-208, DUT 23454 ; AC-10UC, DUT 23458
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 48 / 102.1
Date of measurements	22-Sep-2011
Measured by	Ruben Hansen

4.1. Test Setup

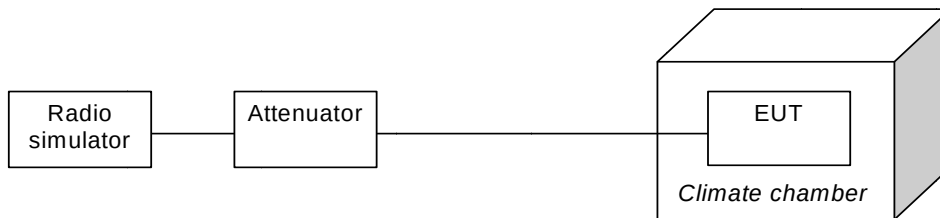

4.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standard RSS-132, RSS-133 and RSS-139 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
The EUT is placed in the chamber.
The EUT is set in idle mode for 15 minutes.
The EUT is set to transmit.
The transmit frequency error was measured immediately.
The steps c - e were repeated for each temperature. Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
+/- 2.5

4.3. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	1880	-13.82	-0.0074	PASSED
40	1880	-5.36	-0.0029	PASSED
30	1880	-2.97	-0.0016	PASSED
20	1880	10.72	0.0057	PASSED
10	1880	8.72	0.0046	PASSED
0	1880	42.55	0.0226	PASSED
-10	1880	47.27	0.0251	PASSED
-20	1880	22.15	0.0118	PASSED
-30	1880	29.19	0.0155	PASSED

4.4. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	836.6	-17.11	-0.0205	PASSED
40	836.6	-3.1	-0.0037	PASSED
30	836.6	-24.15	-0.0289	PASSED
20	836.6	-21.7	-0.0259	PASSED
10	836.6	-5.1	-0.0061	PASSED
0	836.6	5.49	0.0066	PASSED
-10	836.6	9.49	0.0113	PASSED
-20	836.6	10.78	0.0129	PASSED
-30	836.6	-0.77	-0.0009	PASSED

4.5. WCDMA 1700 Test results

FDD mode, Channel 1412 / 1732.4 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	1732.4	-4.73023	-0.0027	PASSED
40	1732.4	-30.77698	-0.0178	PASSED
30	1732.4	0.47302	0.0003	PASSED
20	1732.4	0.2594	0.0002	PASSED
10	1732.4	4.80652	0.0028	PASSED
0	1732.4	-11.73401	-0.0068	PASSED
-10	1732.4	-13.3667	-0.0077	PASSED
-20	1732.4	-19.31763	-0.0112	PASSED
-30	1732.4	-5.09644	-0.0029	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
20682	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20739	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B