

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-845_26.docx	Date of Report:	17-Oct-2012
Number of pages:	11	Customer's Contact person:	Abadilla Victoria
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-845 / Battery BP-4W / WLC Back Cover CC-3059		
FCC ID:	QMNRM-845	IC:	661X-RM845
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-129 (Issue 2, September 1999) . Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, System Manager, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	27-Jul-2012
Testing completed	10-Oct-2012
The customer's contact person	Abadilla Victoria
Test Plan referred to	T:\Projects\RM-845\TestPlan\RS_testplan_RM-845_CC-3059.xlsm
Notes	-
Document name	T:\Projects\RM-845\EMC\FCC22&24&27_RM-845_26.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/CDMA/WCDMA/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-845	352875050016806	0209	-	1525.0003.8422.9710.12271	16613
Battery	BP-4W	-	-	-	-	16667
WLC Back Cover	CC-3059	NJ012252K02V04	-	-	-	16743
Wireless Charger	DT-900	06770932225w00002	4.4	1.0	2.3.0.4995	16615
AC-charger	AC-301E	40904922165802014930675638	0.34	0.12	-	16616

1.2. Summary of Test Results

CDMA800:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

FCC Part 22/24 Compliance Test Report
/ Template Version 15.0

FCC22&24&27_RM-845_26.docx
Copyright © TCC Nokia

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

CDMA1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE700 Upper (Band 13):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046 (a)	N/A	Conducted RF output power	NP
§27.50(b)(10)	N/A	Radiated RF output power	NP
§2.1049(h)	N/A	99 % occupied bandwidth	NP
§27.53(c)(2)(4)	N/A	Band edge compliance	NP
§27.53(c)(2)(4),(f), §2.1051	N/A	Spurious emissions at antenna terminals	NP
§27.53(c)(2)(4),(f), §2.1053	N/A	Spurious radiated emissions	PASSED
§2.1055(a)	N/A	Frequency stability, temperature variation	NP
§2.1055(d)	N/A	Frequency stability, voltage variation	NP
N/A	N/A	Peak to average power ratio	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5).....	5
2.2. Test method and limit.....	5
2.3. GSM850 TX test results	6
2.4. GSM1900 TX test results	6
2.5. GSM850-E1 TX test results.....	7
2.6. GSM1900-E1 TX test results.....	7
2.7. WCDMA 1900 (Band II) test results	7
2.8. WCDMA 850 (Band V) test results.....	8
2.9. LTE700 Upper (Band 13) test results.....	8
2.10. CDMA800 TX test results.....	8
2.11. CDMA1900 TX test results.....	9
3. Test Equipment.....	10
3.1. Conducted measurements	10
3.2. Radiated measurements	10

2. Spurious radiated emissions

(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-845, DUT 16613
Accessories with DUT numbers	BP-4W, DUT 16667 ; CC-3059, DUT 16743
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 46
Date of measurements	03-Oct-2012
Measured by	Kalle Hannila / Jari Keto

2.1.1 Test setup

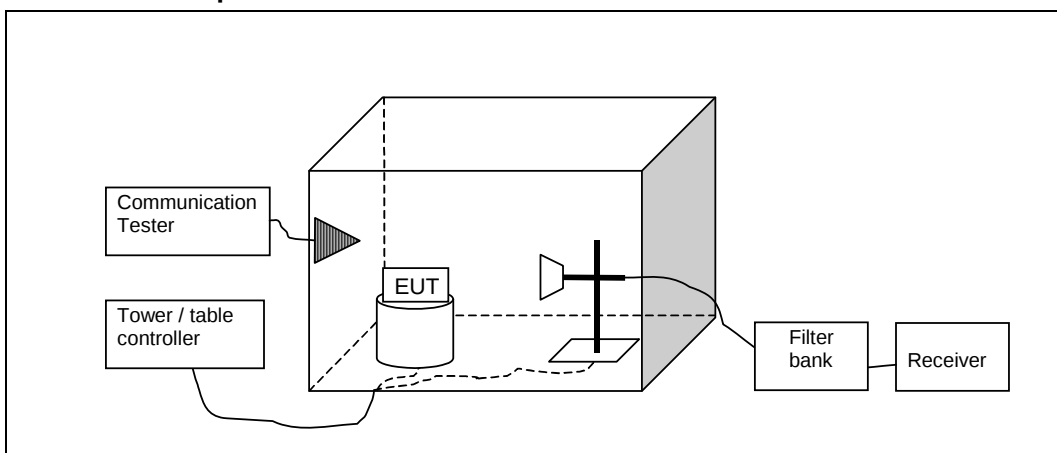

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used.

The measurement results are obtained as described below:

$$P [dBm] = P_{SUBST\ TX} + G_{SUBST\ TX\ ANT} - L_{SUBST\ CABLE}$$

Where $P_{SUBST\ TX}$ is signal generator level, which produces the same receiver reading P_{MEAS} in dBm as EUT. $G_{SUBST\ TX\ ANT}$ is substitution antenna gain and $L_{SUBST\ CABLE}$ is the loss of the cable between the signal generator and the substitution antenna.

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
CDMA800 / / WCDMA850	30 - 8500	-13
CDMA1900 / GSM1900 / WCDMA1900	30 - 18000	-13

2.3. GSM850 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
823.895	-54.7	0.00339	-55.08	0.38	HORIZONTAL	PASSED
848.6	-51.83	0.00656	-50.39	-1.44	VERTICAL	PASSED
848.62	-52.16	0.00608	-50.72	-1.44	VERTICAL	PASSED
848.661	-52.2	0.00602	-50.75	-1.45	VERTICAL	PASSED
848.681	-51.65	0.00685	-50.2	-1.45	VERTICAL	PASSED
848.722	-53.58	0.00438	-51.79	-1.79	HORIZONTAL	PASSED

2.4. GSM1900 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
9523.768	-39.84	0.10382	-66.24	26.4	HORIZONTAL	PASSED
9527.134	-40.02	0.09963	-66.48	26.46	HORIZONTAL	PASSED
9600.561	-38.57	0.13906	-65.68	27.11	VERTICAL	PASSED
9855.792	-39.25	0.11882	-66.02	26.77	VERTICAL	PASSED
9897.034	-39.86	0.10335	-66.58	26.72	HORIZONTAL	PASSED
9983.557	-38.05	0.15675	-65.25	27.2	HORIZONTAL	PASSED

2.5. GSM850-E1 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
823.78	-66.58	0.00022	-66.96	0.38	HORIZONTAL	PASSED
848.757	-71.37	7E-05	-69.91	-1.46	VERTICAL	PASSED
848.873	-70	0.0001	-68.52	-1.48	VERTICAL	PASSED
848.916	-63.72	0.00043	-61.9	-1.82	HORIZONTAL	PASSED
849.402	-70.27	9E-05	-68.69	-1.58	VERTICAL	PASSED
855.414	-75.62	3E-05	-74.12	-1.5	VERTICAL	PASSED

2.6. GSM1900-E1 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
9510.962	-37.49	0.17816	-64.21	26.72	HORIZONTAL	PASSED
9566.954	-40.29	0.09356	-66.97	26.68	HORIZONTAL	PASSED
9632.325	-38.84	0.13059	-65.74	26.9	VERTICAL	PASSED
9861.102	-39.35	0.11614	-66.19	26.84	VERTICAL	PASSED
9872.325	-39.8	0.10481	-66.38	26.58	HORIZONTAL	PASSED
9984.79	-38.59	0.13832	-65.79	27.2	HORIZONTAL	PASSED

2.7. WCDMA 1900 (Band II) test results

Channel 9400 / 1880.0 MHz

FDD mode, Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
9232.886	-40.11	0.09752	-65.82	25.71	VERTICAL	PASSED
9602.425	-38.72	0.13431	-65.83	27.11	VERTICAL	PASSED
9695.651	-38.91	0.12865	-65.48	26.57	VERTICAL	PASSED
9824.108	-39.17	0.12117	-65.63	26.46	VERTICAL	PASSED
9897.214	-38.53	0.14022	-65.36	26.83	VERTICAL	PASSED
9954.77	-38.27	0.1489	-65.37	27.1	VERTICAL	PASSED

2.8. WCDMA 850 (Band V) test results

Channel 4175 / 835.0 MHz

FDD mode, Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
848.041	-45.54	0.02792	-80.17	34.63	HORIZONTAL	PASSED
848.517	-46.09	0.02462	-80.67	34.58	HORIZONTAL	PASSED
850.247	-46.07	0.02474	-80.4	34.33	HORIZONTAL	PASSED
949.123	-41.61	0.06909	-80.78	39.17	VERTICAL	PASSED
959.294	-40.07	0.09845	-80.39	40.32	HORIZONTAL	PASSED
961.698	-40.1	0.09772	-80.27	40.17	HORIZONTAL	PASSED

2.9. LTE700 Upper (Band 13) test results

Channel 23230 / 782 MHz

FDD, CBW 5MHz, QPSK, 1 RB, RMS detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
749.058	-43.11	0.04892	-77.47	34.36	VERTICAL	PASSED
769.5	-71.04	8E-05	-107	35.96	VERTICAL	PASSED
803.092	-71.07	8E-05	-107	35.93	HORIZONTAL	PASSED
1564.461	-66.04	0.00025	-71.44	5.4	HORIZONTAL	PASSED
1564.469	-65.81	0.00026	-71.21	5.4	HORIZONTAL	PASSED
2352.032	-72.59	6E-05	-82.57	9.98	VERTICAL	PASSED
2984.99	-68.61	0.00014	-83.48	14.87	VERTICAL	PASSED
3118	-76.3	2E-05	-84.5	8.2	HORIZONTAL	PASSED
7529.559	-63.48	0.00045	-84.5	21.02	HORIZONTAL	PASSED

2.10. CDMA800 TX test results

Channel 384 / 836.52 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
1674.649	-57.02	0.00199	-63.08	6.06	VERTICAL	PASSED
1687.154	-57.2	0.00191	-63.41	6.21	VERTICAL	PASSED
2522.986	-52.45	0.00569	-64.27	11.82	HORIZONTAL	PASSED
3337.134	-58.93	0.00128	-66.22	7.29	HORIZONTAL	PASSED
3347.595	-58.82	0.00131	-65.66	6.84	HORIZONTAL	PASSED

2.11. CDMA1900 TX test results

Channel 600 / 1880 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
9313.006	-40.46	0.08997	-65.19	24.73	HORIZONTAL	PASSED
9361.423	-39.66	0.10804	-64.64	24.98	VERTICAL	PASSED
9635.571	-40.4	0.0912	-65.54	25.14	VERTICAL	PASSED
9677.415	-39.7	0.10725	-65.41	25.71	VERTICAL	PASSED
9811.403	-39.47	0.11288	-65.09	25.62	HORIZONTAL	PASSED
9862.585	-40.71	0.08494	-66.25	25.54	VERTICAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6038	Data Logger	Testo 580	Testo	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
6015	Receiver	ESI	R&S	-
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
1759	LISN 50 µH	ESH3-Z5	R&S	-
2390	Directional Coupler	DC2600	AR	-
1916	Communication Tester	CMTA84	R&S	-
6012	CDN	CDN USB/c	Teseq	-
2388	Bluetooth Tester	CBT	R&S	-
6046	Attenuator 10dB	8493C	Agilent	-
6047	Attenuator 20dB	8493C	Agilent	-
6036	Data Logger	175-H2	Testo	-
6045	Power Splitter	11667B	Agilent	-
6039	USB Interface	5541765	Testo	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6120	Thermal Chamber	WT 20/40	Weiss	-
6121	Power Splitter	HP11667B	Agilent	-
6122	Power Splitter	HP11667B	Agilent	-
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	-
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	-
2359	Temperature Test Chamber	VT4002	Vötsch	-
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
1999	Receiver	ESIB26	R&S	-
2352	Spectrum Analyzer	FSP-30	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	-
2039	Power Supply	PL330QMD	Thurlby	-
1992	Signal Generator	83630B	Agilent	-
2206	Signal Generator	SMX	R&S	-

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6038	Data Logger	Testo 580	Testo	-
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-

Eq. No	Equipment	Type	Manufacturer	Used in
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
1988	Antenna	HL562	R&S	-
-	RF immunity / Emission Software	EMC32	R&S	-
1917	Communication Tester	CMTA84	R&S	-
2388	Bluetooth Tester	CBT	R&S	-
6037	Data Logger	175-H2	Testo	-
6039	USB Interface	5541765	Testo	-
6087	Antenna	BBHA 9120D	Scharzbeck	-
6088	Antenna	VUBA 9117	Scharzbeck	-
6089	Antenna	HFH2-Z2	R&S	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6115	Open switch and control unit	OSP 130	R&S	-
6116	Open switch and control unit	OSP 150	R&S	-
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	-
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	-
2140	Antenna	EMCO93110B	EMCO	-
2142	Antenna	3146	EMCO	-
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
2176	CDN	CDN 801-M3	Lüthi	-
2027	CDN	M2 (modified) DC1	MEB	-
2028	CDN	M3 (modified) DC2	MEB	-
1984	Antenna	BBHA 9120 D	Schwarzbeck	-
6017	Antenna	SBA 9113	Schwarzbeck	-
2009	Signal Generator	SMP 22	R&S	-
2029	Power Supply	PL330	Thurlby	-
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	-
2353	Receiver	ESIB26	R&S	-
2135	CDN	CDN 801-M3	Lüthi	-