

## FCC Part 15C Compliance Test Report

|                                                         |                                                                                                                                                                                                                                                          |                                   |                                                                                                                      |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>Test Report no.:</b>                                 | FCC15CBTLE_RM-985_10.docx                                                                                                                                                                                                                                | <b>Date of Report:</b>            | 30-Jul-2014                                                                                                          |
| <b>Number of pages:</b>                                 | 23                                                                                                                                                                                                                                                       | <b>Customer's Contact person:</b> | Victoria Abadilla                                                                                                    |
| <b>Testing laboratory:</b>                              | TCC Microsoft Tampere Laboratory<br>P.O. Box 403<br>Visiokatu 3<br>FIN-33101 TAMPERE, FINLAND<br>Tel. +358 71 800 8000<br>Fax. +358 71 804 6880                                                                                                          | <b>Customer:</b>                  | Microsoft<br>16620 West Bernardo Drive<br>San Diego, CA 92127<br>USA<br>Tel. +1 858 831 5000<br>Fax. +1 858 385 1598 |
| <b>FCC listing no.:</b>                                 | 94436                                                                                                                                                                                                                                                    |                                   |                                                                                                                      |
| <b>IC recognition no.:</b>                              | 661AK-1                                                                                                                                                                                                                                                  |                                   |                                                                                                                      |
| <b>Tested devices/ accessories:</b>                     | Phone RM-985 / Battery BV-L4A / Headset WH-208 / AC charger AC-60E / Data Cable CA-190CD                                                                                                                                                                 |                                   |                                                                                                                      |
| <b>FCC ID:</b>                                          | QMNRM-985                                                                                                                                                                                                                                                | <b>IC:</b>                        | 661X-RM985                                                                                                           |
| <b>Supplement reports:</b>                              | -                                                                                                                                                                                                                                                        |                                   |                                                                                                                      |
| <b>Testing has been carried out in accordance with:</b> | CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".            |                                   |                                                                                                                      |
| <b>Documentation:</b>                                   | The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft. |                                   |                                                                                                                      |
| <b>Test Results:</b>                                    | The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document                                                                                              |                                   |                                                                                                                      |
| <b>Date and signature for the contents:</b>             |                                                                                                                                                                                                                                                          |                                   |                                                                                                                      |

Sami Lehtonen, Specialist, EMC

## 1. Summary for FCC Part 15C Compliance Test Report

|                               |                                                     |
|-------------------------------|-----------------------------------------------------|
| Date of receipt               | 25-Jun-2014                                         |
| Testing completed             | 30-Jun-2014                                         |
| The customer's contact person | Victoria Abadilla                                   |
| Test Plan referred to         | T:\Projects\RM-984\TestPlan\RS_testplan_RM-984.xlsm |
| Notes                         | -                                                   |
| Document name                 | T:\Projects\RM-985\EMC\FCC15CBTLE_RM-985_10.docx    |

### 1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:  
GSM/WCDMA/WLAN/Bluetooth  
The EUT is tested with maximum rated TX power.

Devices under tests

| Product    | Type     | SN                          | HW   | MV  | SW                      | DUT   |
|------------|----------|-----------------------------|------|-----|-------------------------|-------|
| Phone      | RM-984   | 004402478222346             | 0200 | -   | 02028.00000.14224.06001 | 43184 |
| Phone      | RM-984   | 004402478222536             | 0200 | -   | 02028.00000.14224.06001 | 43187 |
| Battery    | BV-L4A   | 4181574243S11400031;0670727 | 3.0  | 1.0 | -                       | 43185 |
| Battery    | BV-L4A   | 4181574243S11400027;0670727 | 3.0  | 1.0 | -                       | 43188 |
| Headset    | WH-208   | -                           | -    | -   | -                       | 43186 |
| AC charger | AC-60E   | 409093116580300242;0677566  | -    | -   | -                       | 43074 |
| Data Cable | CA-190CD | -                           | -    | -   | -                       | 43034 |

### 1.2. Summary of Test Results

Bluetooth Low Energy:

| Section in CFR 47    | Section in RSS-GEN or RSS-210 | Name of the test                     | Result |
|----------------------|-------------------------------|--------------------------------------|--------|
| 15.247(b)(1)         | A8.4(4)                       | Conducted peak output power          | PASSED |
| 15.247(d), 15.205(b) | A8.5                          | Band edge compliance of RF emissions | PASSED |
| 15.247(d)            | A8.5                          | Spurious RF conducted emissions      | PASSED |
| 15.247(d), 15.209    | A8.5                          | Spurious radiated emissions          | PASSED |
| 15.207               | 7.2.2                         | AC powerline conducted emissions     | NP     |
| 15.247(a)(2)         | A8.2(a)                       | 6dB(bandwidth)                       | PASSED |
| 15.247(e)            | A8.2(b)                       | Power spectral density               | PASSED |

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Microsoft Laboratory.

The test results of QMNRM-984 are re-used for certification of the QMNRM-985. The table above indicates the results, which will be re-used.


## CONTENTS

|                                                                                                  |           |
|--------------------------------------------------------------------------------------------------|-----------|
| <b>1. Summary for FCC Part 15C Compliance Test Report.....</b>                                   | <b>2</b>  |
| 1.1. EUT and Accessory Information.....                                                          | 2         |
| 1.2. Summary of Test Results.....                                                                | 2         |
| <b>2. Conducted peak output power<br/>(FCC §15.247(b)(1), RSS-210 A8.4(4)).....</b>              | <b>4</b>  |
| 2.1. Test Setup.....                                                                             | 4         |
| 2.2. Test method and limit.....                                                                  | 4         |
| 2.3. Bluetooth Low Energy Test results.....                                                      | 5         |
| <b>3. Band edge compliance of RF emissions<br/>(FCC 15.247(d), 15.205(b), RSS-210 A8.5).....</b> | <b>7</b>  |
| 3.2. Test method and limit.....                                                                  | 7         |
| 3.3. Bluetooth Low Energy test results.....                                                      | 8         |
| <b>4. Spurious RF conducted emissions<br/>(FCC §15.247(d), RSS-210 A8.5).....</b>                | <b>10</b> |
| 4.1. Test Setup.....                                                                             | 10        |
| 4.2. Test method and limit.....                                                                  | 10        |
| 4.3. Bluetooth Low Energy Test results.....                                                      | 11        |
| <b>5. Spurious radiated emissions<br/>(FCC 15.247(d), 15.209, RSS-210 A8.5) .....</b>            | <b>13</b> |
| 5.2. Test method and limit.....                                                                  | 13        |
| 5.3. Bluetooth Low Energy test results.....                                                      | 15        |
| <b>6. 6dB(bandwidth)<br/>(FCC §15.247(a)(2), RSS-210 A8.2(a)) .....</b>                          | <b>16</b> |
| 6.1. Test Setup.....                                                                             | 16        |
| 6.2. Test method and limit.....                                                                  | 16        |
| 6.3. Bluetooth Low Energy Test results.....                                                      | 17        |
| <b>7. Power spectral density<br/>(FCC §15.247(e), RSS-210 A8.2(b)) .....</b>                     | <b>19</b> |
| 7.1. Test Setup.....                                                                             | 19        |
| 7.2. Test method and limit.....                                                                  | 19        |
| 7.3. Bluetooth Low Energy Test results.....                                                      | 20        |
| <b>8. Test Equipment.....</b>                                                                    | <b>22</b> |
| 8.1. Conducted measurements .....                                                                | 22        |
| 8.2. Radiated measurements .....                                                                 | 22        |

## 2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(4))

|                                                 |                   |
|-------------------------------------------------|-------------------|
| EUT with DUT number                             | RM-984, DUT 43187 |
| Accessories with DUT numbers                    | BV-L4A, DUT 43188 |
| Operation Voltage [V] / [Hz]                    | Nominal           |
| Results                                         | PASSED            |
| Remarks                                         | -                 |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 22 / 45 / 98.1    |
| Date of measurements                            | 26-Jun-2014       |
| Measured by                                     | Jari Jantunen     |

### 2.1. Test Setup

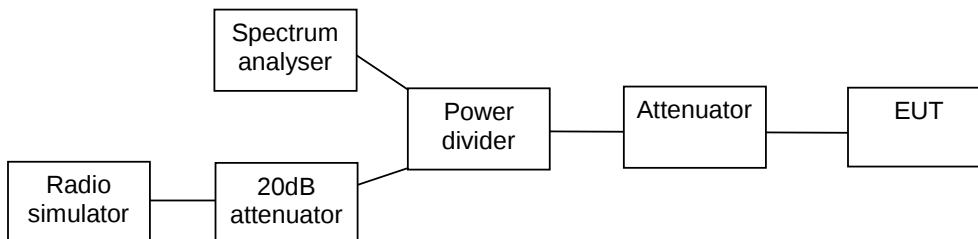

### 2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for conducted peak output power measurements

| Frequency range [MHz]        | Limit [W] | Limit [dBm] |
|------------------------------|-----------|-------------|
| 2400 – 2483.5<br>5725 - 5850 | <= 1      | <= 30       |


## 2.3. Bluetooth Low Energy Test results

| Channel / f <sub>c</sub> [MHz] | P [dBm] | P [mW] | Result |
|--------------------------------|---------|--------|--------|
| 0 / 2402                       | -2.89   | 0.514  | PASSED |
| 20 / 2442                      | -1.44   | 0.718  | PASSED |
| 39 / 2480                      | -2.91   | 0.512  | PASSED |


### Channel 0 / 2402 MHz

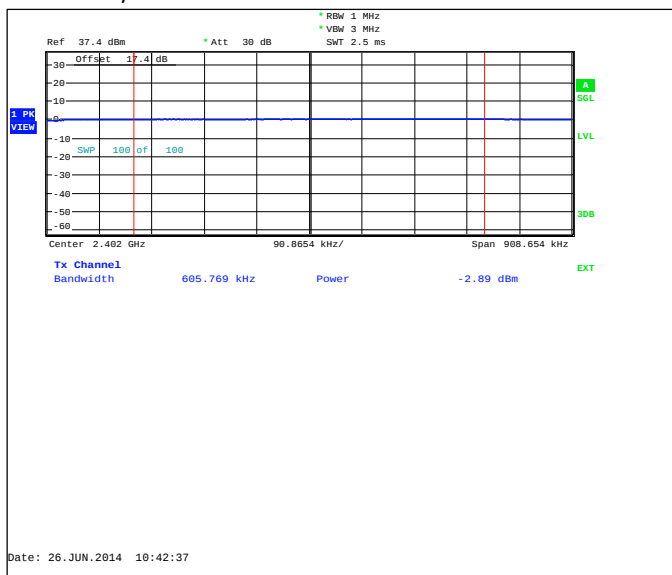

### Channel 20 / 2442 MHz

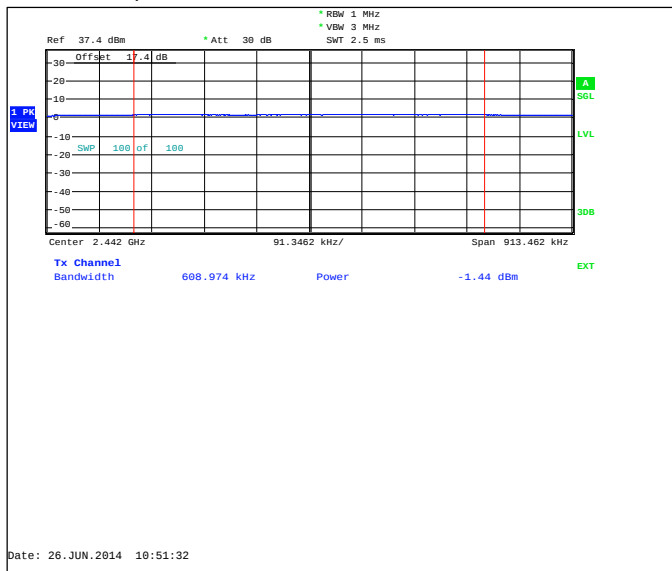


## Channel 39 / 2480 MHz

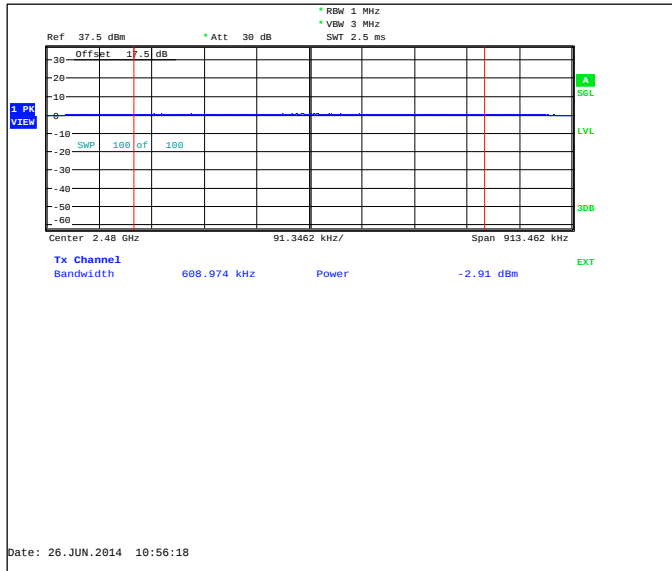

### 3. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8.5)

|                                                 |                                                                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------|
| EUT with DUT number                             | RM-984, DUT 43184                                                               |
| Accessories with DUT numbers                    | BV-L4A, DUT 43185 ; WH-208, DUT 43186 ; AC-60E, DUT 43074 ; CA-190CD, DUT 43034 |
| Operation Voltage [V] / [Hz]                    | 115 / 60                                                                        |
| Results                                         | PASSED                                                                          |
| Remarks                                         | -                                                                               |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 25 / 40 / 98.5                                                                  |
| Date of measurements                            | 30-Jun-2014                                                                     |
| Measured by                                     | Jari Jantunen                                                                   |

#### 3.1.1 Test setup

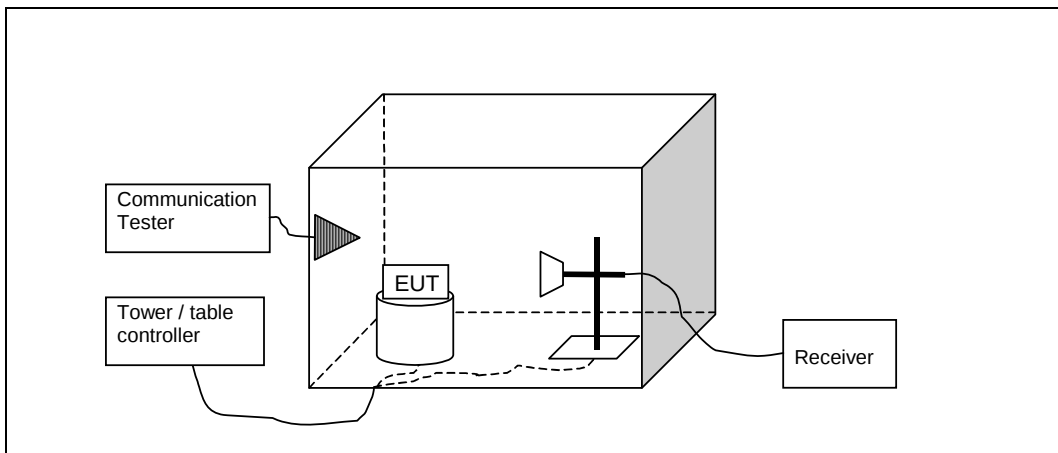

#### 3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$


Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable loss, antenna factor and preamplifier gain ( $A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$ ).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

| Frequency range [MHz]       | Limit                              |
|-----------------------------|------------------------------------|
| Below 2390 and above 2483.5 | 54 dBuV/m (avg) and 74 dBuV/m (pk) |

### 3.3. Bluetooth Low Energy test results

Channel 0 / 2402 MHz

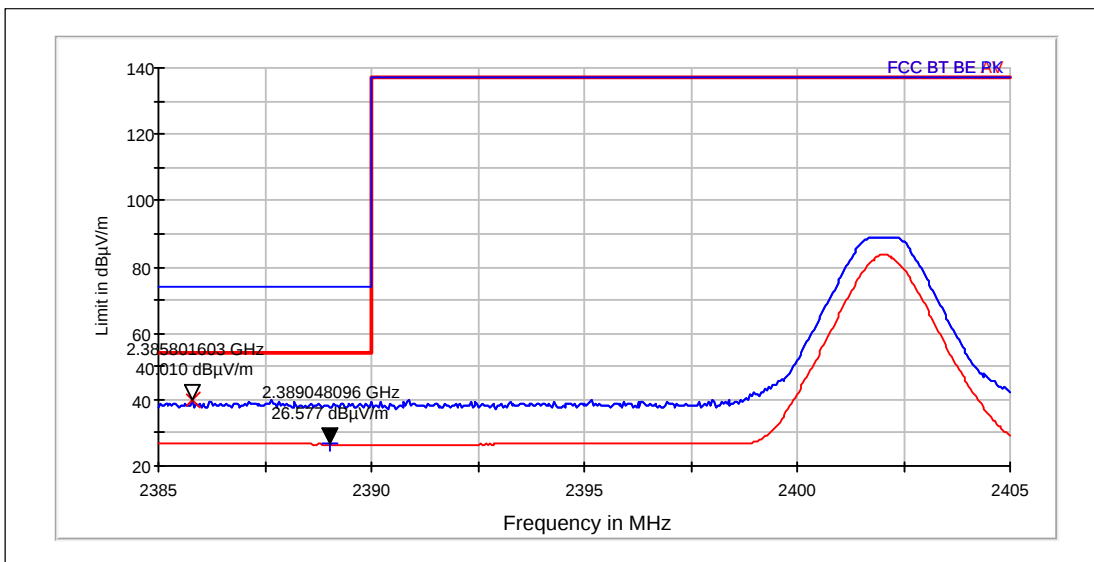


Peak (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Results |
|-----------------|------------|----------|------------------------|-----------------------|---------|
| 2386            | 40.01      | 100.115  | 52.41                  | -12.4                 | PASSED  |

Average (RBW: 1 MHz, VBW: 10 Hz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Results |
|-----------------|------------|----------|------------------------|-----------------------|---------|
| 2389            | 26.58      | 21.323   | 38.98                  | -12.4                 | PASSED  |

Channel 39 / 2480 MHz

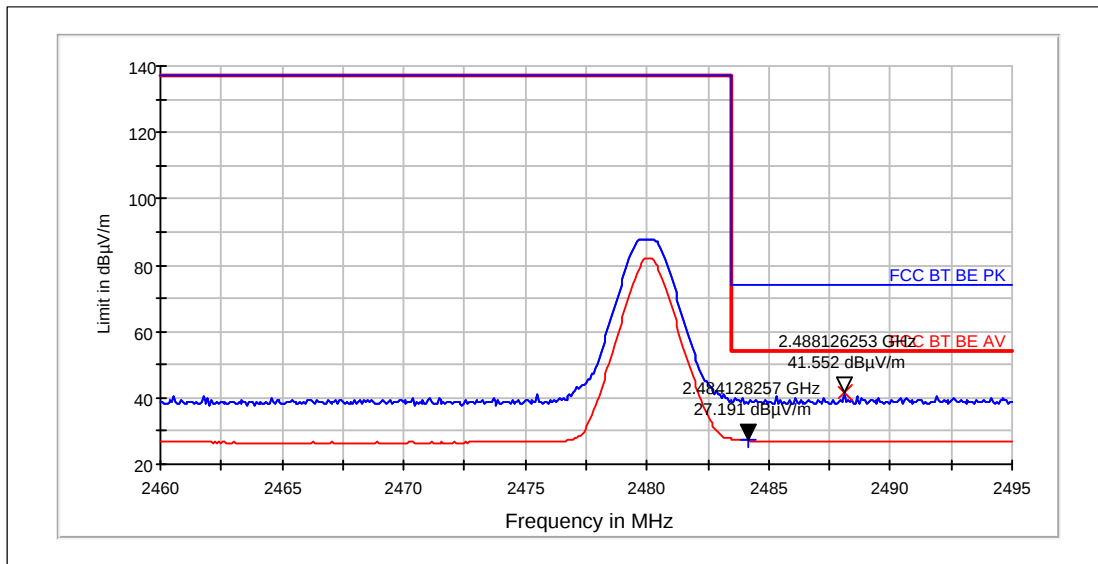

Peak (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Results |
|-----------------|------------|----------|------------------------|-----------------------|---------|
| 2488            | 41.55      | 119.564  | 53.44                  | -11.89                | PASSED  |


Average (RBW: 1 MHz, VBW: 10 Hz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Results |
|-----------------|------------|----------|------------------------|-----------------------|---------|
| 2484            | 27.19      | 22.885   | 39.08                  | -11.89                | PASSED  |

#### 4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

|                                                 |                   |
|-------------------------------------------------|-------------------|
| EUT with DUT number                             | RM-984, DUT 43187 |
| Accessories with DUT numbers                    | BV-L4A, DUT 43188 |
| Operation Voltage [V] / [Hz]                    | Nominal           |
| Results                                         | PASSED            |
| Remarks                                         | -                 |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 22 / 45 / 98.1    |
| Date of measurements                            | 26-Jun-2014       |
| Measured by                                     | Jari Jantunen     |

##### 4.1. Test Setup

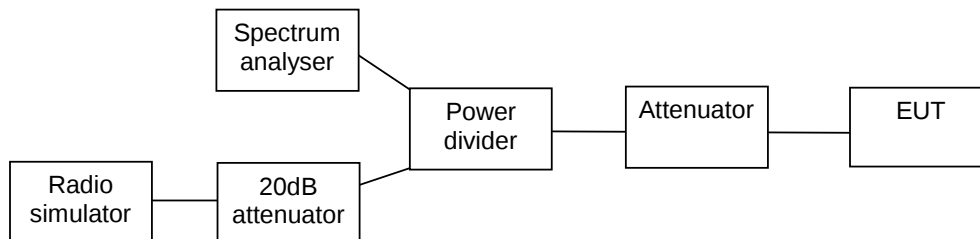

##### 4.2. Test method and limit

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.


The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.

Limits for spurious RF conducted emissions measurements

| Frequency range [MHz] | Limit [dBc] |
|-----------------------|-------------|
| 1 – 25000             | <= -20      |

### 4.3. Bluetooth Low Energy Test results


Channel 0 / 2402 MHz

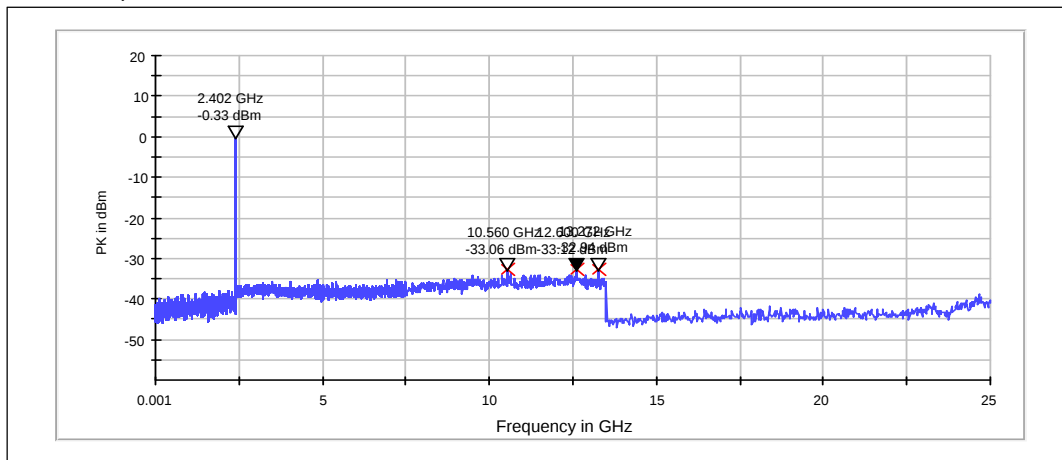

Peak (RBW: 100 kHz, VBW: 300 kHz)

| Frequency [MHz] | P [dBc] | Result |
|-----------------|---------|--------|
| 13272.000       | -32.61  | PASSED |
| 10560.000       | -32.73  | PASSED |
| 12600.000       | -32.79  | PASSED |


Channel 20 / 2442 MHz

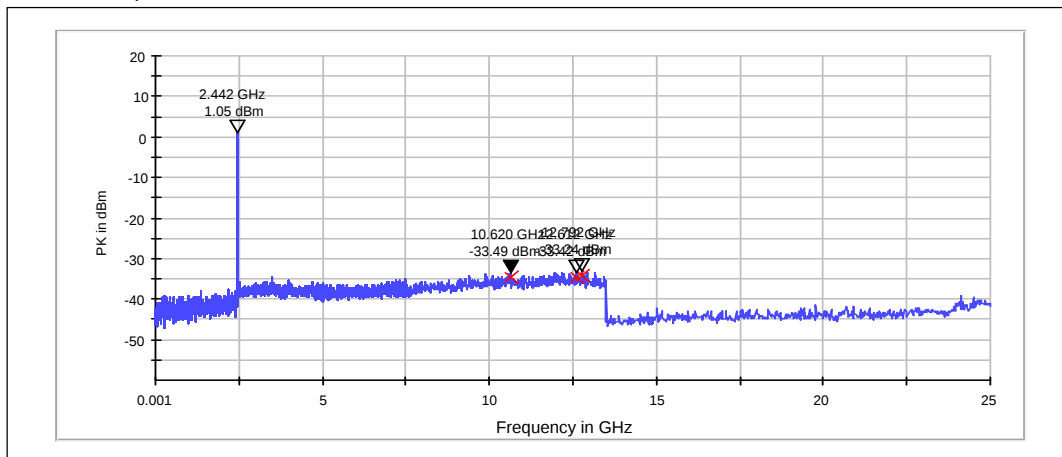

Peak (RBW: 100 kHz, VBW: 300 kHz)

| Frequency [MHz] | P [dBc] | Result |
|-----------------|---------|--------|
| 12792.000       | -34.29  | PASSED |
| 12612.000       | -34.47  | PASSED |
| 10620.000       | -34.54  | PASSED |

Channel 39 / 2480 MHz

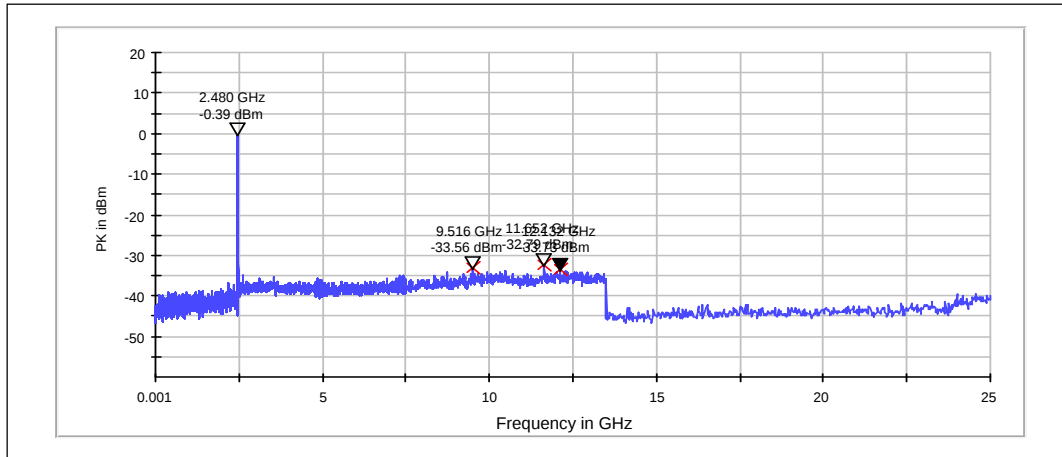


Peak (RBW: 100 kHz, VBW: 300 kHz)

| Frequency [MHz] | P [dBc] | Result |
|-----------------|---------|--------|
| 11652.000       | -32.40  | PASSED |
| 9516.000        | -33.17  | PASSED |
| 12132.000       | -33.34  | PASSED |

## 5. Spurious radiated emissions (FCC 15.247(d), 15.209, RSS-210 A8.5)

|                                                 |                                                                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------|
| EUT with DUT number                             | RM-984, DUT 43184                                                               |
| Accessories with DUT numbers                    | BV-L4A, DUT 43185 ; WH-208, DUT 43186 ; AC-60E, DUT 43074 ; CA-190CD, DUT 43034 |
| Operation Voltage [V] / [Hz]                    | 115 / 60                                                                        |
| Results                                         | PASSED                                                                          |
| Remarks                                         | -                                                                               |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 25 / 40 / 98.6                                                                  |
| Date of measurements                            | 30-Jun-2014                                                                     |
| Measured by                                     | Jari Jantunen                                                                   |

### 5.1.1 Test setup

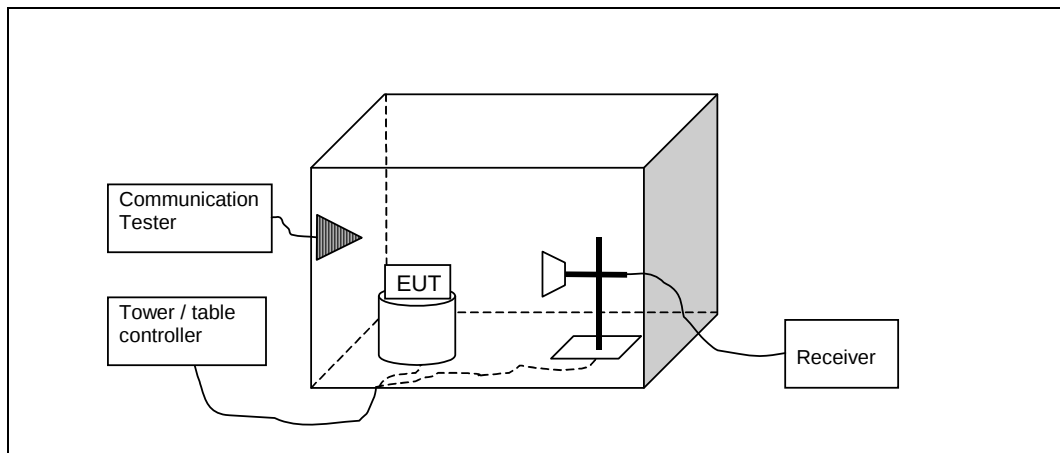

### 5.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable loss, antenna factor and preamplifier gain ( $A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$ ).

Limits for spurious radiated emissions measurements (3 m measurement distance)

| Frequency range [MHz] | Limit [ $\mu V/m$ ] | Limit [ $dB\mu V/m$ ] | Detector   |
|-----------------------|---------------------|-----------------------|------------|
| 30 - 88               | 100                 | 40                    | Quasi peak |
| 88 – 216              | 150                 | 43.5                  | Quasi peak |
| 216 – 960             | 200                 | 46                    | Quasi peak |
| 960 – 1000            | 500                 | 54                    | Quasi peak |
| Above 1000            | 500                 | 54                    | Average    |
| Above 1000            | 5000                | 74                    | Peak       |

### 5.3. Bluetooth Low Energy test results

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 4825.4          | 40.22      | 102.565  | 45.02                  | -4.8                  | 74             | 33.76  | PASSED  |
| 7234.2          | 45.49      | 188.148  | 44.59                  | 0.9                   | 95             | 49.74  | PASSED  |

Average (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 4825.4          | 26.93      | 22.208   | 31.73                  | -4.8                  | 54             | 27.05  | PASSED  |
| 7234.2          | 31.96      | 39.628   | 31.06                  | 0.9                   | ---            | ---    | PASSED  |

Channel 20 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 945.995         | 45.47      | 187.715  | 62.47                  | -17                   | 46             | 0.55   | PASSED  |
| 950.789         | 20.72      | 10.864   | 37.82                  | -17.1                 | 46             | 25.3   | PASSED  |
| 955.924         | 37.54      | 75.336   | 54.54                  | -17                   | 46             | 8.48   | PASSED  |

Peak (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 4880.6          | 40.46      | 105.439  | 44.96                  | -4.5                  | 74             | 33.52  | PASSED  |
| 7320.7          | 45.04      | 178.649  | 43.74                  | 1.3                   | 74             | 28.94  | PASSED  |

Average (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 4880.6          | 27.34      | 23.281   | 31.84                  | -4.5                  | 54             | 26.64  | PASSED  |
| 7320.7          | 32.26      | 41.02    | 30.96                  | 1.3                   | 54             | 21.72  | PASSED  |

Channel 39 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 4924.6          | 41.97      | 125.458  | 46.37                  | -4.4                  | 74             | 32.01  | PASSED  |
| 7386            | 45.98      | 199.067  | 44.28                  | 1.7                   | 74             | 28     | PASSED  |


Average (RBW: 1 MHz, VBW: 1 MHz)

| Frequency [MHz] | E [dBμV/m] | E [μV/m] | U <sub>RX</sub> [dBμV] | A <sub>TOT</sub> [dB] | Limit [dBμV/m] | Margin | Results |
|-----------------|------------|----------|------------------------|-----------------------|----------------|--------|---------|
| 4924.6          | 27.52      | 23.768   | 31.92                  | -4.4                  | 54             | 26.46  | PASSED  |
| 7386            | 32.58      | 42.56    | 30.88                  | 1.7                   | 54             | 21.4   | PASSED  |

## 6. 6dB(bandwidth) (FCC §15.247(a)(2), RSS-210 A8.2(a))

|                                                 |                   |
|-------------------------------------------------|-------------------|
| EUT with DUT number                             | RM-984, DUT 43187 |
| Accessories with DUT numbers                    | BV-L4A, DUT 43188 |
| Operation Voltage [V] / [Hz]                    | Nominal           |
| Results                                         | PASSED            |
| Remarks                                         | -                 |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 22 / 45 / 98.1    |
| Date of measurements                            | 26-Jun-2014       |
| Measured by                                     | Jari Jantunen     |

### 6.1. Test Setup

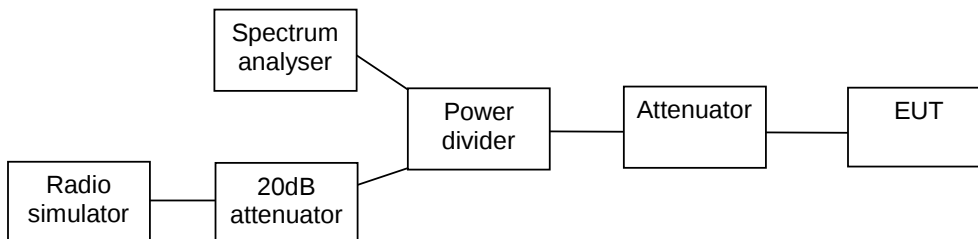

### 6.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for 6 dB bandwidth measurements

| Limit [kHz] |
|-------------|
| $\geq 500$  |


### 6.3. Bluetooth Low Energy Test results

| Channel / f <sub>c</sub> [MHz] | 6 dB bandwidth [kHz] | Result |
|--------------------------------|----------------------|--------|
| 0 / 2402                       | 605.8                | PASSED |
| 20 / 2442                      | 609                  | PASSED |
| 39 / 2480                      | 609                  | PASSED |


Channel 0 / 2402 MHz

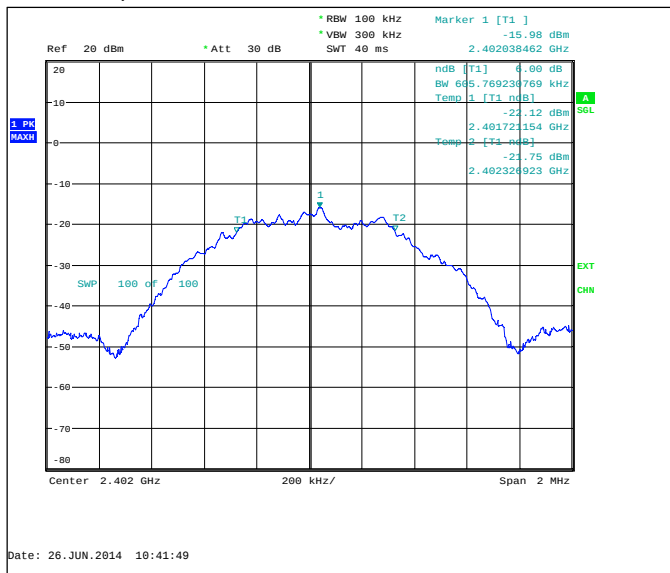

Channel 20 / 2442 MHz

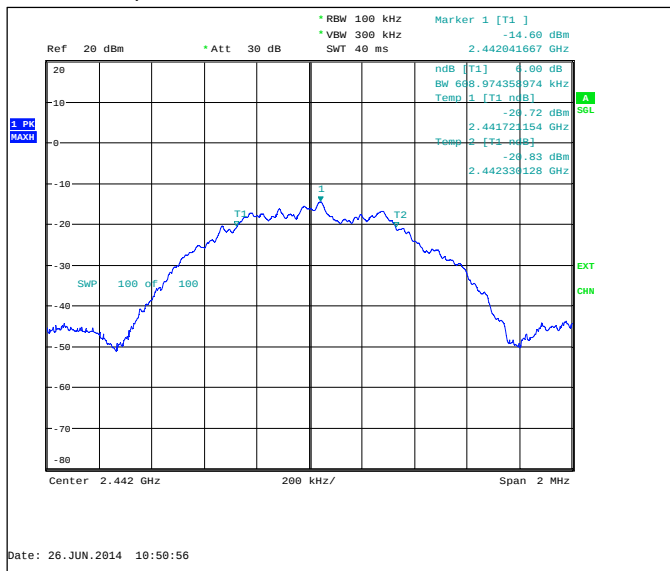


## Channel 39 / 2480 MHz

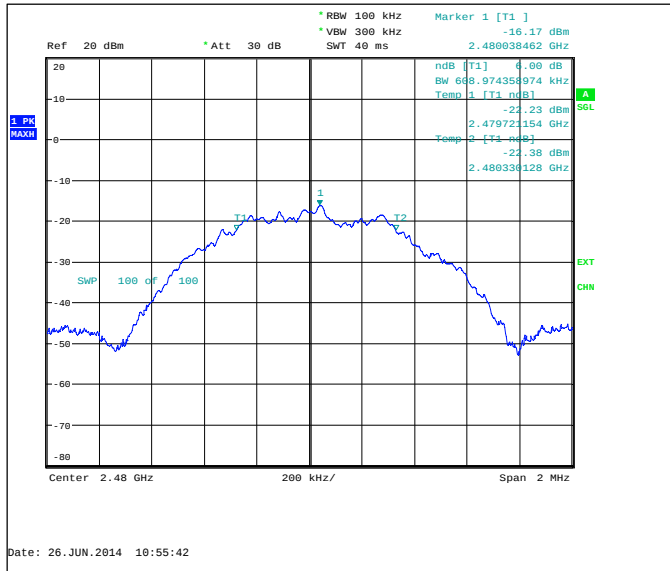

## 7. Power spectral density (FCC §15.247(e), RSS-210 A8.2(b))

|                                                 |                   |
|-------------------------------------------------|-------------------|
| EUT with DUT number                             | RM-984, DUT 43187 |
| Accessories with DUT numbers                    | BV-L4A, DUT 43188 |
| Operation Voltage [V] / [Hz]                    | Nominal           |
| Results                                         | PASSED            |
| Remarks                                         | -                 |
| Temp [°C] / Humidity [%RH] / Air Pressure [kPa] | 22 / 45 / 98.1    |
| Date of measurements                            | 26-Jun-2014       |
| Measured by                                     | Jari Jantunen     |

### 7.1. Test Setup

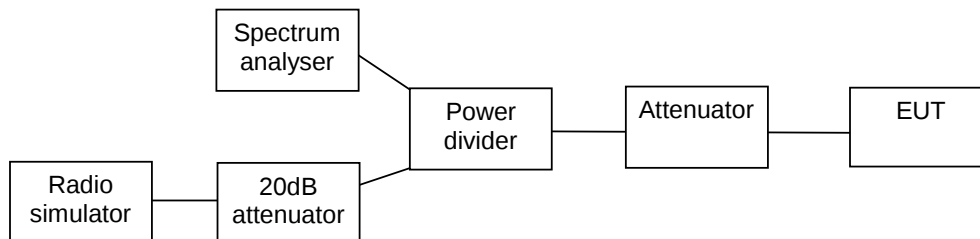

### 7.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


| Limit [dBm] @ 3 kHz |
|---------------------|
| <= 8                |

### 7.3. Bluetooth Low Energy Test results


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

| Channel / f <sub>c</sub> [MHz] | P [dBm] | Result |
|--------------------------------|---------|--------|
| 0 / 2402                       | -15.56  | PASSED |
| 20 / 2442                      | -14.14  | PASSED |
| 39 / 2480                      | -15.58  | PASSED |


Channel 0 / 2402 MHz

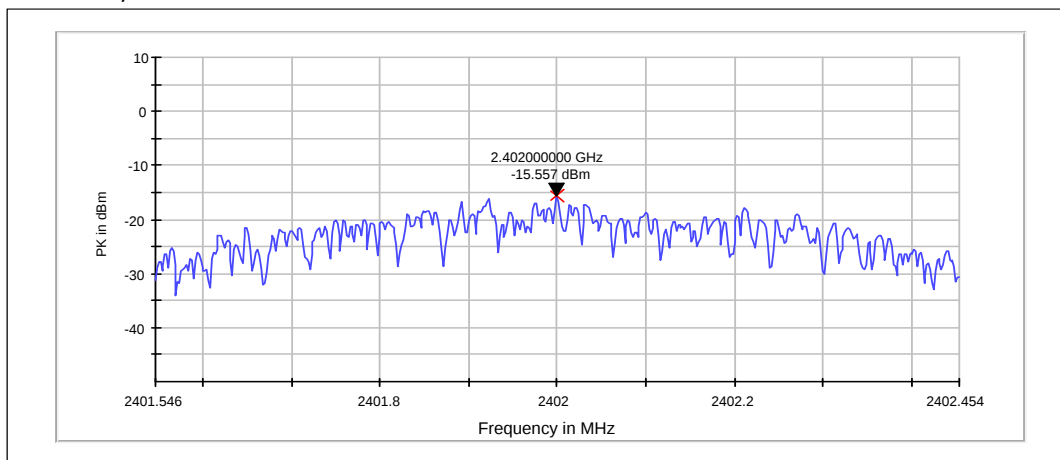

Channel 20 / 2442 MHz

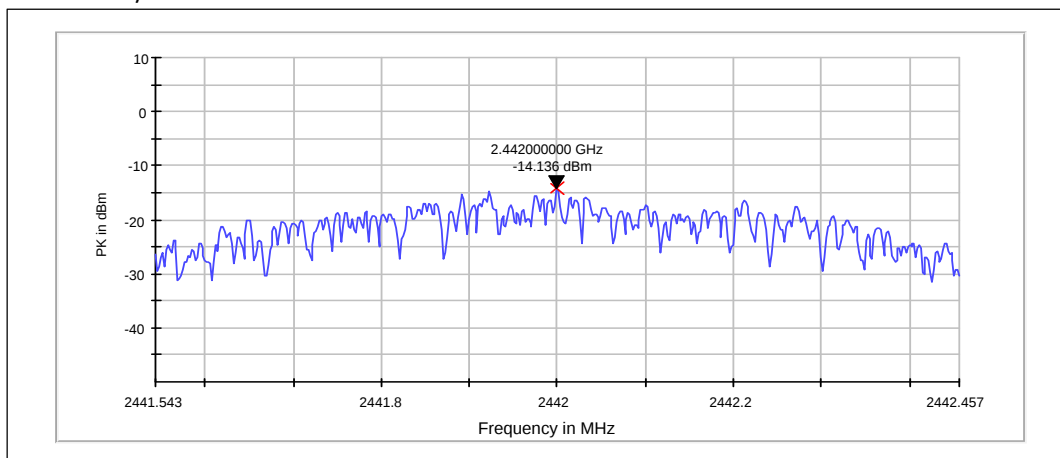

Channel 39 / 2480 MHz

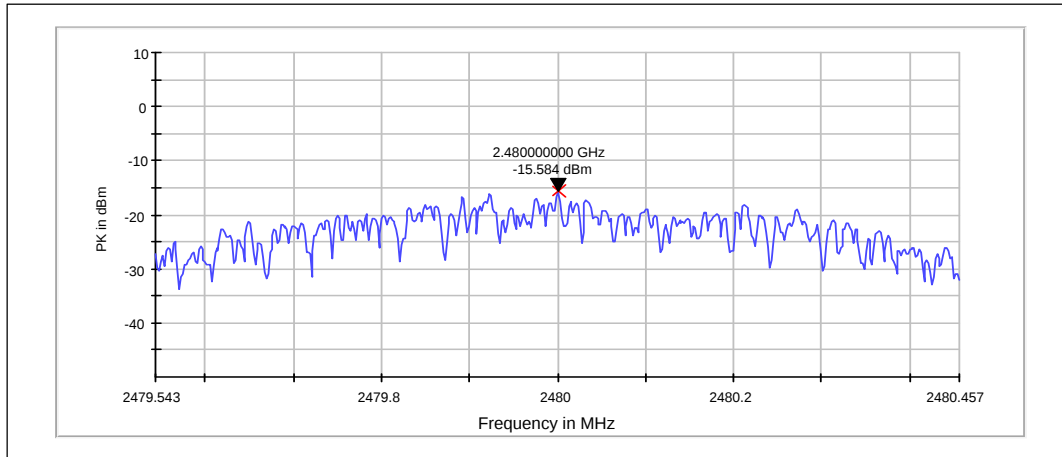

## 8. Test Equipment

### 8.1. Conducted measurements

| Eq. No  | Equipment                           | Type        | Manufacturer  | Used in                 |
|---------|-------------------------------------|-------------|---------------|-------------------------|
| TM38112 | Power supply                        | 6632A       | Agilent       | 22/24/27, 15C, 15E      |
| TM38114 | Power supply                        | 6632A       | Agilent       | 22/24/27, 15C, 15E      |
| TM37773 | Communication Tester                | CMU200      | R&S           | 22/24/27, 15B           |
| TM30600 | Impulse limiter                     | ESH3-Z2     | R&S           | 15C, 15B                |
| TM26490 | LISN 50 $\mu$ H                     | ESH3-Z5     | R&S           | 15C, 15B                |
| TM26491 | LISN 50 $\mu$ H                     | ESH3-Z5     | R&S           | 15C, 15B                |
| TM37610 | Spectrum Analyzer                   | FSU26       | R&S           | 22/24/27, 15C, 15E      |
| TM23007 | Oscilloscope                        | TDS684B     | Tektronix     | 15E                     |
| TM22806 | Battery                             | BAT 20/E    | Fiskars       | 15C, 15B                |
| TM22805 | UPS                                 | PS 20/1.2   | Fiskars       | 15C, 15B                |
| -       | Temperature and humidity logger     | 175-H2      | Testo         | 15C, 15B                |
| -       | Temperature and humidity logger     | 175-H2      | Testo         | 22/24/27, 15C           |
| -       | Air pressure and temperature logger | 635-2       | Testo         | 22/24/27, 15C, 15B      |
| -       | Air pressure sensor                 | 0638-1835   | Testo         | 22/24/27, 15C, 15B      |
| -       | Temperature test chamber            | VT 4002     | Vötsch        | 22/24/27                |
| 2001    | Bluetooth tester                    | CBT         | R&S           | 15C, 15B                |
| 2009    | LISN 50 $\mu$ H                     | ENV216      | R&S           | 15C, 15B                |
| 2010    | LISN 50 $\mu$ H                     | ENV216      | R&S           | 15C, 15B                |
| 2012    | Power splitter                      | 11667B      | Agilent       | 22/24/27, 15C           |
| 2013    | Attenuator                          | 8493C       | Agilent       | 22/24/27, 15C           |
| 2014    | Attenuator                          | 8493C       | Agilent       | 22/24/27, 15C           |
| 2019    | Power splitter                      | ZN2PD-9G-S+ | Mini-Circuits | 15E                     |
| 2020    | Power splitter                      | ZN2PD-9G-S+ | Mini-Circuits | 15E                     |
| 2021    | Communication Tester                | CMW500      | R&S           | 22/24/27                |
| 2022    | Communication Tester                | CMU200      | R&S           | 22/24/27                |
| 2023    | Spectrum Analyzer                   | ESMI-RF     | R&S           | 15B/15C                 |
| 2024    | Analyzer display unit               | ESAI-D      | R&S           | 15B/15C                 |
| 2026    | Signal Generator                    | SMF 100A    | R&S           | 22/24/27, 15C, 15E, 15B |
| -       | Bluetooth tester                    | CBT         | R&S           | 15C, 15B                |

### 8.2. Radiated measurements

| Eq. No  | Equipment               | Type        | Manufacturer | Used in                 |
|---------|-------------------------|-------------|--------------|-------------------------|
| -       | Antenna                 | BBHA 9120 D | Schwarzbeck  | 22/24/27, 15C           |
| TM37678 | Communication Tester    | CMU200      | R&S          | 22/24/27, 15B           |
| TM38845 | Receiver                | ESIB 26     | R&S          | 22/24/27, 15C, 15E, 15B |
| -       | Antenna                 | HL562       | R&S          | 22/24/27, 15C, 15E, 15B |
| -       | Turntable               | 2188        | EMCO         | 22/24/27, 15C, 15E, 15B |
| -       | Turntable controller    | 2090        | EMCO         | 22/24/27, 15C, 15E, 15B |
| -       | RF system panel         | OSP130      | R&S          | 22/24/27, 15C, 15E, 15B |
| -       | Mini mast               | 2075-2      | ETS Lindgren | 22/24/27, 15C, 15B      |
| TM38843 | Mini mast               | 2075        | Emco         | 22/24/27, 15C, 15B      |
| TM38842 | Antenna mast controller | 2090        | Emco         | 22/24/27, 15C, 15B      |
| TM30643 | LISN 50 $\mu$ H         | LISN-5-20-2 | FCC          | 22/24/27, 15C, 15B      |
| TM30644 | LISN 50 $\mu$ H         | LISN-5-20-2 | FCC          | 22/24/27, 15C, 15B      |

| Eq. No  | Equipment                           | Type                                   | Manufacturer | Used in                 |
|---------|-------------------------------------|----------------------------------------|--------------|-------------------------|
| -       | Temperature and humidity logger     | 175-H2                                 | Testo        | 22/24/27, 15C, 15B      |
| -       | Air pressure and temperature logger | 635-2                                  | Testo        | 22/24/27, 15C, 15B      |
| -       | Air pressure sensor                 | 0638-1835                              | Testo        | 22/24/27, 15C, 15B      |
| TM37523 | Preamplifier                        | AMF-4D-10M-3G-25-20P                   | Miteq        | 22/24/27, 15C, 15B      |
| TM37498 | Preamplifier                        | AMF-5D-020180-26-10P                   | Miteq        | 22/24/27, 15C, 15B      |
| TM30599 | Semi anechoic chamber               | UNKNOWN                                | TDK          | 22/24/27, 15C, 15B      |
| TM22638 | Power supply                        | OL63743-901                            | -            | 22/24/27, 15C, 15E, 15B |
| TM38066 | High pass filter                    | WHKX3.0/18G-12SS                       | Wainwright   | 22/24/27, 15C, 15E, 15B |
| 2028    | High pass filter                    | WHKX 1.0/15G-12SS                      | Wainwright   | 22/24/27, 15C, 15E, 15B |
| TM37545 | Tunable notch filter                | 800.0/960.0-0.2/40-8SSK                | Wainwright   | 22                      |
| TM26512 | Tunable notch filter                | WRC1850/1910-0.2/40-10SSK              | Wainwright   | 24                      |
| -       | Band reject filter                  | WRCG1877/1883-1870/1890-40/6EE         | Wainwright   | 24                      |
| -       | Band reject filter                  | WRCG1729.4/1735.4-1722.4/1742.4-40/6SS | Wainwright   | 27                      |
| TM23892 | Controller                          | G-1000SDX                              | Yaesu        | 22/24/27, 15C, 15E      |
| 2001    | Bluetooth tester                    | CBT                                    | R&S          | 15C, 15B                |
| 6023    | Antenna                             | VUBA 9117                              | Schwarzbeck  | 22/24/27                |
| 2021    | Communication Tester                | CMW500                                 | R&S          | 22/24/27                |
| 2025    | Antenna                             | HFH2-Z2                                | R&S          | 15C                     |
| 2026    | Signal Generator                    | SMF 100A                               | R&S          | 22/24/27, 15C, 15E, 15B |
| 2052    | Antenna                             | BBHA 9120 D                            | Schwarzbeck  | 22/24/27, 15C, 15B, 15E |
| -       | Antenna                             | QSH18S20                               | Q-Par        | 22/24/27, 15C, 15B, 15E |
| -       | Antenna                             | QSH20S20                               | Q-Par        | 22/24/27, 15C, 15B, 15E |
| -       | Antenna                             | QSH20S20                               | Q-Par        | 22/24/27, 15C, 15B, 15E |
| -       | Bluetooth tester                    | CBT                                    | R&S          | 15C, 15B                |