



Microtest
微 测 检 测

Test Report

FCC ID: QMP- M605AC

Date of issue: Nov. 13, 2019

Report Number:	MTi19091904-1E2
Sample Description:	Wireless XDSL Modem Router
Model(s):	M605v AC, M605v Series
Applicant:	DQ Technology, Inc.
Address:	1343 Columbia Drive, Suite 415, Richardson, TX, 75081
Date of Test:	Sept. 26, 2019 to Oct. 22, 2019

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel: (86-755) 88850135

Fax: (86-755) 88850136

Web: <http://www.mtitest.com>

E-mail: mti@51mti.com

Address: No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China



Table of Contents

1	GENERAL INFORMATION	5
1.1	DESCRIPTION OF EUT	5
1.2	OPERATION CHANNEL LIST	6
1.3	TEST CHANNEL LIST	7
1.4	ANCILLARY EQUIPMENT LIST	8
1.5	DESCRIPTION OF SUPPORT UNITS	8
2	SUMMARY OF THE TEST RESULTS	9
3	TEST FACILITIES AND ACCREDITATIONS	10
3.1	TEST LABORATORY	10
3.2	ENVIRONMENTAL CONDITIONS	10
3.3	MEASUREMENT UNCERTAINTY	11
3.4	TEST SOFTWARE	11
4	EQUIPMENT LIST	12
5	TEST RESULTS	13
5.1	ANTENNA REQUIREMENT	13
5.1.1	Standard requirement	13
5.1.2	EUT Antenna	13
5.2	RF OUTPUT POWER	14
5.2.1	Limit	14
5.2.2	Test procedure	14
5.2.3	Test setup	14
5.2.4	Test results	14
5.3	POWER LINE CONDUCTED EMISSION	17
5.3.1	Limits	17
5.3.2	Test setup	17
5.3.3	Test procedure	18
5.3.4	Test results	18
5.4	26dB EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	21
5.4.1	Limit	21
5.4.2	Test procedure	21
5.4.3	Test setup	21
5.4.4	Test results	21
5.5	6dB BANDWIDTH	29
5.5.1	Limit	29
5.5.2	Test procedure	29
5.5.3	Test setup	29
5.5.4	Test results	29
5.6	RADIATED SPURIOUS EMISSION	34
5.6.1	Test procedure	35
5.6.2	Test setup	35
5.6.3	Test results	37
5.7	CONDUCTION SPURIOUS EMISSION	44
5.7.1	Limits	44
5.7.2	Test setup	44
5.7.3	Test procedure	44
5.7.4	Test results	45
5.8	POWER SPECTRAL DENSITY	59
5.8.1	Limit	59
5.8.2	Test procedure	59
5.8.3	Test setup	60
5.8.4	Test results	61
5.9	FREQUENCY STABILITY MEASUREMENT	75



5.9.1	Limit	75
5.9.2	Test Procedures	75
5.9.3	Test Setup Layout	75
5.9.4	EUT Operation during Test	75
5.9.5	TEST RESULTS	76

PHOTOGRAPHS OF THE TEST SETUP	82
--	-----------

PHOTOGRAPHS OF THE EUT.....	84
------------------------------------	-----------



Test Result Certification

Applicant's name: DQ Technology, Inc.

Address: 1343 Columbia Drive, Suite 415, Richardson, TX, 75081

Manufacture's Name: DCOM Technology CO., LTD

Address: 8004, Building 51, Block 2, Shangtang Songzi Park, MinZhi St.,
Longhua Dist, Shenzhen, China

Product name: Wireless XDSL Modem Router

Trademark: VisionNet

Model name: M605v AC, M605v Series

Standards: FCC Part 15.407

Test Procedure: ANSI C63.10-2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by:

Demi Mu

Oct. 22, 2019

Reviewed by:

Blue Zheng

Nov. 13, 2019

Approved by:

Smith Chen

Nov. 13, 2019



1 General information

1.1 Description of EUT

Equipment:	Wireless XDSL Modem Router
Model name:	M605v AC
Serial Model:	M605v Series
Model difference:	All the model are the same circuit and RF module, except the model No. and color.
Frequency range:	U-NII-1: 5150 MHz to 5250 MHz, U-NII-3: 5725 MHz to 5850 MHz
Modulation type:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Transfer rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40): MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40):NSS1, MCS0-MCS9 802.11ac(VHT80) :NSS2,MCS0-MCS9;
Channel bandwidth:	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80MHz
Antenna type:	PIFA antenna
Antenna gain:	U-NII-1: 3dBi U-NII-3: 3dBi
Max. output power:	U-NII-1: 10.50dBm U-NII-3: 12.53dBm
Hardware version:	WVD_C5572T_V0.2
Software version:	V2.48c
Power supply:	DC 12V from adapter AC 120V/60Hz
Adapter information:	Model:MAUS-1201501801 Input:100-240V~ 50/60Hz 0.5A Output:12V 1.5A
Battery:	N/A



1.2 Operation channel list

For U-NII-1:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	--	--
44	5220	--	--	--	--
48	5240	--	--	--	--

For U-NII-3:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	--	--
157	5785	--	--	--	--
161	5805	--	--	--	--
165	5825	--	--	--	--



1.3 Test channel list

For 802.11a/n/ac (HT20)

U-NII-1 (5150 - 5250 MHz)			U-NII-3(5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
44	Mid	5220	157	Mid	5785
48	High	5240	165	High	5825

80 MHz	
Channel Number	Frequency (MHz)
42	5210

For 802.11n/ac (HT40)

U-NII-1 (5150 - 5250 MHz)			U-NII-3(5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795

80 MHz	
Channel Number	Frequency (MHz)
155	5775



1.4 Ancillary equipment list

Equipment	Model	S/N	Manufacturer	Certificate type
/	/	/	/	/

1.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
1	Adapter	/	MAUS-1201501801	/	/
/	/	/	/	/	/

Note:

(1)The support equipment was authorized by Declaration of Confirmation.

(2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2 Summary of the Test Results

Test procedures according to the technical standards:

No.	Standard Section	Test Item	Result	Remark
1	15.203/15.407	Antenna Requirement	Pass	
2	15.407(a)	RF Output Power	Pass	
3	15.207	Power Line Conducted Emission	Pass	
4	15.407(a)	26dB Emission Bandwidth and Occupied bandwidth	Pass	
5	15.407(e)	6 dB bandwidth	Pass	
6	15.407(a)	Power Spectral Density	Pass	
7	15.407(b) 15.209	Radiation Spurious Emission	Pass	
8	15.407(b) 15.209	Conducted Spurious Emission	Pass	
9	15.407(g)	Frequency stability	Pass	



3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa



3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$ where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3.4 Test software

Software Name	Manufacturer	Model	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscond co., ltd	JS1120-3	2.5.77.0418



4 Equipment list

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI7	100314	2019/10/09	2020/10/08
MTI-E006	TRILOG Broadband Antenna	schwarbeck	VULB 9163	9163-872	2019/10/15	2020/10/14
MTI-E014	amplifier	Hewlett-Packard	8447D	3113A06150	2019/10/09	2020/10/08
MTI-E036	Single path vehicle AMN(LISN)	Schwarzbeck	NNBM 8124	01175	2019/10/09	2020/10/08
MTI-E038	Low noise active vertical monopole antenna	Schwarzbeck	VAMP 9243	#565	2019/10/16	2020/10/15
MTI-E039	Biconical antenna	Schwarzbeck	BBA 9106	#164	2019/10/15	2020/10/14
MTI-E041	MXG Vector Signal Generator	Agilent	N5182A	MY49060455	2019/04/16	2020/04/15
MTI-E042	ESG Series Analog signal generator	Agilent	E4421B	GB40051240	2019/05/21	2020/05/20
MTI-E044	Thermometer clock humidity monitor	-	HTC-1	/	2019/04/17	2020/04/16
MTI-E062	Log Periodic Antenna	Schwarzbeck	VUSLP 9111B	#312	2018/04/11	2020/04/10
MTI-E063	Log Periodic Dipole Array Antenna	ETS-LINDGREN	3148B	00224524	2018/04/11	2020/04/10
MTI-E065	Amplifier	EMtrace	RP06A	00117	2019/04/29	2020/04/28
MTI-E071	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2019/10/25	2020/10/24
MTI-E076	EMI Test Receiver	Rohde&schwarz	ESIB26	100273	2019/04/16	2020/04/15
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2019/04/16	2020/04/15
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2019/04/16	2020/04/15
MTI-E092	DC power source	shenzhen tongyuan	TY-500V 100A	201710190325689	2019/4/16	2020/4/15
MTI-E093	Artificial mains network	3ctest	LISN J50	ES3911805	2019/04/16	2020/04/15
MTI-E096	Power amplifier	Space-Dtronics	EWLNA0118G-P40	1852001	2019/04/29	2020/04/28
MTI-E097	Current Probe	SOLAR ELECTRONICS CO.	9207-1	220095-1	2019/04/17	2020/04/16
MTI-E098	Loop Sensor	SOLAR ELECTRONICS CO.	7334-1	220095-2	2019/04/21	2020/04/20
MTI-E0123	High and low temperature box	Heron	JHY-HT-80L	LGD-GDW-80	2019/4/16	2020/4/15

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).



5 Test Results

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.1.2 EUT Antenna

The antenna is PIFA antenna, which was permanently affixed to the device and un-replaced, complies with 15.203. In addition, the maximum antenna gain is 3dBi.

5.2 RF output power

5.2.1 Limit

For the 5.15-5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the band 5.725-5.85 GHz

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2 Test procedure

The maximum peak conducted output power may be measured using a broadband Average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

5.2.3 Test setup



5.2.4 Test results

Note 1: For FCC standard, if transmitting antennas of directional gain greater than 6 dBi are used, all band maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



For U-NII-1

Modulation mode	Test Channel	Frequency (MHz)	Maximum Peak Conducted Power						Limit (mW)
			ANT A		ANT B		Total power of antennas		
			(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
11a	CH36	5180	9.46	8.83	10.00	10.00	/	/	250
11a	CH40	5200	9.69	9.31	10.50	11.22	/	/	250
11a	CH48	5240	9.07	8.07	10.44	11.07	/	/	250
11ac (HT20)	CH36	5180	8.45	7.00	9.75	9.44	12.16	16.44	249.99
11ac (HT20)	CH40	5200	9.57	9.06	10.05	10.12	12.83	19.17	249.99
11ac (HT20)	CH48	5240	9.62	9.16	10.05	10.12	12.85	19.28	249.99
11ac (HT40)	CH38	5190	8.87	7.71	9.42	8.75	12.16	16.46	249.99
11ac (HT40)	CH46	5230	9.16	8.24	9.50	8.91	12.34	17.15	249.99
11ac (HT80)	CH42	5210	9.05	8.04	9.12	8.17	12.10	16.20	249.99

Modulation mode	Test Channel	Frequency (MHz)	Maximum Peak Conducted Power						Limit (mW)
			ANT A		ANT B		Total power of antennas		
			(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
11n (HT20)	CH36	5180	8.51	7.10	9.71	9.35	12.16	16.45	249.99
11n (HT20)	CH40	5200	8.94	7.83	9.73	9.40	12.36	17.23	249.99
11n (HT20)	CH48	5240	8.38	6.89	10.27	10.64	12.44	17.53	249.99
11n (HT40)	CH38	5190	7.19	5.24	9.00	7.94	11.20	13.18	249.99
11n (HT40)	CH46	5230	7.27	5.33	9.89	9.75	11.78	15.08	249.99



For U-NII-3

Modulation mode	Test Channel	Frequency (MHz)	Maximum Peak Conducted Power						Limit (mW)
			ANT A		ANT B		Total power of antennas		
			(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
11a	CH149	5745	9.96	9.91	12.53	17.91	/	/	1000
11a	CH157	5785	10.27	10.64	11.82	15.21	/	/	1000
11a	CH165	5825	11.34	13.61	11.77	15.03	/	/	1000
11ac (HT20)	CH149	5745	9.75	9.44	12.13	16.33	14.11	25.77	999.99
11ac (HT20)	CH157	5785	9.72	9.38	11.66	14.66	13.81	24.03	999.99
11ac (HT20)	CH165	5825	9.91	9.79	11.34	13.61	13.69	23.41	999.99
11ac (HT40)	CH151	5755	8.69	7.40	10.86	12.19	12.92	19.59	999.99
11ac (HT40)	CH159	5795	9.37	8.65	10.39	10.94	12.92	19.59	999.99
11ac (HT80)	CH155	5775	9.3	8.51	10.43	11.04	12.91	19.55	999.99

Modulation mode	Test Channel	Frequency (MHz)	Maximum Peak Conducted Power						Limit (mW)
			ANT A		ANT B		Total power of antennas		
			(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
11n (HT20)	CH149	5745	9.64	9.20	12.17	16.48	14.10	25.69	999.99
11n (HT20)	CH157	5785	9.77	9.48	11.53	14.22	13.75	23.71	999.99
11n (HT20)	CH165	5825	9.91	9.79	11.40	13.80	13.73	23.60	999.99
11n (HT40)	CH151	5755	8.92	7.80	11.03	12.68	13.11	20.47	999.99
11n (HT40)	CH159	5795	8.55	7.16	9.91	9.79	12.29	16.96	999.99



5.3 Power line conducted emission

5.3.1 Limits


FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note

(1)The tighter limit applies at the band edges.

(2)The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.3.2 Test setup

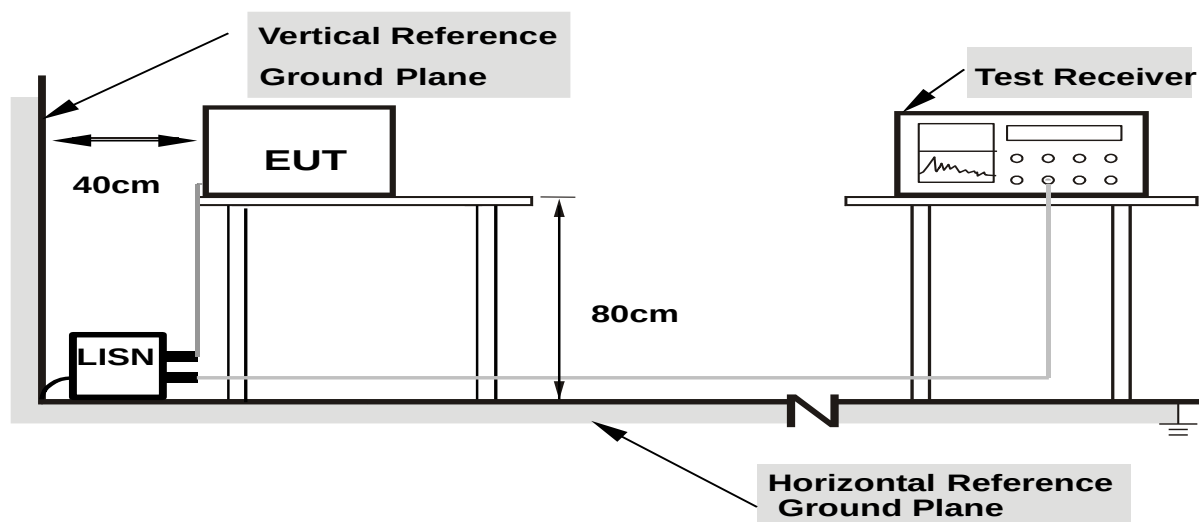

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes



5.3.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment's powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.


For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.3.4 Test results



EUT has two different voltage supports, reporting only the worst voltage mode.


EUT:	Wireless XDSL Modem Router	Model Name. :	M605v AC
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 12V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

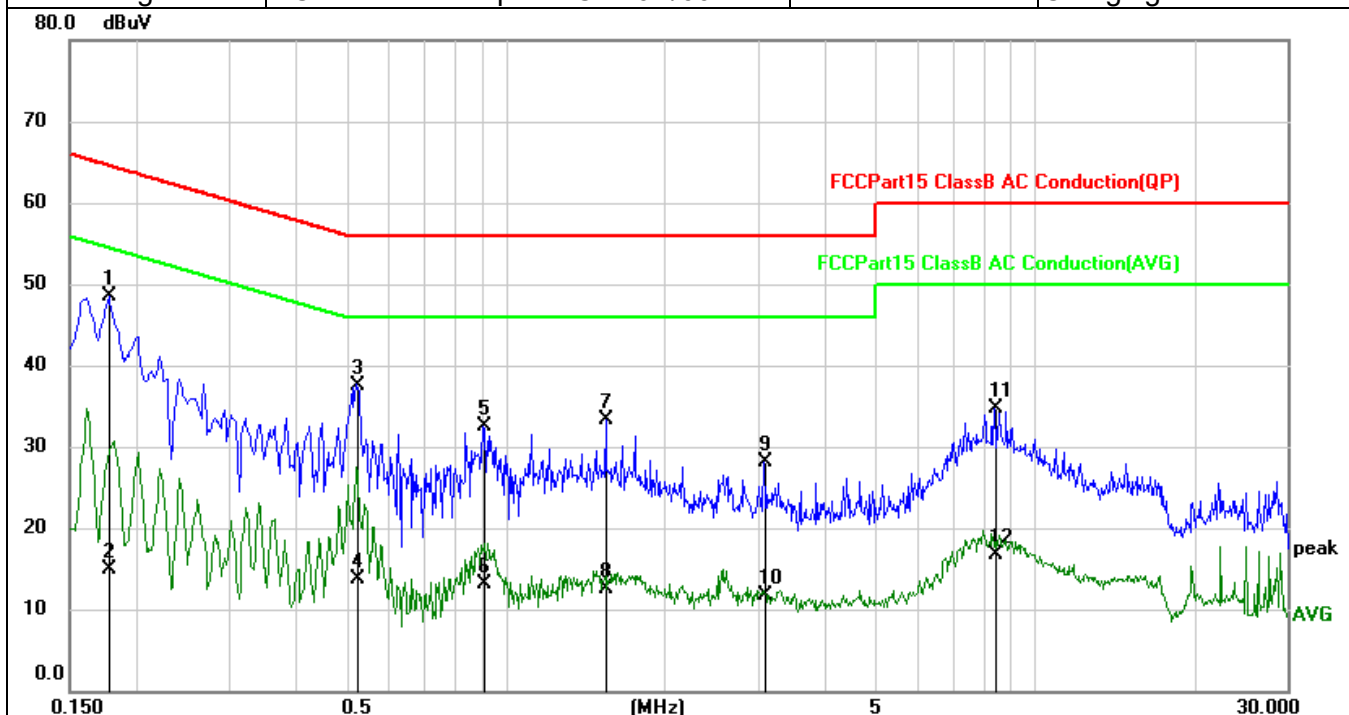

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1779	38.86	9.73	48.59	64.58	-15.99	QP
2		0.1779	5.24	9.73	14.97	54.58	-39.61	AVG
3		0.5220	27.68	9.92	37.60	56.00	-18.40	QP
4		0.5220	3.83	9.92	13.75	46.00	-32.25	AVG
5		0.9060	22.55	9.97	32.52	56.00	-23.48	QP
6		0.9060	3.22	9.97	13.19	46.00	-32.81	AVG
7		1.5500	23.39	9.99	33.38	56.00	-22.62	QP
8		1.5500	2.49	9.99	12.48	46.00	-33.52	AVG
9		3.0819	18.12	10.03	28.15	56.00	-27.85	QP
10		3.0819	1.76	10.03	11.79	46.00	-34.21	AVG
11		8.3779	24.38	10.25	34.63	60.00	-25.37	QP
12		8.3779	6.48	10.25	16.73	50.00	-33.27	AVG



EUT:	Wireless XDSL Modem Router	Model Name. :	M605v AC
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 12V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

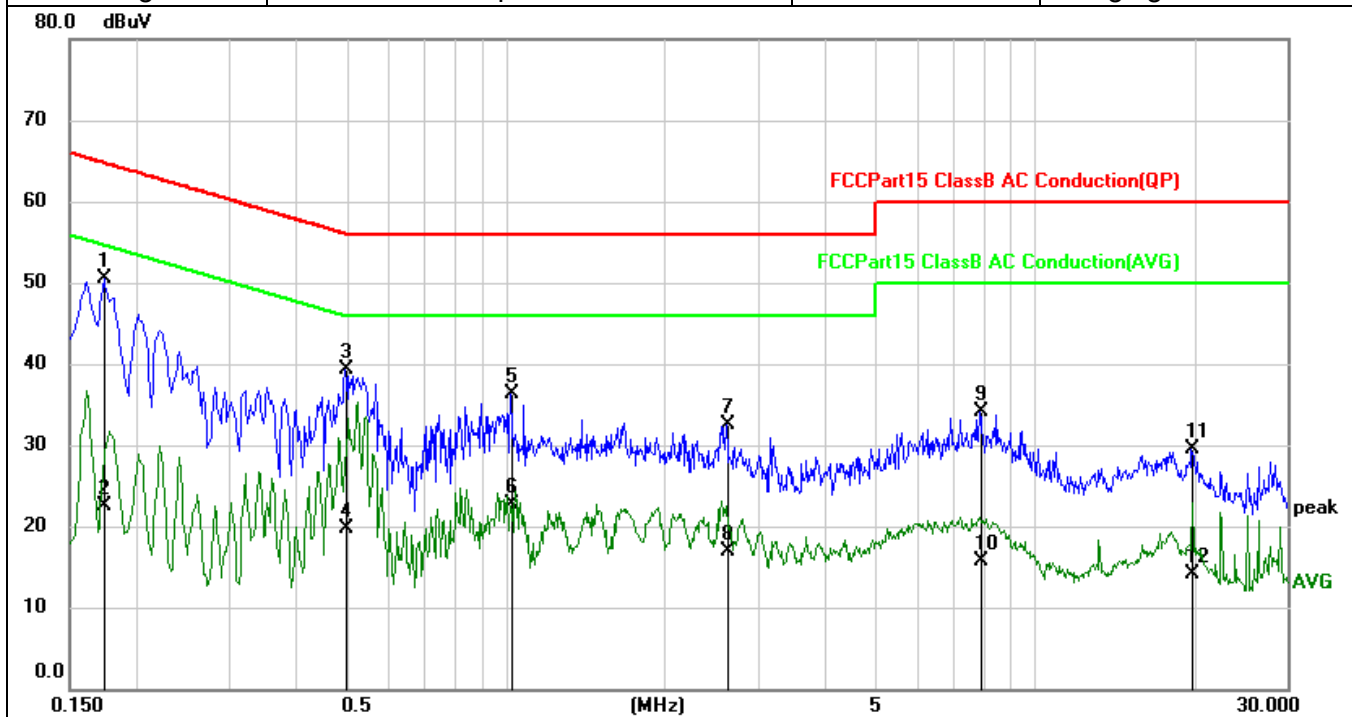

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1737	40.79	9.73	50.52	64.78	-14.26	QP
2		0.1737	12.70	9.73	22.43	54.78	-32.35	AVG
3		0.4979	29.30	9.92	39.22	56.03	-16.81	QP
4		0.4979	9.74	9.92	19.66	46.03	-26.37	AVG
5		1.0220	26.32	9.98	36.30	56.00	-19.70	QP
6		1.0220	12.73	9.98	22.71	46.00	-23.29	AVG
7		2.6179	22.56	10.02	32.58	56.00	-23.42	QP
8		2.6179	6.80	10.02	16.82	46.00	-29.18	AVG
9		7.8619	23.89	10.22	34.11	60.00	-25.89	QP
10		7.8619	5.50	10.22	15.72	50.00	-34.28	AVG
11		19.8018	19.29	10.21	29.50	60.00	-30.50	QP
12		19.8018	3.86	10.21	14.07	50.00	-35.93	AVG



5.4 26dB Emission Bandwidth and Occupied bandwidth

5.4.1 Limit

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier

5.4.2 Test procedure

26d Emission bandwidth

Set RBW = approximately 1% of the emission bandwidth.

Set VBW $\geq 3 \times \text{RBW}$

Detector = Peak.

Trace mode = Max hold.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

Set Span = 1.5 times to 5.0 times the OBW


Set RBW = 1% to 5% of the OBW.

Set VBW $\geq 3 \times \text{RBW}$, Detector = Peak.

Trace mode = Max hold.

Use the 99% power bandwidth function of the instrument.

5.4.3 Test setup

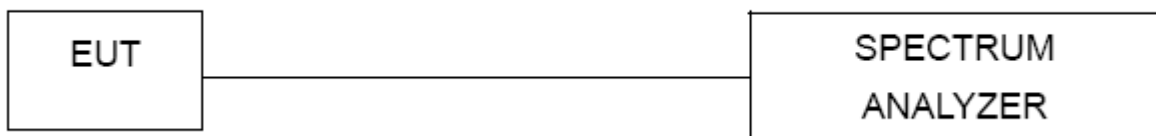

5.4.4 Test results

Note1: The antenna A and antenna B have been tested. The report only shows the worst antenna. The worst case is ANT B.



ANT B
For U-NII-1

Channel	Test Channel	Frequency(MHz)	26dB bandwidth(MHz)	99% bandwidth (MHz)	Limit(kHz)	Result
11a	CH36	5180	18.68	16.423	/	Pass
11a	CH40	5200	18.72	16.415	/	Pass
11a	CH48	5240	18.70	16.413	/	Pass
11ac (HT20)	CH36	5180	19.23	17.544	/	Pass
11ac (HT20)	CH40	5200	19.35	17.540	/	Pass
11ac (HT20)	CH48	5240	19.23	17.543	/	Pass
11ac (HT40)	CH38	5190	38.46	35.866	/	Pass
11ac (HT40)	CH46	5230	38.43	35.849	/	Pass
11ac (HT80)	CH42	5210	78.03	74.947	/	Pass

Channel	Test Channel	Frequency (MHz)	26dB bandwidth(MHz)	99% bandwidth(MHz)	Limit(kHz)	Result
11n (HT20)	CH36	5180	19.25	17.549	/	Pass
11n (HT20)	CH40	5200	19.24	17.541	/	Pass
11n (HT20)	CH48	5240	19.20	17.542	/	Pass
11n (HT40)	CH38	5190	38.28	35.822	/	Pass
11n (HT40)	CH46	5230	38.51	35.852	/	Pass




For U-NII-3

Channel	Test Channel	Frequency(MHz)	99% bandwidth(MHz)	Limit(kHz)	Result
11a	CH149	5745	17.056	/	Pass
11a	CH157	5785	17.009	/	Pass
11a	CH165	5825	17.037	/	Pass
11ac (HT20)	CH149	5745	17.811	/	Pass
11ac (HT20)	CH157	5785	17.833	/	Pass
11ac (HT20)	CH165	5825	17.805	/	Pass
11ac (HT40)	CH151	5755	36.185	/	Pass
11ac (HT40)	CH159	5795	36.271	/	Pass
11ac (HT80)	CH155	5775	75.143		

Channel	Test Channel	Frequency(MHz)	99% bandwidth(MHz)	Limit(kHz)	Result
11n (HT20)	CH149	5745	17.802	/	Pass
11n (HT20)	CH157	5785	17.837	/	Pass
11n (HT20)	CH165	5825	17.784	/	Pass
11n (HT40)	CH151	5755	36.261	/	Pass
11n (HT40)	CH159	5795	36.244	/	Pass




Test plots:
For U-NII-1

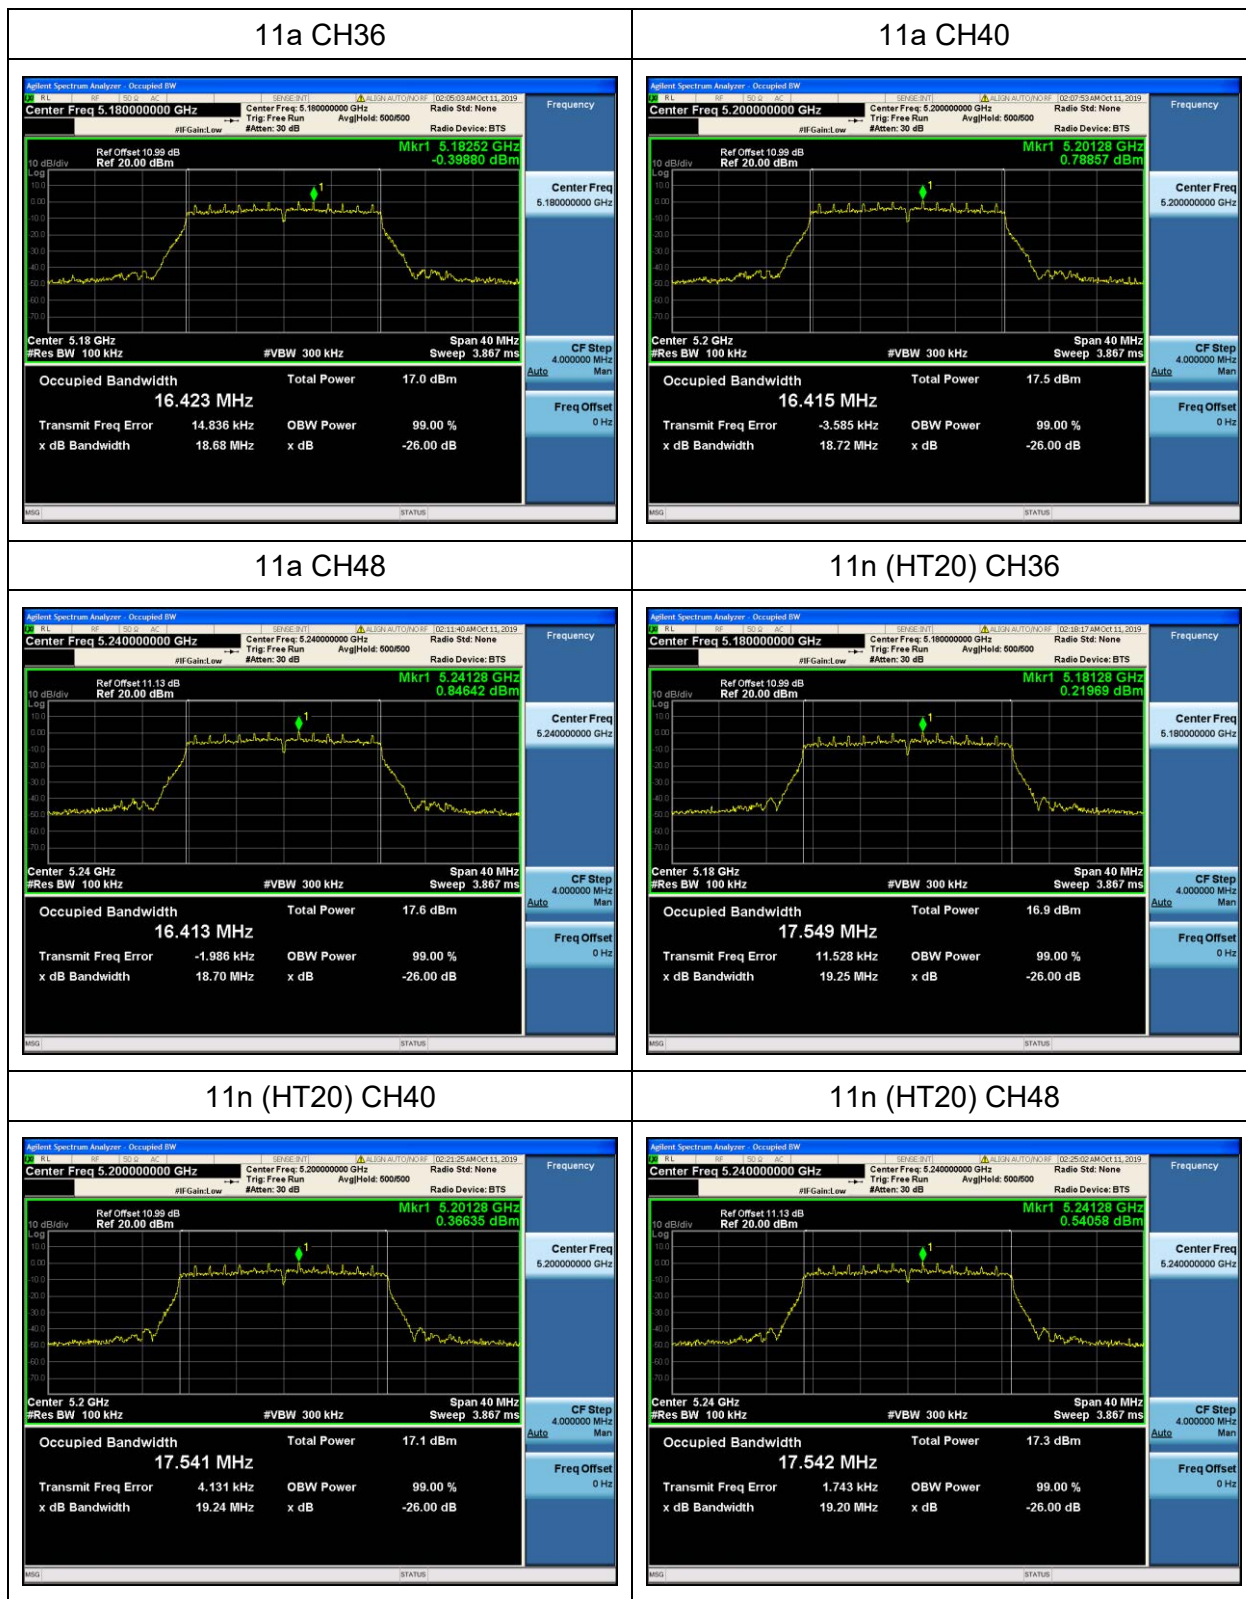





11n (HT40) CH38

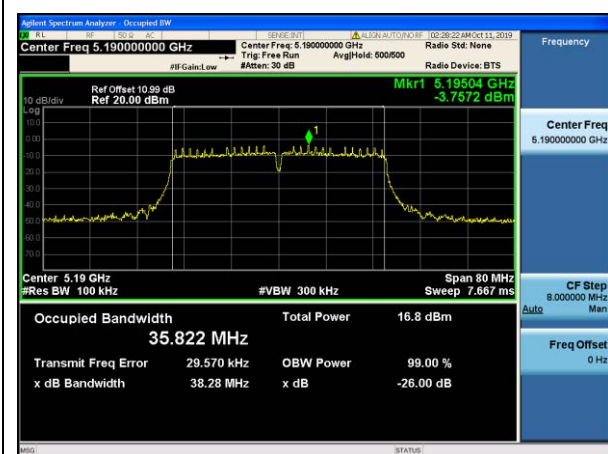

11n (HT40) CH46

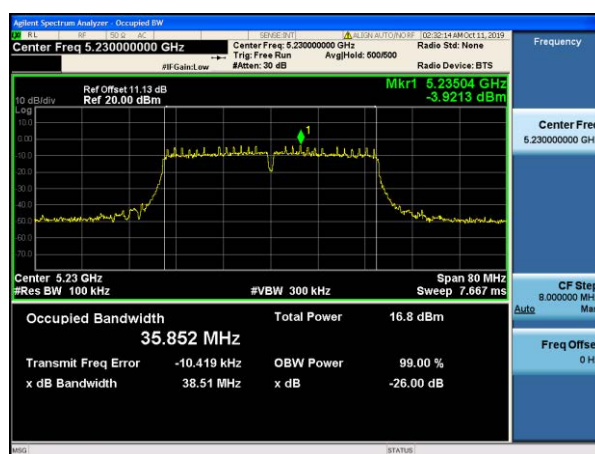

11ac (HT20) CH36

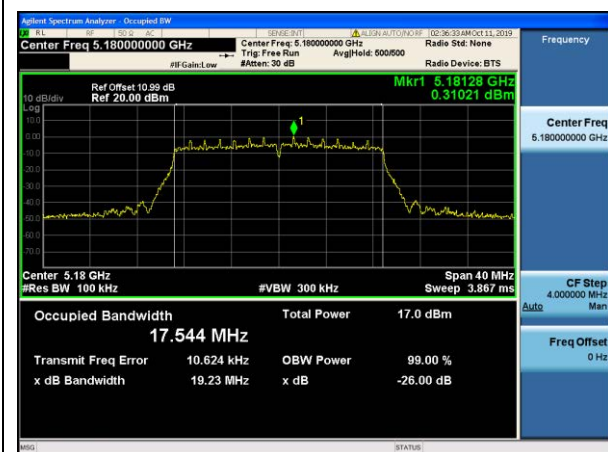


11ac (HT20) CH40



11ac (HT20) CH48




11ac (HT40) CH38

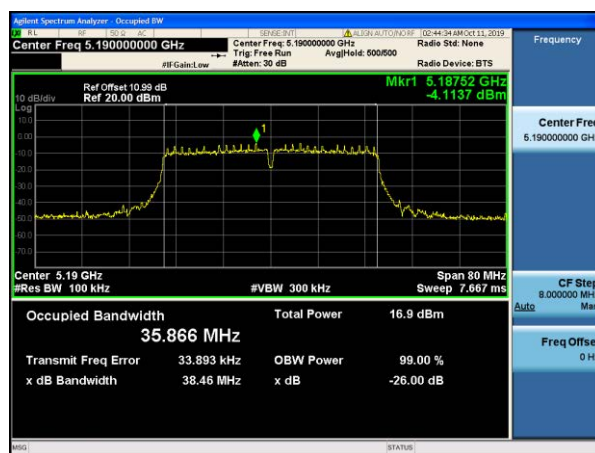




11ac (HT40) CH46

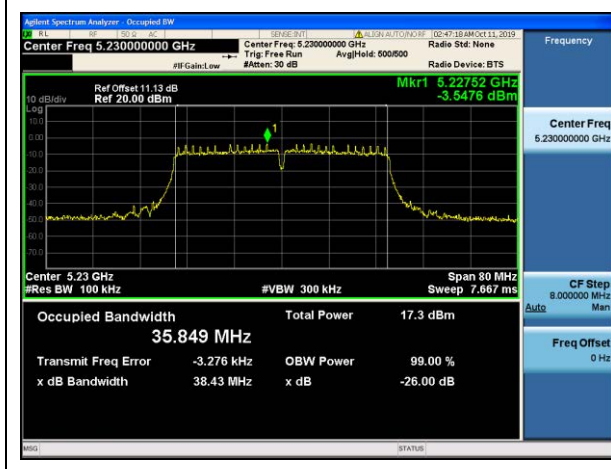

11ac (HT80) CH46

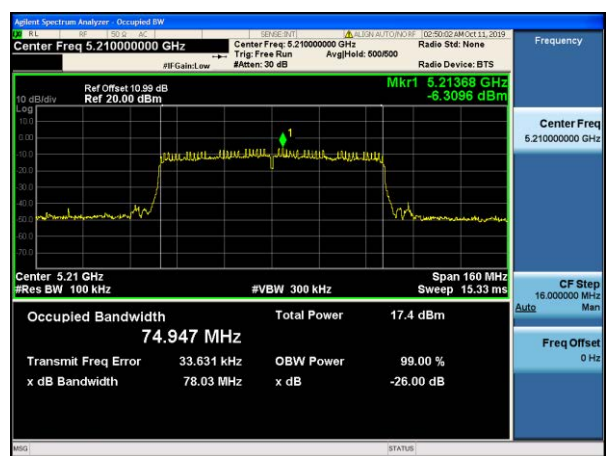


For U-NII-3


11a CH149




11a CH157

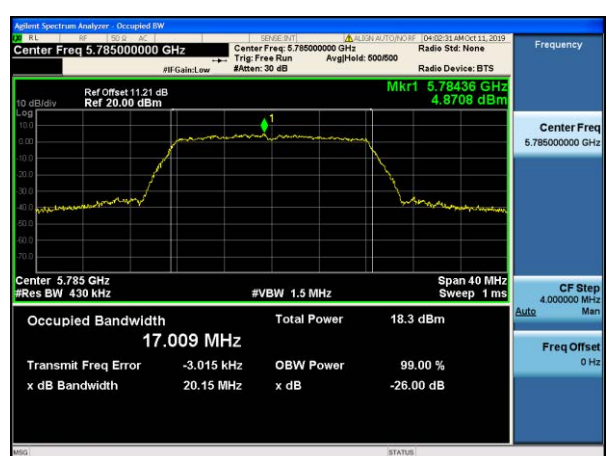



11a CH165

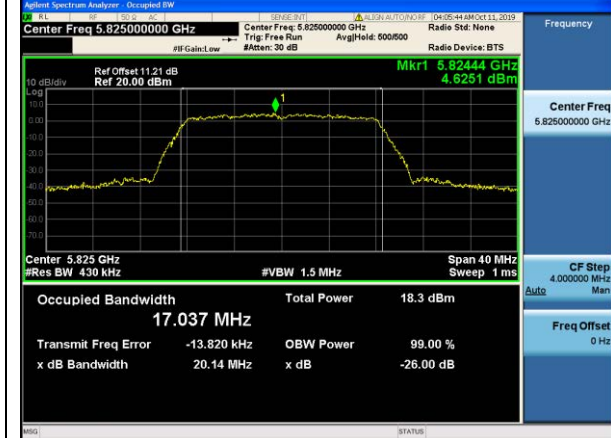

11n(HT20) CH149

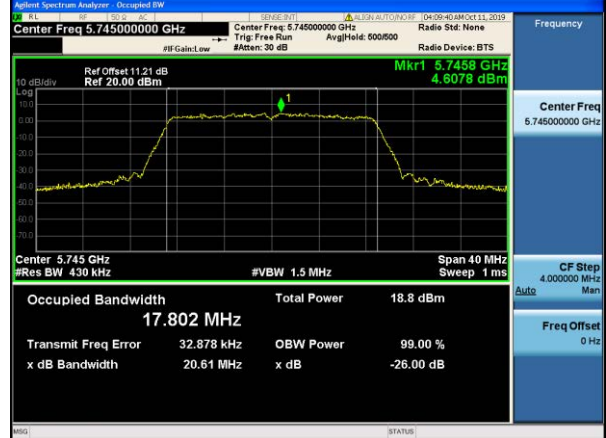

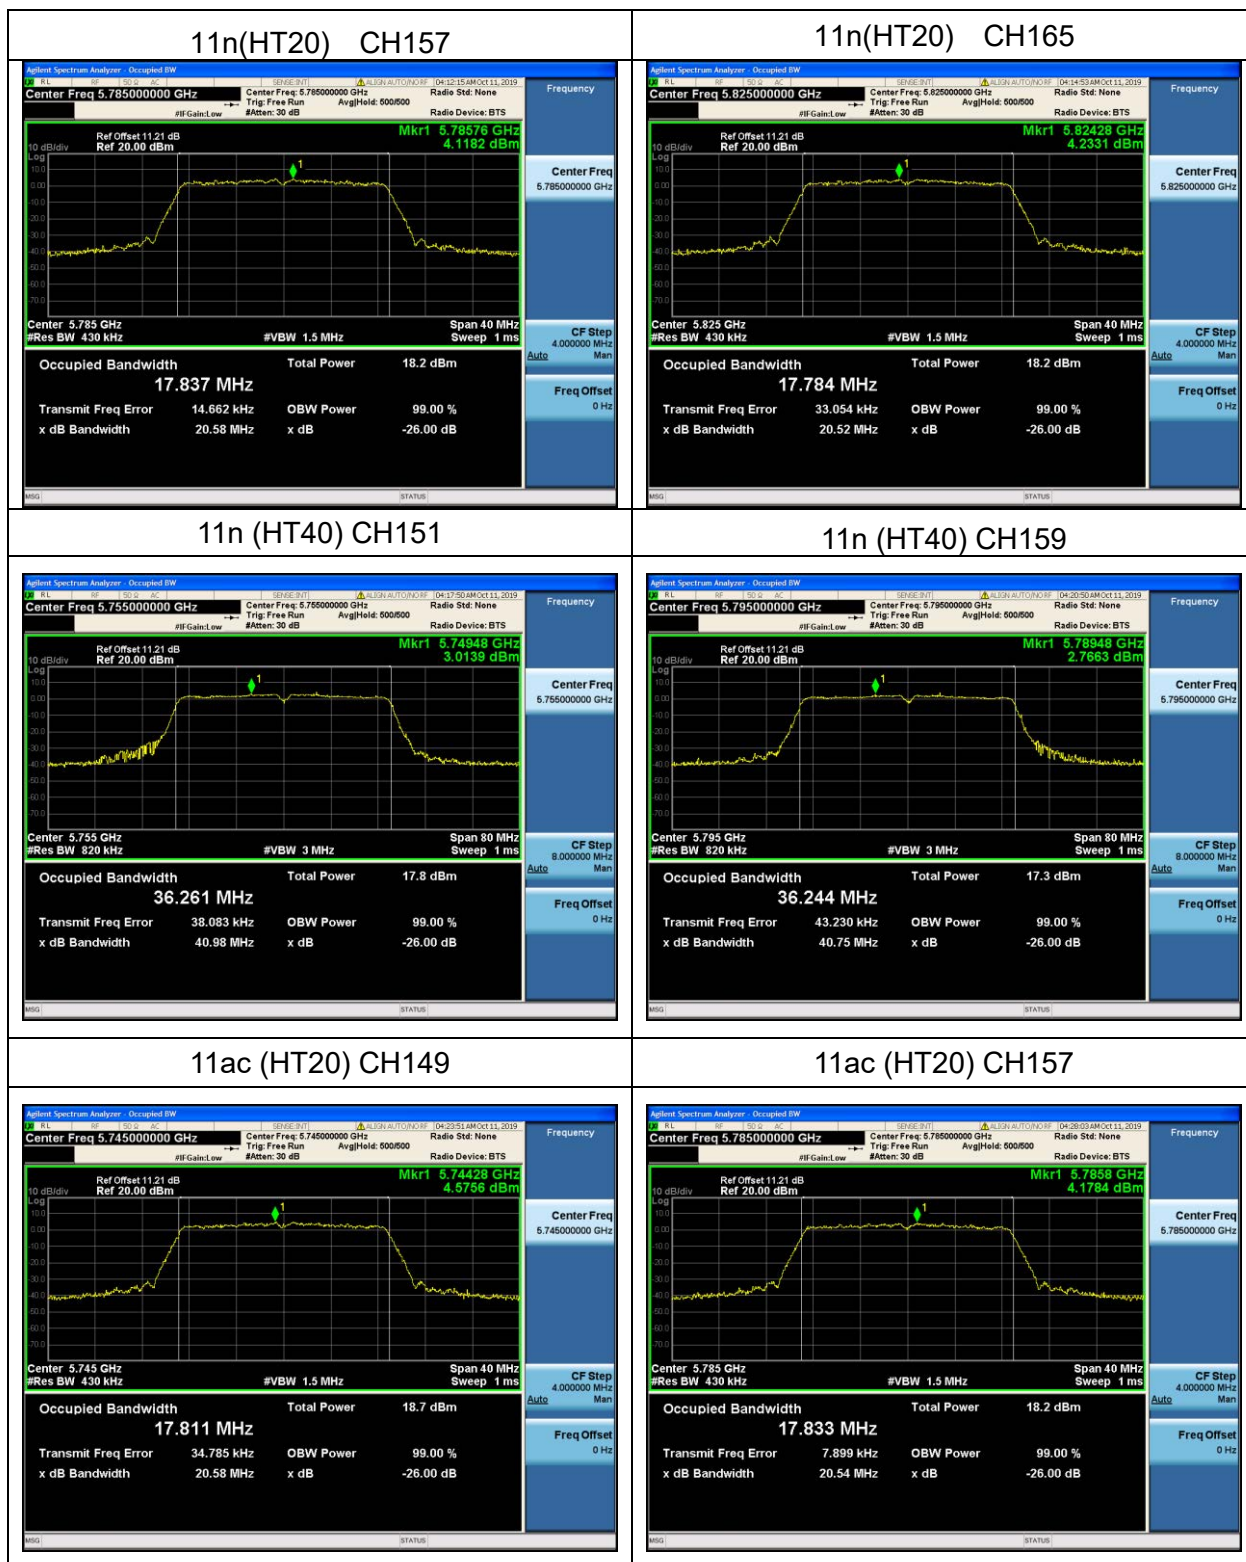

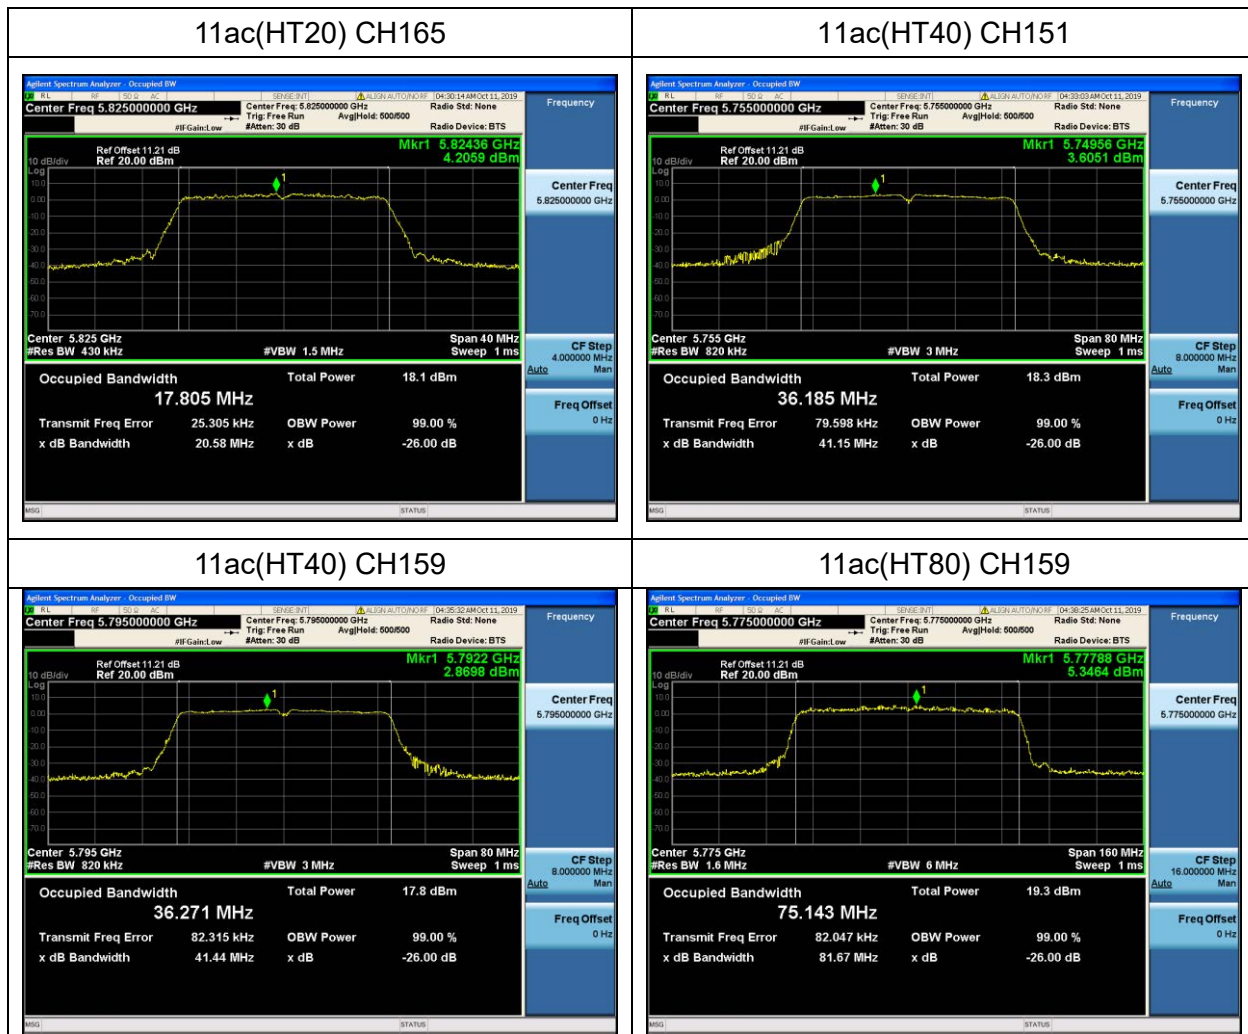

5.5 6dB Bandwidth

5.5.1 Limit

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier

5.5.2 Test procedure

1. Set RBW= 100 kHz.
2. Set the Video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

5.5.3 Test setup



5.5.4 Test results



Note1: The antenna A and antenna B have been tested. The report only shows the worst antenna. The worst case is ANT B.

ANT B

For U-NII-3


Channel	Test Channel	Frequency(MHz)	6dB bandwidth(MHz)	Limit(kHz)	Result
11a	CH149	5745	16.42	500	Pass
11a	CH157	5785	16.34	500	Pass
11a	CH165	5825	16.40	500	Pass
11ac (HT20)	CH149	5745	17.62	500	Pass
11ac (HT20)	CH157	5785	17.62	500	Pass
11ac (HT20)	CH165	5825	17.63	500	Pass
11ac (HT40)	CH151	5755	36.04	500	Pass
11ac (HT40)	CH159	5795	36.38	500	Pass
11ac (HT80)	CH155	5775	74.60	500	Pass

Channel	Test Channel	Frequency(MHz)	6dB bandwidth(MHz)	Limit(kHz)	Result
11n (HT20)	CH149	5745	17.41	500	Pass
11n (HT20)	CH157	5785	17.54	500	Pass
11n (HT20)	CH165	5825	17.62	500	Pass
11n (HT40)	CH151	5755	36.12	500	Pass
11n (HT40)	CH159	5795	36.19	500	Pass




Test plots:

For U-NII-3

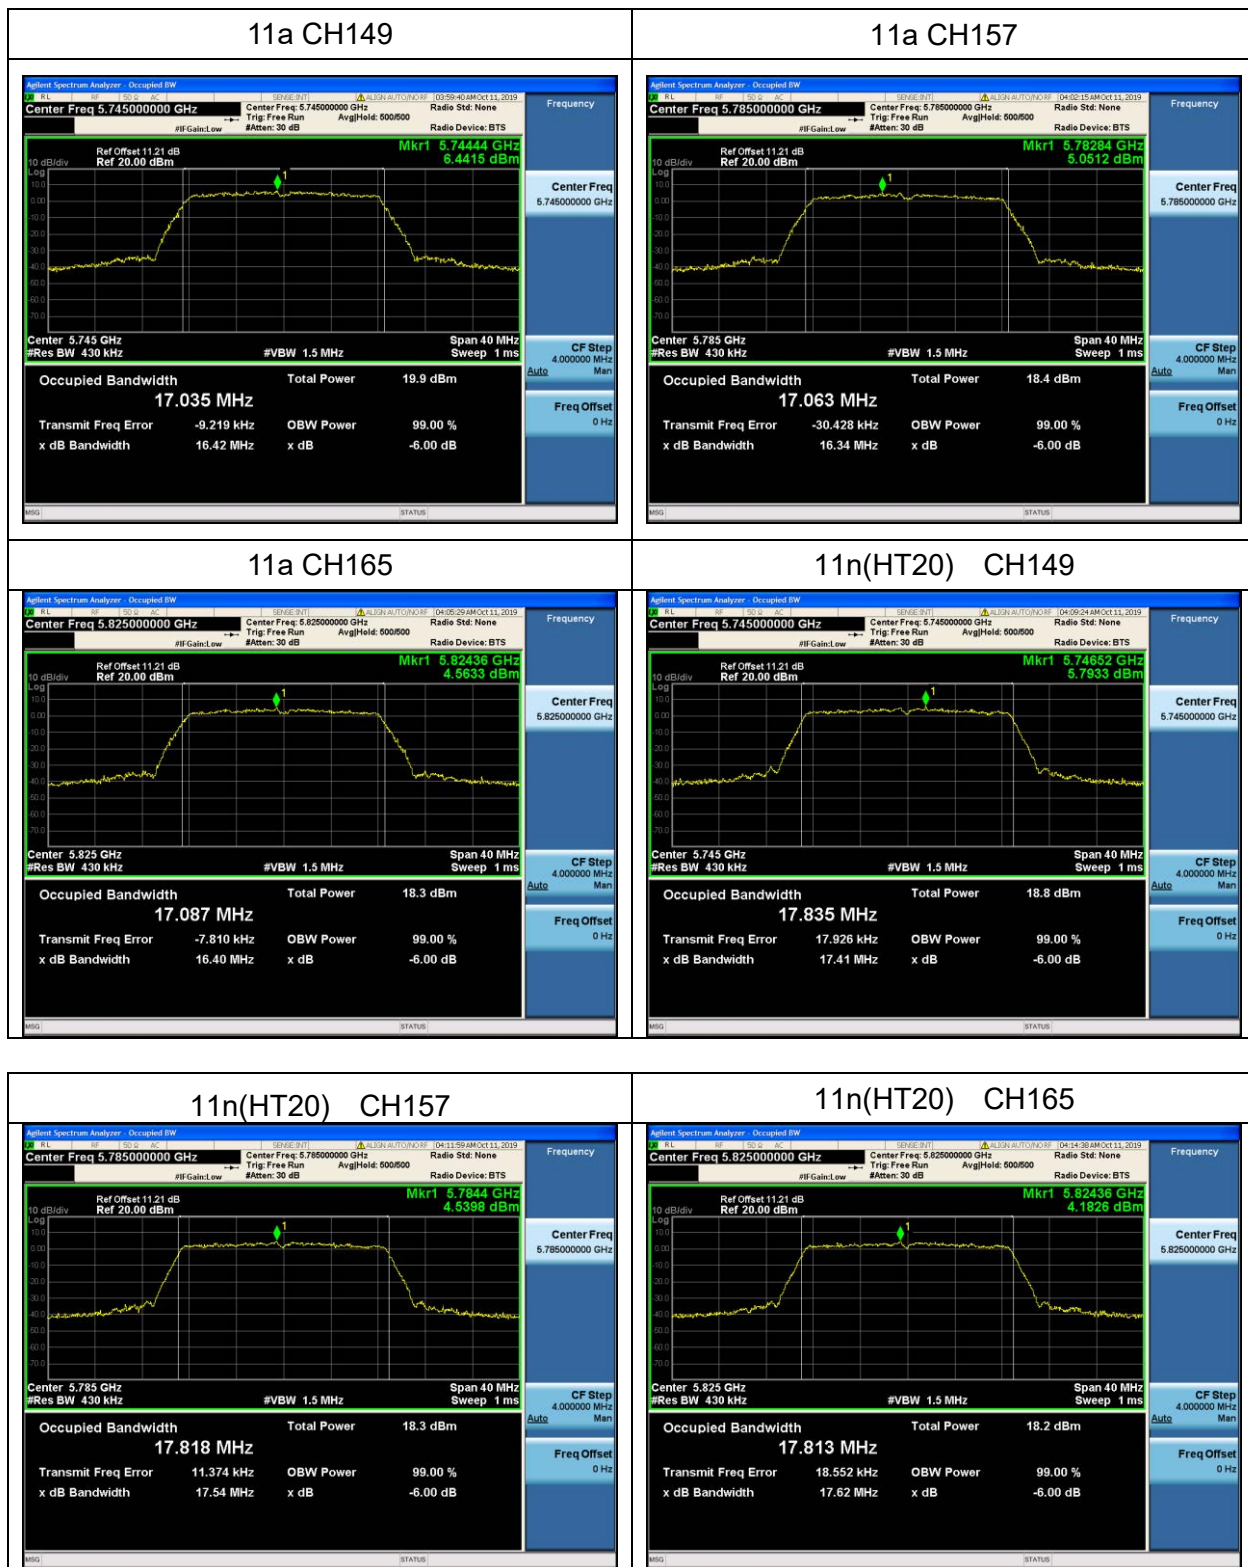





11n (HT40) CH151

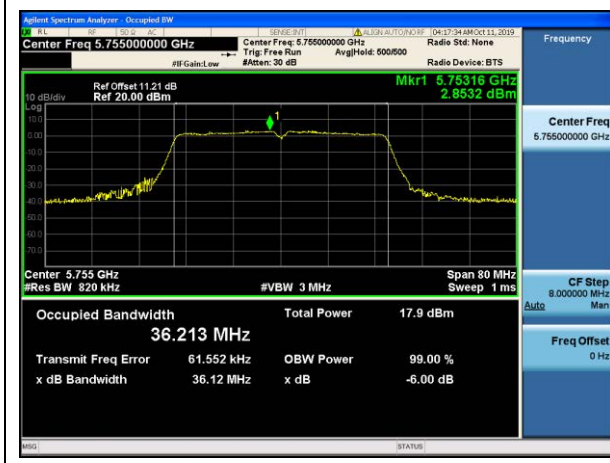


11n (HT40) CH159

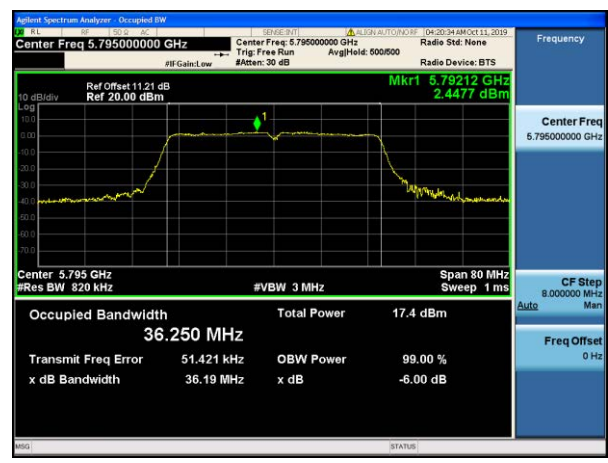


11ac (HT20) CH149

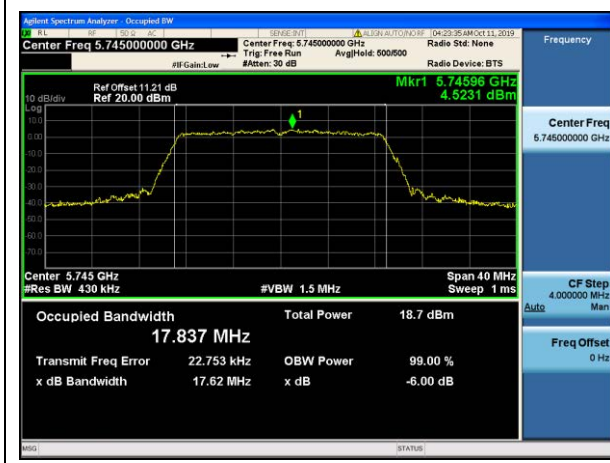

11ac (HT20) CH157

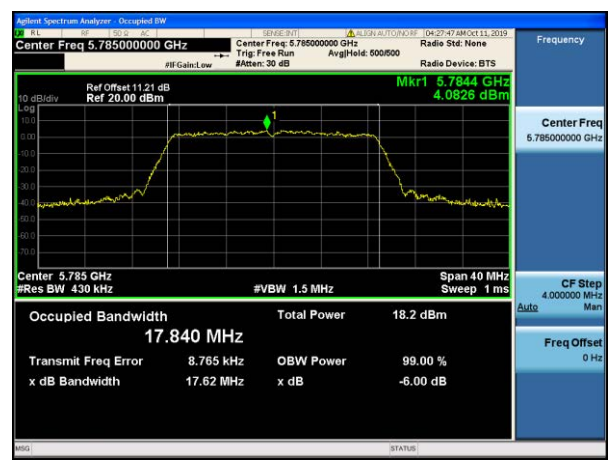

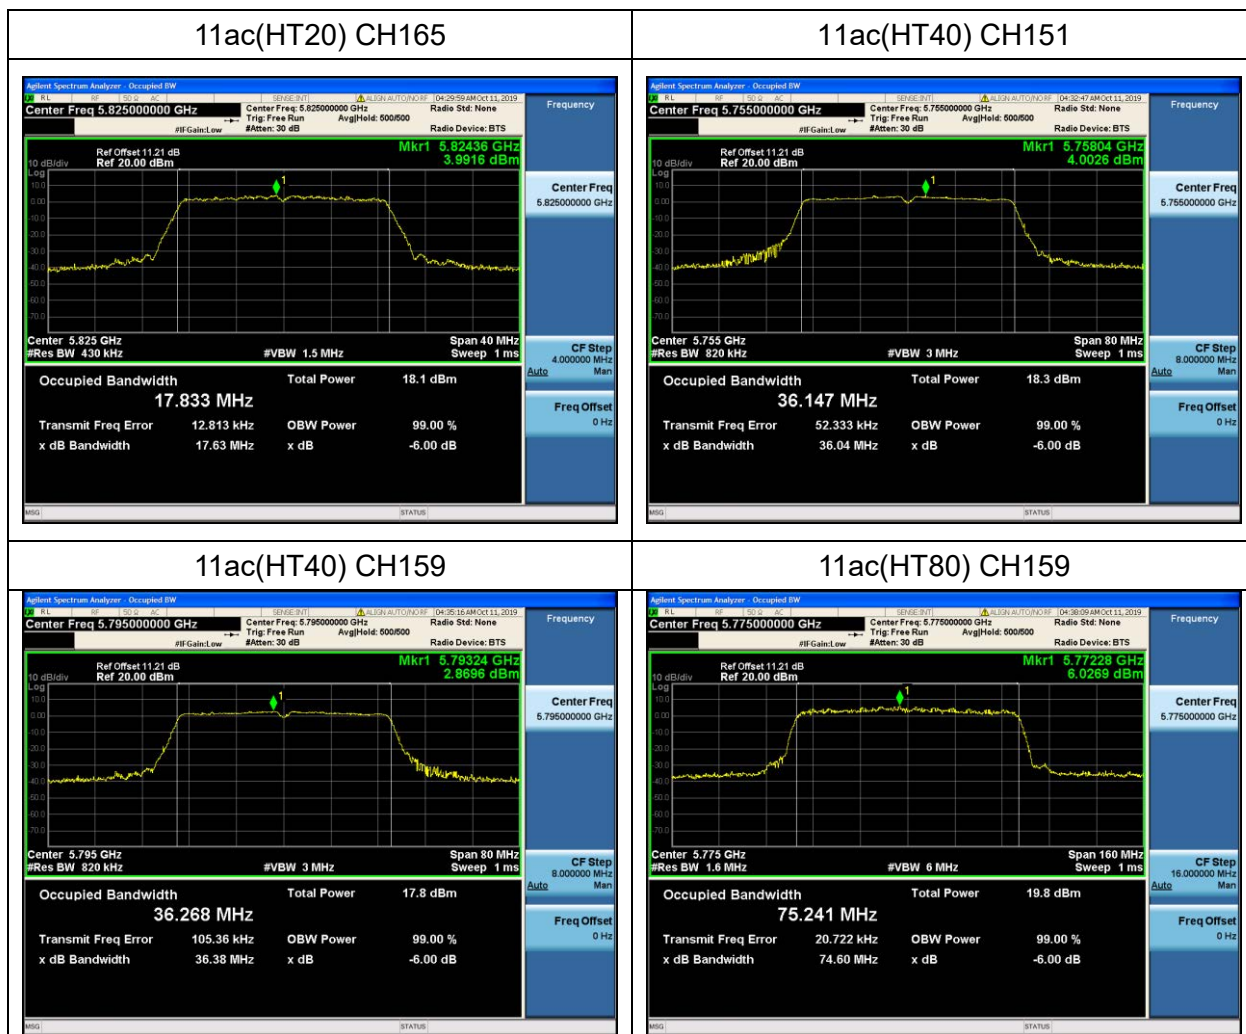



5.6 Radiated spurious emission

Radiated Emission Limits

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.6.1 Test procedure

The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the floor on a support that is RF transparent for the frequencies of interest. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m.


The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.6.2 Test setup


(A) Radiated Emission test-up Frequency Below 30MHz

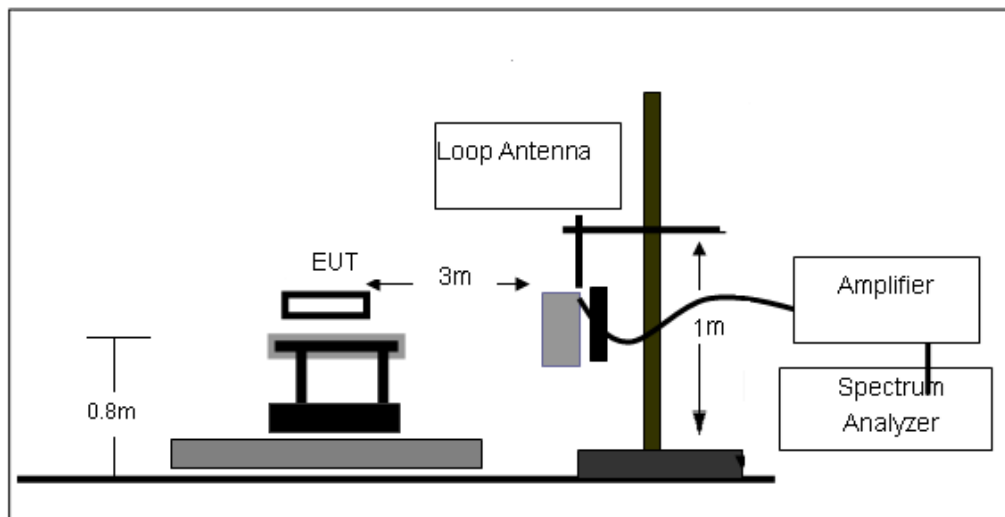

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

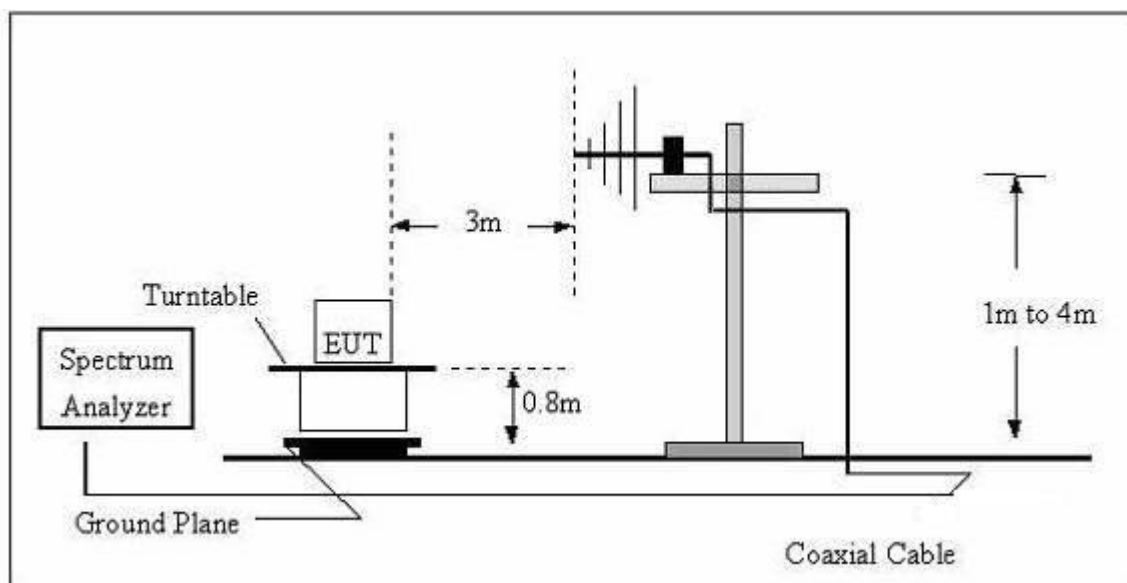

(C) Radiated Emission Test-Up Frequency Above 1GHz

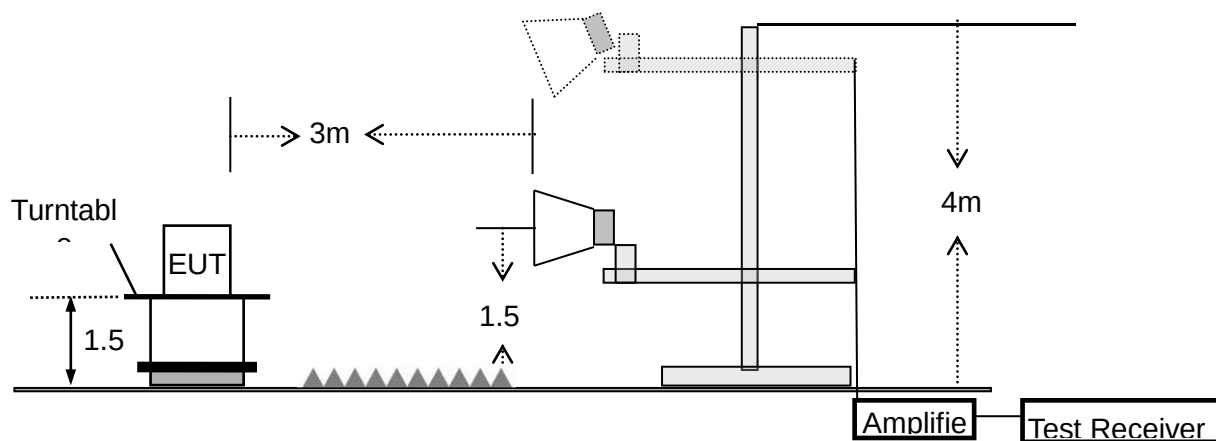



5.6.3 Test results

EUT :	Wireless XDSL Modem Router	Model Name. :	M605v AC
Pressure:	1010 hPa	Test Voltage:	DC 12V from adapter AC 120V/60Hz
Test Mode:	TX	Polarization :	--

Below 30MHz

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	Pass
--	--	--	--	Pass

Note1: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note2: Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor.




Between 30MHz – 1GHz

The antenna A and antenna B have been tested. The report only shows the worst antenna. The worst case is ANT B.

Note1: Emission Level = Meter Reading + Factor, Margin= Emission Level- Limit, Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note2: The peak value is less than the AV value, AV value is not required Factor added by measurement software automatically.


EUT:	Wireless XDSL Modem Router	Model Name. :	M605v AC
Pressure:	1010 hPa	Phase:	H
Test Voltage:	DC 12V from adapter AC 120V/60Hz	Mode:	Charging+TX

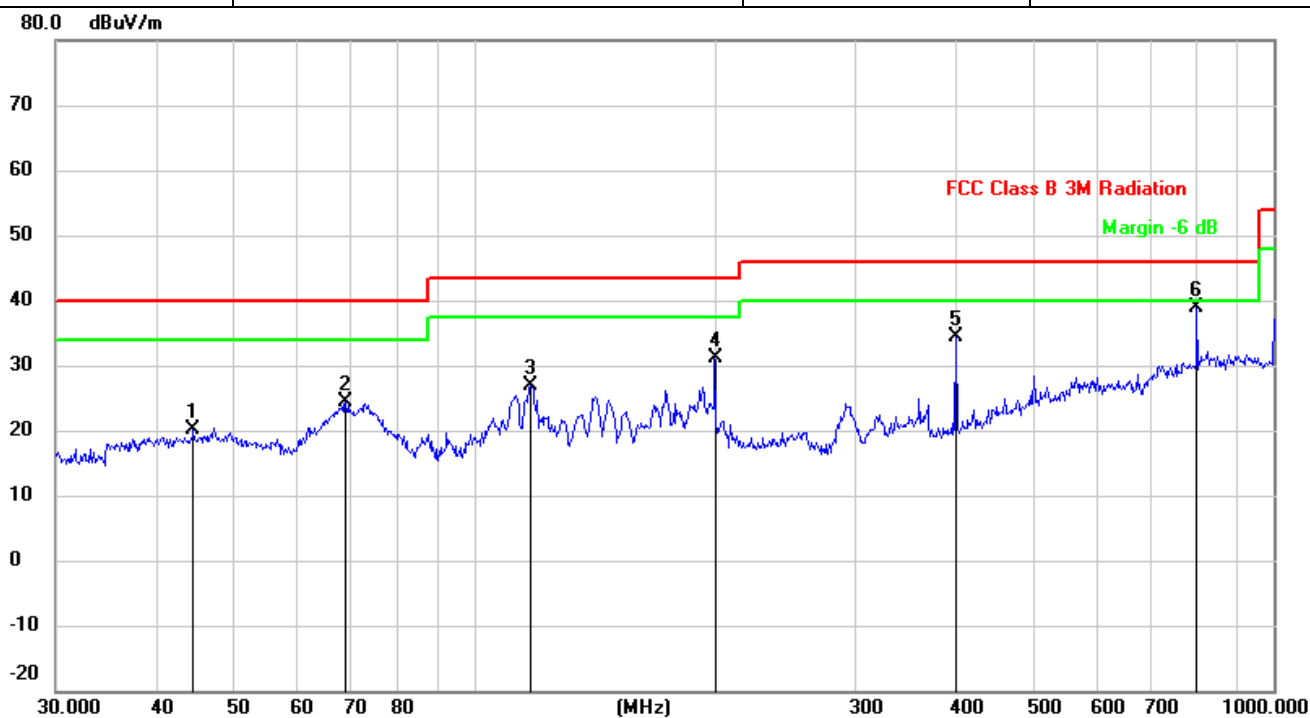

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		44.5867	26.74	-6.66	20.08	40.00	-19.92	QP
2		69.1140	33.95	-9.62	24.33	40.00	-15.67	QP
3		117.7724	35.28	-8.40	26.88	43.50	-16.62	QP
4		199.9856	38.12	-7.04	31.08	43.50	-12.42	QP
5		400.4318	38.45	-3.95	34.50	46.00	-11.50	QP
6	*	801.7862	37.35	1.50	38.85	46.00	-7.15	QP



EUT:	Wireless XDSL Modem Router	Model Name. :	M605v AC
Pressure:	1010 hPa	Phase :	V
Test Voltage:	DC 12V from adapter AC 120V/60Hz	Mode:	Charging+TX

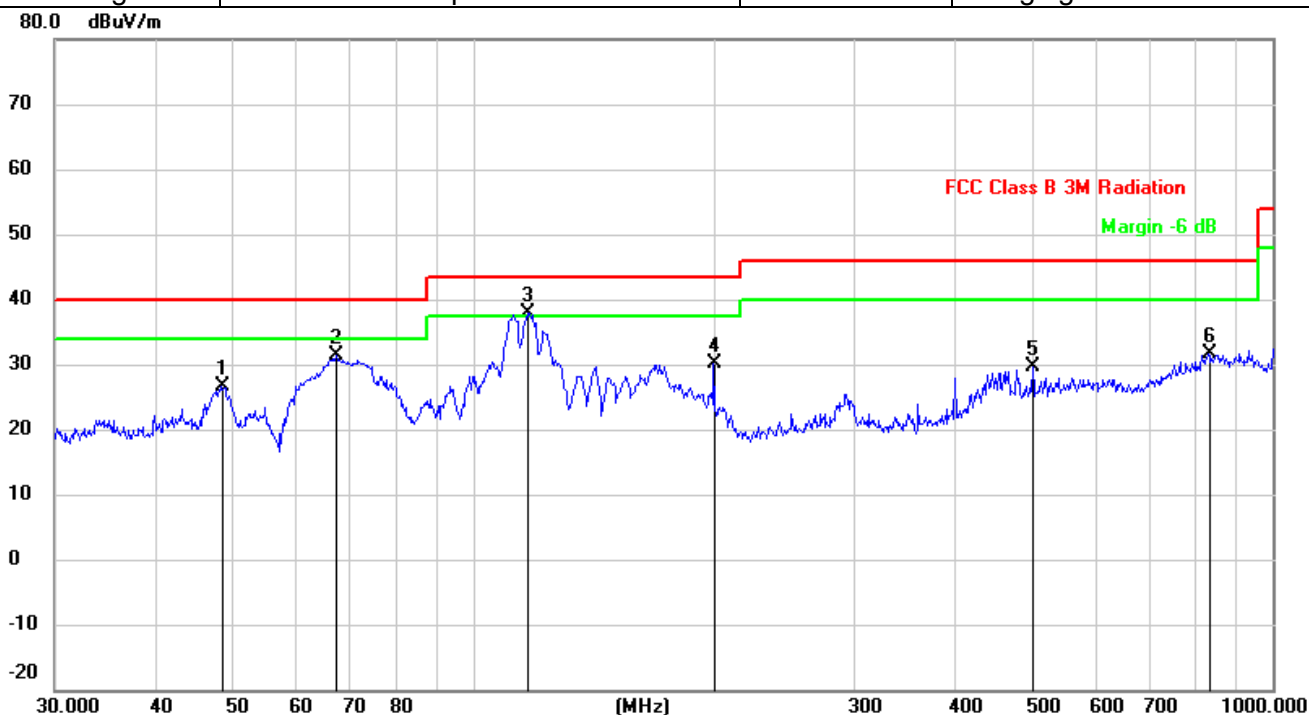

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		48.5016	33.18	-6.54	26.64	40.00	-13.36	QP
2		67.4381	40.64	-9.36	31.28	40.00	-8.72	QP
3	*	116.9495	46.19	-8.34	37.85	43.50	-5.65	QP
4		199.9856	37.08	-7.04	30.04	43.50	-13.46	QP
5		501.1788	31.95	-2.30	29.65	46.00	-16.35	QP
6		830.4002	28.96	2.61	31.57	46.00	-14.43	QP



1G-40GHz

Note1 : Emission Level = Meter Reading + Factor, Margin= Emission Level- Limit, Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note2 : The peak value is less than the AV value, AV value is not required Factor added by measurement software automatically.

Note3 : The spurious emission of 25GHz – 40GHz band which the margin is lower more than 20dB, So that it is not reported in this test report.

Note4: The antenna A and antenna B have been tested. The report only shows the worst antenna. The worst case is ANT B.

ANT B

For U-NII-1

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5185 MHz)-Above 1G									
Vertical	4434.212	55.73	5.94	35.40	44.00	53.07	74.00	-20.93	Pk
Vertical	4434.212	45.15	5.94	35.40	44.00	42.49	54.00	-11.51	AV
Vertical	10370.154	62.30	8.46	39.75	44.50	66.01	74.00	-7.99	Pk
Vertical	10370.154	42.82	8.46	39.75	44.50	46.53	54.00	-7.47	AV
Vertical	15540.126	55.96	10.12	38.80	44.10	60.78	74.00	-13.22	Pk
Vertical	15540.126	41.89	10.12	38.80	42.70	48.11	54.00	-5.89	AV
Horizontal	4434.242	57.78	5.94	35.18	44.00	54.90	74.00	-19.10	Pk
Horizontal	4434.242	44.13	5.94	35.18	44.00	41.25	54.00	-12.75	AV
Horizontal	10370.121	60.84	8.46	38.71	44.50	63.51	74.00	-10.49	Pk
Horizontal	10730.121	45.12	8.46	38.71	44.50	47.79	54.00	-6.21	AV
Horizontal	15540.115	57.58	10.12	38.38	44.10	61.98	74.00	-12.02	Pk
Horizontal	15540.115	43.98	10.12	38.38	44.10	48.38	54.00	-5.62	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.142	56.41	6.48	36.35	44.05	55.19	74.00	-18.81	Pk
Vertical	4592.142	43.58	6.48	36.35	44.05	42.36	54.00	-11.64	AV
Vertical	10401.205	62.14	8.47	37.88	44.51	63.98	74.00	-10.02	Pk
Vertical	10401.205	46.92	8.47	37.88	44.51	48.76	54.00	-5.24	AV
Vertical	15600.176	57.86	10.12	38.8	44.10	62.68	74.00	-11.32	Pk
Vertical	15600.176	42.08	10.12	38.8	42.70	48.30	54.00	-5.70	AV
Horizontal	4592.313	58.77	6.48	36.37	44.05	57.57	74.00	-16.43	Pk
Horizontal	4592.313	41.75	6.48	36.37	44.05	40.55	54.00	-13.45	AV
Horizontal	10400.215	61.31	8.47	38.64	44.50	63.92	74.00	-10.08	Pk
Horizontal	10400.215	47.25	8.47	38.64	44.50	49.86	54.00	-4.14	AV
Horizontal	15600.175	58.84	10.12	38.38	44.10	63.24	74.00	-10.76	Pk
Horizontal	15600.175	42.56	10.12	38.38	44.10	46.96	54.00	-7.04	AV



High Channel (5240 MHz)-Above 1G									
Vertical	4739.216	60.48	7.10	37.24	43.50	61.32	74.00	-12.68	Pk
Vertical	4739.216	46.98	7.10	37.24	43.50	47.82	54.00	-6.18	AV
Vertical	10480.274	61.84	8.46	37.68	44.50	63.48	74.00	-10.52	Pk
Vertical	10480.274	45.87	8.46	37.68	44.50	47.51	54.00	-6.49	AV
Vertical	15720.189	57.67	10.12	38.8	44.10	62.49	74.00	-11.51	Pk
Vertical	15720.189	42.98	10.12	38.8	42.70	49.20	54.00	-4.80	AV
Horizontal	4739.116	58.93	7.10	37.24	43.50	59.77	74.00	-14.23	Pk
Horizontal	4739.116	43.99	7.10	37.24	43.50	44.83	54.00	-9.17	AV
Horizontal	10481.402	58.46	8.46	38.57	44.50	60.99	74.00	-13.01	Pk
Horizontal	10481.402	42.67	8.46	38.57	44.50	45.20	54.00	-8.80	AV
Horizontal	15720.263	56.92	10.12	38.38	44.10	61.32	74.00	-12.68	Pk
Horizontal	15720.263	43.14	10.12	38.38	44.10	47.54	54.00	-6.46	AV

Note: Both horizontal and vertical antenna polarities were tested and only the worst case(horizontal) emissions were reported.



For U-NII-3

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4434.212	56.54	5.94	35.40	44.00	53.88	74.00	-20.12	Pk
Vertical	4434.212	45.12	5.94	35.40	44.00	42.46	54.00	-11.54	AV
Vertical	10370.154	63.40	8.46	39.75	44.50	67.11	74.00	-6.89	Pk
Vertical	10370.154	44.16	8.46	39.75	44.50	47.87	54.00	-6.13	AV
Vertical	15540.126	55.49	10.12	38.80	44.10	60.31	74.00	-13.69	Pk
Vertical	15540.126	43.73	10.12	38.80	42.70	49.95	54.00	-4.05	AV
Horizontal	4434.242	58.08	5.94	35.18	44.00	55.20	74.00	-18.80	Pk
Horizontal	4434.242	43.22	5.94	35.18	44.00	40.34	54.00	-13.66	AV
Horizontal	10370.121	62.30	8.46	38.71	44.50	64.97	74.00	-9.03	Pk
Horizontal	10730.121	45.21	8.46	38.71	44.50	47.88	54.00	-6.12	AV
Horizontal	15540.115	57.11	10.12	38.38	44.10	61.51	74.00	-12.49	Pk
Horizontal	15540.115	42.89	10.12	38.38	44.10	47.29	54.00	-6.71	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.142	57.75	6.48	36.35	44.05	56.53	74.00	-17.47	Pk
Vertical	4592.142	42.25	6.48	36.35	44.05	41.03	54.00	-12.97	AV
Vertical	10401.205	61.12	8.47	37.88	44.51	62.96	74.00	-11.04	Pk
Vertical	10401.205	46.00	8.47	37.88	44.51	47.84	54.00	-6.16	AV
Vertical	15600.176	57.99	10.12	38.8	44.10	62.81	74.00	-11.19	Pk
Vertical	15600.176	42.97	10.12	38.8	42.70	49.19	54.00	-4.81	AV
Horizontal	4592.313	59.24	6.48	36.37	44.05	58.04	74.00	-15.96	Pk
Horizontal	4592.313	42.48	6.48	36.37	44.05	41.28	54.00	-12.72	AV
Horizontal	10400.215	61.77	8.47	38.64	44.50	64.38	74.00	-9.62	Pk
Horizontal	10400.215	46.86	8.47	38.64	44.50	49.47	54.00	-4.53	AV
Horizontal	15600.175	58.88	10.12	38.38	44.10	63.28	74.00	-10.72	Pk
Horizontal	15600.175	43.90	10.12	38.38	44.10	48.30	54.00	-5.70	AV



High Channel (5825 MHz)-Above 1G									
Vertical	4739.216	59.22	7.10	37.24	43.50	60.06	74.00	-13.94	Pk
Vertical	4739.216	47.21	7.10	37.24	43.50	48.05	54.00	-5.95	AV
Vertical	10480.274	61.51	8.46	37.68	44.50	63.15	74.00	-10.85	Pk
Vertical	10480.274	46.78	8.46	37.68	44.50	48.42	54.00	-5.58	AV
Vertical	15720.189	57.80	10.12	38.8	44.10	62.62	74.00	-11.38	Pk
Vertical	15720.189	42.45	10.12	38.8	42.70	48.67	54.00	-5.33	AV
Horizontal	4739.116	60.47	7.10	37.24	43.50	61.31	74.00	-12.69	Pk
Horizontal	4739.116	45.17	7.10	37.24	43.50	46.01	54.00	-7.99	AV
Horizontal	10481.402	58.90	8.46	38.57	44.50	61.43	74.00	-12.57	Pk
Horizontal	10481.402	44.27	8.46	38.57	44.50	46.80	54.00	-7.20	AV
Horizontal	15720.263	57.70	10.12	38.38	44.10	62.10	74.00	-11.90	Pk
Horizontal	15720.263	41.97	10.12	38.38	44.10	46.37	54.00	-7.63	AV



5.7 Conduction spurious emission

5.7.1 Limits

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.7.2 Test setup



5.7.3 Test procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize


5.7.4 Test results

Note1: The antenna A and antenna B have been tested. The report only shows the worst antenna. The worst case is ANT B.

ANT B


For U-NII-1

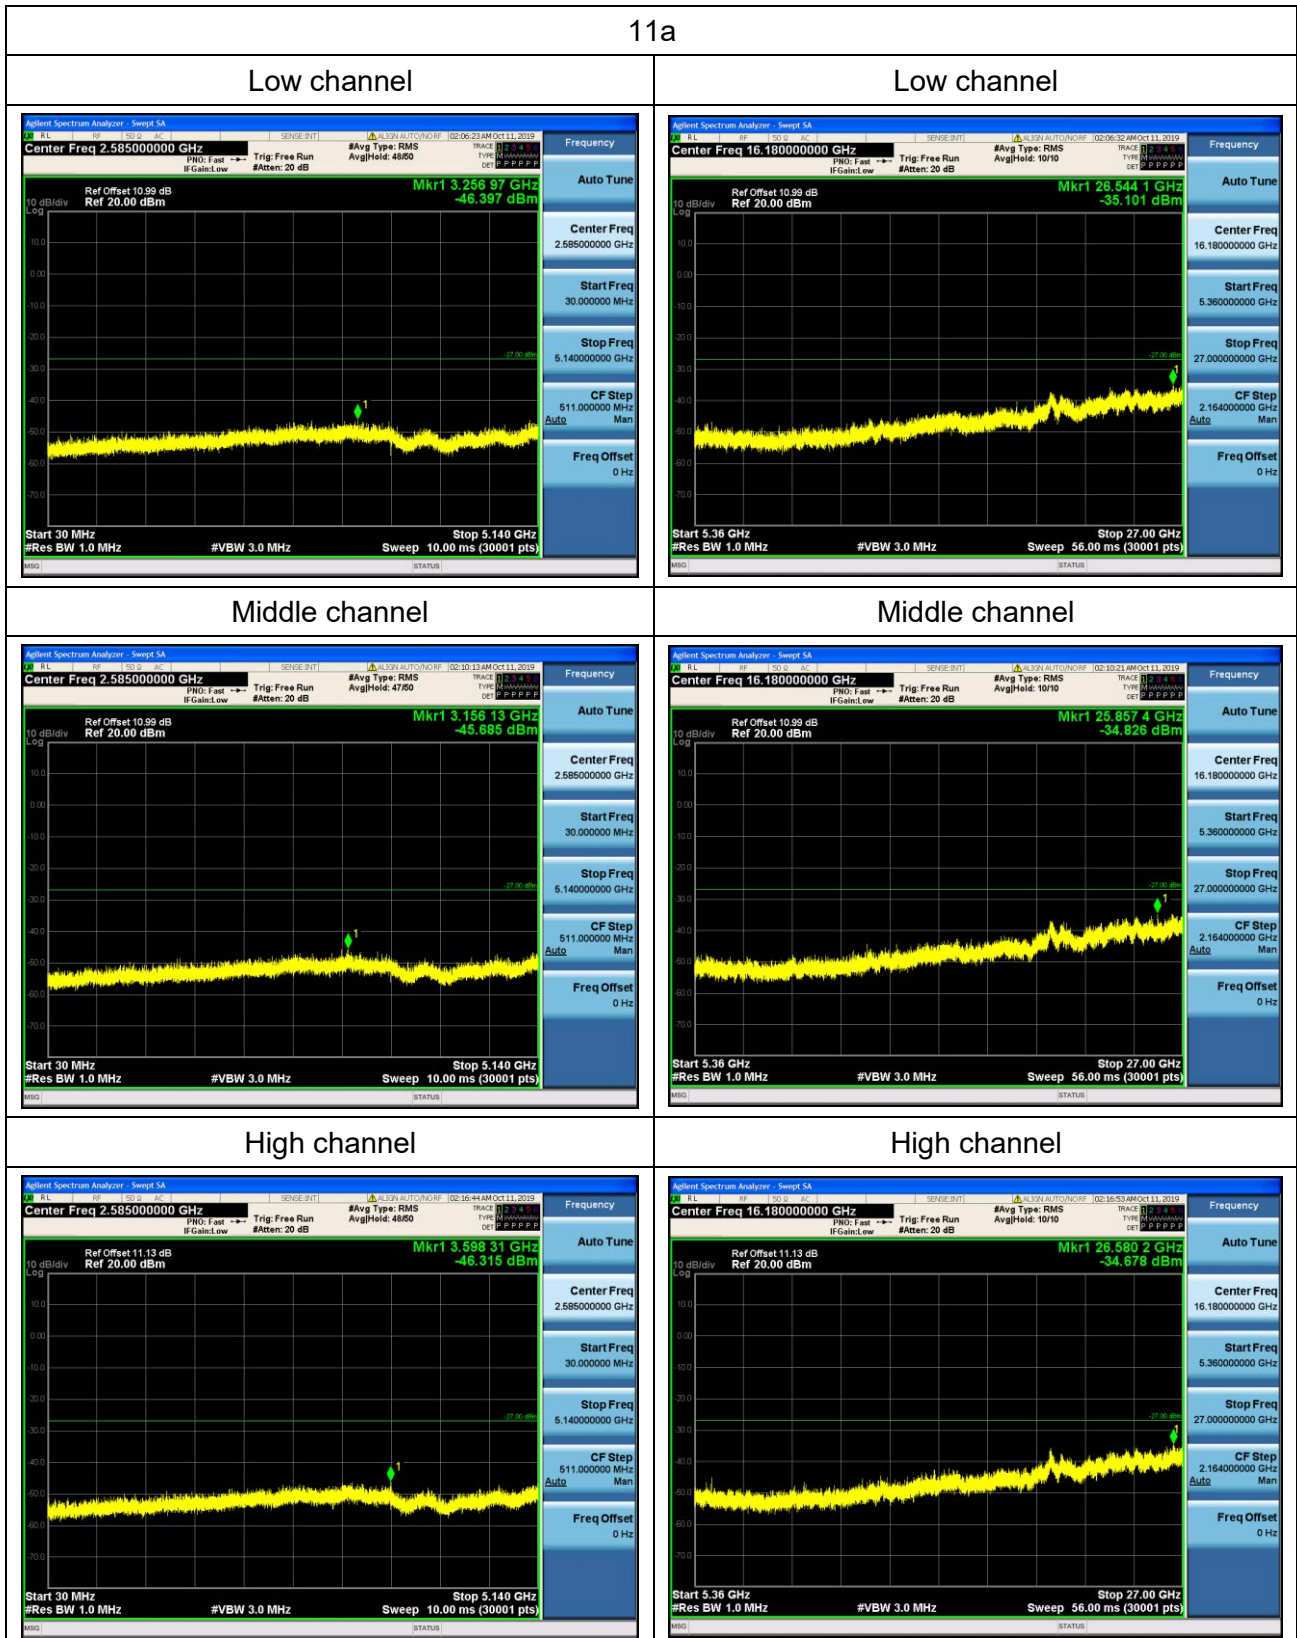

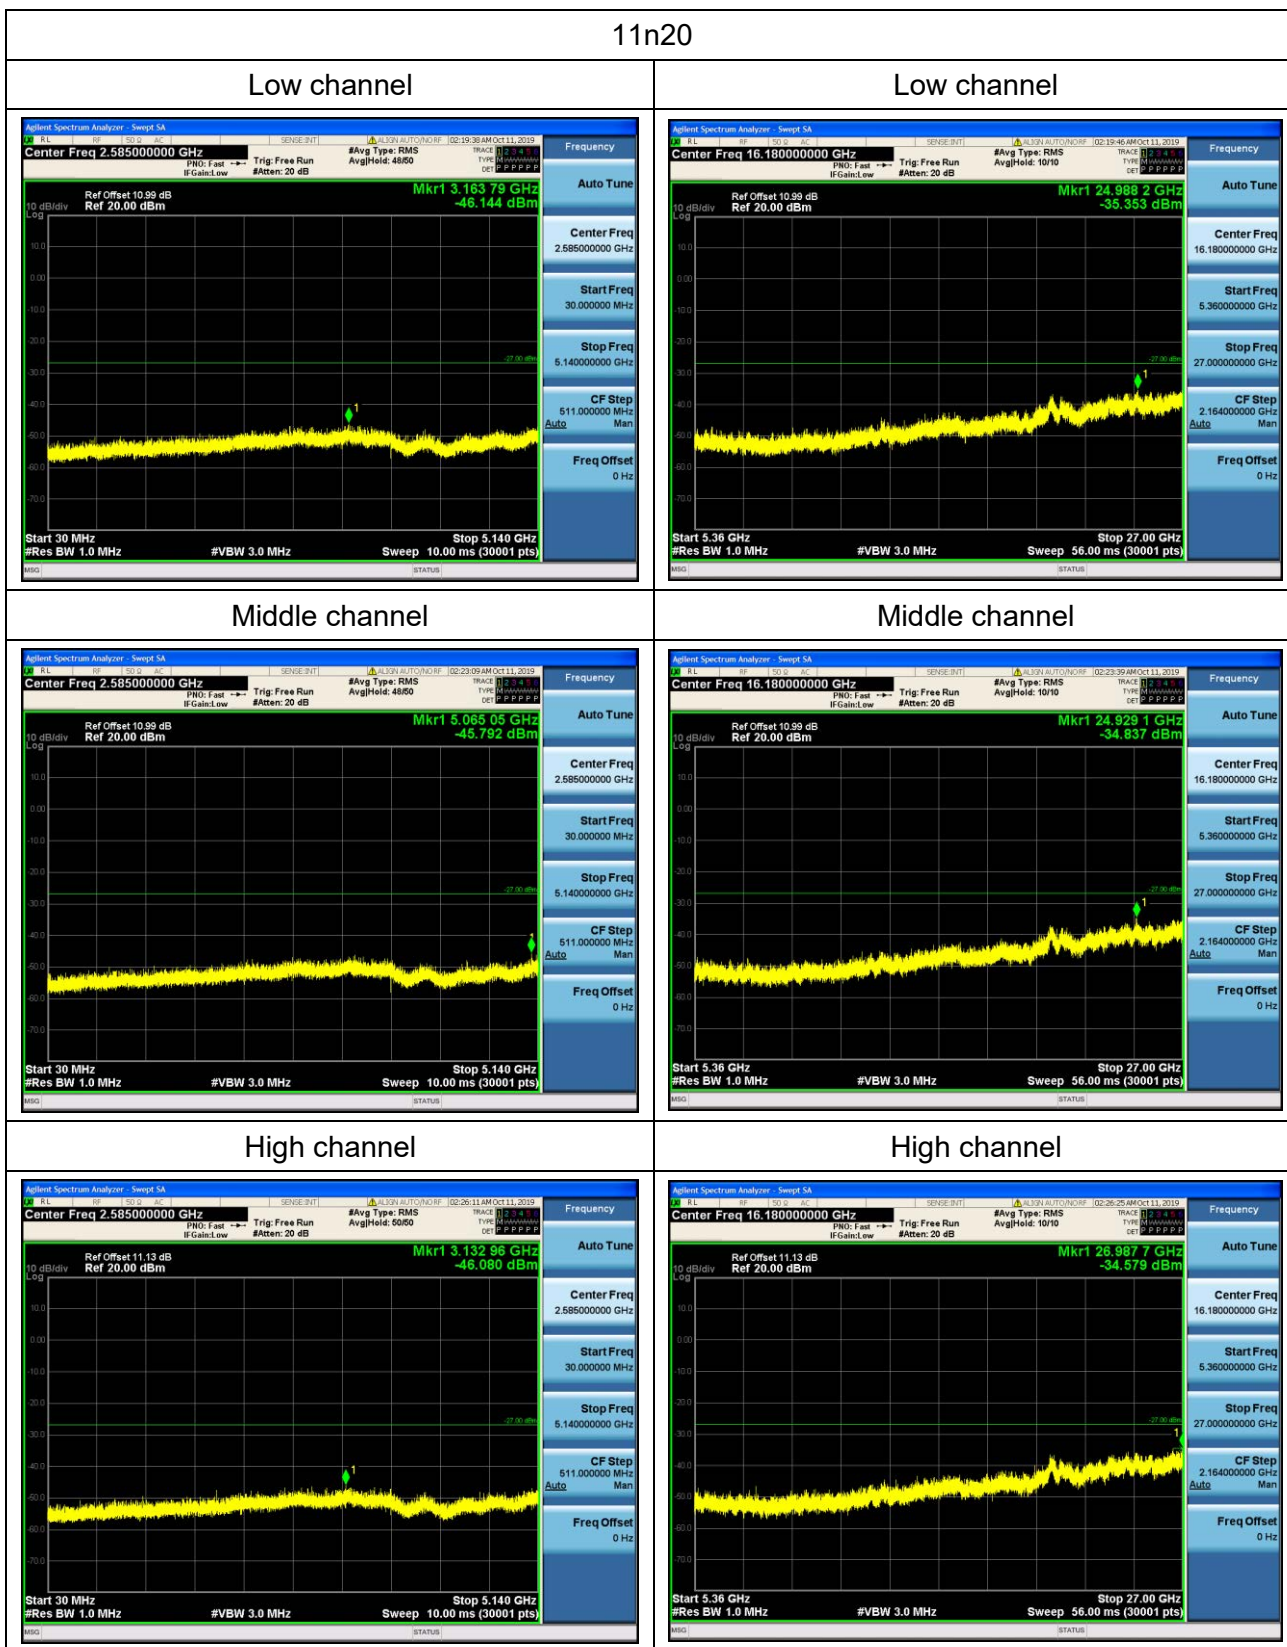


11n40

Low channel

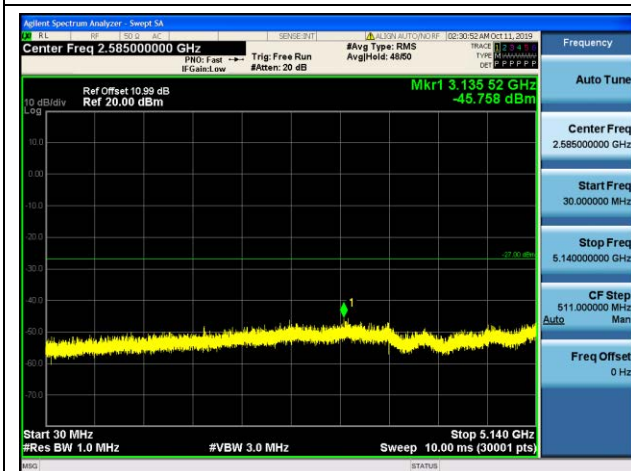


Low channel

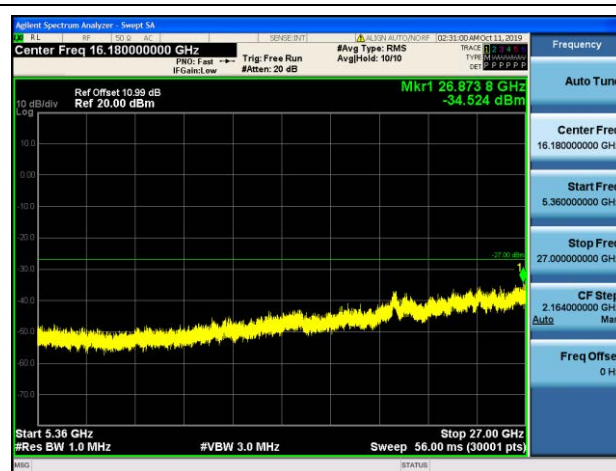

High channel



High channel

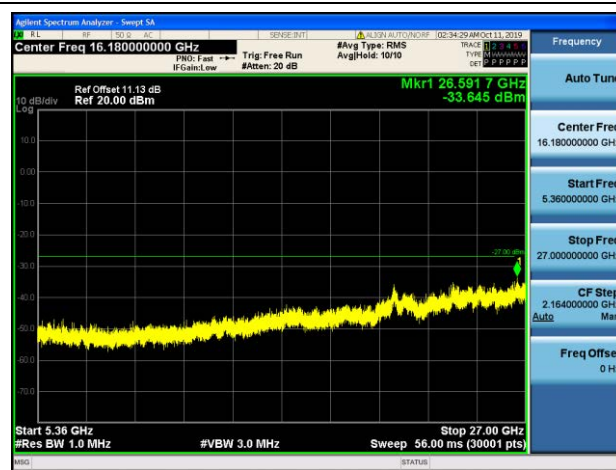




11ac20

Low channel




Low channel

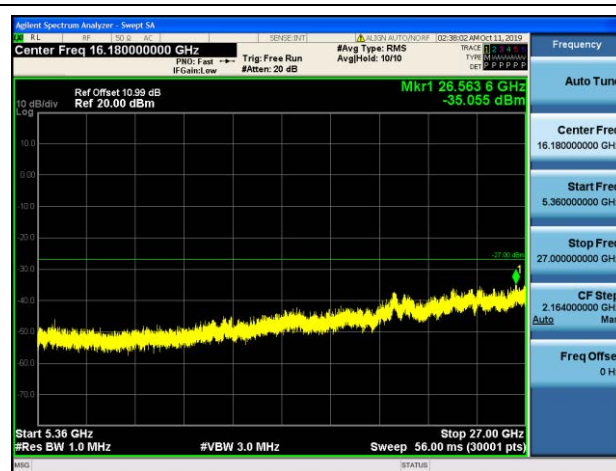


Middle channel




Middle channel

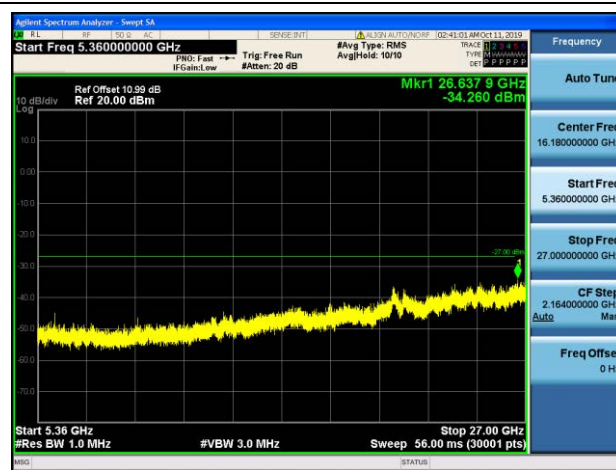

High channel

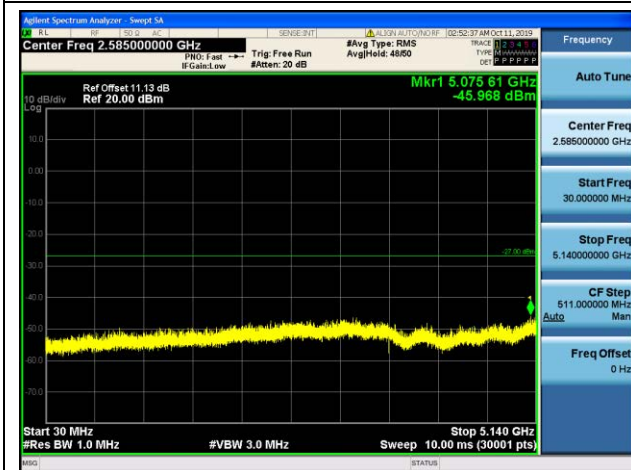


High channel

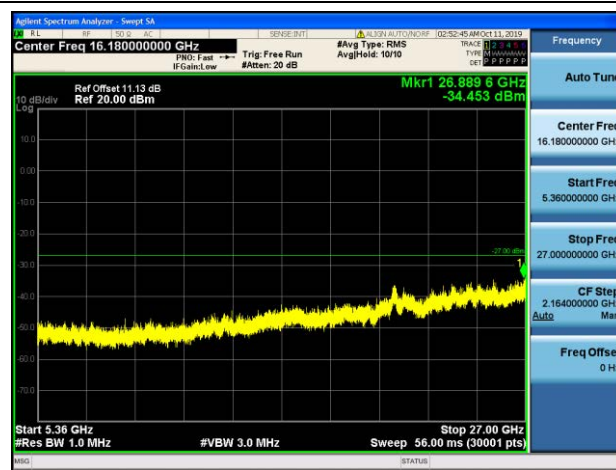


11ac40

Low channel

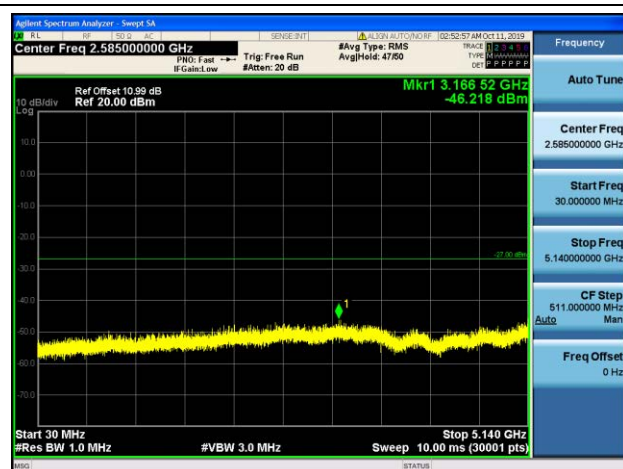


Low channel

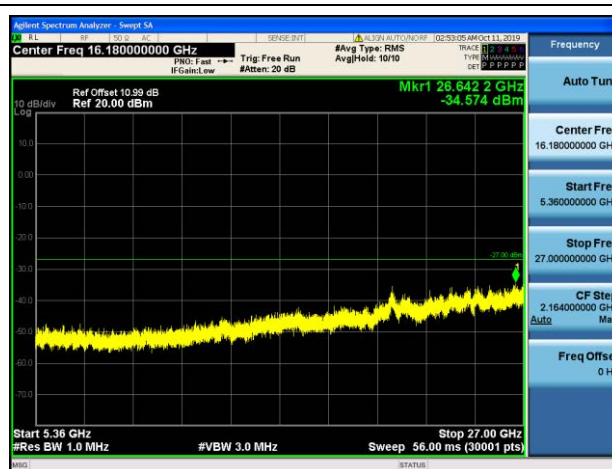



High channel



High channel

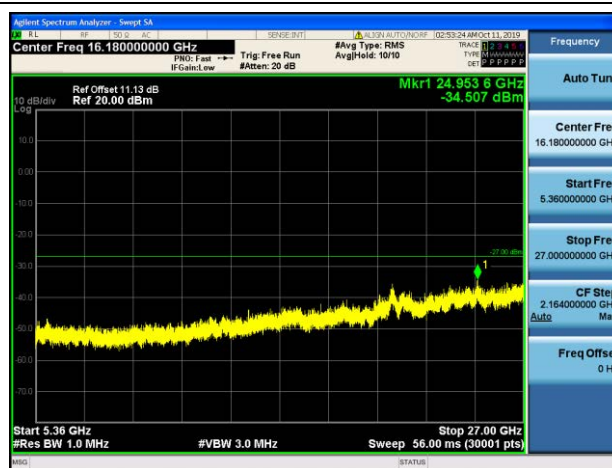


11ac80

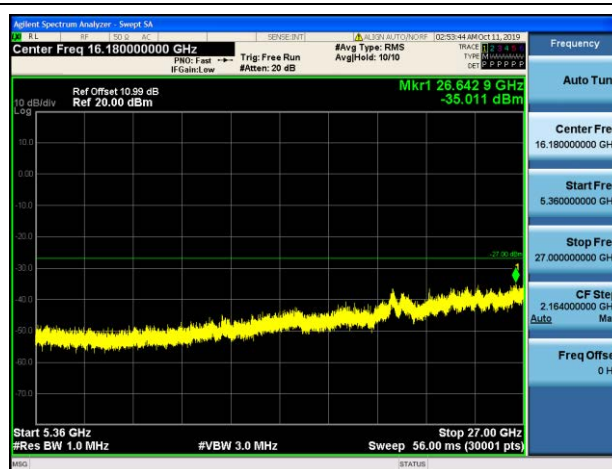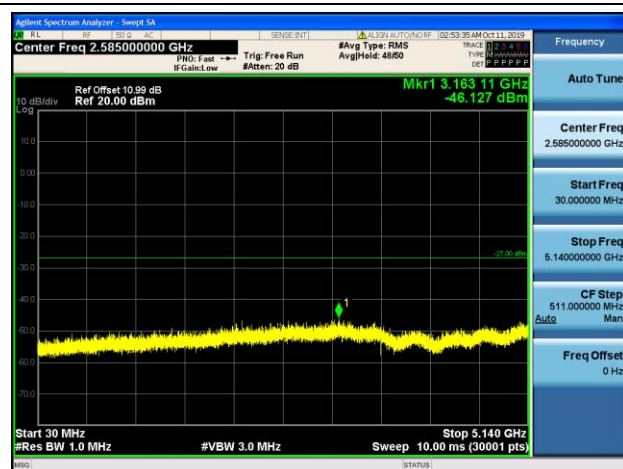


For U-NII-3

11a


Low channel

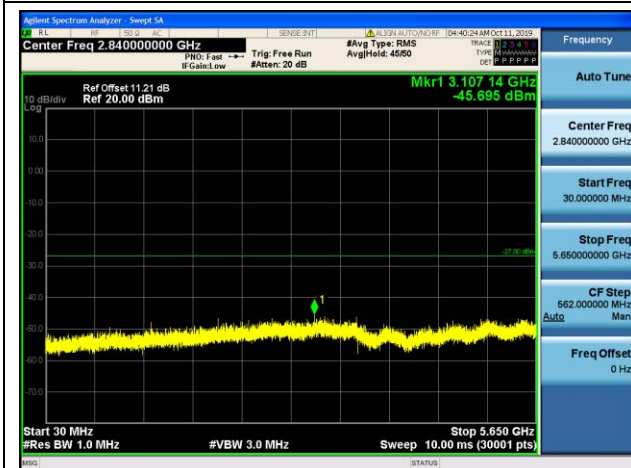


Low channel

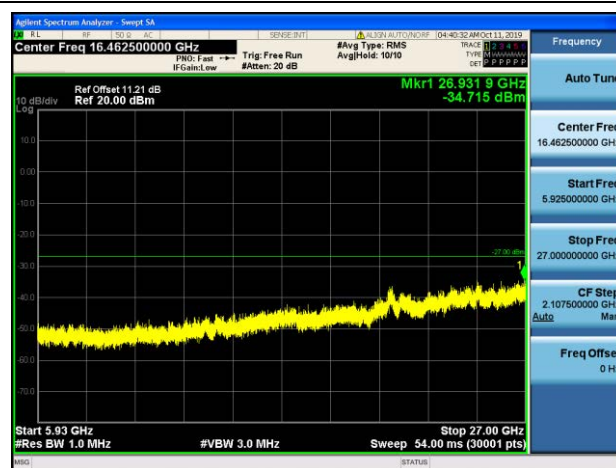

Middle channel

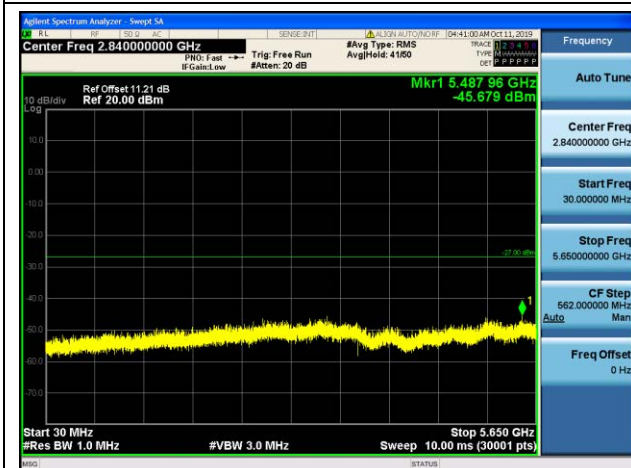

Middle channel

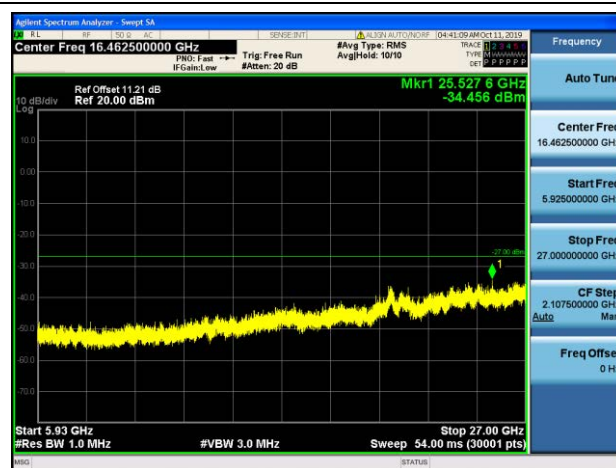

High channel



High channel

