

FCC PART 15.247

TEST REPORT

For

DQ Technology, Inc.

5111 Johnson Drive, Pleasanton, CA 94588, USA

FCC ID: QMPM625NR1

Report Type: Original Report	Product Type: G.Bond, VDSL2, ADSL2+, Ethernet WAN Broadband Gateway
Test Engineer: Candy Li	
Report Number: RSZ130506003-00B	
Report Date: 2013-05-31	
Reviewed By: Sula Huang RF Engineer	
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52

TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	66
APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST EQUIPMENT LIST AND DETAILS.....	66
TEST DATA	66
FCC §15.247(e) - POWER SPECTRAL DENSITY	76
APPLICABLE STANDARD	76
TEST PROCEDURE	76
TEST EQUIPMENT LIST AND DETAILS.....	76
TEST DATA	76

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *DQ Technology, Inc.*'s product, model number: *M625N (FCC ID: QMPM625NR1)* or the "EUT" in this report was a *G.Bond, VDSL2, ADSL2+, Ethernet WAN Broadband Gateway*, which was measured approximately: 18.0 cm (L) x 12.1 cm (W) x 3.6 cm (H), rated input voltage: DC 12V from adapter.

Adapter Information:

Model: ADS18B-W 120150

Input: 100-240 V~50/60Hz, 0.5A

Output: DC 12V, 1.5A

** All measurement and test data in this report was gathered from production sample serial number: 1305022 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-05-06.*

Objective

This report is prepared on behalf of *DQ Technology, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC part 15B JBP submittal with FCC ID: QMPM625NR1.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is ± 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

EUT Exercise Software

Test software: Cmd command

The test was performed under:

802.11b: Data rate: 11 Mbps, Power level: 15

802.11g: Data rate: 54 Mbps, Power level: 15

802.11n-HT20: Data rate: 65 Mbps, Power level: 15

802.11n-HT40: Data rate: 65 Mbps, Power level: 15

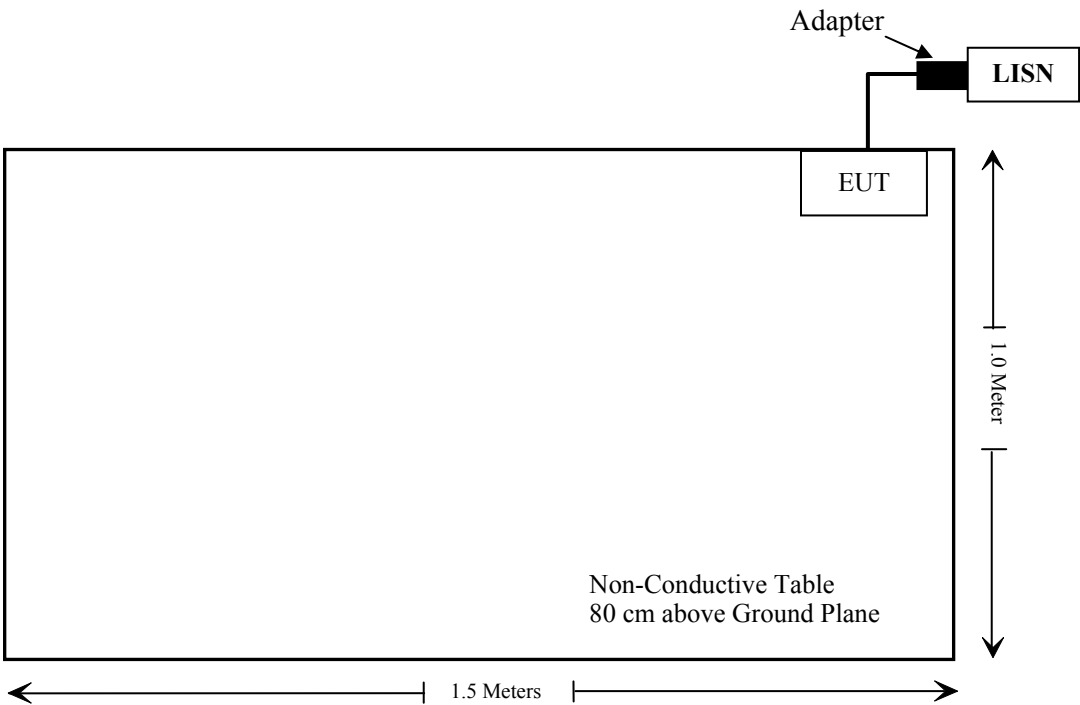
Equipment Modifications

No modification was made to the EUT tested.

External I/O Cable

Cable Description	Length (m)	From Port	To
DC Power Cable	1.5	EUT	Adapter

Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to FCC 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz;

* = Plane-wave equivalent power density;

MPE Calculation

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Calculated Data, worst case as below:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Limits for General Population/Uncontrolled Exposure								
802.11b	2462	3	2.0	20.95	124.45	20	0.0495	1.0
802.11g	2462	3	2.0	24.09	256.45	20	0.1021	1.0
802.11n-HT20	2437	3	2.0	23.83	241.55	20	0.0961	1.0
802.11n-HT40	2452	3	2.0	19.31	85.31	20	0.0339	1.0

FCC Radiation Exposure Statement:

To comply with FCC RF exposure requirements, a minimum separation distance of 20 cm is required between the antenna and all public persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b)(1)(i), Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

This product have two monopole antennas with the unique type of connector, and the maximum gain is 3 dBi, which fulfill the requirement of this section, and please refer to the internal photos.

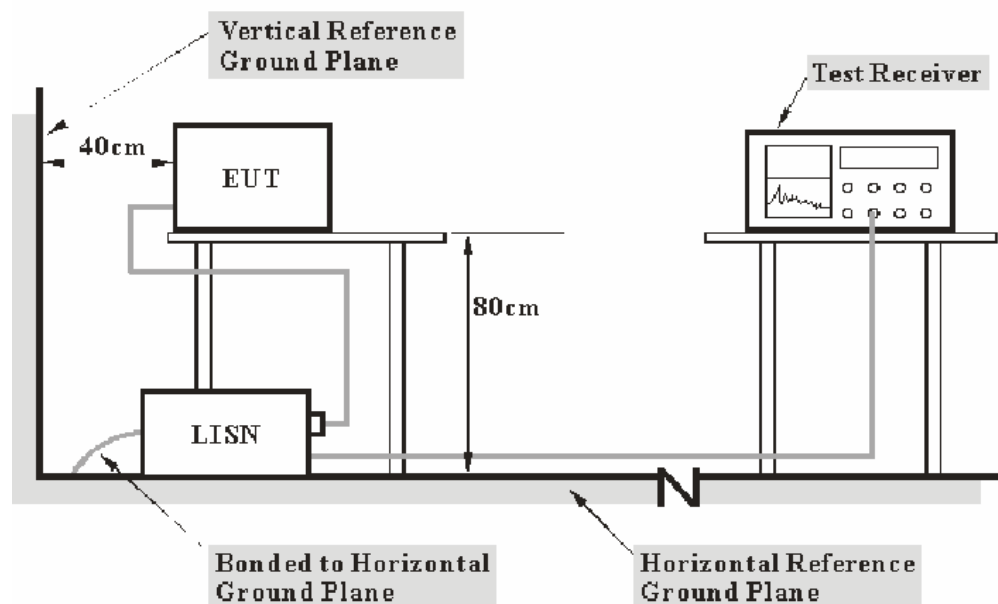
Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



- Note:** 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the relevant peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-08
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2012-08-22	2013-08-21
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

10.6 dB at 0.171726 MHz in the Neutral conducted mode

Test Data

Environmental Conditions

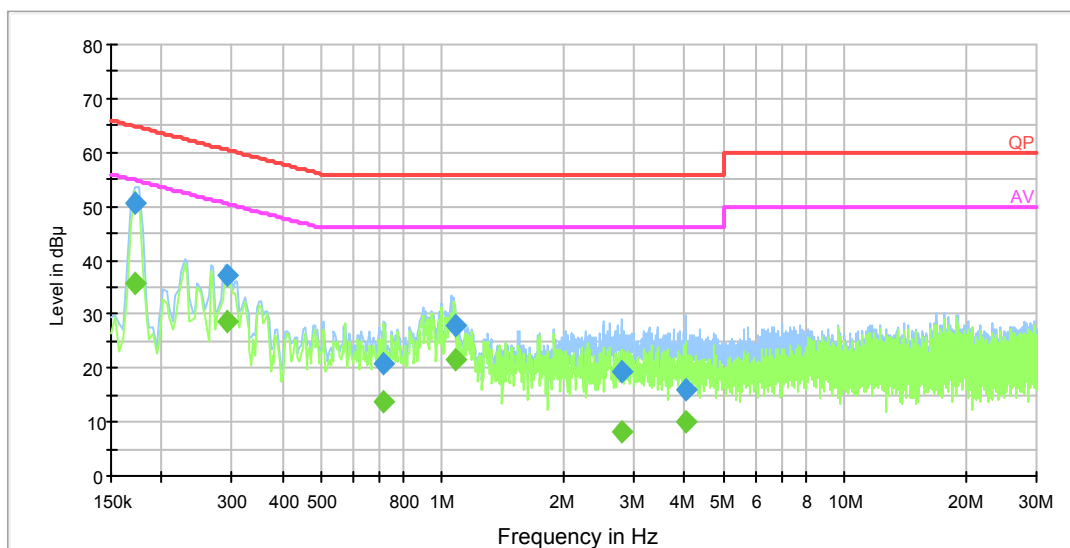
Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Candy Li on 2013-05-17.

Test mode: Transmitting

AC 120V/60Hz, Line:

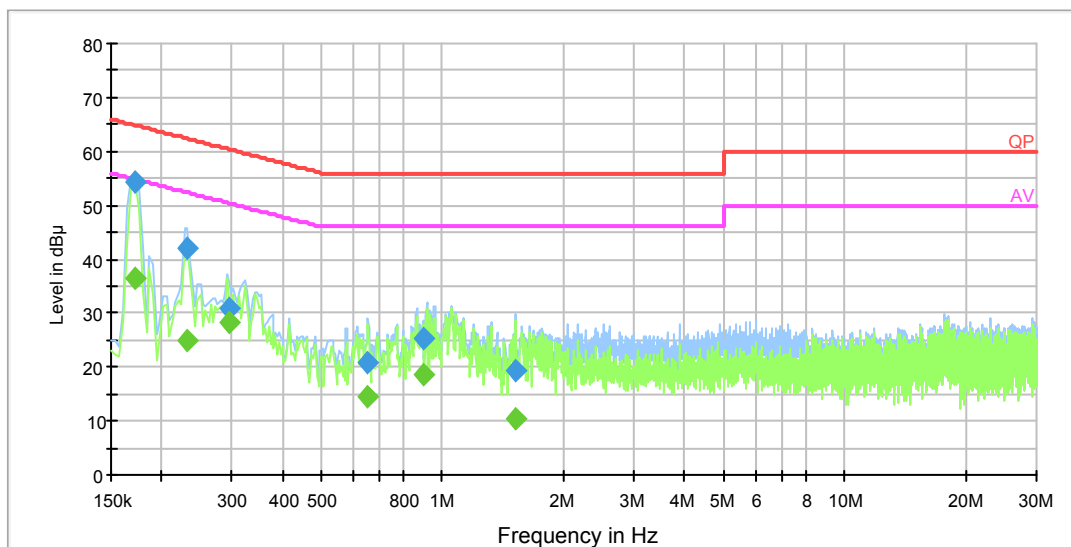
EMI Auto Test L



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.171883	50.8	0.3	64.9	14.1	QP
0.171883	35.6	0.3	54.9	19.3	Ave.
0.292905	28.7	0.4	50.4	21.7	Ave.
0.292905	37.4	0.4	60.4	23.0	QP
1.075249	21.8	0.4	46.0	24.2	Ave.
1.075249	27.7	0.4	56.0	28.3	QP
0.715603	13.6	0.4	46.0	32.4	Ave.
0.715603	20.7	0.4	56.0	35.3	QP
4.032851	10.2	0.4	46.0	35.8	Ave.
2.797712	19.3	0.4	56.0	36.7	QP
2.797712	8.2	0.4	46.0	37.8	Ave.
4.032851	16.2	0.4	56.0	39.8	QP

AC 120V/60Hz, Neutral:

EMI Auto Test N



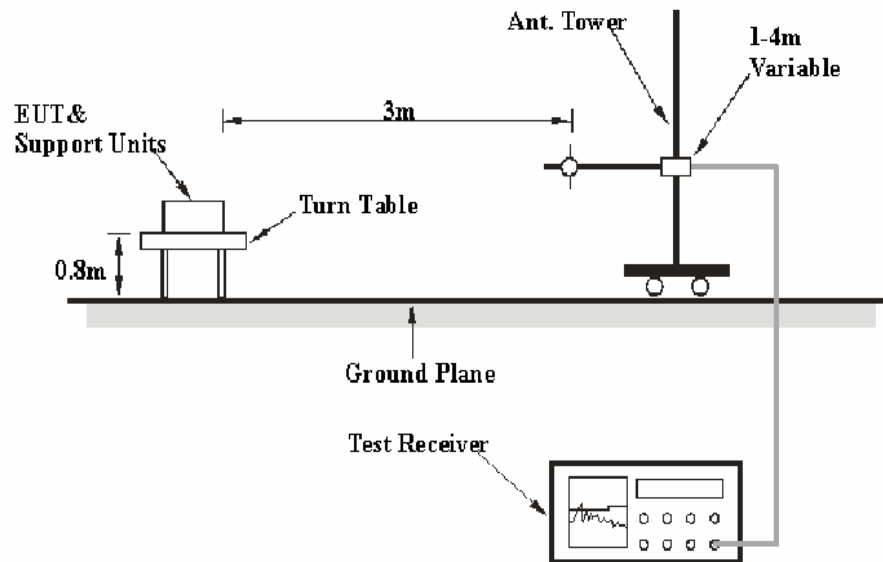
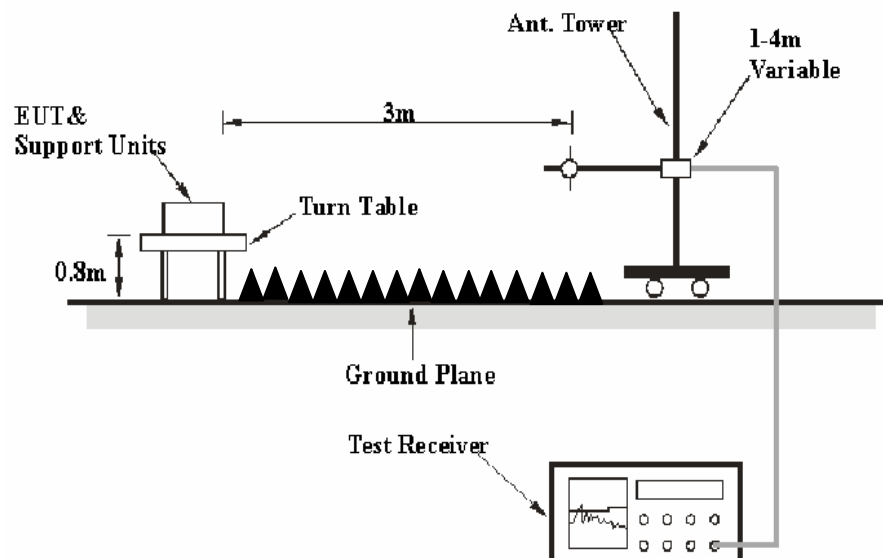
Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.171726	54.3	0.3	64.9	10.6	QP
0.171726	36.6	0.3	54.9	18.3	Ave.
0.233190	41.9	0.3	62.3	20.4	QP
0.296361	28.2	0.3	50.3	22.1	Ave.
0.233190	25.0	0.3	52.3	27.3	Ave.
0.892794	18.4	0.4	46.0	27.6	Ave.
0.296361	30.7	0.3	60.3	29.6	QP
0.892794	25.1	0.4	56.0	30.9	QP
0.651553	14.6	0.4	46.0	31.4	Ave.
0.651553	20.7	0.4	56.0	35.3	QP
1.526891	10.2	0.4	46.0	35.8	Ave.
1.526891	19.4	0.4	56.0	36.6	QP

Note:

- 1) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

EUT Setup**Below 1 GHz:****Above 1 GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.35 dB at 7311.0 MHz in the Vertical polarization for 802.11b Mode

Test Data

Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	52~56 %
ATM Pressure:	100.1~101.2 kPa

The testing was performed by Candy Li on 2013-05-31 and 2013-06-01.

Test Mode: Transmitting

Note: For 802.11b/g, test with two antenna port transmit separately and worst case as below.
For 802.11n-HT20, 802.11n-HT40, test with two antenna ports transmit simultaneously

30 MHz-25 GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	96.72	PK	55	1.3	H	6.13	102.85	/	/
2412.0	82.63	Ave.	55	1.3	H	6.13	88.76	/	/
2412.0	107.41	PK	241	1.4	V	6.13	113.54	/	/
2412.0	91.93	Ave.	241	1.4	V	6.13	98.06	/	/
7236.0	35.88	Ave.	223	1.2	V	16.62	52.50	54	1.50
4824.0	36.98	Ave.	190	1.5	V	12.40	49.38	54	4.62
7236.0	51.82	PK	223	1.2	V	16.62	68.44	74	5.56
4824.0	51.87	PK	190	1.5	V	12.40	64.27	74	9.73
357.3	48.51	QP	297	1.5	H	-13.3	35.21	46	10.79
9608.0	20.58	Ave.	100	1.1	H	19.28	39.86	54	14.14
2485.3	26.06	Ave.	241	1.4	V	7.21	33.27	54	20.73
9608.0	33.63	PK	100	1.1	H	19.28	52.91	74	21.09
2384.8	26.06	Ave.	57	1.1	V	6.13	32.19	54	21.81
2336.1	25.95	Ave.	288	1.0	V	5.48	31.43	54	22.57
2485.3	40.52	PK	241	1.4	V	7.21	47.73	74	26.27
2384.8	41.20	PK	57	1.1	V	6.13	47.33	74	26.67
2336.1	40.91	PK	288	1.0	V	5.48	46.39	74	27.61
Middle Channel (2437 MHz)									
2437	97.12	PK	232	1.1	H	7.21	104.33	/	/
2437	81.96	Ave.	232	1.1	H	7.21	89.17	/	/
2437	105.89	PK	124	1.2	V	7.21	113.1	/	/
2437	91.24	Ave.	124	1.2	V	7.21	98.45	/	/
2493.5	40.47	PK	57	1.3	H	7.21	47.68	74	26.32
2493.5	26.57	Ave.	57	1.3	H	7.21	33.78	54	20.22
7311	36.16	Ave.	262	1.4	V	16.49	52.65	54	1.35
4874	35.32	Ave.	0	1.2	V	12.46	47.78	54	6.22
7311	49.92	PK	262	1.4	V	16.49	66.41	74	7.59
357.3	49.16	QP	229	1.4	H	-13.3	35.86	46	10.14
4874	50.69	PK	0	1.2	V	12.46	63.15	74	10.85
9748	21.89	Ave.	246	1	V	19.4	41.29	54	12.71
9748	35.03	PK	246	1	V	19.4	54.43	74	19.57
2383.1	26.06	Ave.	295	1.3	H	6.13	32.19	54	21.81
2367.9	25.39	Ave.	107	1.3	V	5.48	30.87	54	23.13
2383.1	41.31	PK	295	1.3	H	6.13	47.44	74	26.56
2367.9	40.81	PK	107	1.3	V	5.48	46.29	74	27.71

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	96.59	PK	164	1.2	H	7.21	103.80	/	/
2462.0	79.25	Ave.	164	1.2	H	7.21	86.46	/	/
2462.0	102.83	PK	221	1.1	V	7.21	110.04	/	/
2462.0	88.99	Ave.	221	1.1	V	7.21	96.20	/	/
7386.0	36.10	Ave.	185	1.4	H	15.91	52.01	54	1.99
7386.0	51.94	PK	185	1.4	H	15.91	67.85	74	6.15
4924.0	34.84	Ave.	9	1.1	V	12.50	47.34	54	6.66
357.3	48.83	QP	315	1.2	H	-13.3	35.53	46	10.47
4924.0	50.22	PK	9	1.1	V	12.50	62.72	74	11.28
9848.0	21.24	Ave.	10	1.1	H	19.39	40.63	54	13.37
2486.4	26.15	Ave.	21	1.1	V	7.21	33.36	54	20.64
9848.0	33.90	PK	10	1.1	H	19.39	53.29	74	20.71
2493.9	24.97	Ave.	113	1.4	V	7.21	32.18	54	21.82
2315.2	25.12	Ave.	44	1.2	H	5.48	30.60	54	23.40
2486.4	41.81	PK	21	1.1	V	7.21	49.02	74	24.98
2493.9	39.28	PK	113	1.4	V	7.21	46.49	74	27.51
2315.2	38.48	PK	44	1.2	H	5.48	43.96	74	30.04

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	97.81	PK	185	1.3	H	6.13	103.94	/	/
2412.0	69.90	Ave.	185	1.3	H	6.13	76.03	/	/
2412.0	106.69	PK	57	1.1	V	6.13	112.82	/	/
2412.0	75.04	Ave.	57	1.1	V	6.13	81.17	/	/
7236.0	33.57	Ave.	236	1.4	V	16.62	50.19	54	3.81
4824.0	32.85	Ave.	141	1.3	H	12.40	45.25	54	8.75
7236.0	48.41	PK	236	1.4	V	16.62	65.03	74	8.97
357.3	48.80	QP	248	1.3	H	-13.3	35.50	46	10.50
9648.0	19.51	Ave.	88	1.4	H	19.29	38.80	54	15.20
4824.0	45.99	PK	141	1.3	H	12.40	58.39	74	15.61
9648.0	31.67	PK	88	1.4	H	19.29	50.96	74	23.04
2492.1	22.83	Ave.	206	1.3	V	7.21	30.04	54	23.96
2392.4	23.74	Ave.	166	1.4	V	6.13	29.87	54	24.13
2359.8	23.41	Ave.	15	1.1	V	5.48	28.89	54	25.11
2392.4	41.56	PK	166	1.4	V	6.13	47.69	74	26.31
2359.8	41.70	PK	15	1.1	V	5.48	47.18	74	26.82
2492.1	35.10	PK	206	1.3	V	7.21	42.31	74	31.69
Middle Channel (2437 MHz)									
2437.0	98.31	PK	81	1.2	H	7.21	105.52	/	/
2437.0	71.97	Ave.	81	1.2	H	7.21	79.18	/	/
2437.0	105.24	PK	249	1.0	V	7.21	112.45	/	/
2437.0	75.43	Ave.	249	1.0	V	7.21	82.64	/	/
7311.0	33.83	Ave.	327	1.3	V	16.49	50.32	54	3.68
7311.0	50.35	PK	327	1.3	V	16.49	66.84	74	7.16
4874.0	32.82	Ave.	218	1.1	H	12.46	45.28	54	8.72
9748.0	20.36	Ave.	116	1.5	V	19.40	39.76	54	14.24
4874.0	47.23	PK	218	1.1	H	12.46	59.69	74	14.31
360.0	44.76	QP	247	1.1	H	-13.3	31.46	46	14.54
9748.0	32.44	PK	116	1.5	V	19.40	51.84	74	22.16
2492.8	23.40	Ave.	207	1.1	H	7.21	30.61	54	23.39
2364.6	24.57	Ave.	22	1.2	V	5.48	30.05	54	23.95
2382.1	23.54	Ave.	116	1.1	V	6.13	29.67	54	24.33
2364.6	41.21	PK	22	1.2	V	5.48	46.69	74	27.31
2382.1	40.08	PK	116	1.1	V	6.13	46.21	74	27.79
2492.8	36.30	PK	207	1.1	H	7.21	43.51	74	30.49

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	99.41	PK	200	1.4	H	7.21	106.62	/	/
2462.0	71.22	Ave.	200	1.4	H	7.21	78.43	/	/
2462.0	106.64	PK	256	1.1	V	7.21	113.85	/	/
2462.0	76.28	Ave.	256	1.1	V	7.21	83.49	/	/
7386.0	33.68	Ave.	240	1.1	V	15.91	49.59	54	4.41
7386.0	51.11	PK	240	1.1	V	15.91	67.02	74	6.98
4924.0	33.75	Ave.	50	1.3	H	12.50	46.25	54	7.75
357.3	49.96	QP	267	1.5	H	-13.3	36.66	46	9.34
4924.0	47.81	PK	50	1.3	H	12.50	60.31	74	13.69
9848.0	20.33	Ave.	91	1.2	V	19.39	39.72	54	14.28
2488.2	24.48	Ave.	186	1.5	V	7.21	31.69	54	22.31
9848.0	31.92	PK	91	1.2	V	19.39	51.31	74	22.69
2495.9	22.78	Ave.	191	1.4	H	7.21	29.99	54	24.01
2312.6	24.15	Ave.	63	1.1	V	5.48	29.63	54	24.37
2488.2	41.00	PK	186	1.5	V	7.21	48.21	74	25.79
2312.6	39.97	PK	63	1.1	V	5.48	45.45	74	28.55
2495.9	37.43	PK	191	1.4	H	7.21	44.64	74	29.36

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	99.32	PK	71	1.4	H	6.13	105.45	/	/
2412.0	71.05	Ave.	71	1.4	H	6.13	77.18	/	/
2412.0	107.00	PK	223	1.3	V	6.13	113.13	/	/
2412.0	74.40	Ave.	223	1.3	V	6.13	80.53	/	/
7236.0	34.57	Ave.	108	1.2	V	16.49	51.06	54	2.94
7236.0	50.56	PK	108	1.2	V	16.49	67.05	74	6.95
4824.0	33.84	Ave.	64	1.4	H	12.40	46.24	54	7.76
357.3	46.80	QP	150	1.4	H	-13.3	33.50	46	12.50
4824.0	48.30	PK	64	1.4	H	12.40	60.70	74	13.30
9648.0	20.20	Ave.	166	1.5	H	19.29	39.49	54	14.51
2492.7	22.63	Ave.	234	1.4	H	7.59	30.22	54	23.78
9648.0	30.92	PK	166	1.5	H	19.29	50.21	74	23.79
2381.3	24.00	Ave.	80	1.4	V	6.13	30.13	54	23.87
2362.7	24.46	Ave.	149	1.2	V	5.48	29.94	54	24.06
2381.3	40.24	PK	80	1.4	V	6.13	46.37	74	27.63
2362.7	40.61	PK	149	1.2	V	5.48	46.09	74	27.91
2492.7	37.28	PK	234	1.4	H	7.59	44.87	74	29.13
Middle Channel (2437 MHz)									
2437.0	98.36	PK	152	1.0	H	7.21	105.57	/	/
2437.0	71.62	Ave.	152	1.0	H	7.21	78.83	/	/
2437.0	104.69	PK	61	1.0	V	7.21	111.9	/	/
2437.0	76.55	Ave.	61	1.0	V	7.21	83.76	/	/
7311.0	35.23	Ave.	228	1.0	H	16.49	51.72	54	2.28
7311.0	50.52	PK	228	1.0	H	16.49	67.01	74	6.99
4874.0	33.79	Ave.	116	1.0	V	12.46	46.25	54	7.75
357.3	48.06	QP	161	1.5	H	-13.3	34.76	46	11.24
4874.0	49.81	PK	116	1.0	V	12.46	62.27	74	11.73
9748.0	20.72	Ave.	138	1.3	H	19.40	40.12	54	13.88
9748.0	32.35	PK	138	1.3	H	19.40	51.75	74	22.25
2494.5	23.87	Ave.	64	1.3	H	7.21	31.08	54	22.92
2339.1	23.70	Ave.	186	1.3	V	7.21	30.91	54	23.09
2384.8	23.49	Ave.	11	1.1	H	6.13	29.62	54	24.38
2339.1	40.86	PK	186	1.3	V	7.21	48.07	74	25.93
2384.8	40.78	PK	11	1.1	H	6.13	46.91	74	27.09
2494.5	35.71	PK	64	1.3	H	7.21	42.92	74	31.08

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	96.98	PK	321	1.5	H	7.21	104.19	/	/
2462.0	72.88	Ave.	321	1.5	H	7.21	80.09	/	/
2462.0	105.15	PK	203	1.2	V	7.21	112.36	/	/
2462.0	75.13	Ave.	203	1.2	V	7.21	82.34	/	/
7386.0	34.12	Ave.	347	1.4	H	15.91	50.03	54	3.97
7386.0	51.76	PK	347	1.4	H	15.91	67.67	74	6.33
4924.0	35.03	Ave.	267	1.2	H	12.46	47.49	54	6.51
4924.0	52.04	PK	267	1.2	H	12.46	64.50	74	9.50
9848.0	23.00	Ave.	323	1.3	V	19.39	42.39	54	11.61
357.3	46.37	QP	151	1.4	H	-13.3	33.07	46	12.93
9848.0	32.94	PK	323	1.3	V	19.39	52.33	74	21.67
2493.8	22.94	Ave.	137	1.5	V	7.21	30.15	54	23.85
2352.9	23.84	Ave.	223	1.3	V	5.48	29.32	54	24.68
2488.1	22.07	Ave.	171	1.2	V	7.21	29.28	54	24.72
2488.1	41.59	PK	171	1.2	V	7.21	48.80	74	25.20
2352.9	40.60	PK	223	1.3	V	5.48	46.08	74	27.92
2493.8	34.40	PK	137	1.5	V	7.21	41.61	74	32.39

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
2422.0	100.52	PK	112	1.1	H	6.13	106.65	/	/
2422.0	78.67	Ave.	112	1.1	H	6.13	84.8	/	/
2422.0	88.07	PK	158	1.4	V	6.13	94.2	/	/
2422.0	67.89	Ave.	158	1.4	V	6.13	74.02	/	/
7266.0	28.47	Ave.	172	1.1	V	16.62	45.09	54	8.91
9688.0	24.00	Ave.	297	1.0	V	19.29	43.29	54	10.71
4844.0	30.32	Ave.	80	1.2	H	12.46	42.78	54	11.22
7266.0	45.74	PK	172	1.1	V	16.62	62.36	74	11.64
357.3	46.38	QP	122	1.3	H	-13.3	33.08	46	12.92
9688.0	37.87	PK	297	1.0	V	19.29	57.16	74	16.84
4844.0	44.48	PK	80	1.2	H	12.46	56.94	74	17.06
2315.4	27.62	Ave.	354	1.2	H	5.48	33.10	54	20.90
2498.3	25.82	Ave.	9	1.4	V	7.21	33.03	54	20.97
2374.9	26.77	Ave.	299	1.5	V	6.13	32.90	54	21.10
2498.3	40.64	PK	9	1.4	V	7.21	47.85	74	26.15
2374.9	41.61	PK	299	1.5	V	6.13	47.74	74	26.26
2315.4	41.50	PK	354	1.2	H	5.48	46.98	74	27.02
Middle Channel (2437 MHz)									
2437.0	98.81	PK	87	1.3	H	7.21	106.02	/	/
2437.0	77.81	Ave.	87	1.3	H	7.21	85.02	/	/
2437.0	87.47	PK	92	1.5	V	7.21	94.68	/	/
2437.0	67.66	Ave.	92	1.5	V	7.21	74.87	/	/
7311.0	49.70	PK	307	1.3	V	16.49	66.19	74	7.81
9748.0	24.49	Ave.	119	1.1	H	19.40	43.89	54	10.11
7311.0	27.33	Ave.	307	1.3	V	16.49	43.82	54	10.18
4874.0	30.44	Ave.	111	1.2	V	12.46	42.90	54	11.10
357.3	45.95	QP	350	1.3	H	-13.3	32.65	46	13.35
4874.0	46.79	PK	111	1.2	V	12.46	59.25	74	14.75
9748.0	37.50	PK	119	1.1	H	19.40	56.90	74	17.10
2383.5	27.85	Ave.	356	1.0	V	6.13	33.98	54	20.02
2488.1	26.27	Ave.	194	1.1	H	7.21	33.48	54	20.52
2497.2	25.50	Ave.	198	1.2	H	7.21	32.71	54	21.29
2497.2	42.01	PK	198	1.2	H	7.21	49.22	74	24.78
2488.1	41.45	PK	194	1.1	H	7.21	48.66	74	25.34
2383.5	41.94	PK	356	1.0	V	6.13	48.07	74	25.93

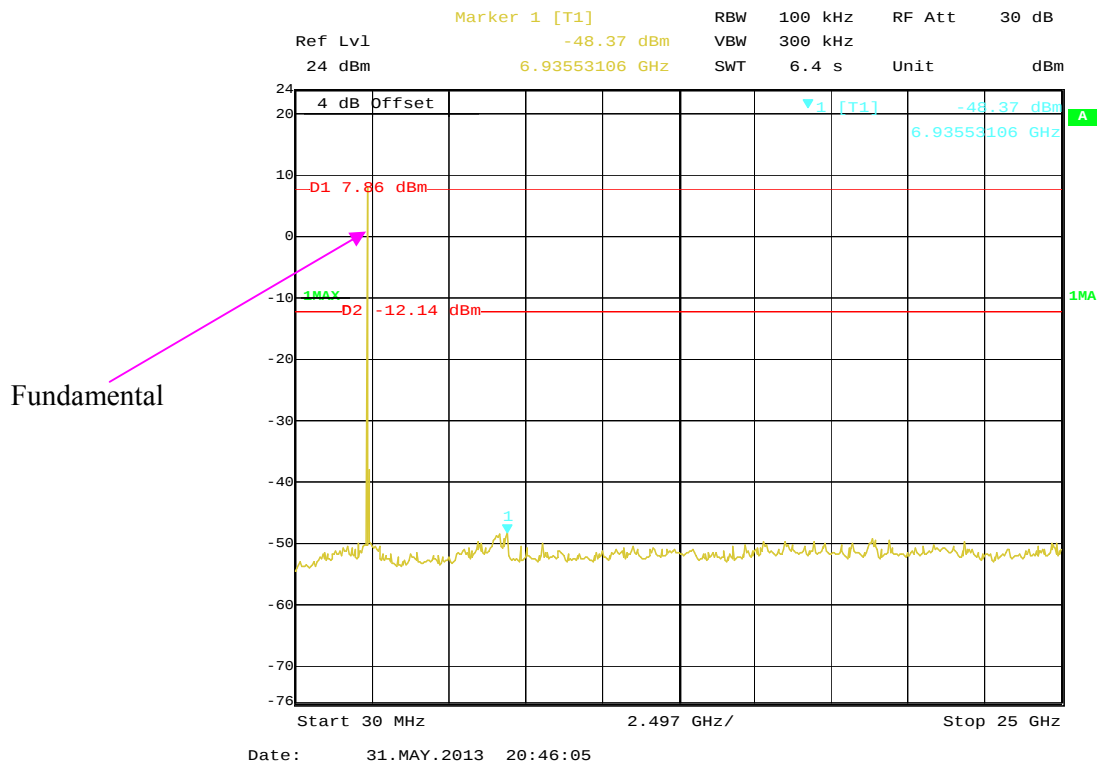
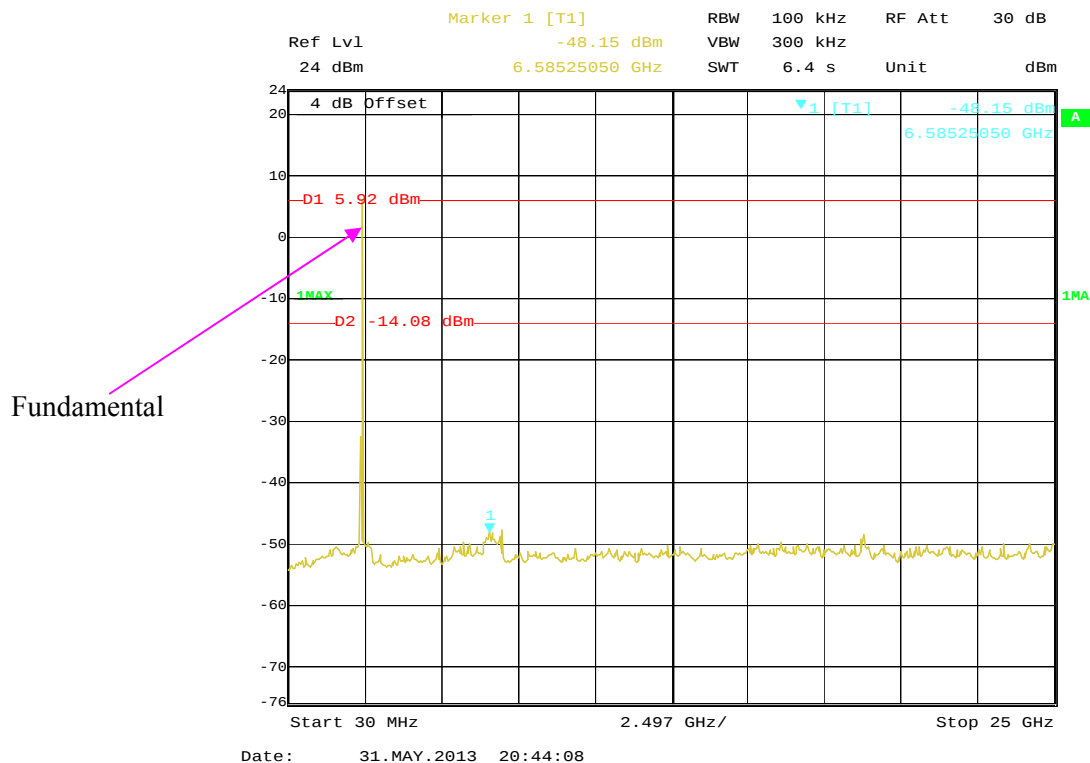
Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
2452.0	99.33	PK	14	1.5	H	7.21	106.54	/	/
2452.0	77.07	Ave.	351	1.1	H	7.21	84.28	/	/
2452.0	87.31	PK	351	1.1	V	7.21	94.52	/	/
2452.0	66.54	Ave.	347	1.1	V	7.21	73.75	/	/
7356.0	48.36	PK	115	1.0	V	15.91	64.27	74	9.73
9808.0	24.17	Ave.	14	1.5	V	19.29	43.46	54	10.54
4904.0	30.90	Ave.	115	1.0	V	12.46	43.36	54	10.64
7356.0	25.14	Ave.	40	1.4	V	15.91	41.05	54	12.95
357.3	45.55	QP	14	1.5	H	-13.3	32.25	46	13.75
4904.0	46.05	PK	39	1.3	V	12.46	58.51	74	15.49
2492.1	50.24	PK	5	1.2	H	7.21	57.45	74	16.55
2492.1	30.00	Ave.	39	1.3	H	7.21	37.21	54	16.79
2489.9	29.42	Ave.	5	1.2	V	7.21	36.63	54	17.37
9808.0	35.12	PK	40	1.4	V	19.29	54.41	74	19.59
2326.4	25.54	Ave.	350	1.4	H	5.48	31.02	54	22.98
2489.9	41.26	PK	350	1.4	V	7.21	48.47	74	25.53
2326.4	40.63	PK	347	1.1	H	5.48	46.11	74	27.89

Note:

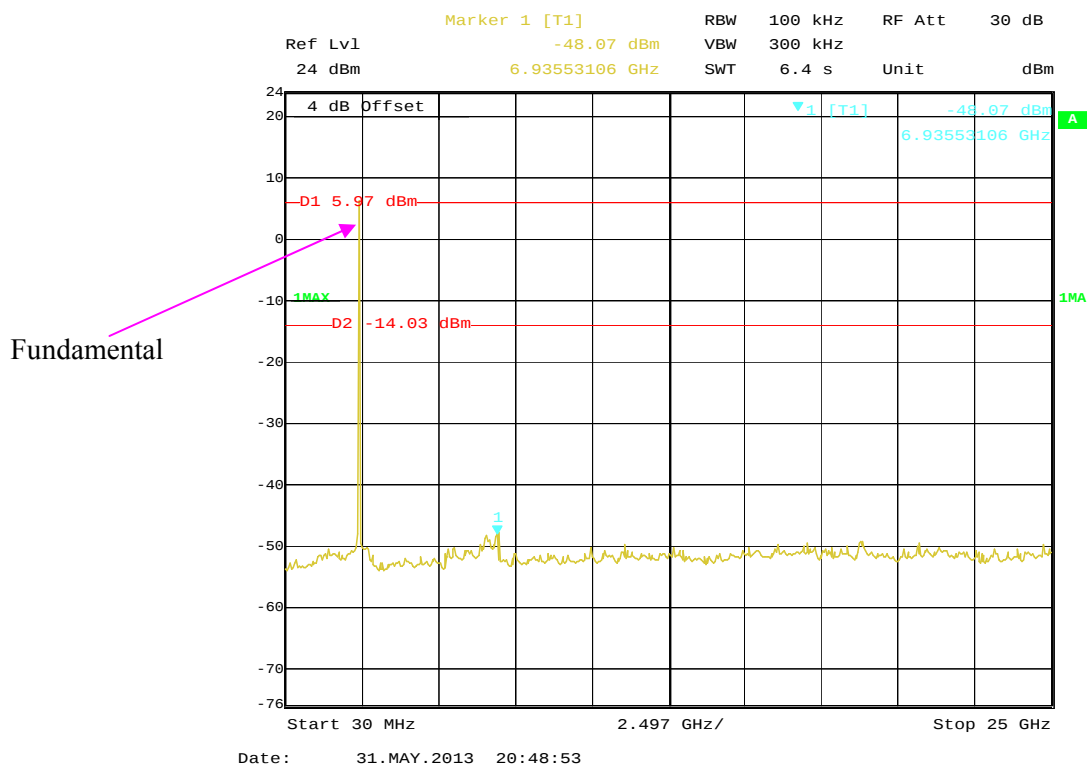
Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + cable loss – amplifier factor

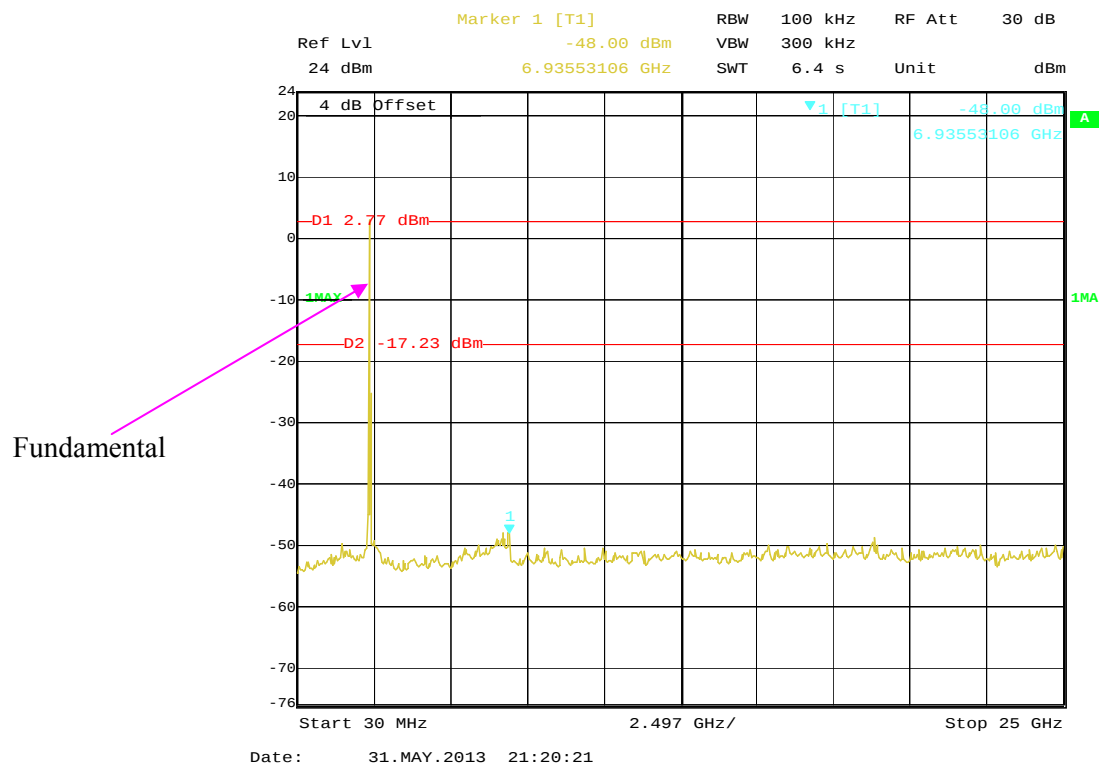
Margin = Limit - Corrected Amplitude

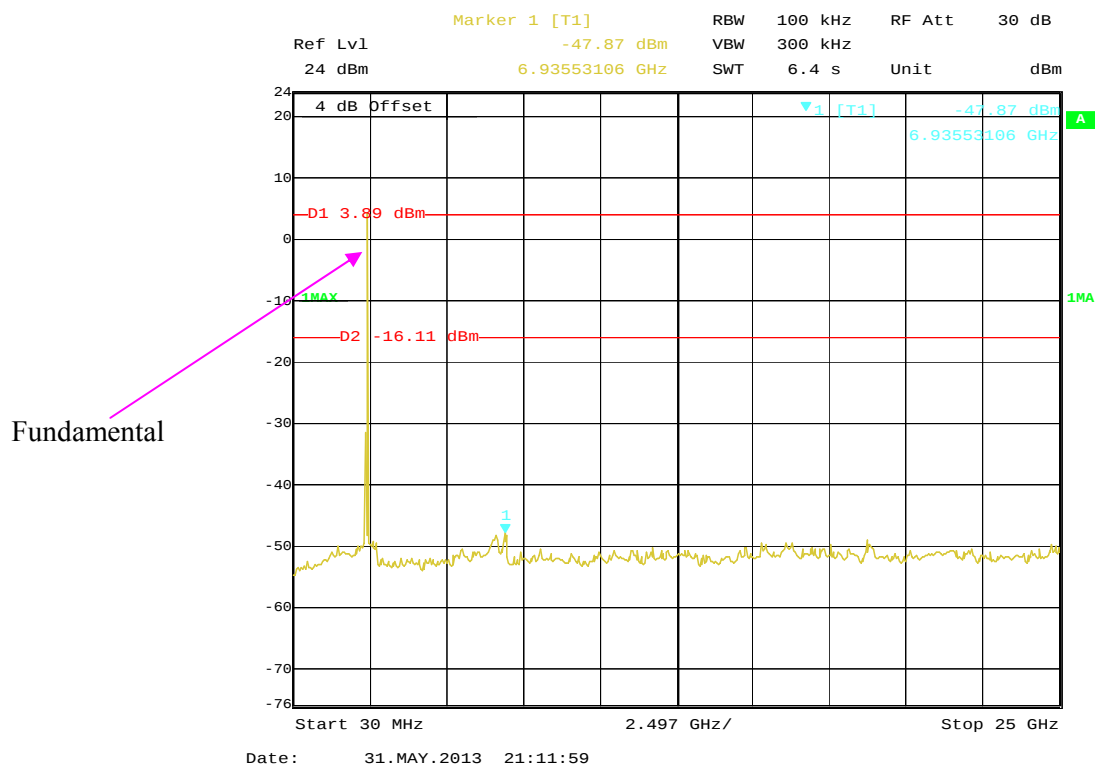
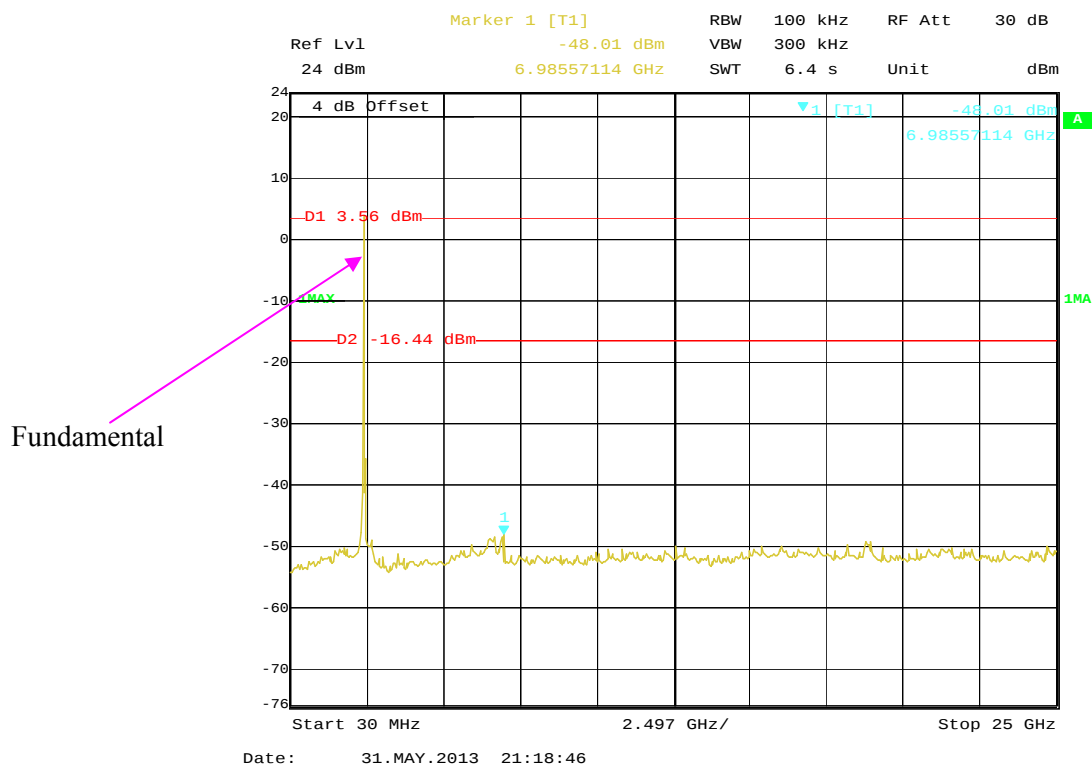
Conducted Spurious Emissions at Antenna Port:**802.11b Low Channel, Antenna 0****802.11b Middle Channel, Antenna 0**

802.11b High Channel, Antenna 0

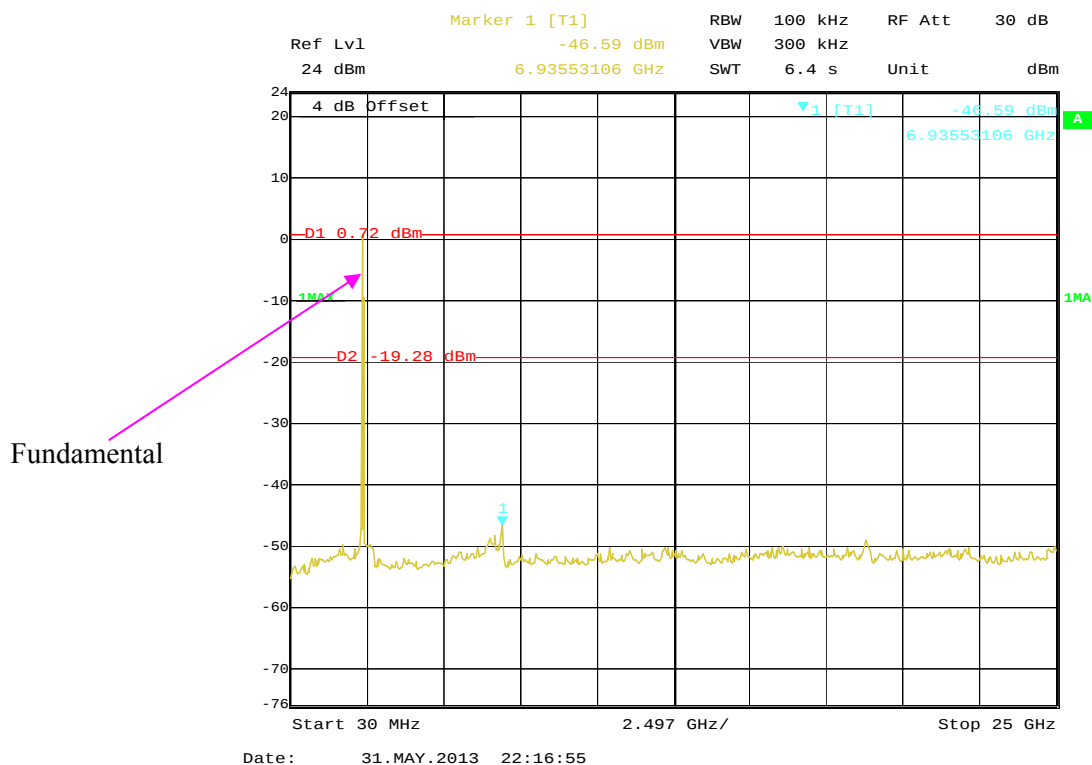


802.11g Low Channel, Antenna 0

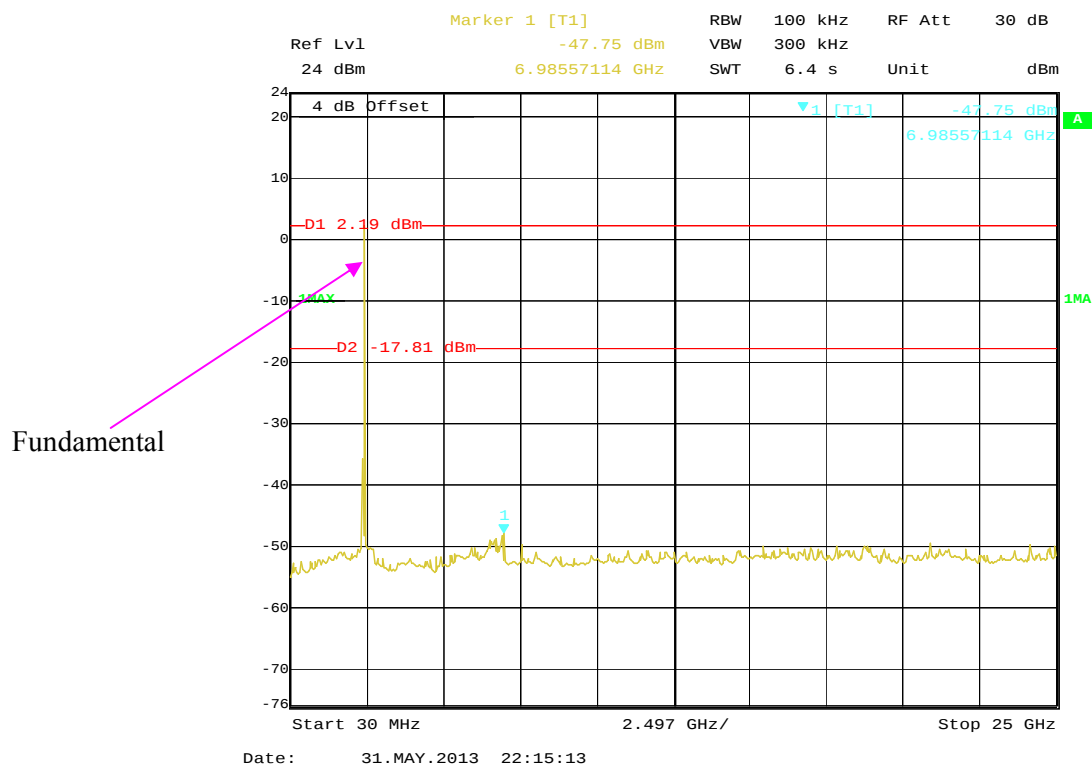


802.11g Middle Channel, Antenna 0**802.11g High Channel, Antenna 0**

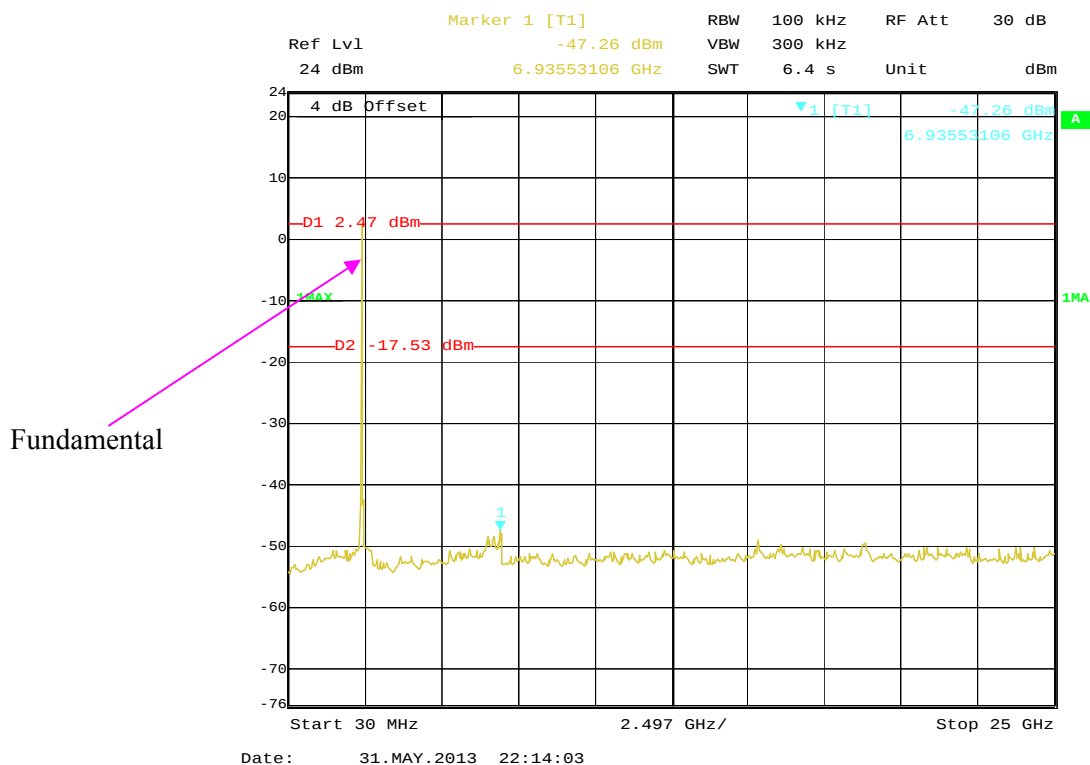
802.11n-HT20 Low Channel, Antenna 0



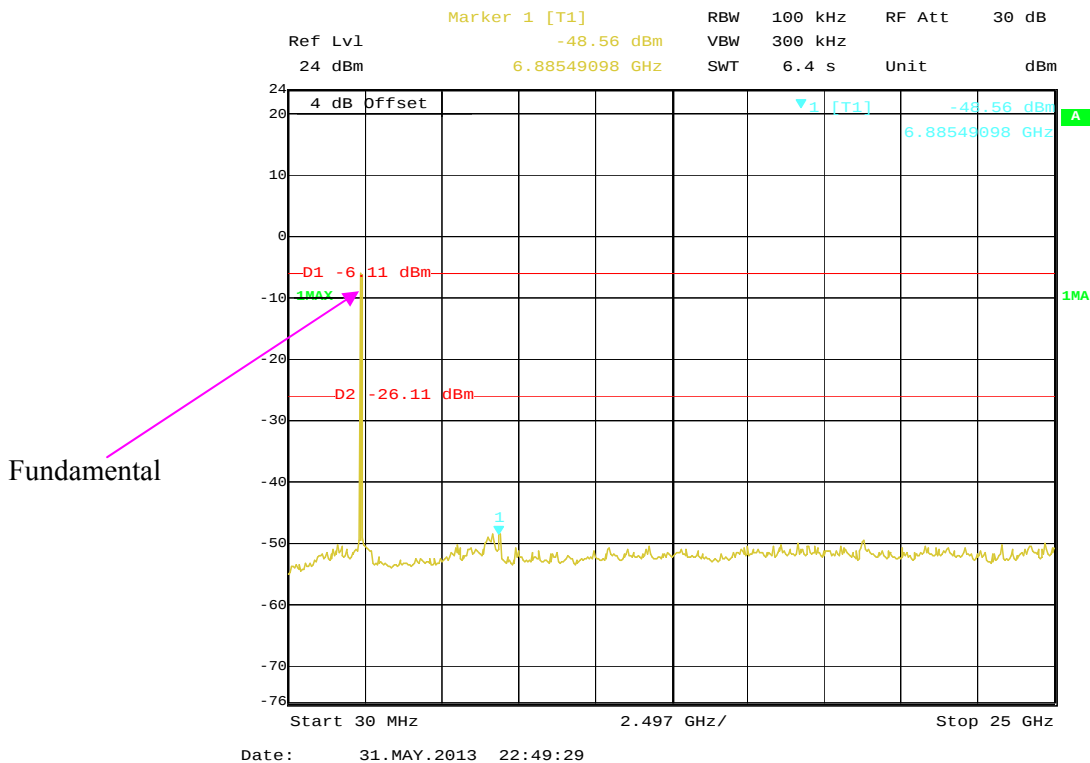
802.11n-HT20 Middle Channel, Antenna 0



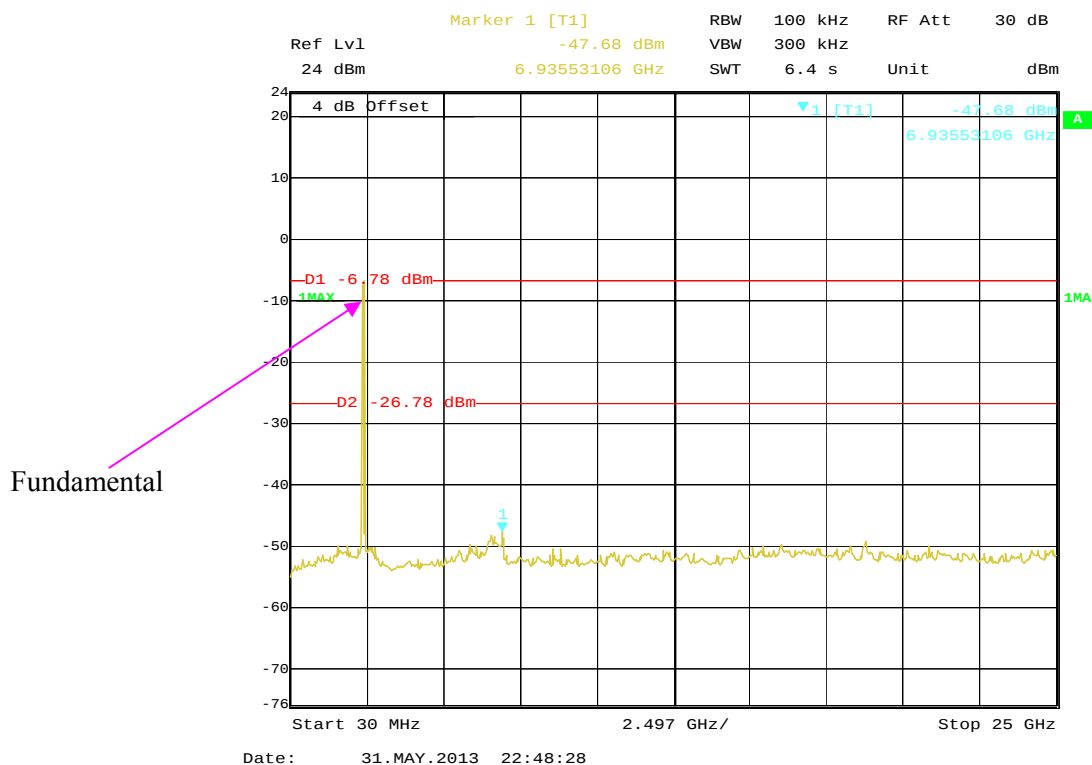
802.11n-HT20 High Channel, Antenna 0



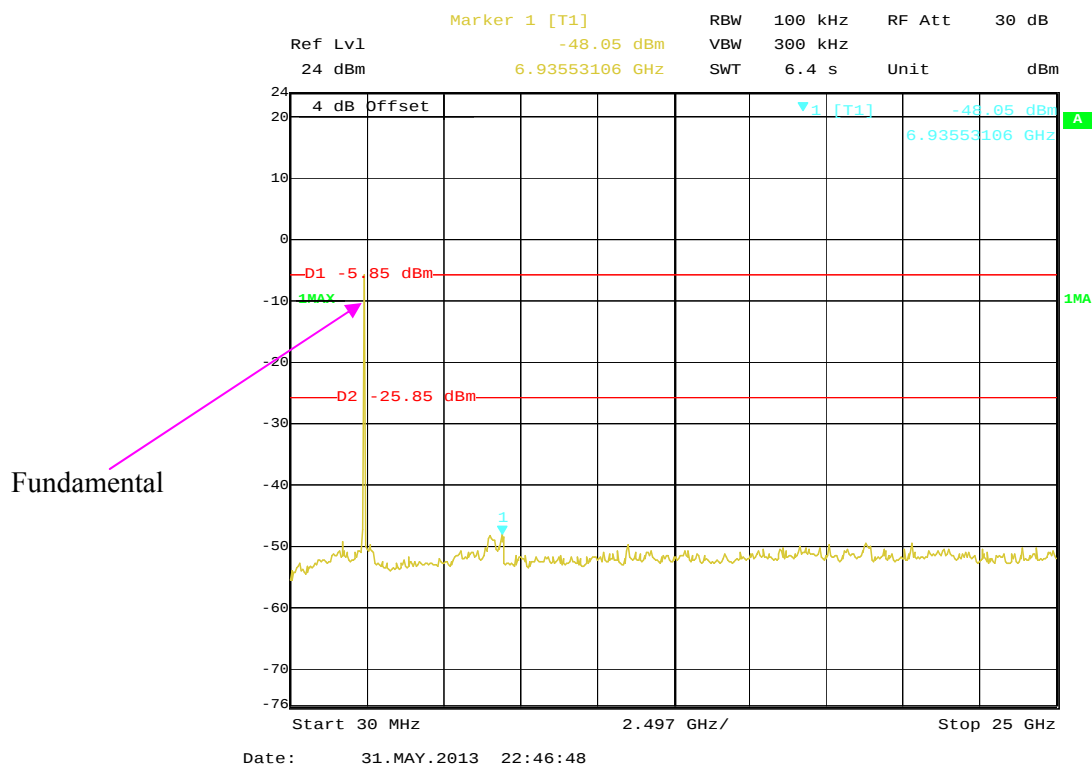
802.11n-HT40 Low Channel, Antenna 0



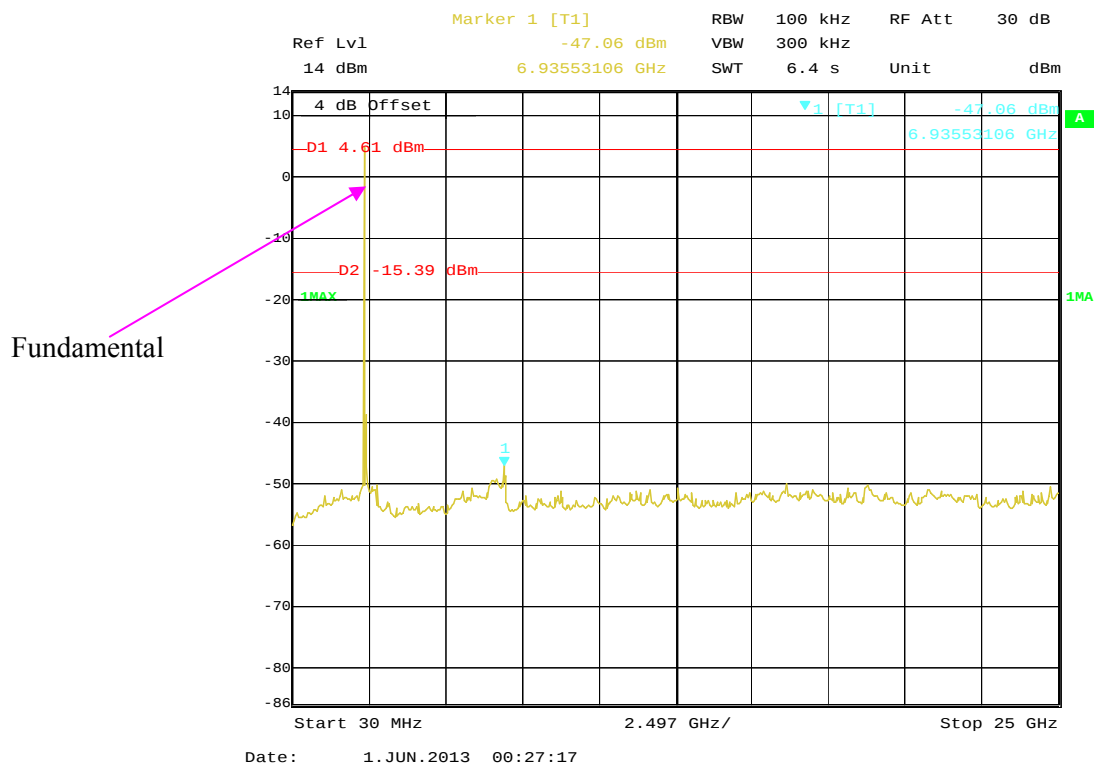
802.11n-HT40 Middle Channel, Antenna 0



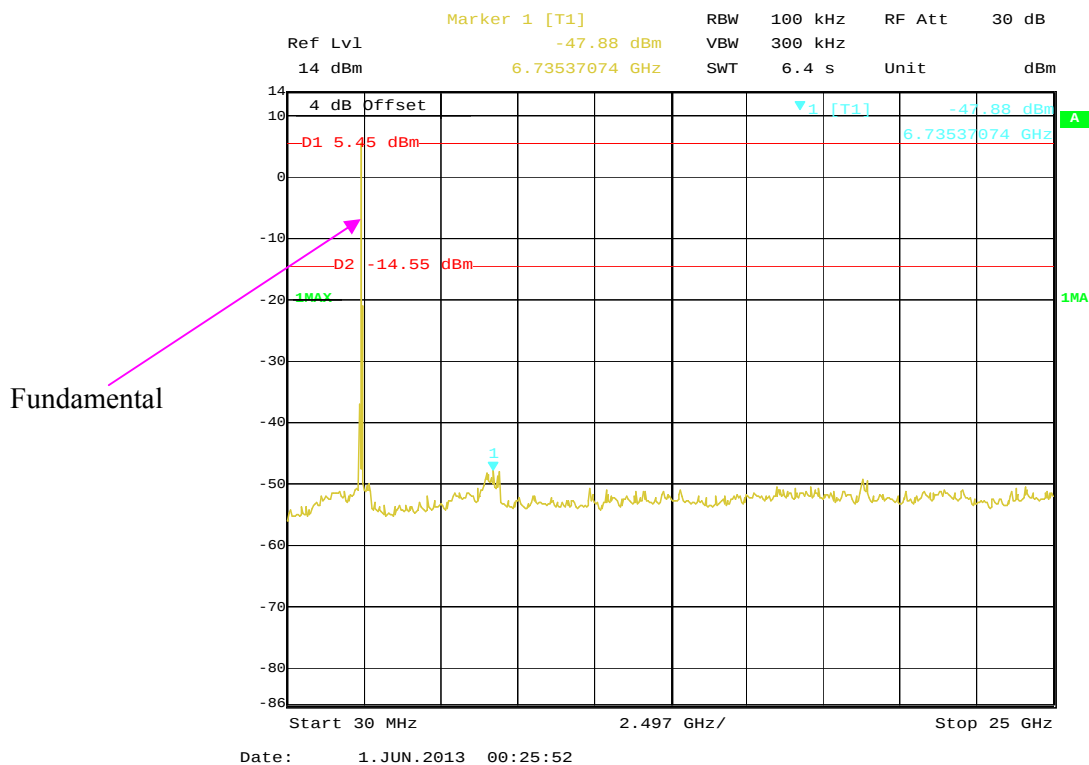
802.11n-HT40 High Channel, Antenna 0



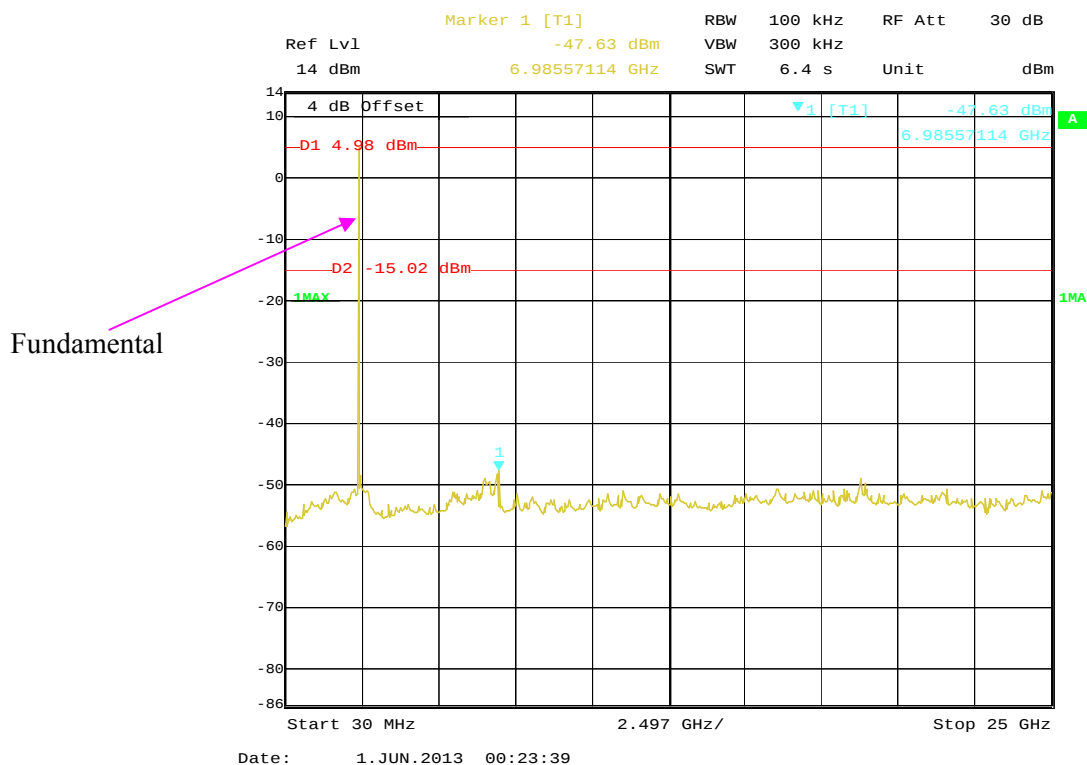
802.11b Low Channel, Antenna 1



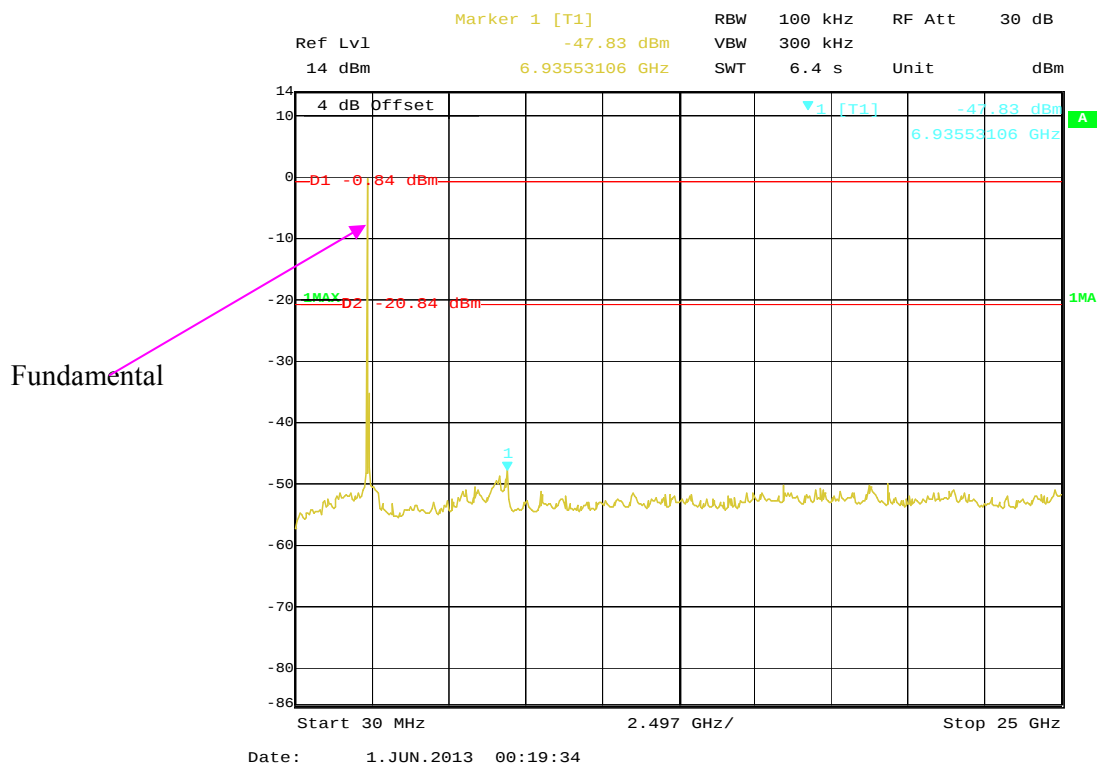
802.11b Middle Channel, Antenna 1

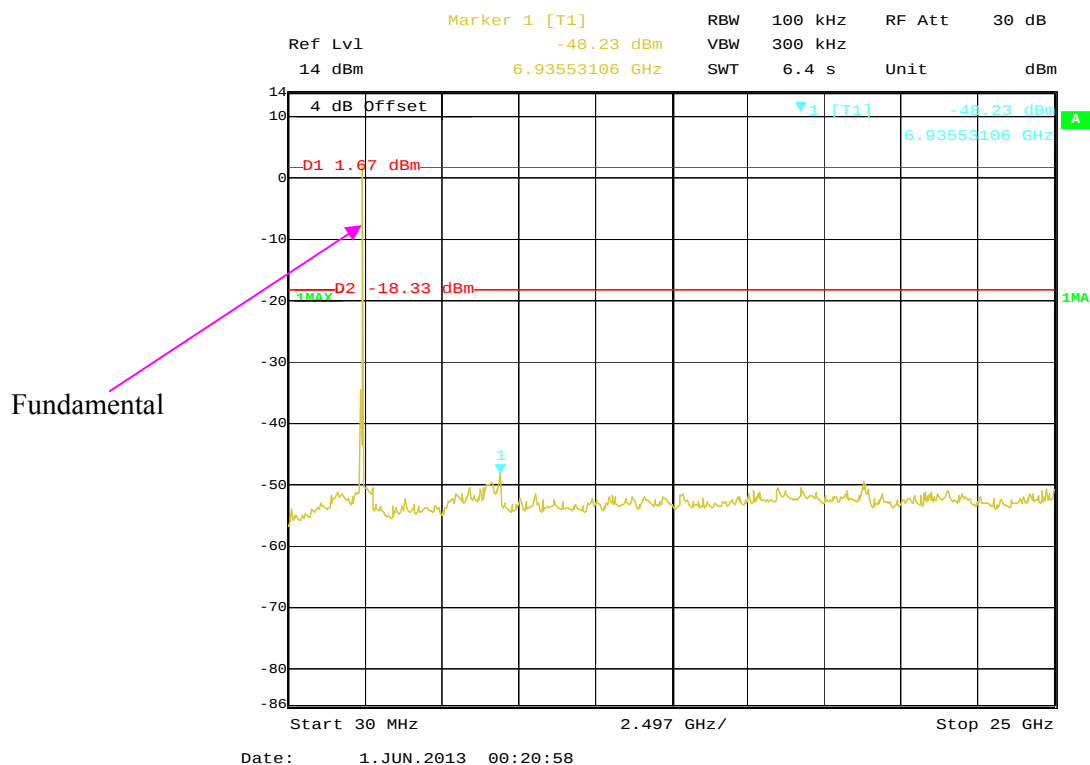
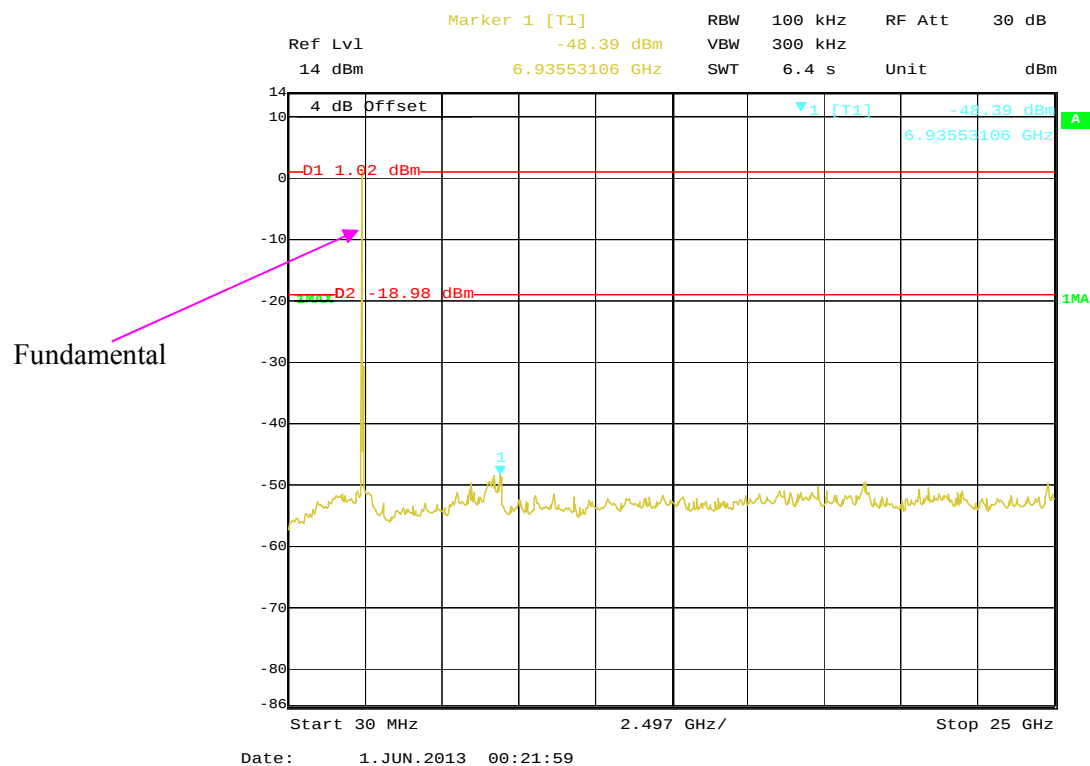


802.11b High Channel, Antenna 1



802.11g Low Channel, Antenna 1



802.11g Middle Channel, Antenna 1**802.11g High Channel, Antenna 1**

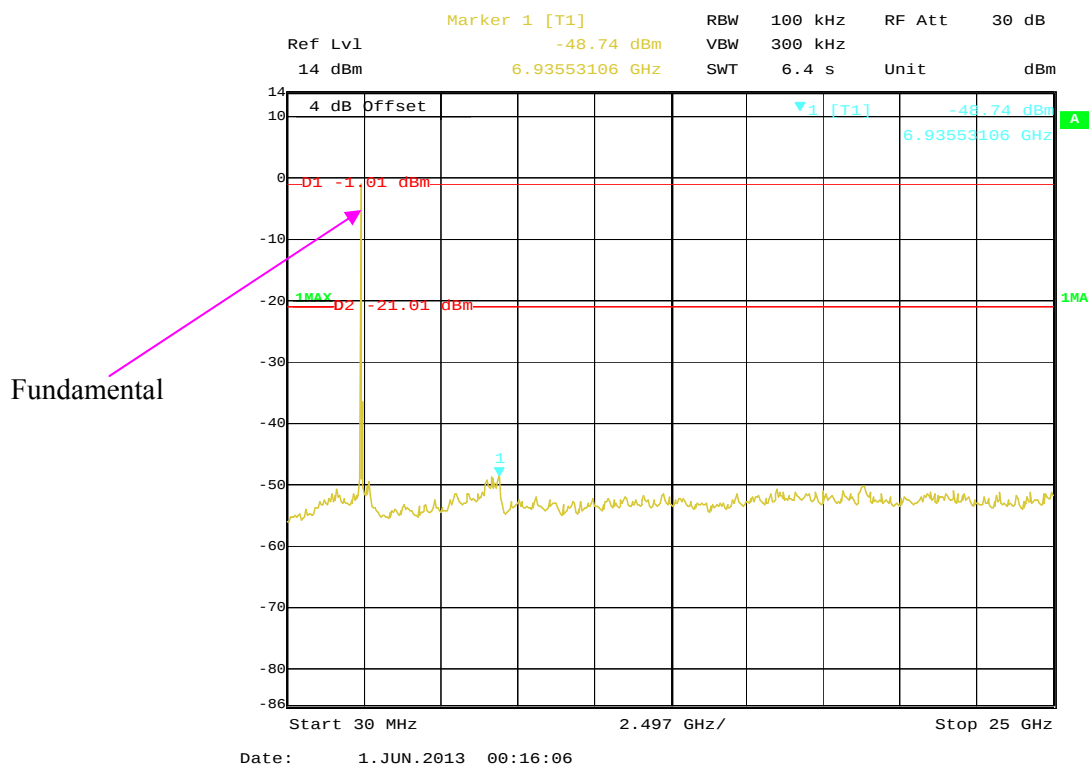
Fundamental



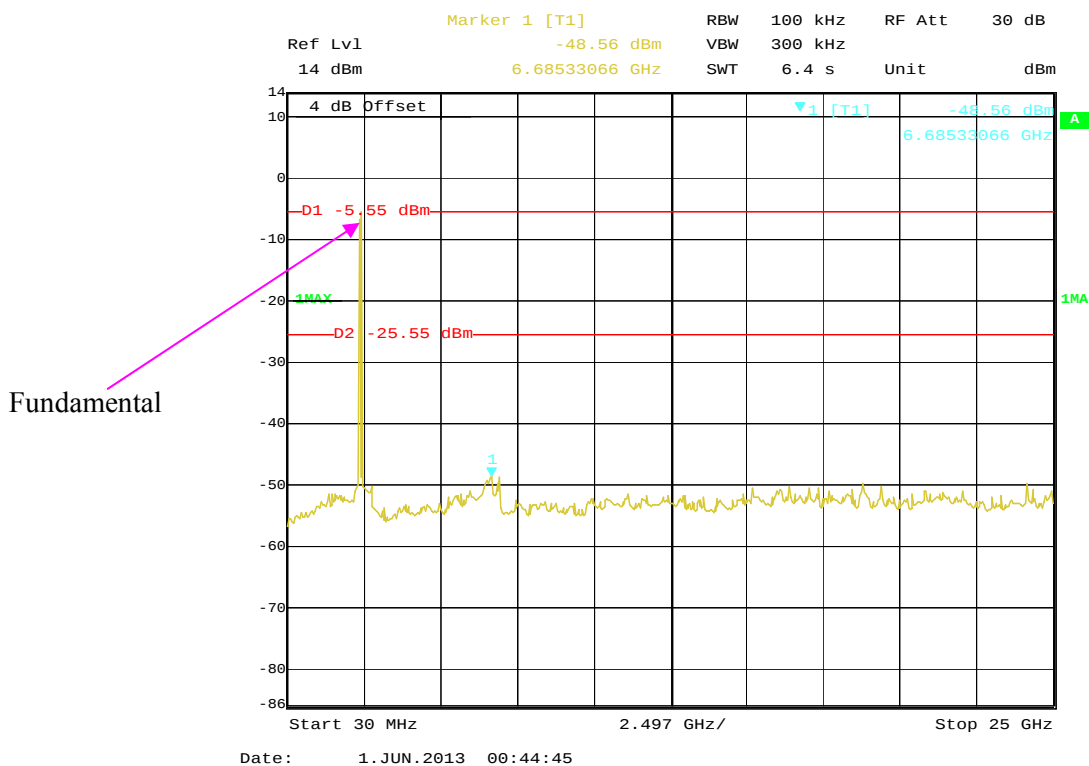
Fundamental



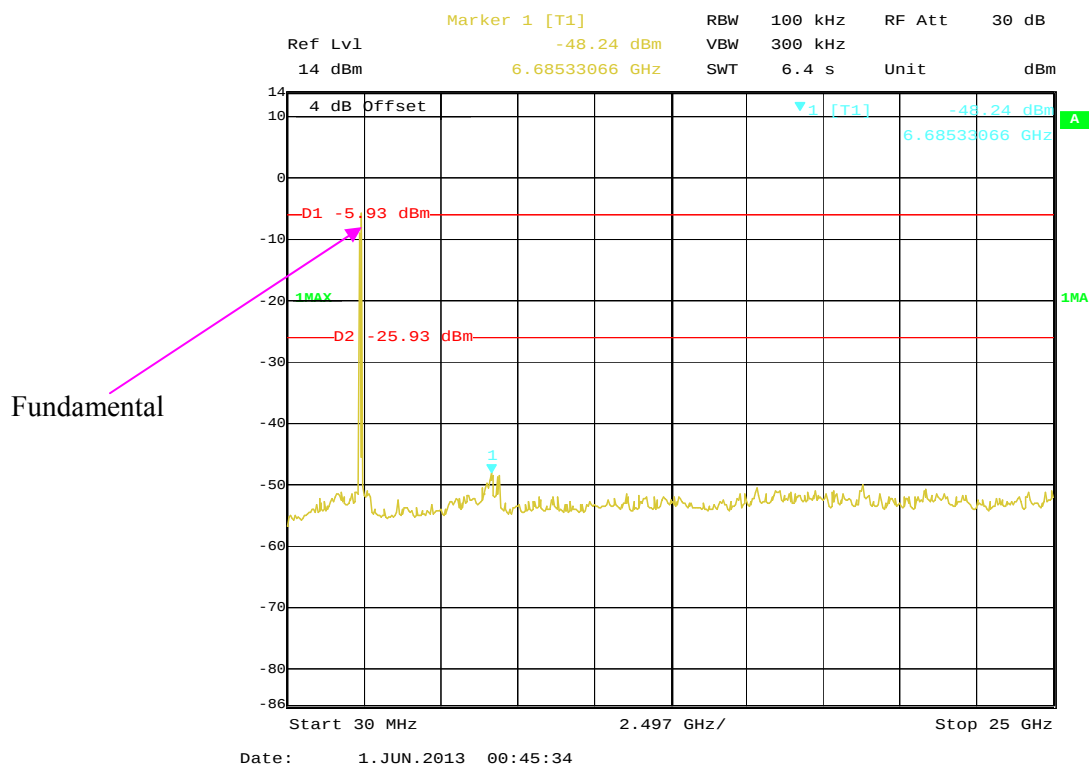
802.11n-HT20 High Channel, Antenna 1



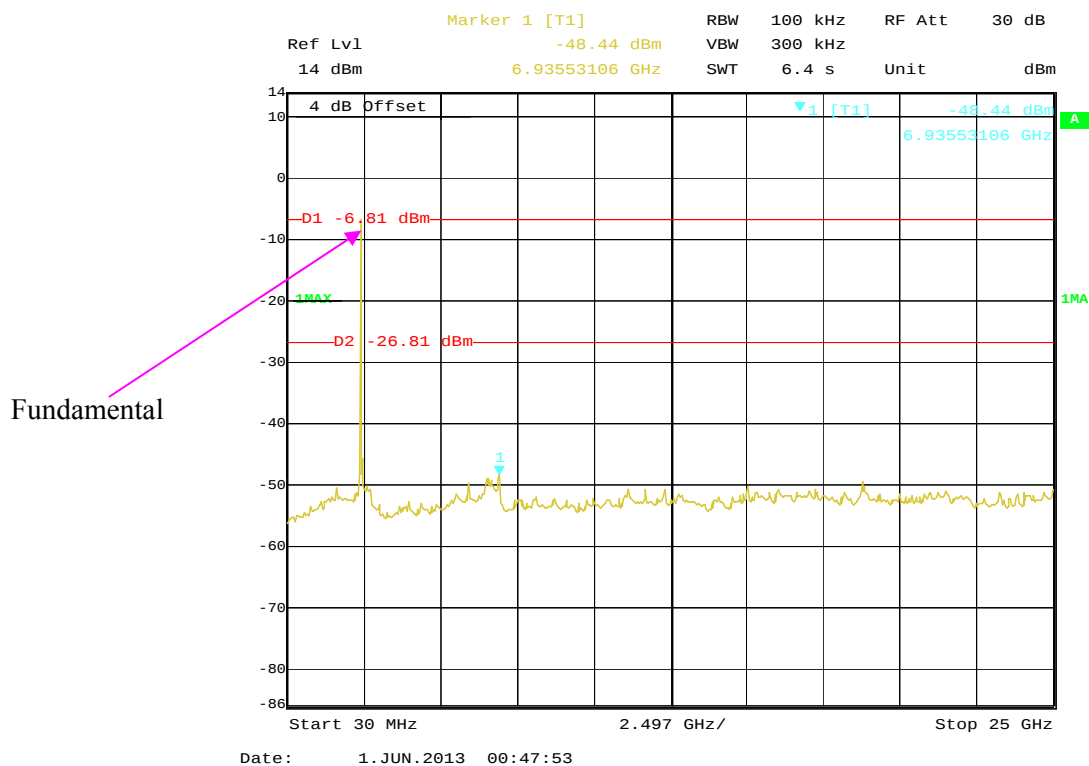
802.11n-HT40 Low Channel, Antenna 1



802.11n-HT40 Middle Channel, Antenna 1



802.11n-HT40 High Channel, Antenna 1




FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB emission bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa

The testing was performed by Candy Li from 2013-05-31.

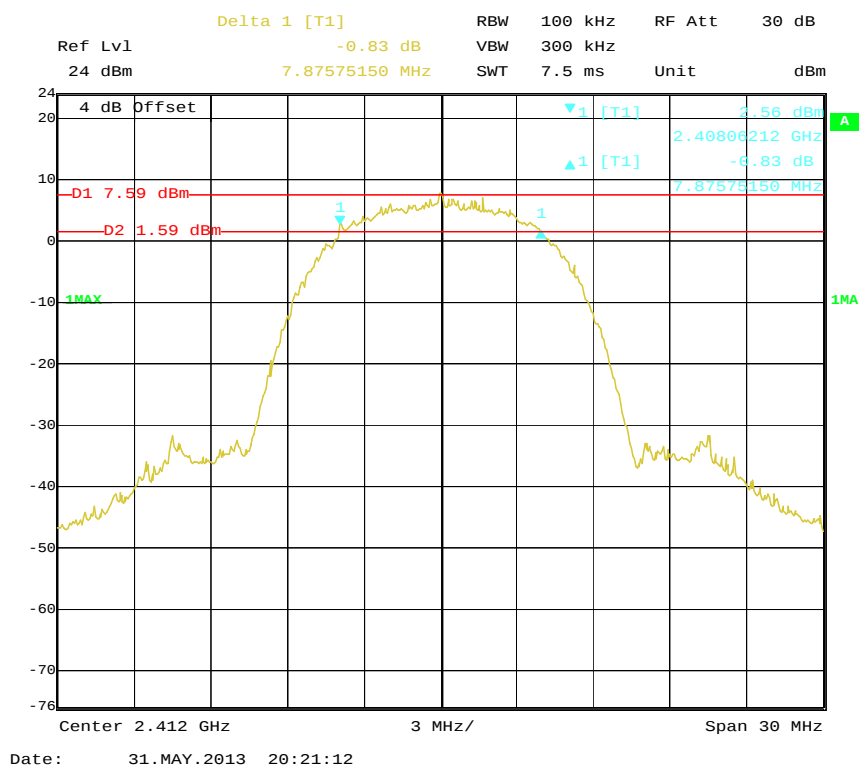
Test Mode: Transmitting

Test Result: Pass.

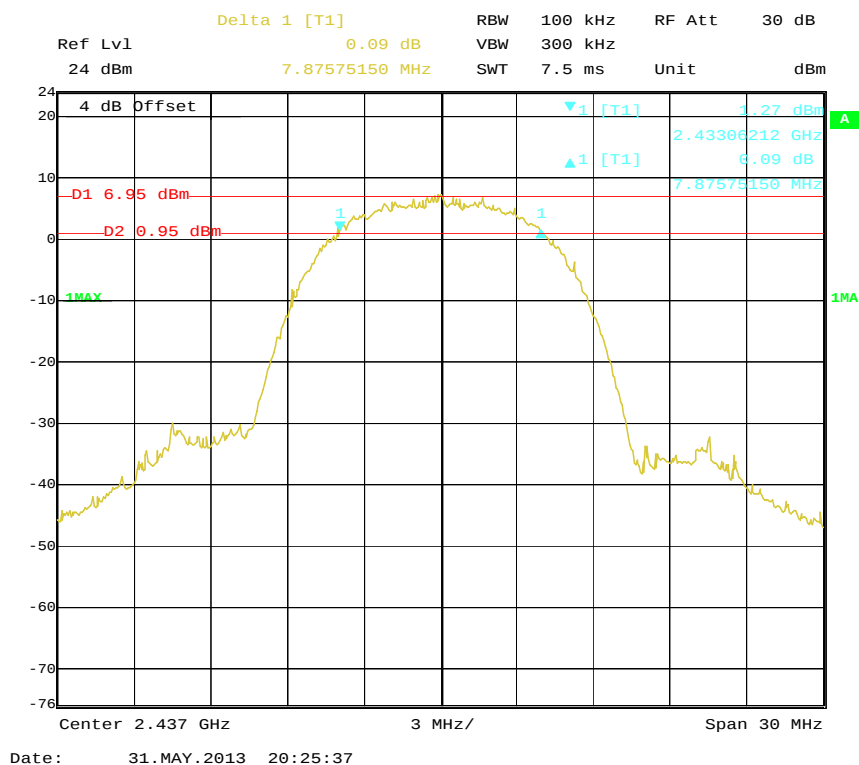
Please refer to the following tables and plots.

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)		Limit (kHz)	Result
		Antenna 0	Antenna 1		
802.11b mode					
Low	2412	7.88	7.88	≥500	Pass
Middle	2437	7.88	7.88	≥500	Pass
High	2462	7.88	7.88	≥500	Pass
802.11g mode					
Low	2412	15.51	15.99	≥500	Pass
Middle	2437	15.51	15.99	≥500	Pass
High	2462	15.51	15.99	≥500	Pass
802.11n-HT20 mode					
Low	2412	17.56	17.25	≥500	Pass
Middle	2437	17.56	17.25	≥500	Pass
High	2462	17.25	17.25	≥500	Pass
802.11n-HT40 mode					
Low	2422	35.95	36.19	≥500	Pass
Middle	2437	35.95	36.19	≥500	Pass
High	2452	35.95	36.19	≥500	Pass

802.11b Low Channel, Antenna 0



802.11b Middle Channel, Antenna 0



Ref Lvl 24 dBm Delta 1 [T1] -0.78 dB RBW 100 kHz RF Att 30 dB
 4 dB Offset 7.87575150 MHz SWT 7.5 ms Unit dBm

4 dB Offset

D1 7.92 dBm

D2 1.92 dBm

1MAX

1 [T1]

2.08 dBm

2.45812224 GHz

-0.78 dB

7.87575150 MHz

Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 31.MAY.2013 20:27:48

Ref Lvl 24 dBm

Delta 1 [T1] 0.31 dB

RBW 100 kHz

RF Att 30 dB

Unit dBm

4 dB Offset

D1 7.65 dBm

D2 1.65 dBm

1 [T1] 1 [T1]

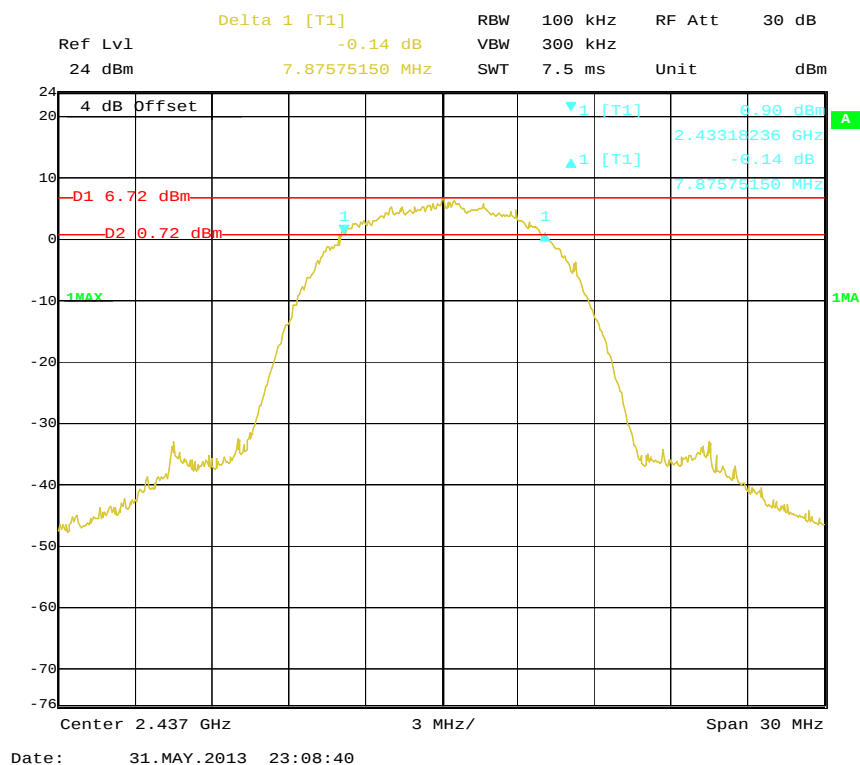
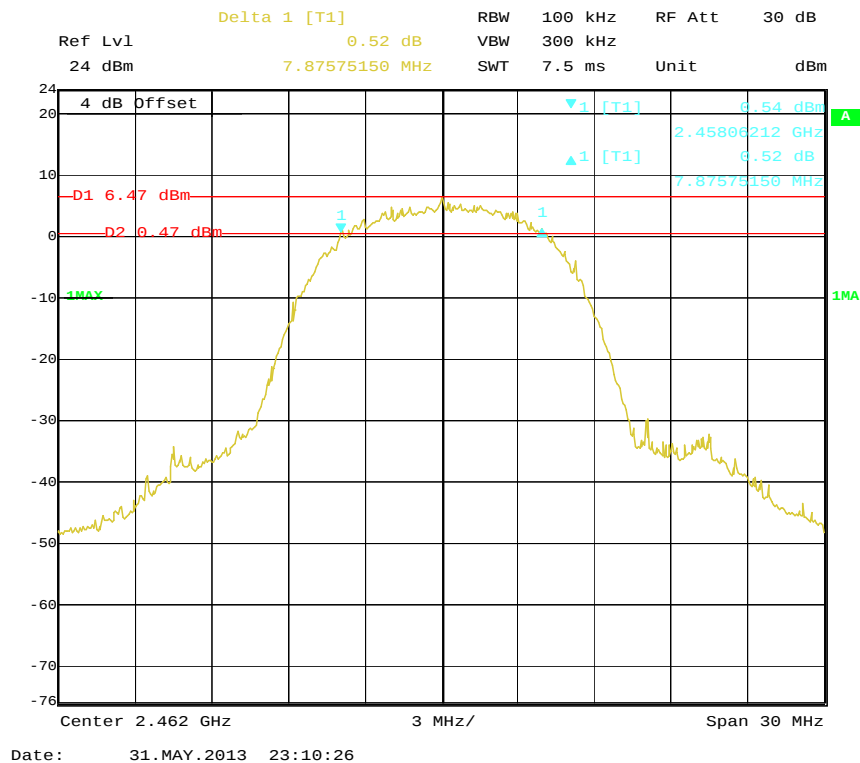
1MAX

1MAX

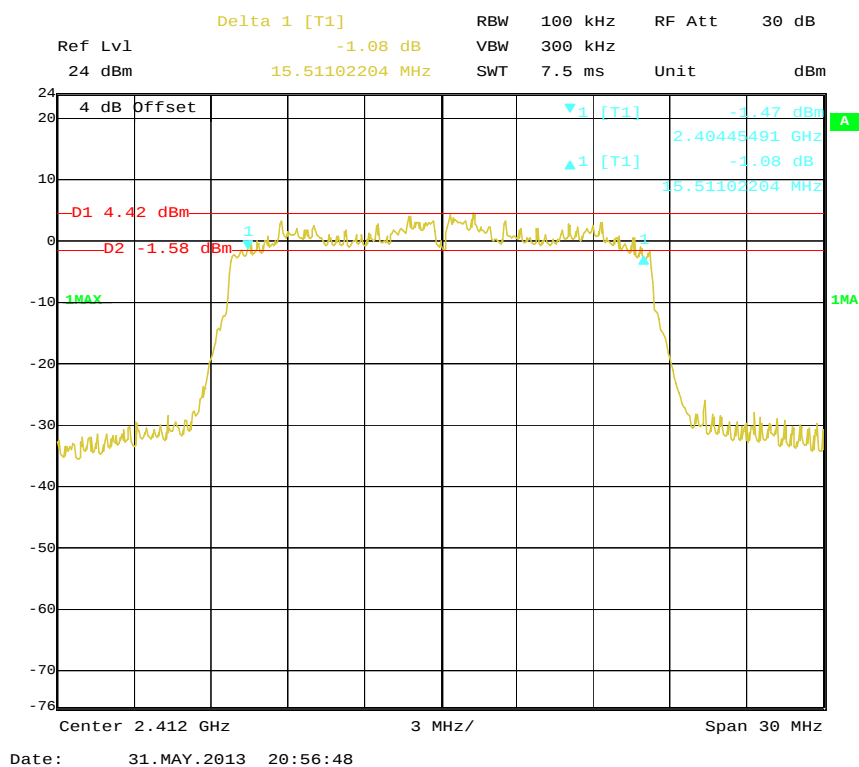
Center 2.412 GHz

Span 30 MHz

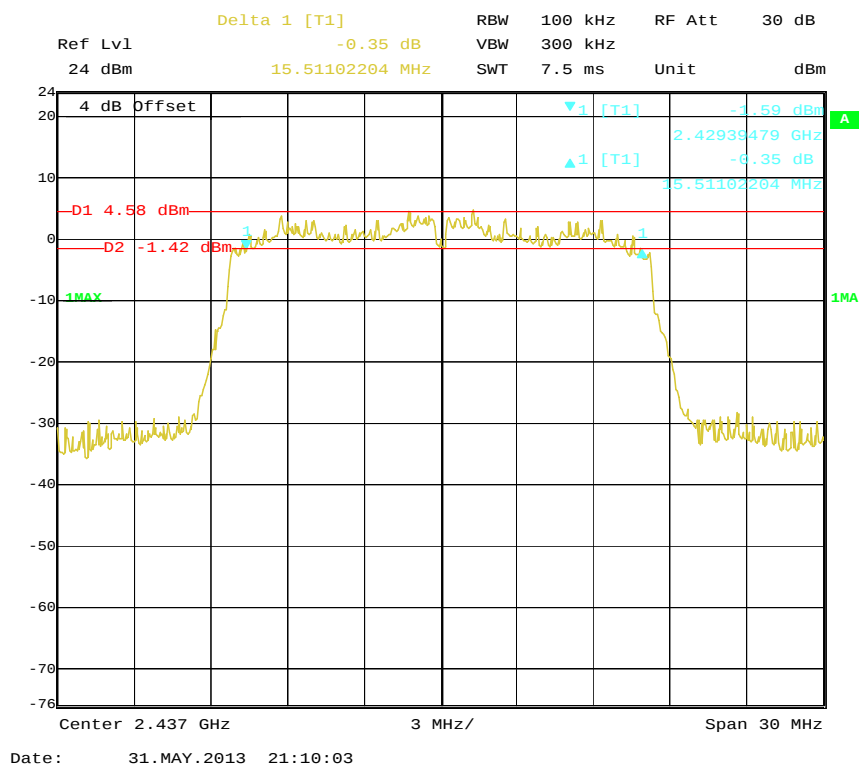
Date: 31.MAY.2013 23:03:53

802.11b Middle Channel, Antenna 1**802.11b High Channel, Antenna 1**

802.11g Low Channel, Antenna 0



802.11g Middle Channel, Antenna 0



Ref Lvl 24 dBm Delta 1 [T1] -1.02 dB RBW 100 kHz RF Att 30 dB
24 dBm 15.51102204 MHz SWT 7.5 ms Unit dBm

4 dB Offset

D1 5.61 dBm

D2 -0.39 dBm

1MAX

1MA

Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 31.MAY.2013 21:04:24

Ref Lvl 24 dBm Delta 1 [T1] 0.03 dB RBW 100 kHz RF Att 30 dB
 24 dBm 15.99198397 MHz SWT 7.5 ms Unit dBm

4 dB Offset

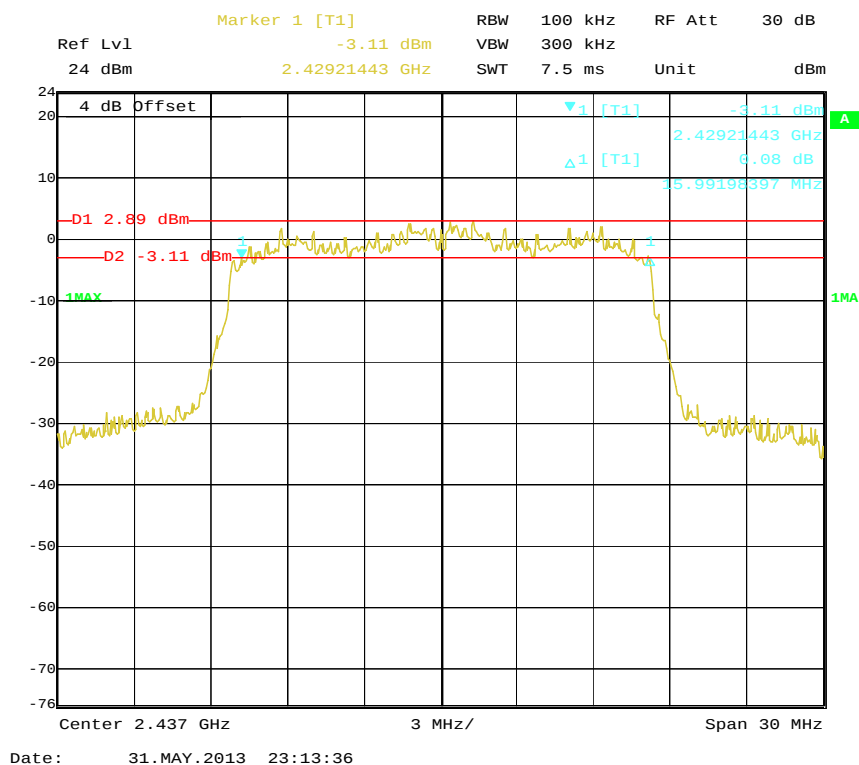
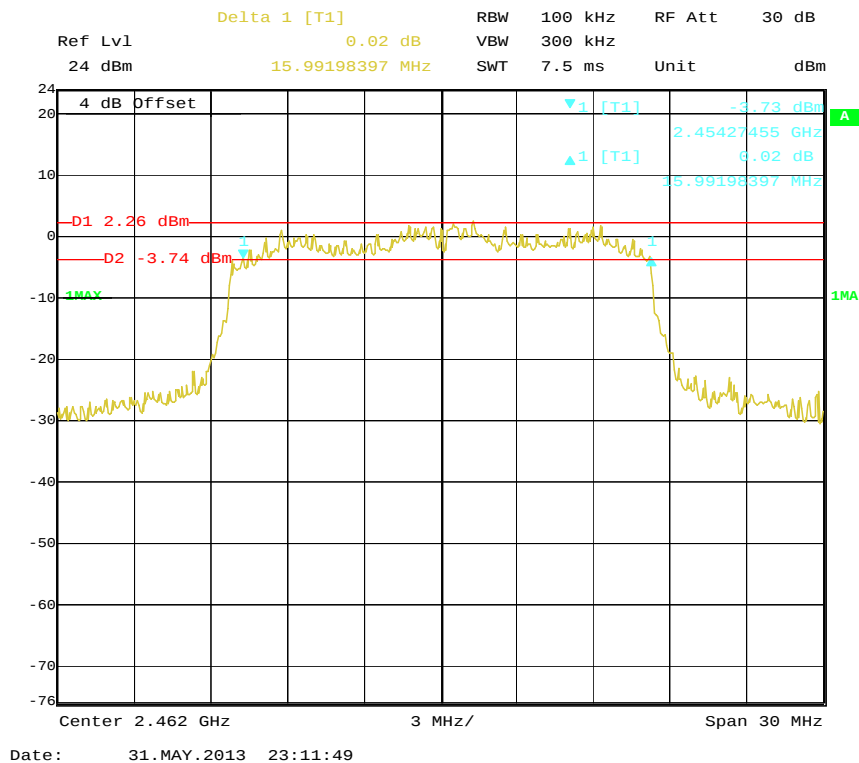
▼1 [T1] -2.76 dBm
 ▲1 [T1] 2.40421443 GHz
 0.03 dB
 15.99198397 MHz

D1 3.19 dBm
 D2 -2.81 dBm

1MAX 1MAX

Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 31.MAY.2013 23:15:17

802.11g Middle Channel, Antenna 1**802.11g High Channel, Antenna 1**

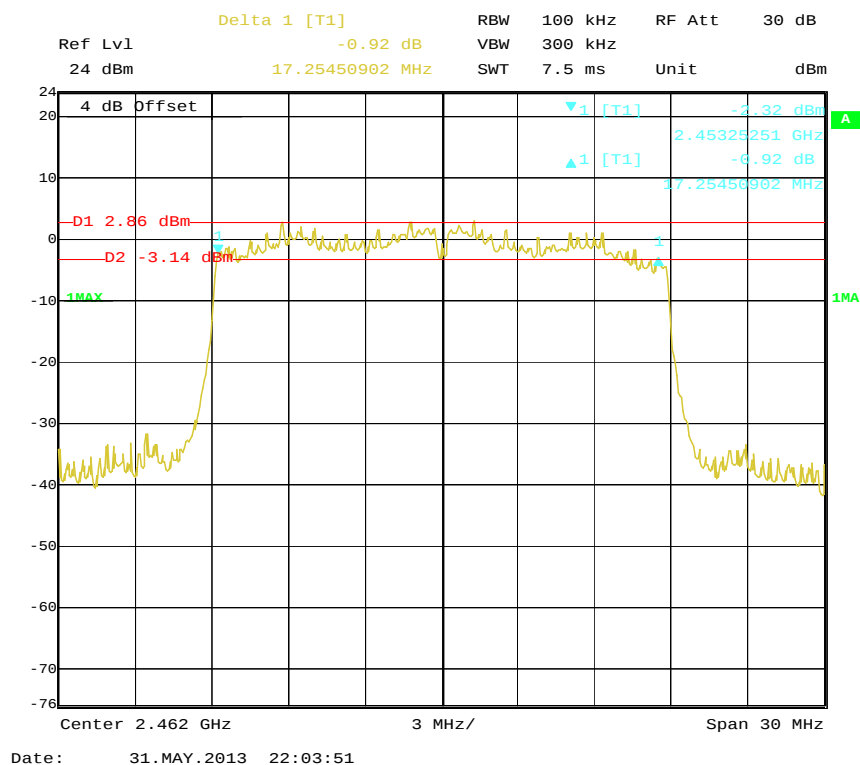
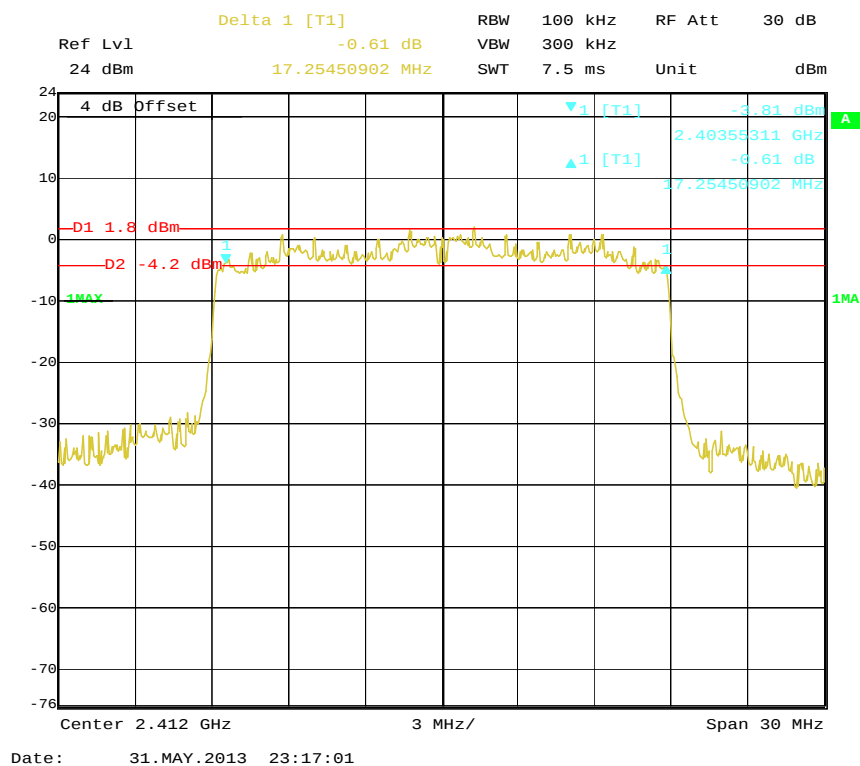
Ref Lvl 24 dBm
 Delta 1 [T1] 0.12 dB
 RBW 100 kHz
 RF Att 30 dB
 VBW 300 kHz
 SWT 7.5 ms
 Unit dBm

4 dB Offset
 -D1 2.25 dBm
 -D2 -3.75 dBm
 1MAX
 1MA

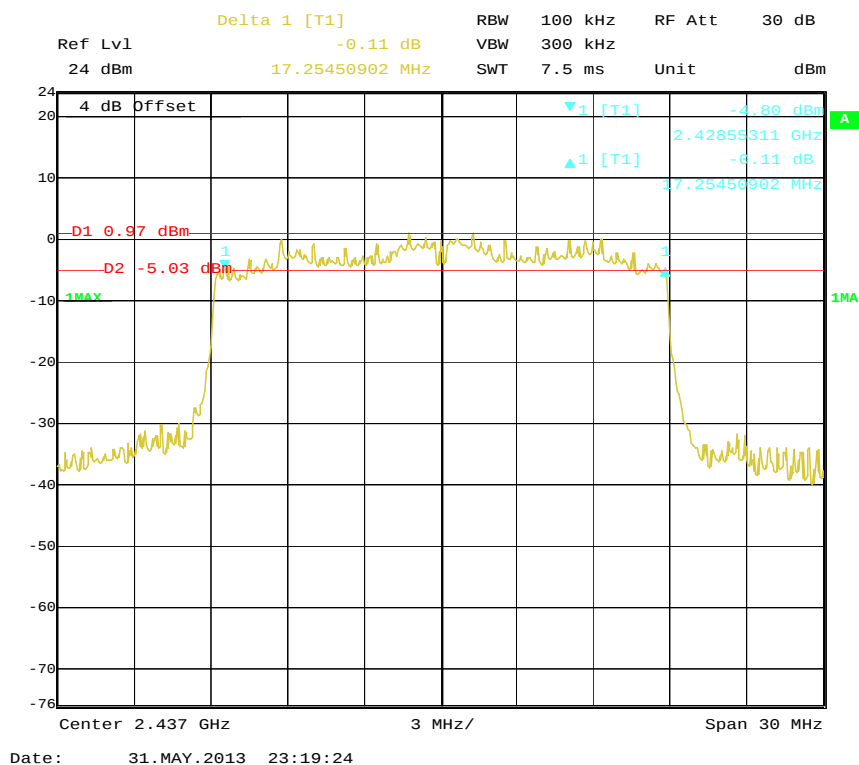
Center 2.412 GHz
 3 MHz/
 Span 30 MHz

2.40325251 GHz
 17.55511022 MHz
 -3.67 dBm
 0.12 dB

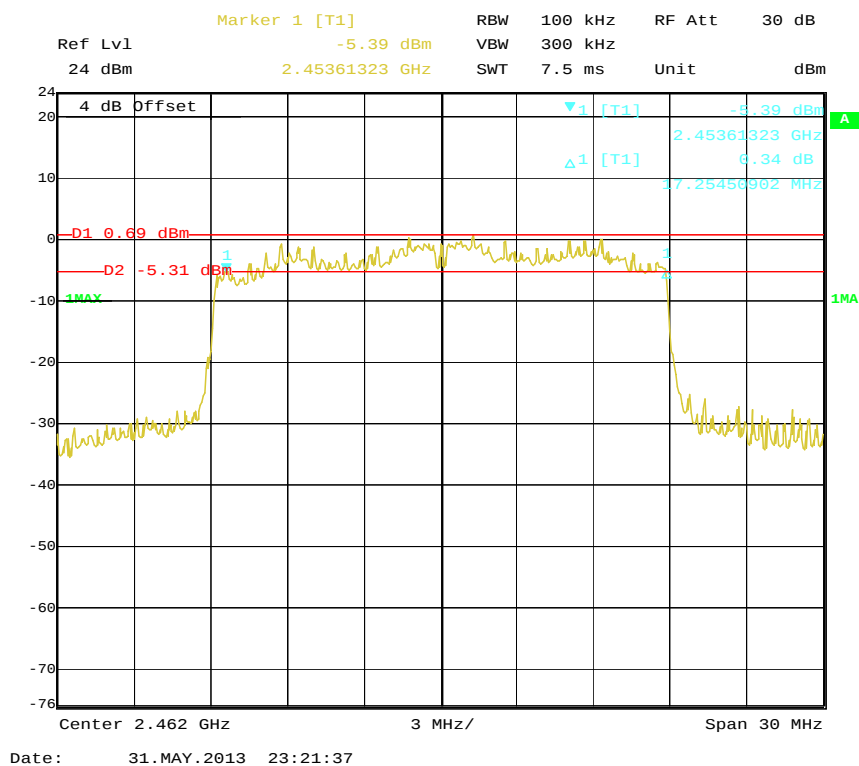
Ref Lvl 24 dBm Delta 1 [T1] -0.53 dB RBW 100 kHz RF Att 30 dB
 4 dB Offset 17.55511022 MHz VBW 300 kHz Unit dBm
 20 10 0 -10 -20 -30 -40 -50 -60 -70
 4 dB Offset
 D1 2.56 dBm
 D2 -3.44 dBm
 1MAX
 1MA
 1 [T1] -3.37 dBm
 1 [T1] -6.53 dBm
 2.42825251 GHz
 17.55511022 MHz
 Center 2.437 GHz 3 MHz/
 Span 30 MHz
 Date: 31.MAY.2013 21:59:59

802.11n-HT20 High Channel, Antenna 0**802.11n-HT20 Low Channel, Antenna 1**

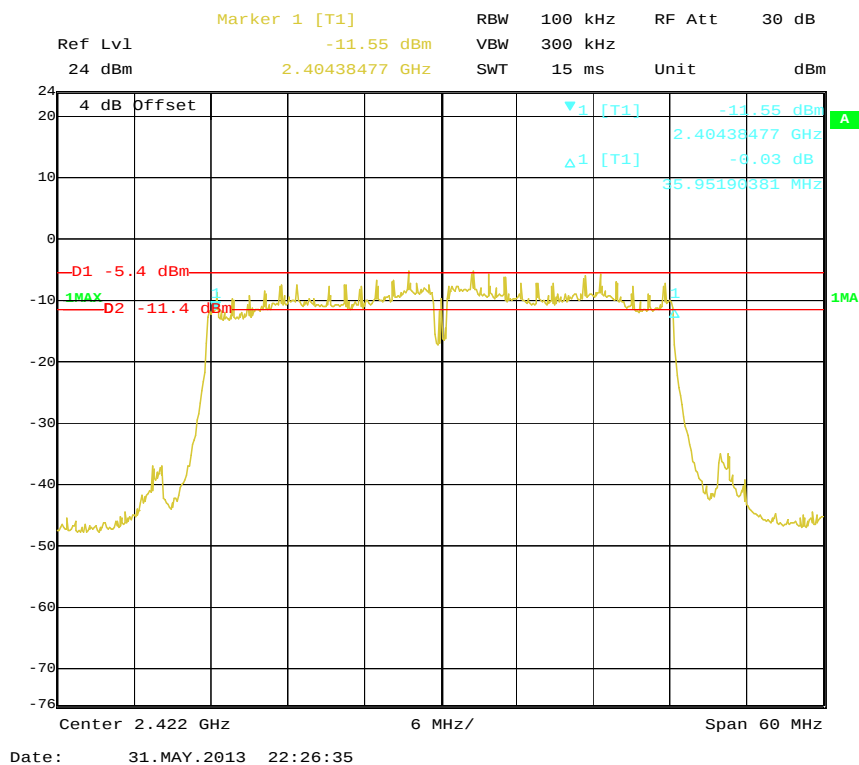
802.11n-HT20 Middle Channel, Antenna 1



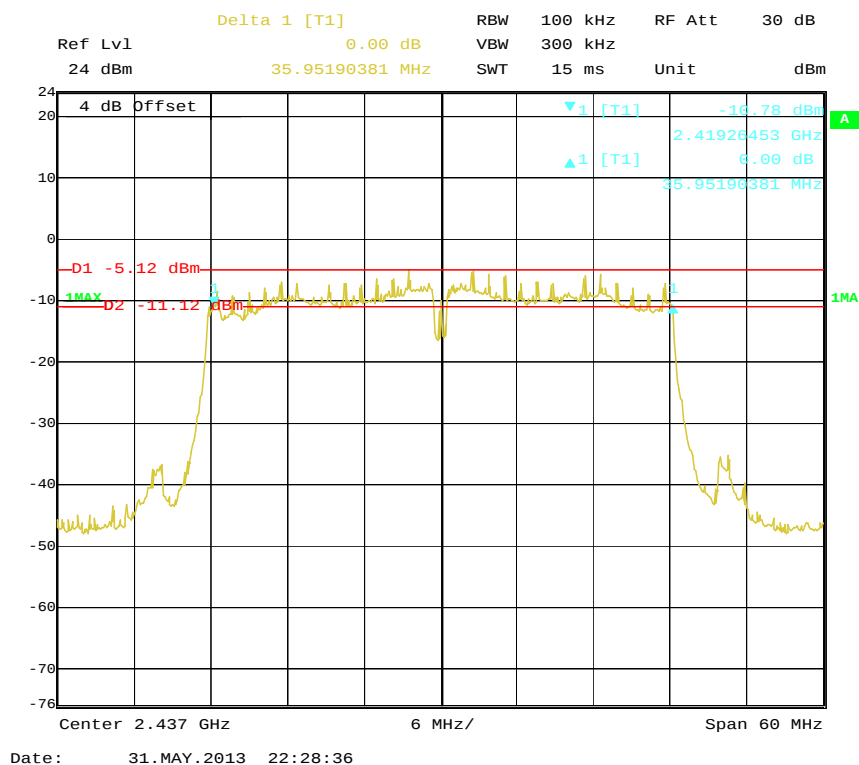
802.11n-HT20 High Channel, Antenna 1



802.11n-HT40 Low Channel, Antenna 0



802.11n-HT40 Middle Channel, Antenna 0



Delta 1 [T1] -0.56 dB
 RBW 100 kHz RF Att 30 dB
 VBW 300 kHz
 SWT 15 ms Unit dBm

Ref Lvl 24 dBm
 4 dB Offset

▼ 1 [T1] -16.25 dBm
 ▲ 1 [T1] -6.56 dB
 2.43426453 GHz
 35.95190381 MHz

-D1 -4.7 dBm
 -D2 -10.7 dBm

Center 2.452 GHz 6 MHz/ Span 60 MHz

Date: 31.MAY.2013 22:30:09

Ref Lvl 24 dBm

Marker 1 [T1] -11.35 dBm

RBW 100 kHz

VBW 300 kHz

RF Att 30 dB

SWT 15 ms

Unit dBm

4 dB Offset

▼1 [T1] -11.35 dBm

△1 [T1] 2.40414429 GHz

-6.01 dB

36.19238477 MHz

-D1 -5.27 dBm

-D2 -11.27 dBm

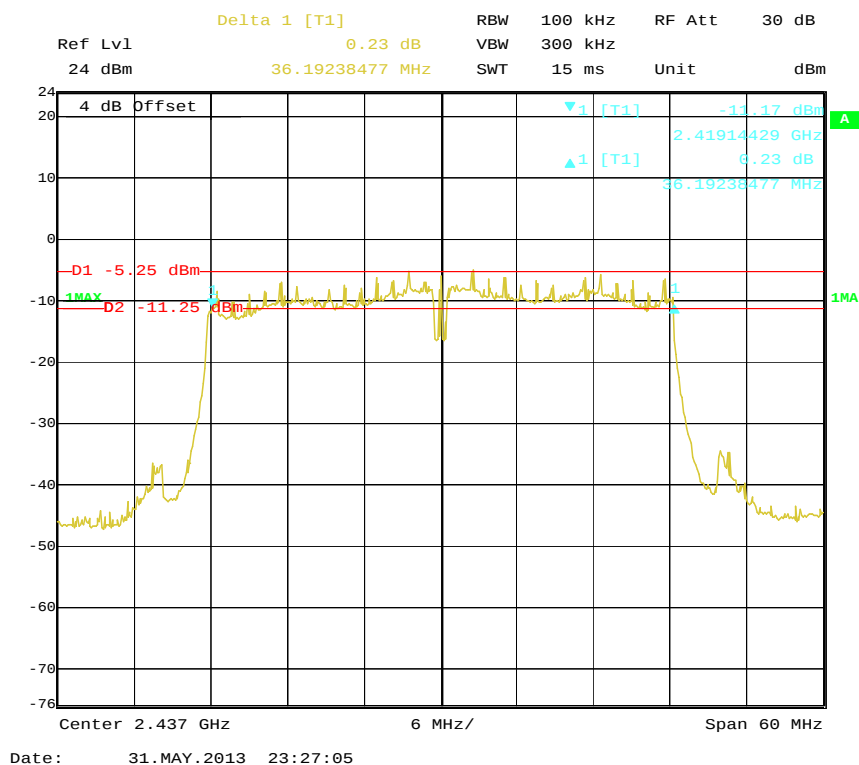
Center 2.422 GHz

6 MHz/

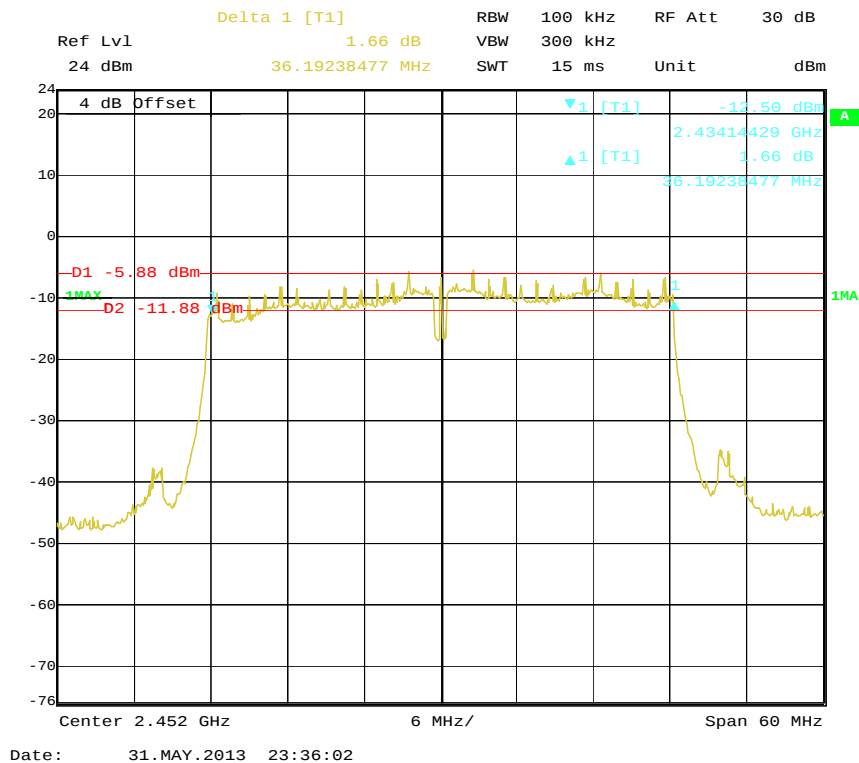
Span 60 MHz

Date: 31.MAY.2013 23:33:51

802.11n-HT40 Middle Channel, Antenna 1



802.11n-HT40 High Channel, Antenna 1




FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum analyzer.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

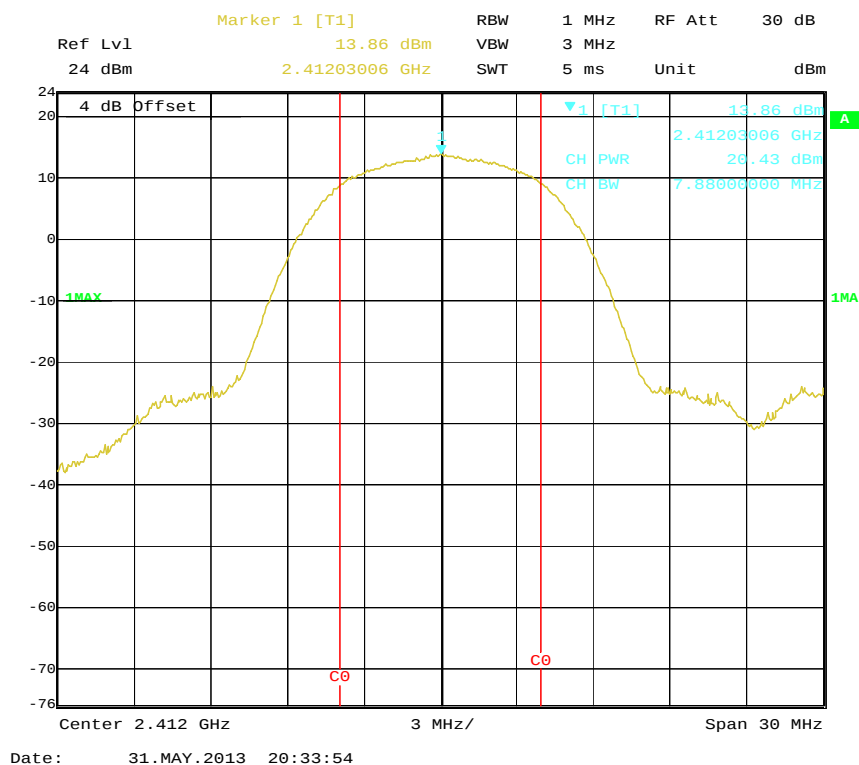
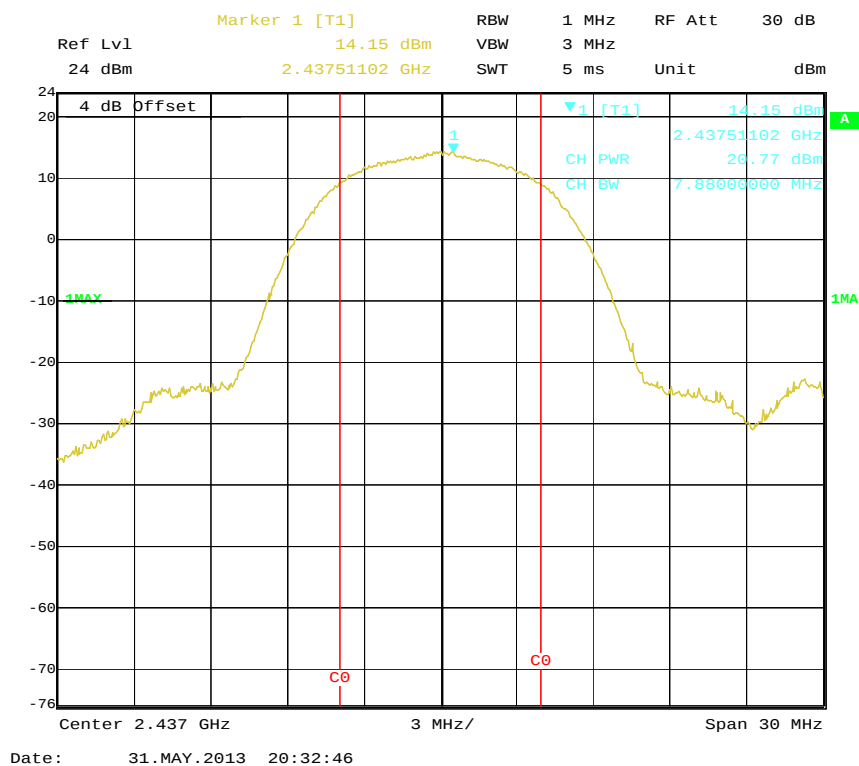
Environmental Conditions

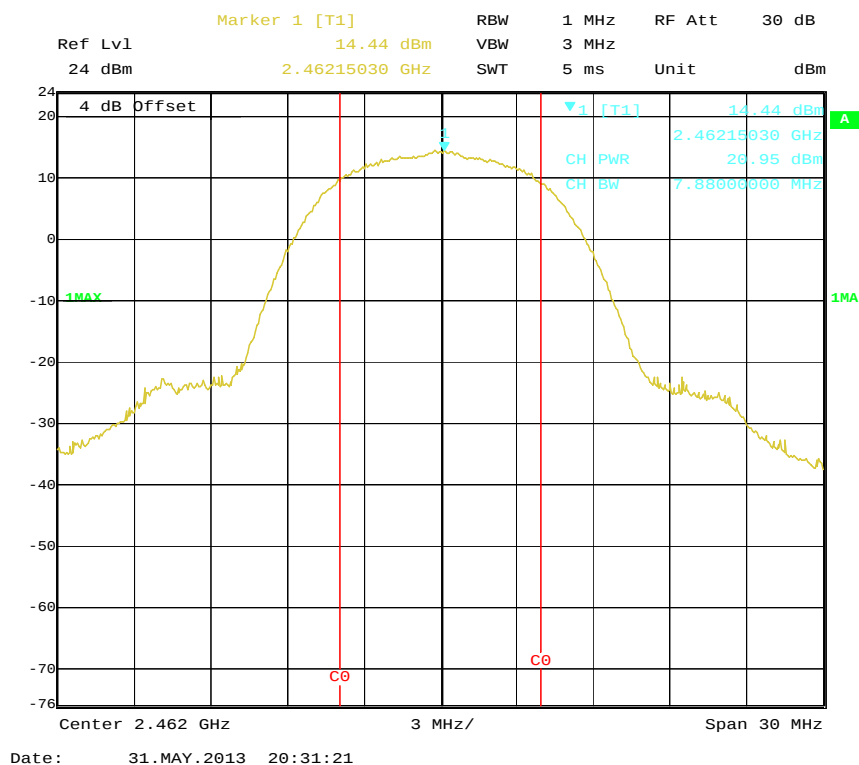
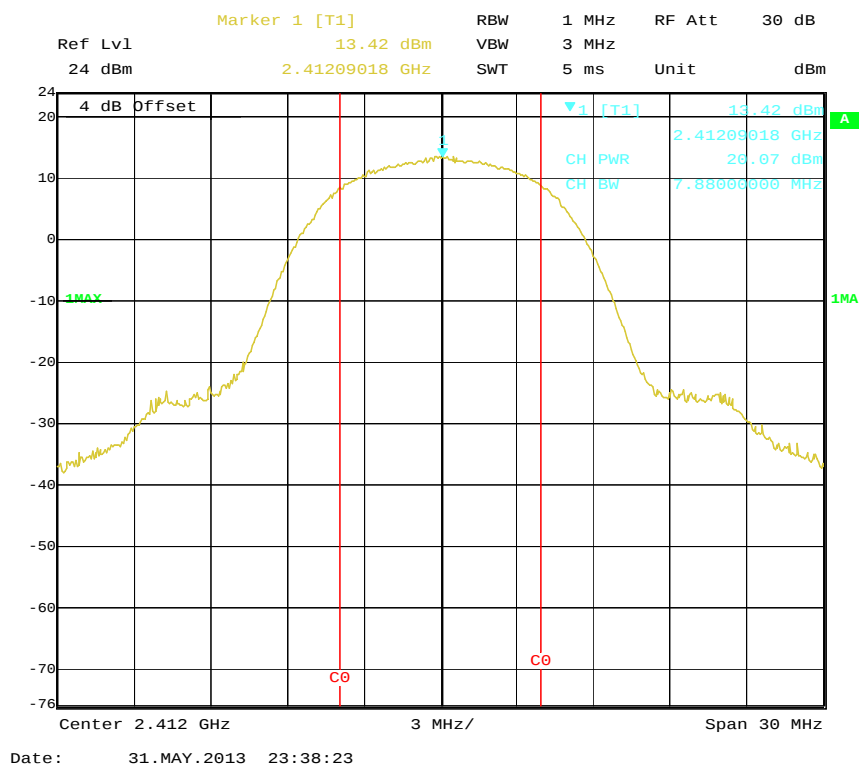
Temperature:	24~26 °C
Relative Humidity:	52~56 %
ATM Pressure:	100.1~101.2 kPa

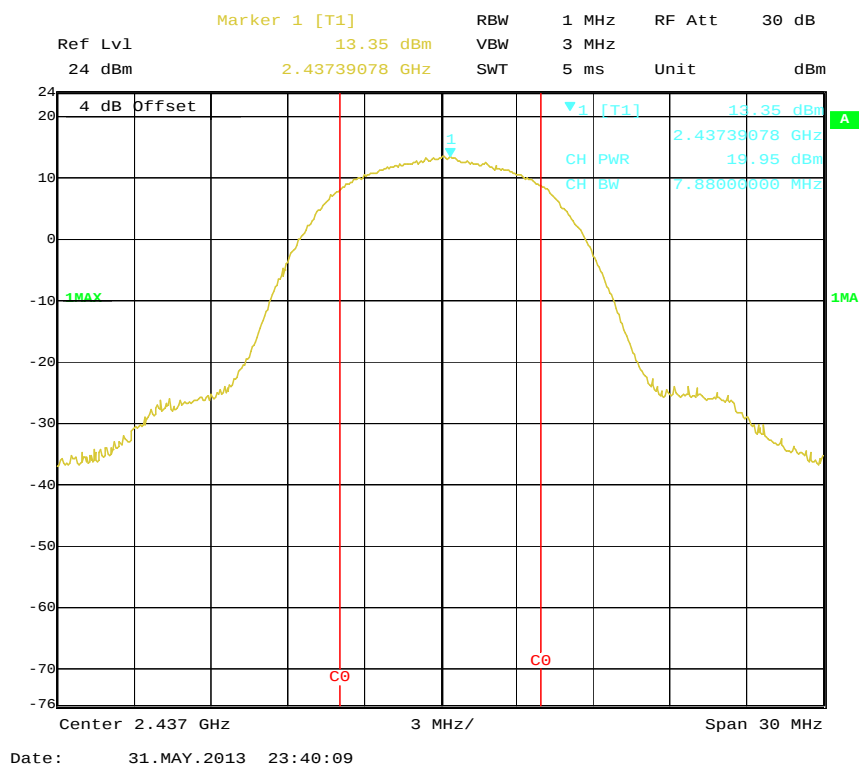
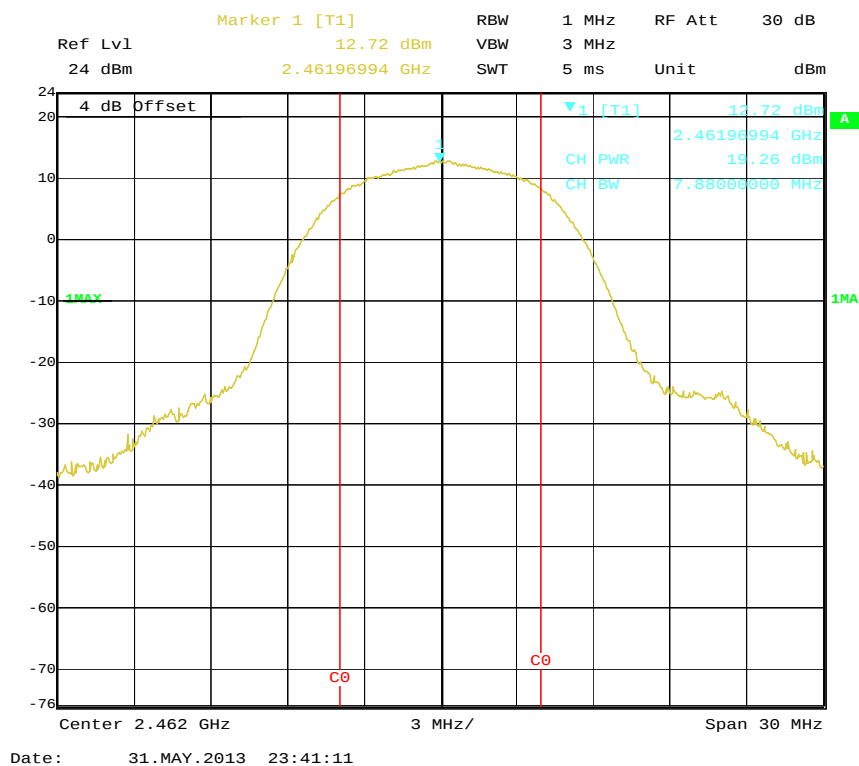
The testing was performed by Candy Li on 2013-05-31 and 2013-06-01.

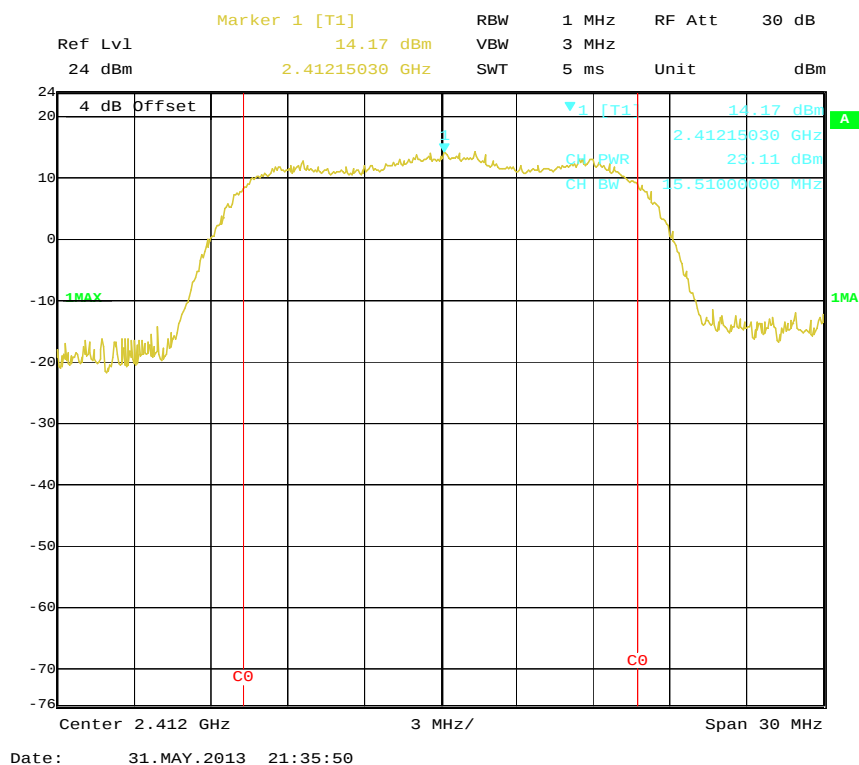
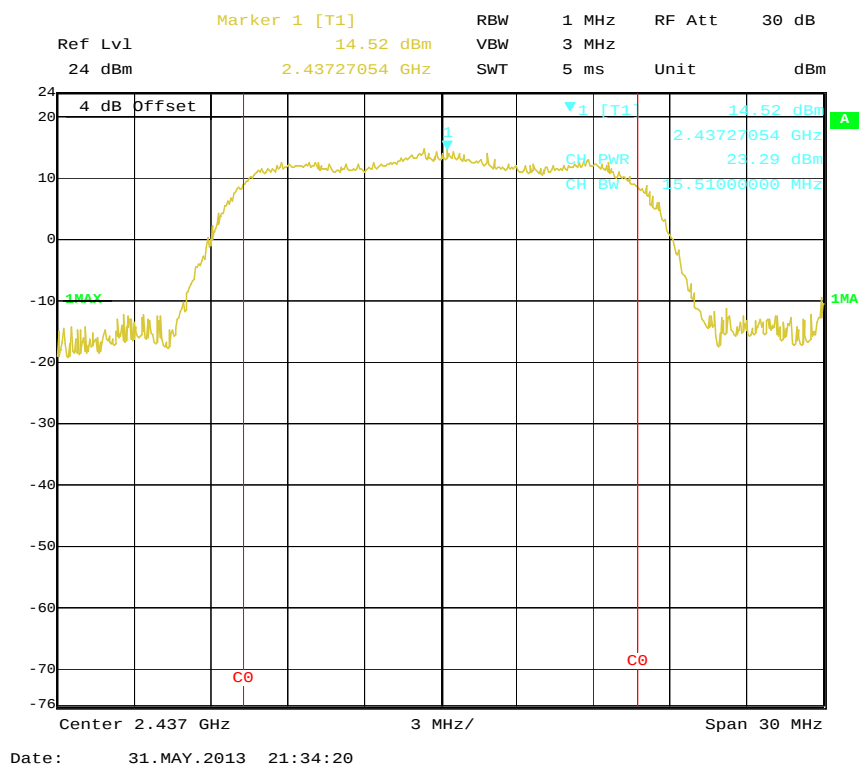
Test mode: Transmitting

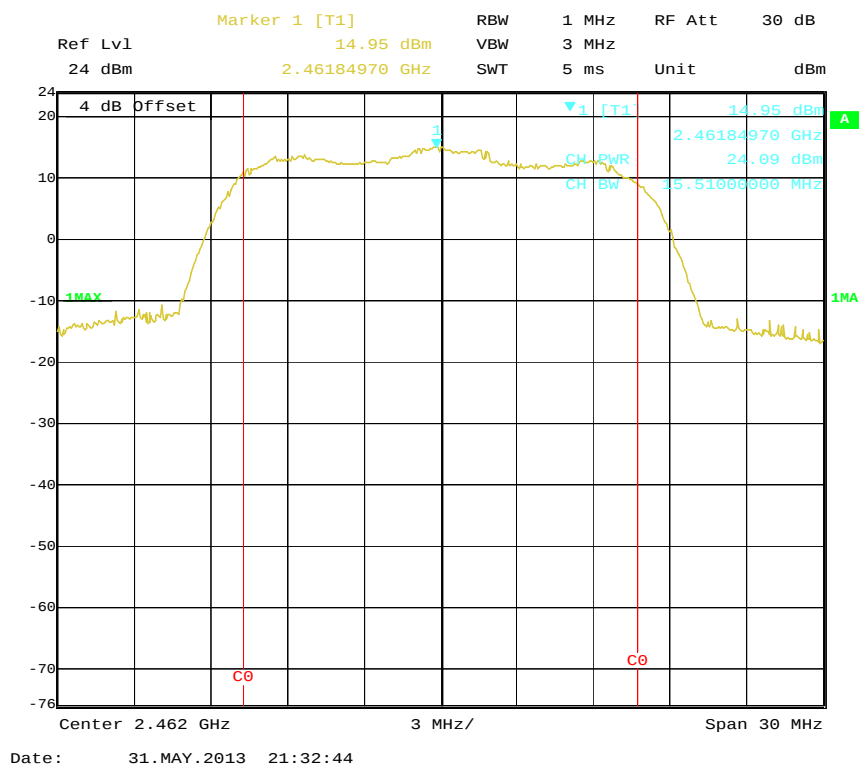
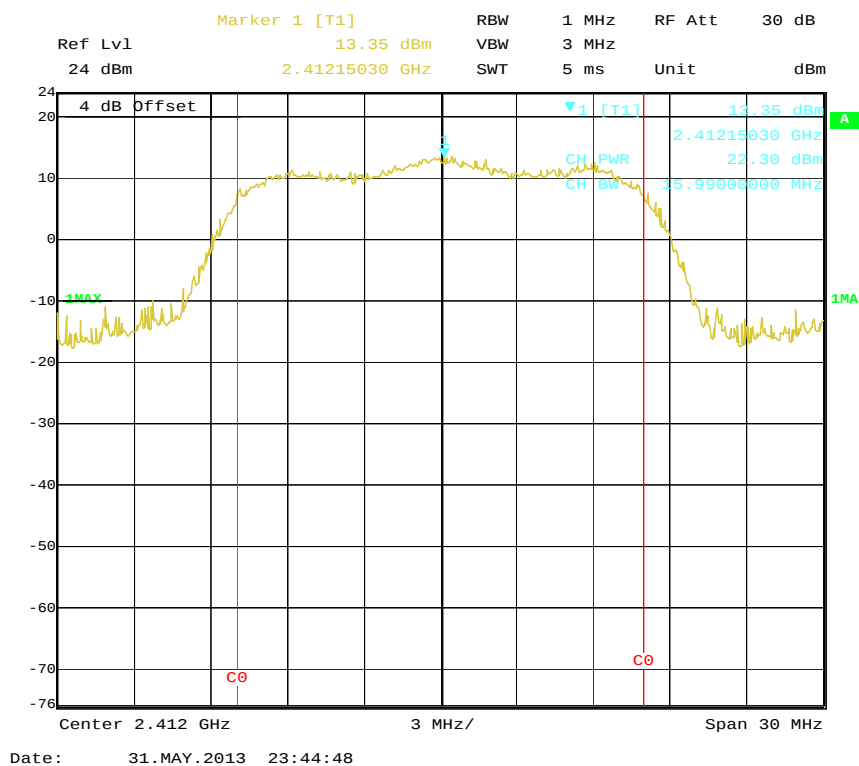
Channel	Frequency (MHz)	Conducted Output Power (dBm)			Limit (dBm)
		Antenna 0	Antenna 1	Antenna 0 +Antenna 1	
802.11b mode					
Low	2412	20.43	20.07	\	30
Middle	2437	20.77	19.95	\	30
High	2462	20.95	19.26	\	30
802.11g mode					
Low	2412	23.11	22.30	\	30
Middle	2437	23.29	21.99	\	30
High	2462	24.09	22.07	\	30
802.11n-HT20 mode					
Low	2412	21.06	20.49	23.79	30
Middle	2437	21.48	20.03	23.83	30
High	2462	21.54	19.85	23.79	30
802.11n-HT40 mode					
Low	2422	16.08	16.33	19.22	30
Middle	2437	16.27	16.04	19.17	30
High	2452	16.52	16.07	19.31	30

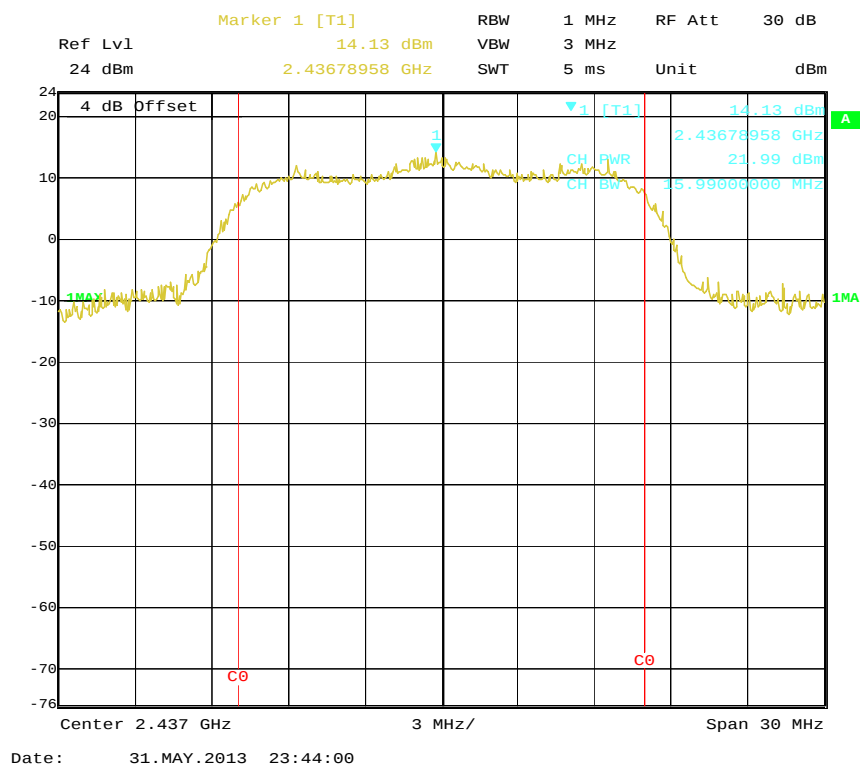
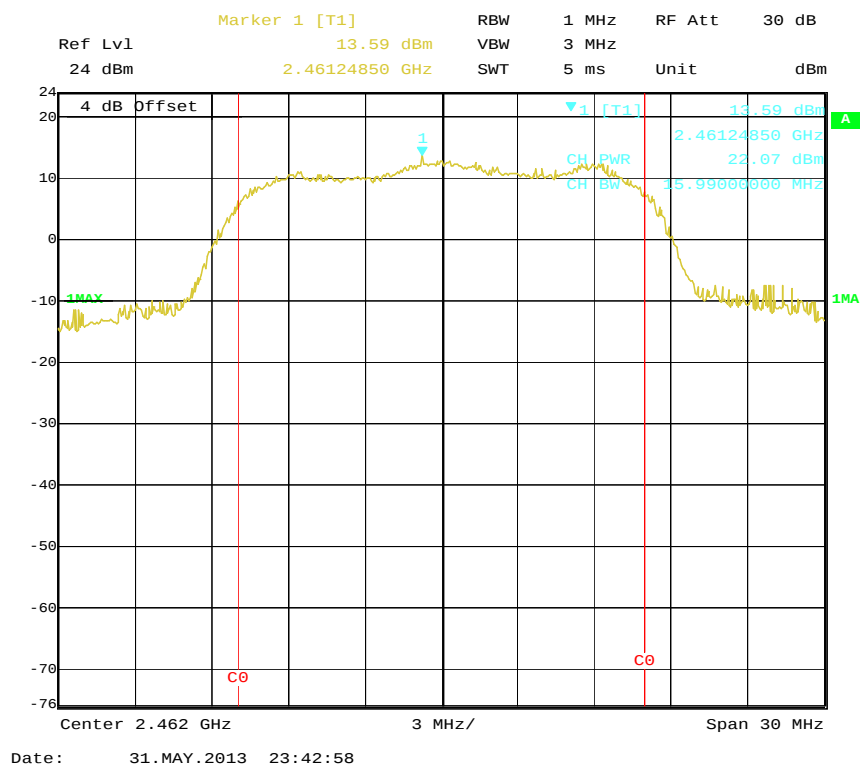
802.11b RF Output Power, Low Channel, Antenna 0**802.11b RF Output Power, Middle Channel, Antenna 0**

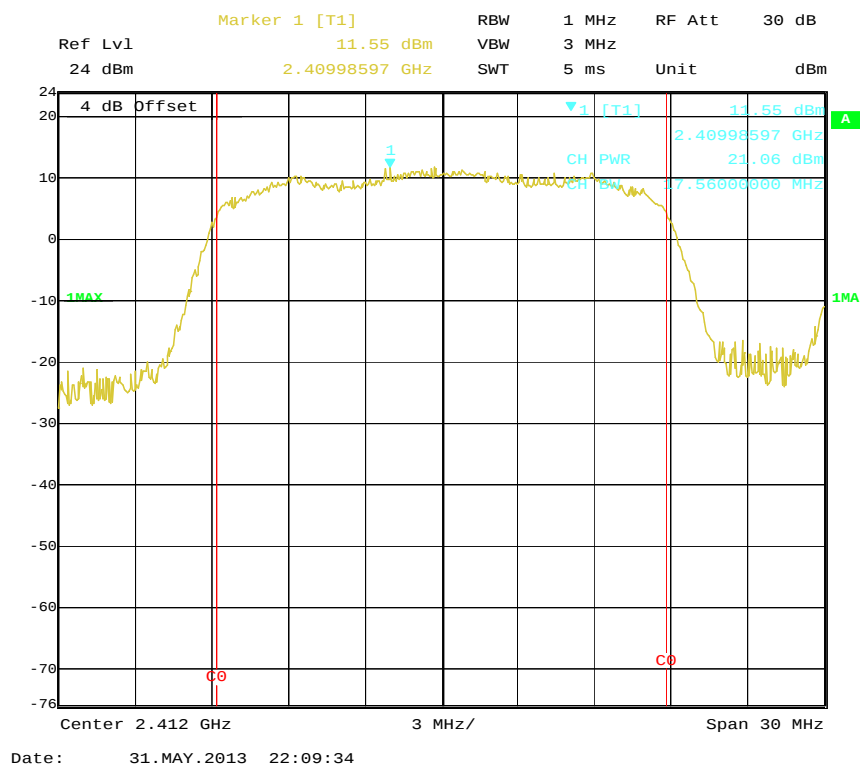
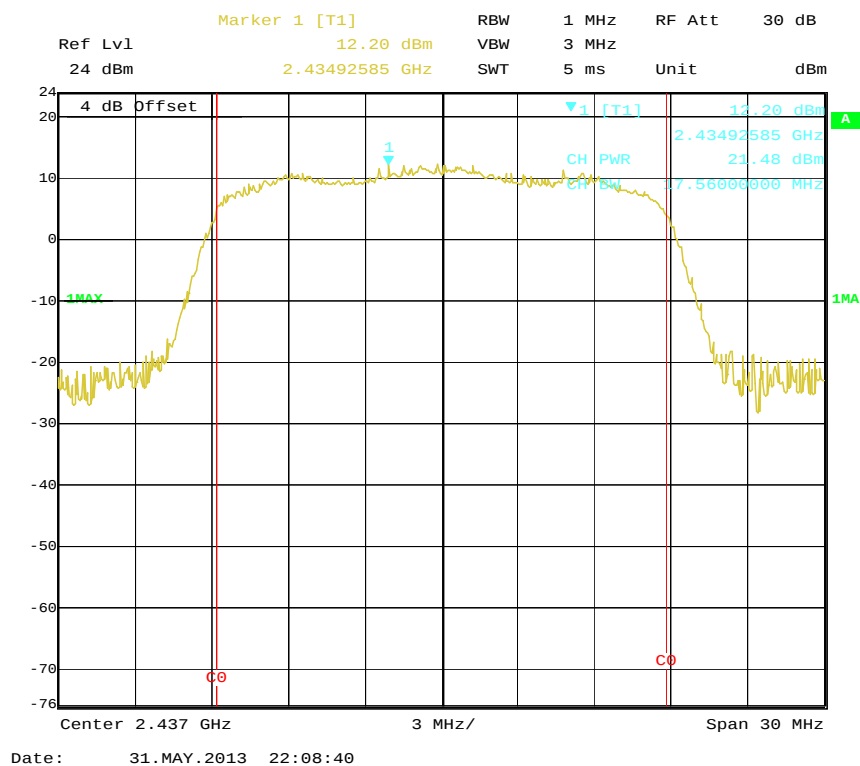
802.11b RF Output Power, High Channel, Antenna 0**802.11b RF Output Power, Low Channel, Antenna 1**

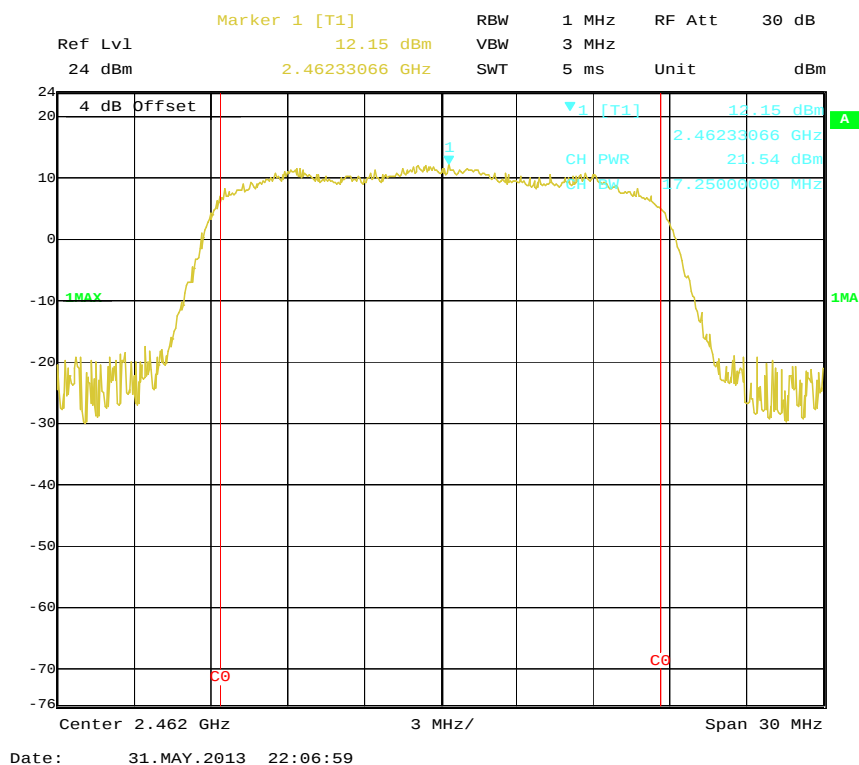
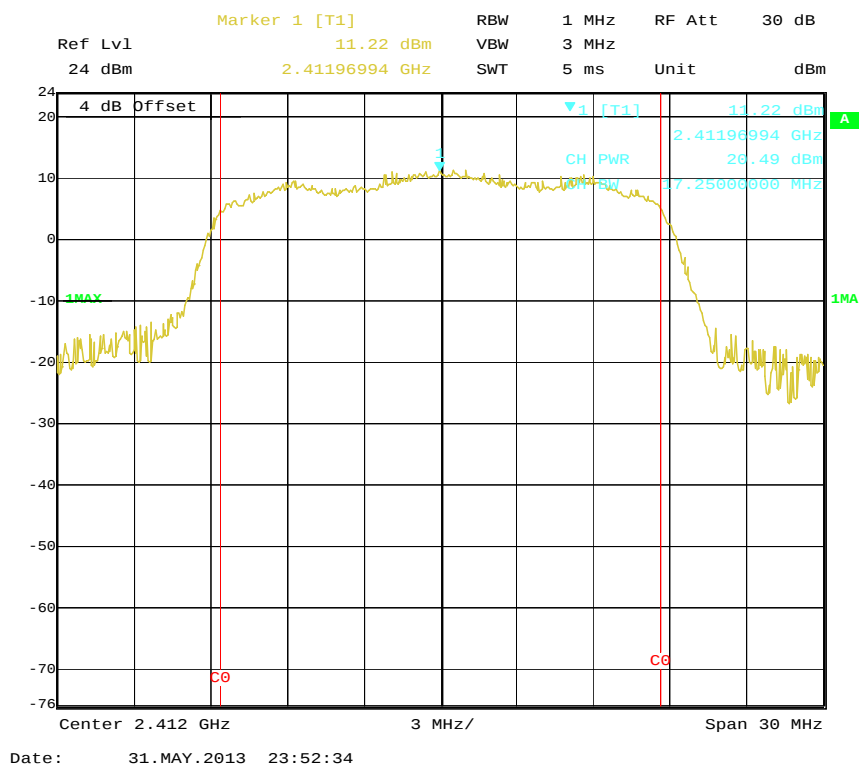
802.11b RF Output Power, Middle Channel, Antenna 1**802.11b RF Output Power, High Channel, Antenna 1**

802.11g RF Output Power, Low Channel, Antenna 0**802.11g RF Output Power, Middle Channel, Antenna 0**

802.11g RF Output Power, High Channel, Antenna 0**802.11g RF Output Power, Low Channel, Antenna 1**

802.11g RF Output Power, Middle Channel, Antenna 1**802.11g RF Output Power, High Channel, Antenna 1**

802.11n-HT20 RF Output Power, Low Channel, Antenna 0**802.11n-HT20 RF Output Power, Middle Channel, Antenna 0**

802.11n-HT20 RF Output Power, High Channel, Antenna 0**802.11n-HT20 RF Output Power, Low Channel, Antenna 1**

Marker 1 [T1] RBW 1 MHz RF Att 30 dB
 Ref Lvl 24 dBm 11.12 dBm VBW 3 MHz
 2.43709018 GHz SWT 5 ms Unit dBm

4 dB Offset

▼ 1 [T1] 11.12 dBm
 CH PWR 26.03 dBm
 2.43709018 GHz
 37.25000000 MHz

-1MAX

CO

Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 31.MAY.2013 23:51:23

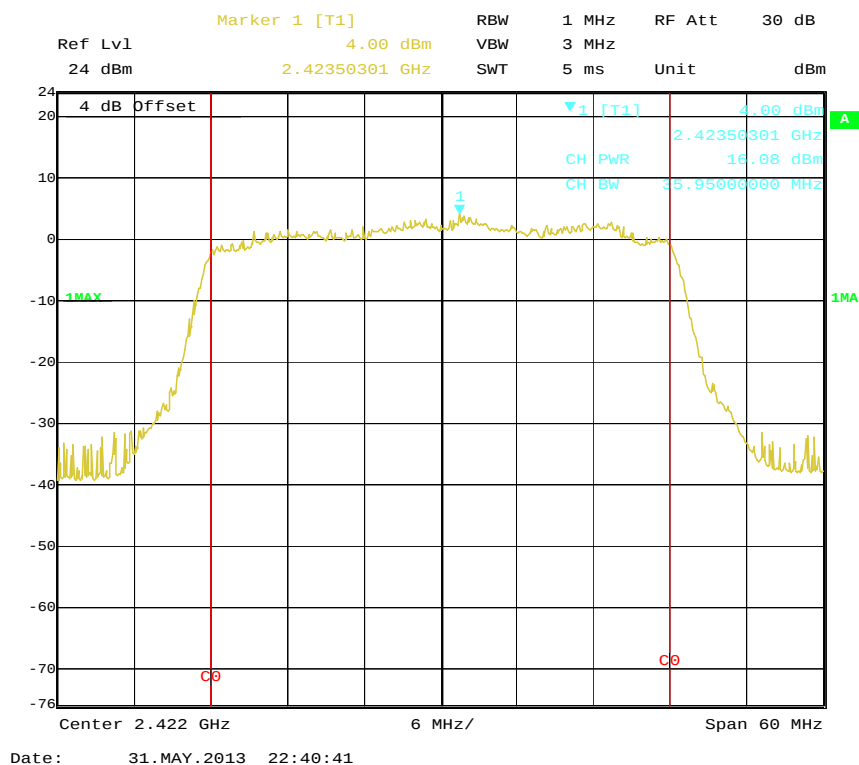
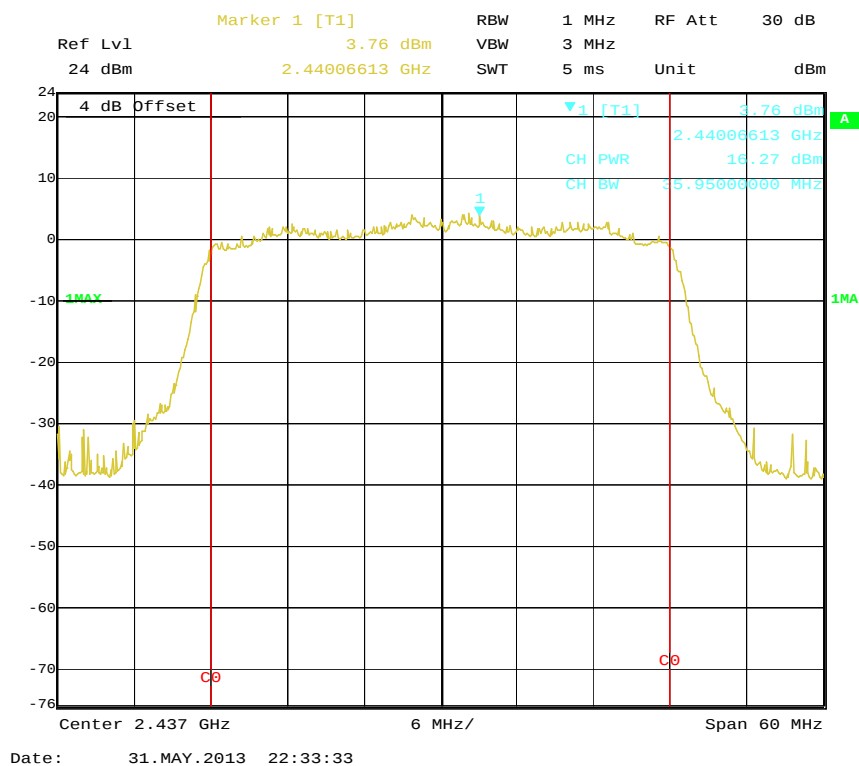
Ref Lvl 24 dBm
 Marker 1 [T1] 10.94 dBm
 RBW 1 MHz
 VBW 3 MHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm

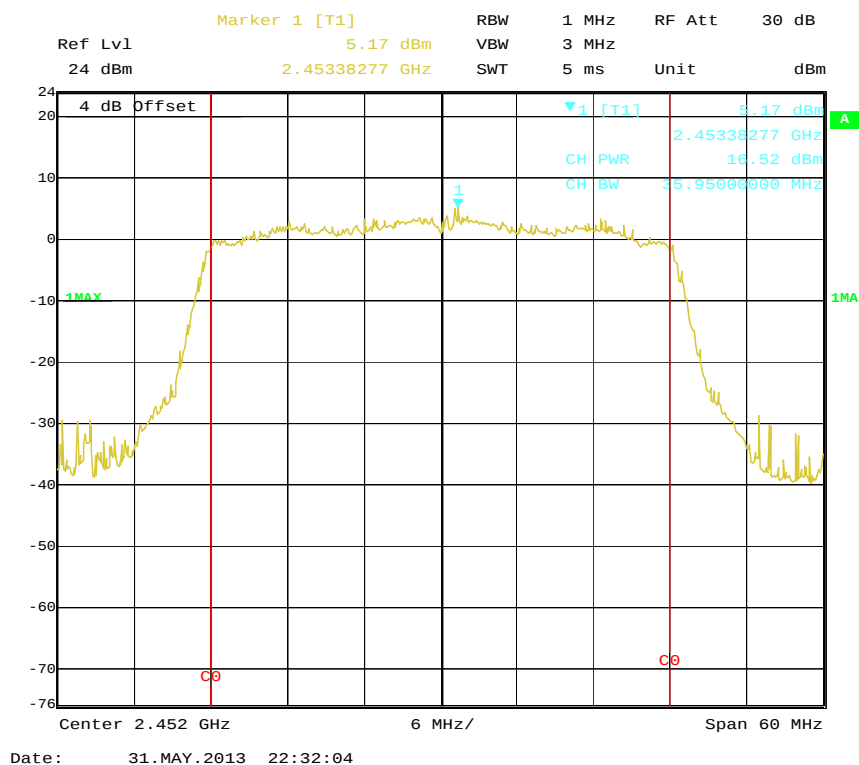
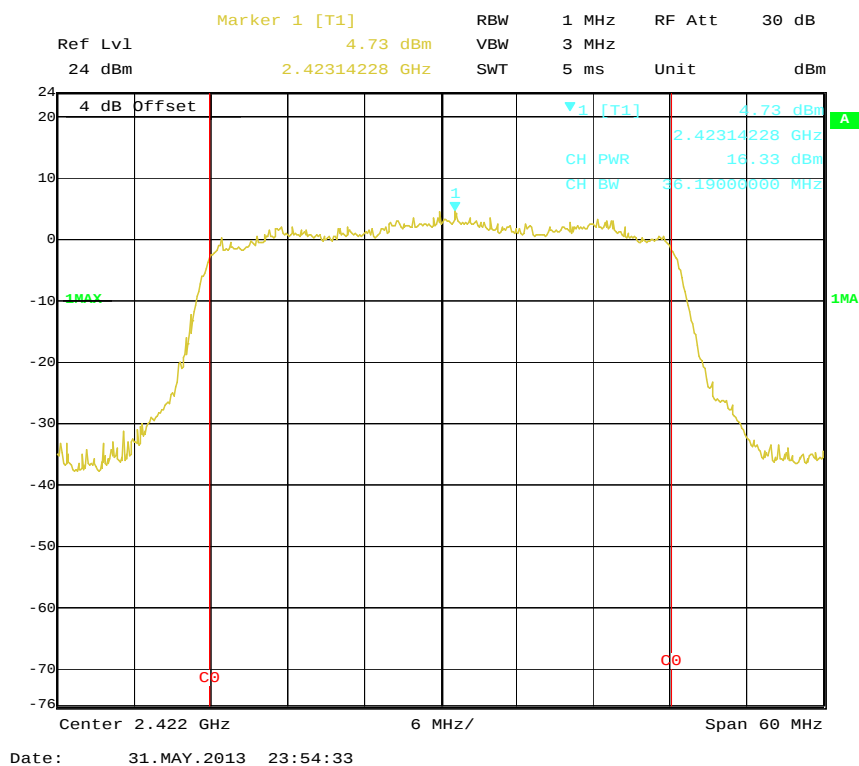
4 dB Offset

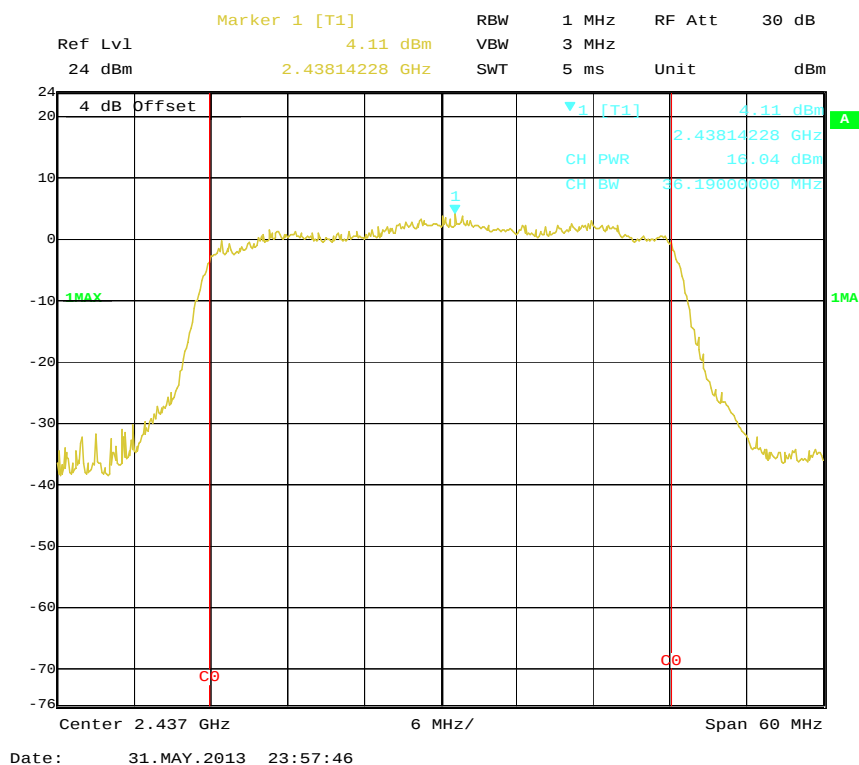
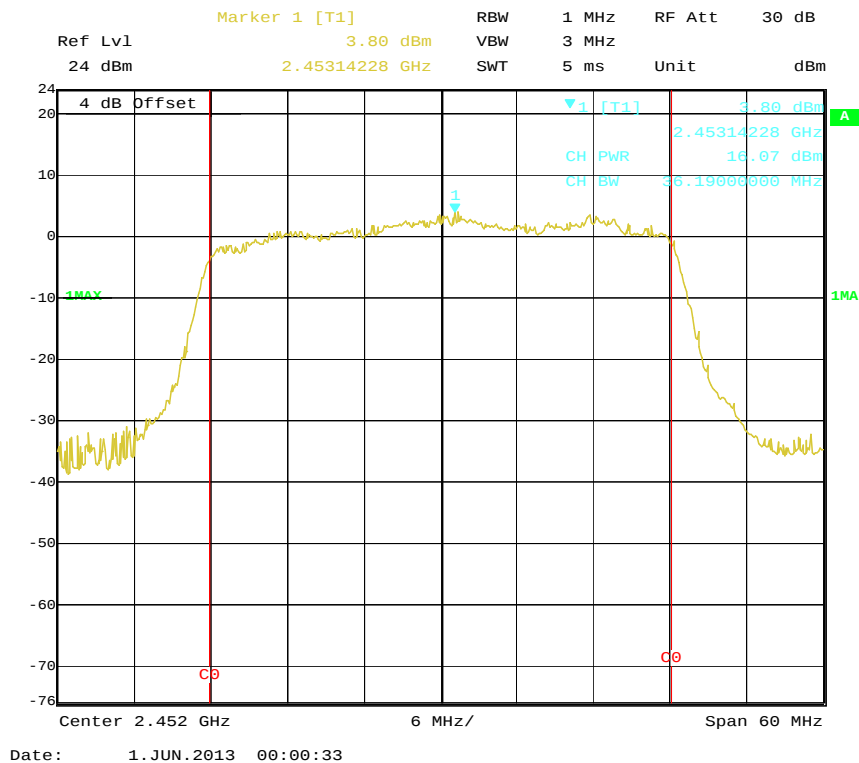
CH PWR 1 [T1] 10.94 dBm
 2.46227054 GHz
 19.85 dBm
 2.46227054 GHz

Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 31.MAY.2013 23:50:16

802.11n-HT40 RF Output Power, Low Channel, Antenna 0**802.11n-HT40 RF Output Power, Middle Channel, Antenna 0**

802.11n-HT40 RF Output Power, High Channel, Antenna 0**802.11n-HT40 RF Output Power, Low Channel, Antenna 1**

802.11n-HT40 RF Output Power, Middle Channel, Antenna 1**802.11n-HT40 RF Output Power, High Channel, Antenna 1**

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	52~56 %
ATM Pressure:	100.1~101.2 kPa

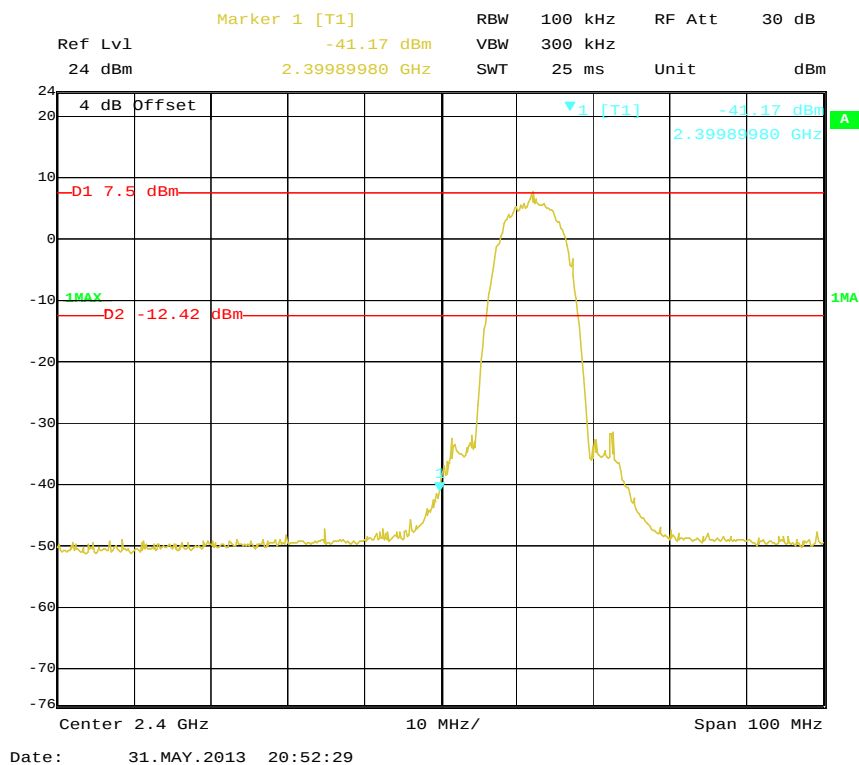
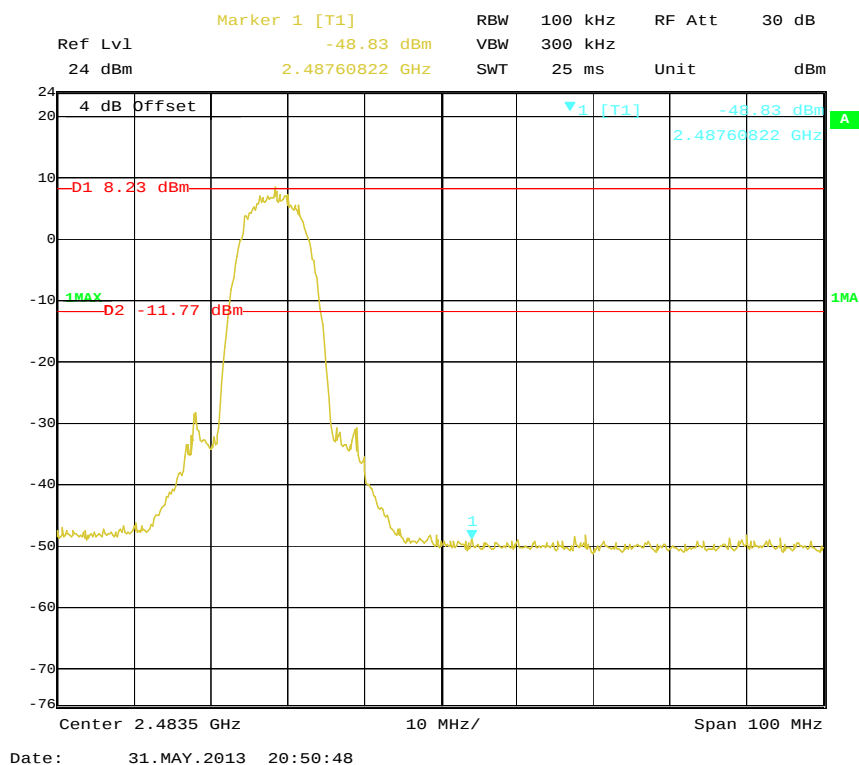
The testing was performed by Candy Li on 2013-05-31 and 2013-06-01.

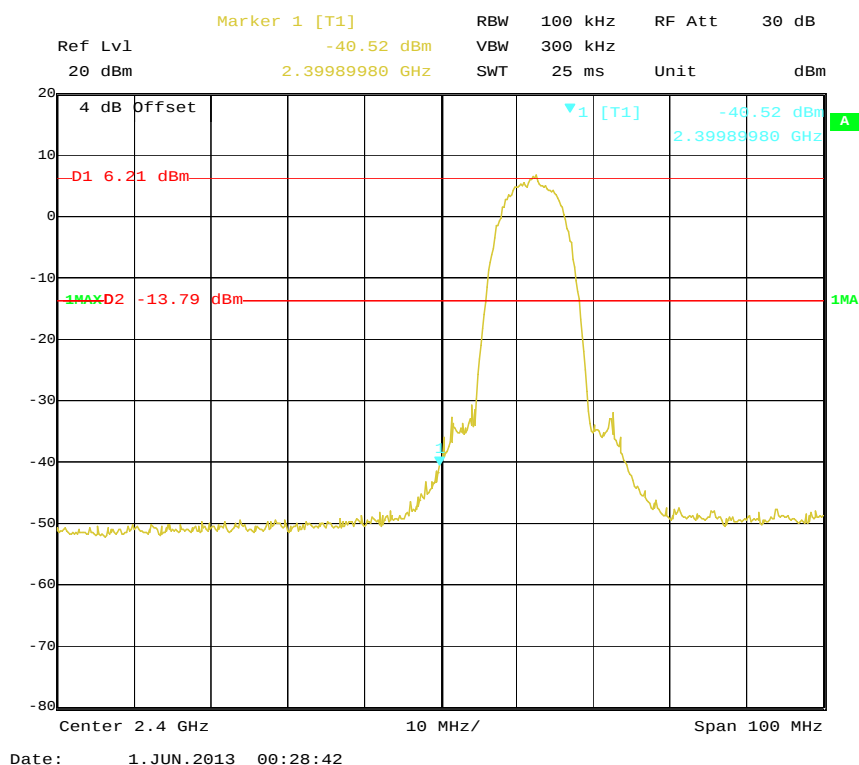
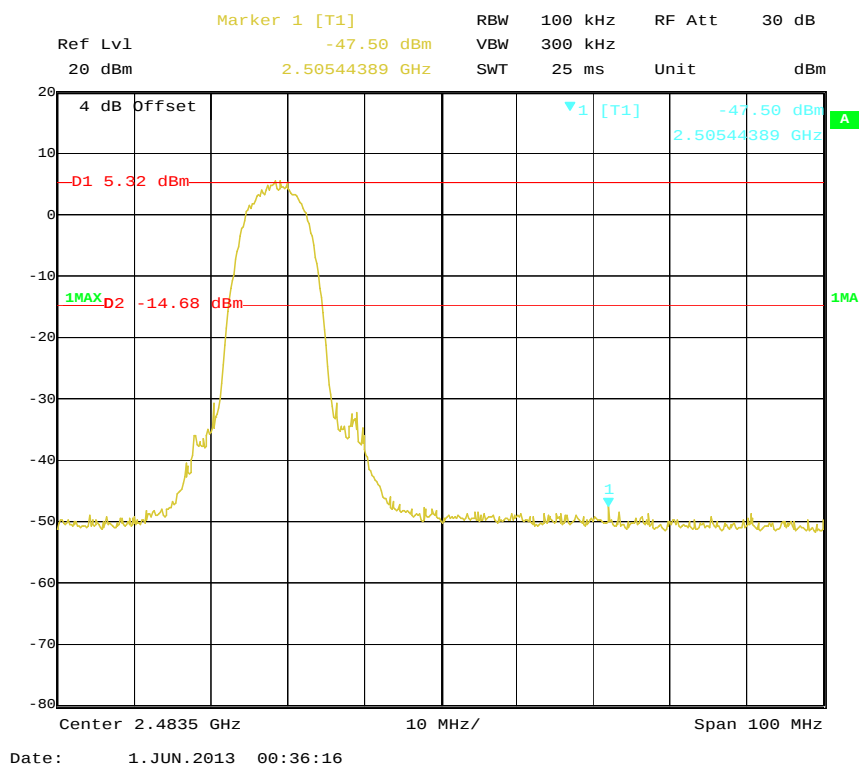
Test Result: Compliance

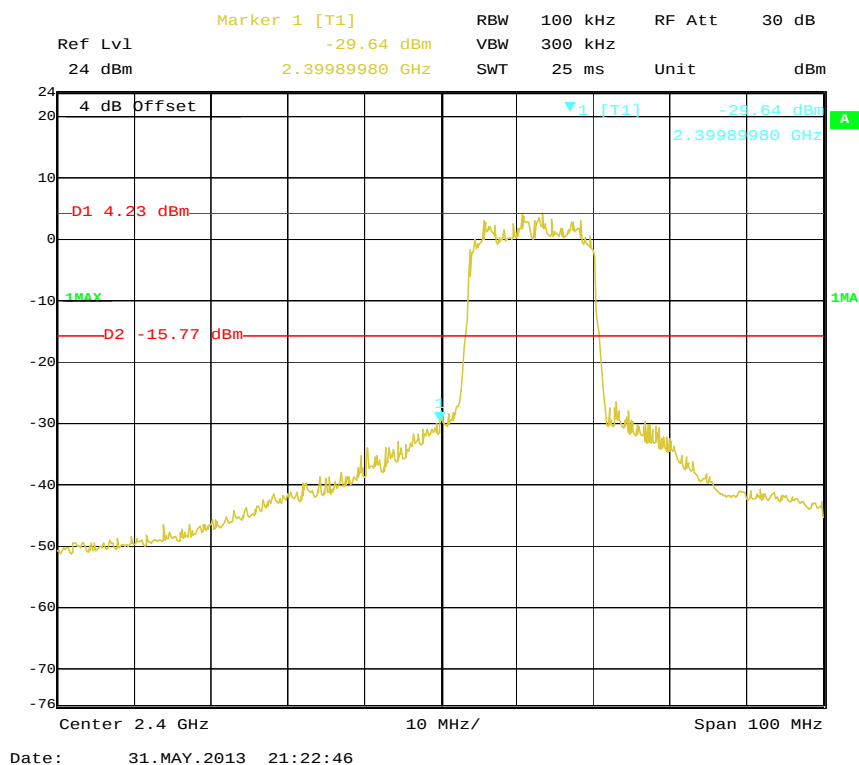
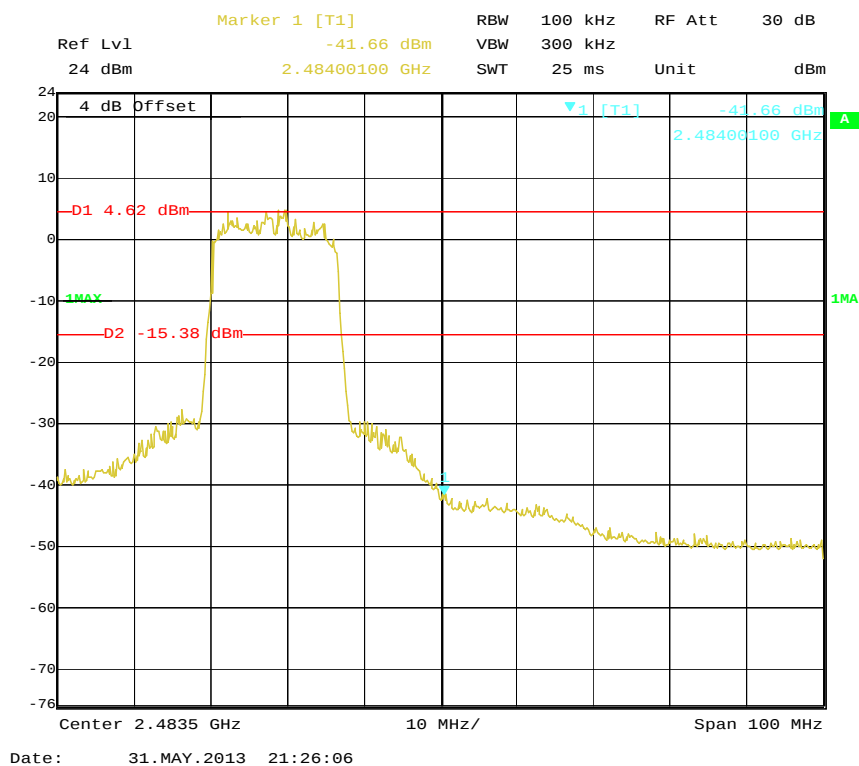
Please refer to following table and plots:

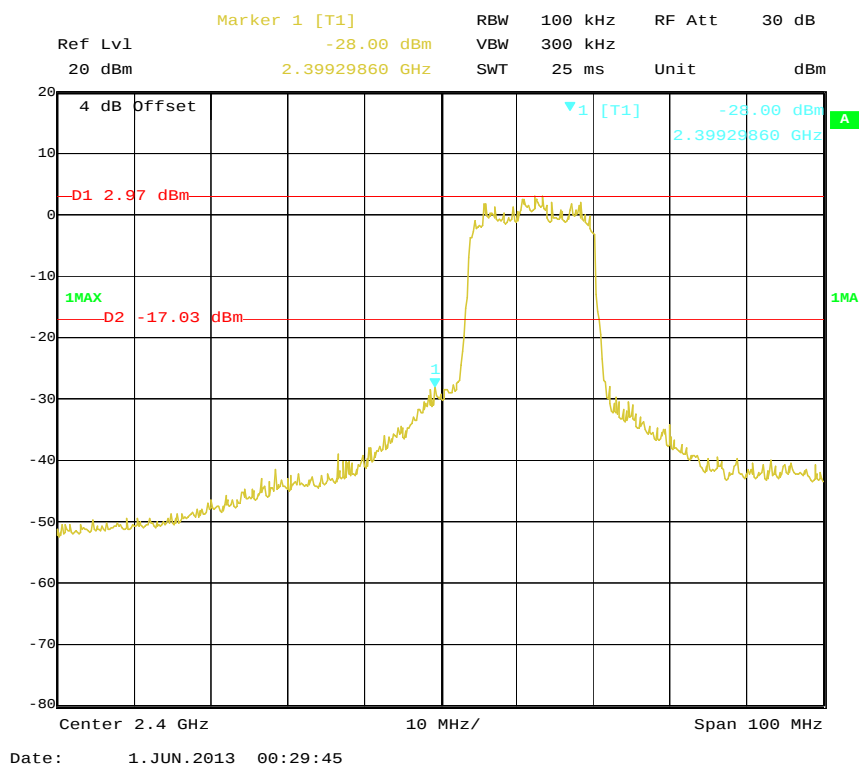
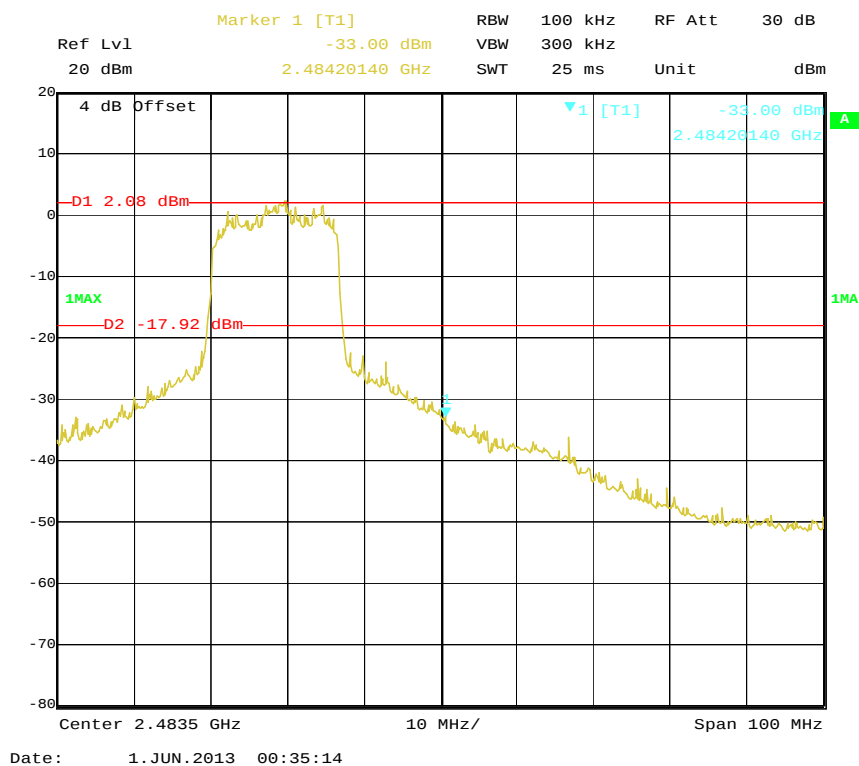
Band edge	Antenna Port	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)	Result
802.11b mode				
Left side	0	48.67	20	Pass
Right side	0	55.06		
Left side	1	46.73	20	Pass
Right side	1	52.82		
802.11g mode				
Left side	0	33.87	20	Pass
Right side	0	46.28		
Left side	1	30.97	20	Pass
Right side	1	35.08		
802.11n-HT20 mode				
Left side	0	38.06	20	Pass
Right side	0	40.22		
Left side	1	33.68	20	Pass
Right side	1	36.15		
802.11n-HT40 mode				
Left side	0	32.39	20	Pass
Right side	0	40.93		
Left side	1	32.70	20	Pass
Right side	1	37.80		

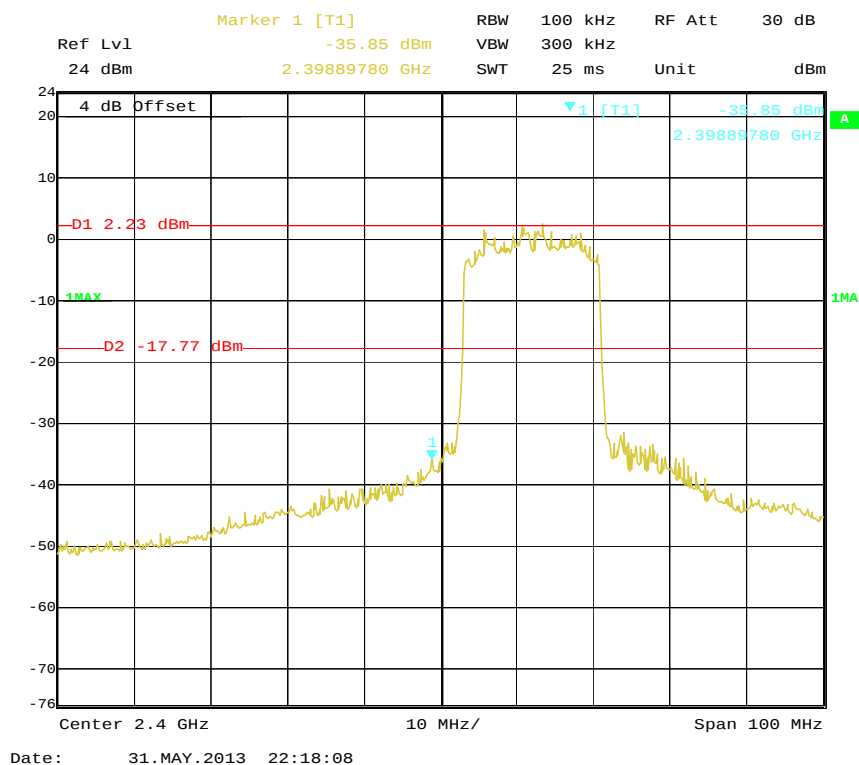
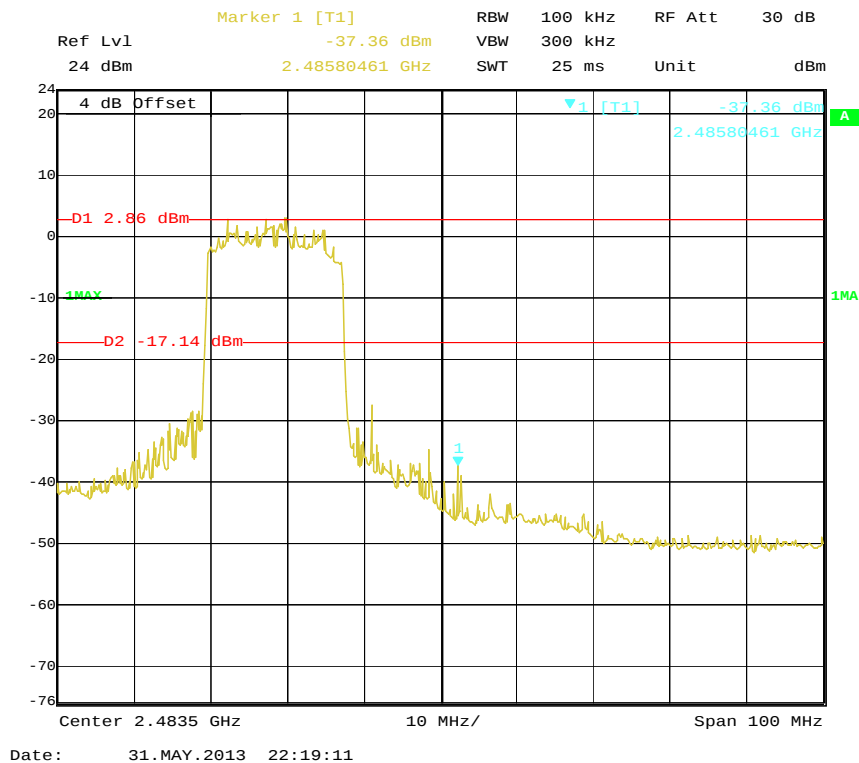
Band edge	Antenna Port	Spurious Emission Max (dBm)	Spurious Emission (Sum) (dBm)	PSD (dBm/100kHz)	Delta Value (dBc)	Delta Limit (dBc)
802.11n-HT20 mode						
Left side	0	-35.85	-30.54	5.04	35.58	20
Left side	1	-32.05				
Right side	0	-37.36	-33.23	4.92	38.15	20
Right side	1	-35.36				
802.11n-HT40 mode						
Left side	0	-37.95	-34.80	-2.32	32.48	20
Left side	1	-37.67				
Right side	0	-45.65	-41.51	-2.02	39.49	20
Right side	1	-43.63				

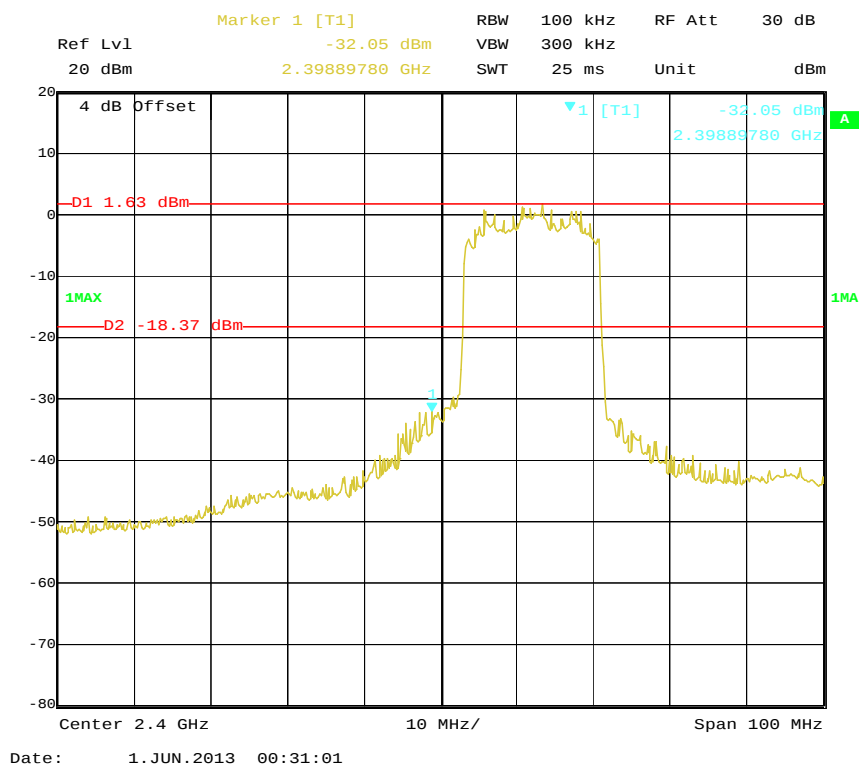
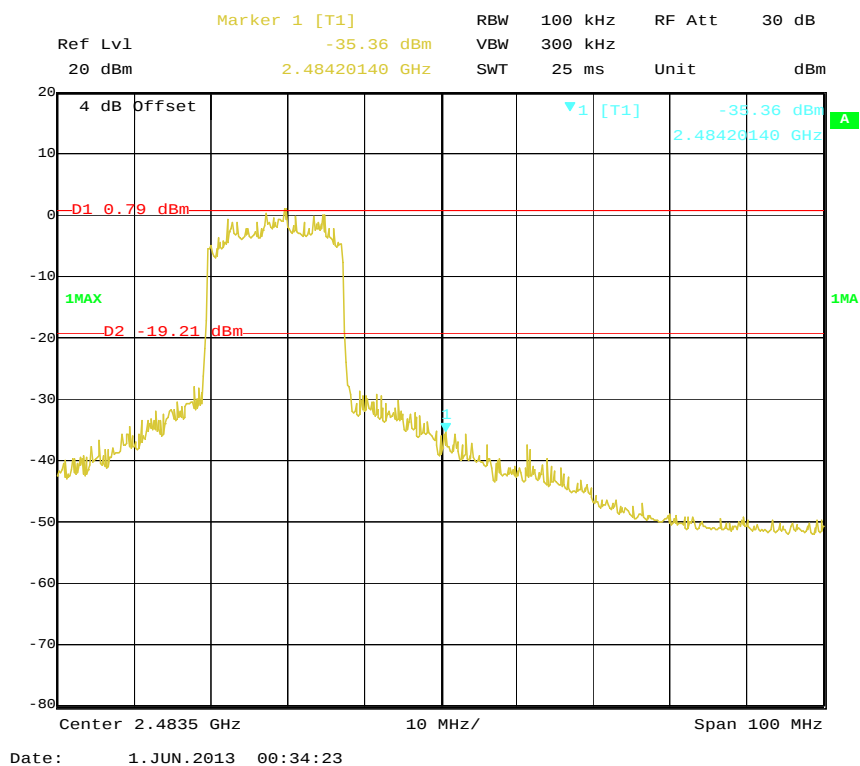
802.11b: Band Edge, Left Side, Antenna 0**802.11b: Band Edge, Right Side, Antenna 0**

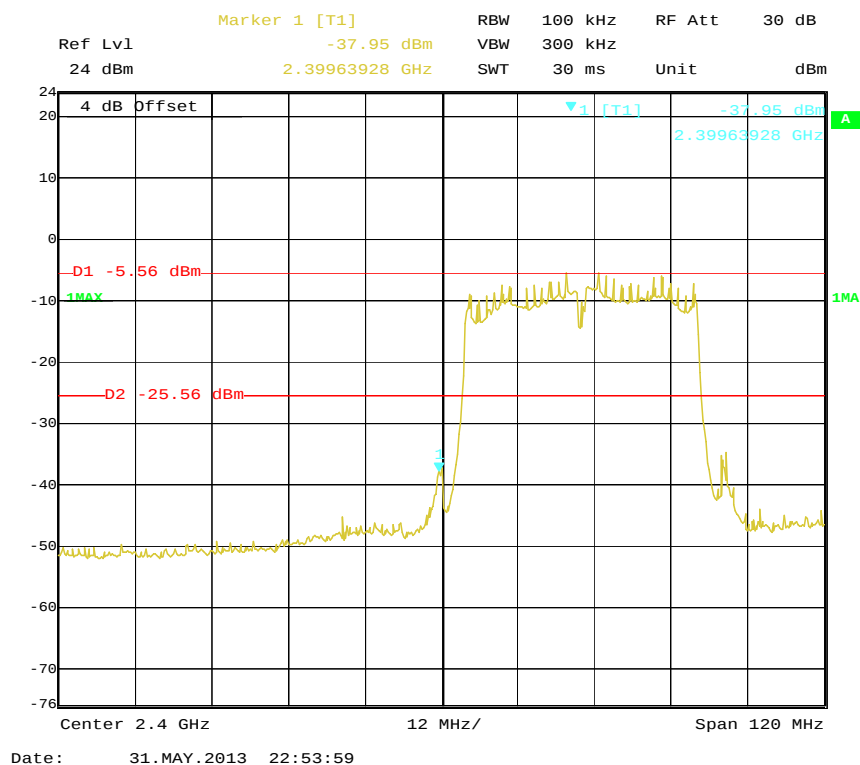
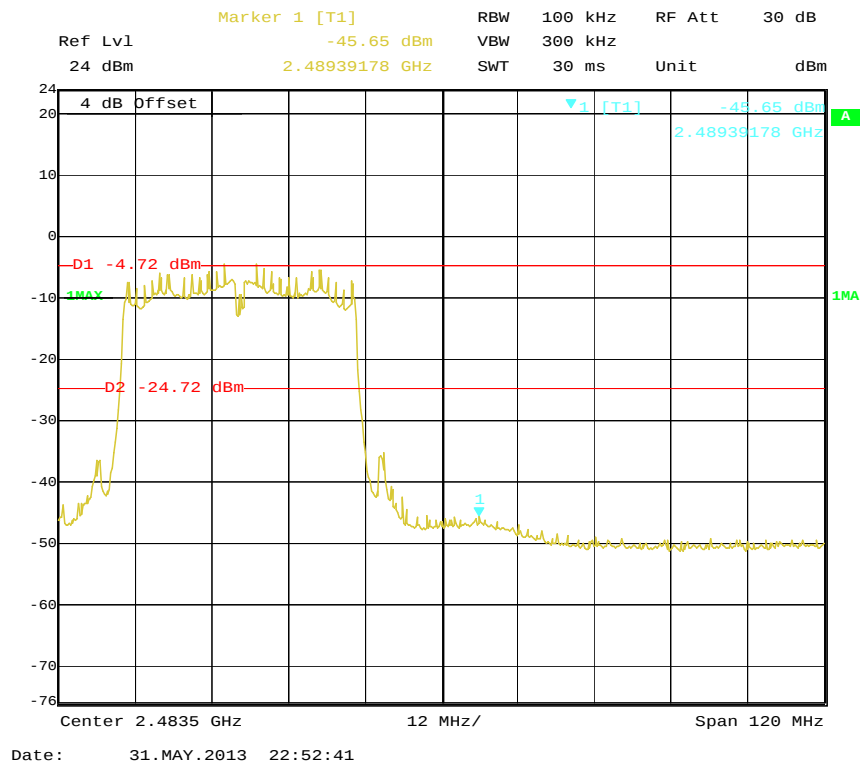
802.11b: Band Edge, Left Side, Antenna 1**802.11b: Band Edge, Right Side, Antenna 1**

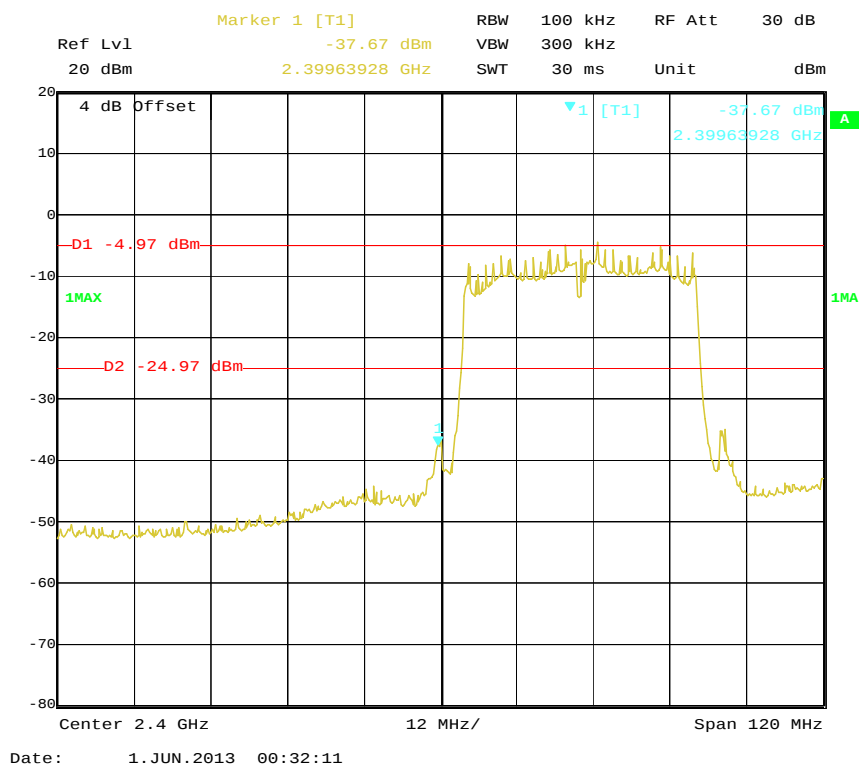
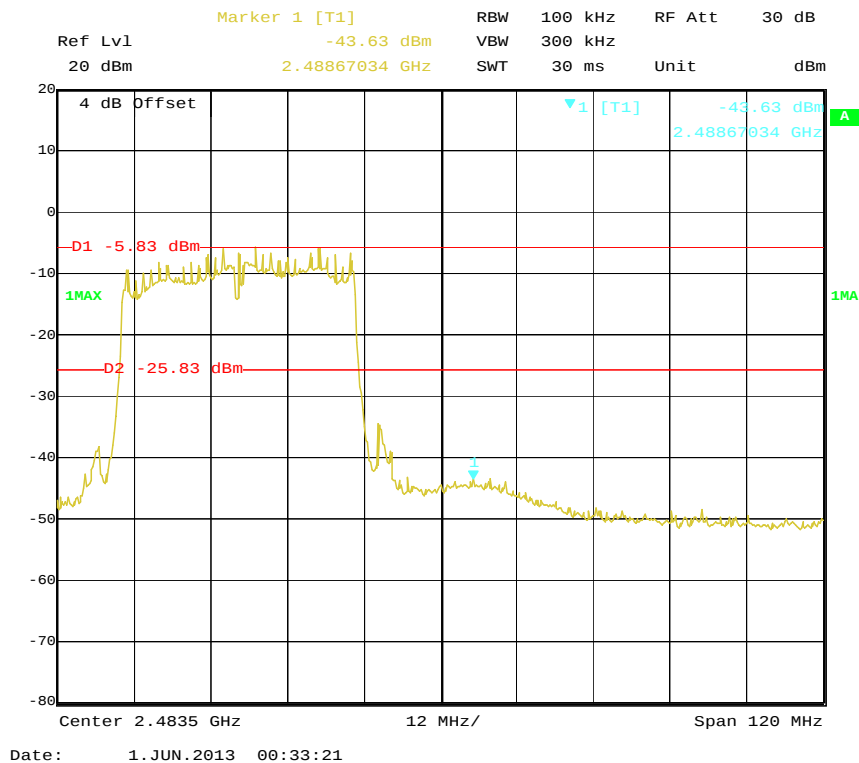
802.11g: Band Edge, Left Side, Antenna 0**802.11g: Band Edge, Right Side, Antenna 0**

802.11g: Band Edge, Left Side, Antenna 1**802.11g: Band Edge, Right Side, Antenna 1**

802.11n-HT20: Band Edge, Left Side, Antenna 0**802.11n-HT20: Band Edge, Right Side, Antenna 0**

802.11n-HT20: Band Edge, Left Side, Antenna 1**802.11n-HT20: Band Edge, Right Side, Antenna 1**

802.11n-HT40: Band Edge, Left Side, Antenna 0**802.11n-HT40: Band Edge, Right Side, Antenna 0**

802.11n-HT40: Band Edge, Left Side, Antenna 1**802.11n-HT40: Band Edge, Right Side, Antenna 1**

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

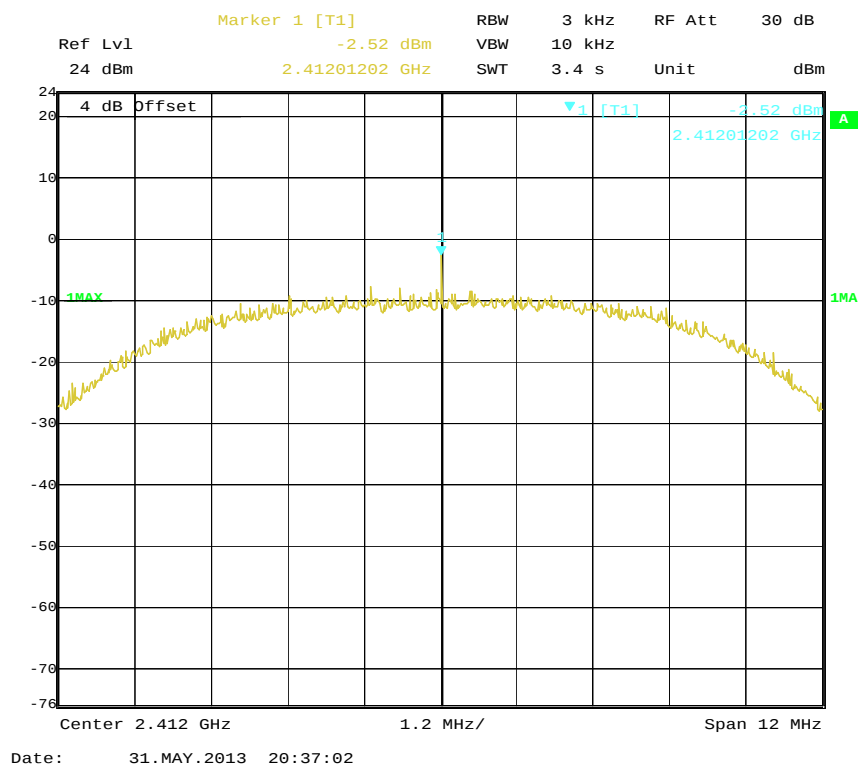
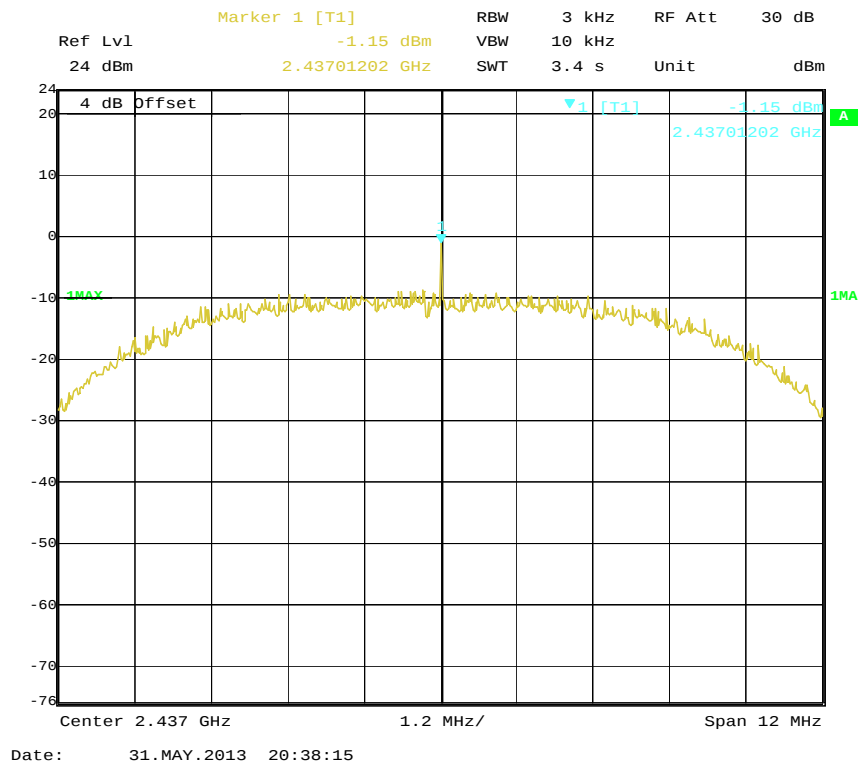
Temperature:	24~26 °C
Relative Humidity:	52~56 %
ATM Pressure:	100.1~101.2 kPa

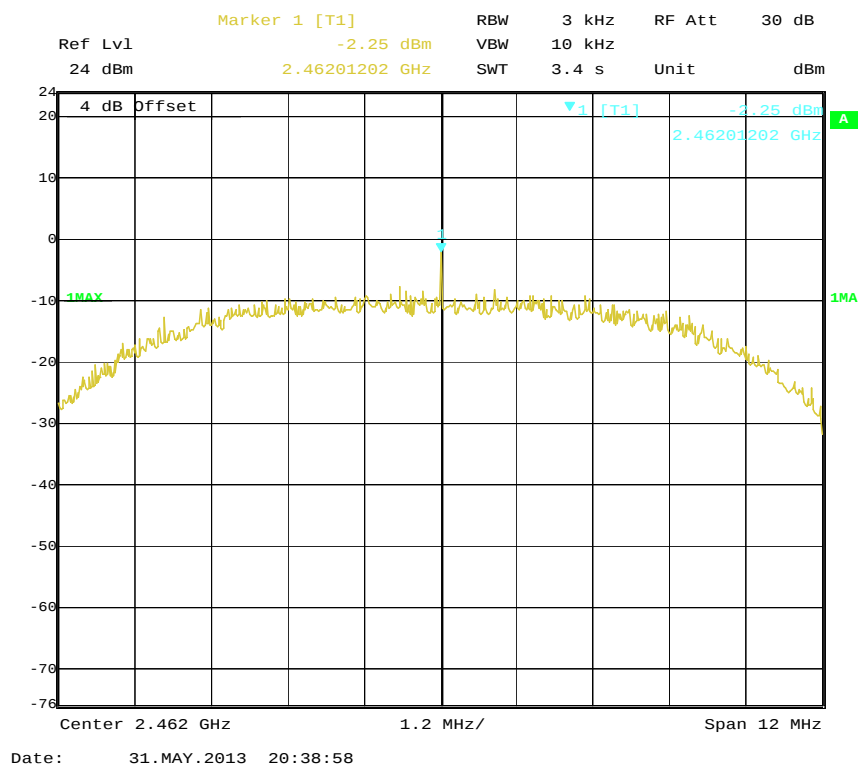
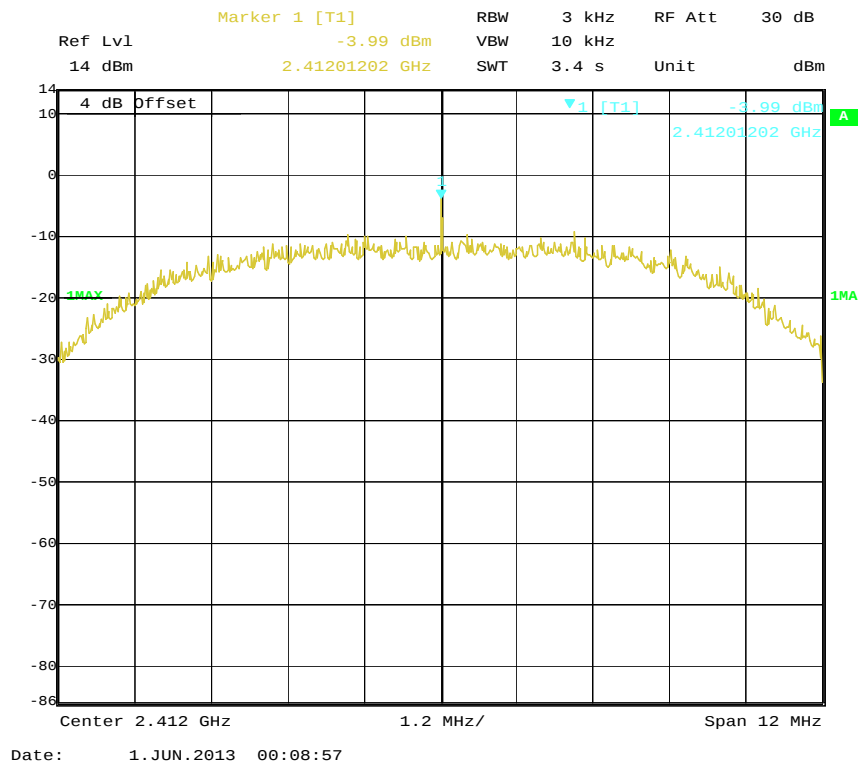
The testing was performed by Candy Li on 2013-05-31 and 2013-06-01.

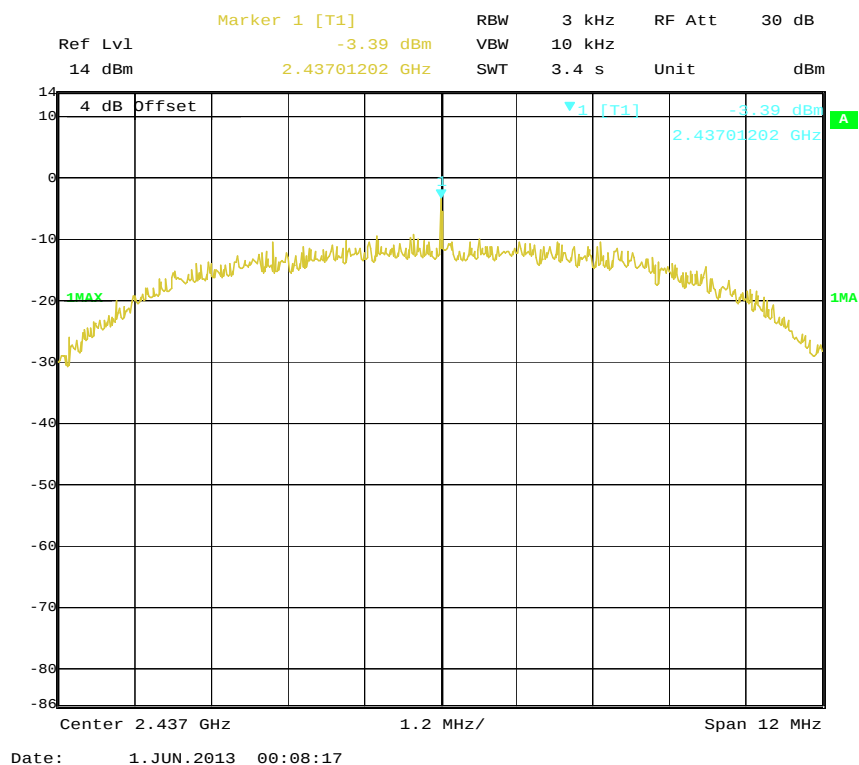
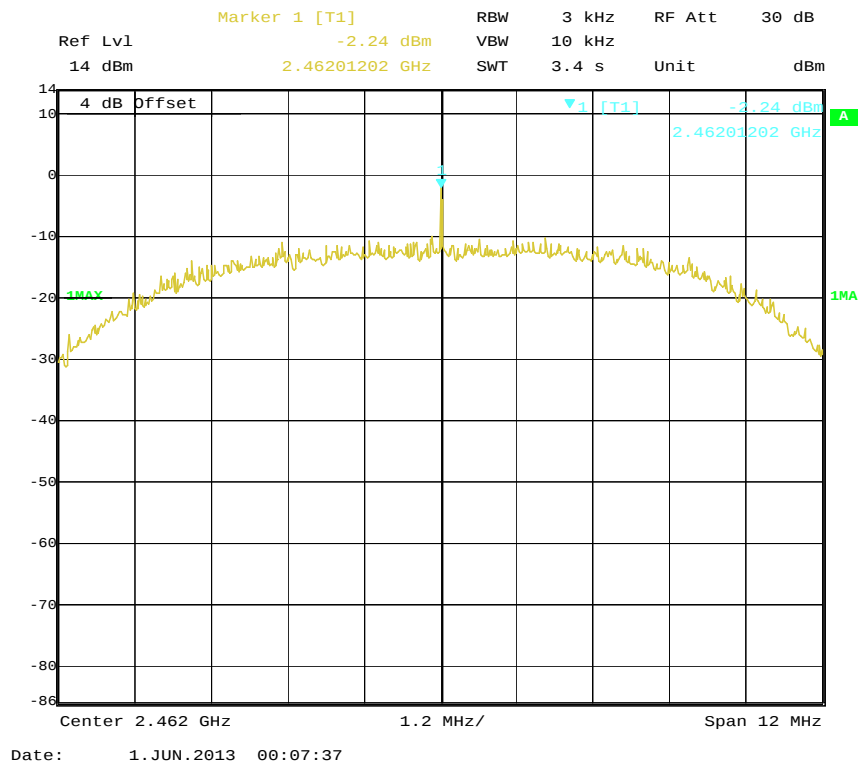
EUT operation mode: Transmitting

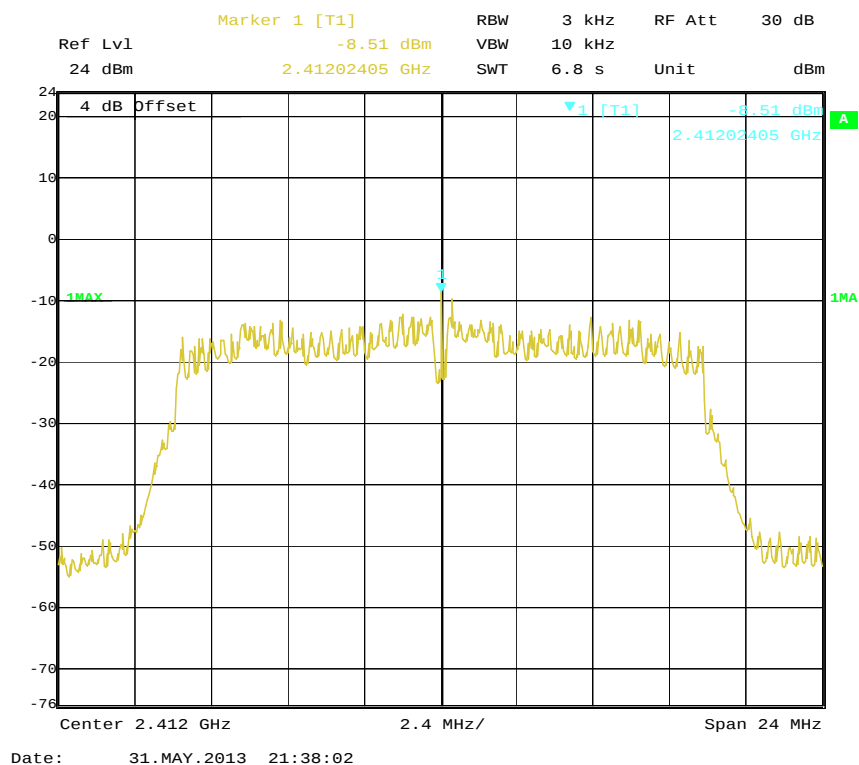
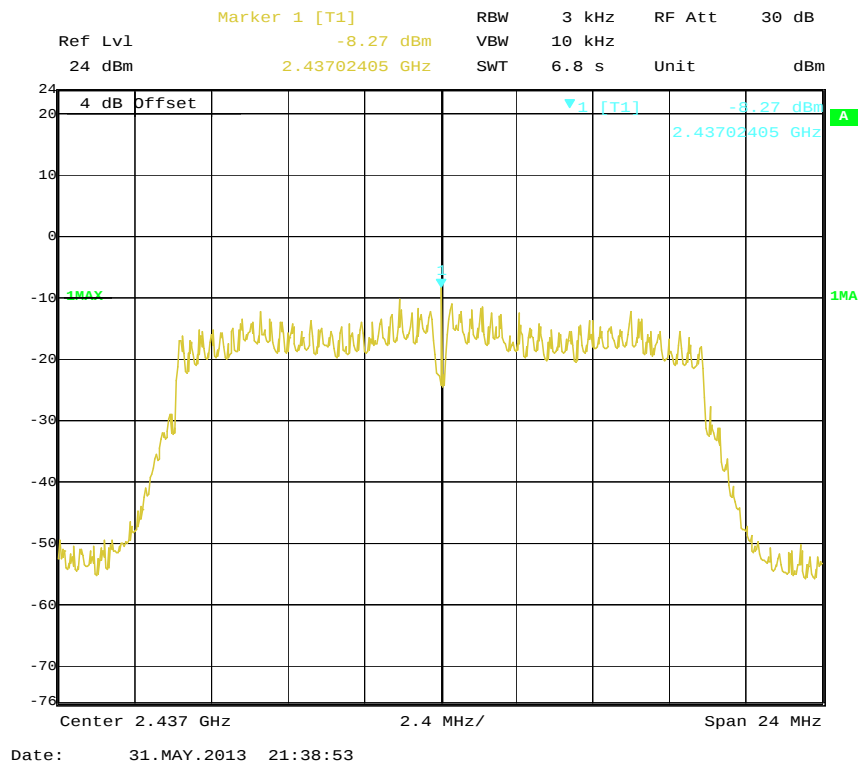
Test Result: Pass

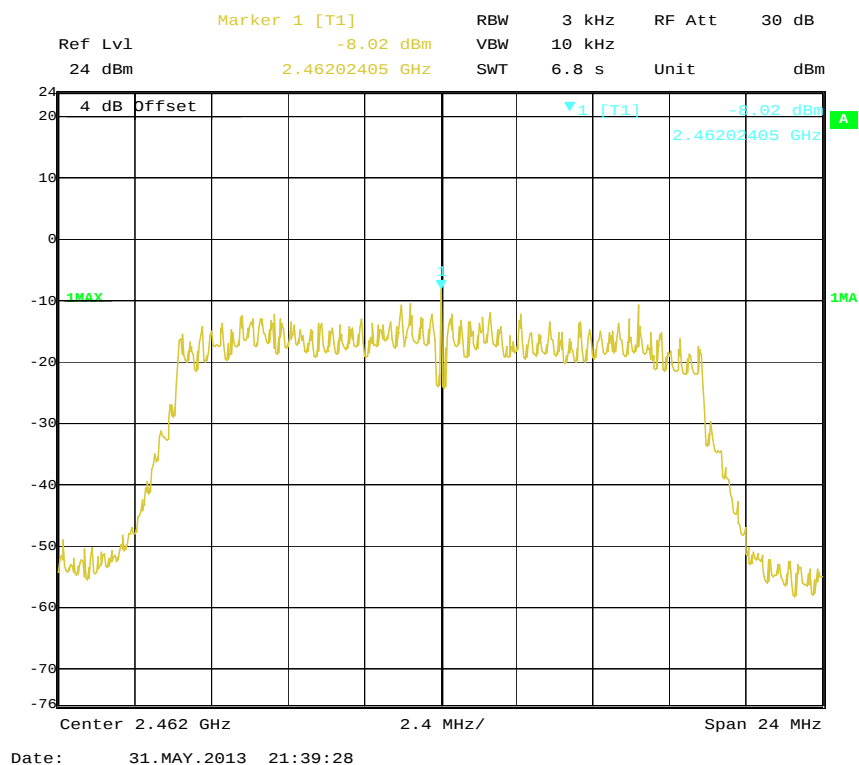
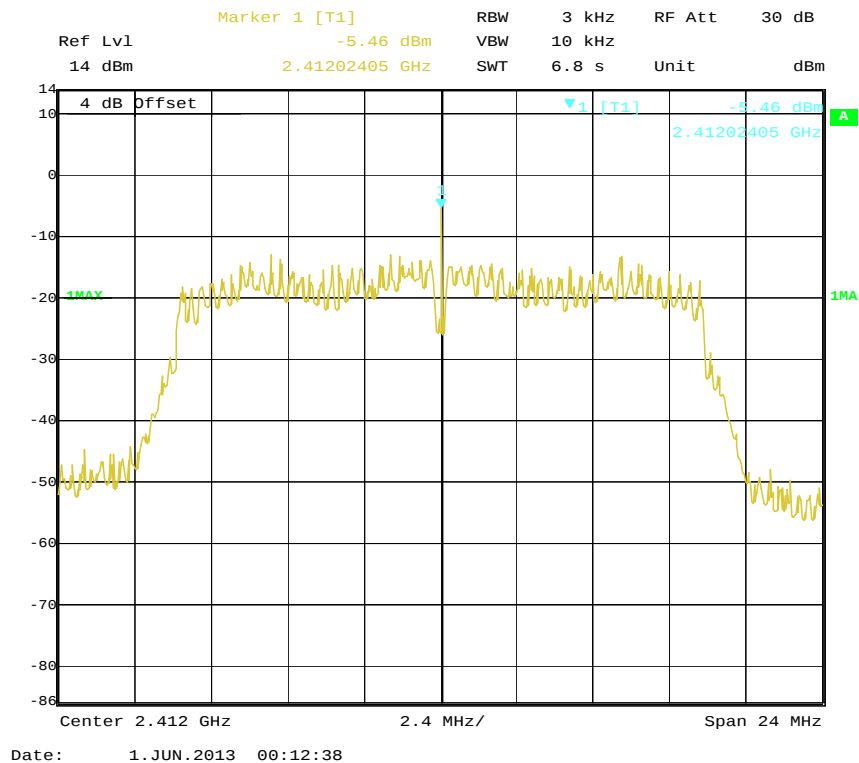
Channel	Frequency (MHz)	PSD(dBm/3kHz)			Limit (dBm/3kHz)
		Antenna 0	Antenna 1	Antenna 0 +Antenna 1	
802.11b mode					
Low	2412	-2.52	-3.99	\	≤8
Middle	2437	-1.15	-3.39	\	≤8
High	2462	-2.25	-2.24	\	≤8
802.11g mode					
Low	2412	-8.51	-5.46	\	≤8
Middle	2437	-8.27	-4.93	\	≤8
High	2462	-8.02	-5.60	\	≤8
802.11n-HT20 mode					
Low	2412	-11.04	-7.88	-6.17	≤8
Middle	2437	-9.27	-7.60	-5.34	≤8
High	2462	-9.70	-7.93	-5.72	≤8
802.11n-HT40 mode					
Low	2422	-14.55	-8.66	-7.66	≤8
Middle	2437	-14.32	-9.59	-8.33	≤8
High	2452	-13.71	-9.53	-8.13	≤8

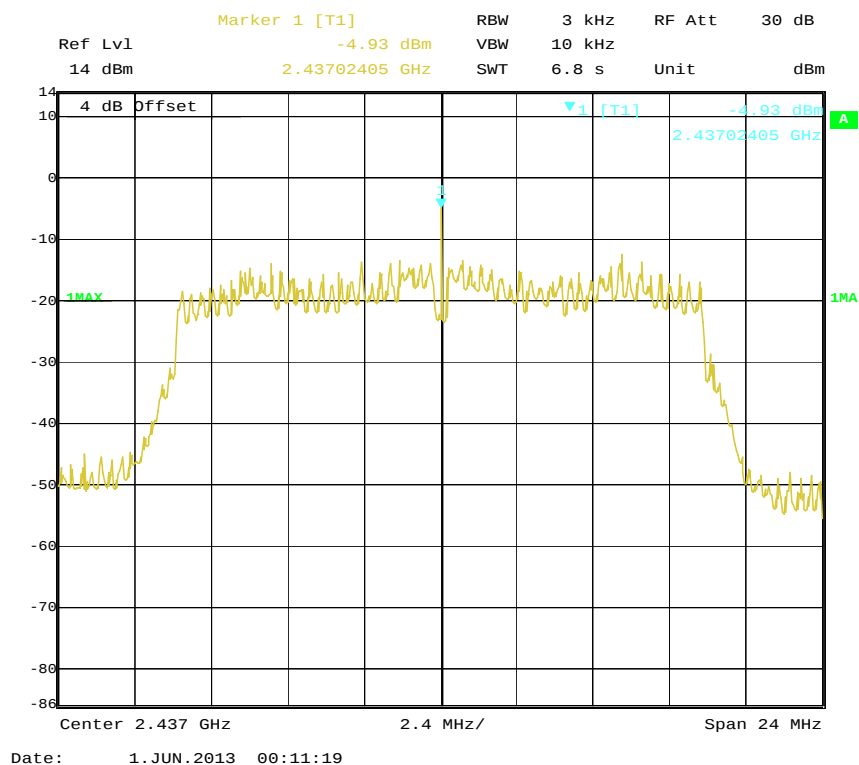
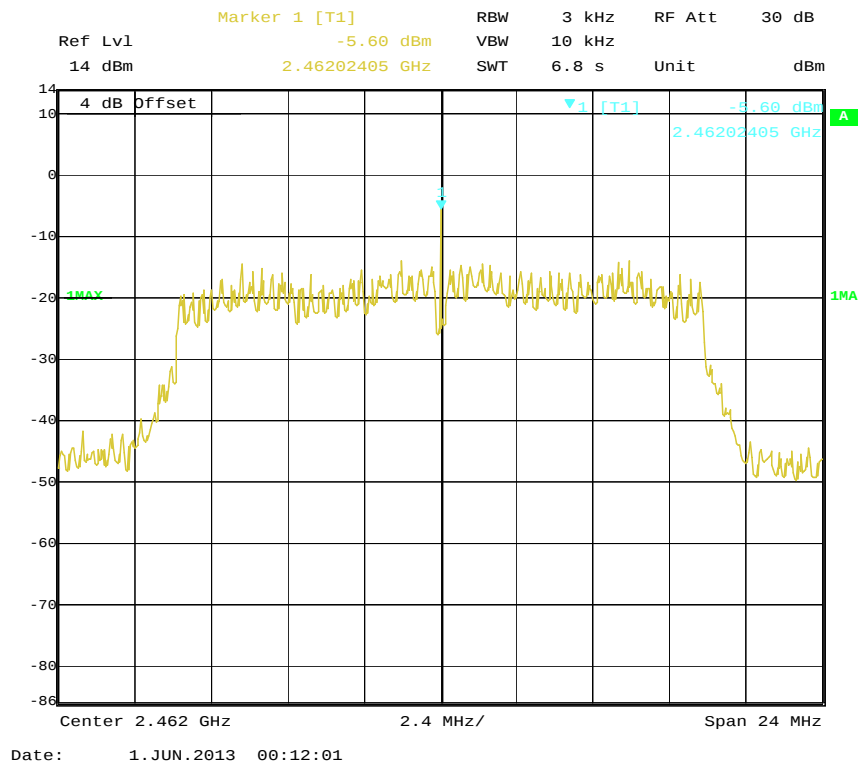
Power Spectral Density, 802.11b Low Channel, Antenna 0**Power Spectral Density, 802.11b Middle Channel, Antenna 0**

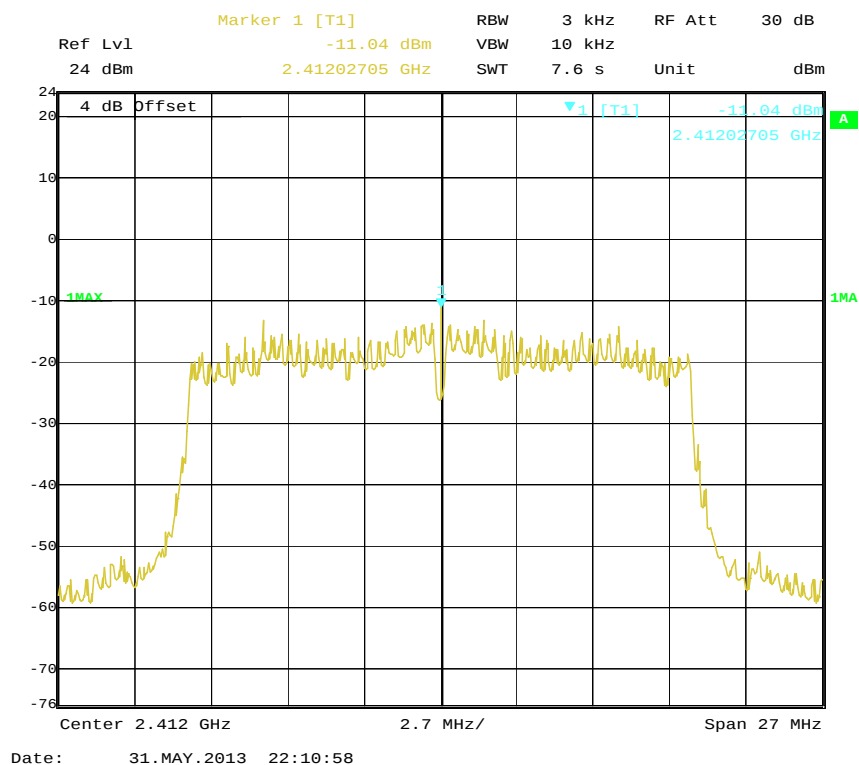
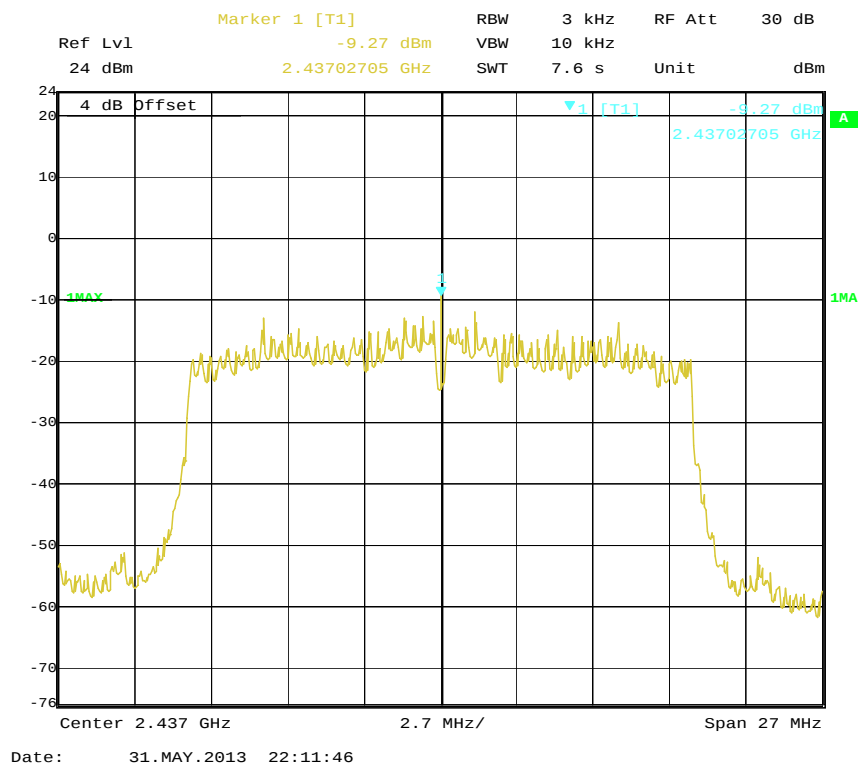
Power Spectral Density, 802.11b High Channel, Antenna 0**Power Spectral Density, 802.11b Low Channel, Antenna 1**

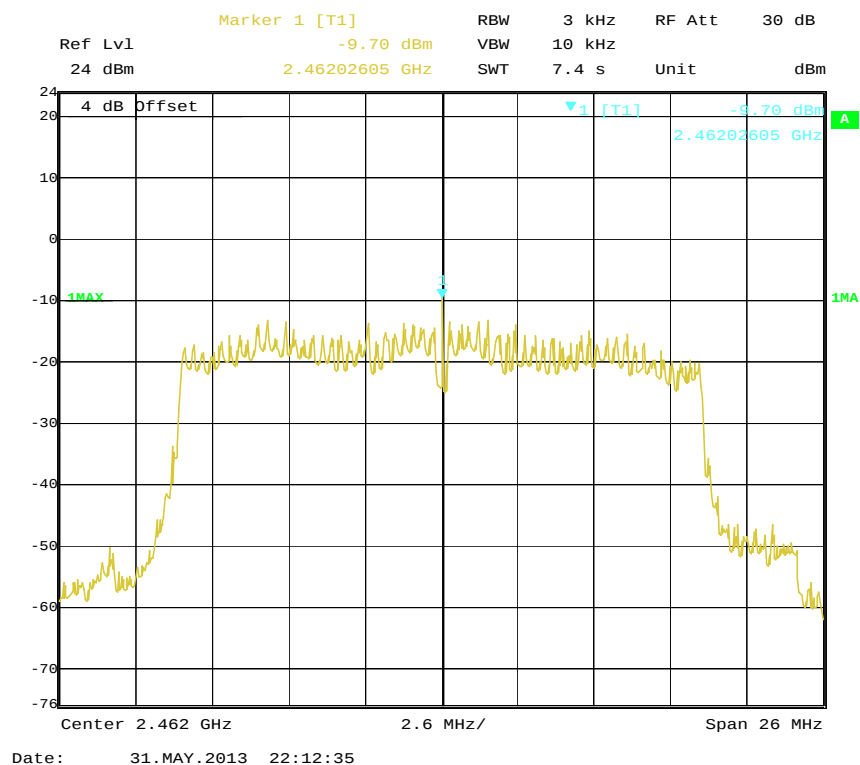
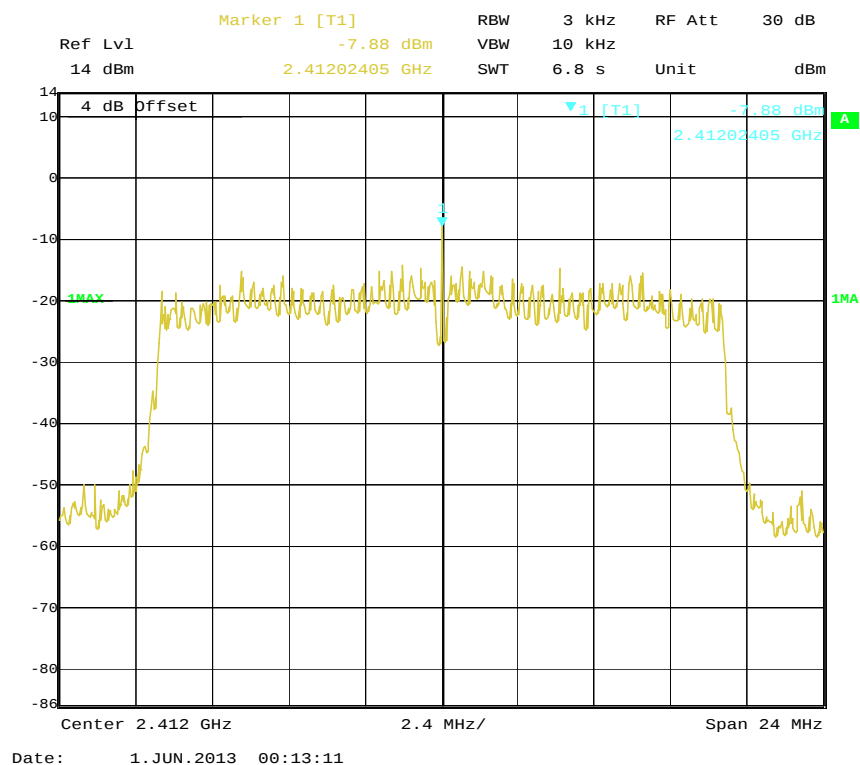
Power Spectral Density, 802.11b Middle Channel, Antenna 1**Power Spectral Density, 802.11b High Channel, Antenna 1**

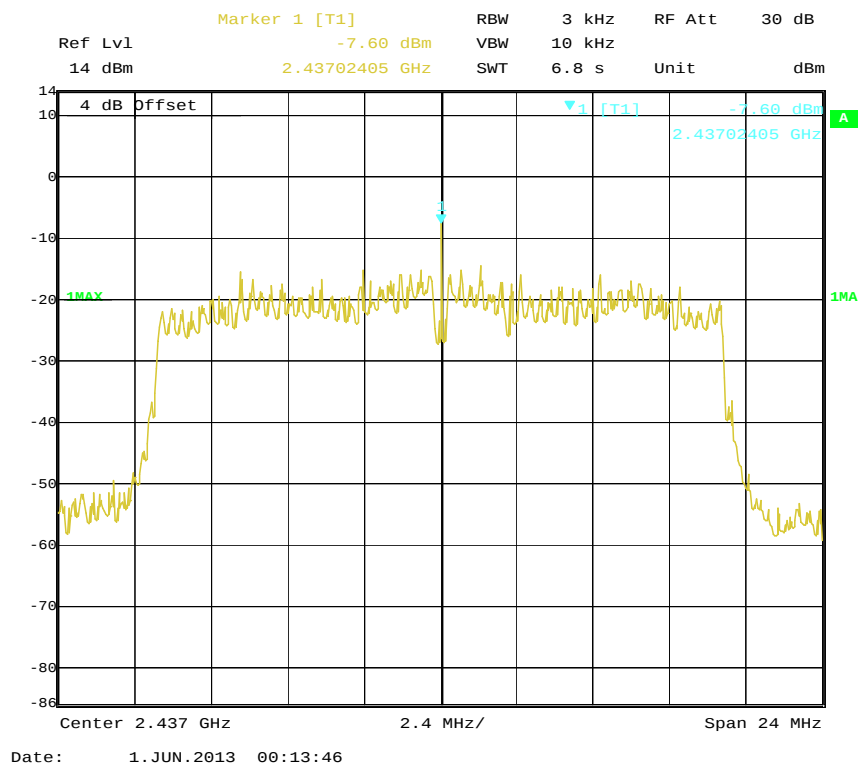
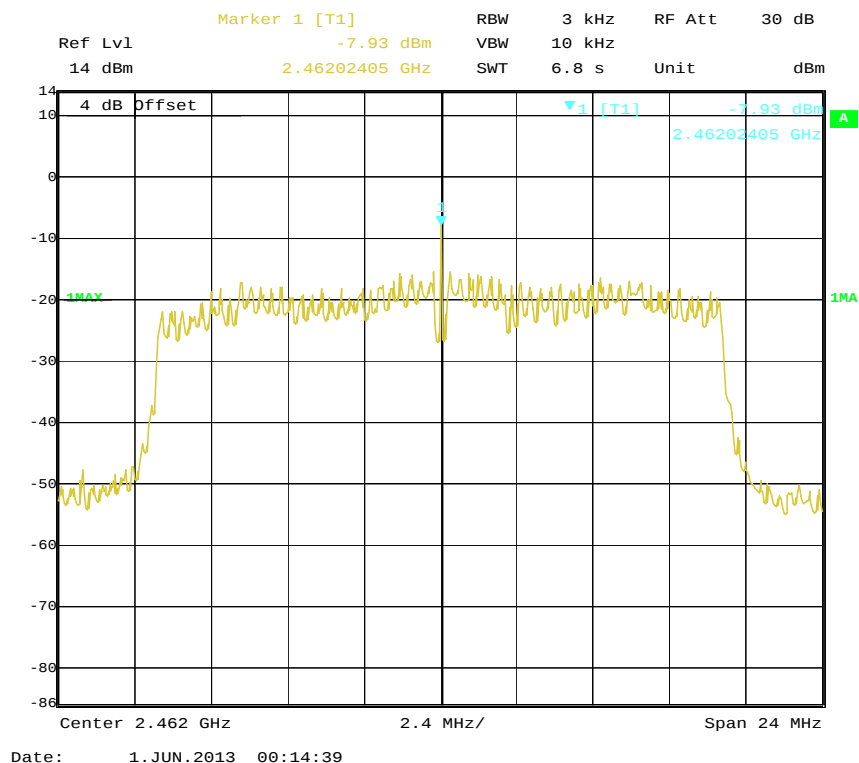
Power Spectral Density, 802.11g Low Channel, Antenna 0**Power Spectral Density, 802.11g Middle Channel, Antenna 0**

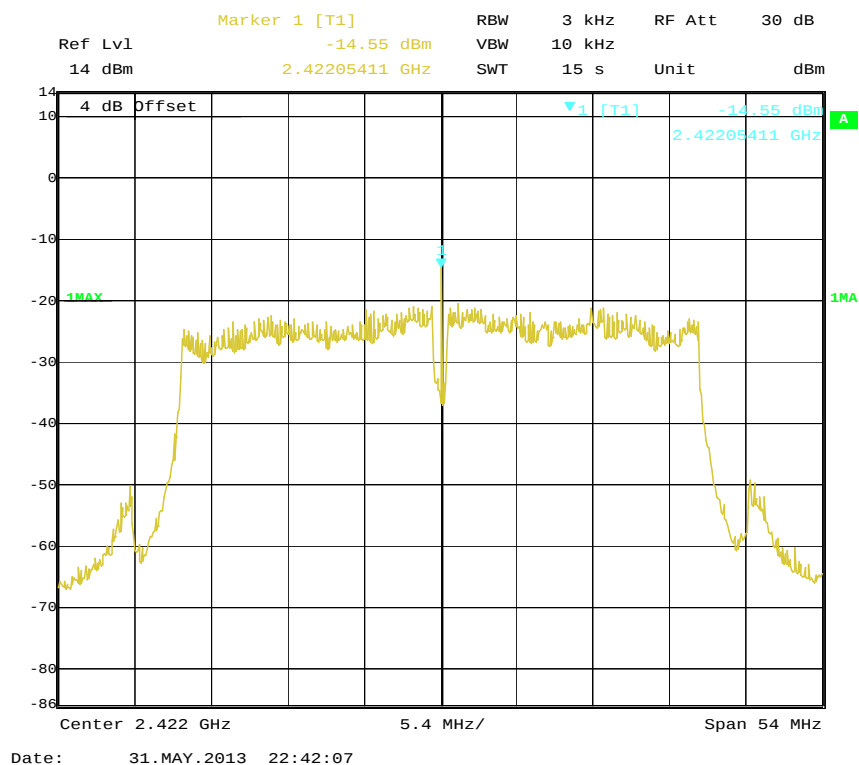
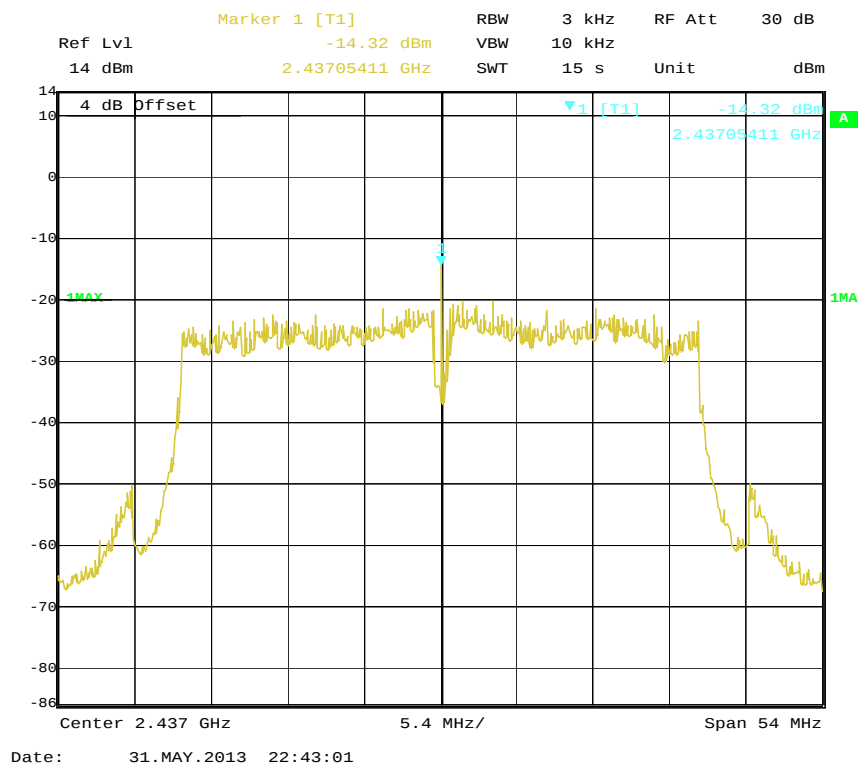
Power Spectral Density, 802.11g High Channel, Antenna 0**Power Spectral Density, 802.11g Low Channel, Antenna 1**

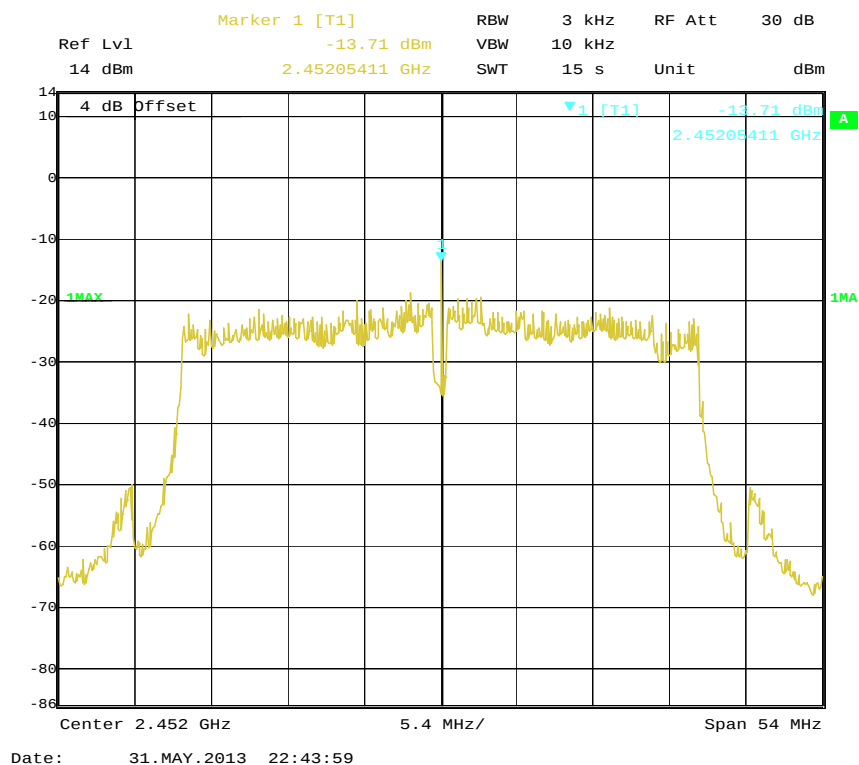
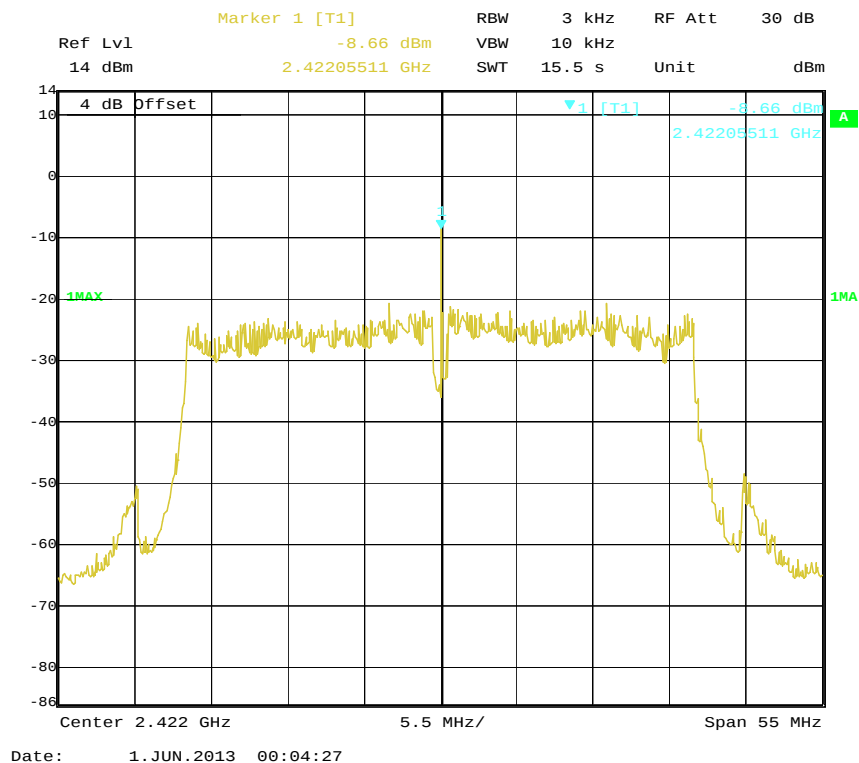
Power Spectral Density, 802.11g Middle Channel, Antenna 1**Power Spectral Density, 802.11g High Channel, Antenna 1**

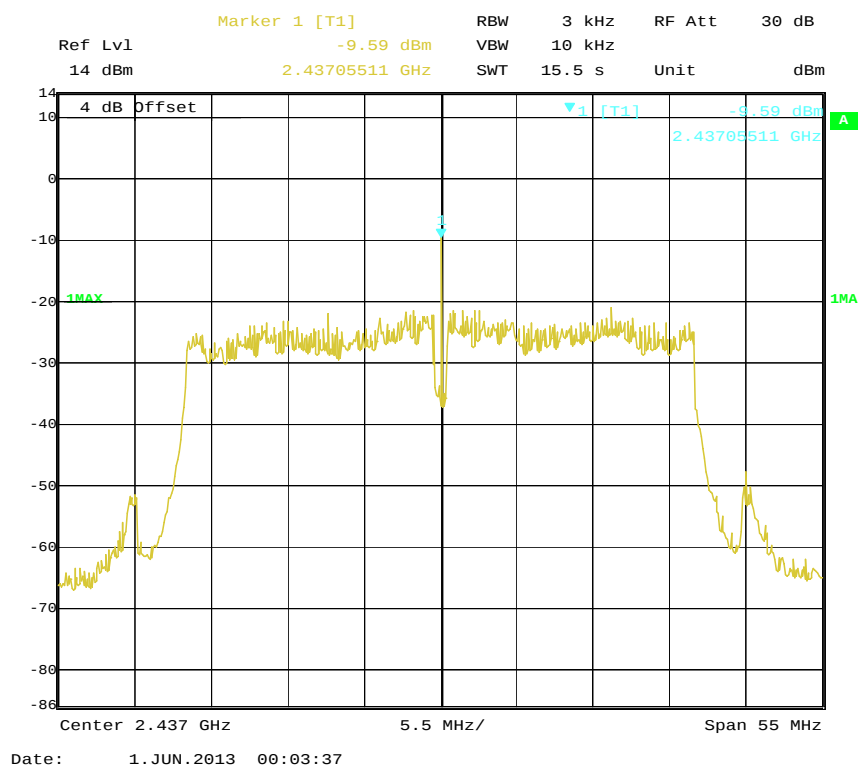
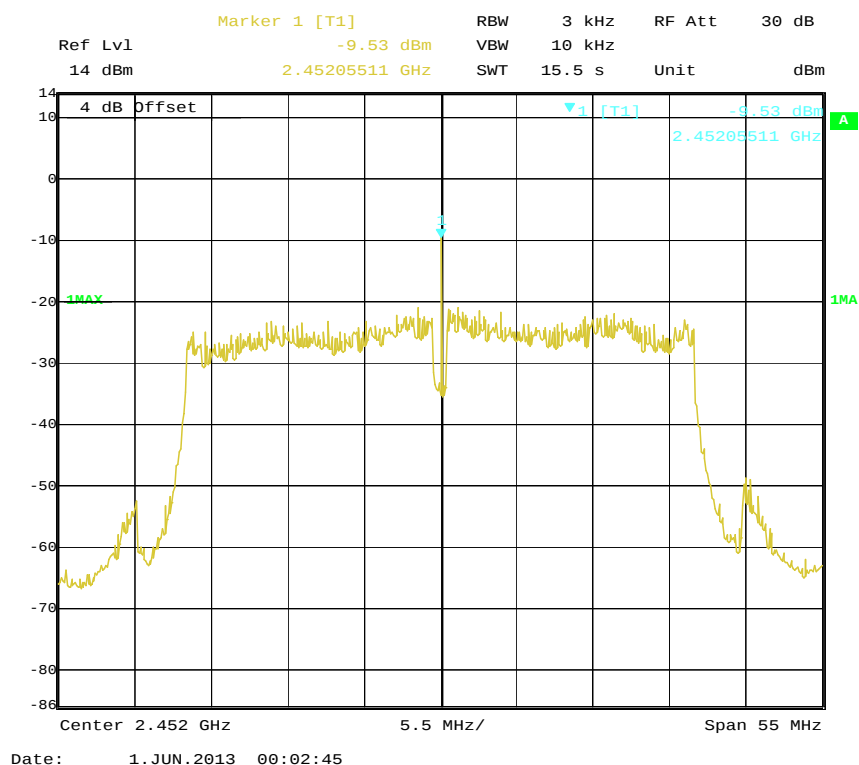
Power Spectral Density, 802.11n-HT20 Low Channel, Antenna 0**Power Spectral Density, 802.11n-HT20 Middle Channel, Antenna 0**

Power Spectral Density, 802.11n-HT20 High Channel, Antenna 0**Power Spectral Density, 802.11n-HT20 Low Channel, Antenna 1**

Power Spectral Density, 802.11n-HT20 Middle Channel, Antenna 1**Power Spectral Density, 802.11n-HT20 High Channel, Antenna 1**

Power Spectral Density, 802.11n-HT40 Low Channel, Antenna 0**Power Spectral Density, 802.11n-HT40 Middle Channel, Antenna 0**

Power Spectral Density, 802.11n-HT40 High Channel, Antenna 0**Power Spectral Density, 802.11n-HT40 Low Channel, Antenna 1**

Power Spectral Density, 802.11n-HT40 Middle Channel, Antenna 1**Power Spectral Density, 802.11n-HT40 High Channel, Antenna 1**

***** END OF REPORT *****