

FCC EMC Test Report

FCC ID: QMV-3DNURI-A500

For

Electromagnetic Interference

Of

Product : MOBILE INTERNET DEVICE

Trade Name : The logo for 3Dnuri features the text "3Dnuri" in a blue, sans-serif font. The "3D" is stylized with a blue outline and a red dot above the "i".

Model Number : 5B100-3

Prepared for

3D NURI Co., Ltd.

202, HEAJU BLDG, 7, GANGNAM-DAERO 62 GIL, GANGNAM-GU,
SEOUL, KOREA. 135-937

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : 3D NURI Co., Ltd.
Address : 202, HEAJU BLDG, 7, GANGNAM-DAERO 62 GIL,
 GANGNAM-GU, SEOUL, KOREA. 135-937
Manufacturer's Name : 3D NURI Co., Ltd.
Address : 202, HEAJU BLDG, 7, GANGNAM-DAERO 62 GIL,
 GANGNAM-GU, SEOUL, KOREA. 135-937

Product description

Product name : MOBILE INTERNET DEVICE
Model and/or type reference : 5B100-3

Standards : FCC Part15B:2012
 ANSI C63.4:2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : Jan. 09, 2013 ~Jan. 22, 2013

Date of Issue..... : Jan. 22, 2013

Test Result..... : **Pass**

Testing Engineer : Jason Chen
 (Jason Chen)

Technical Manager : Jim He
 (Jim He)

Authorized Signatory : Bovey Yang
 (Bovey Yang)

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 DESCRIPTION OF TEST SETUP	8
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.5 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	16
3.2.4 EUT OPERATING CONDITIONS	16
3.2.5 TEST RESULTS	17
3.2.6 TEST RESULTS(Above 1GHz)	23
4 . EUT TEST PHOTO	25
ATTACHMENT PHOTOGRAPHS OF EUT	28

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B:2012 ANSI C63.4: 2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration Number:238937; IC Registration Number:9270A-1

CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~6GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	MOBILE INTERNET DEVICE	
Model Name		
Serial No	5B100-3	
Model Difference	N/A	
Product Description	The EUT is a MOBILE INTERNET DEVICE	
	Operating frequency:	12MHz
	Connecting I/O port:	USB,HDMI Port, Earphone Port,
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification please refer to the User's Manual.	
Power Source	Model: SWPP-05001000-US, AC Power Input: 100-240V~, 50/60Hz, 1.0A Max. Output: 5.0V  1000mA	
Power Rating	DC 5V	
Battery	DC 3.7V	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Charge + TF Card Playing music Mode
Mode 2	Downloading Mode
Mode 3	Charge +HDMI Output Mode

For Conducted Test	
Final Test Mode	Description
Mode 1	Charge + TF Card Playing music Mode


For Radiated Test	
Final Test Mode	Description
Mode 1	Charge + TF Card Playing music Mode
Mode 2	Downloading Mode
Mode 3	Charge +HDMI Output Mode

2.3 DESCRIPTION OF TEST SETUP


Mode :1

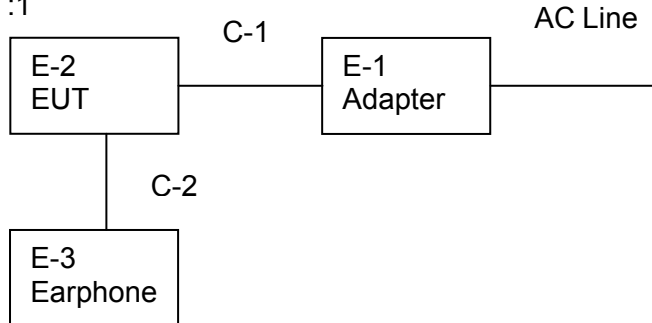

Mode 2

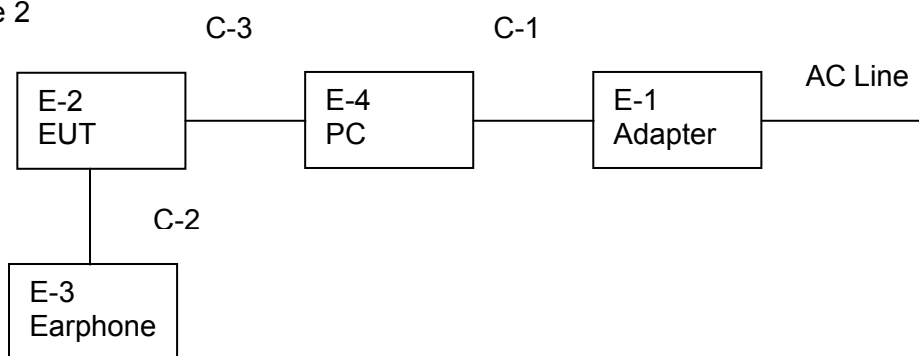

Mode 3

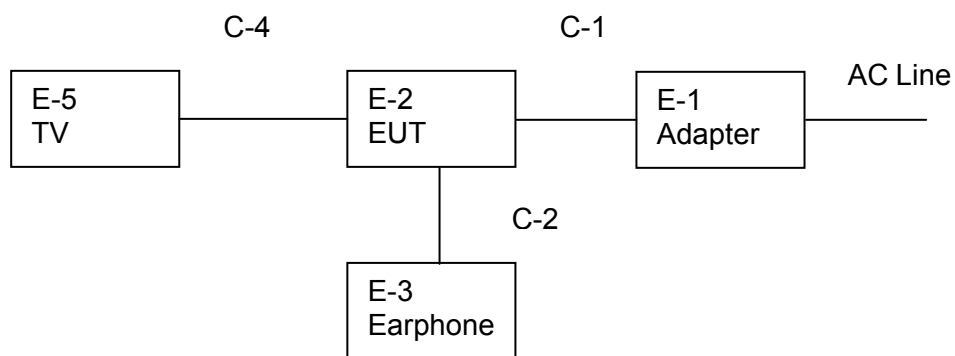

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	MOBILE INTERNET DEVICE		5B100-3	N/A	EUT
E-2	Adapter	N/A	SWPP-05001000-US	N/A	
E-3	Earphone	N/A	N/A	N/A	
E-4	Notebook PC	Apple	MD224CH	N/A	
E-5	LCD TV	SONY	LD22JL	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0m	Adapter cable
C-2	NO	NO	1.0m	Earphone cable
C-3	NO	NO	1.0m	USB cable
C-4	YES	NO	1.5m	HDMI cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101313	Jul. 06, 2013
2	LISN	EMCO	3816/2	00042990	Jul. 06, 2013
3	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2013
4	Test Cable	N/A	C01	N/A	Jul. 06, 2013
5	Test Cable	N/A	C02	N/A	Jul. 06, 2013
6	Test Cable	N/A	C03	N/A	Jul. 06, 2013
7	EMI Test Receiver	R&S	ESCI	101160	Jul. 06, 2013
8	Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2013
9	Triple-Loop Antenna	EVERFINE	LIA-2	11020003	Jul. 06, 2013
10	Absorbing Clamp	R&S	MDS-21	100423	Jul. 08, 2013

2.5.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06, 2013
2	Test Cable	N/A	R-01	N/A	Jul. 06, 2013
3	Test Cable	N/A	R-02	N/A	Jul. 06, 2013
4	EMI Test Receiver	R&S	ESCI-7	101318	Jul. 06, 2013
5	Antenna Mast	EM	SC100_1	N/A	N/A
6	Turn Table	EM	SC100	060531	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2013
8	Spectrum Analyzer	Aglient	E4407B	MY45108040	Jul. 06. 2013
9	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2013
10	Amplifier	EM	EM-30180	060538	Jul. 06. 2013

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

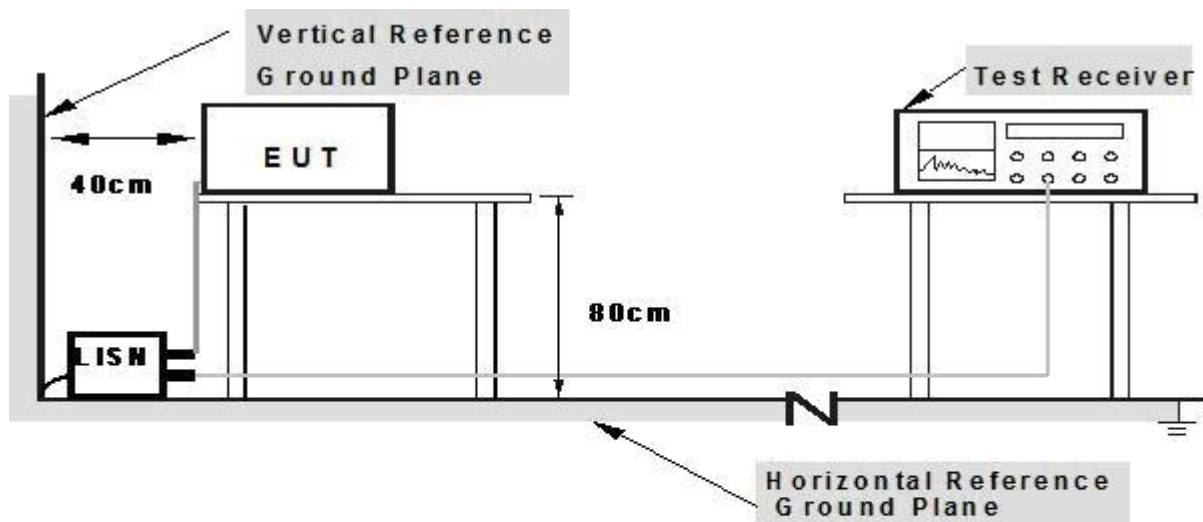

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.5 TEST RESULTS

EUT :	MOBILE INTERNET DEVICE	Model Name. :	5B100-3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2013-01-18
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1940	51.08	9.78	60.86	63.86	-3.00	peak
0.1940	40.00	9.78	49.78	53.86	-4.08	AVG
0.2260	47.62	9.81	57.43	62.59	-5.16	peak
0.3899	33.51	10.04	43.55	48.06	-4.51	AVG
0.4140	42.63	10.08	52.71	57.57	-4.86	peak
1.1980	26.80	10.17	36.97	46.00	-9.03	AVG
3.4500	35.47	10.31	45.78	56.00	-10.22	peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

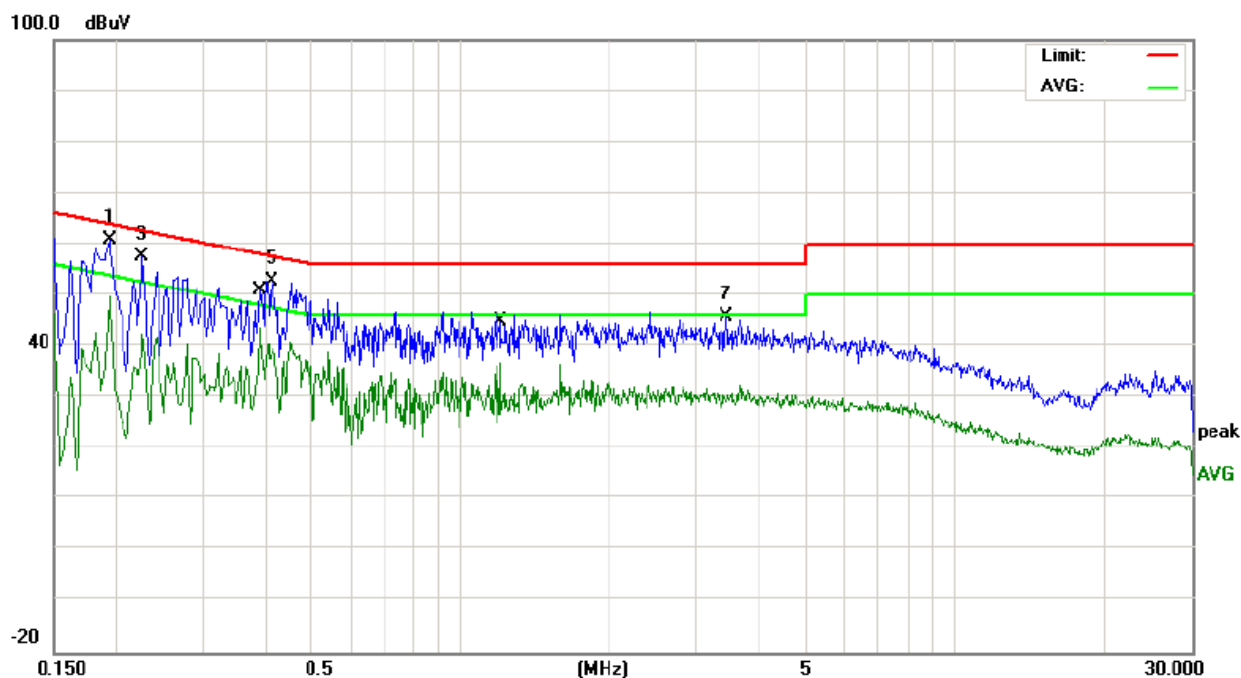


EUT :	MOBILE INTERNET DEVICE	Model Name. :	5B100-3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2013-01-18
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1620	47.83	9.91	57.74	65.36	-7.62	peak
0.1860	33.44	10.10	43.54	54.21	-10.67	AVG
0.2420	46.19	10.20	56.39	62.02	-5.63	peak
0.4580	33.25	10.20	43.45	46.73	-3.28	AVG
0.4740	40.40	10.20	50.60	56.44	-5.84	peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

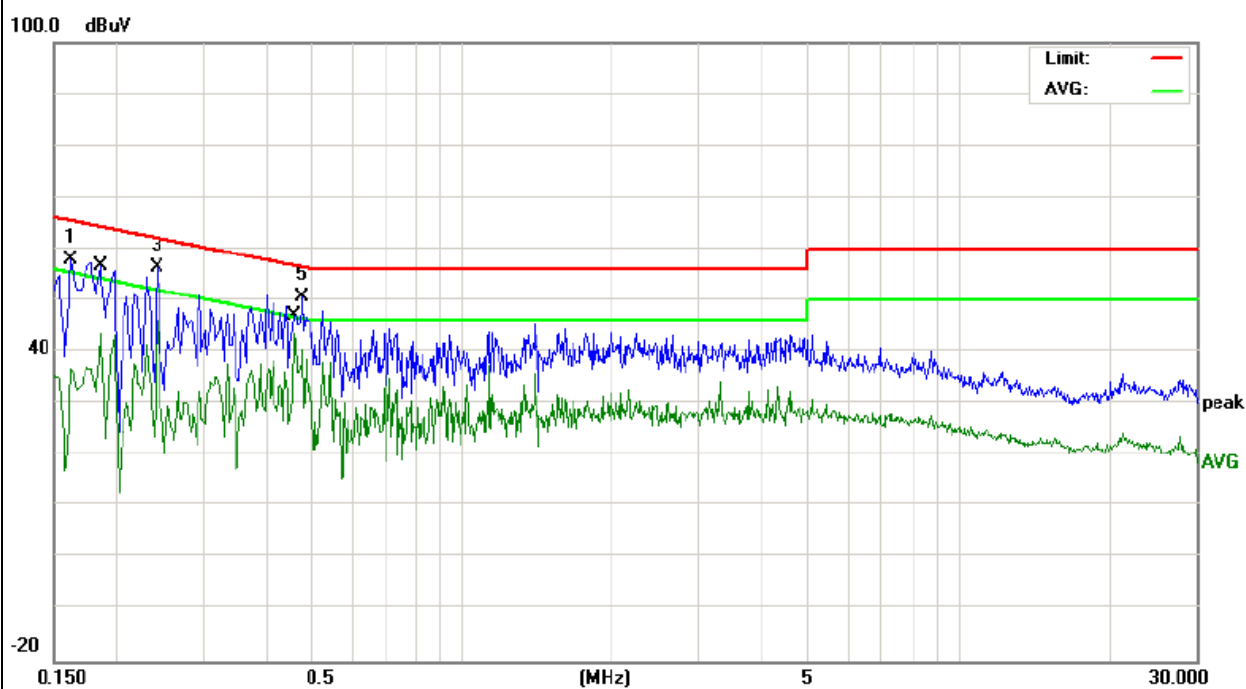

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:


- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

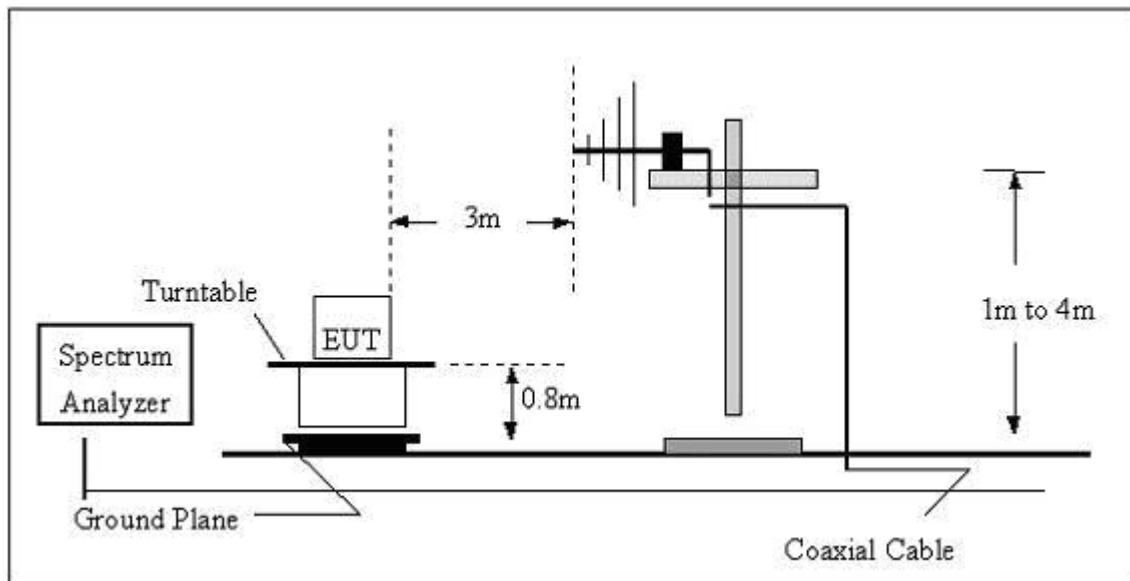

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

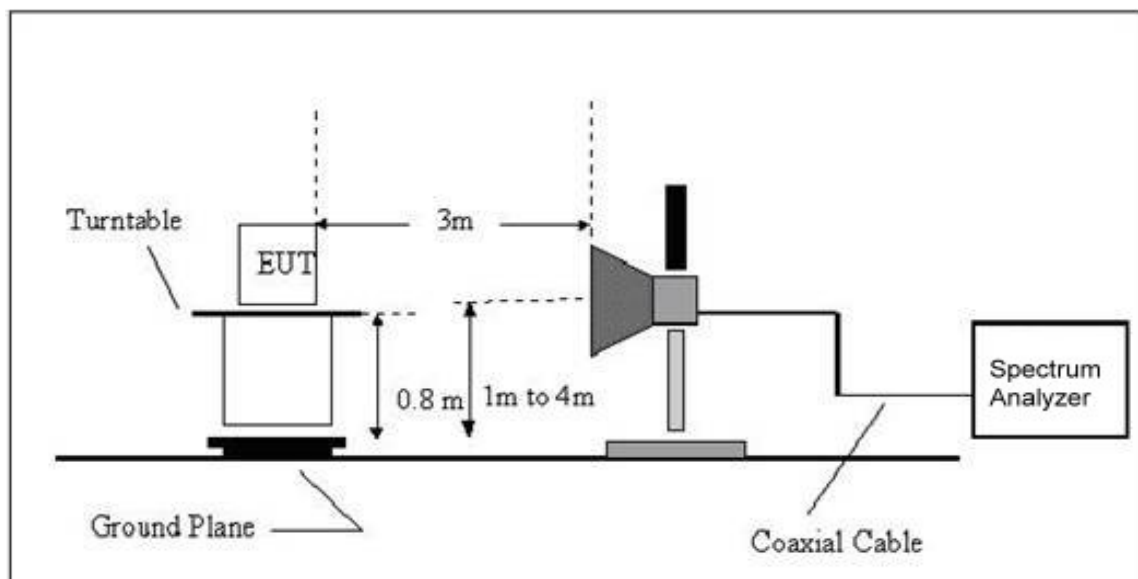

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.


3.2.5 TEST RESULTS

EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
55.0274	17.07	6.27	23.34	40.00	-16.66	Peak
83.5222	13.84	8.41	22.25	40.00	-17.75	Peak
144.8418	10.73	12.03	22.76	43.50	-20.74	Peak
672.8444	11.83	23.87	35.70	46.00	-10.30	Peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

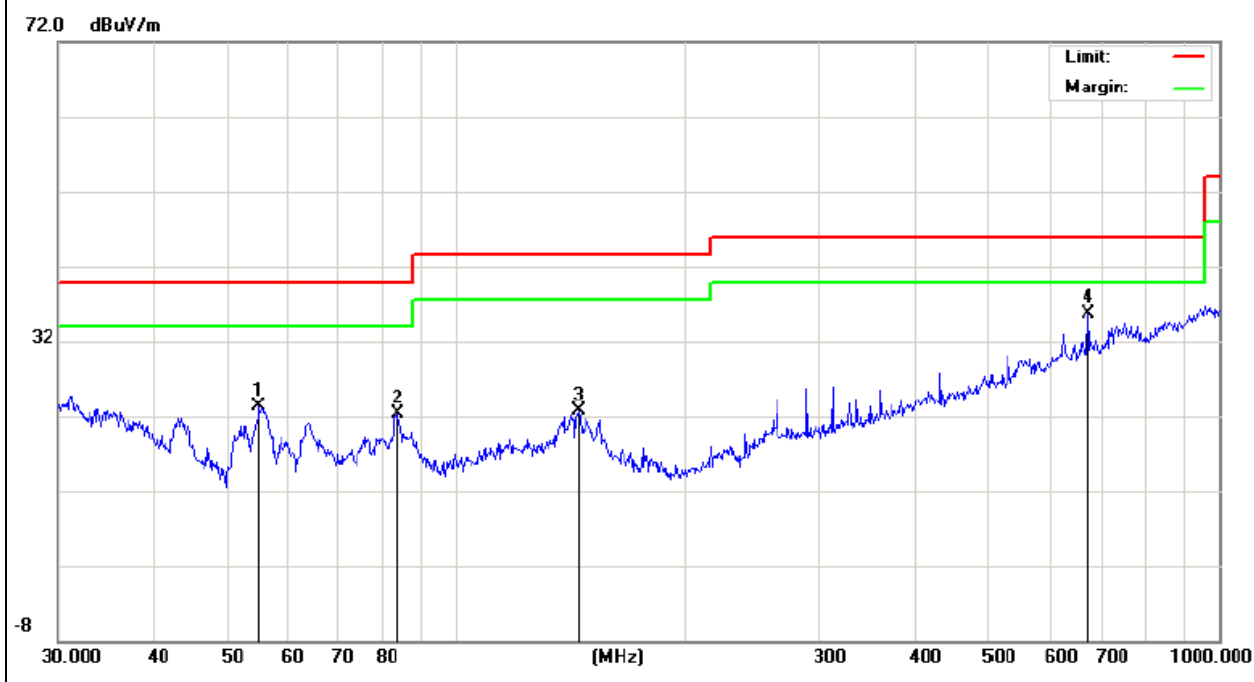


EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
30.6379	16.59	18.04	34.63	40.00	-5.37	Peak
43.6584	23.36	11.34	34.70	40.00	-5.30	Peak
117.3603	16.39	12.02	28.41	43.50	-15.09	Peak
213.7634	15.53	9.84	25.37	43.50	-18.13	Peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

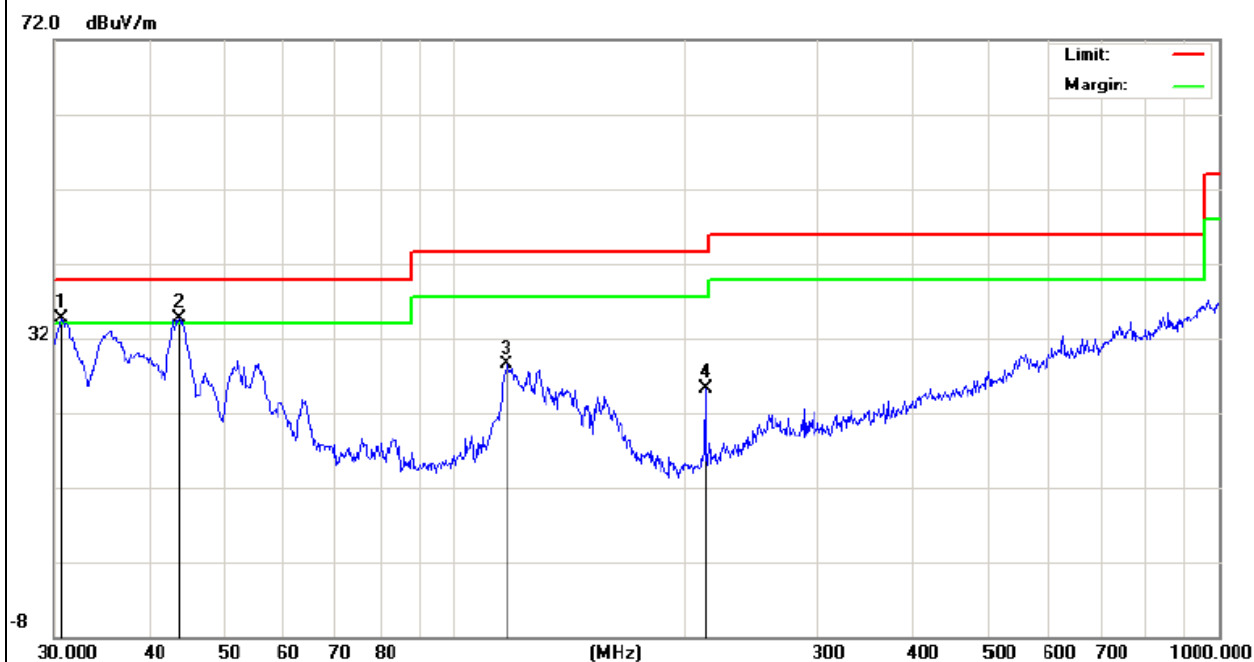


EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 2	Polarization :	Horizontal
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
145.3506	16.77	12.00	28.77	43.50	-14.73	Peak
312.1794	29.48	15.13	44.61	46.00	-1.39	Peak
360.4476	22.60	16.46	39.06	46.00	-6.94	Peak
965.5421	15.34	29.86	45.20	54.00	-8.80	Peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

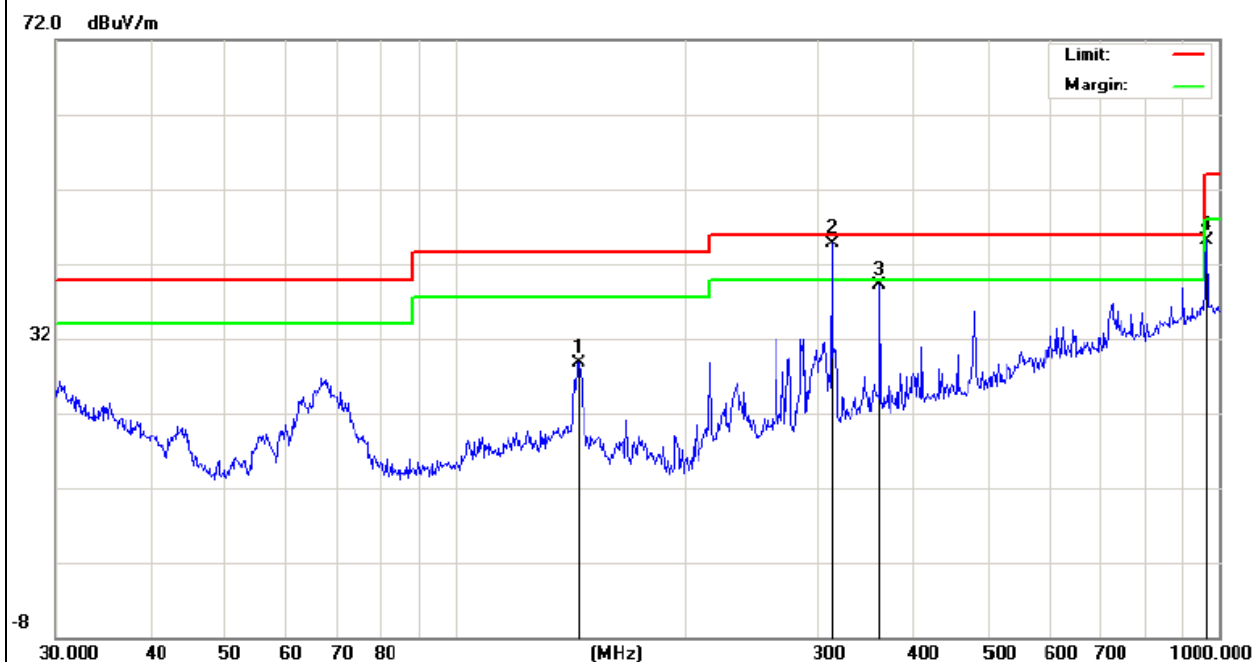


EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 2	Polarization :	Vertical
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
30.0000	18.56	18.33	36.89	40.00	-3.11	Peak
59.0251	25.93	5.45	31.38	40.00	-8.62	Peak
123.6985	23.77	12.17	35.94	43.50	-7.56	Peak
239.9874	23.40	11.65	35.05	46.00	-10.95	Peak
721.7259	15.45	25.59	41.04	46.00	-4.96	Peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

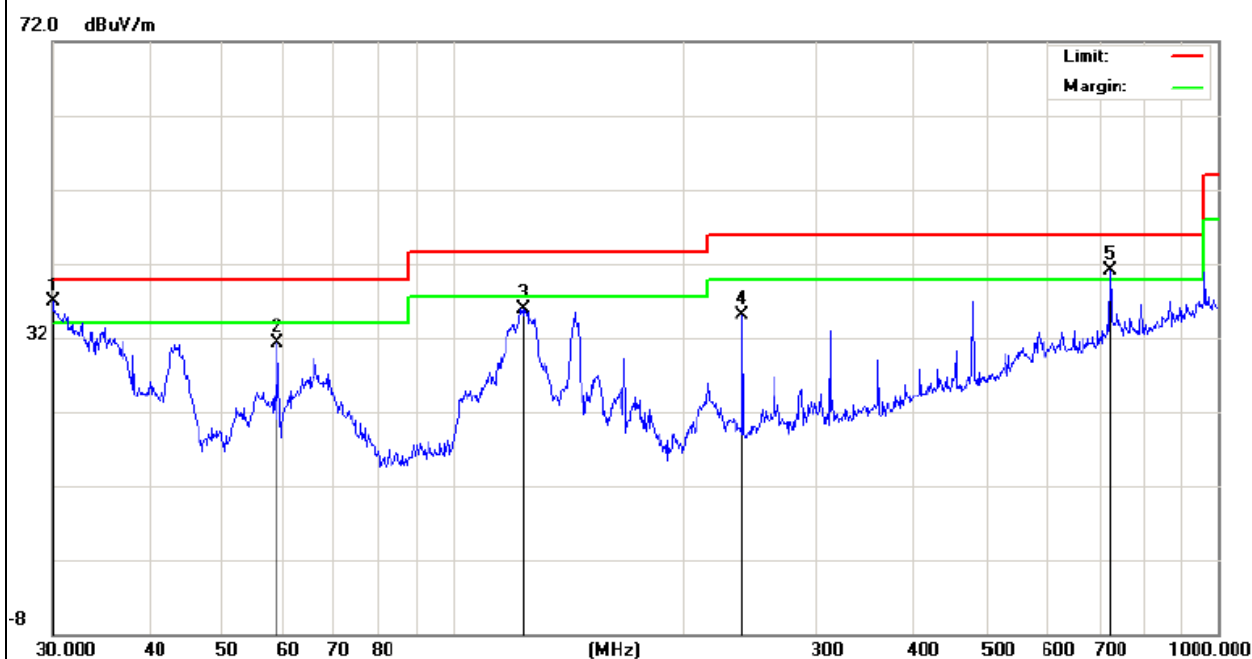


EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 3	Polarization :	Horizontal
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
54.0711	17.06	6.55	23.61	40.00	-16.39	Peak
146.8877	13.61	11.91	25.52	43.50	-17.98	Peak
287.9904	12.80	14.30	27.10	46.00	-18.90	Peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

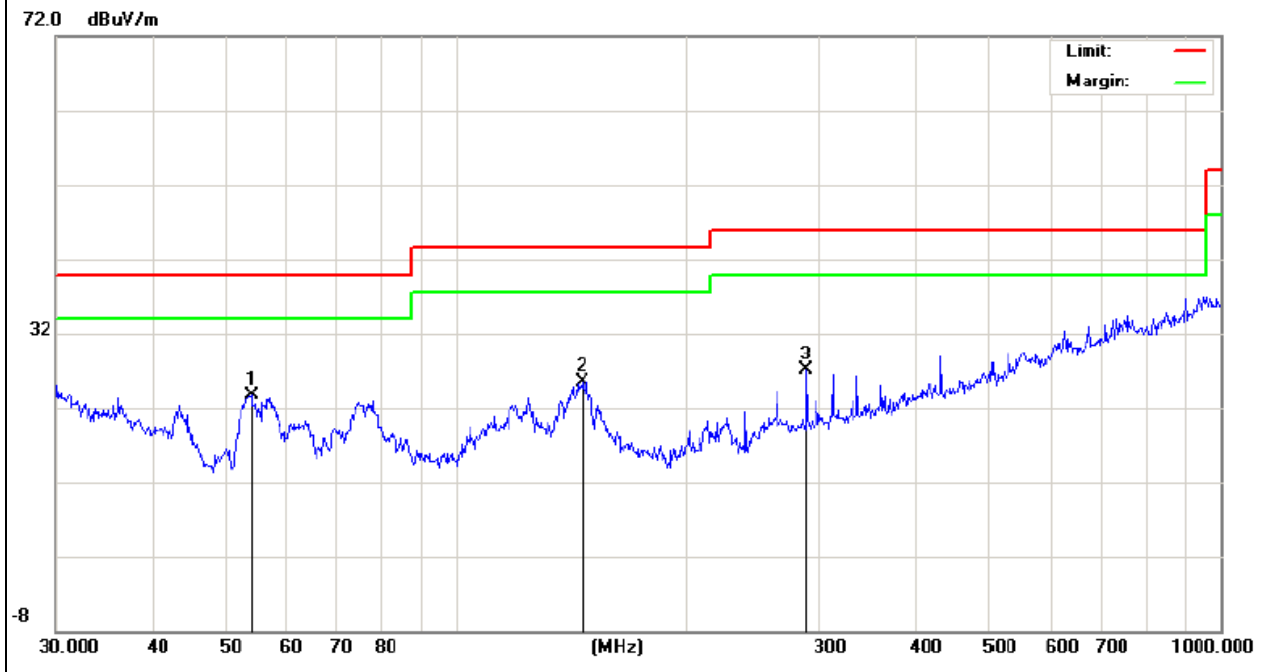

EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 3	Polarization :	Vertical
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
44.1202	23.45	11.09	34.54	40.00	-5.46	Peak
76.2442	19.47	7.03	26.50	40.00	-13.50	Peak
118.1862	18.12	12.04	30.16	40.00	-9.84	Peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit




3.2.6 TEST RESULTS(Above 1GHz)

EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
1158.4580	34.18	30.74	64.92	74.00	-9.08	QP
1158.4580	16.13	30.74	46.87	54.00	-7.13	AVG
2337.2890	26.81	34.77	61.58	74.00	-12.42	QP
2337.2890	9.58	34.77	44.35	54.00	-9.65	AVG
3539.5750	26.08	39.81	65.89	74.00	-8.11	QP
3539.5750	8.11	39.81	47.92	54.00	-6.08	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

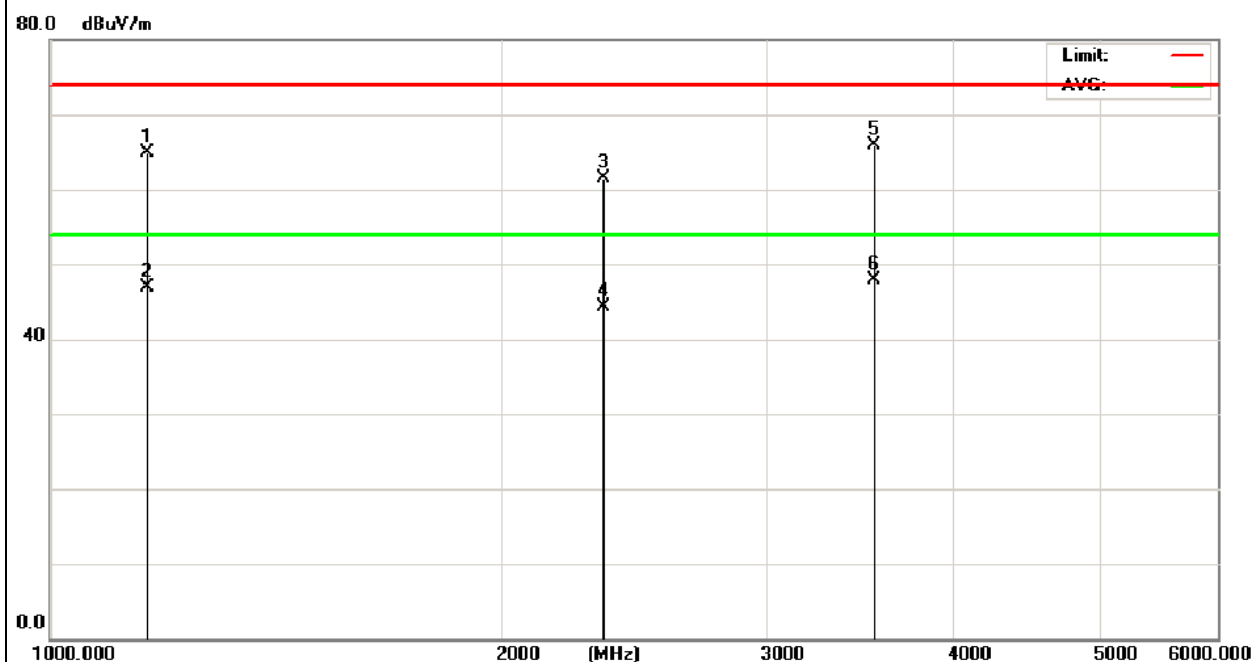


EUT :	MOBILE INTERNET DEVICE	Model Name :	5B100-3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2013-01-19
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V From Adapter AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
1736.2880	30.56	32.82	63.38	74.00	-10.62	QP
1736.2880	15.03	32.82	47.85	54.00	-6.15	AVG
2295.5780	28.08	35.14	63.22	74.00	-10.78	QP
2295.5780	8.14	35.14	43.28	54.00	-10.72	AVG
3216.7820	25.07	38.08	63.15	74.00	-10.85	QP
3216.7820	8.75	38.08	46.83	54.00	-7.17	AVG

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

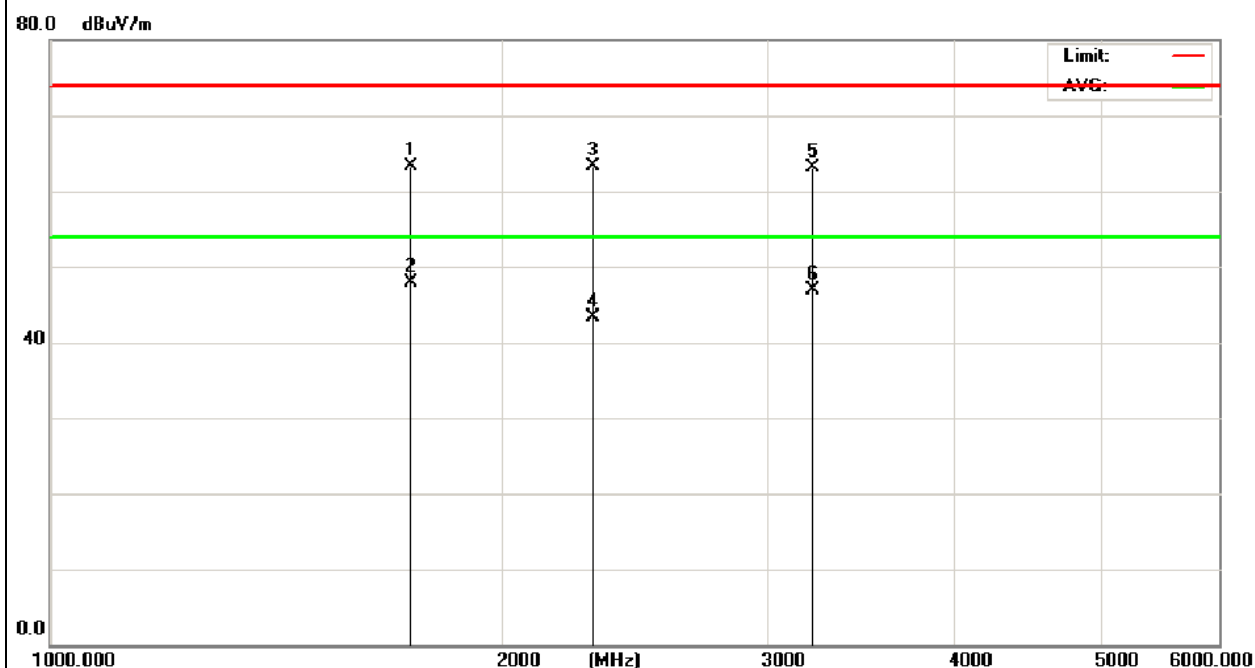


4. EUT TEST PHOTO

Radiated Measurement Photos


Mode 1

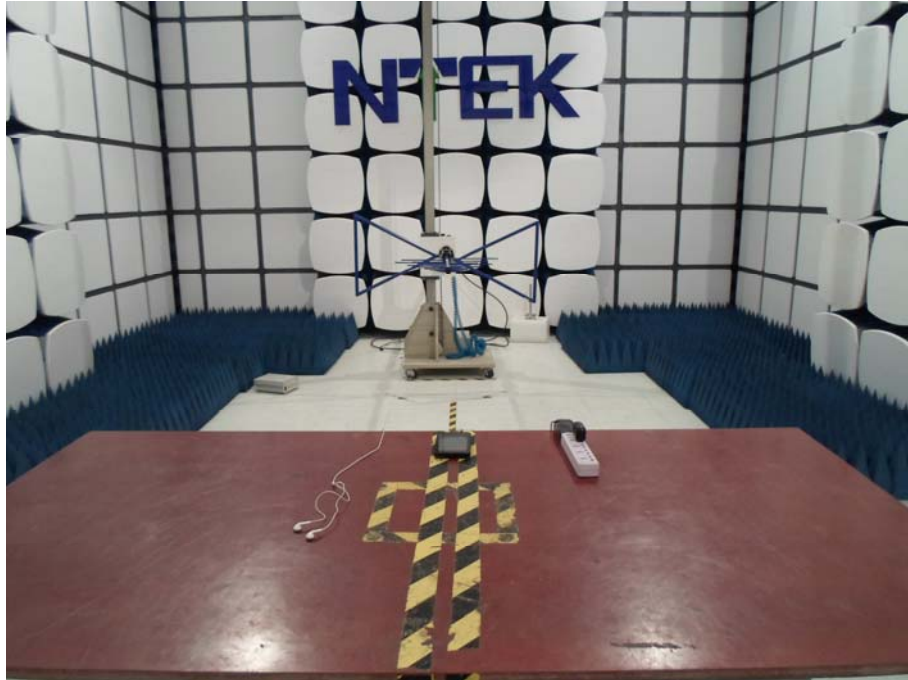


Mode 2

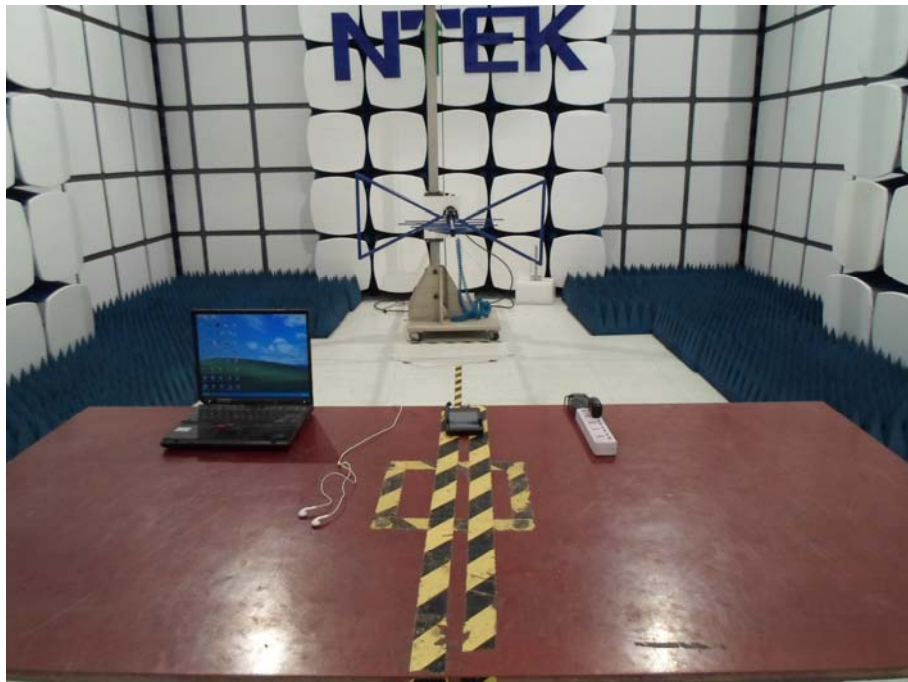

Mode 3

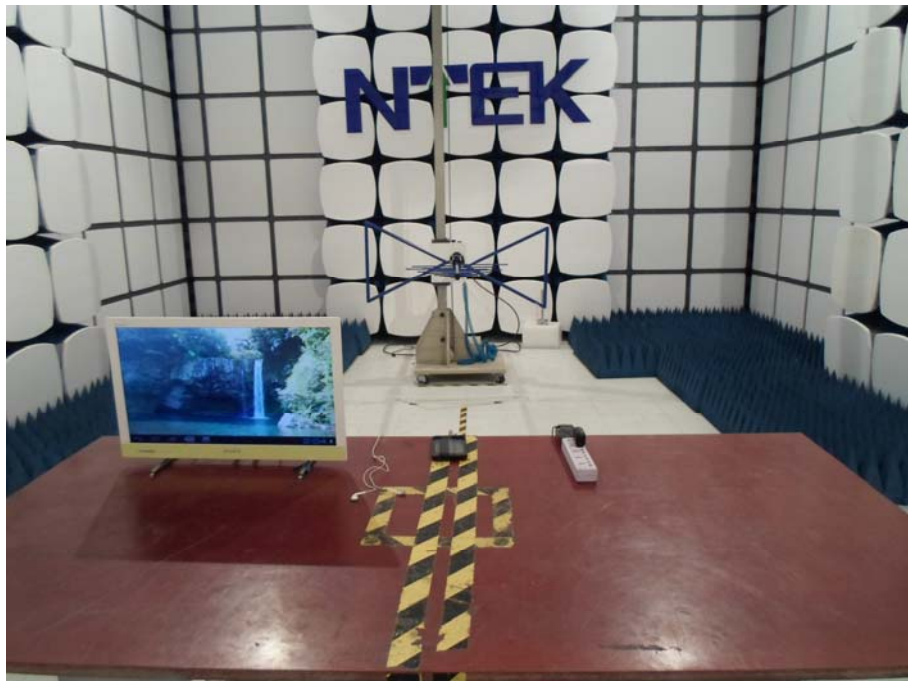

Radiated Measurement Photos (Above 1GHz)

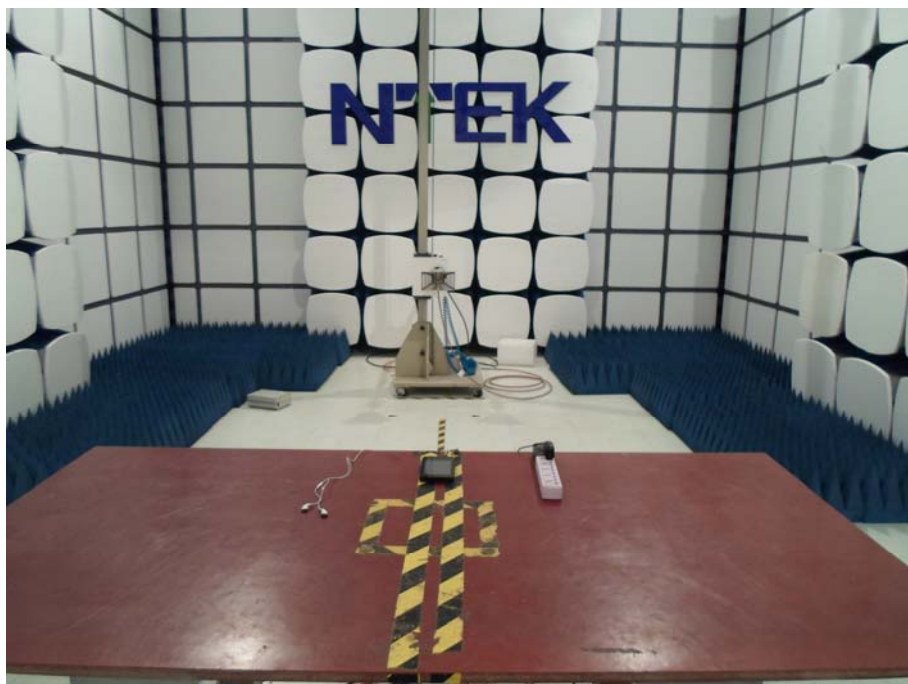

Conducted Measurement Photos



ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5

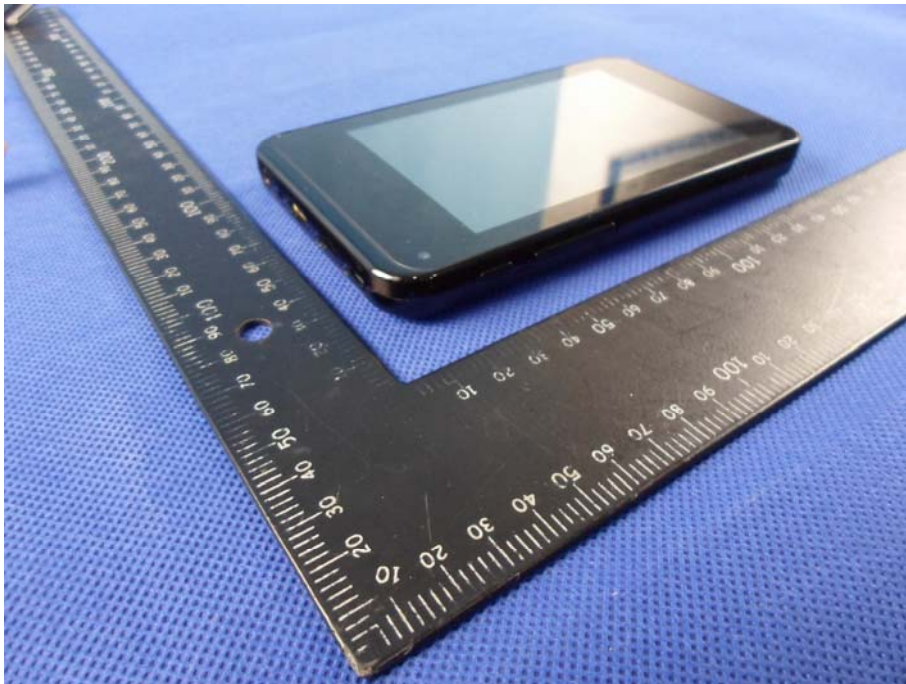


Photo 6

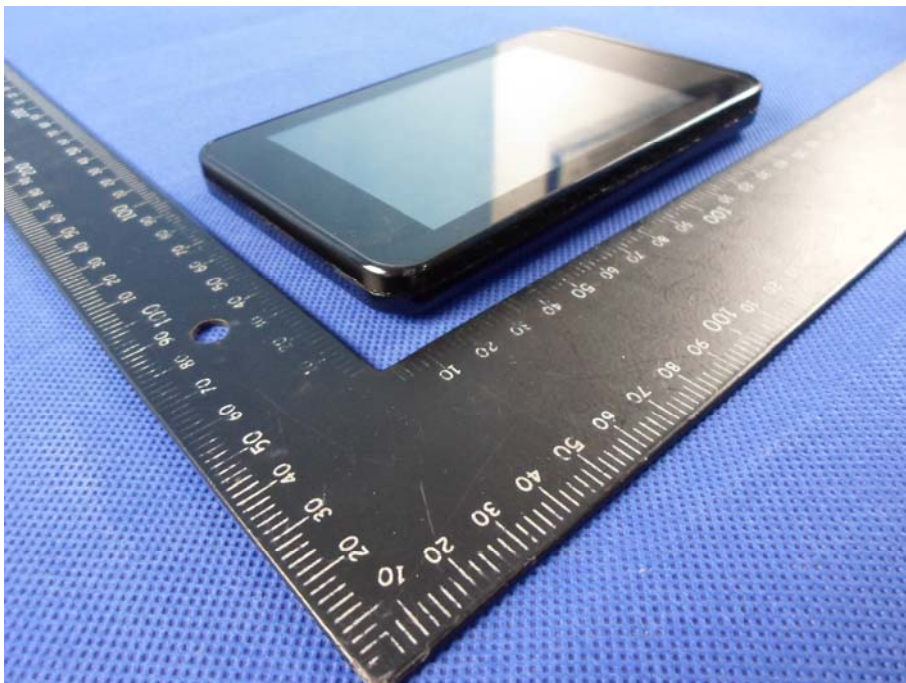


Photo 7



Photo 8 WiFi Module

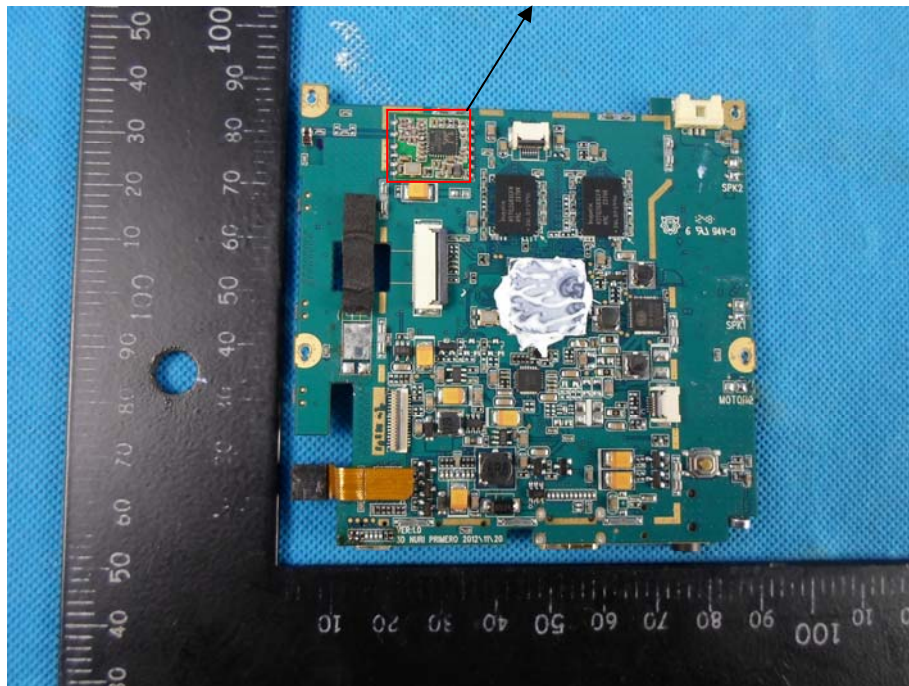


Photo 9

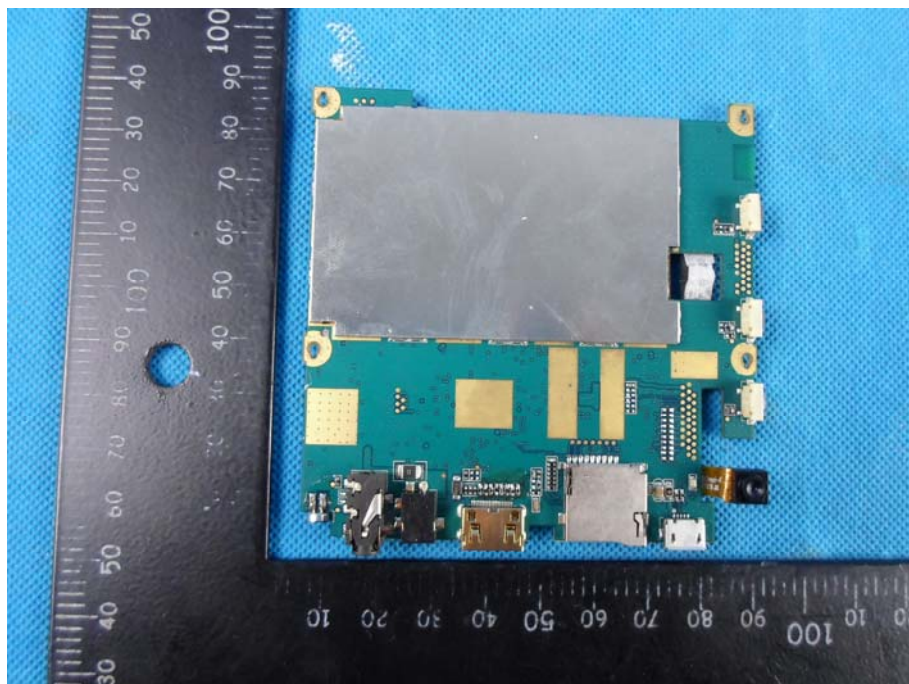


Photo 10

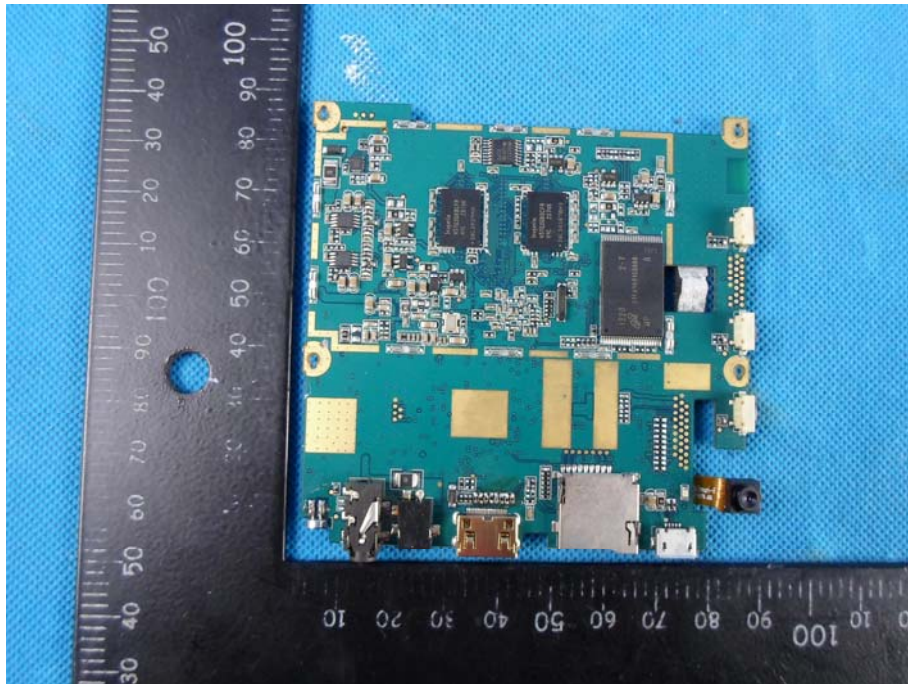


Photo 11 WiFi Module

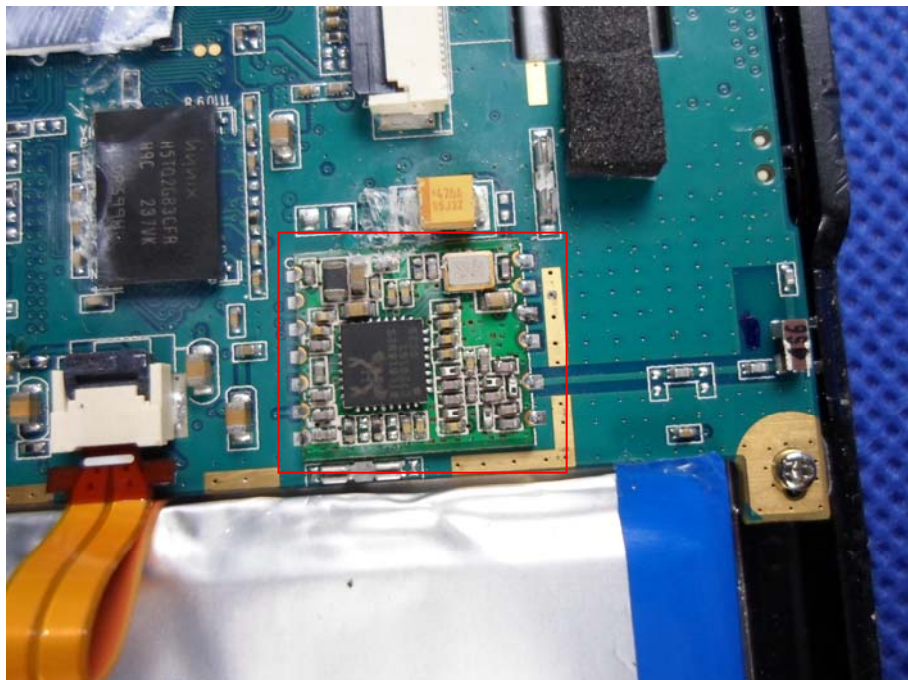


Photo 12 Antenna



Photo 13

