



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 87

### TEST REPORT

<b>APPLICANT</b>	PS Engineering, Inc.
	9800 Martel Road
	Lenoir City TN 37772 USA
<b>FCC ID</b>	QNEM760REM
<b>MODEL NUMBER</b>	M760REM
<b>PRODUCT DESCRIPTION</b>	VHF COM RADIO
<b>DATE SAMPLE RECEIVED</b>	3/22/2011
<b>DATE TESTED</b>	4/4/2011
<b>TESTED BY</b>	Nam Nguyen
<b>APPROVED BY</b>	Mario R. de Aranzeta
<b>TIMCO REPORT NO.</b>	557AUT11TestReport.doc
<b>TEST RESULTS</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01

## TABLE OF CONTENTS

STATEMENT OF COMPLIANCE .....	3
GENERAL INFORMATION .....	4
DUT Specification .....	4
EMC EQUIPMENT LIST .....	6
TEST PROCEDURE .....	7
RF POWER OUTPUT .....	8
MODULATION CHARACTERISTICS .....	9
VOICE MODULATED COMMUNICATION EQUIPMENT .....	10
FIELD STRENGTH OF SPURIOUS EMISSIONS .....	15
FREQUENCY STABILITY .....	16
POWER LINE CONDUCTED INTERFERENCE .....	17

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc



## STATEMENT OF COMPLIANCE

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards. No modifications were made to the equipment during testing in order to demonstrate compliance with these standards.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.

**Authorized by:** Mario R. de Aranzeta



**Signature:**

**Function:** Engineer

**Date:** 4/14/2011

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc

## GENERAL INFORMATION

### DUT Specification

The test results relate only to the items tested.	
DUT Description	VHF COM RADIO
FCC ID	QNEM760REM
Model Number	M760REM
Operating Frequency	TX: 118.000 – 136.975 MHz RX: 108.000 – 139.975 MHz
No. of Channels	760 channels – 25 kHz spacing
Modulation	AM
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input checked="" type="checkbox"/> DC Power 14 Vdc
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc



**Test Facility:** The test sites used by Timco Engineering Inc. for collecting radiated and conducted emission data are located at 849 NW State Road 45 Newberry, FL 32669 USA.

**Test Condition:** The DUT was tested in the laboratory in an environment with normal temperature and humidity. The temperature was 26°C with a relative humidity of 50%.

**Modification to the DUT:** No modification was made to the DUT during testing.

**Test Exercise (e.g. software description, test signal, etc.):** The DUT was placed in continuous transmit mode of operation.

**Applicable Standards:** TIA 603  
FCC CFR 47 Part 87

**Part 2.1033(c) (4)** Type of Emission: 6K00A3E

$$\begin{aligned}B_n &= 2M \\M &= 3000 \\B_n &= 2(3000) = 6k\end{aligned}$$

The authorized bandwidth is 25 kHz.

**Part 2.1033(c)(8)** DC Voltages and Current into Final Amplifier:  
POWER INPUT:

FINAL AMPLIFIER ONLY  
INPUT POWER – HIGH: (14 Vdc)(1.65A) = 23.10 Watts

**EMC EQUIPMENT LIST**

<b>Device</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal/Char Date</b>	<b>Due Date</b>
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 3/10/10	3/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/12
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc



## TEST PROCEDURE

**Power Line Conducted Interference:** The procedure used was TIA 603 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**Bandwidth 20 dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

**Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.

**Antenna Conducted Emissions:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

**Radiation Interference:** The test procedure used was ANSI STANDARD C63.4-2003 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc




## RF POWER OUTPUT

**Rule Part No.:** Part 2.1046(a), Part 87.131

### Test Requirements:

**Method of Measurement:** RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal supply voltage, and the transmitter properly adjusted the RF output measures:

### Test Setup Diagram:

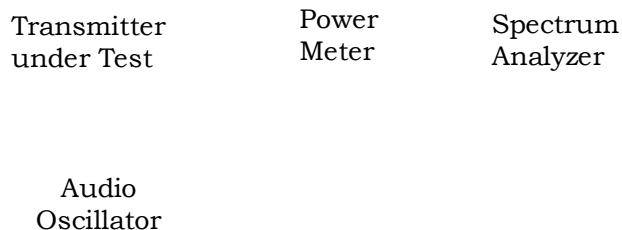

### Test Data:

OUTPUT POWER: HIGH – 5.4 Watts

Test Frequency (MHz)	Output (dBm)	Output (W)
118.00	37.35	5.4
127.00	37.36	5.4
136.97	37.09	5.1

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc

## MODULATION CHARACTERISTICS


**Rule Part No.:** Part 2.1047(a)(b)

### Test Requirements:

### Method of Measurement:

Audio frequency response

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with the exception that for an AM modulated transmitter the input was varied for a constant modulation of 20%. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

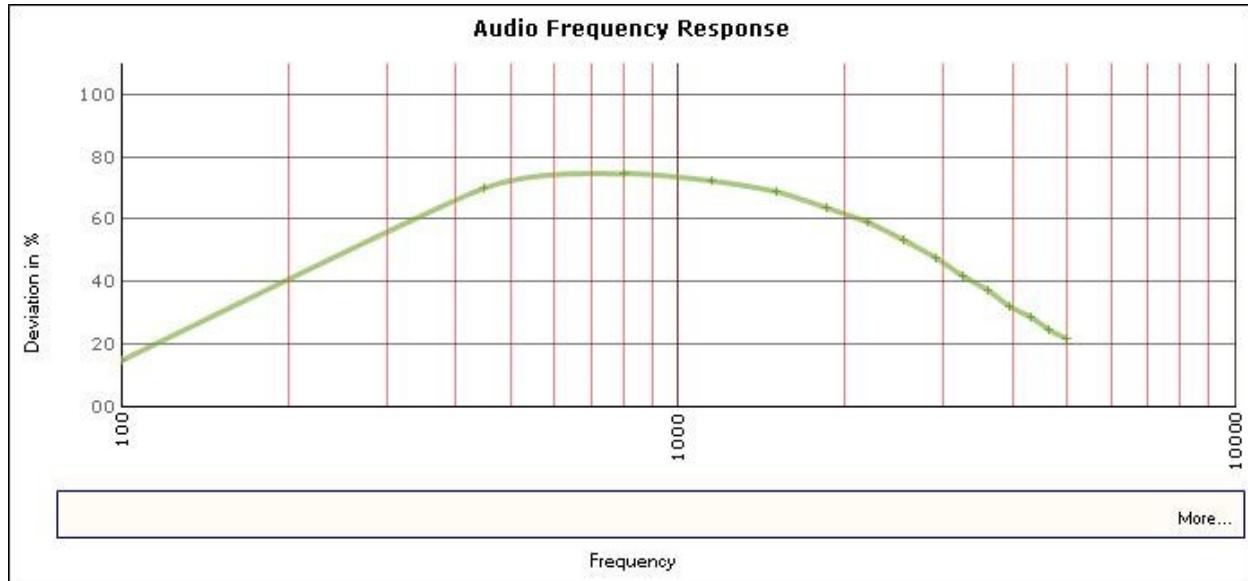

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc

## VOICE MODULATED COMMUNICATION EQUIPMENT


### AUDIO INPUT VERSUS MODULATION

**Rule Part No.:** Part 2.1047(b) & 87.141

#### Test Requirements:

**Method of Measurement:** Modulation cannot exceed 100%. The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz.

**Test data:** Please see the plots below

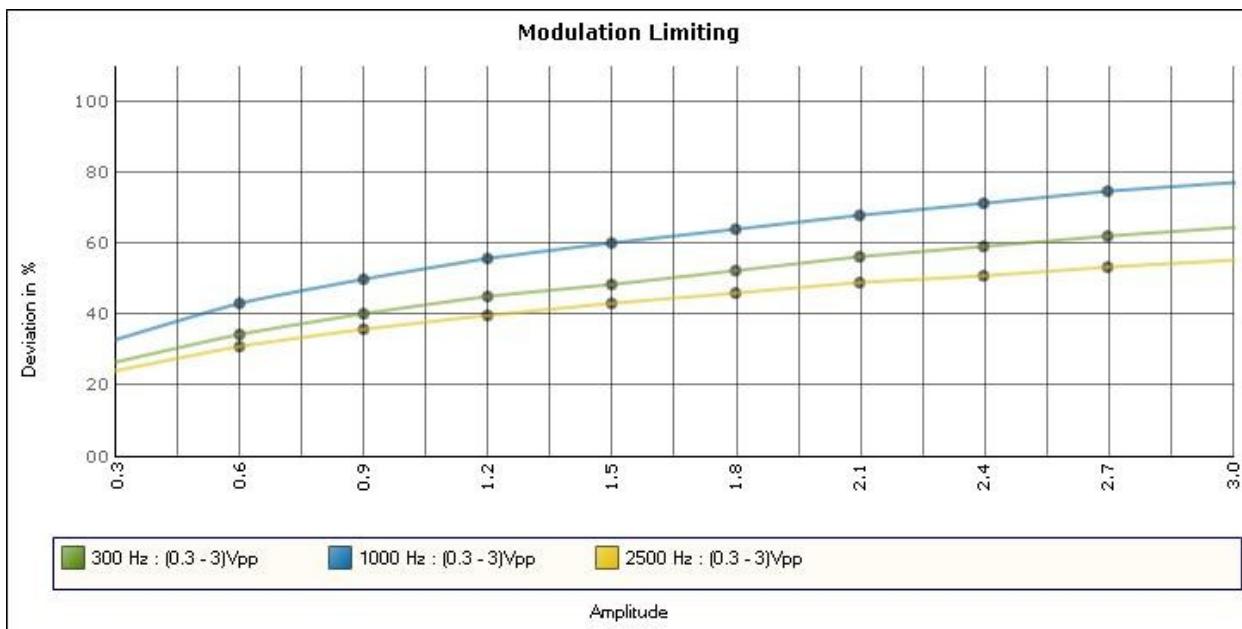

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc



## **AUDIO LOW PASS FILTER**

**Rule Part No.:** Part 2.1047(a), Part 87.141(F)

**Test Requirements:**

**Method of Measurement:**

**Test Data:** Not applicable.

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc


## OCCUPIED BANDWIDTH

**Rule Part No.:** Part 2.1049, Part 87.139

**Test Requirements:** Data in the plots show that on any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth: At least  $43 + 10\log(P)$  dB.

**Method of Measurement:**


**Test Setup Diagram:**

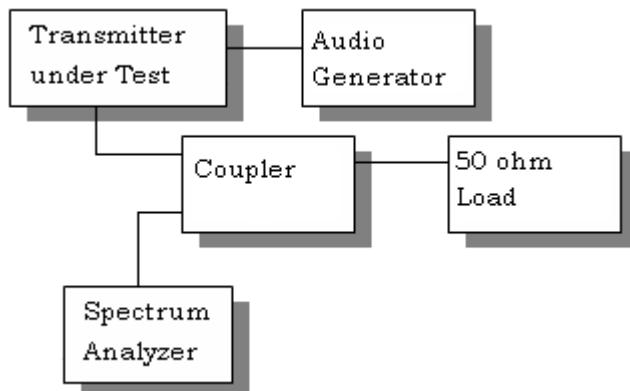

**Test Data:** See the plots below

The authorized BW is 25 kHz.

**NOTES:**

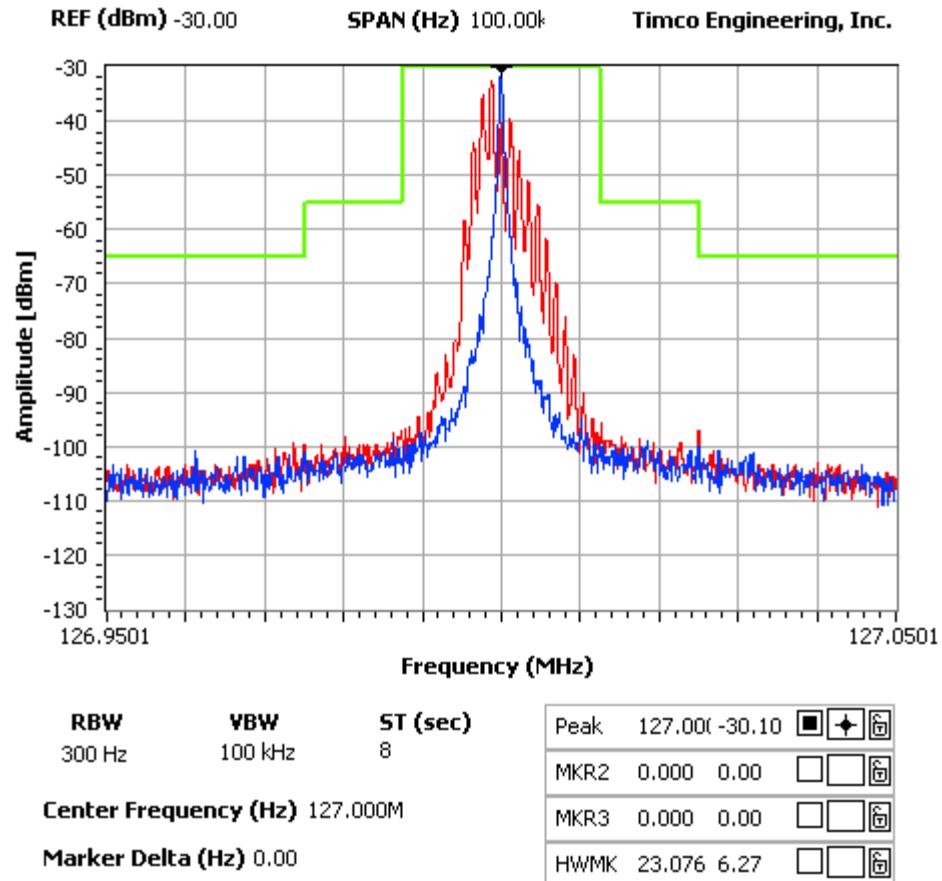 PS Engineering, Inc. - FCC ID: QNEM760REM  
 OCCUPIED BANDWIDTH PLOT


Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)**
**Rule Part No.:** Part 2.1051(a)

**Requirements:**  $43 + 10\log(pY) = 55 \text{ dB}$ 

**Method of Measurement:** The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	dBc
118.00	236.00	87.3
	354.00	81.3
	472.00	90.4
	590.00	89.7
	708.00	100.1
	826.00	98.9
	944.00	97.5
	1062.00	96.2
	1180.00	91.6

Tuned Frequency MHz	Emission Frequency MHz	dBc
127.00	254.00	87.3
	381.00	79.9
	508.00	91.1
	635.00	97.8
	762.00	94.2
	889.00	97.1
	1016.00	93.2
	1143.00	92.7
	1270.00	84.9

Tuned Frequency MHz	Emission Frequency MHz	dBc
136.98	273.95	79.6
	410.93	128.3
	547.90	94
	684.88	97.3
	821.85	99.8
	958.83	96.4
	1095.80	93.5
	1232.78	91.8
	1369.75	77.3

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc


## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rule Parts. No.:** Part 2.1053

**Test Requirements:** The FCC limits for radiated emissions are the same as previously stated for the conducted emissions.

**Method of Measurements:** The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method.

### Test Setup Diagram:

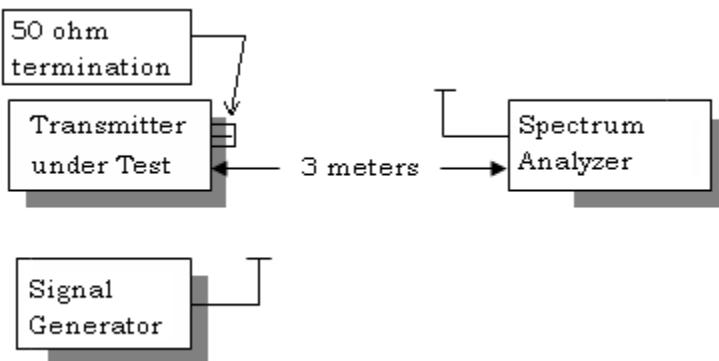

### Test Data:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
118.00		0
236.00	H	97.23
354.00	H	90.01
472.00	H	93.04
590.00	H	91.81
708.00	H	81.61
826.00	H	84.74
944.00	H	81.88
1062.00	H	90.07
1180.00	H	90.22

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
127.00		0
254.00	H	99.41
381.00	H	91.63
508.00	H	92.05
635.00	H	83.29
762.00	H	64.78
889.00	H	79.68
1016.00	H	84.12
1143.00	H	87.33
1270.00	H	86.34

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
136.98		0
273.95	H	98.21
410.93	H	93.39
547.90	H	91.55
684.88	H	77.49
821.85	H	83.03
958.83	H	75.38
1095.80	H	88.11
1232.78	H	87.08
1369.75	H	88.95

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc



## FREQUENCY STABILITY

**Rule Parts. No.:** Part 2.1055, Part 87.133

**Requirements:** Temperature range requirements: -30 to +50° C.  
Voltage Variation +, -15% ±20 PPM

**Method of Measurements:** ANSI/TIA 603-C: 2004

### Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		127.00041
TEMPERATURE °C	Frequency (MHz)	Frequency Stability (PPM)
-30°C	127.000229	1.48
-20°C	127.000168	1.00
-10°C	127.000088	0.37
-0°C	127.000076	0.27
10°C	127.000085	0.34
20°C	127.000079	0.30
30°C	127.000025	-0.13
40°C	127.000002	-0.31
50°C	126.999985	-0.44

Battery %	Frequency (MHz)	Frequency Stability (PPM)
-15%	127.000045	0.03
+15%	127.000047	0.04

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc



## POWER LINE CONDUCTED INTERFERENCE

**Rules Part No.:** Part 15.207

**Requirements:**

Frequency (MHz)	Quasi Peak Limits (dB $\mu$ V)	Average Limits (dB $\mu$ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

**Test Procedure:** ANSI C63.4-2003.

The spectrum was scanned from 0.15 to 30 MHz.

**Test Data:** Not Applicable

Applicant: PS Engineering, Inc.

FCC ID: QNEM760REM

Report: P\PS Engr\557AUT11\557AUT11TestReport.doc