



**FCC CFR47 PART 15 SUBPART C
IC RSS-210
CERTIFICATION
TEST REPORT**

FOR

Security Remote Control Transmitter

MODEL NUMBER: EV-QE319

**FCC ID: QNPEV-QE319
IC: 4676A-EVQE319**

REPORT NUMBER: 07U11470-1A

ISSUE DATE: MAY 06, 2009

Prepared for
**SECURE WIRELESS, INC.
5817 DRYDEN PLACE, SUITE D
CARLSBAD, CA 92008, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/25/07	Initial Issue	T. Chan
A	05/06/09	Updated applicant information from GE to Secure Wireless. Revised EUT Description, Model number, FCC ID, and IC ID.	A. Zaffar

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. SOFTWARE AND FIRMWARE	6
5.3. WORST-CASE CONFIGURATION AND MODE	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.5. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. 20dB BANDWIDTH	10
7.2. MAXIMUM MODULATION PERCENTAGE (M%)	13
7.3. LESS THAN 5 SECONDS PLOT	18
7.4. RADIATED EMISSIONS	20
7.4.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	20
7.4.2. RECEIVER SPURIOUS EMISSIONS LIMIT	25
8. SETUP PHOTOS	26

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SECURE WIRELESS, INC.
5817 DRYDEN PLACE, SUITE D
CARLSBAD, CA 92008, U.S.A.

EUT DESCRIPTION: Security Remote Control Transmitter

MODEL: EV-QE319

SERIAL NUMBER: 02067

DATE TESTED: NOVEMBER 15, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED
RSS-210 Issue 7	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

TOM CHEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15, IC RSS-210 and IC RSS-212.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment Type	319.5MHz Transmitter
Fundamental Frequency	319.508 MHz
Power Source	3V Battery, Type CR2032x1
Transmitting Time	Periodic $\leq$ 5 seconds
Manufacturer	Secure Wireless, Inc.

5.2. SOFTWARE AND FIRMWARE

EUT is modified to transmit continuously.

5.3. WORST-CASE CONFIGURATION AND MODE

EUT has been evaluated at X, Y, and Z-axis. The highest measured output power was at X-Axis.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The transmitter utilizes an internal loop fixed antenna with a maximum gain of -15 dBi.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

N/A


I/O CABLES

N/A

TEST SETUP

The EUT is stand-alone unit and is battery operated.

SETUP DIAGRAM FOR TESTS

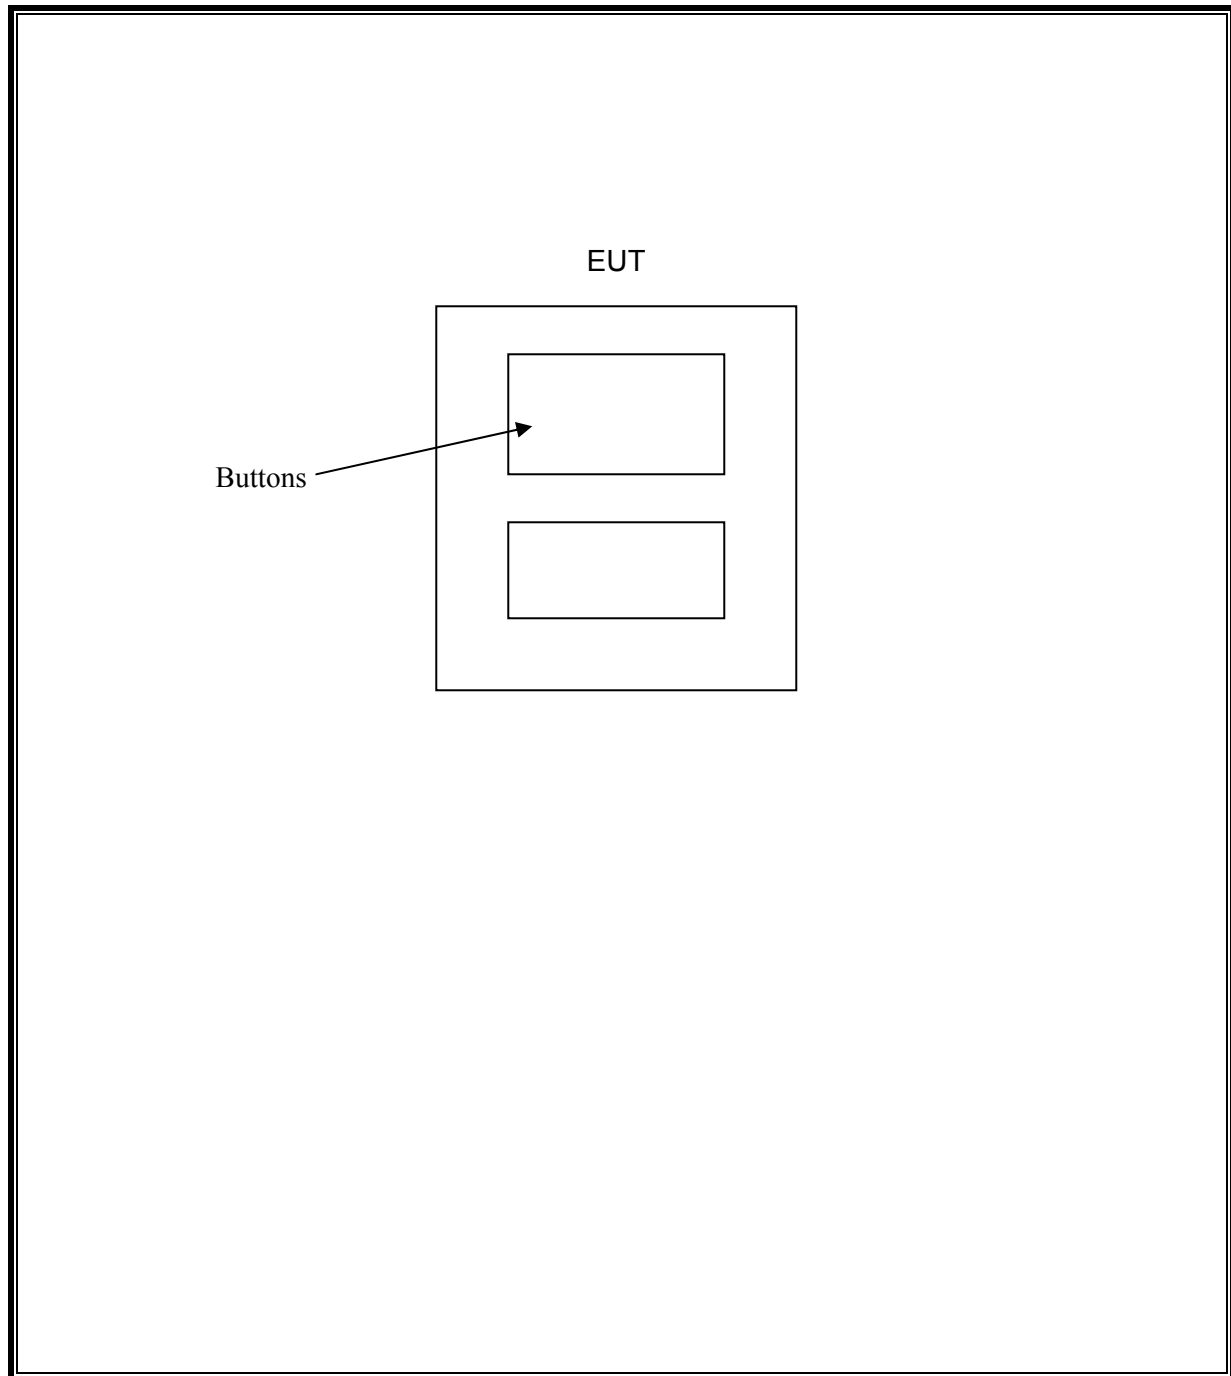

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	01/07/08
Spectrum Analyzer 9 Hz ~ 26.5 GHz	Agilent / HP	E4407B	US41444322	11/09/08
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29301	04/22/08
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00369	08/03/08
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A0022704	10/13/08
Quasi-Peak Adaptor	Agilent / HP	85650A	3145A01654	01/21/08
SA Display Section 2	Agilent / HP	85662A	2816A16696	04/07/08

7. LIMITS AND RESULTS

7.1. 20dB BANDWIDTH

LIMIT

§15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC RSS-210 Issue 6 A1.1.3 For the purpose of Section A1.1, the 99% bandwidth shall be no wider than 0.25% of the centre frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency. The test report shall indicate the measured bandwidth of the emission.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 10 KHz. The VBW is set to 100 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


No non-compliance noted:

Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
319	512.5	797.5	-285


99% Bandwidth

Frequency (MHz)	99% Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
319	97.3	797.5	-700.2

20dB BANDWIDTH

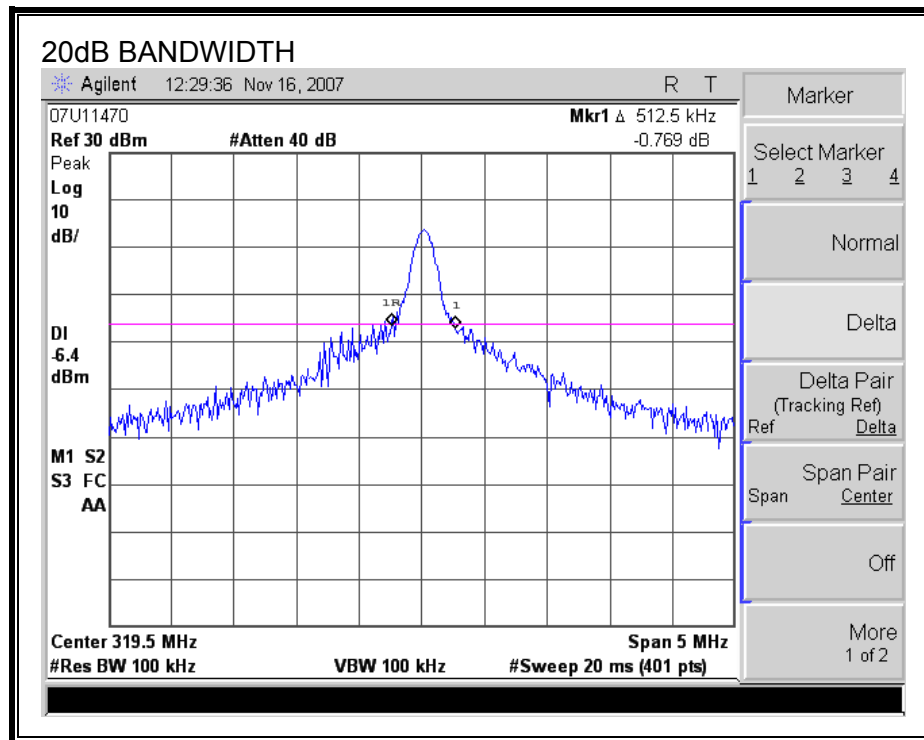

99% BANDWIDTH

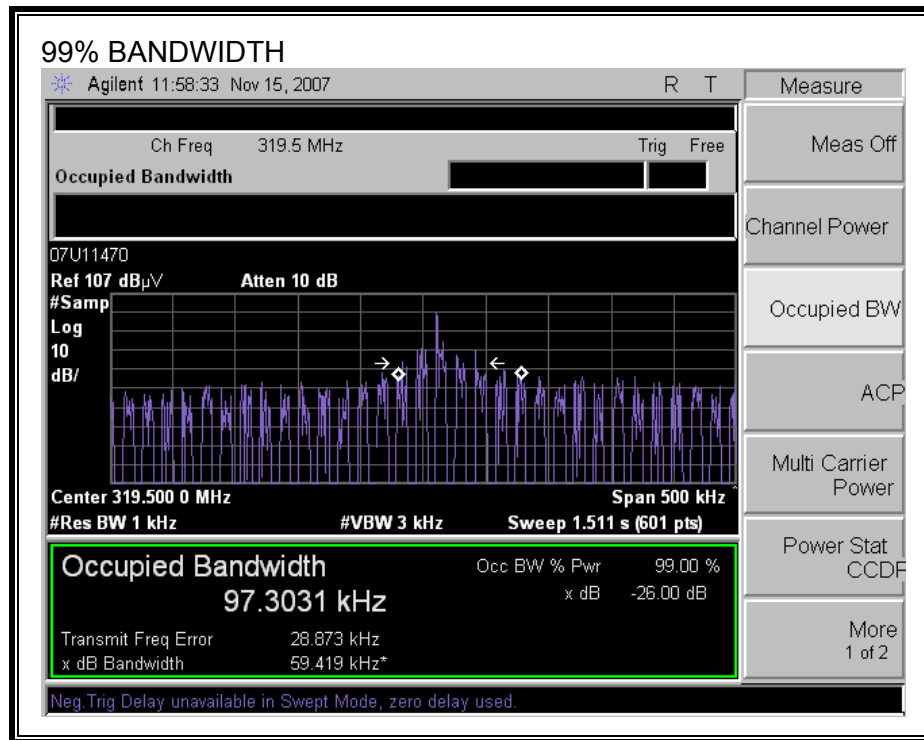

7.2. MAXIMUM MODULATION PERCENTAGE (M%)

LIMIT

§15.35 (c)

IC RSS-Gen Issue 1 §4.3 When the field strength (or envelope power) is not constant or when it is in pulses, and an averaging detector is specified to be used, the current or voltage over one complete pulse train, including blanking intervals, shall be averaged as long as the pulse train does not exceed 0.1 second. Where the pulse train exceeds 0.1 second, the average value (of field strength or output power) shall be determined over the 0.1-second interval during which the field strength is at its maximum.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

CALCULATION:

Average Reading = Peak Reading (dBuV/m) + $20 \log (\text{Duty Cycle})$, Where Duty Cycle is $(\# \text{ of long pulses} * \text{ long pulse width}) + (\# \text{ of short pulses} * \text{ short pulse width}) / 100$ or T


RESULTS

No non-compliance noted:


MAXIMUM MODULATION PERCENTAGE


One Period (ms)	Long Width (ms)	# of Long Pulses	Long Width (ms)	# of 2nd Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	1.067	1	0.466	1	0.13	57	0.091	-20.81

ONE PERIOD

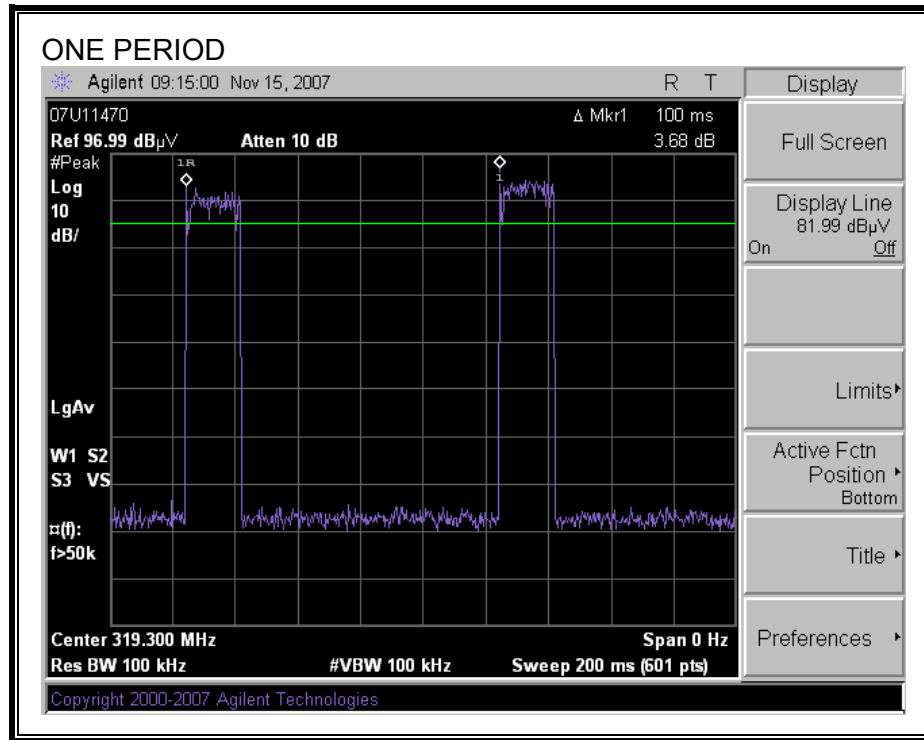


LONG PULSE WIDTH

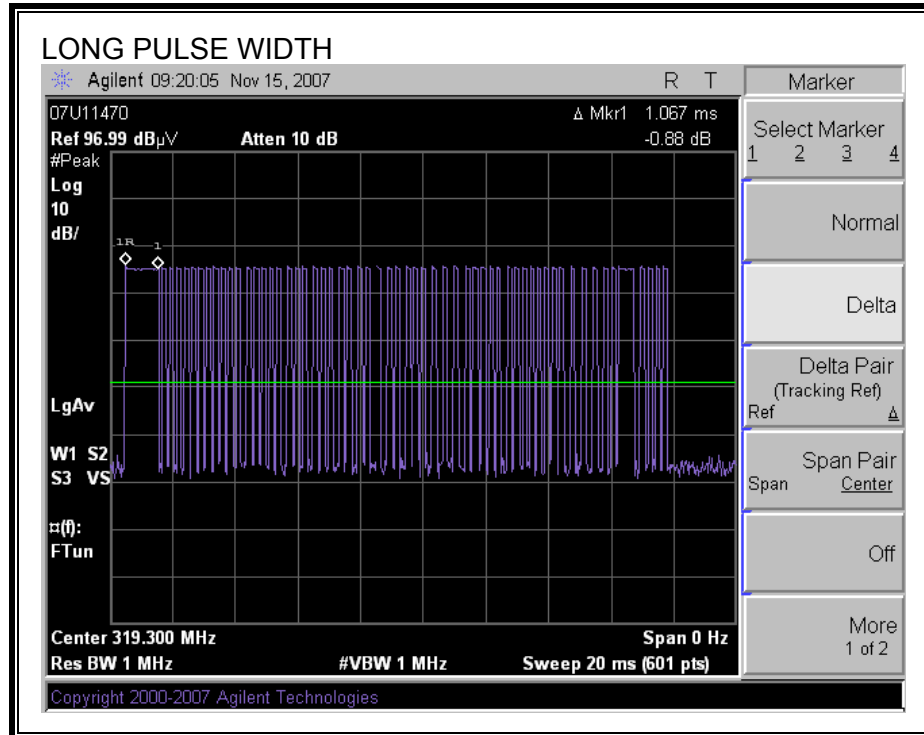

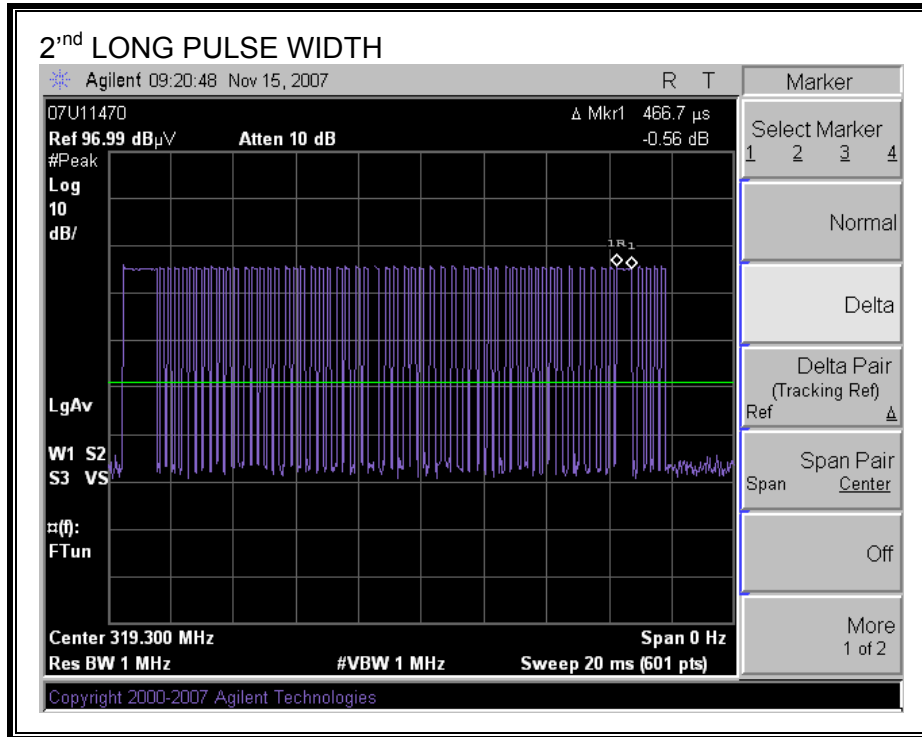

SHORT PULSE WIDTH

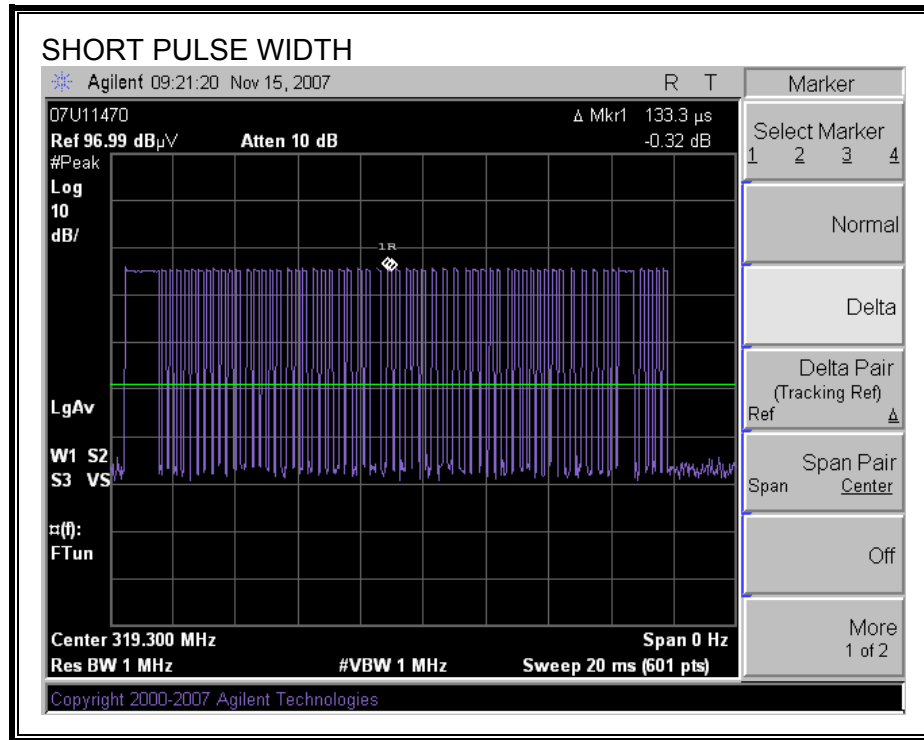

7.3. LESS THAN 5 SECONDS PLOT

LIMIT

§15.231 (a) (1); (a) (2)

RSS210 A1.1.1 (1) a manually operated transmitter shall employ a push-to-operate switch and be under manual control at all transmission times. When released, the transmitter shall cease transmission (holdover time of up to 5 seconds is permitted).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

RESULTS

No non-compliance noted:

Transmission begins approximately 0.7 second after activation and transmission ceases approximately 0.82 seconds after activation.

LESS THAN 5 SECONDS

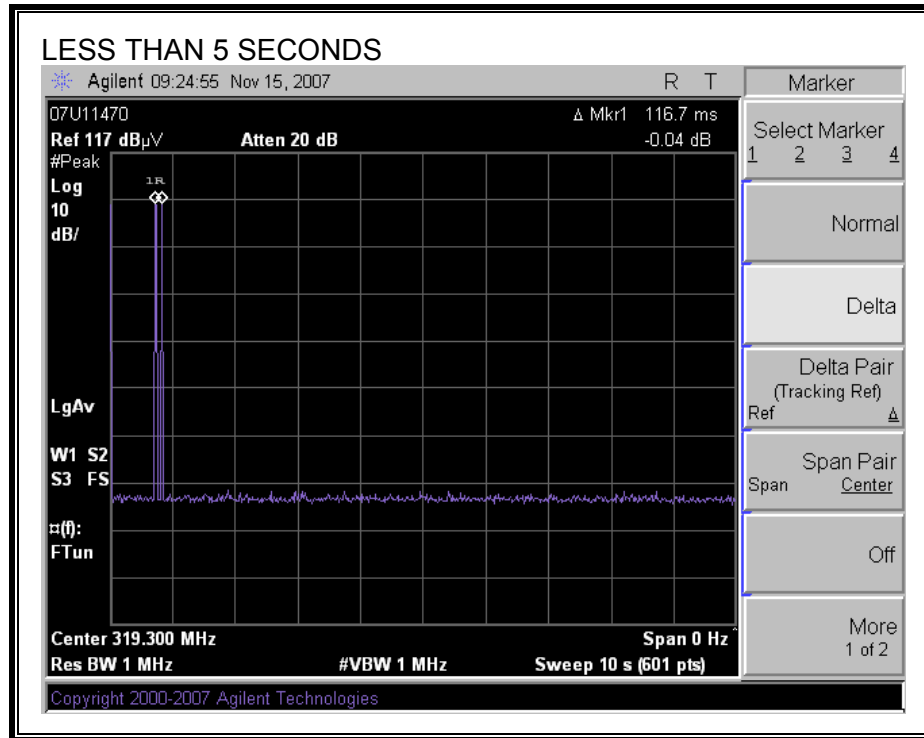

7.4. RADIATED EMISSIONS

7.4.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.231 (b) In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 ¹	125 to 375 ¹
174 - 260	3,750	375
260 - 470	3,750 to 12,500 ¹	375 to 1,250 ¹
Above 470	12,500	1,250

¹ Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(2)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

RSS210 Table 4 same as limits FCC applied above.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

FUNDAMENTAL, HARMONICS AND SPURIOUS EMISSIONS 30 – 1000 MHz



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP
47173 BENICIA STREET, FREMONT, CA 94538
PHONE: (510) 771-1000 FAX: (510) 661-0888

Project #: 07U11470
Report #: 07U11470-1
Date & Time: 11/15/2007
Test Engr: Tom Chen

Company: Secure Wireless, Inc. for GE security
EUT Description: GE Quick Exit 5012-01
Test Configuration: EUT only
Type of Test: FCC 15.231
Mode of Operation: Transmitting

M% = ((t1+t2+t3+...)/T)*100% = 9.10%

Av Reading = Pk Reading + 20*log(M%)
20*log(M%) = -20.81917

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
EUT At Y Position												
319.50	67.10	47.10	16.37	2.91	0.00	66.39	75.86	-9.47	3mV	0.00	1.00	P
319.50	66.80	46.80	16.37	2.91	0.00	66.09	75.86	-9.77	3mH	0.00	1.00	P
EUT At X Position												
319.50	51.93	31.93	16.37	2.91	0.00	51.22	75.86	-24.64	3mH	0.00	1.50	P
319.50	69.80	49.80	16.37	2.91	0.00	69.09	75.86	-6.77	3mV	0.00	1.00	P
EUT At Z Position												
319.50	66.60	46.60	16.37	2.91	0.00	65.88	75.86	-9.98	3mV	0.00	1.50	P
319.50	61.30	41.30	16.37	2.91	0.00	60.59	75.86	-15.27	3mH	0.00	2.50	P
X position is the worst case												
Harmonics and Spurious Emissions												
639.00	51.70	31.70	22.28	4.40	27.81	30.57	55.86	-25.29	3mV	0.00	1.00	P
639.00	59.20	39.20	22.28	4.40	27.81	38.07	55.86	-17.79	3mH	0.00	1.50	P
957.00	45.40	25.40	22.28	4.40	27.81	24.27	55.86	-31.59	3mV	0.00	1.00	P
957.00	50.10	30.10	22.28	4.40	27.81	28.97	55.86	-26.89	3mH	0.00	2.00	P

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Company: Secure Wireless, Inc.																
Project #: 07U11470																
Date: 11/15/07																
Test Engineer: Tom Chen																
Configuration: Stand Alone																
Mode: Continuous Transmit 319.508MHz																
Test Equipment:																
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit								
T60; S/N: 2238 @3m		T145 Agilent 3008A0050						FCC Class B								
Hi Frequency Cables																
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz						
				B-5m Chamber												
Average=Peak-Duty Cycle																
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
1.278	3.0	51.1	34.8	26.1	3.6	-35.9	0.0	0.0	44.9	28.6	74	54	-29.1	-25.4	V	
1.598	3.0	52.6	34.8	26.9	4.0	-35.7	0.0	0.0	47.8	30.1	74	54	-26.2	-23.9	V	
1.917	3.0	62.7	37.4	27.7	4.4	-35.5	0.0	0.0	59.4	34.1	74	54	-14.6	-19.9	V	
2.236	3.0	45.0	31.0	28.3	4.8	-35.2	0.0	0.0	42.9	28.9	74	54	-31.1	-25.1	V	
2.556	3.0	51.6	33.5	29.1	5.2	-35.1	0.0	0.0	50.7	32.6	74	54	-23.3	-21.4	V	
2.875	3.0	49.0	32.0	30.1	5.5	-35.2	0.0	0.0	49.3	32.3	74	54	-24.7	-21.7	V	
3.195	3.0	43.9	31.0	30.9	5.7	-35.1	0.0	0.0	45.3	32.4	74	54	-28.7	-21.6	V	
3.514	3.0	48.0	32.0	31.5	6.0	-35.0	0.0	0.0	50.5	34.5	74	54	-23.5	-19.5	V	
3.834	3.0	43.6	30.4	32.1	6.3	-34.8	0.0	0.0	47.2	34.0	74	54	-26.8	-20.0	V	
4.153	3.0	45.6	30.5	32.6	6.5	-34.8	0.0	0.0	49.9	34.8	74	54	-24.1	-19.2	V	
1.278	3.0	51.8	35.1	26.1	3.6	-35.9	0.0	0.0	45.6	28.9	74	54	-28.4	-25.1	H	
1.598	3.0	50.1	34.0	26.9	4.0	-35.7	0.0	0.0	45.3	29.2	74	54	-28.7	-24.8	H	
1.917	3.0	64.2	37.8	27.7	4.4	-35.5	0.0	0.0	60.9	34.5	74	54	-13.1	-19.5	H	
2.236	3.0	60.7	36.7	28.3	4.8	-35.2	0.0	0.0	58.6	34.6	74	54	-15.4	-19.4	H	
2.556	3.0	59.0	35.8	29.1	5.2	-35.1	0.0	0.0	58.1	34.9	74	54	-15.9	-19.1	H	
2.875	3.0	59.5	35.8	30.1	5.5	-35.2	0.0	0.0	59.8	36.1	74	54	-14.2	-17.9	H	
3.195	3.0	57.0	35.7	30.9	5.7	-35.1	0.0	0.0	58.4	37.1	74	54	-15.6	-16.9	H	
3.514	3.0	58.7	35.7	31.5	6.0	-35.0	0.0	0.0	61.2	38.2	74	54	-12.8	-15.8	H	
3.834	3.0	53.9	34.1	32.1	6.3	-34.8	0.0	0.0	57.5	37.7	74	54	-16.5	-16.3	H	
4.153	3.0	44.7	30.2	32.6	6.5	-34.8	0.0	0.0	49.0	34.5	74	54	-25.0	-19.5	H	

7.4.2. RECEIVER SPURIOUS EMISSIONS LIMIT

Not applicable, this EUT is transmitter only.

8. SETUP PHOTOS


RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION



X-AXIS ZOOM IN PHOTO



Y-AXIS ZOOM

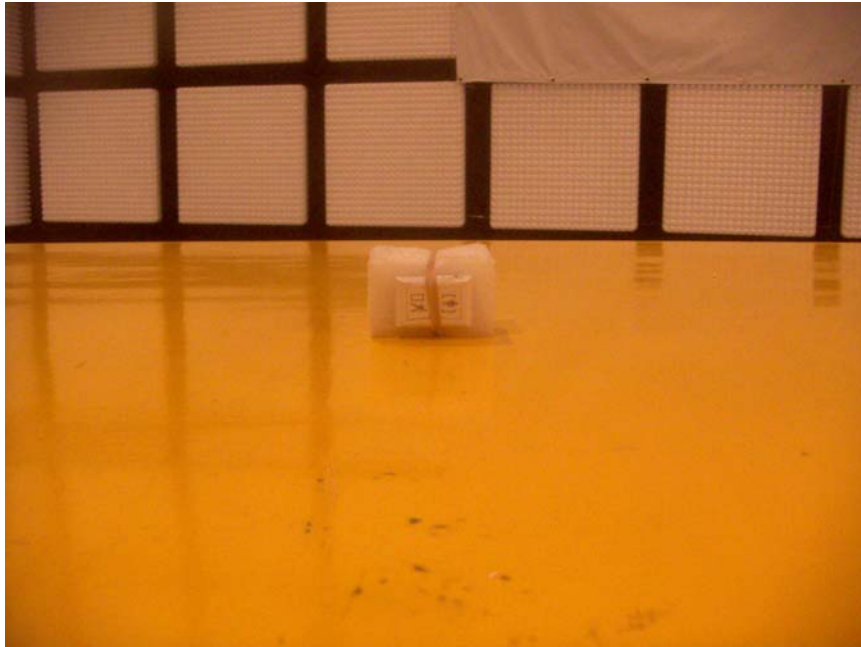



END OF REPORT