



Intertek Testing Services

ETL SEMKO

Test Mode = TX with Data Link and
connecting to PC

Report No.: 0214436

Tested By: Hong, Report No.: 0214436

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0898

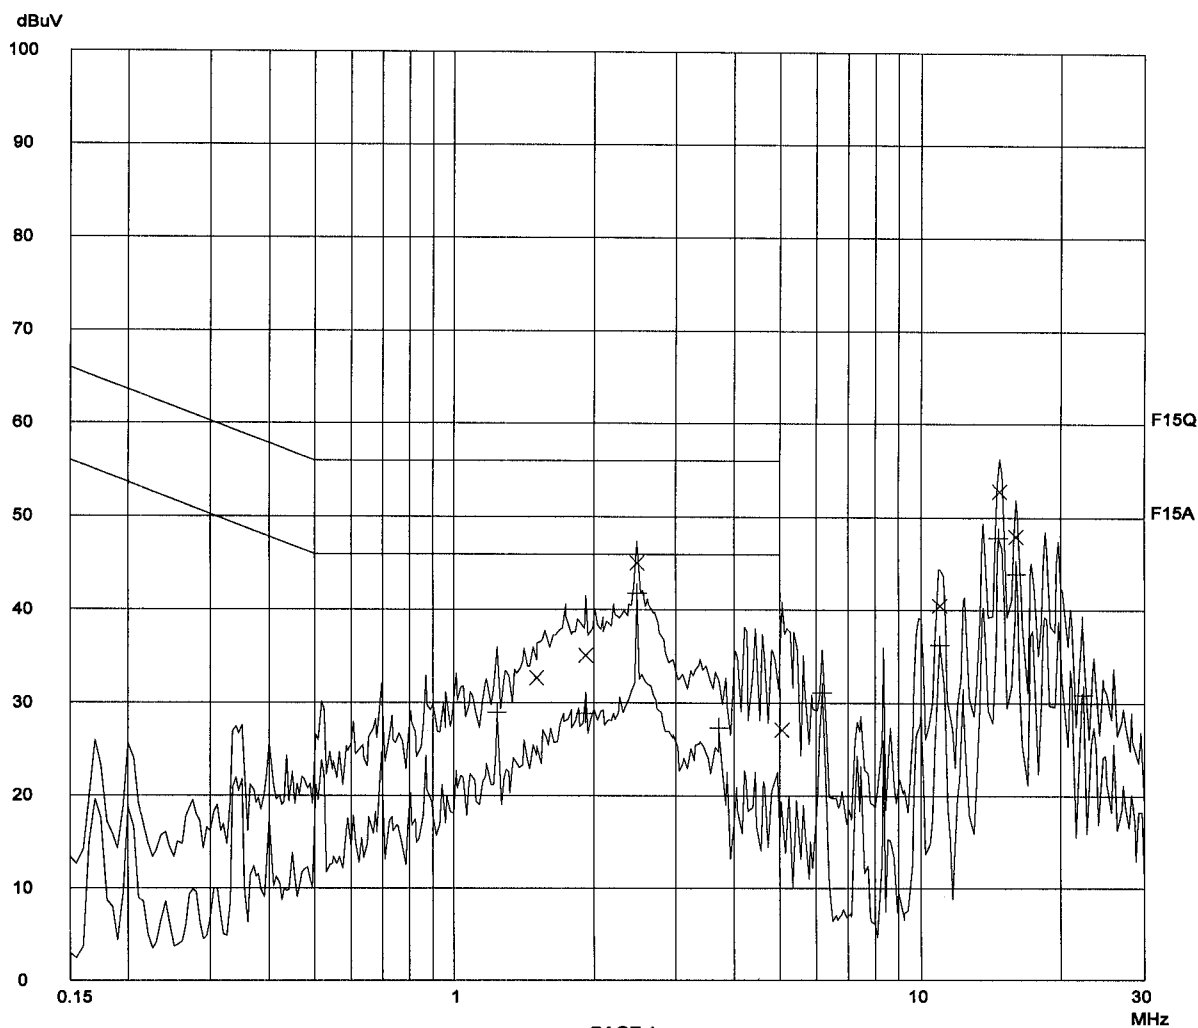



Intertek Testing Services

ETL SEMKO

Report No.: 0214436

Tested By: Hong, Report No.: 0214436

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement

Frequency QP Level QP Limit

MHz	dBuV	dBuV
-----	------	------

1.50500	32.6	56.0
1.91500	34.9	56.0
2.47000	45.0	56.0
5.07000	27.0	56.0
10.97000	40.5	60.0
14.75500	52.8	60.0
15.98500	48.0	60.0

Frequency AV Level AV Limit

MHz	dBuV	dBuV
-----	------	------

1.23500	28.9	46.0
1.91500	28.8	46.0
2.47000	41.7	46.0
3.70500	27.3	46.0
6.17500	31.0	50.0
10.97500	36.2	50.0
14.68000	47.8	50.0
15.98500	43.8	50.0
22.23500	30.8	50.0

* limit