

RADIO TEST REPORT

No. 415195R1-1

EQUIPMENT UNDER TEST

Equipment: Bluetooth wireless headset
Type / model: AX
Manufacturer: NEXTLINK.TO A/S
Tested by request of: NEXTLINK.TO A/S

SUMMARY

The equipment complies with the requirements of the following standards:

FCC, Part 15, Subpart B (2003) and Subpart C (2003);
RSS-210, Issue 5 (November 2001)

Industry Canada listed test facility No. IC 3481



Date of issue: December 9, 2004

Tested by:

Vladimir Bazhanov


Approved by:

Björn Rosenquist


This report may not be reproduced other than in full, except with the prior written approval by SEMKO.
Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden
Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com
Registered in Sweden: No SE556024059901, Registered office: As address

1000 – 13000 MHz, max peak at a distance of 3 m on the middle TX channel.
Emissions below 4000 MHz are attenuated by High-pass filter K&L 4410-X4500/18000-0.

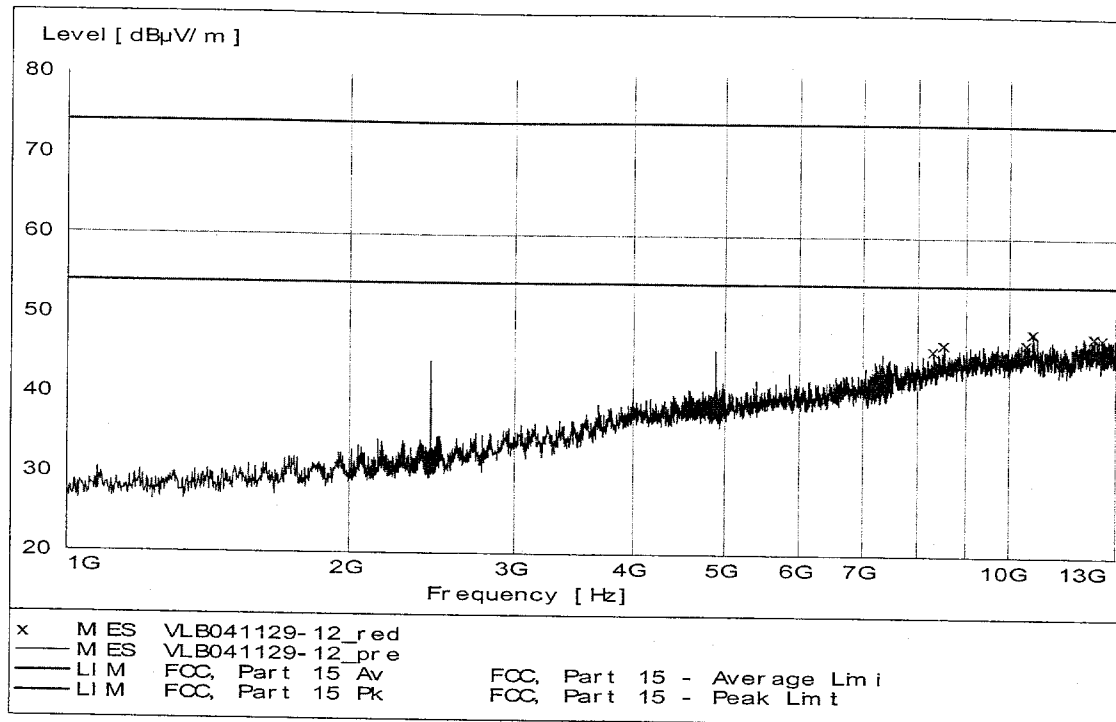


13000 – 18000 MHz, max peak at a distance of 3 m on the middle TX channel

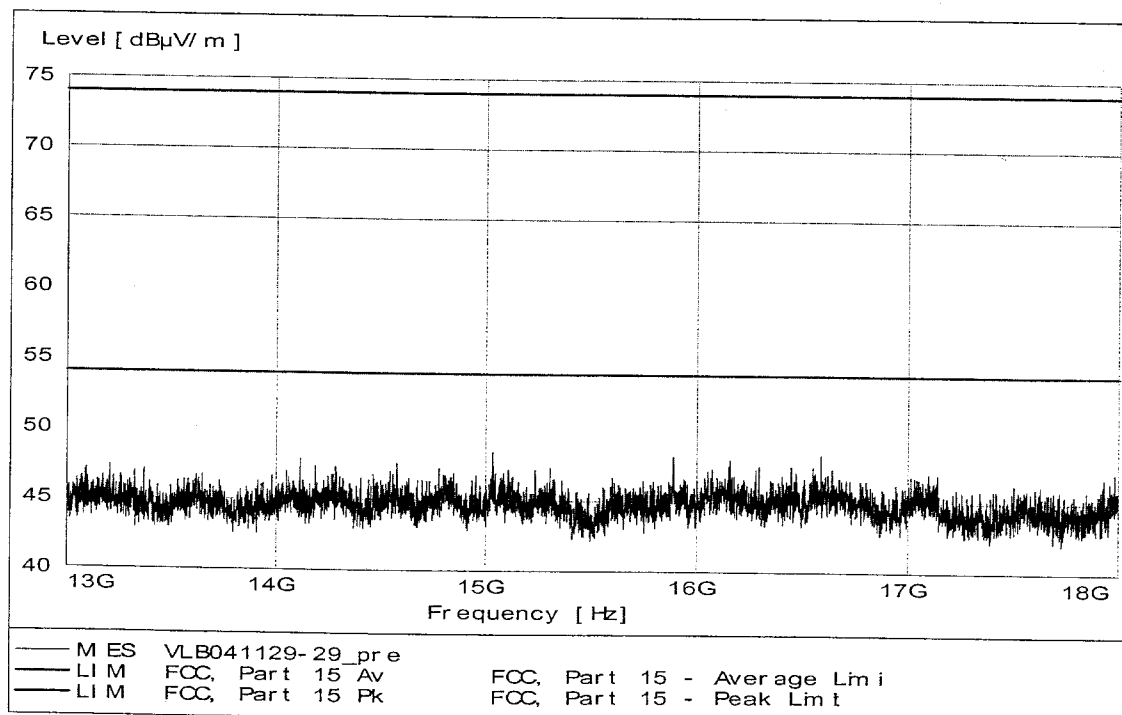


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden
 Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com
 Registered in Sweden: No SE556024059901, Registered office: As address

18000 – 26000 MHz, max peak at a distance of 3 m on the middle TX channel

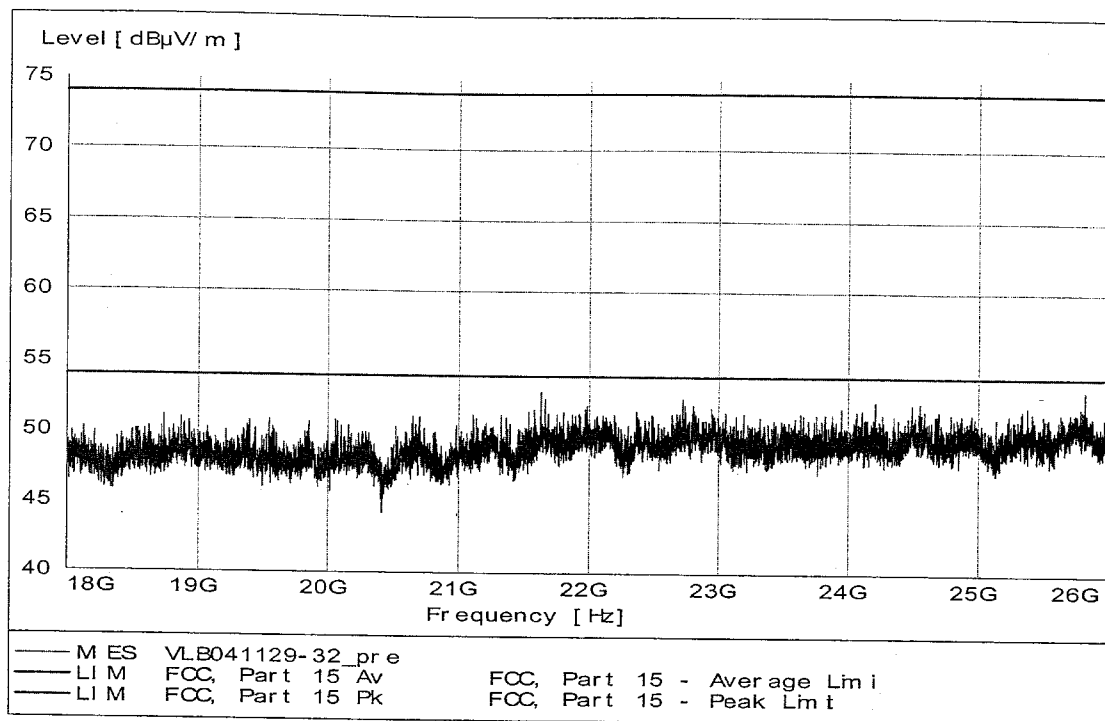

1000 – 13000 MHz, max peak at a distance of 3 m on the upper TX channel

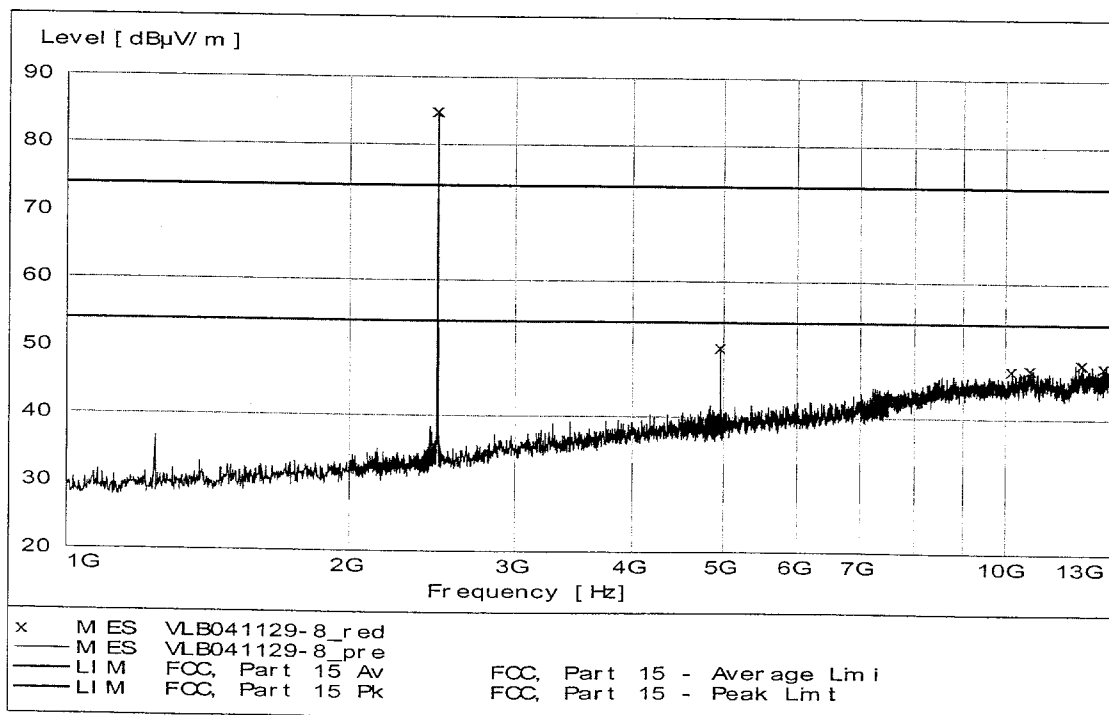


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden


Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

1000 – 13000 MHz, max peak at a distance of 3 m on the upper TX channel.
Emissions below 4000 MHz are attenuated by High-pass filter K&L 4410-X4500/18000-0.

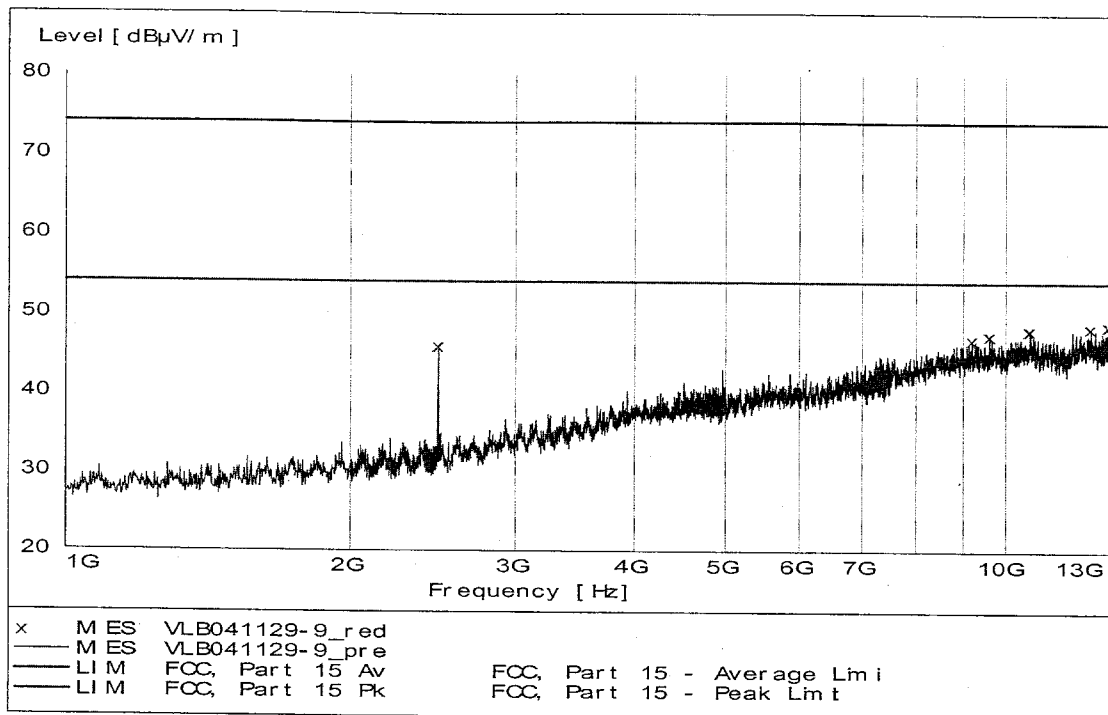

13000 – 18000 MHz, max peak at a distance of 3 m on the upper TX channel

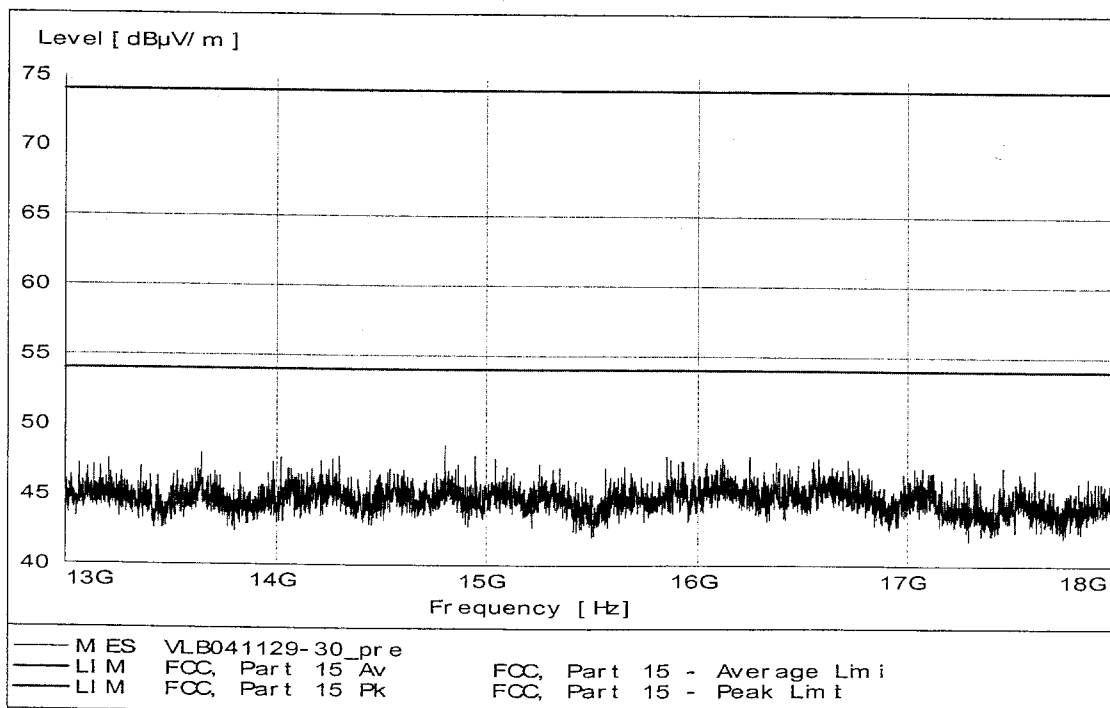


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden


Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

18000 – 26000 MHz, max peak at a distance of 3 m on the upper TX channel

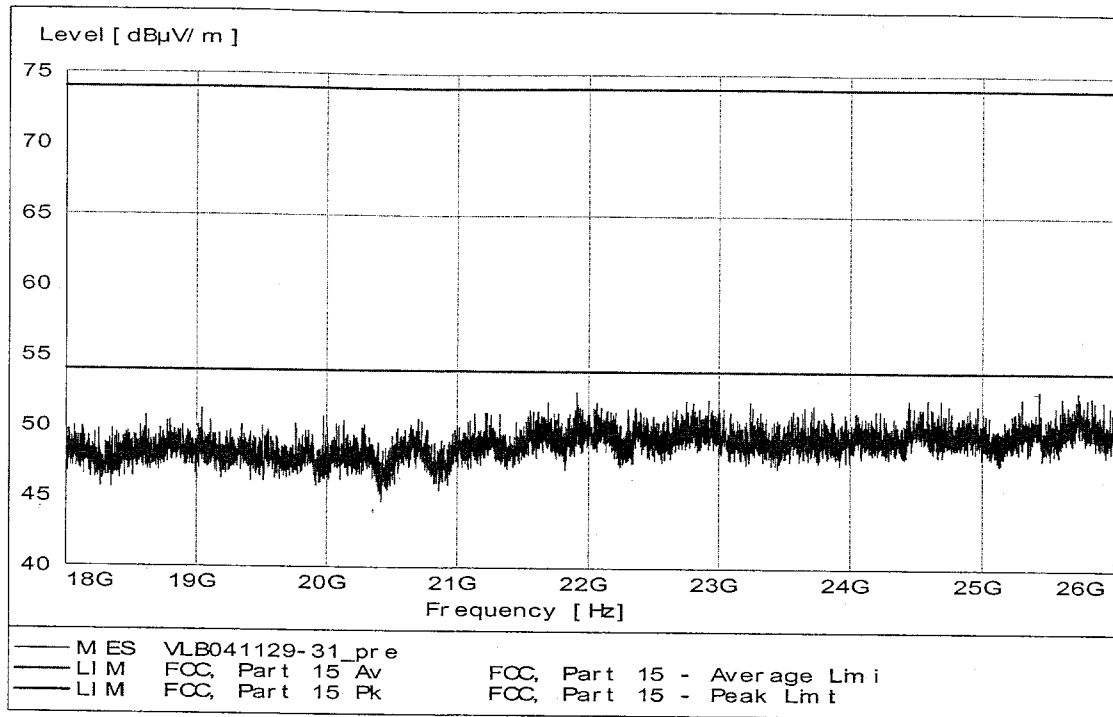

1000 – 13000 MHz, max peak at a distance of 3 m in the stand by mode

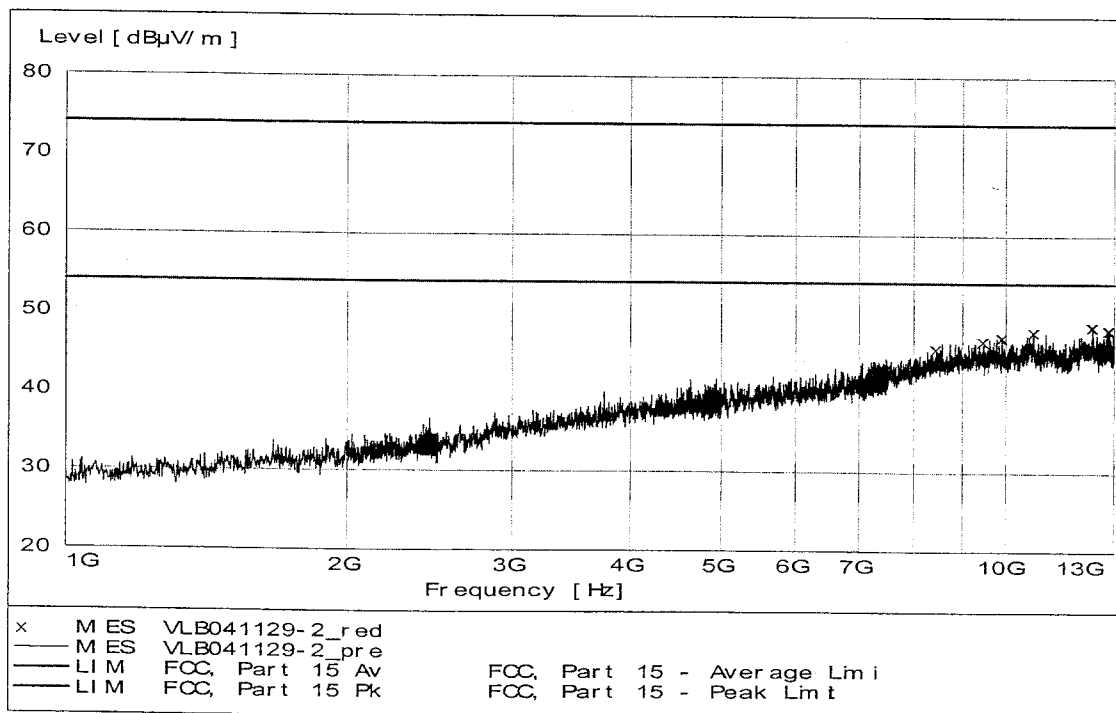

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

Data summary

Field strength of spurious emissions						
Frequency [MHz]	RBW [kHz]	Measured level		Limit		Note
		Peak [dB(μV/m)]	QP/AV [dB(μV/m)]	Peak [dB(μV/m)]	QP/AV [dB(μV/m)]	
30 – 88	120	<18	-	-	29,5	10 m distance
88 – 216	120	<12	-	-	33	"
216 – 960	120	<30	-	-	35,6	"
960 – 1000	120	<30	-	-	43,5	"
1201	1000	52	37	74	54	3 m distance
1220.5	1000	46	35	74	54	"
1240	1000	45	36	74	54	"
4804	1000	56	51	74	54	"
4882	1000	54	46	74	54	"
4960	1000	54	43	74	54	"
13000 – 18000	1000	<48	-	74	54	"
18000 – 26000	1000	<53	-	74	54	"

The limit at 10 m test distance was calculated using an inverse linear extrapolation factor 20 dB/decade.

Example calculation:


Measured level [dBμV/m] = Analyser reading [dBμV] + cable loss [dB] – preamplifier gain [dB] + antenna factor [1/m]



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden
 Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etisemko.com
 Registered in Sweden: No SE556024059901, Registered office: As address

APPENDIX – PHOTOS OF THE EUT

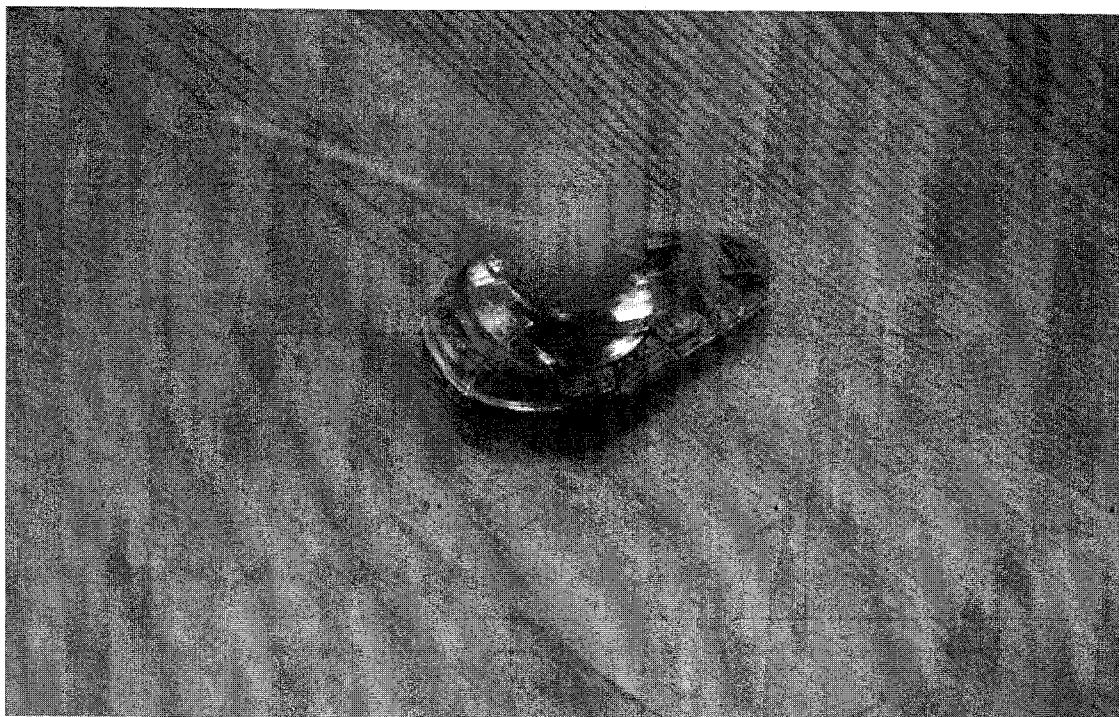

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

CONTENTS

	Page
1. Client information.....	3
2. Equipment under test (EUT).....	3
2.1 Identification of the EUT according to the manufacturer/client declaration.....	3
2.2 Additional hardware information about the EUT.....	3
2.3 Additional software information about the EUT.....	4
2.4 Peripheral equipment.....	4
2.5 Modifications during the test.....	4
3. Test specifications.....	5
3.1 Standards.....	5
3.2 Additions, deviations and exclusions from standards.....	5
3.3 Test set-up.....	5
3.4 Operating environment.....	5
4. Test summary.....	6
5. Peak output power.....	7
5.1 Test protocol.....	7
6. 20 dB Bandwidth.....	8
6.1 Test protocol.....	8
7. Carrier frequency separation.....	9
7.1 Test protocol.....	9
8. Number of hopping channels.....	10
8.1 Test protocol.....	10
9. Time of occupancy (Dwell time).....	11
9.1 Test protocol.....	11
10. Band edge compliance.....	12
10.1. Test set-up.....	12
10.2. Test protocol.....	12
11. Radiated spurious emissions.....	14
11.1 Operating environment.....	14
11.2 Measurement uncertainty.....	14
11.3 Test equipment.....	14
11.4 Measurement set-up.....	15
11.5 Test protocol.....	16
Appendix – Photos of the EUT.....	26



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

1. CLIENT INFORMATION

The EUT has been tested by request of

Company: NEXTLINK.TO A/S
Sandtoften 10
DK-2820 Gentofte
Denmark
Name of contact: Mr. Fatmir Kabashi

2. EQUIPMENT UNDER TEST (EUT)**2.1 Identification of the EUT according to the manufacturer/client declaration**

Equipment: Bluetooth wireless headset
Type/Model: AX
Brand name: Bluespoon AX
Serial number: -
FCC ID Number: -
Manufacturer: NEXTLINK.TO A/S
Rating/Supplying voltage: 3,6 V DC (2,9 – 5,5 V DC)
Rating RF output power: Power class 2
Antenna gain: 2 dBi
External antenna connector: NO
Operating temperature range: -10 to +55 °C
Frequency range: 2400 – 2483,5 MHz
Number of channels: 79
Modulation characteristics: GFSK
Stand by mode supported: Yes

2.2 Additional hardware information about the EUT

The EUT consists of the following unit:

Unit	Type and version	Serial number
Bluespoon AX	V1.00 A	-



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

2.3 Additional software information about the EUT

During the tests the EUT supported the following software:

Software	Version	Comment
Bluespoon AX	V1.00 A	-
Bluesuite	V1.20	CSR SW used to set the EUT in operating mode

2.4 Peripheral equipment

Peripheral equipment is defined as equipment needed for correct operation of the EUT during the tests, but not included as a part of the testing and evaluation of the EUT.

Equipment	Manufacturer / Type	Comment
CASIRA development kit	BA301199/1	CSR HW used to set the EUT in operating mode
Laptop PC	Toshiba / SA50-432	-

2.5 Modifications during the test

No modifications have been made during the tests.



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

3. TEST SPECIFICATIONS

3.1 Standards

FCC 47 CFR part 15 (2003) Subpart B – Unintentional radiators
FCC 47 CFR part 15 (2003) Subpart C – Intentional Radiators: §15.247 Operation within the bands 902-928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz.

Measurements methods according to ANSI C63.4-2003

RSS-210, Issue 5 (November 2001): Low Power Licence-Exempt Radio communication Devices.

3.2 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standards.

3.3 Test set-up

Measurement set-up for the out-of-band spurious emissions test is described in corresponding section. During other tests the EUT was connected to the spectrum analyser by cable.

3.4 Operating environment

If not additionally specified, the tests were performed under the following environmental conditions:

Air temperature: 22 - 23 °C
Relative humidity: 17 - 27 %



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

4. TEST SUMMARY

The results in this report apply only to the sample tested.

FCC reference	Test	Result	Note
15.247(b)	Peak output power	Pass	
15.247(a)	20 dB Bandwidth	Pass	
15.247(a)	Carrier frequency separation	Pass	
15.247(a)	Number of hopping frequencies (channels)	Pass	
15.247(a)	Time of occupancy (dwell time)	Pass	
15.247(c)	Band edge compliance	Pass	
15.247	Out of band spurious emissions, radiated	Pass	
15.247	Out of band spurious emissions, conducted	NA	
15B	Out of band spurious emissions, radiated	Pass	
15B	Conducted emission at AC port	NA	

NA = Not Applicable



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

5. PEAK OUTPUT POWER

5.1 Test protocol

Date of test: December 1, 2004

EUT mode of operation: TX, hopping on one channel.

Spectrum analyser settings:

Span: 10 MHz

RBW: 3 MHz

VBW: 3 MHz

Sweep time: 5 ms

Detector: Peak

Trace: Max Hold

Channel (MHz)	Peak Output Power (dBm)	Limit value (dBm)
2402	2.9	< 30
2441	2.9	
2480	2.8	

Measurement results are corrected for attenuation in the set-up configuration and antenna gain declared by the manufacturer.

Example calculation:

Peak output power [dBm] = Analyser reading [dBm] + cable loss [dB] + EUT antenna gain [dBi]



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

6. 20 dB BANDWIDTH**6.1 Test protocol**

Date of test: December 1, 2004

EUT mode of operation: TX, hopping on one channel.

Spectrum analyser settings:

Span: 1,5 MHz

RBW: 30 kHz

VBW: 30 kHz

Sweep time: 5 ms

Detector: Peak

Trace: Max Hold

Channel (MHz)	20 dB Bandwidth (kHz)	Limit value (kHz)
2402	697	< 1000
2441	694	
2480	700	



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

7. CARRIER FREQUENCY SEPARATION

7.1 Test protocol

Date of test: December 1, 2004

EUT mode of operation: TX and hopping on.

Spectrum analyser settings:

Span: 4 MHz
 RBW: 100 kHz
 VBW: 100 kHz
 Sweep time: Auto
 Detector: Peak
 Trace: Max Hold

Channel (MHz)	Carrier frequency separation from the next channel		Limit value (kHz)
	To the right (kHz)	To the left (kHz)	
2402	986	-	> 697
2441	1018	994	> 694
2480	-	1002	> 700

Limit = Result from the 20 dB Bandwidth measurements



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden
 Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com
 Registered in Sweden: No SE556024059901, Registered office: As address

8. NUMBER OF HOPPING CHANNELS**8.1 Test protocol**

Date of test: December 1, 2004

EUT mode of operation: TX and hopping on.

Spectrum analyser settings:

Start frequency: 2400 MHz

Stop frequency: 2484 MHz

RBW: 100 kHz

VBW: 100 kHz

Sweep time: Auto

Detector: Peak

Trace: Max Hold

Number of hopping channels	Limit value
79	> 75



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

9. TIME OF OCCUPANCY (DWELL TIME)

9.1 Test protocol

Date of test: December 1, 2004

EUT mode of operation: TX and hopping on.

Spectrum analyzer settings:

Determination of transmitting time T

Span: 0 Hz

RBW: 1 MHz

VBW: 1 MHz

Sweep time: 0,4 ms

Single sweep

Detector: Peak

Trace: Clear/Write

Trigger: Video

Determination of the number of times n the channel is active during the sweep time of 10 s

RBW: 100 kHz

VBW: 100 kHz

Sweep time: 10 s

Test parameters	Channel (MHz)			Limit value (s)
	2402	2441	2480	
T (μs)	209.7	209.7	210.5	-
n	20	20	20	-
Dwell time (s) = $T \cdot 10^{-6} \cdot 3,16 \cdot n$	0.01	0.01	0.01	< 0,4



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

10. BAND EDGE COMPLIANCE

10.1. Test set-up


See Section 11.4.

10.2. Test protocol

Date of test: November 29, 2004

Parameter settings	Compliance at 2400 MHz	Compliance at 2483,5 MHz
Start frequency (MHz):	2390	2472
Stop frequency (MHz):	2410	2492
RBW (kHz):	100	100
VBW (kHz):	10	10
Sweep time (ms):	5	5
Detector:	Average	Average
Trace:	Max Hold	Max Hold

Band edge compliance at 2400 MHz

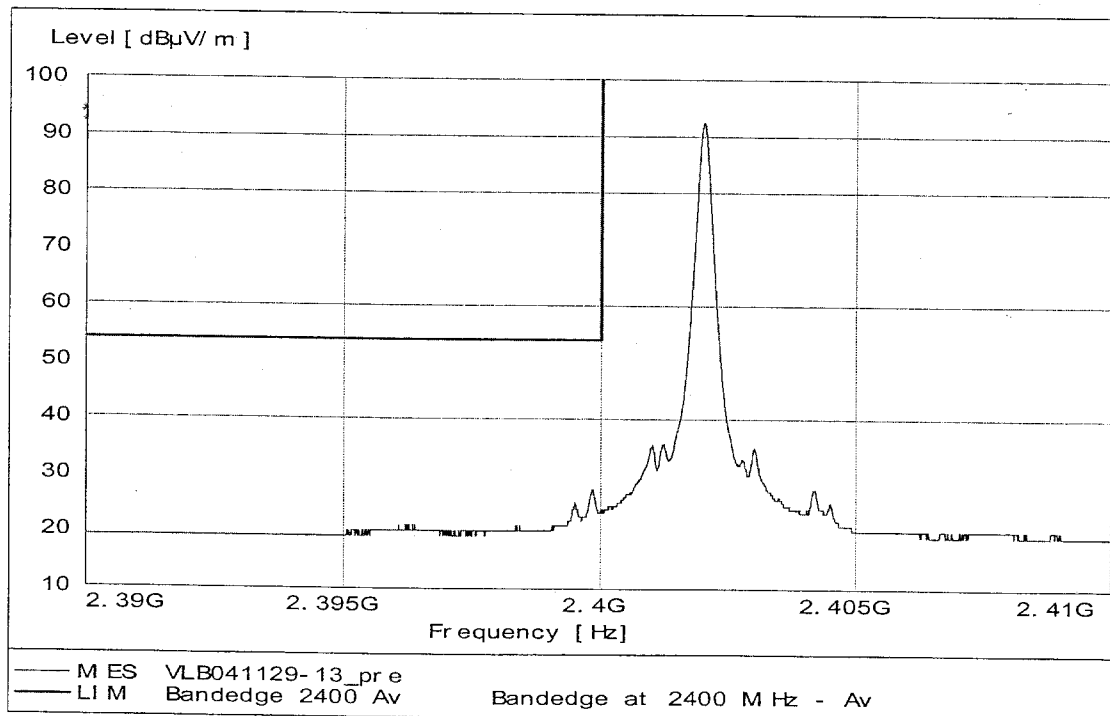


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

Band edge compliance at 2483,5 MHz

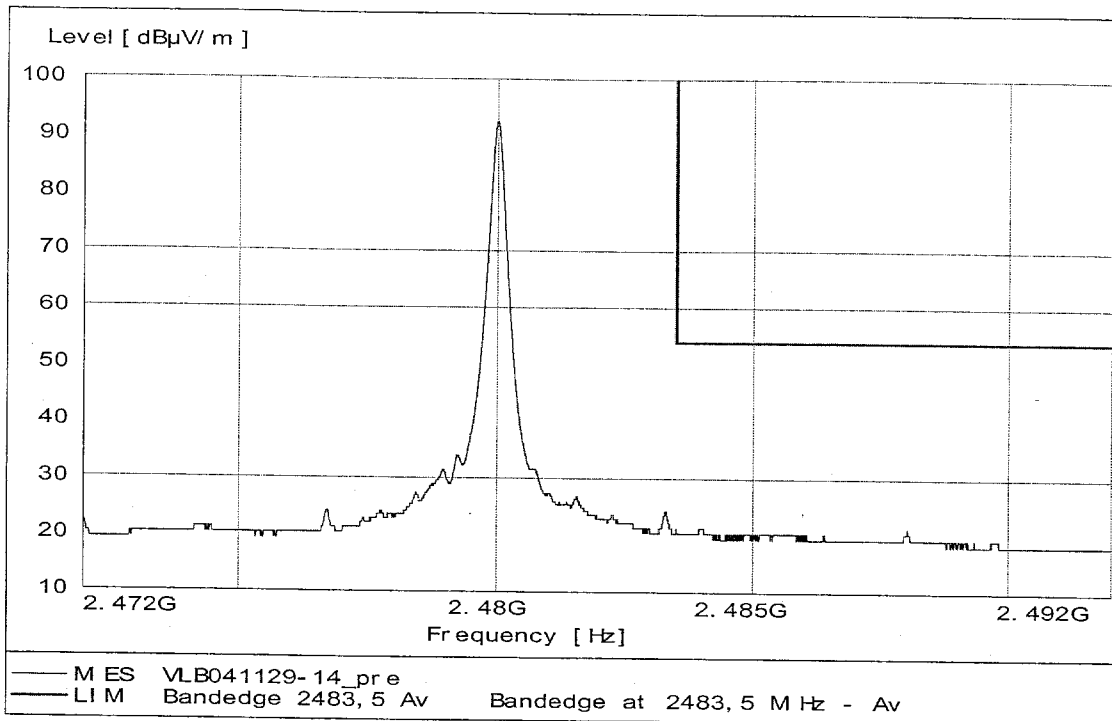

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

11. RADIATED SPURIOUS EMISSIONS

11.1 Operating environment

Temperature: 22 °C (10 – 40 °C)
 Relative Humidity: 17 – 27 % (10 - 90 %)

11.2 Measurement uncertainty

Radiated disturbance electric field intensity, 30 – 1000 MHz: $\pm 4,6$ dB
 Radiated disturbance electric field intensity, 1000 – 18000 MHz: $\pm 6,0$ dB

The measurement uncertainty describes the overall uncertainty of the given measured value during operation of the EUT.

Measurement uncertainty is calculated in accordance with EA-4/02-1997.
 The measurement uncertainty is given with a confidence of 95%.

11.3 Test equipment

Equipment	Manufacturer	Type	SEMKO No.
<i>Test site: Semi-anechoic shielded chamber, 10 x 20 x 8,5 m (W x L x H)</i>			30300
Software:	Rohde & Schwarz	ES-K1, V1.60	
Measurement receiver:	Rohde & Schwarz	ESAI	2973/2974
Antenna amplifier:	SEMKO		7992/7993
Antenna, bilog:	Chase	CBL6111A	8578
<i>Test site: Bluetooth anechoic shielded chamber, 3,7 x 7,0 x 2,4 m (W x L x H)</i>			12285
Software:	Rohde & Schwarz	ES-K1, V1.70	
Signal analyser:	Rohde & Schwarz	FSIQ 40	40023
Preamplifier:	MITEQ	AFS6/AFS44	12335
Antennas:			
Double Ridge Guide Horn	EMCO	3115	4936
Horn antenna	EMCO	3160-08	30099
Horn antenna	EMCO	3160-09	30101
High pass filter:	K&L	4410-X4500/18000-0	5133



Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

11.4 Measurement set-up


Test site: Semi-anechoic shielded chamber (30 – 1000 MHz)

The radiated disturbance electric field intensity was measured in a semi-anechoic chamber at a distance of 10 m and the EUT was placed on a non-metallic table, 0,8 m above the reference ground plane. The specified test mode was enabled. Test set-up photos are given below.

An overview sweep with peak detection of the electric field intensity was performed with the measurement receiver in max-hold and with the antenna placed 1,5 m, 2,5 m and 3,5 m above the floor. The polarisation was horizontal and vertical. The measurements were repeated with the EUT rotated in 90-degree steps.

At the frequencies where high disturbance levels were found a search for max disturbance level was performed. With the EUT and antenna in the worst-case configuration new measurements with quasi-peak detector were carried out.

Test set-up photos:

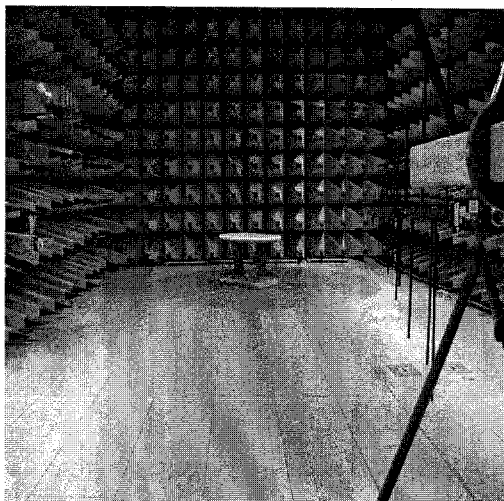

Test site: Bluetooth anechoic shielded chamber (1 – 26 GHz)

In the Bluetooth anechoic chamber the EUT was placed on a non-metallic table, 1,4 m above the floor. The radiated disturbance electric field intensity was measured at a distance of 3 m. The specified test mode was enabled.

An overview sweep with peak detection of the electric field intensity was performed with the spectrum analyser in max-hold and with the antenna placed 1,4 m above the floor. The polarisation was horizontal and vertical. The measurements were repeated with the EUT rotated in 90-degree steps. At the frequencies where high disturbance levels were found a search for max disturbance level was performed. With the EUT and antenna in the worst-case configuration new measurements with average detector were carried out. Test set-up photo is shown below.




Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

Test set-up photo:

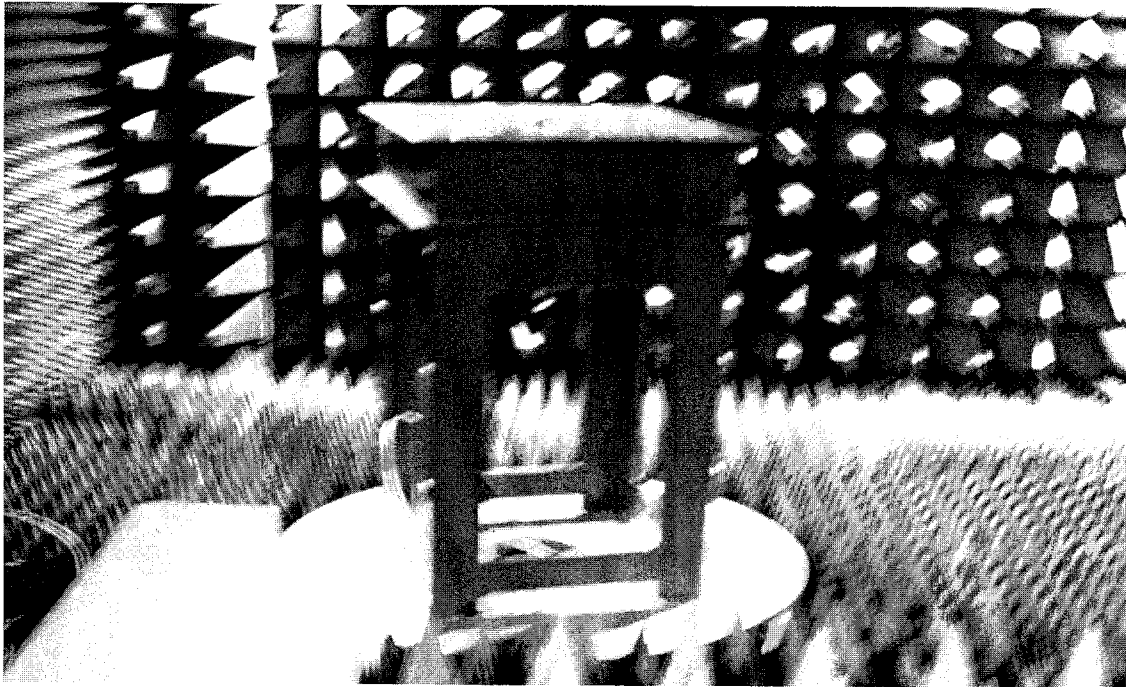


11.5 Test protocol

Semi-anechoic shielded chamber

Date of test: December 1, 2004

30 – 1000 MHz, max peak at a distance of 10 m on the lower TX channel

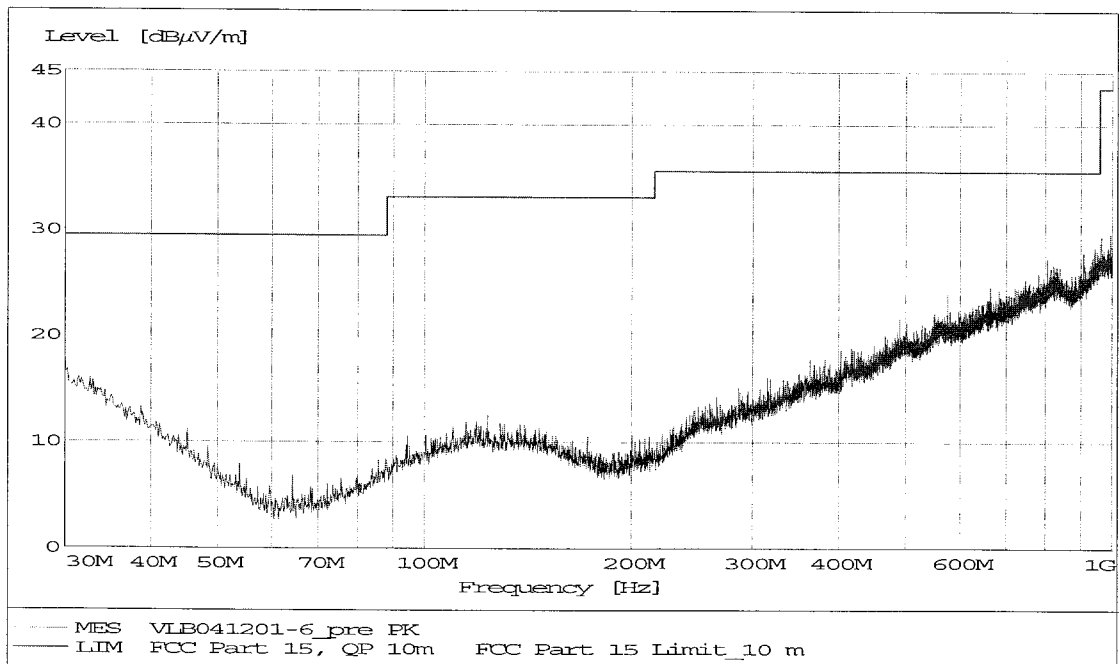

Intertek Semko AB


Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com


Registered in Sweden: No SE556024059901, Registered office: As address



30 – 1000 MHz, max peak at a distance of 10 m on the middle TX channel

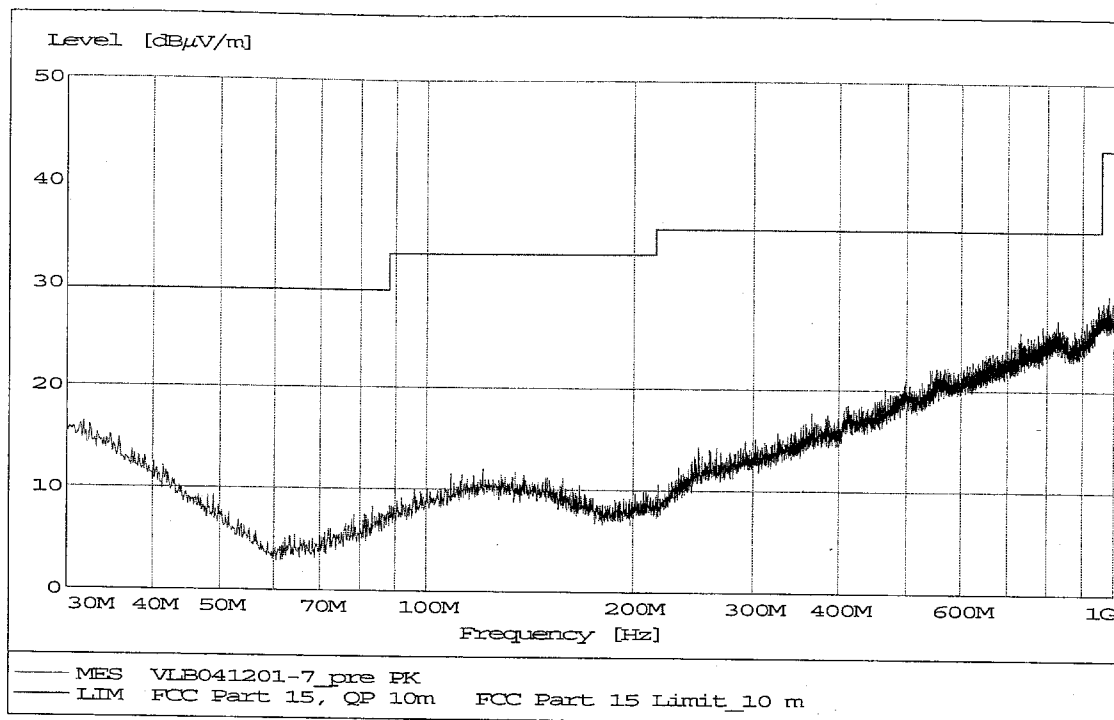

30 – 1000 MHz, max peak at a distance of 10 m on the upper TX channel

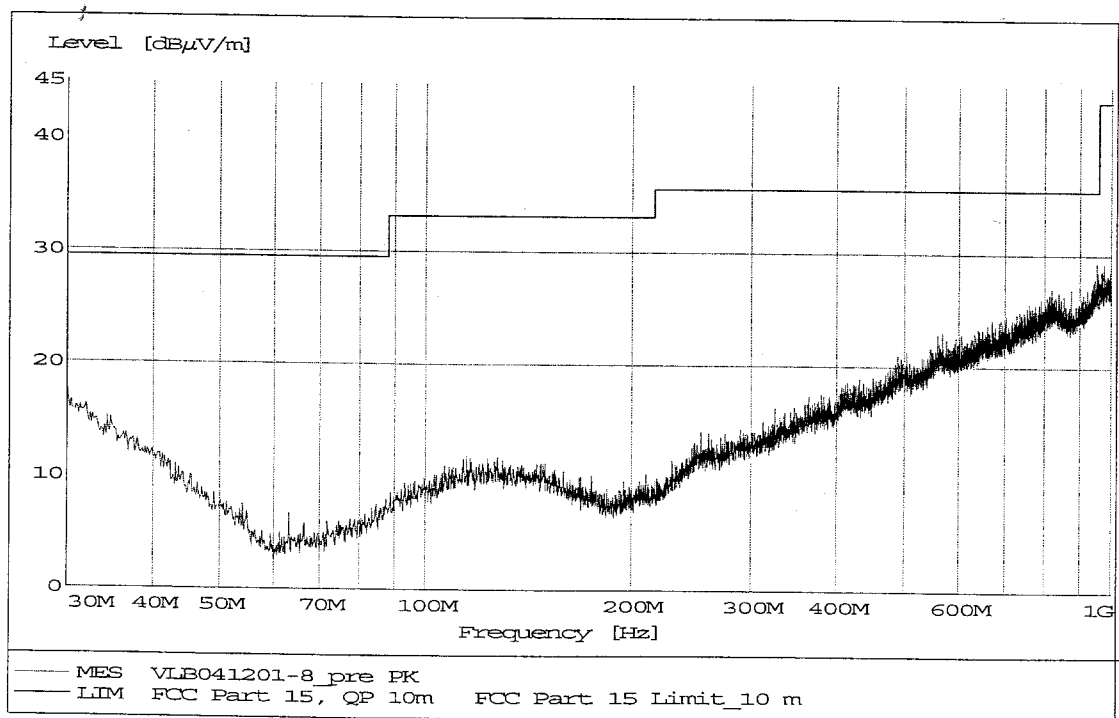


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address


30 – 1000 MHz, max peak at a distance of 10 m in the stand by mode

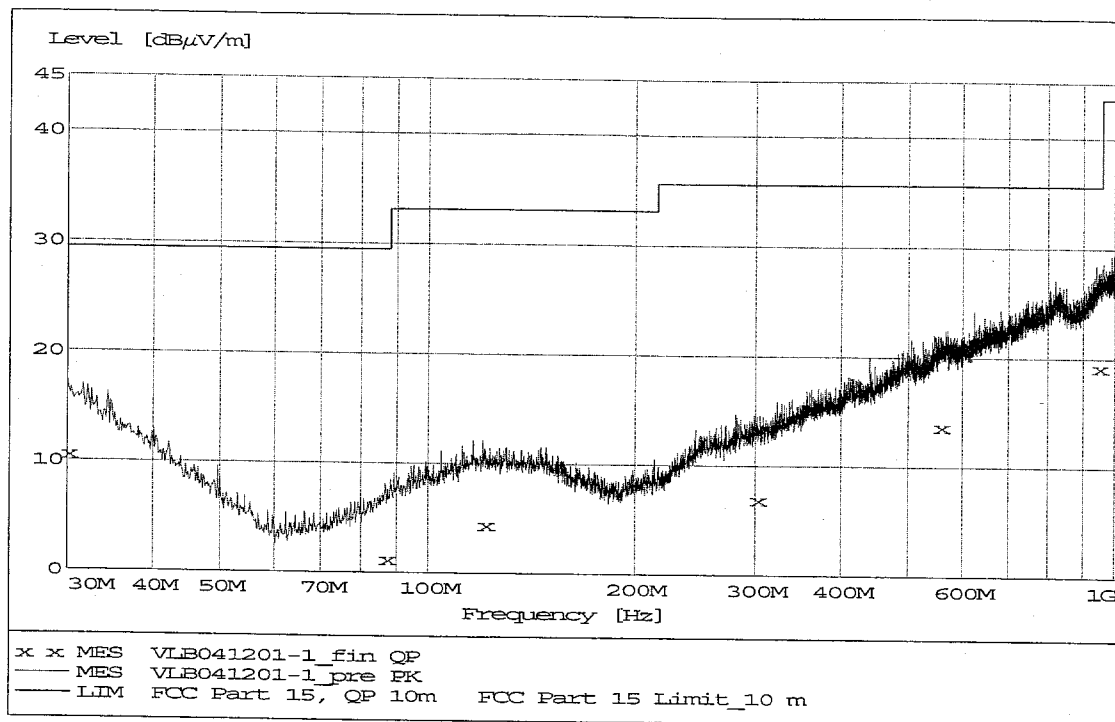

Bluetooth anechoic shielded chamber

Date of test: November 29, 2004

1000 – 13000 MHz, max peak at a distance of 3 m on the lower TX channel

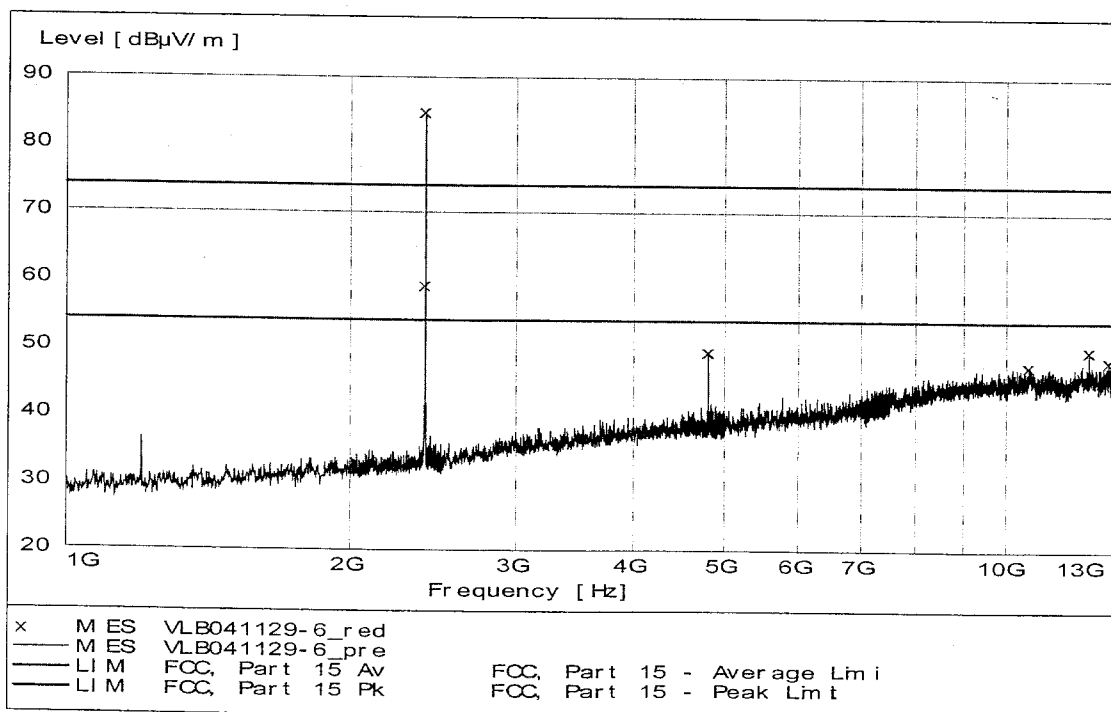


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden


Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

1000 – 13000 MHz, max peak at a distance of 3 m on the lower TX channel.
Emissions below 4000 MHz are attenuated by High-pass filter K&L 4410-X4500/18000-0.

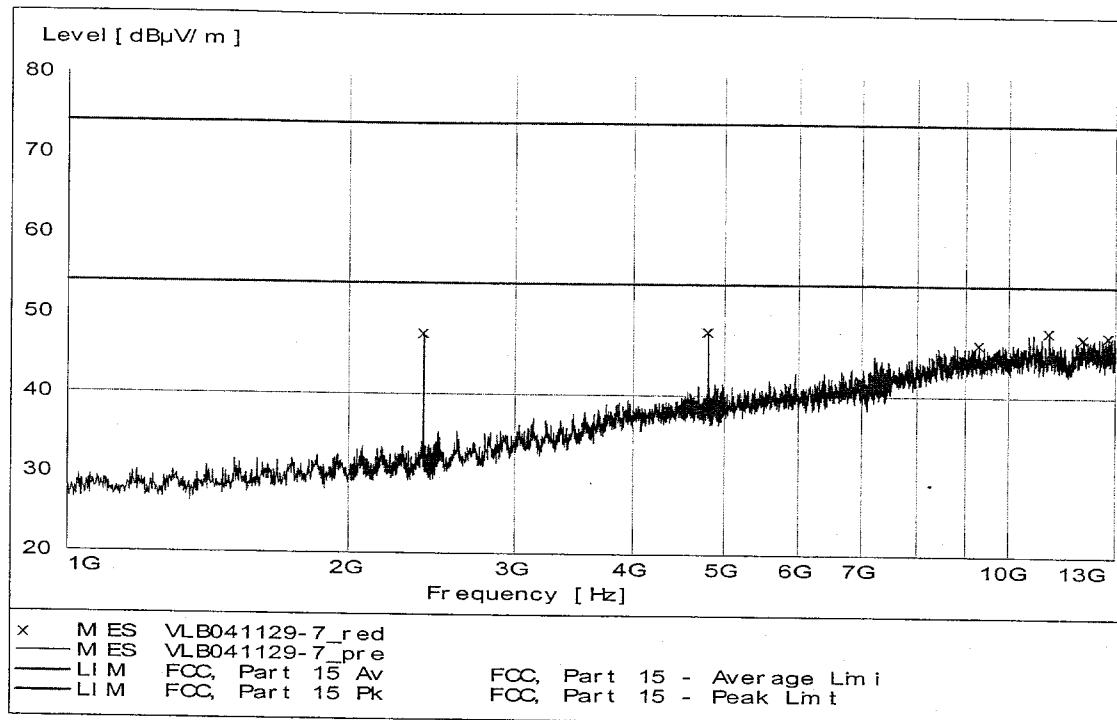

13000 – 18000 MHz, max peak at a distance of 3 m on the lower TX channel

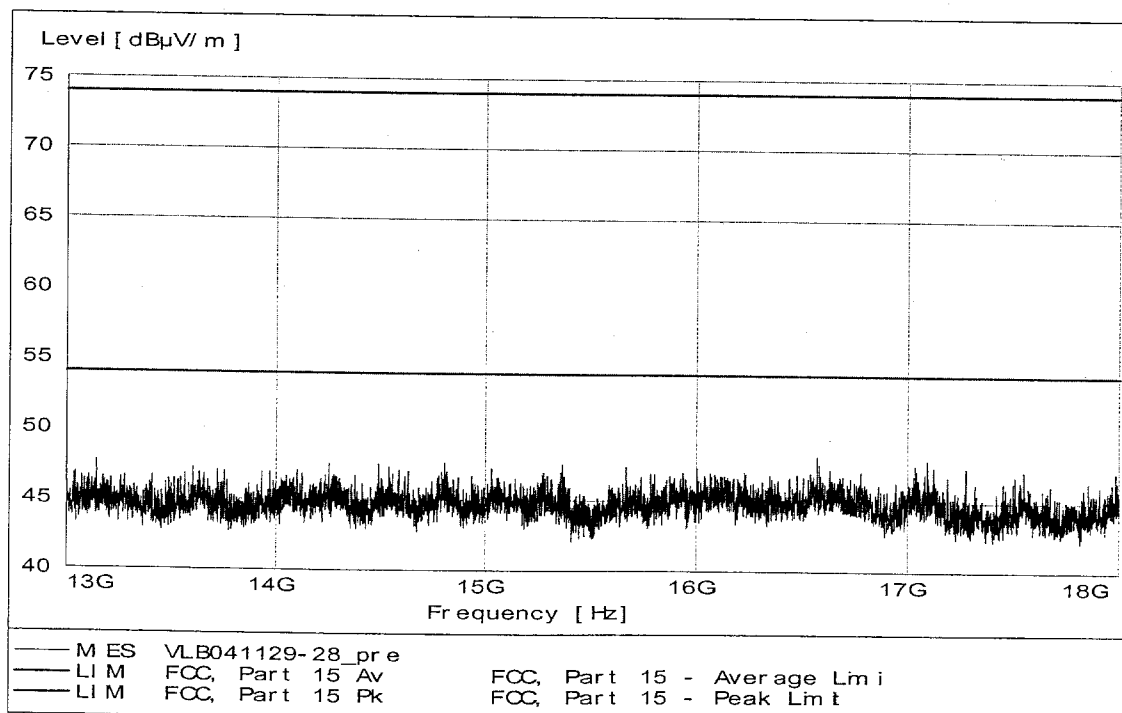


Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden


Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etisemko.com

Registered in Sweden: No SE556024059901, Registered office: As address

18000 – 26000 MHz, max peak at a distance of 3 m on the lower TX channel

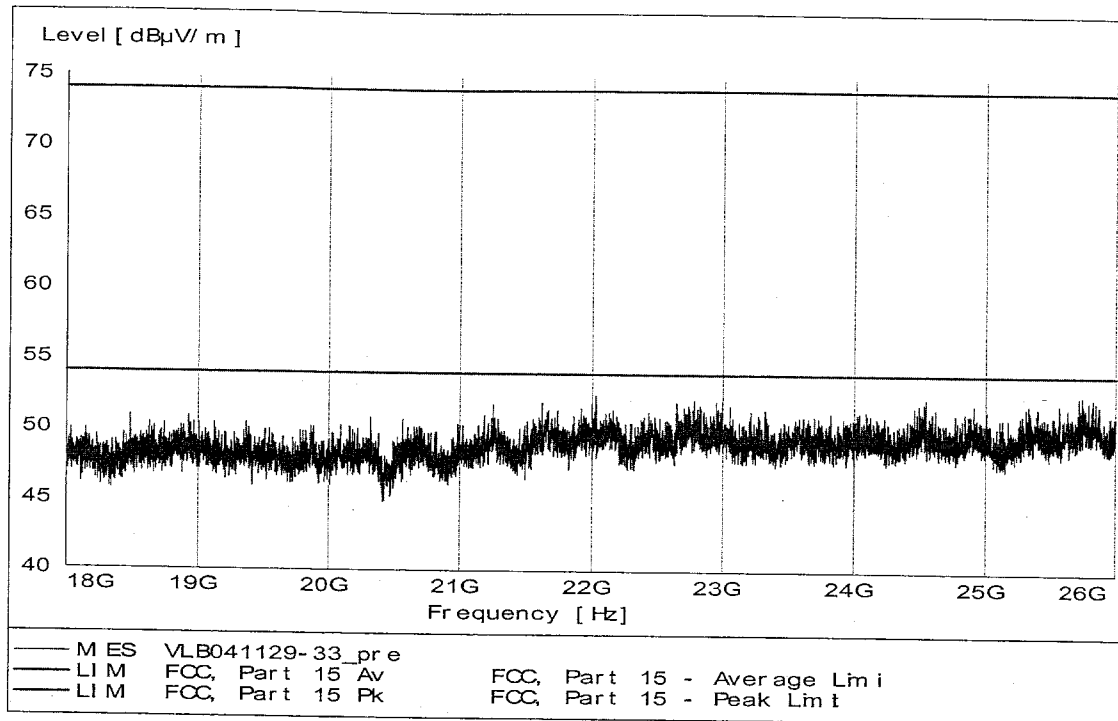

1000 – 13000 MHz, max peak at a distance of 3 m on the middle TX channel

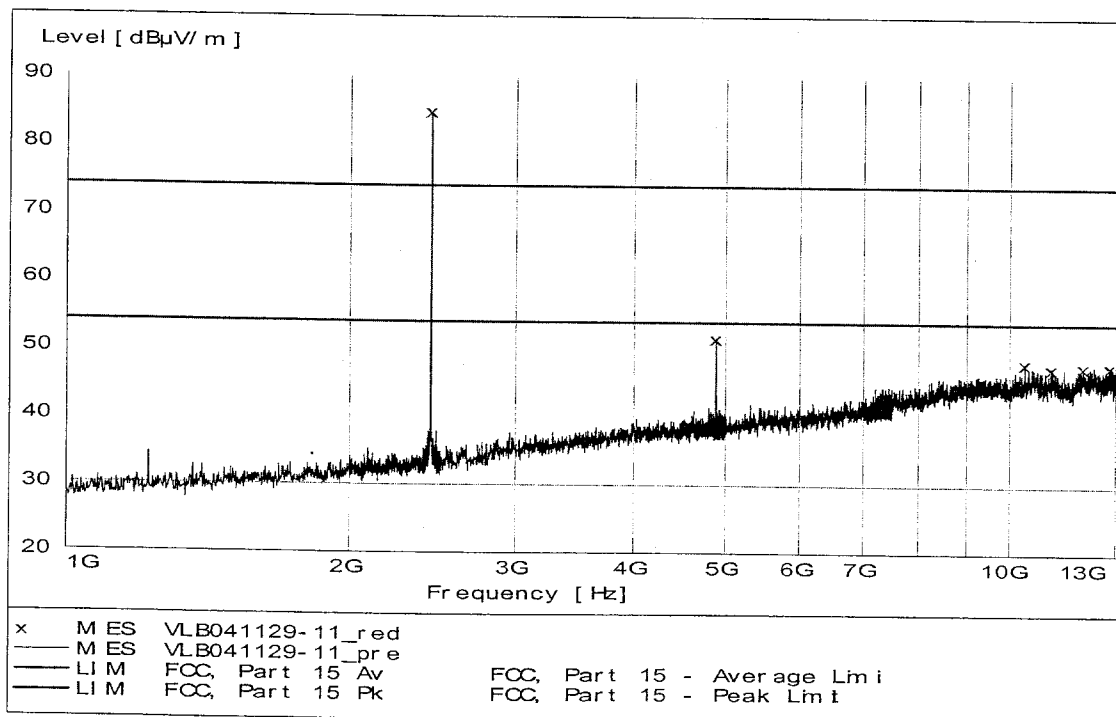

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30, www.sweden.intertek-etlsemko.com

Registered in Sweden: No SE556024059901, Registered office: As address