

# Test Report No. 7191048238-EEC12/02

dated 04 Dec 2012



PSB Singapore

Choose certainty.  
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
47 CFR FCC Parts 2, 15, and 25 : 2011  
OF AN  
**INMARSAT FLEETBROADBAND SYSTEM**  
[ Model : FX 500 ]  
[ FCC ID : QO4-AVIFX500BDE ]

**TEST FACILITY**

TÜV SÜD PSB Pte Ltd,  
Electrical & Electronics Centre (EEC), Product Services,  
No. 1 Science Park Drive, Singapore 118221

TÜV SÜD PSB Pte Ltd,  
Electrical & Electronics Centre (EEC), Product Services,  
13 International Business Park #01-01, Singapore 609932

**FCC REG. NO.**

99142 (3m and 10m Semi-Anechoic Chamber, Science Park)  
160581 (3m and 10m Semi-Anechoic Chamber, International Business Park)

**IND. CANADA REG. NO.**

2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)  
2932N-1 (10m Semi-Anechoic Chamber, International Business Park)

**PREPARED FOR**

Addvalue Innovation Pte Ltd  
28 Tai Seng Street, #06-02  
Singapore 534106

Tel : +65 6509 5721      Fax : +65 6509 5701

**QUOTATION NUMBER**

219146087 & 219163271

**JOB NUMBER**

7191027290 & 7191048238

**TEST PERIOD**

24 Feb 2012 – 14 Mar 2012

**PREPARED BY**

Quek Keng Huat  
Associate Engineer

**APPROVED BY**

Lim Cher Hwee  
Assistant Vice President



Laboratory:  
TÜV SÜD PSB Pte. Ltd.  
No.1 Science Park Drive  
Singapore 118221



LA-2007-0380-A  
LA-2007-0381-F  
LA-2007-0382-B  
LA-2007-0383-G  
LA-2007-0384-G  
LA-2007-0385-E  
LA-2007-0386-C  
LA-2010-0464-D

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

Phone : +65-6885 1333  
Fax : +65-6776 8670  
E-mail: testing@tuv-sud-psb.sg  
www.tuv-sud-psb.sg  
Co. Reg : 199002667R

Regional Head Office:  
TÜV SÜD Asia Pacific Pte. Ltd.  
3 Science Park Drive, #04-01/05  
The Franklin, Singapore 118223

## TABLE OF CONTENTS

TEST SUMMARY .....	3
PRODUCT DESCRIPTION .....	9
SUPPORTING EQUIPMENT DESCRIPTION.....	10
EUT OPERATING CONDITIONS.....	11
RADIATED EMISSION TEST.....	12
RF OUTPUT POWER TEST .....	16
UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST .....	23
RADIATED SPURIOUS EMISSION TEST.....	76
PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST .....	82
FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST .....	101
FREQUENCY STABILITY (VOLTAGE VARIATION) TEST.....	106
MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST .....	110
ANNEX A EUT PHOTOGRAPHS / DIAGRAMS .....	112
ANNEX B USER MANUALTECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	137
ANNEX C FCC LABEL & POSITION.....	138

## TEST SUMMARY

The product was tested in accordance with the customer's specifications.

### Test Results Summary

Test Standard	Description	Pass / Fail
47 CFR FCC Parts 2, 15 and 25: 2011		
15.107(a), 15.207	Conducted Emissions	Not Applicable *See Note 5
15.109	Radiated Emissions (Class B)	Pass
2.1046(a), 25.204	RF Output Power	Pass
2.1051, 25.202(f)	Unwanted Emissions at Antenna Terminal	Pass
2.1053, 25.202(f)	Radiated Spurious Emissions	Pass
25.216(h)(i)(j)	Protection of Aeronautical Radio Navigation Satellite Service	Pass
2.1055, 25.202(d)	Frequency Stability (Temperature Variation)	Pass
2.1055, 25.202(d)	Frequency Stability (Voltage Variation)	Pass
1.1310	Maximum Permissible Exposure	Refer to page 145 for details

## TEST SUMMARY

### Notes

1. Five channels as listed below, which respectively represents the lower, middle, upper, XL lower and XL upper channels (transmit and receive) of the Equipment Under Test (EUT). Each channel was configured to operate under the test mode condition.

Transmit Channel	Frequency (GHz)	Receive Channel	Frequency (GHz)
Lower Channel	1.6266	Lower Channel	1.5251
Middle Channel	1.6435	Middle Channel	1.5420
Upper Channel	1.6600	Upper Channel	1.5589

2. The following tests were based on conducted measurement method:
  - a. RF Output Power
  - b. Unwanted Emissions at Antenna Terminal
  - c. Frequency Stability (Temperature Variation)
  - d. Frequency Stability (Voltage Variation)
3. All test measurement procedures are according to ANSI/TIA-603-B-2002.
4. The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.
5. The Equipment Under Test (EUT) is a DC operated device and contains no provision for public utility connections.
6. This report 7191048238-EEC12/02 was generated from the report 7191027290-EEC12/05 based on the following declaration from Addvalue Innovation Pte Ltd:

We, Addvalue Innovation Pte Ltd, sole designer, manufacturer and supplier of the products here by declaring that both FX range & FX series products are identically same, in the aspect of design and construction, the applicable change only in product brand name , ownership and responsibility.

See below change log differentiate between the two product range:

Items	Product 1	Product 2
Brand Name	Sea Tel	Wideye
Ownership & Responsibility	Sea Tel Inc.	Addvalue Innovation Pte Ltd

**TEST SUMMARY**

**Notes (continued)**

7. See below for External photo provided by Addvalue Innovation Pte Ltd

**AVI FX Series – Model: FX 500**  
**Inmarsat FleetBroadband System**



**TEST SUMMARY**

**Notes (continued)**

7. See below for External photo provided by Addvalue Innovation Pte Ltd

**BDU Top view + Handset**



**BDU Bottom view + Handset**



**BDU Rating label close-up view**



**TEST SUMMARY**

**Notes (continued)**

7. See below for External photo provided by Addvalue Innovation Pte Ltd

**BDU Front view+Handset**



**BDU Rear view + Handset**



**BDU Left side view**



**BDU Right Side view**



**Handset Top view**



**Handset Bottom view**



**TEST SUMMARY**

**Notes (continued)**

17 See below for External photo provided by Addvalue Innovation Pte Ltd

**Handset Label close-up view**



8. See below for FCC Label provided by Addvalue Innovation Pte Ltd



**Modifications**

No modifications were made.

## PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is an <b>INMARSAT FLEETBROADBAND SYSTEM</b> .
Applicant	: Addvalue Innovation Pte Ltd 28 Tai Seng Street , #06-02 Singapore 534106
Manufacturer	: Addvalue Innovation Pte Ltd 28 Tai Seng Street , #06-02 Singapore 534106
Factor(ies)	: Beyonics Technology(Senai) Sdn Bhd Lot 3627,Jalan Harmoni 1,Batu 22 81000 Kulai, Johor, Malaysia
Model Number	: FX 500
FCC ID	: QO4-AVIFX500BDE
Brand	: Wideye
Serial Number	: MB5001A120500011
Operating / Transmitting Frequency	: TX. 1626.5 MHz ~ 1660.5 MHz RX. 1525 MHz ~ 1559 MHz
Clock / Oscillator Frequency	: 4.912 MHz ,12 MHz ,25 MHz ,16.384 MHz , 24.192 MHz , 32.768MHz
Modulation	: Receive: pi/4 QPSK and 16QAM Transmit: pi/4 QPSK and 16QAM
Antenna Gain	: 18.2dBi
Port / Connectors	: 4 RJ 45 ( 2 PoE, 2 LAN) 2 RJ11 ( 1 FAX , 1 Phone) 1 Offset latch RJ11
Rated Input Power	: 12V,15A / 24V,7.5A(180W)
Accessories	: Primary Handset, 3m DC Power Cable.

**SUPPORTING EQUIPMENT DESCRIPTION**

<b>Equipment Description (Including Brand Name)</b>	<b>Model, Serial &amp; FCC ID Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Acer Laptop PC	M/N: Travelmate 2420 S/N: XTB205106613077CFKS00 FCC ID: DoC	2.00m unshielded power cable 2.00m communication cable
Delta Electronics Power Adapter (Laptop)	M/N: SADP-65KB D S/N: 94W0610190186 FCC ID: Nil	2.00m unshielded power cable
SeaTel Primary Handset	M/N: SAFARI-PH S/N: AVHSS1P113800071 FCC ID: Nil	1x 1m shielded telephone cord
Above Deck Unit Antenna	M/N: BGAN-FB500 S/N: 41104 FCC ID: Nil	1x 25m shielded RF cable 1x 15m shielded RF cable
Wideye Wired Telephone	M/N: SB/AH-100 S/N: Nil FCC ID: Nil	1x 1.5m telephone cable
2x12Vdc Battery	M/N: MF160G51 S/N: Nil FCC ID: Nil	2.00m unshielded battery cable

## **EUT OPERATING CONDITIONS**

### **47 CFR FCC Parts 2, 15 and 25**

- 1. RF Output Power**
- 2. Unwanted Emissions at Antenna Terminal**
- 3. Radiated Spurious Emissions**
- 4. Protection of Aeronautical Radio Navigation Satellite Service**
- 5. Frequency Stability (Temperature Variation)**
- 6. Frequency Stability (Voltage Variation)**
- 7. Maximum Permissible Exposure**

The EUT was exercised by operating in following modes with the EUT simulating the transmission and reception using the client's provided test programs, "3CDaemon" and "UT Console\_Serial".

#### **Satellite Transmission Mode**

- Continuous RF transmission at lower channel at maximum RF power
- Continuous maximum RF transmission at middle channel at maximum RF power
- Continuous maximum RF transmission at upper channel at maximum RF power
- Continuous RF transmission at lower XL channel at maximum RF power
- Continuous maximum RF transmission at upper XL channel at maximum RF power

#### **Satellite Reception (Receive) Mode**

- Continuous RF reception at lower channel
- Continuous RF reception at middle channel
- Continuous RF reception at upper channel
- Continuous RF reception at lower XL channel

**RADIATED EMISSION TEST**

**47 CFR FCC Part 15.109 Radiated Emission Limits (Class B)**

Frequency Range (MHz)	Quasi-Peak Limit Values (dB $\mu$ V/m) @ 3m
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0*

\* Above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

**47 CFR FCC Part 15.109 Radiated Emission Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
EMCO Horn Antenna – H15	3115	0003-6088	20 May 2012
Rohde & Schwarz EMI Test Receiver 20Hz – 26.5GHz	ESMI	849182/003 848926/007	16 Aug 2012
TDK RF Solutions Hybrid Log Periodic Antenna (30MHz-3GHz)	HLP-3003C	130238	19 Mar 2012
Sonoma Preamplifier (9kHz – 1GHz)	310N	270640	03 Jan 2013
Toyo MicroWave Preamplifier (1GHz - 18GHz)	TPA0188-36	1005	24 Jun 2012

## RADIATED EMISSION TEST

### **47 CFR FCC Part 15.109 Radiated Emission Test Setup**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

### **47 CFR FCC Part 15.109 Radiated Emission Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 5<sup>th</sup> harmonic of the highest frequency used or generated by the EUT, using the Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

### **Sample Calculation Example**

At 300 MHz

Q-P limit (Class B) = 70.8  $\mu$ V/m = 37.0 dB $\mu$ V/m


Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 31.0 dB $\mu$ V/m  
(Calibrated level including antenna factors & cable losses)


Therefore, Q-P margin = 31.0 - 37.0 = -6.0

i.e. 6 dB below Q-P limit

**RADIATED EMISSION TEST**

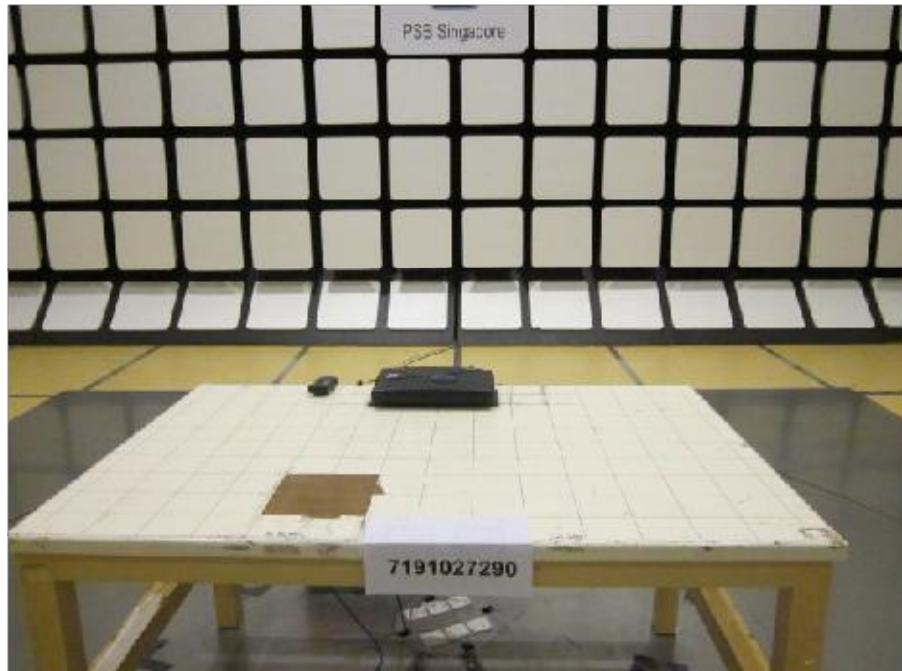

**Radiated Emissions Test Setup (Front View)**

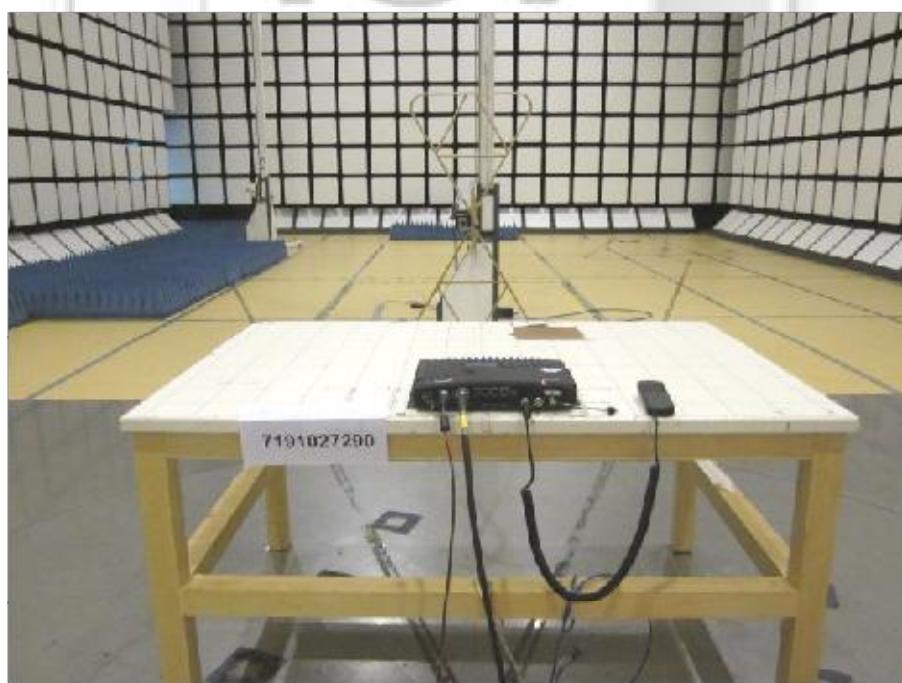

**Radiated Emissions Test Setup (Rear View)**

**RADIATED EMISSION TEST**

**47 CFR FCC Part 15.109 Radiated Emission Results**

Operating Mode	Continuous Satellite transmission	Temperature	18°C
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	58%
Test Distance	3m	Atmospheric Pressure	1030mbar
Tested By			Kelvin Cheng, Jason Lai

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Limit (dB $\mu$ V/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)
66.0844	30.9	40.0	9.1	212	266	V
93.1740	25.4	40.0	14.6	101	245	V
227.5980	35.7	46.0	10.3	312	248	H
877.1270	31.2	46.0	14.8	212	251	H
881.5009	24.1	46.0	21.9	212	232	V
960.6729	18.2	54.0	35.8	101	239	H

Spurious Emissions above 1GHz-18GHz

Freq (GHz)	Peak Value (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Margin (dB)	AV Value (dB $\mu$ V/m)	AV Limit (dB $\mu$ V/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)
8.6360	56.9	74.0	17.1	43.0	54.0	11.0	212	51	V
10.0190	55.3	74.0	18.7	42.8	54.0	11.2	212	241	V
13.2920	62.5	74.0	11.5	49.5	54.0	4.5	212	76	V
14.7570	62.8	74.0	11.2	49.7	54.0	4.3	312	227	H
16.5650	59.7	74.0	14.3	47.0	54.0	7.0	312	242	H
17.8280	67.3	74.0	6.7	52.2	54.0	1.8	312	230	V

**Notes**

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
 RBW: 120kHz      VBW: 1MHz  
>1GHz  
 RBW: 1MHz      VBW: 1MHz
4. **Radiated Emissions Measurement Uncertainty**  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25.0GHz is  $\pm 4.0$ dB.

**RF OUTPUT POWER TEST**

**47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Limits**

1. 25.204 Power Limits
  - (a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1GHz and 5GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:  
+40dBW in any 4kHz band for  $\theta: 0^\circ$   
+40dBW + 3.0dBW in any 4kHz band for  $0^\circ < \theta \leq 5^\circ$   
where  $\theta$  is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.
  - (c) For angles of evaluation of the horizon greater than  $5^\circ$  there shall be no restriction as to the equivalent isotropically radiated power transmitted by an earth station towards the horizon.
  - (d) Notwithstanding the e.i.r.p and e.i.r.p density limits specified in the station authorization, each earth station transmission shall be conducted at the lowest power level that will provide the required signal quality as indicated in the application and further amended by coordination agreements.
2. 2.1046 Measurements Required: RF Power Output
  - (a) For transmission other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
  - (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

**47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	25 May 2012
Mini-Circuits Precision Fixed Attenuator	BW-S20W5+	Nil	Output Monitor
Instock Wireless Components Combiner	PD7120	Nil	Output Monitor
GW Insteek Programmable Power Supply	PSH-3630A	RK200168	30 Jan 2013

---

**RF OUTPUT POWER TEST**

**47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a RF attenuator and a low-loss coaxial cable.
4. The spectrum analyser was then calibrated to the power meter level as shown by the Universal Radio Communicator Tester with a calibrated RF signal source.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, transmitting frequency at lower channel.
2. The maximum peak power of the transmitting frequency was measured and recorded.
3. The RF carrier peak and average pots were plotted.
4. The steps 2 to 4 were repeated with the transmitting frequency was set to middle and upper channels respectively.



**RF OUTPUT POWER TEST**



**RF Output Power Test Setup**



**RF OUTPUT POWER TEST**

**47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Results**

Operating Mode	Continuous Satellite transmission	Temperature	24°C
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	60%
Antenna Gain	18.2dBi	Atmospheric Pressure	1030mbar
Attached Plots	1 – 6	Tested By	Kyaw Soe Hein, Liau Lee Yin

Frequency (GHz)	Channel	Peak Output Power (dBm)		Average Output Power (dBm)	
		EIRP	ERP	EIRP	ERP
1.6266	Lower	53.4	51.3	53.4	51.3
1.6435	Middle	55.4	53.3	55.4	53.3
1.6600	Upper	54.5	52.4	54.5	52.4



Notes

1. RF Output Power Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of 95%, with a coverage factor of 2 is  $\pm 1.0\text{dB}$ .



**RF OUTPUT POWER TEST**

**Output Power Plots**

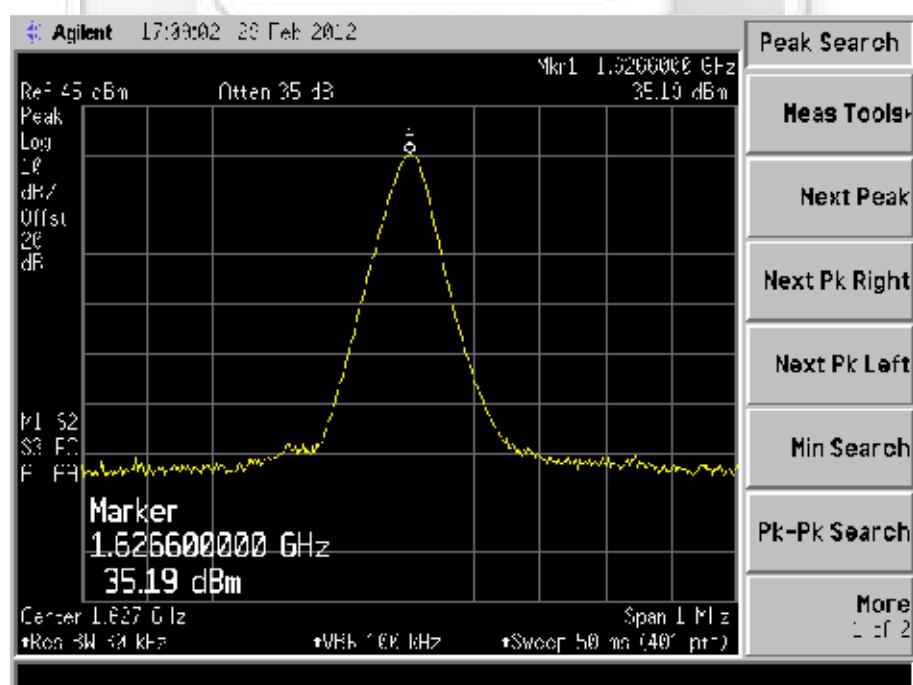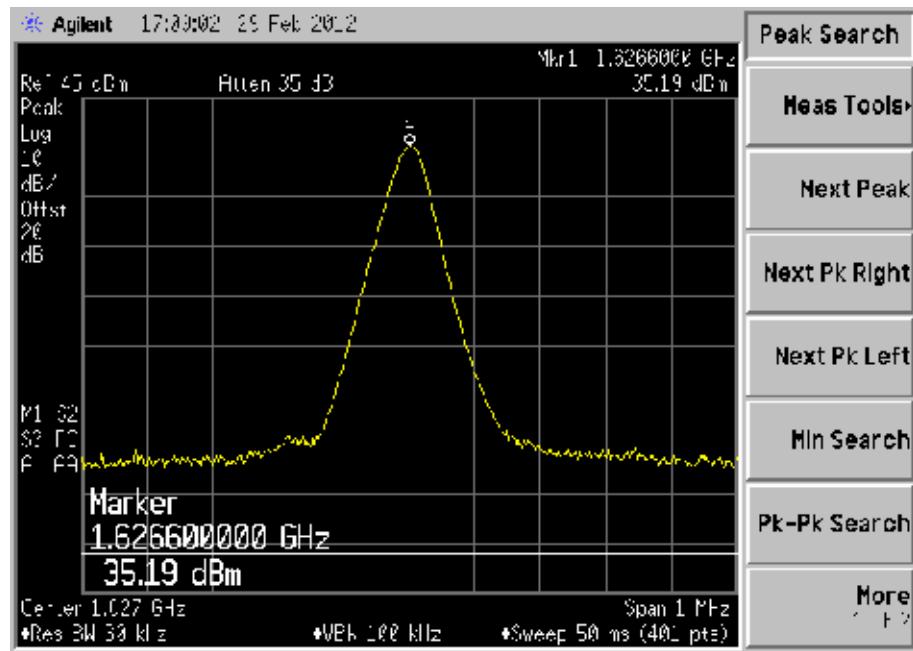


**RF OUTPUT POWER TEST**

**Output Power Plots**

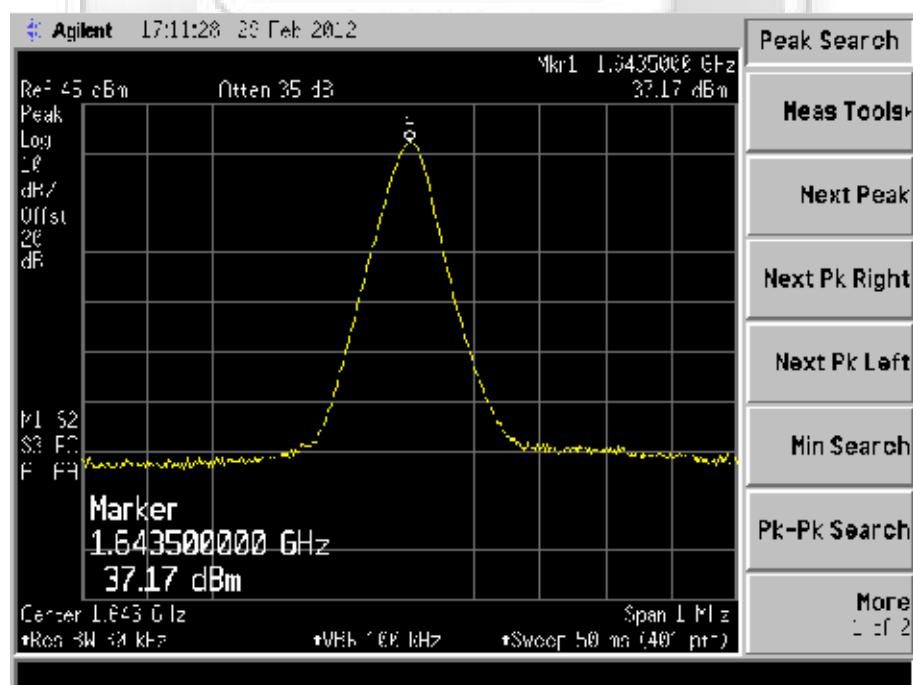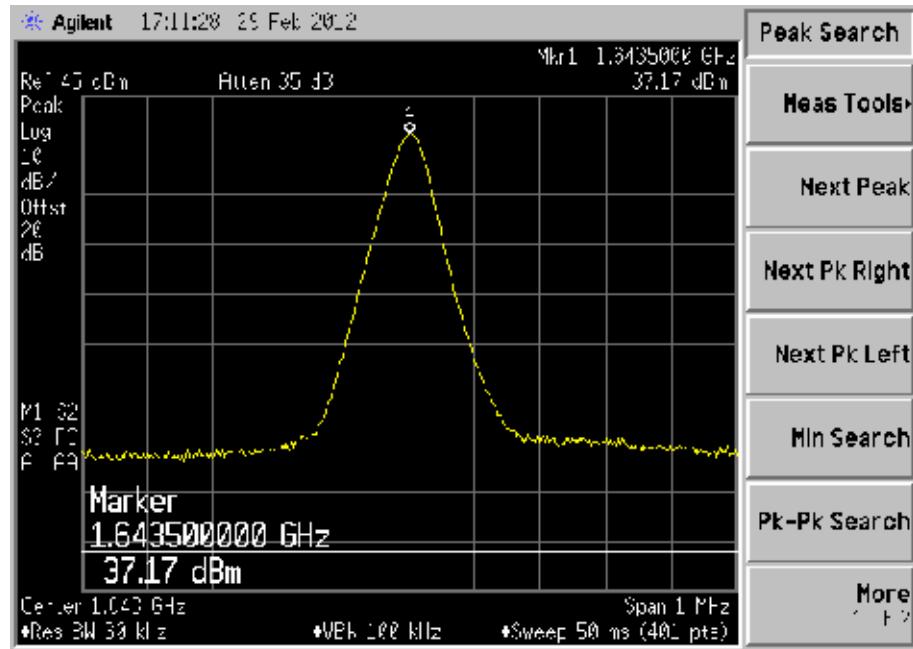


**RF OUTPUT POWER TEST**

**Output Power Plots**

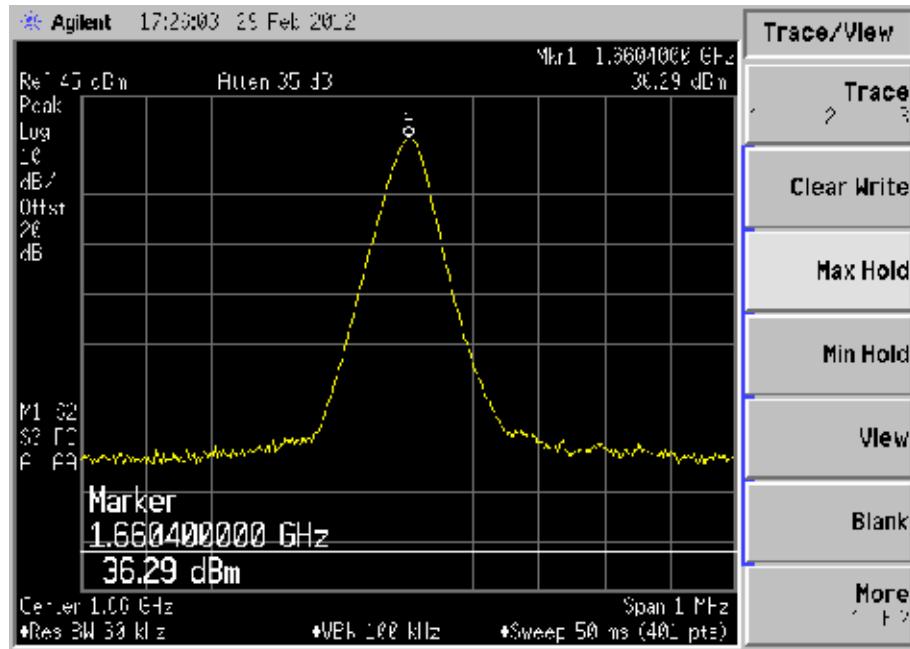

Plot 5 – Upper Channel (Peak)

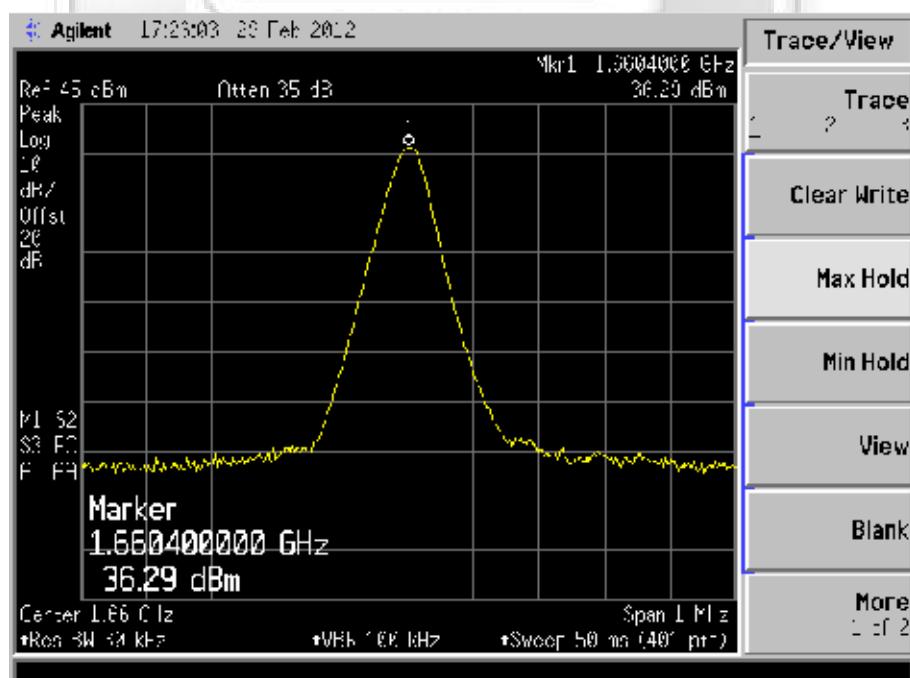

Plot 6 – Upper Channel (Average)

## **UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

### **FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Limits**

1. 25.202 Emissions Limitations
  - (f) The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
    - (1) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
    - (2) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;
    - (3) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times logarithm (to the base 10) of the transmitter power in watts.
2. 2.1051 Measurements Required: Spurious Emissions at Antenna Terminals  
The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20dB below the permissible value need not be specified.

### **FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Instrumentation**

<b>Instrument</b>	<b>Model</b>	<b>S/No</b>	<b>Cal Due Date</b>
Agilent Spectrum Analyzer	E4440A	MY45304764	25 May 2012
Mini-Circuits Precision Fixed Attenuator	BW-S20W5+	Nil	Output Monitor
Instock Wireless Components Combiner	PD7120	Nil	Output Monitor
GW Insteek Programmable Power Supply	PSH-3630A	RK200168	30 Jan 2013

## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

### **47 CFR FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

### **47 CFR FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, transmitting frequency at lower channel.
2. The 26dB bandwidth of the transmitting channel was measured.
3. The emission mask was drawn based on the authorized bandwidth and the measured average output power.
4. The transmitting channel emissions were plotted.
5. The steps 2 to 5 were repeated with the transmitting frequency was set to middle and upper channels respectively.



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**



**Unwanted Emissions at Antenna Terminal Test Setup**



## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

### 47 CFR FCC Parts 25.254(d)(6) and 2.1049 Occupied Bandwidth Results

Operating Mode	Continuous Satellite transmission	Temperature	23°C
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	55%
Antenna Gain	18.2dBi	Atmospheric Pressure	1030mbar
Attached Plots	7 – 27 (26dB Bandwidth) 28 – 48 (In Band Emissions) 49 – 90 (Out of Band Spurious)	Tested By	Kyaw Soe Hein, Liau Lee Yin

All emissions are within the emission mask. Please refer to the attached plots.

#### Notes



1. The Resolution Bandwidth (RBW) was corrected from 4kHz by  $10\log_{10}[(\text{used RBW}) / 4\text{kHz}]$ .
2. Emission limits are computed based on following:
  - a. Emissions Limits (dBm) (50% - =  $P - 25 + CF$   
100% authorised bandwidth)
  - b. Emissions Limits (dBm) (100% - =  $P - 35 + CF$   
250% authorised bandwidth)
  - c. Emissions Limits (dBm) (> 250% =  $P - [43 + 10 \log_{10} P_w] + 30 + CF$   
authorised bandwidth)

where

$P$  = Measured mean power in dBm  
 $P_w$  = Measured mean power in W  
 $CF$  = RBW correction factor (see Note 1)


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 0)

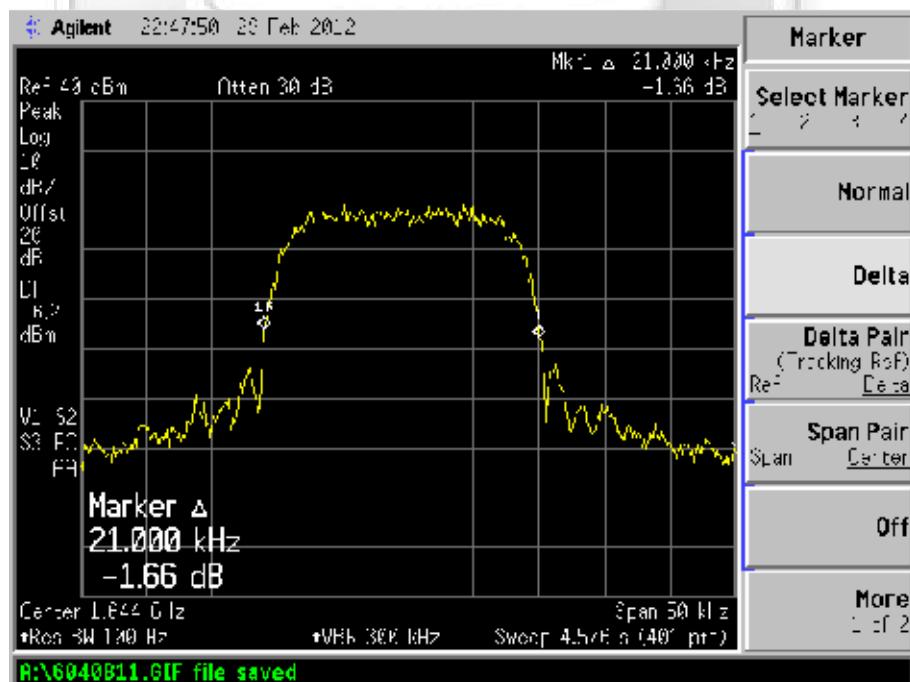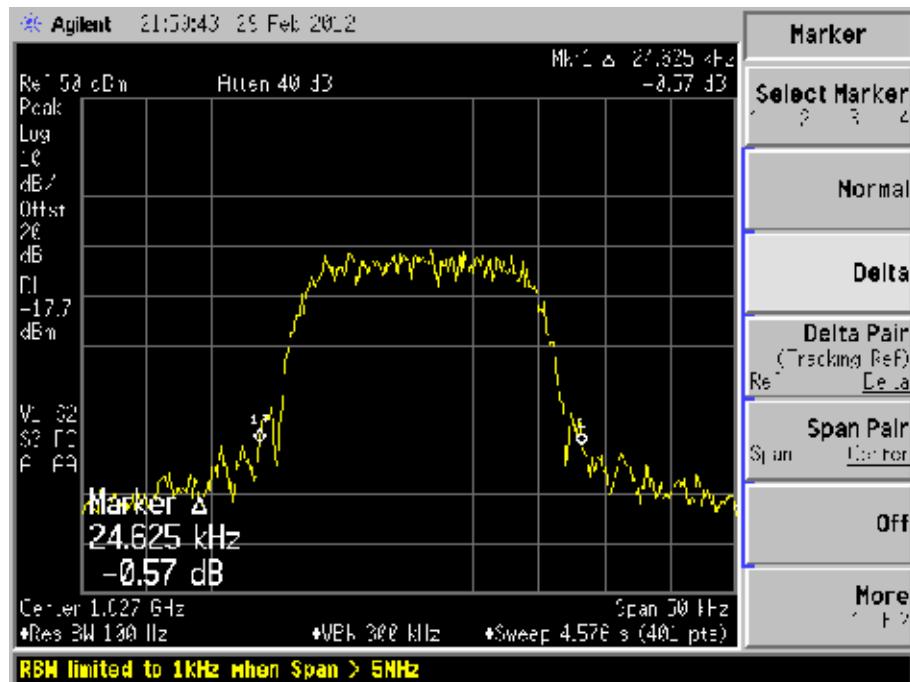


## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

## 26dB Bandwidth Plots (Bearer Type: 0)

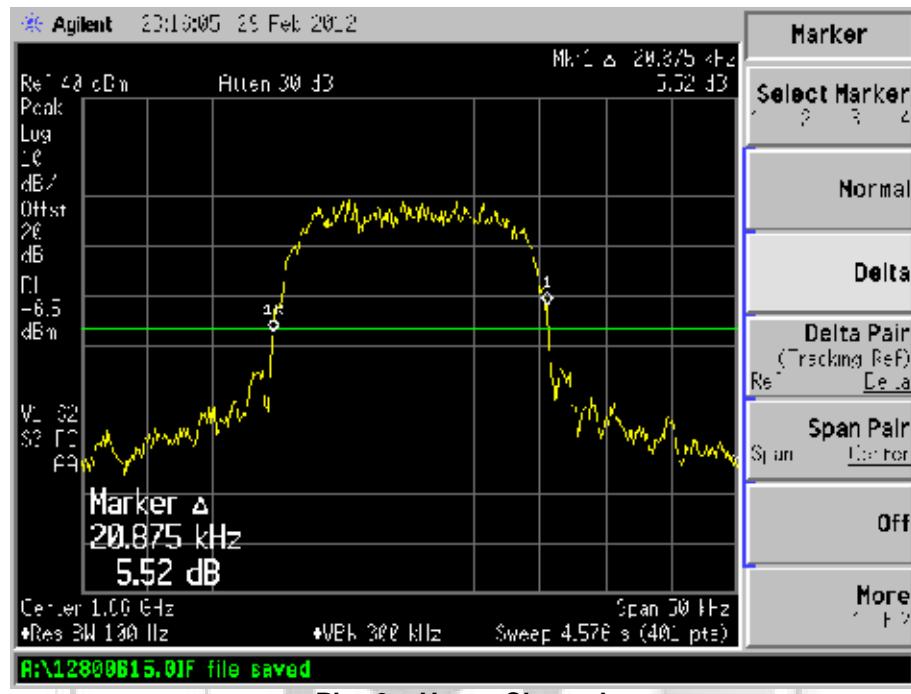


## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

### 26dB Bandwidth Plots (Bearer Type: 3)

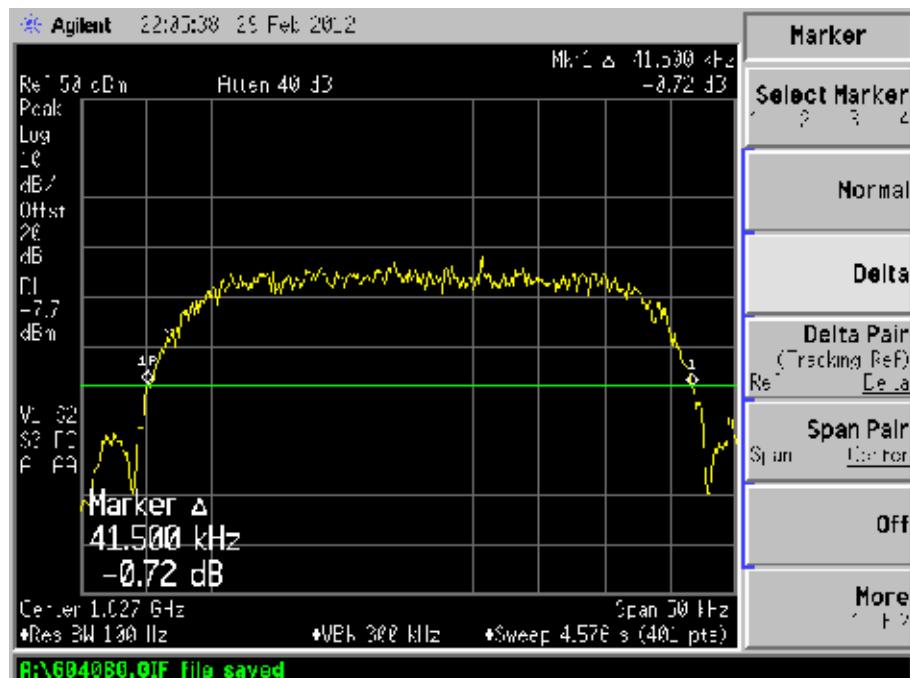


Plot 10 – Lower Channel

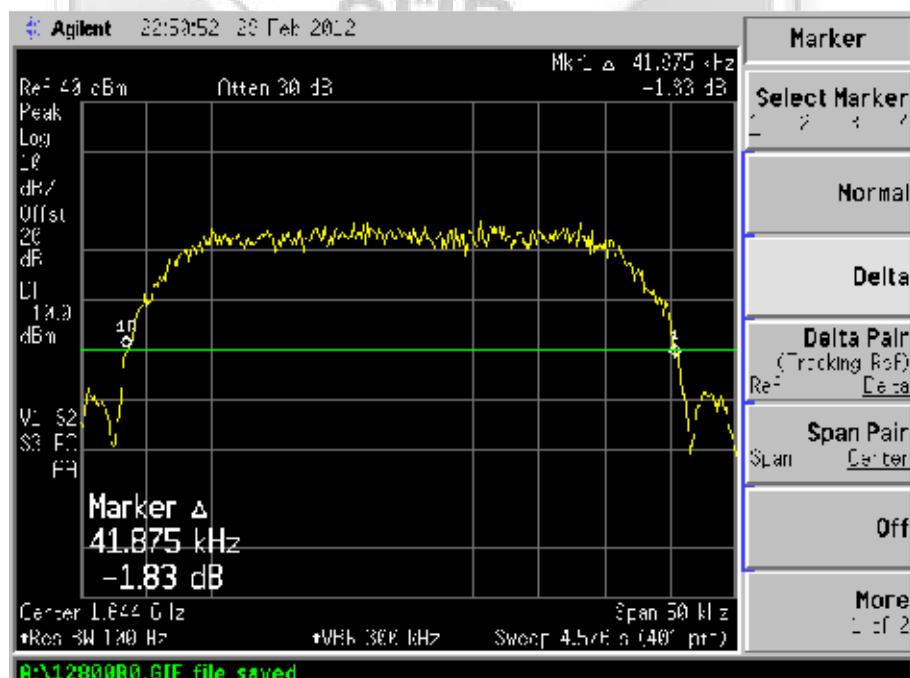

Plot 11 – Middle Channel


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**26dB Bandwidth Plots (Bearer Type: 3)**

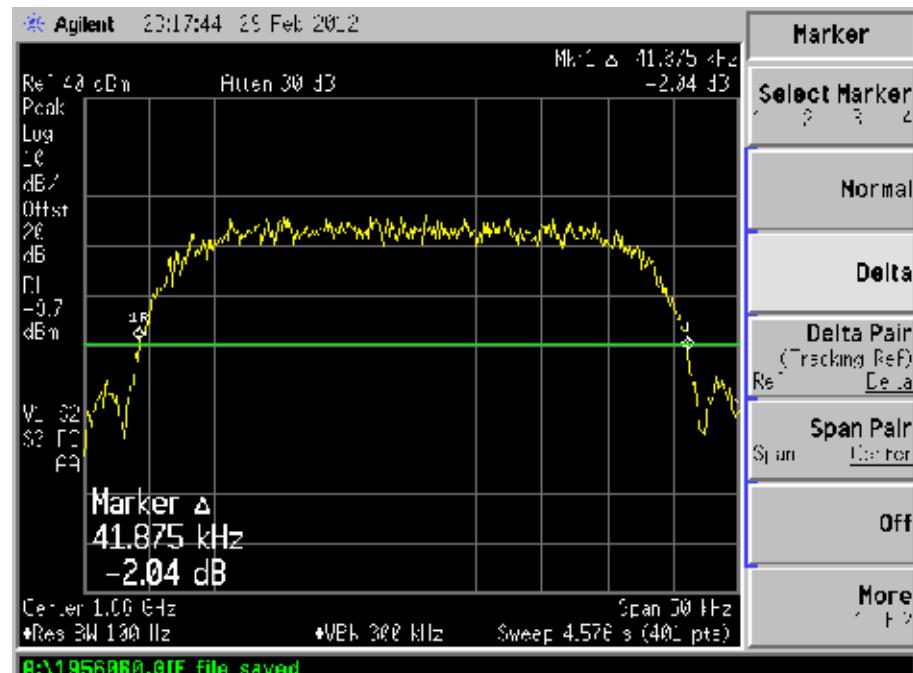


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 5)

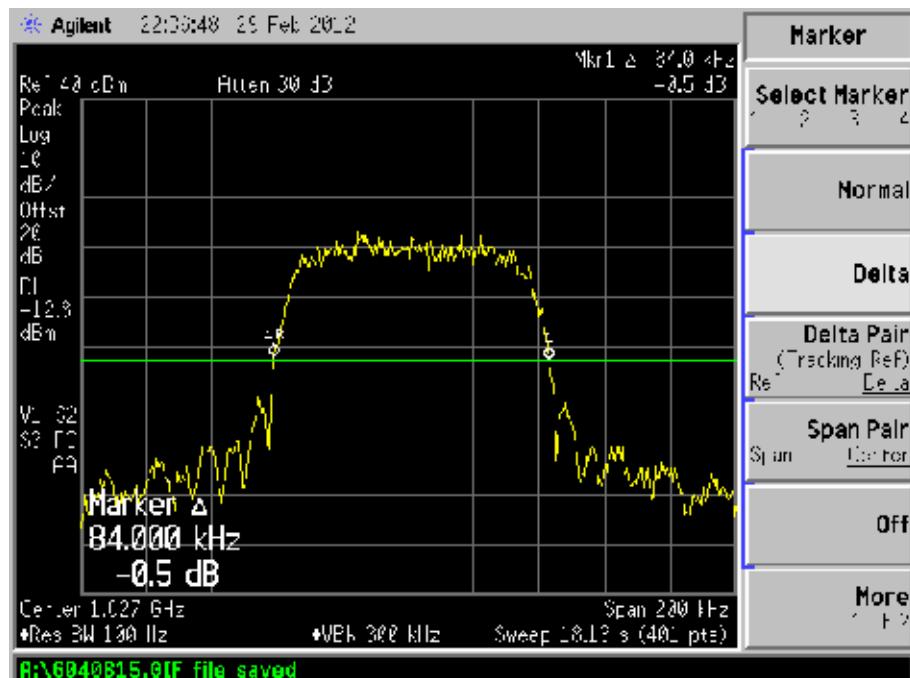


Plot 13 – Lower Channel

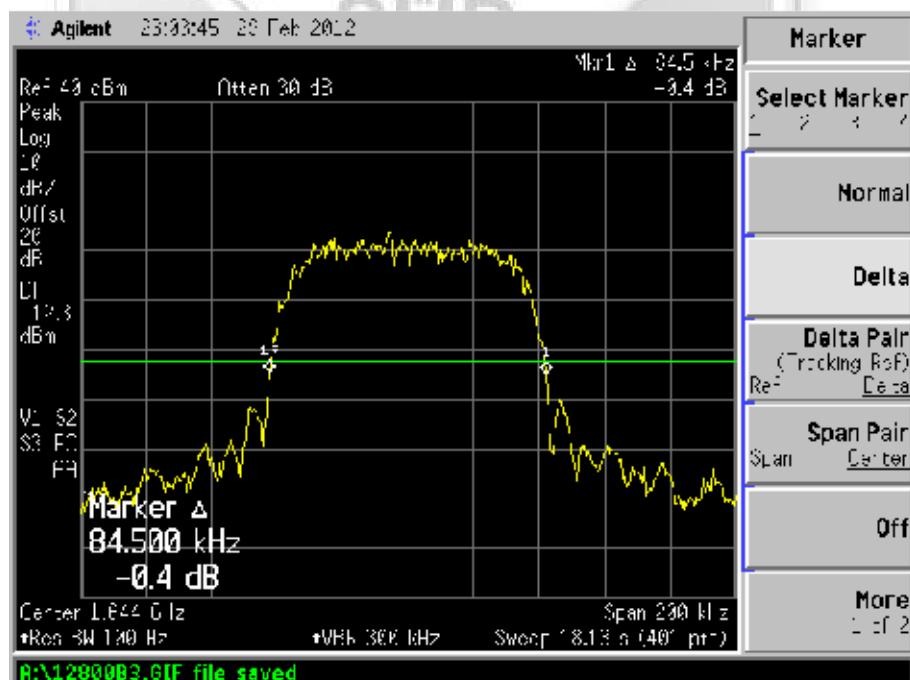

Plot 14 – Middle Channel


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 5)

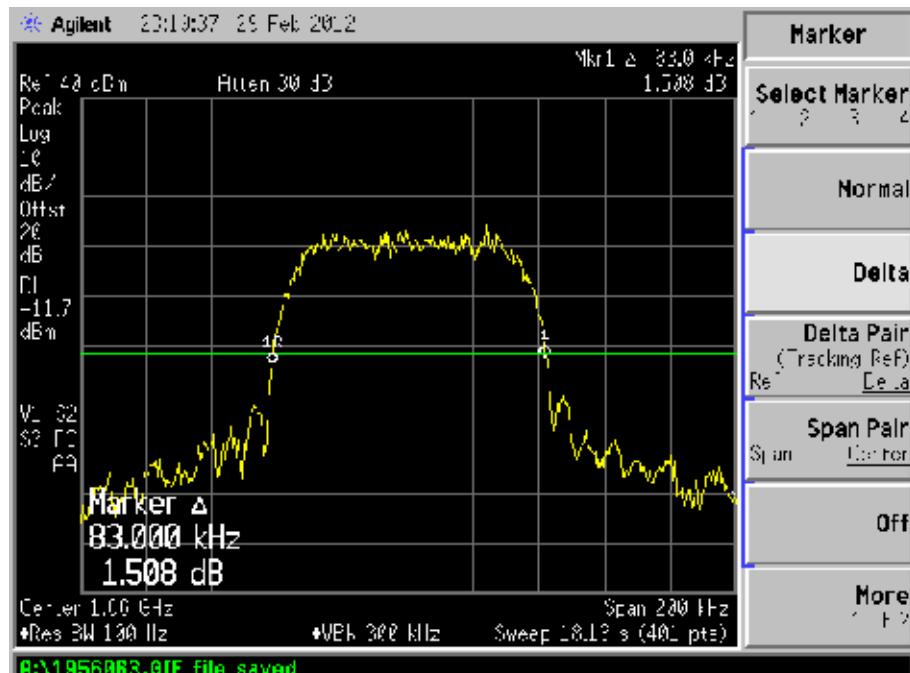


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 7)

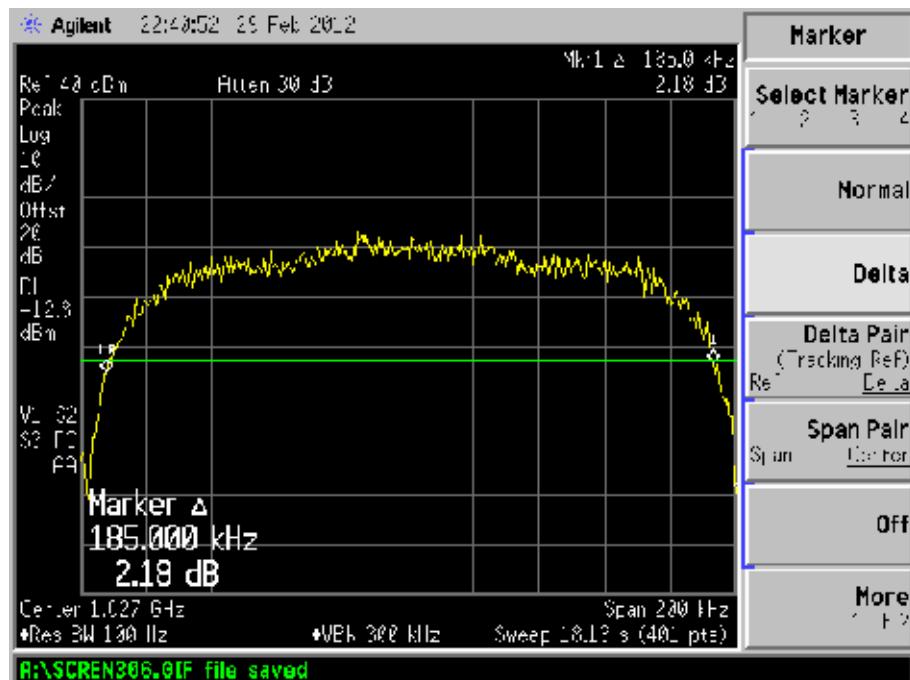


Plot 16 – Lower Channel

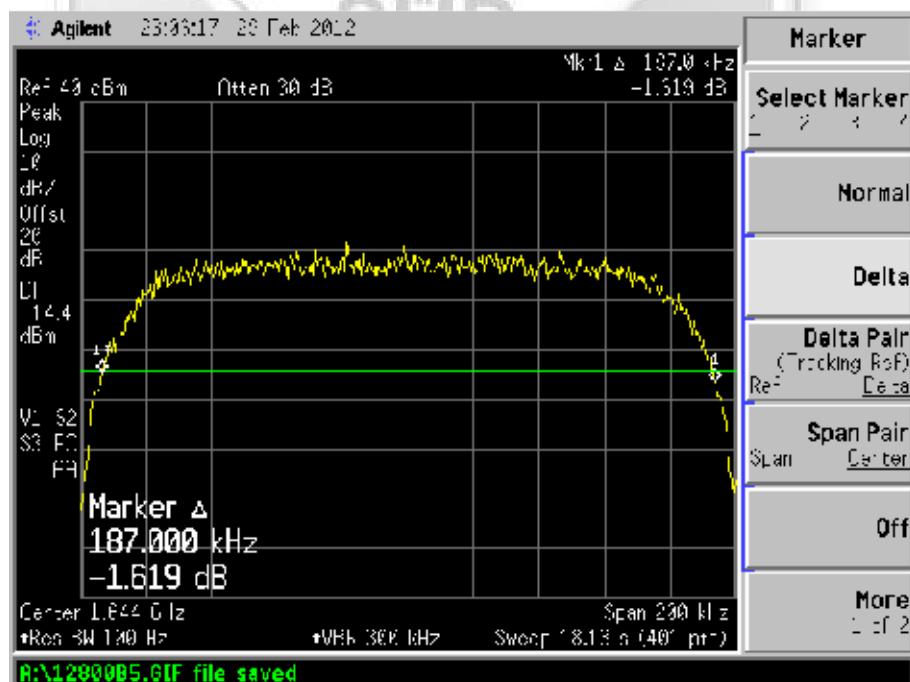

Plot 17 – Middle Channel


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**26dB Bandwidth Plots (Bearer Type: 7)**

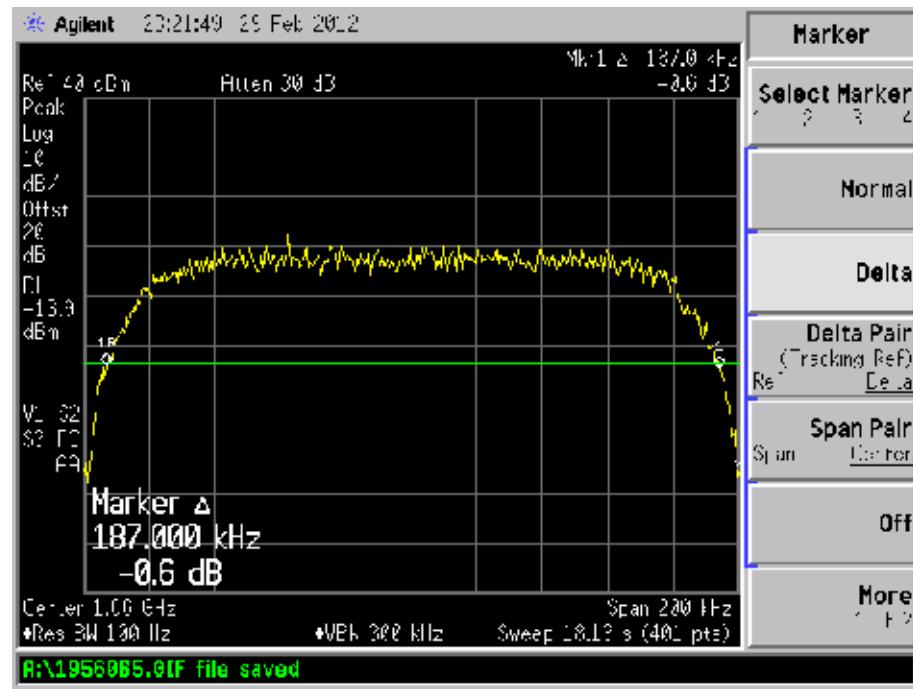


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 11)

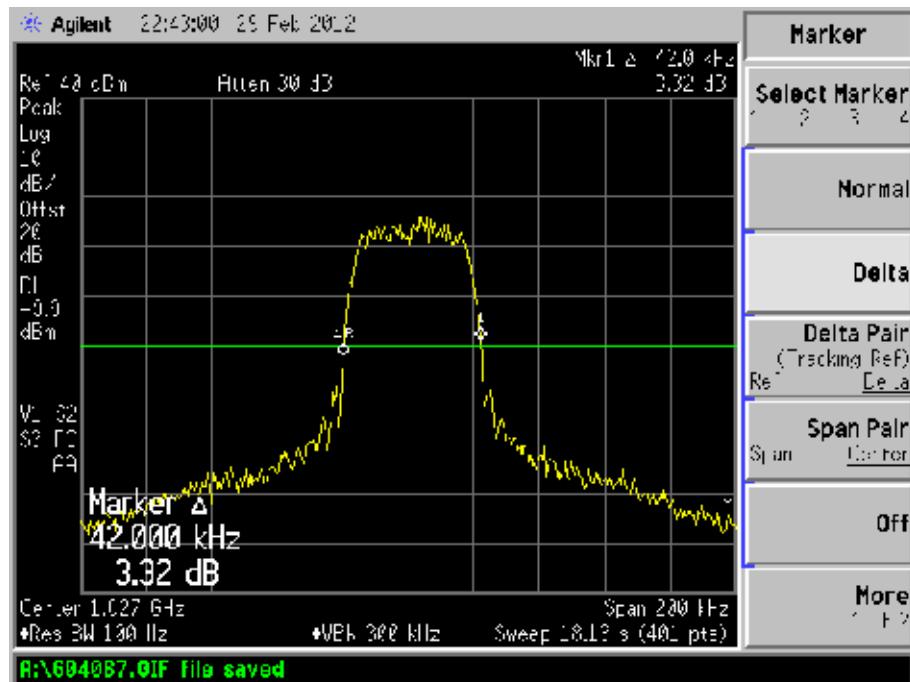


Plot 19 – Lower Channel

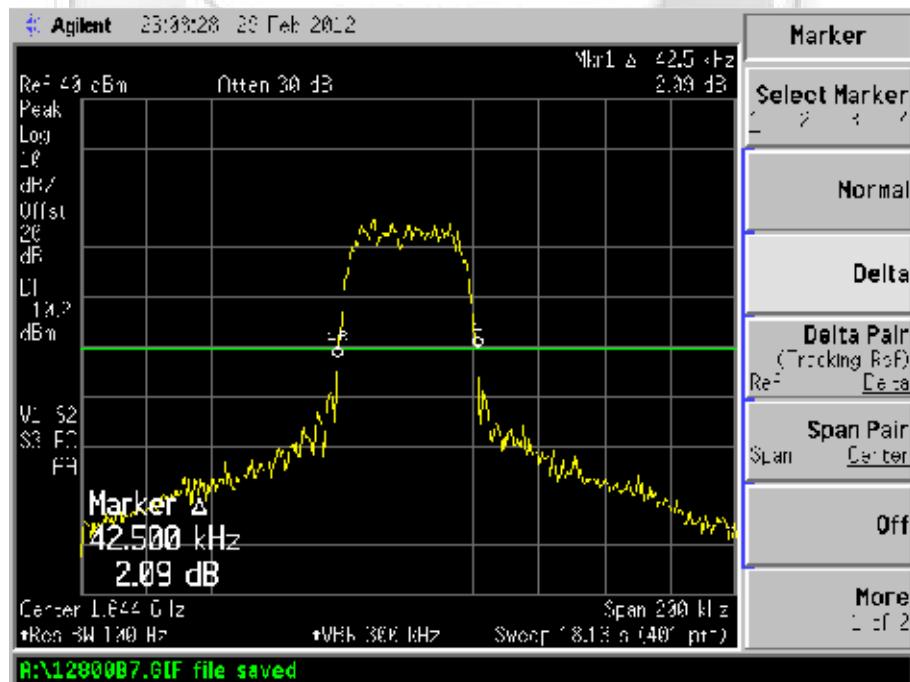

Plot 20 – Middle Channel

**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**26dB Bandwidth Plots (Bearer Type: 11)**


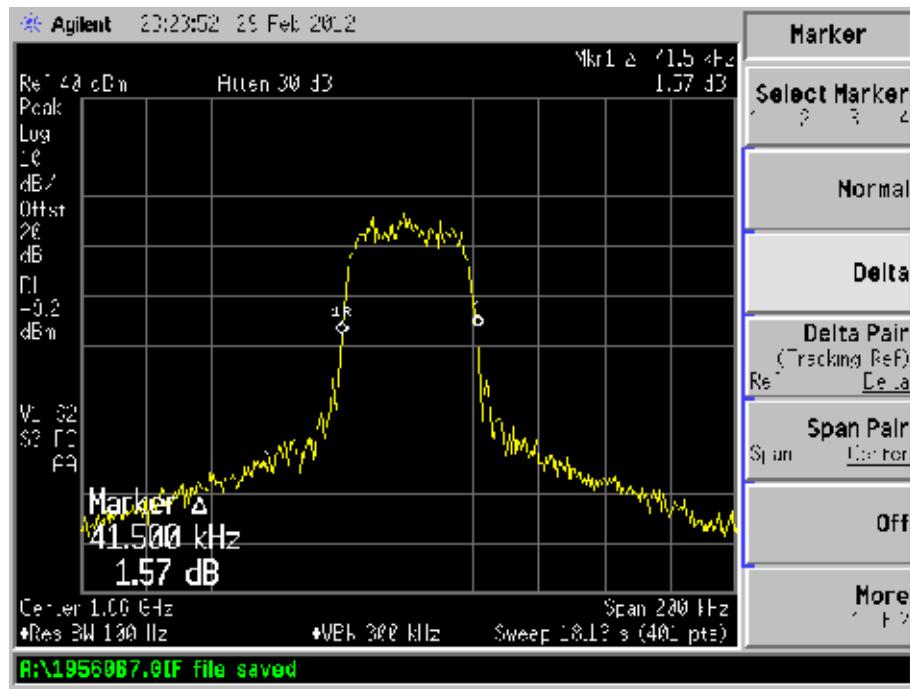


Plot 21 – Upper Channel

**SÜD**


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 13)

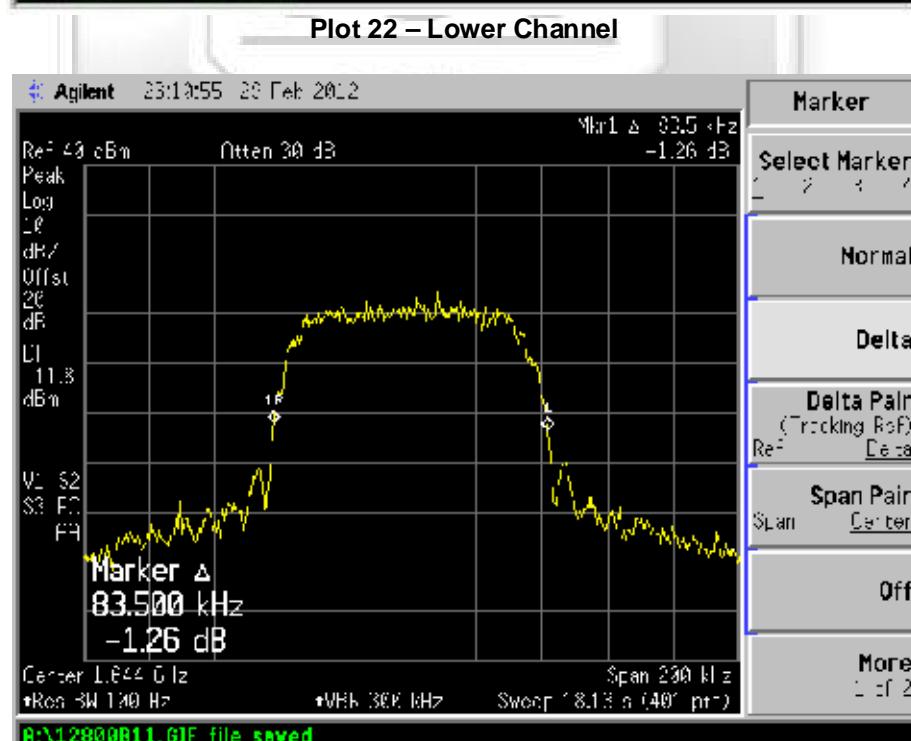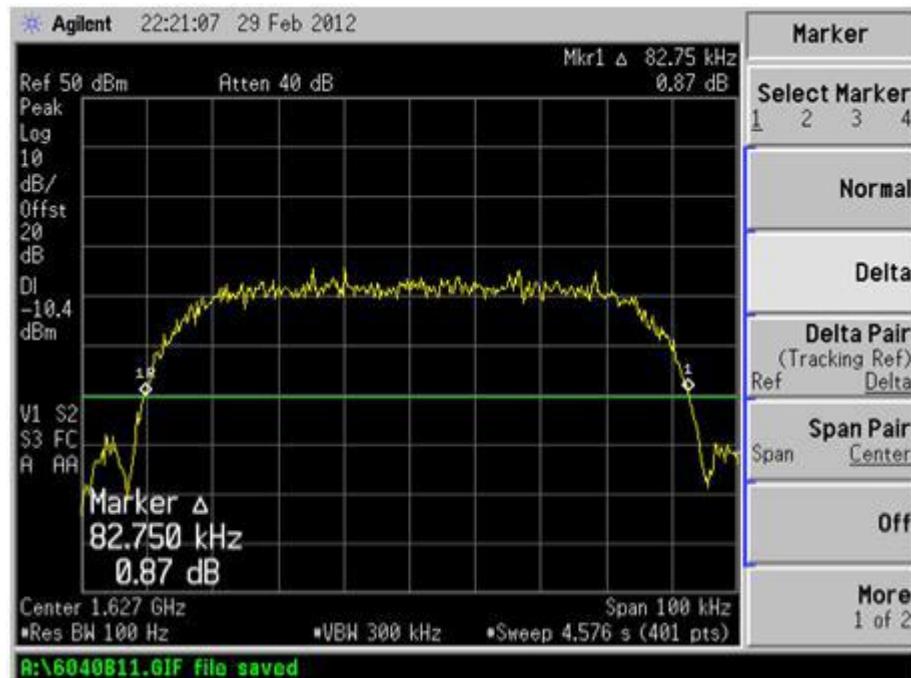



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 13)

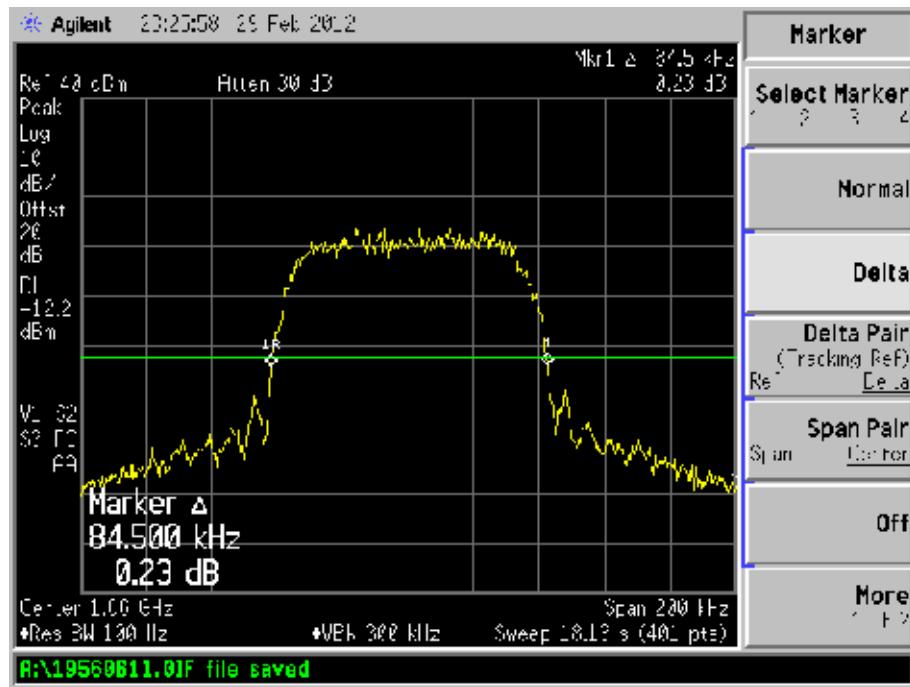


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 15)

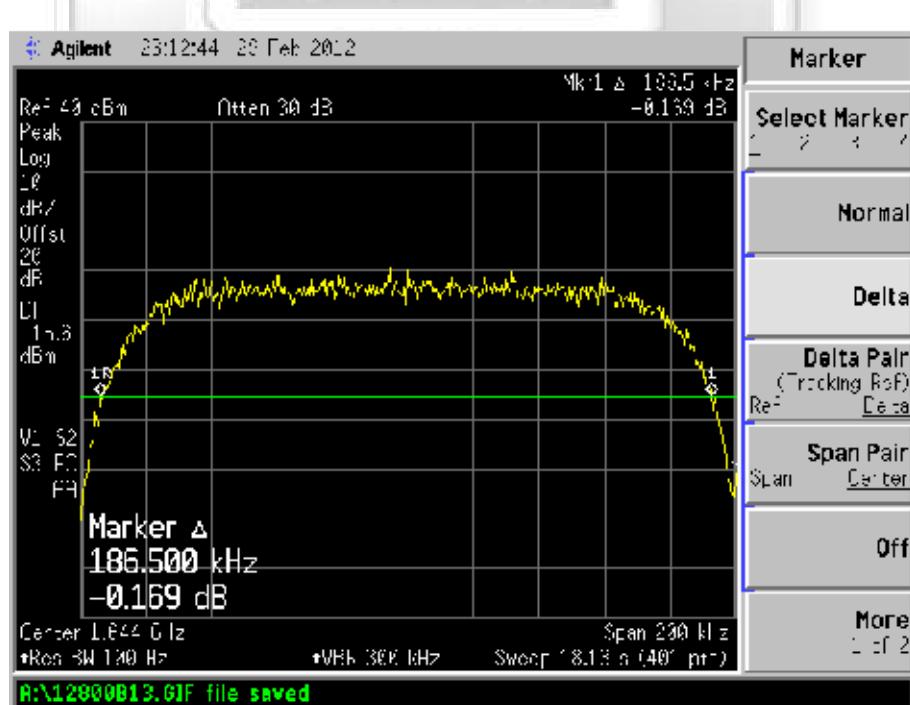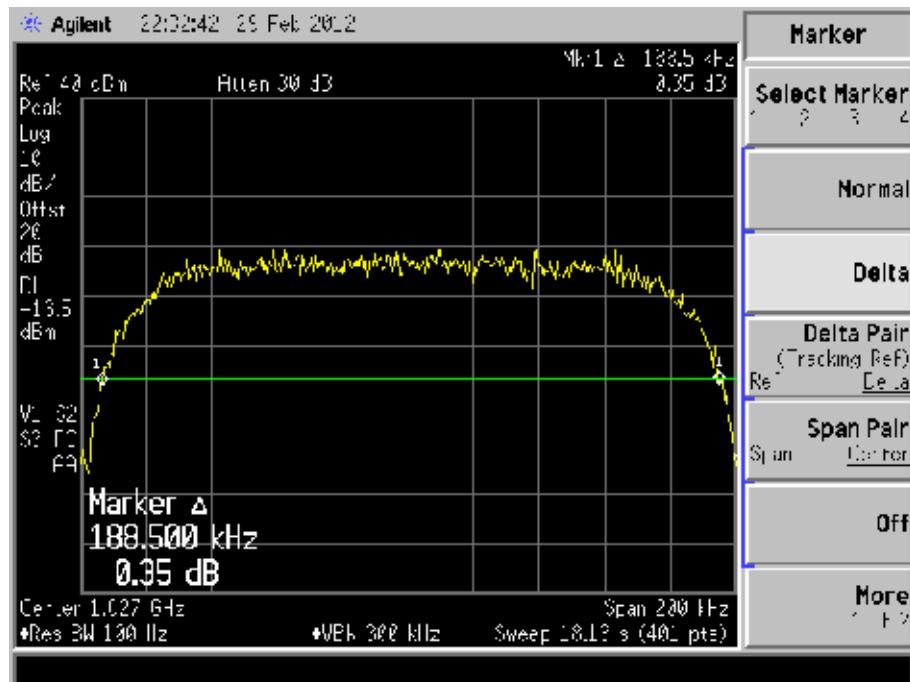



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**26dB Bandwidth Plots (Bearer Type: 15)**

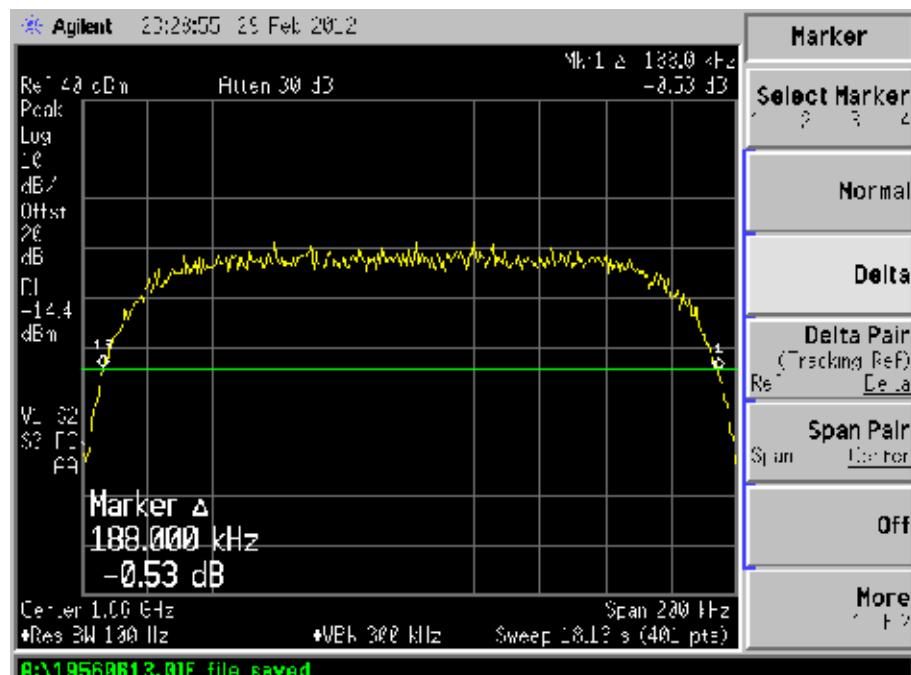


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 0)**

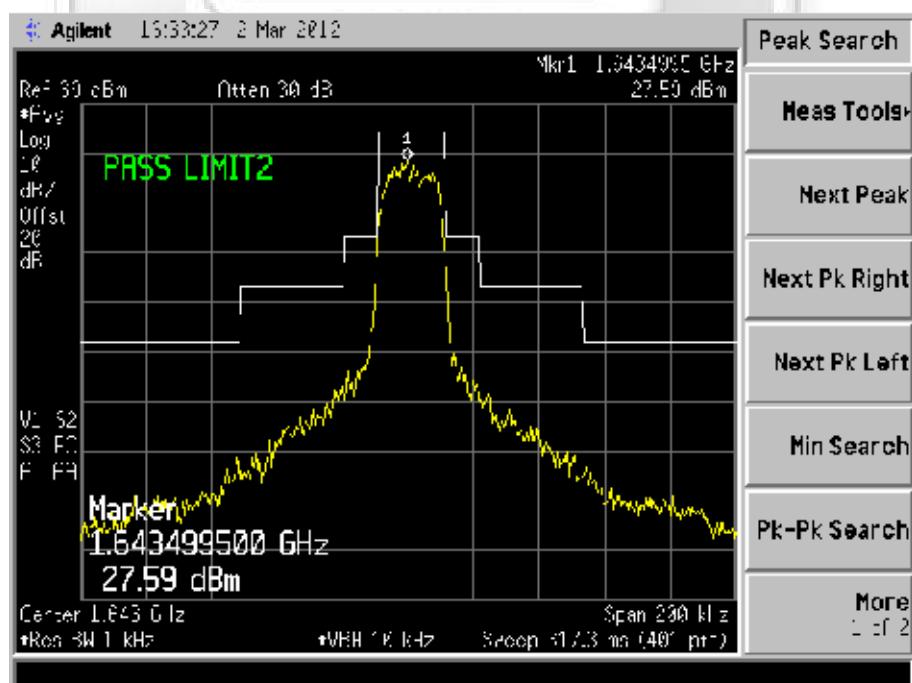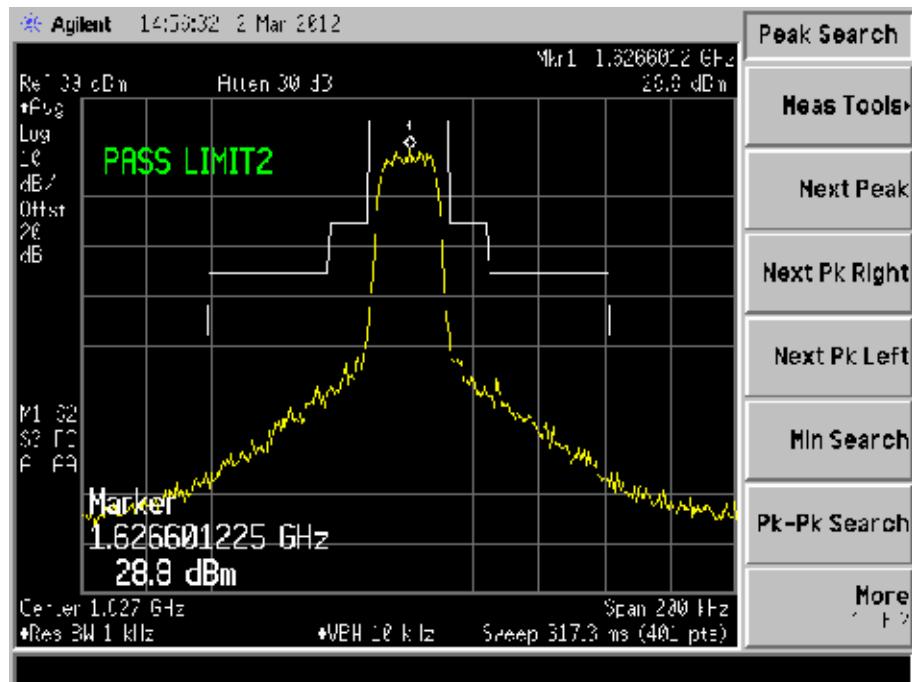



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 0)**

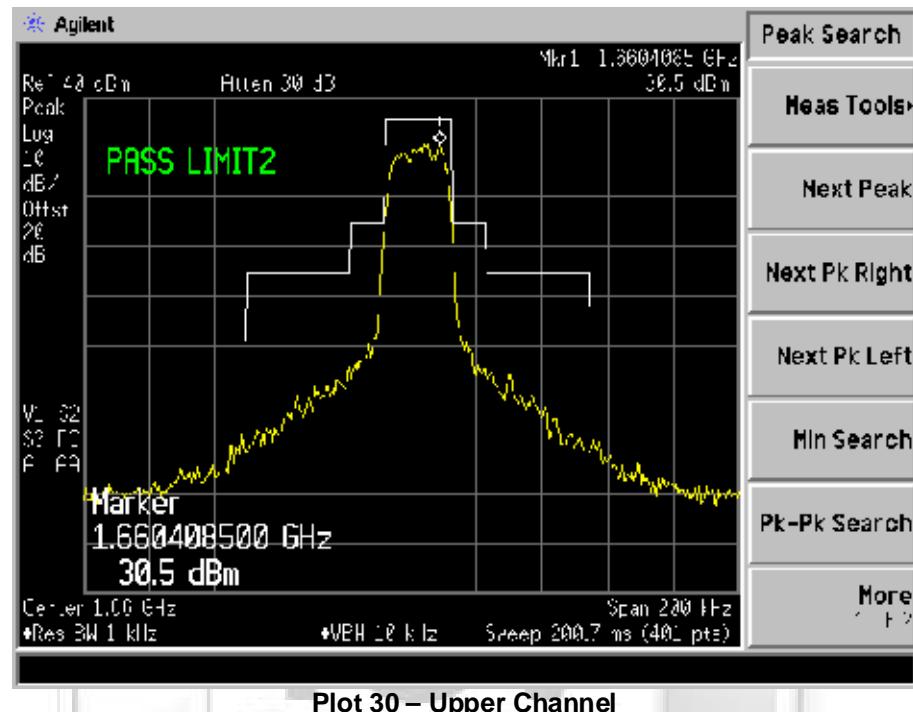


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 3)**

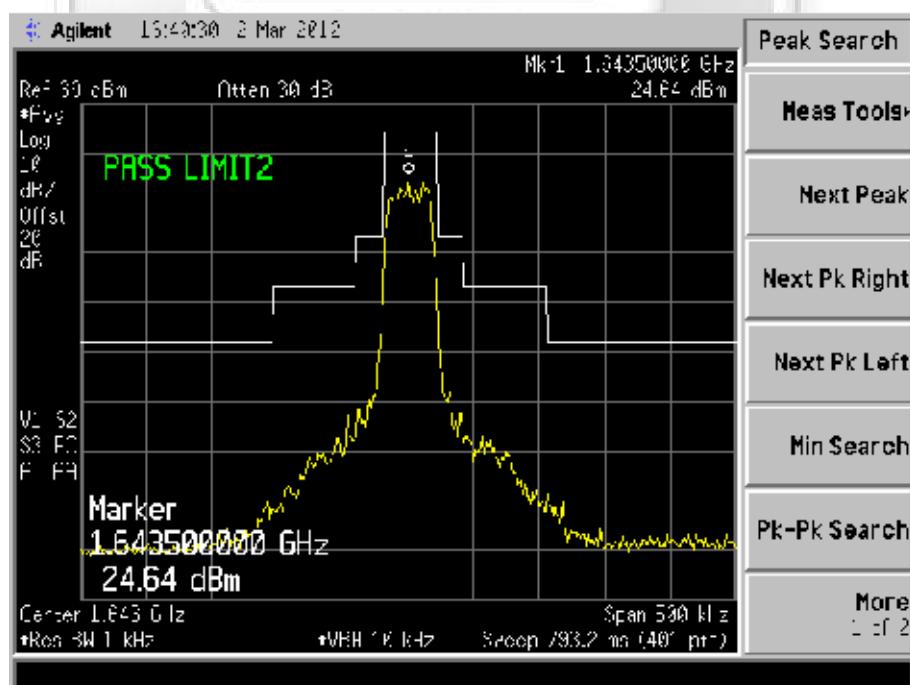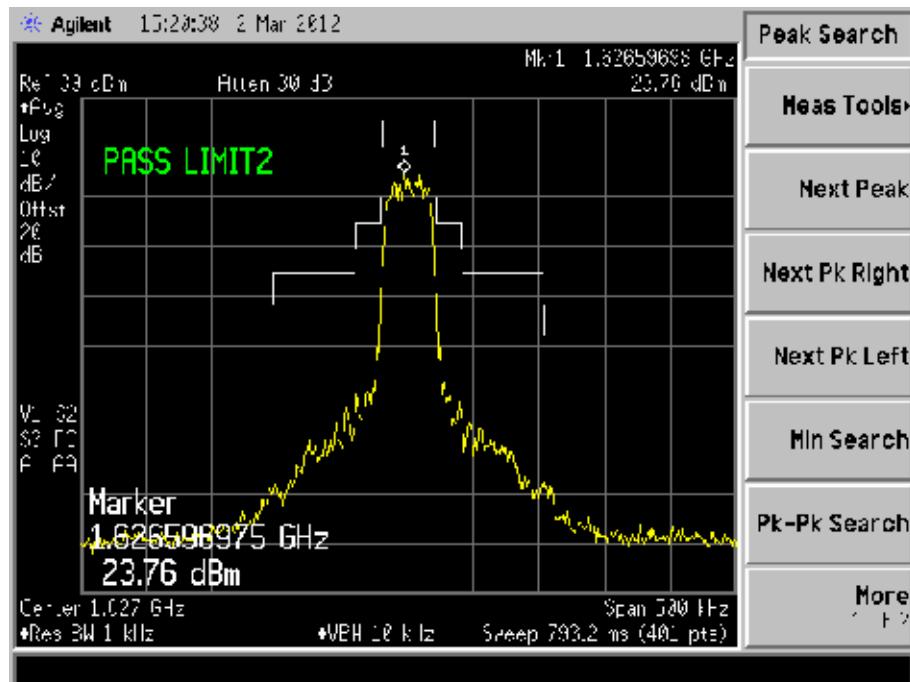


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 3)**

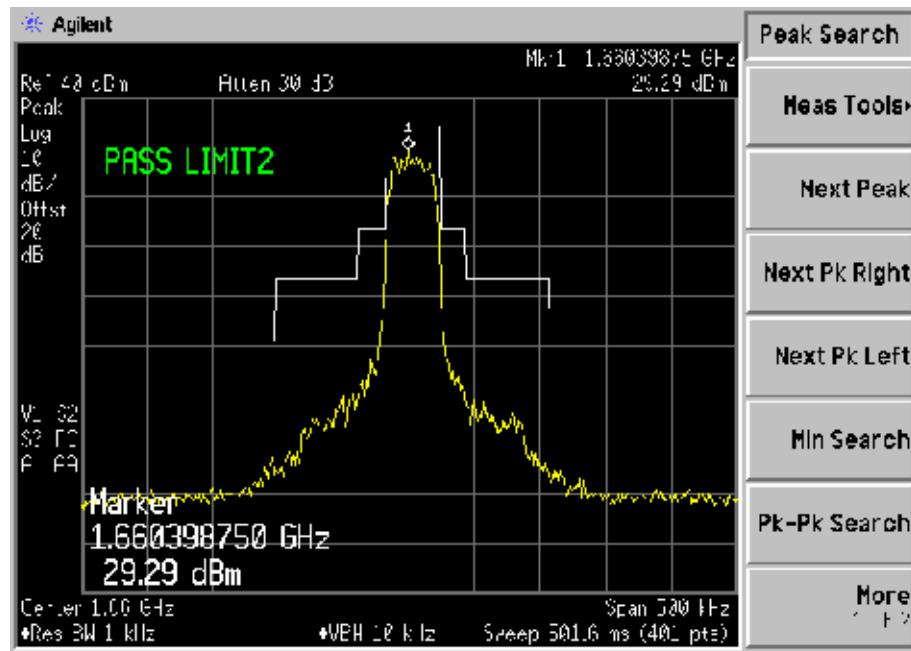


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 5)**

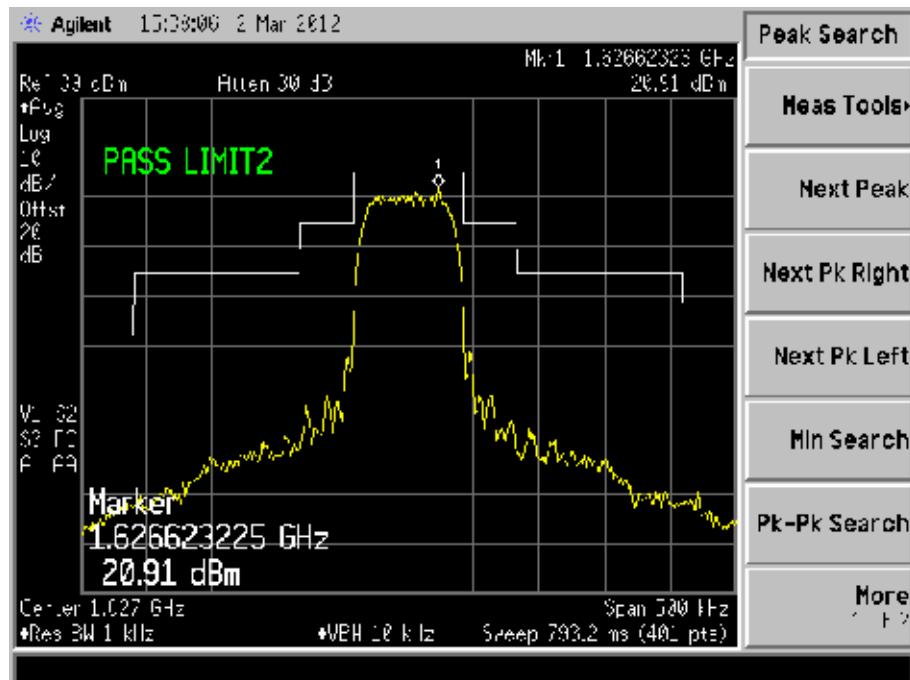


Plot 34 – Lower Channel

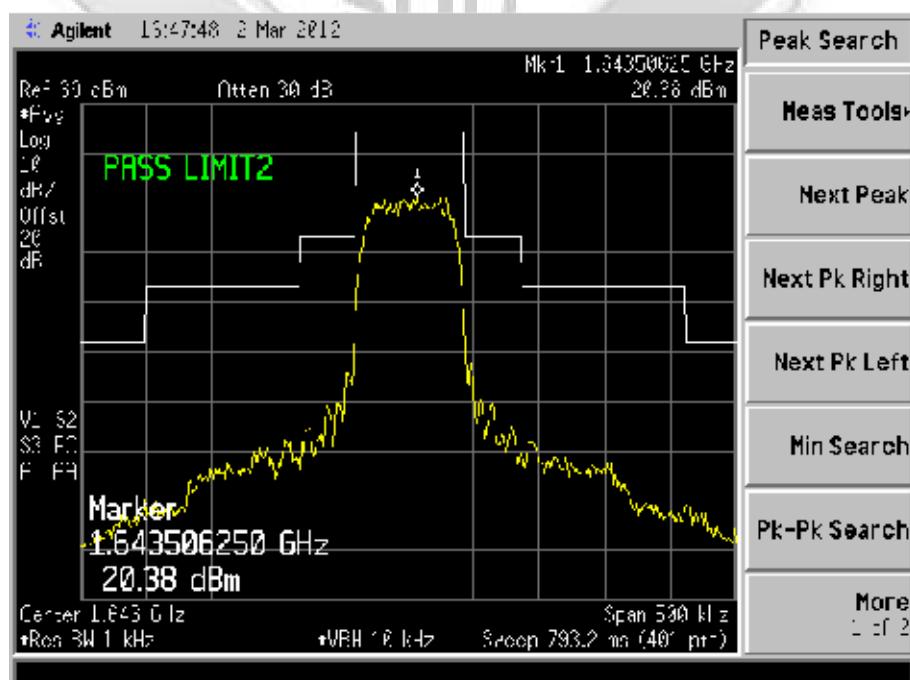

Plot 35 – Middle Channel



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 5)**

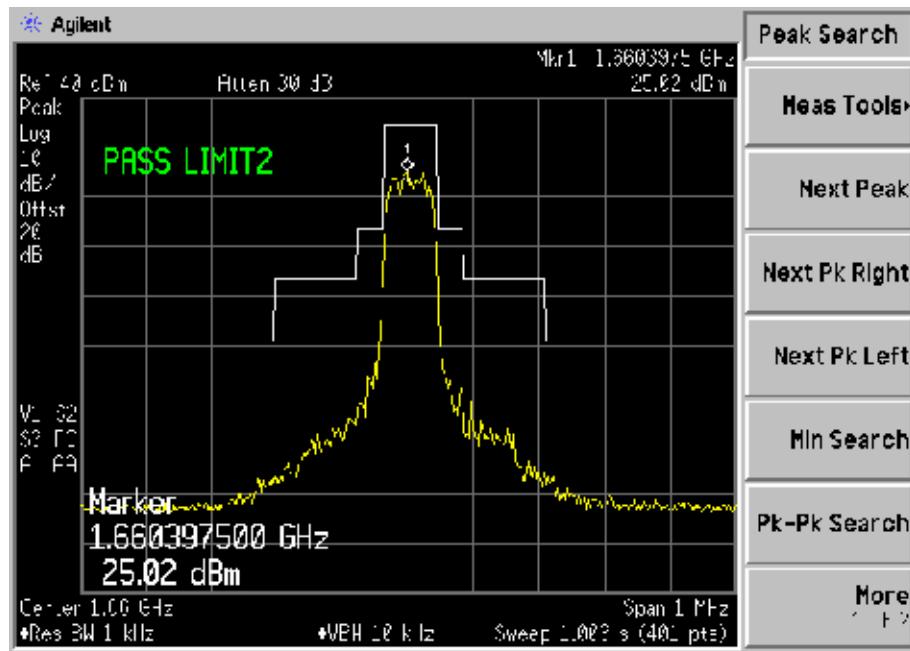


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 7)

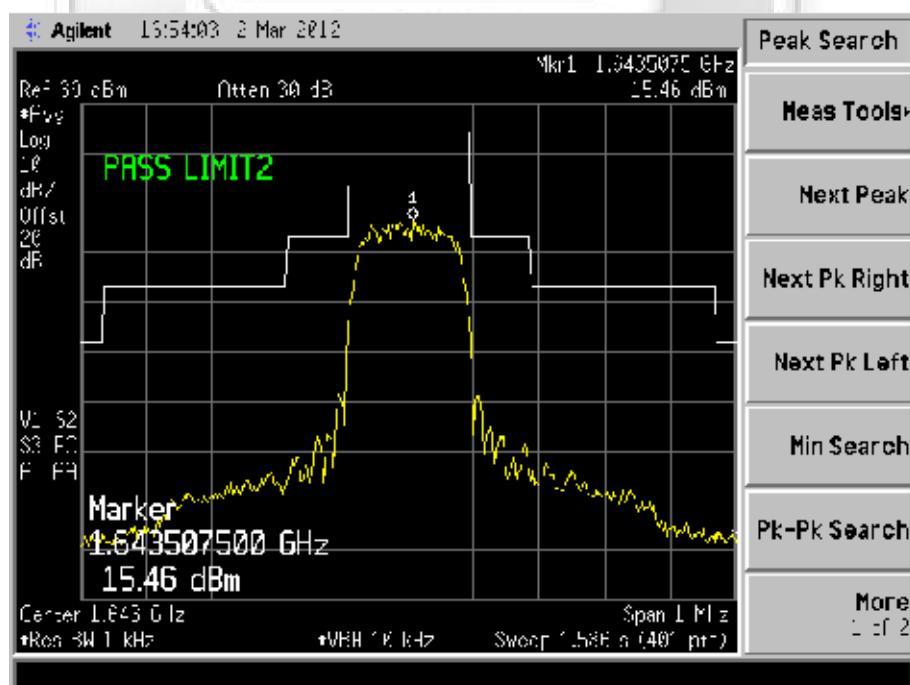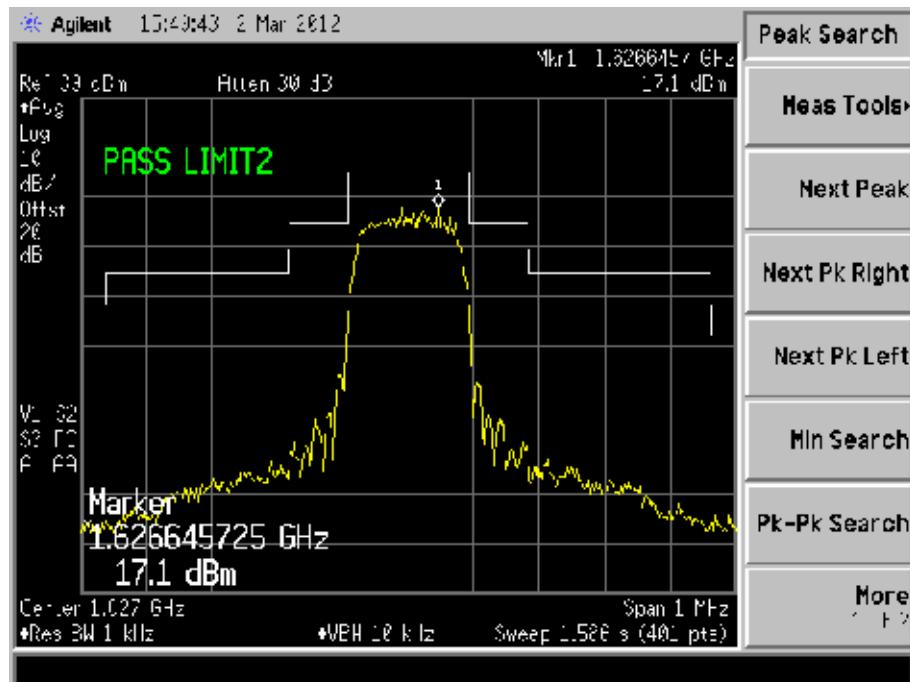



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 7)**

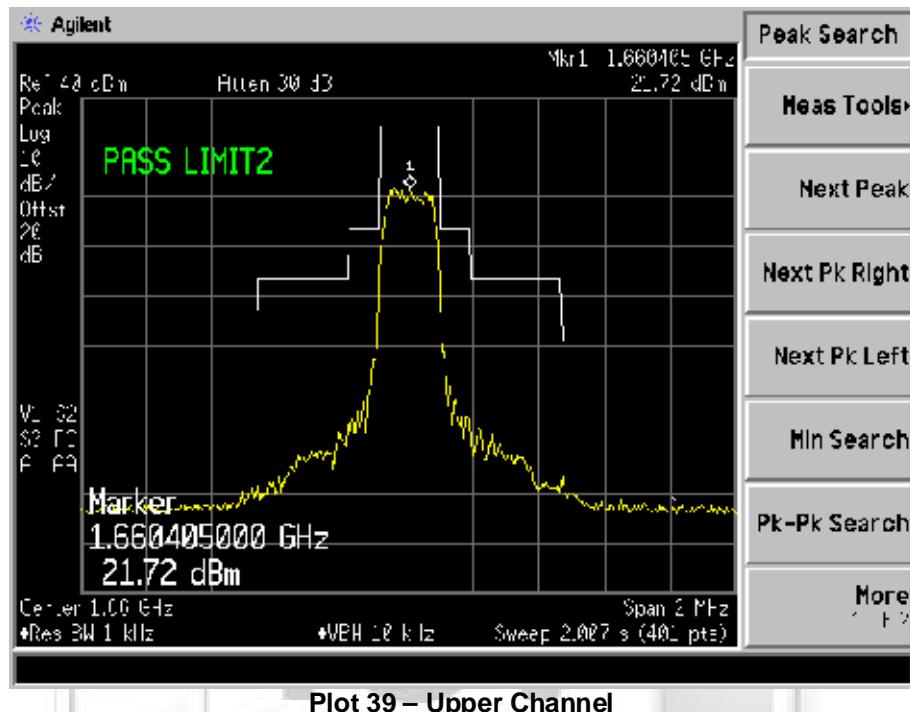


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 11)**

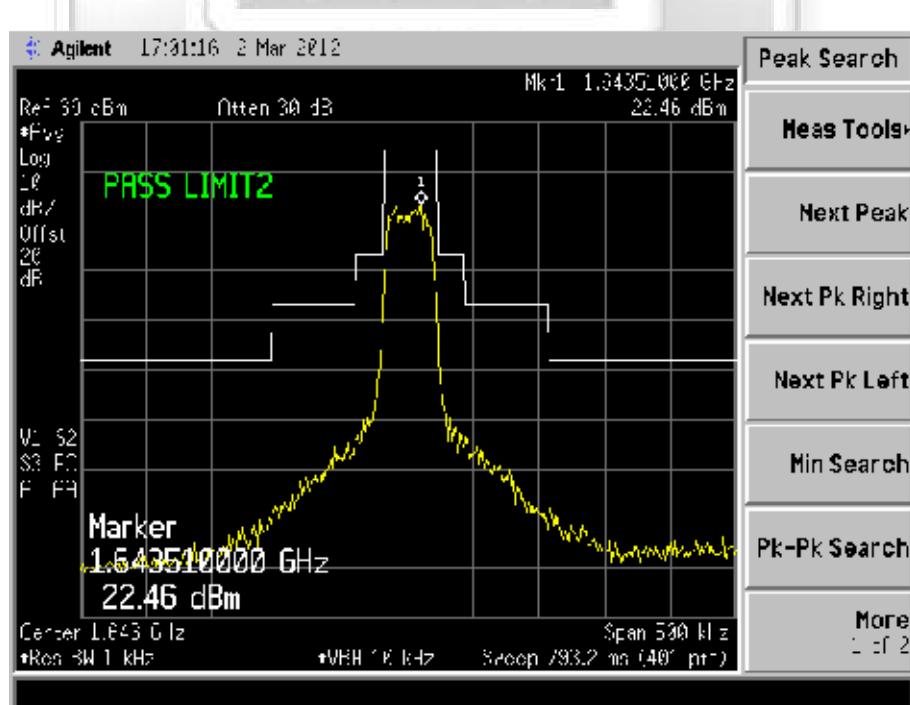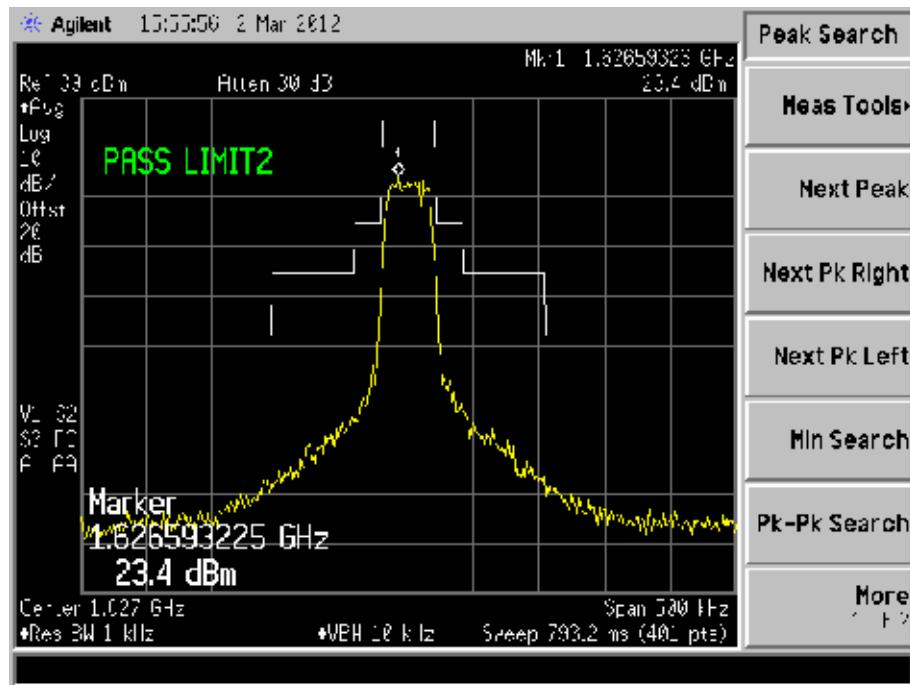


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 11)**

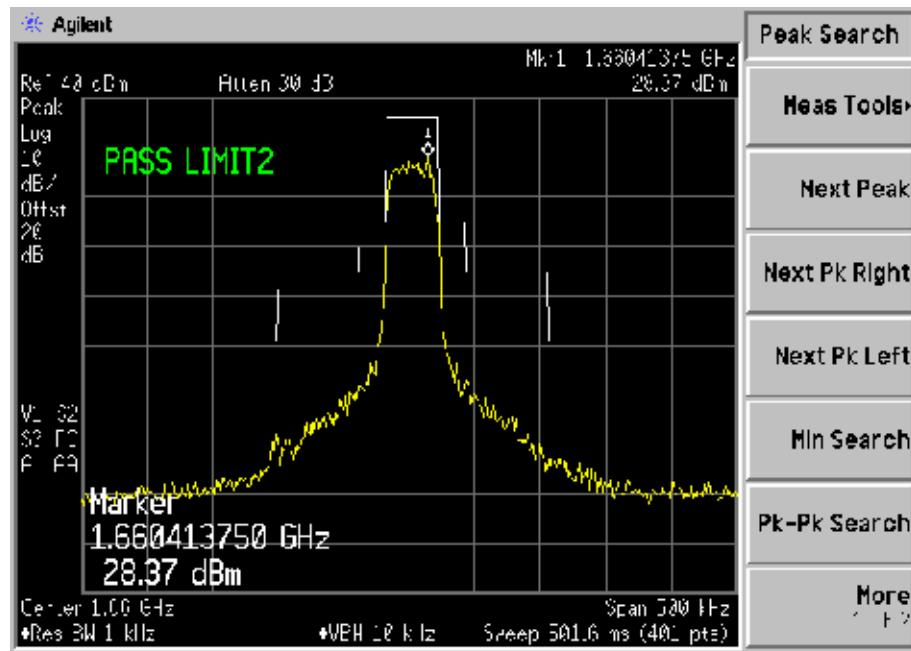


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 13)**

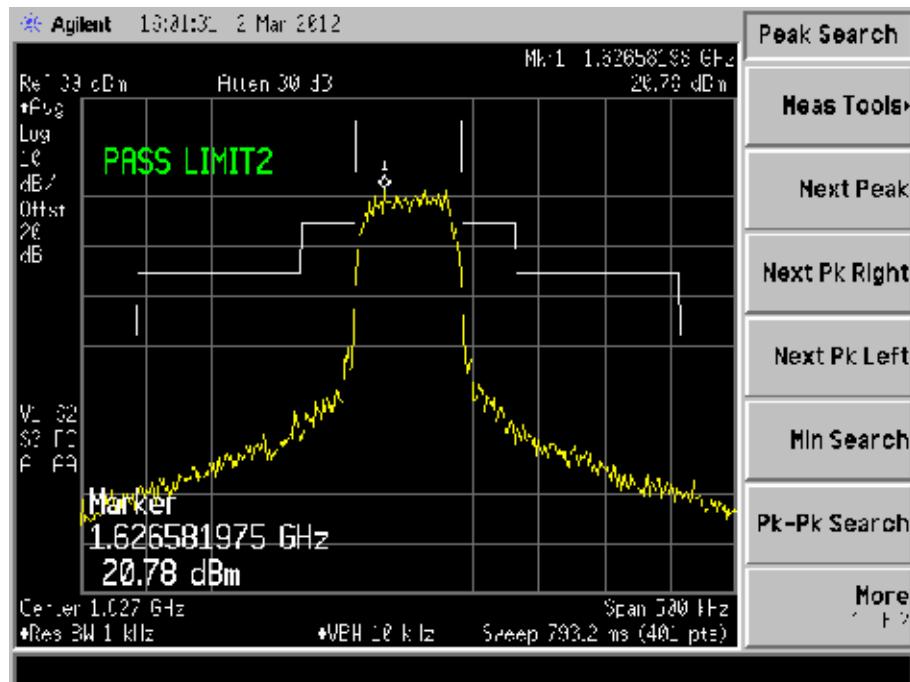


Plot 43 – Lower Channel

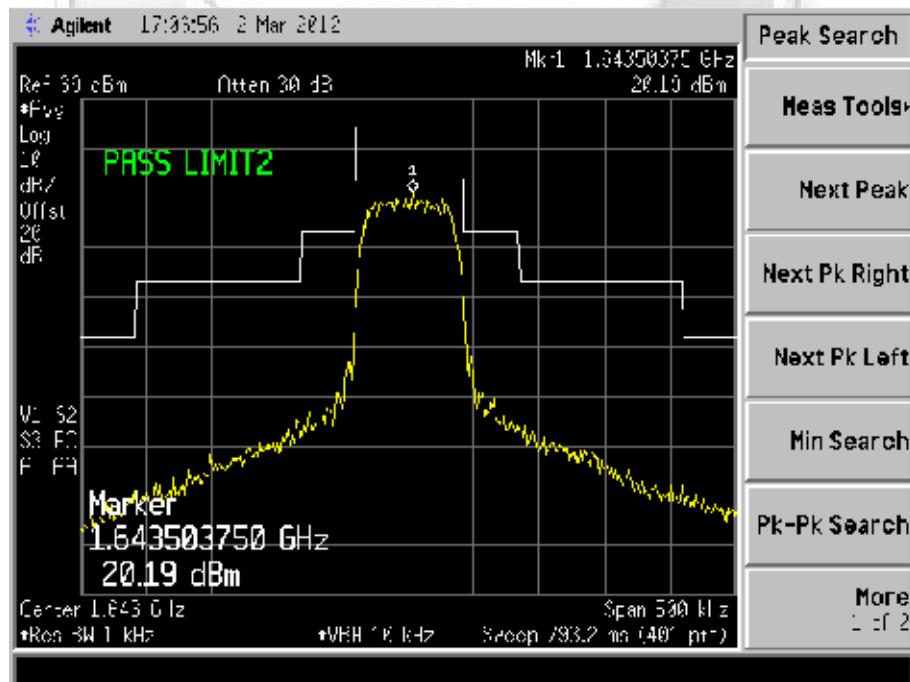

Plot 44 – Middle Channel


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 13)**

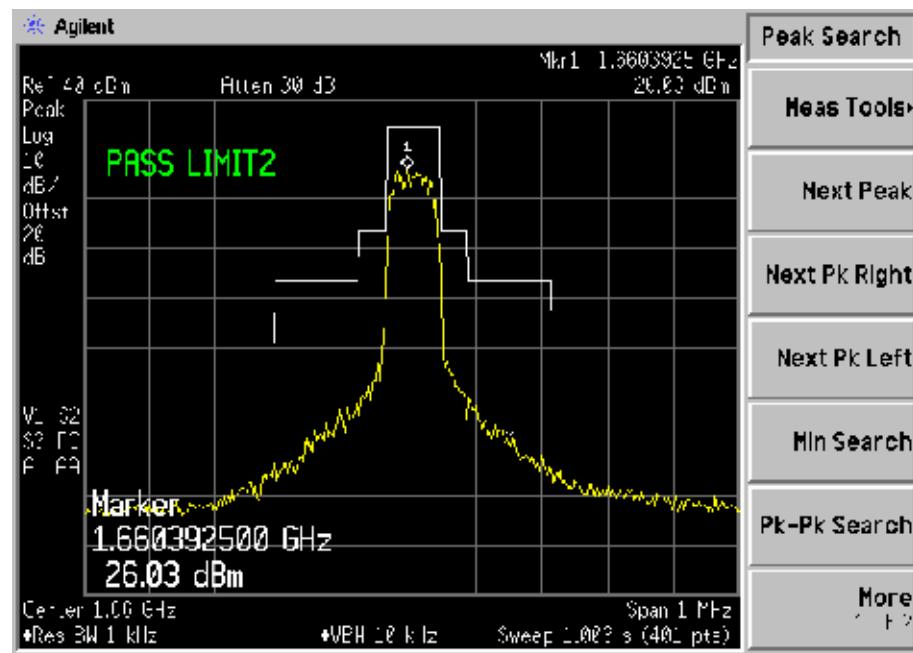


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 15)

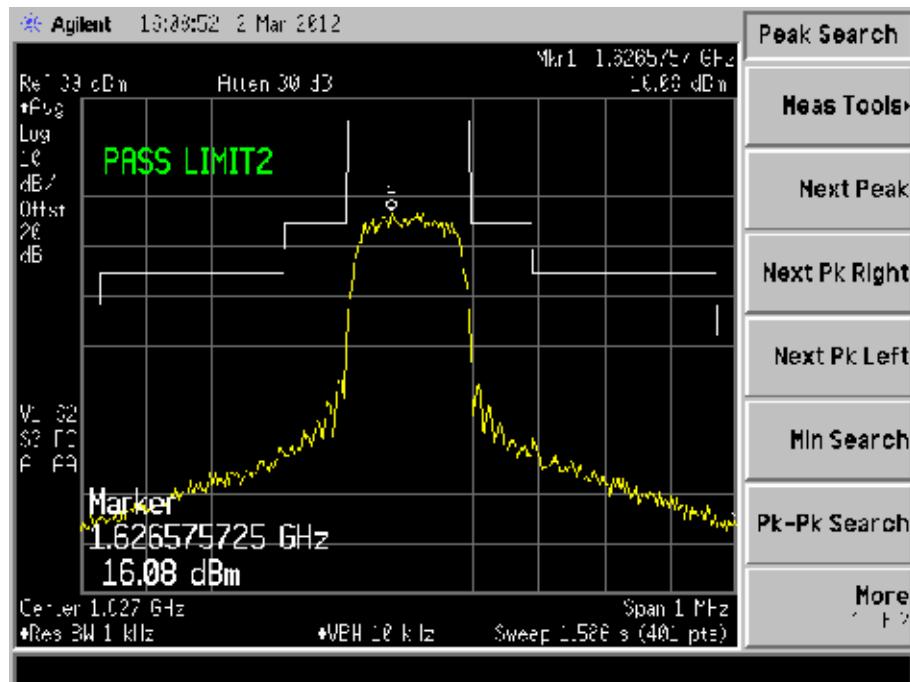


Plot 46 – Lower Channel

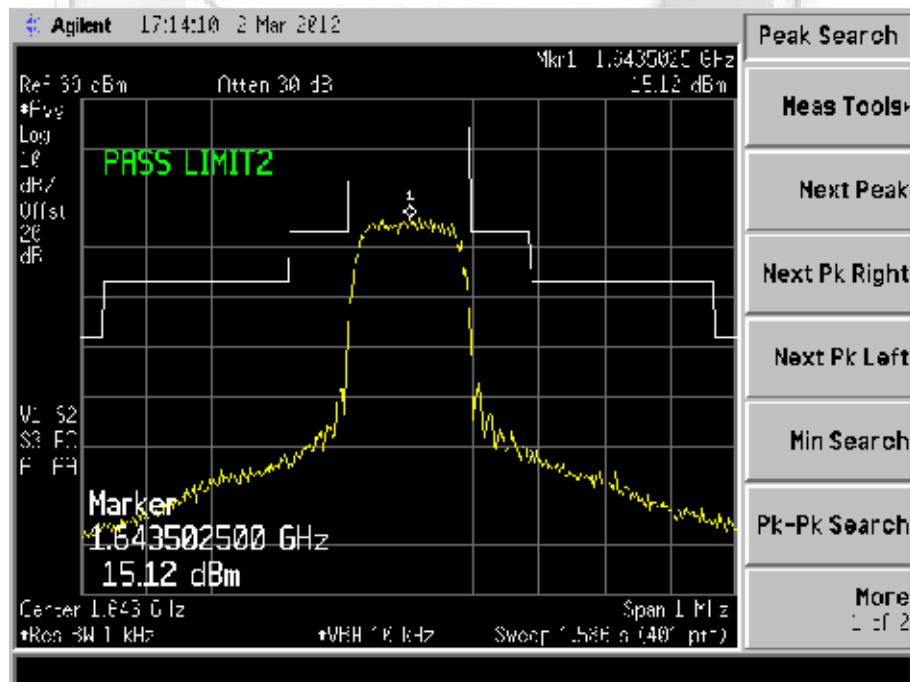

Plot 47 – Middle Channel



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**In Band Emissions Plots (Bearer Type: 15)**

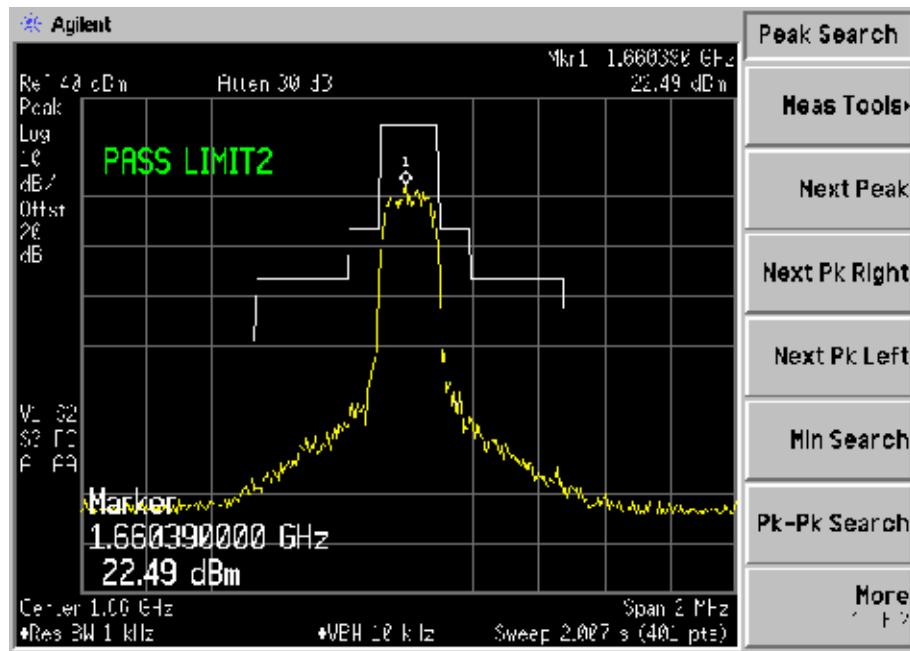



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 0)

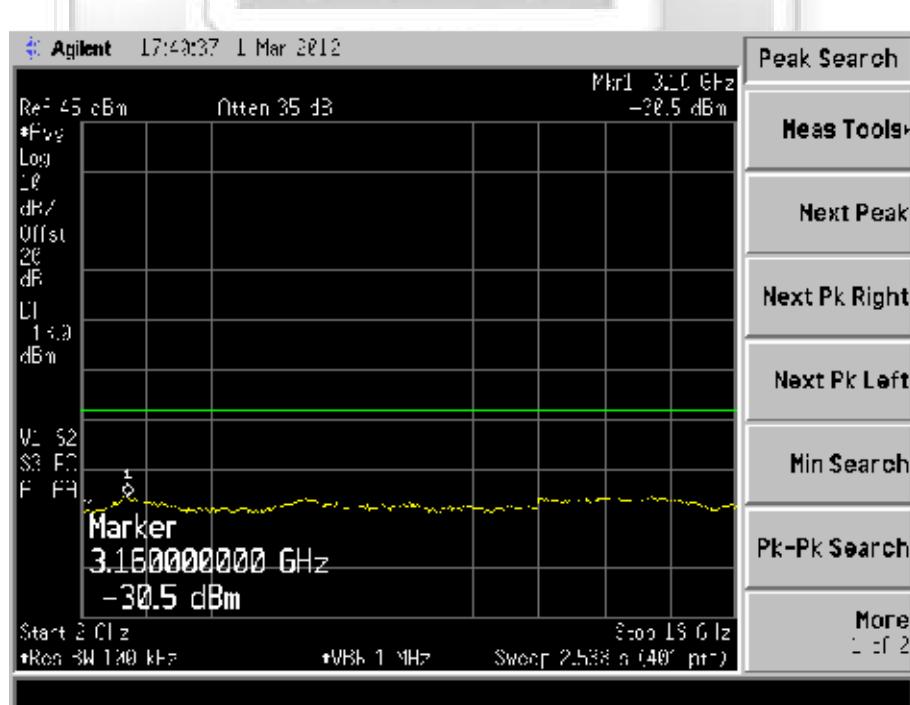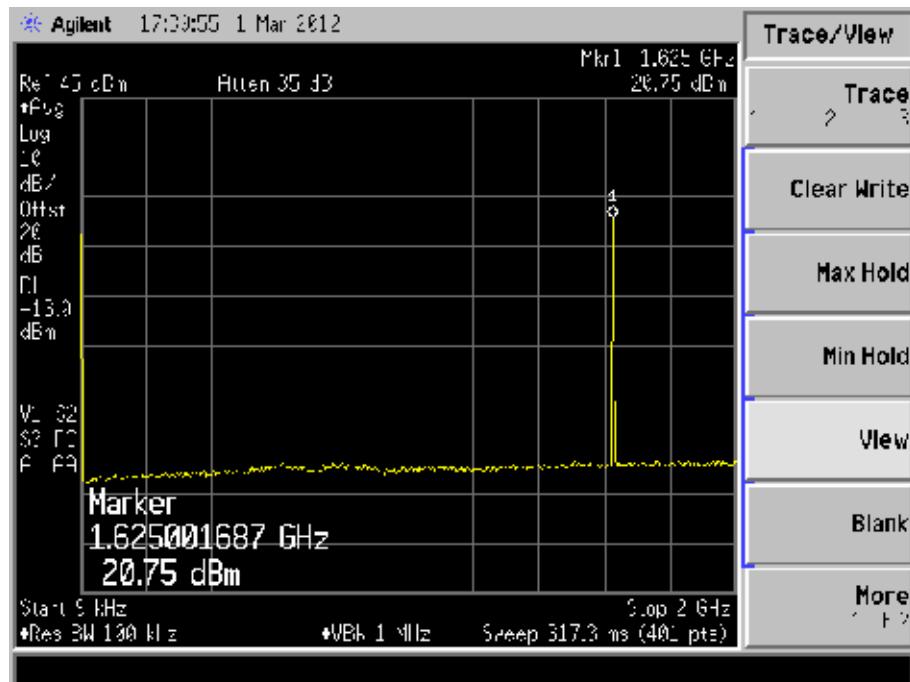


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 0)**

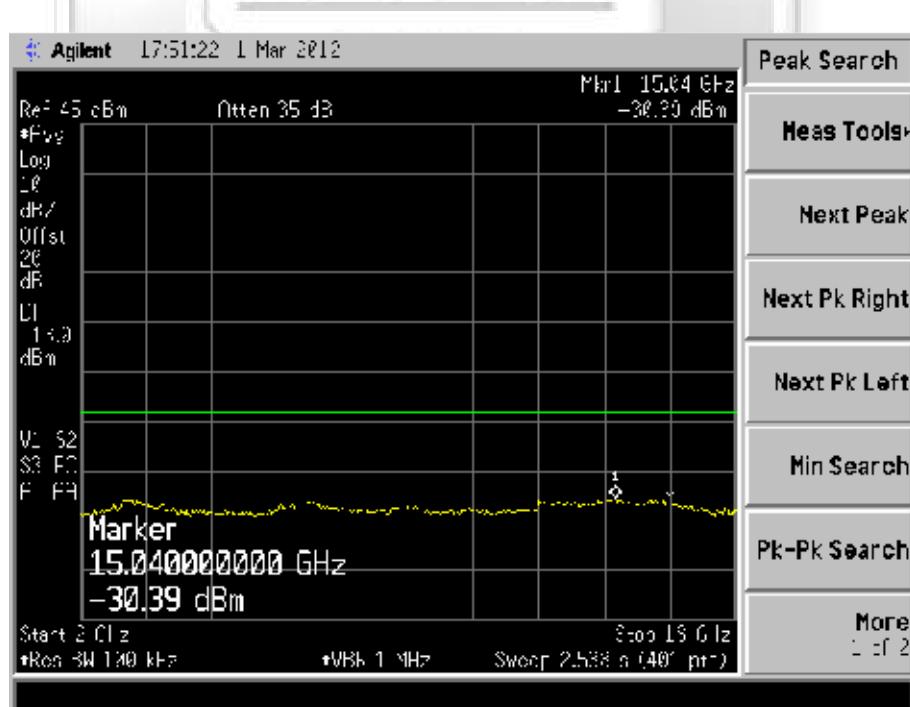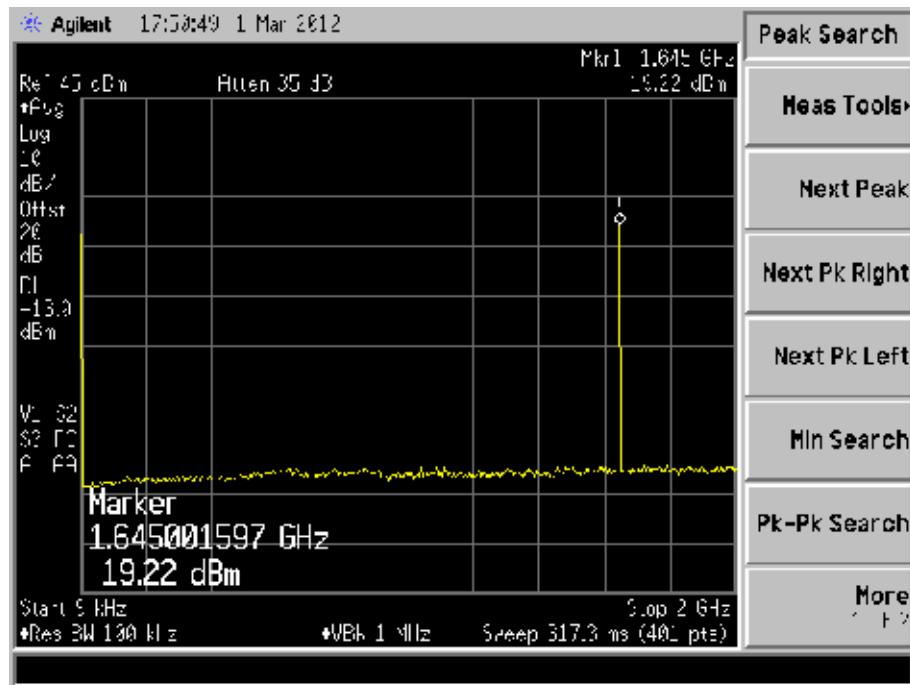


## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

## Out of Band Spurious Plots (Bearer Type: 0)

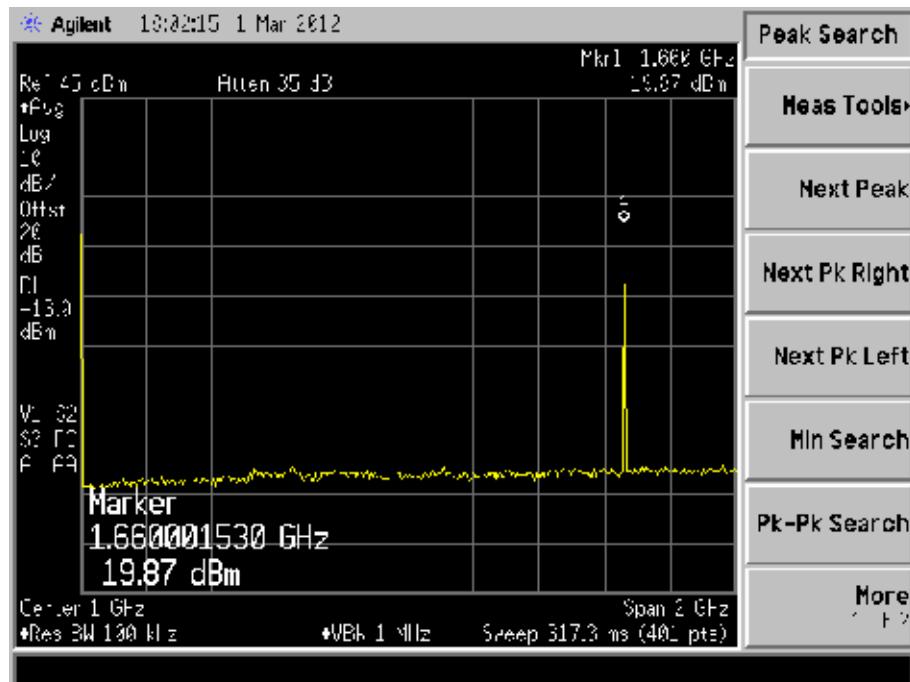



## Plot 53 – Upper Channel

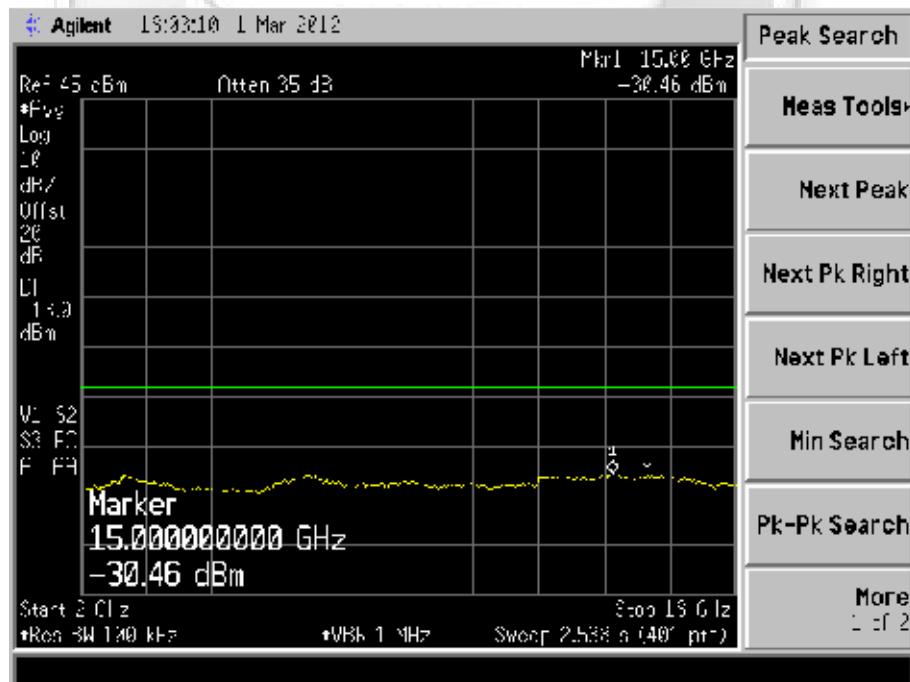

## Plot 54 – Upper Channel



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 3)**

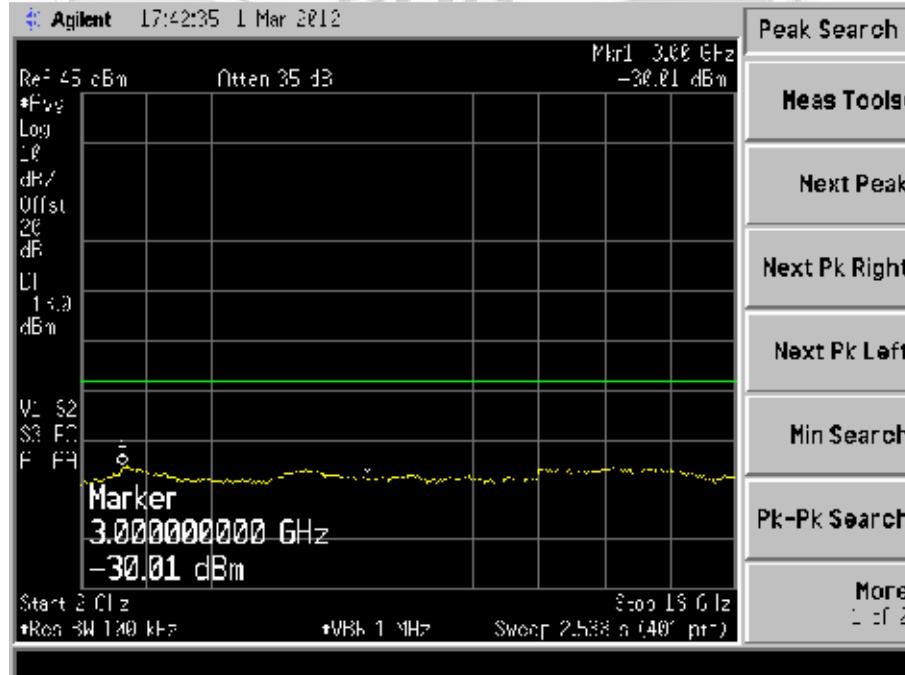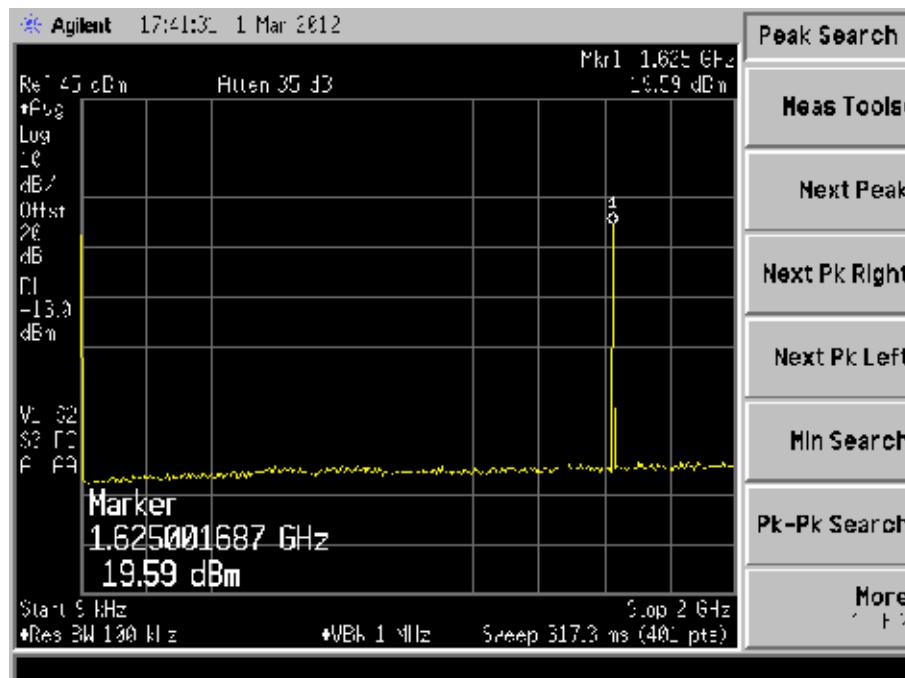



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 3)**

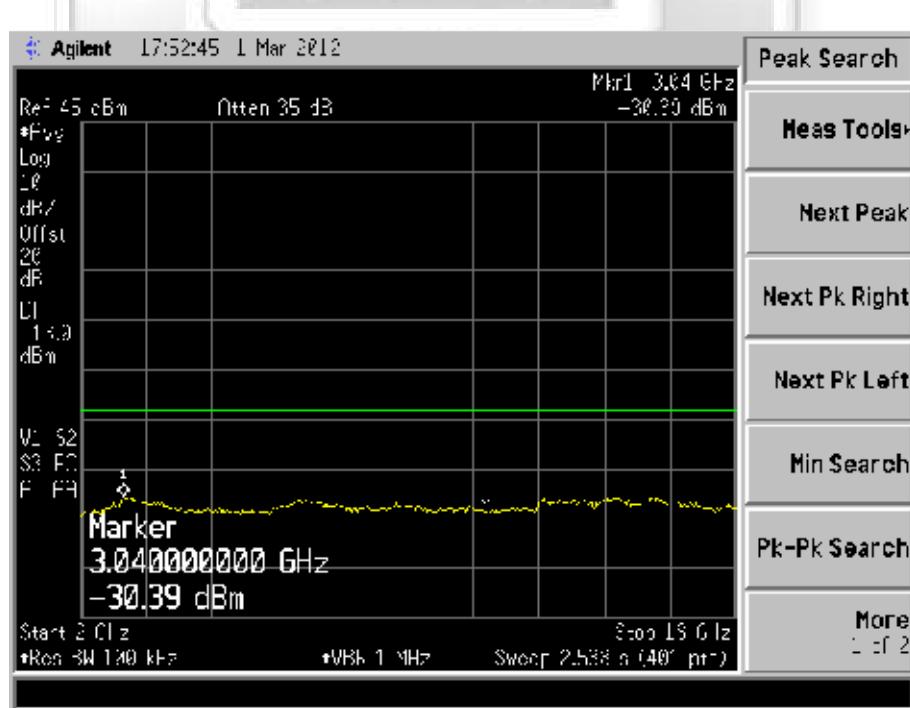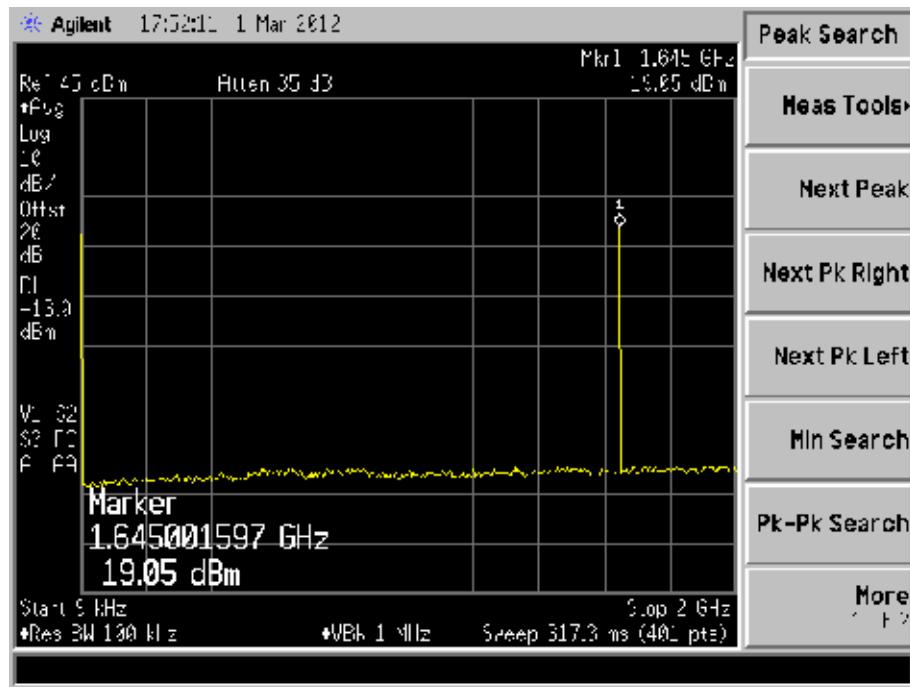


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 3)

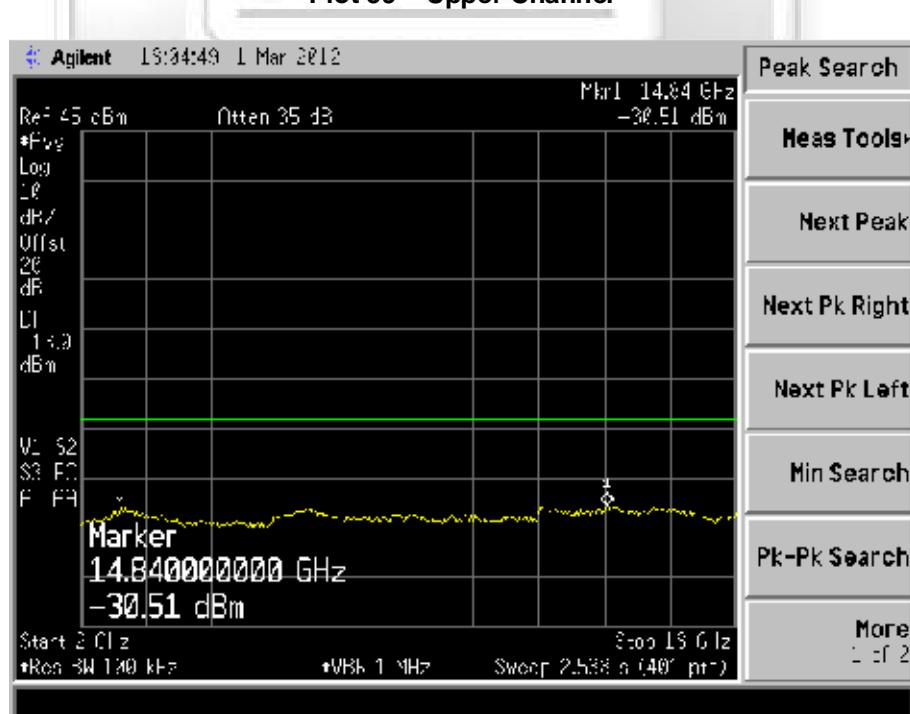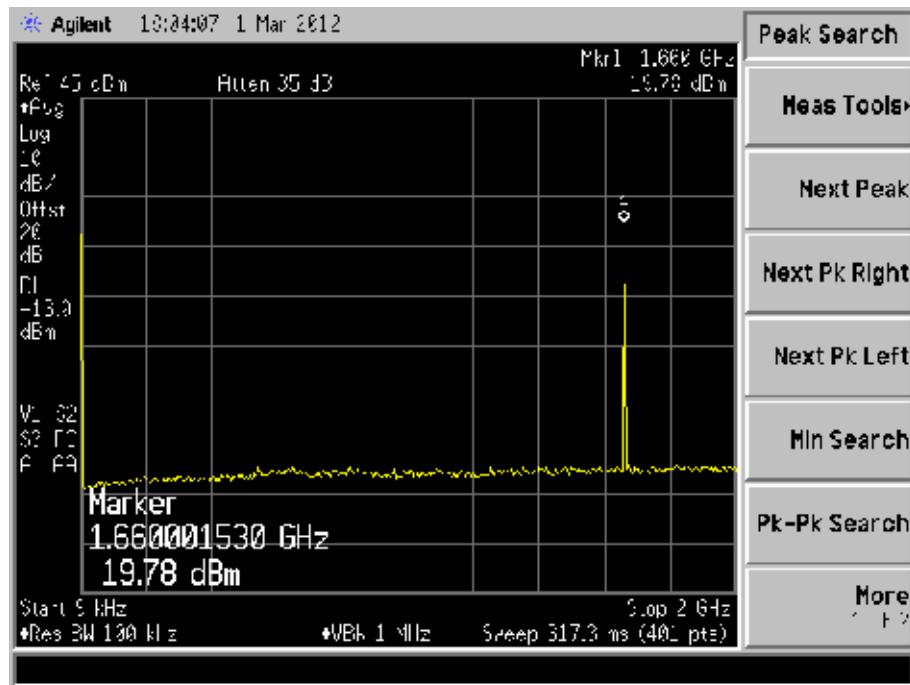


## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

### Out of Band Spurious Plots (Bearer Type: 5)

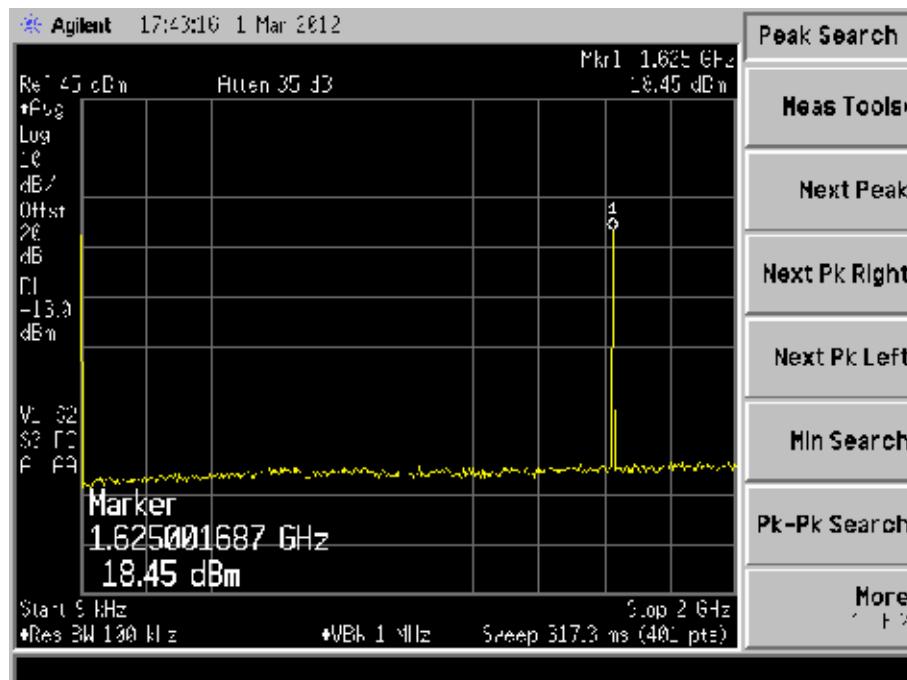



Plot 61 – Lower Channel

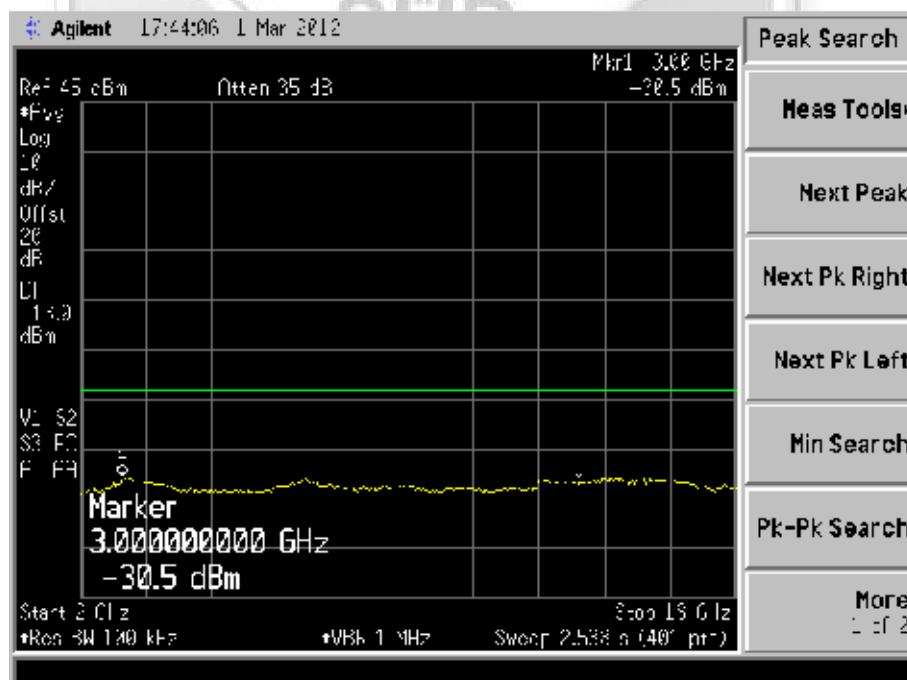

Plot 62 – Lower Channel


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 5)**

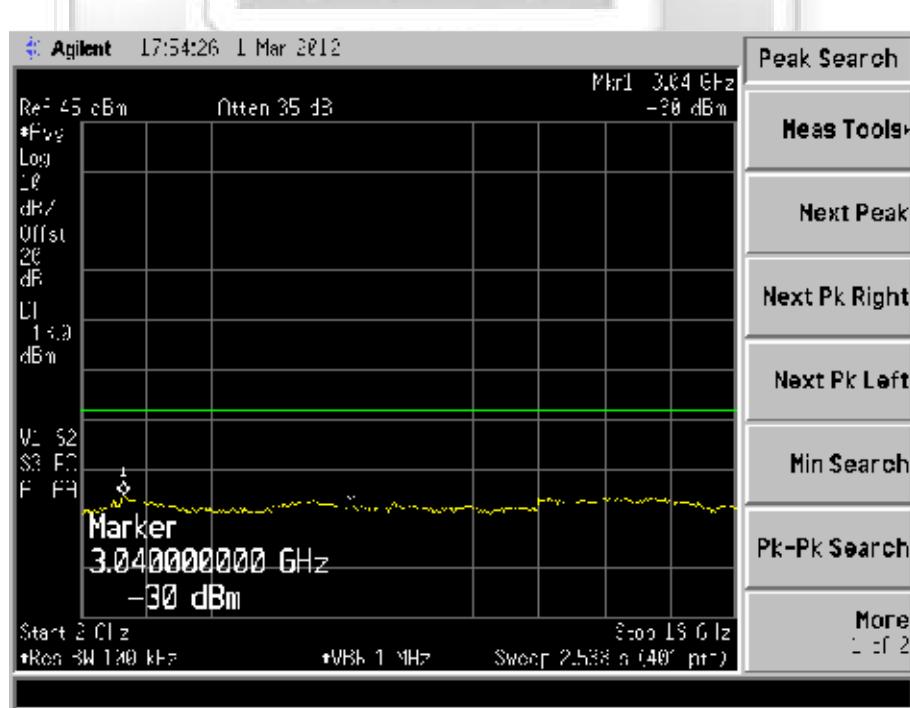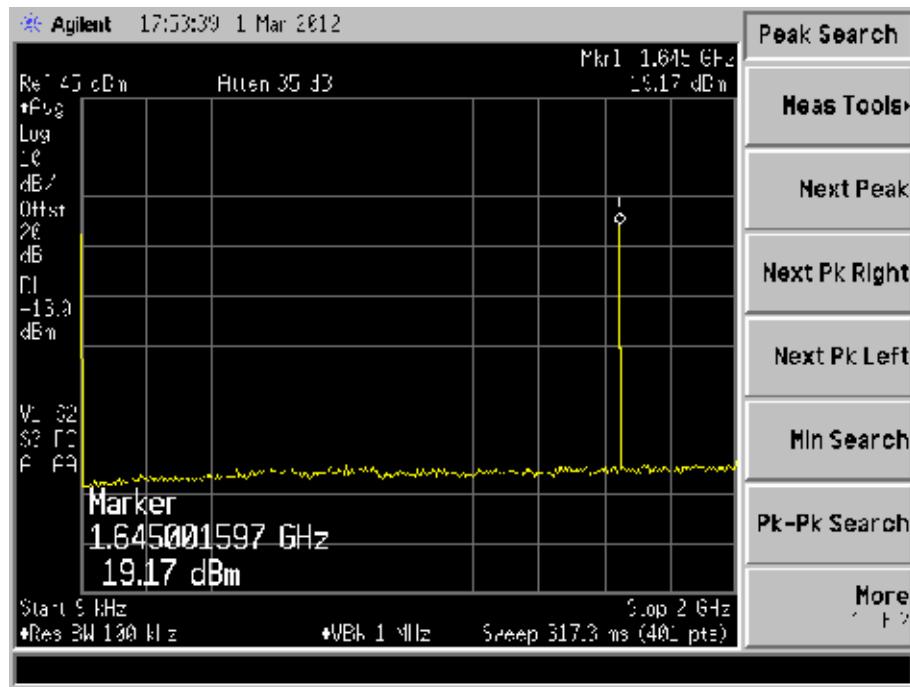


## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

## Out of Band Spurious Plots (Bearer Type: 5)

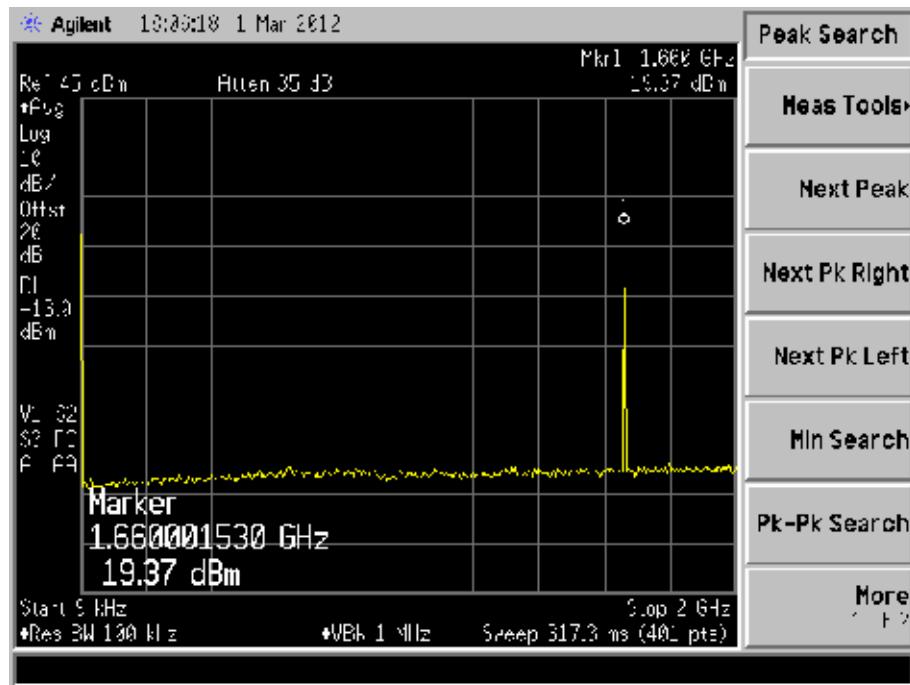



## Plot 65 – Upper Channel

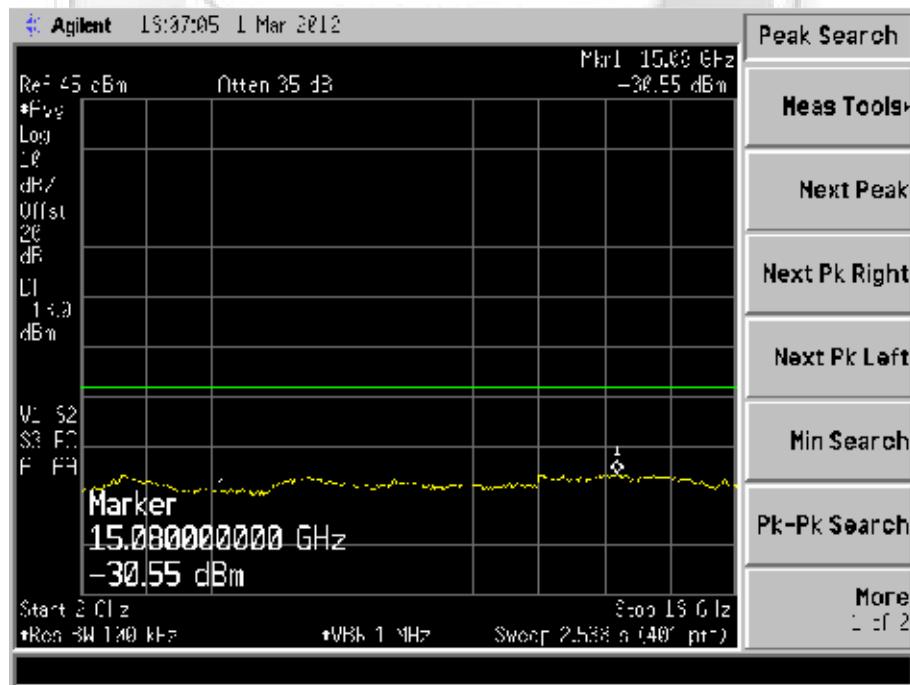

## Plot 66 – Upper Channel



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 7)**

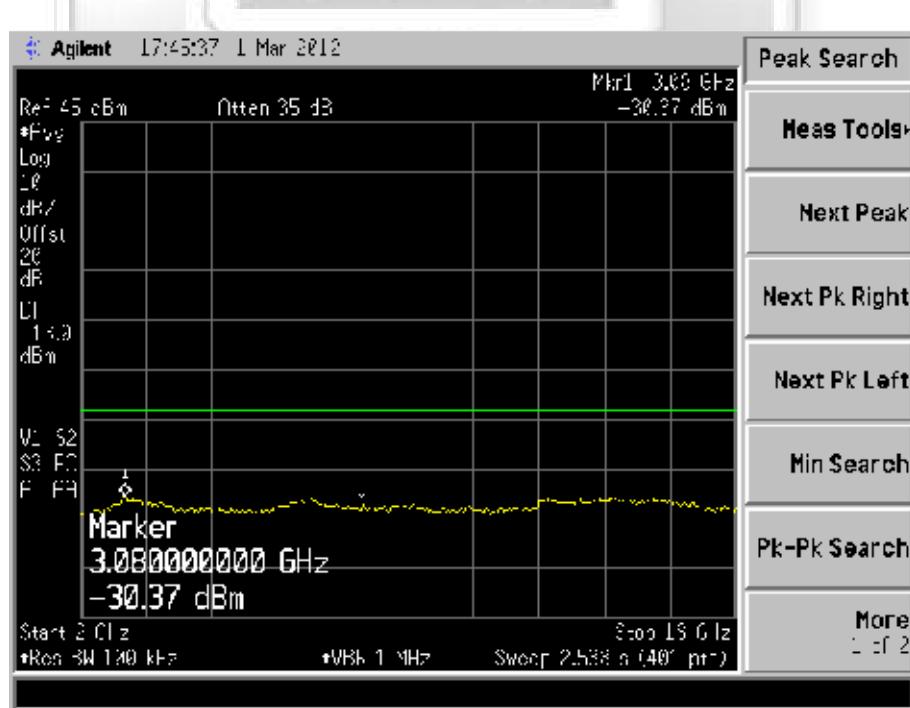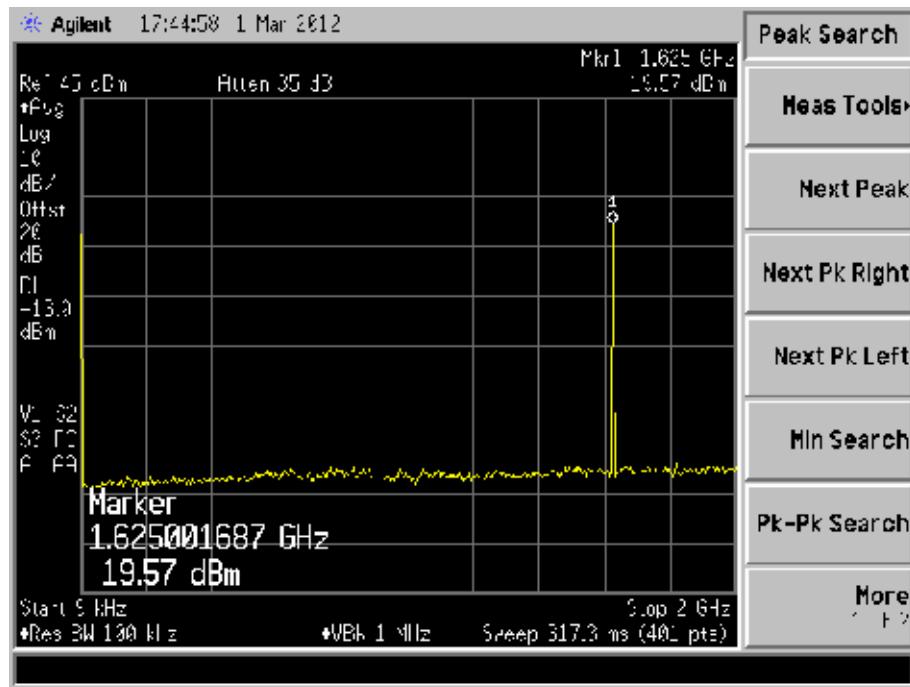



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 7)**

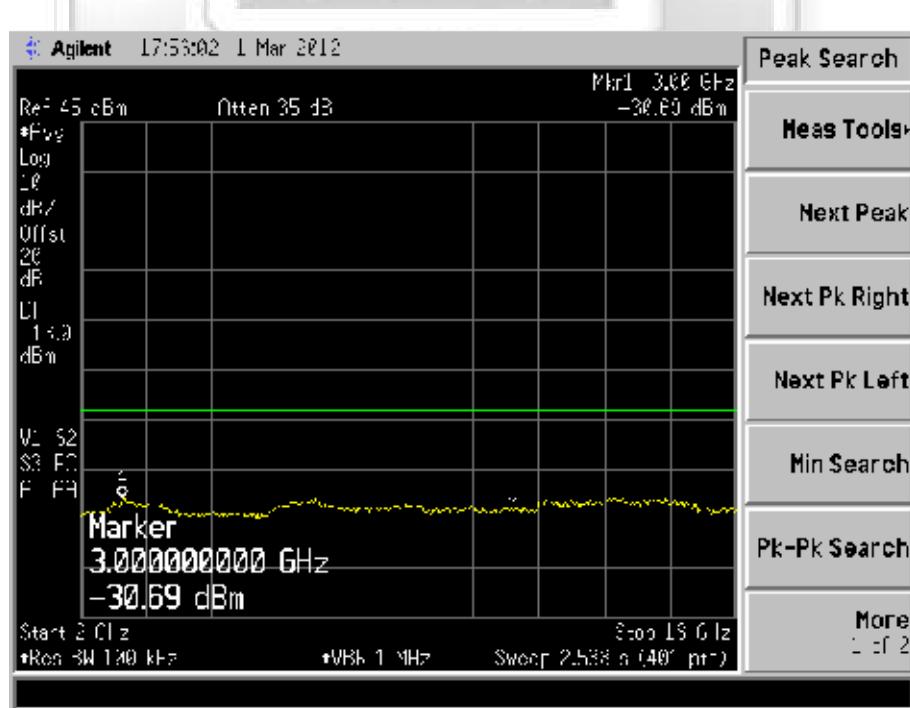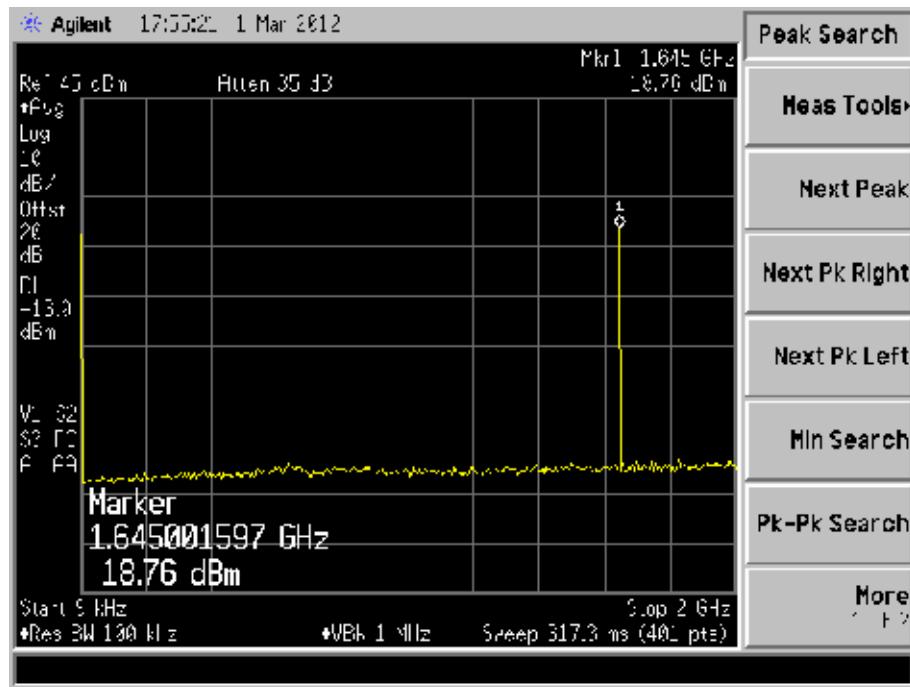



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 7)

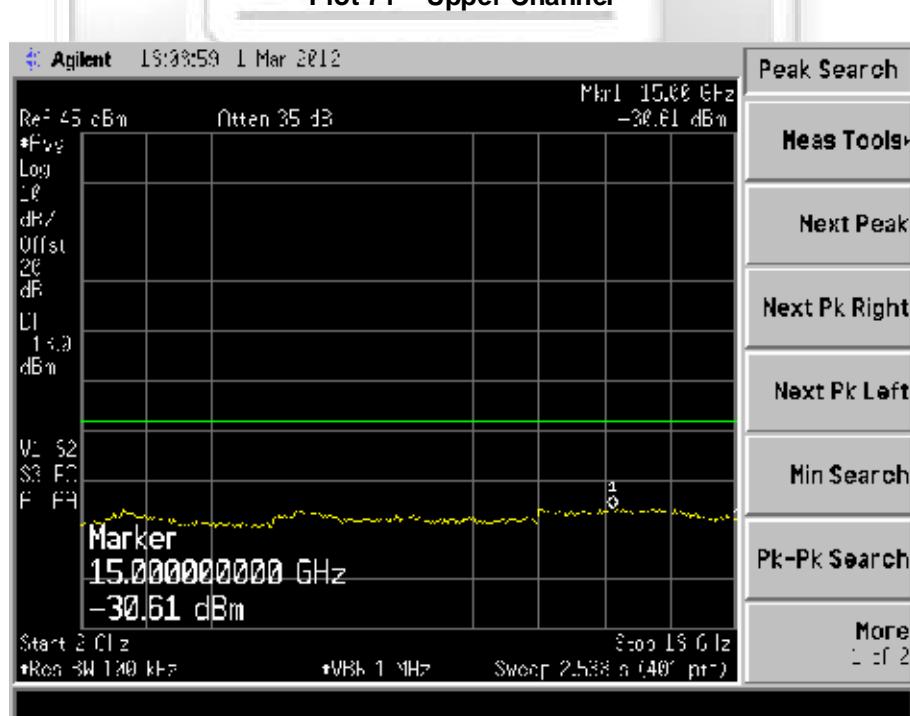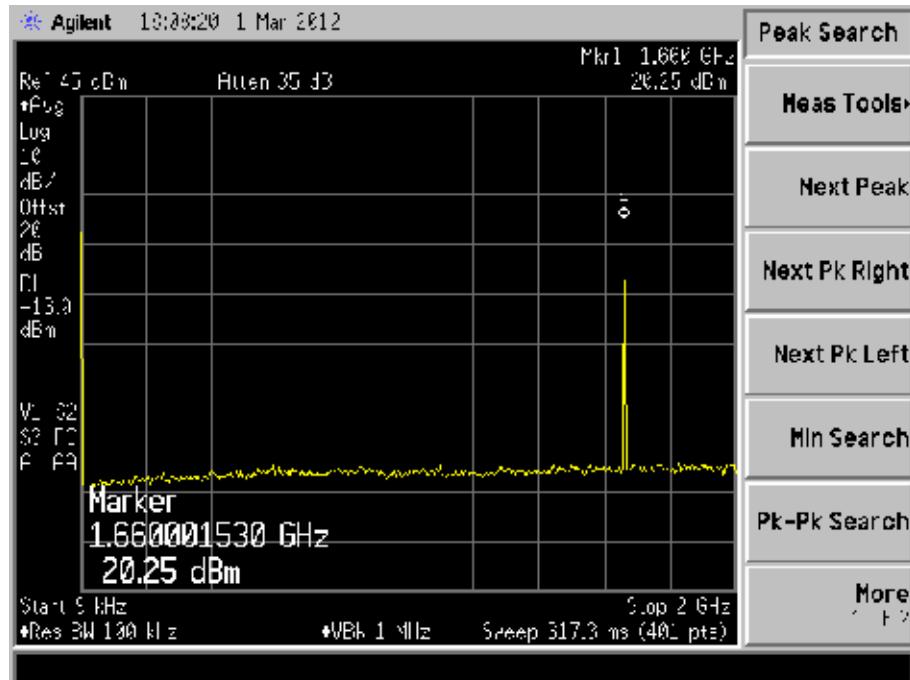


**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 11)**

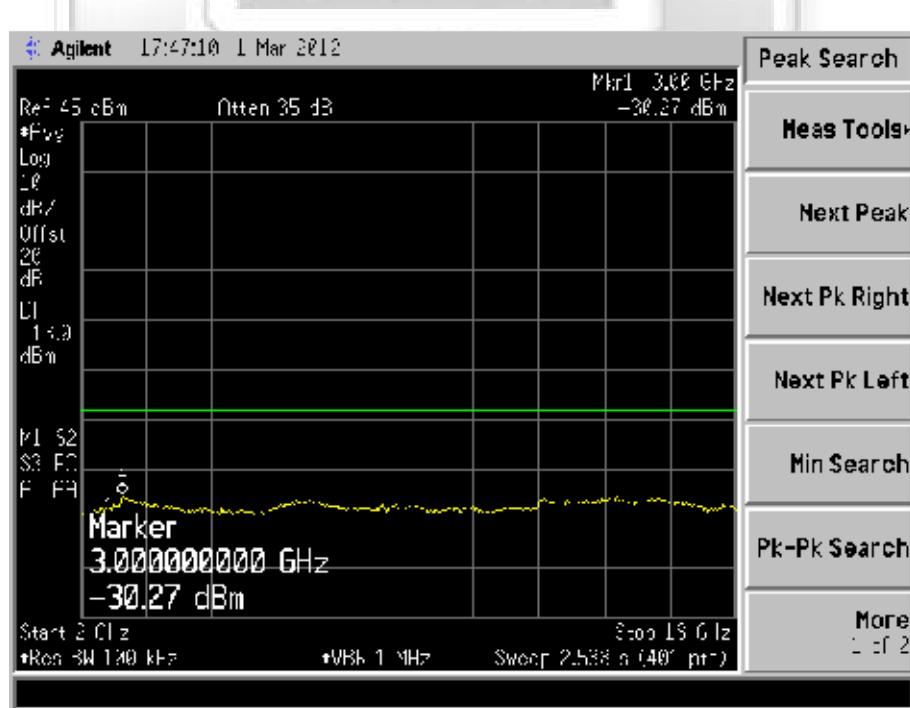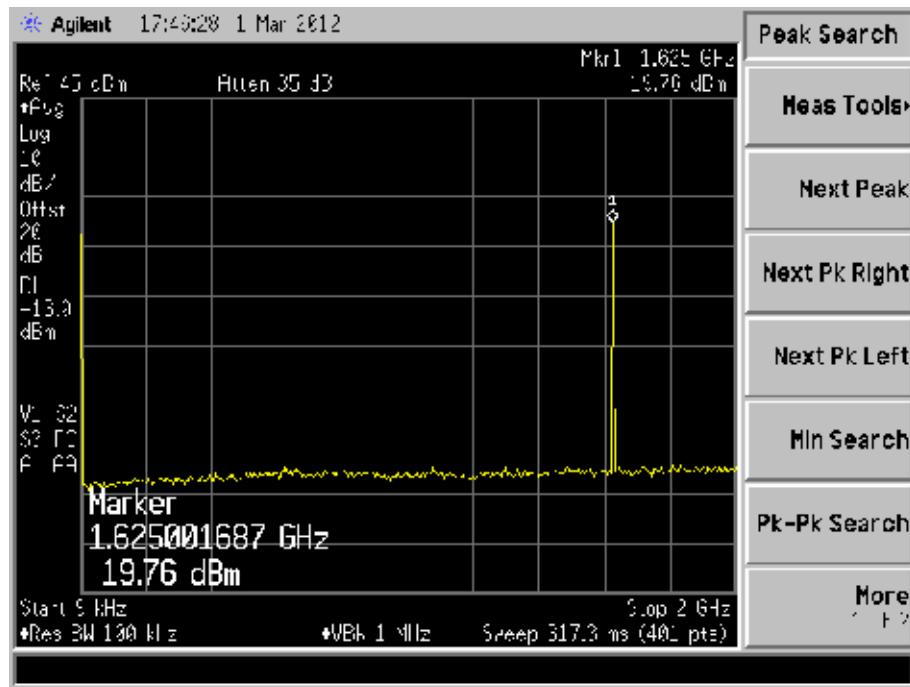


## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

## Out of Band Spurious Plots (Bearer Type: 11)

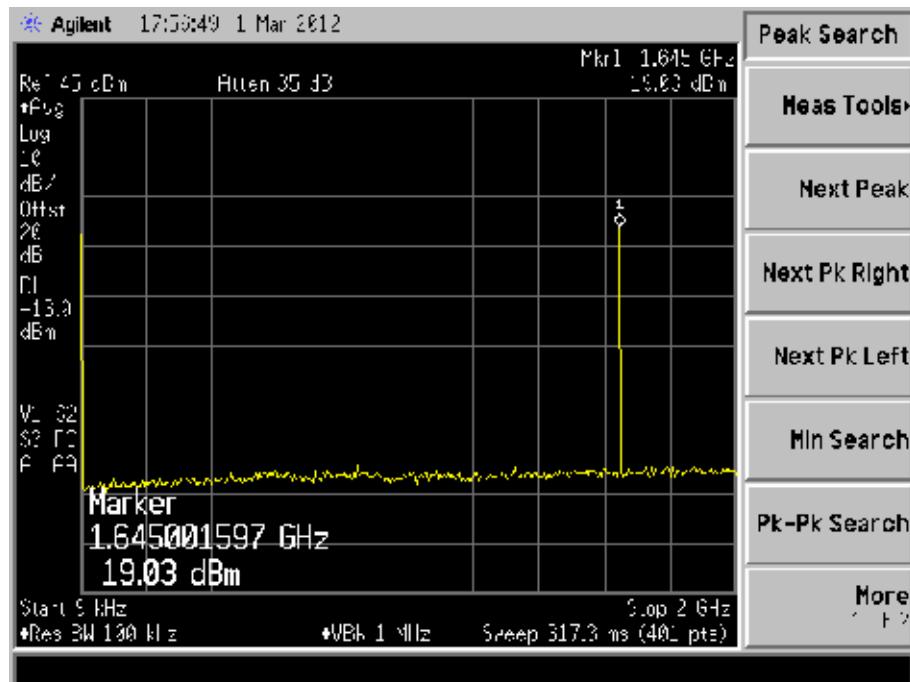


Plot 75 – Middle Channel

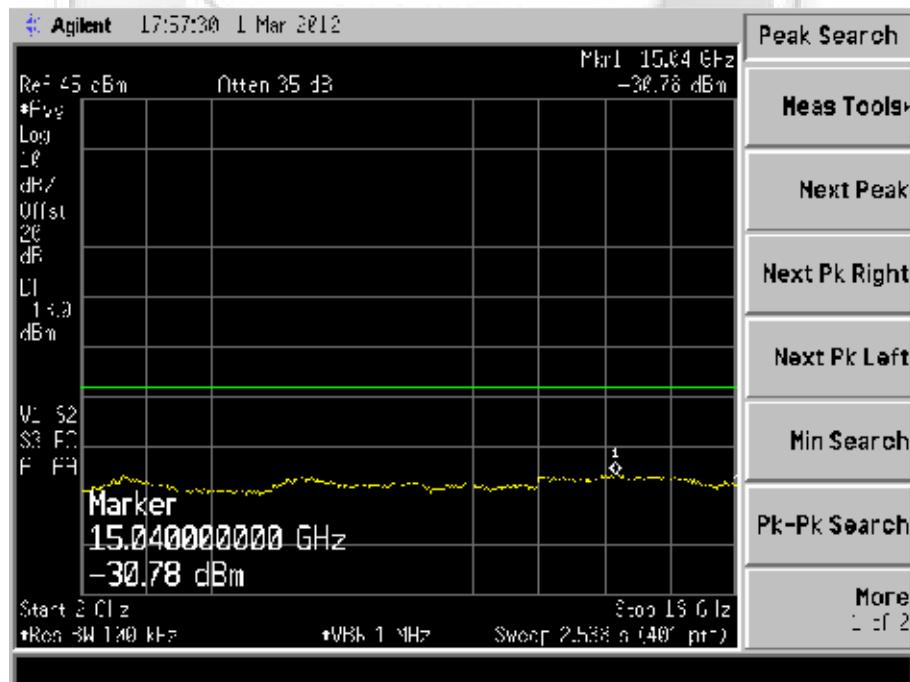


## Plot 76 – Middle Channel

## UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

## Out of Band Spurious Plots (Bearer Type: 11)

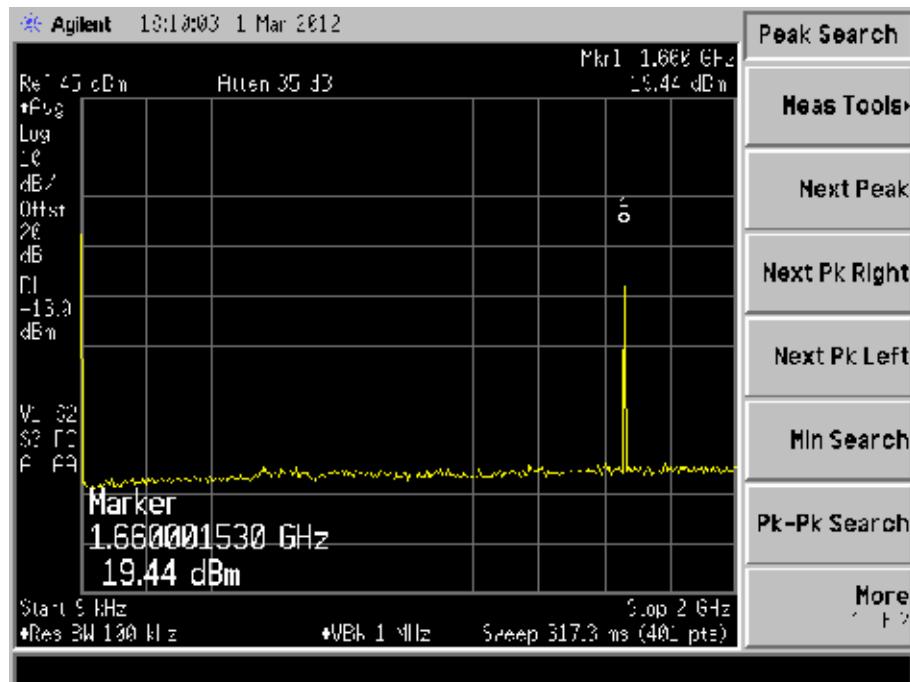



## Plot 77 – Upper Channel

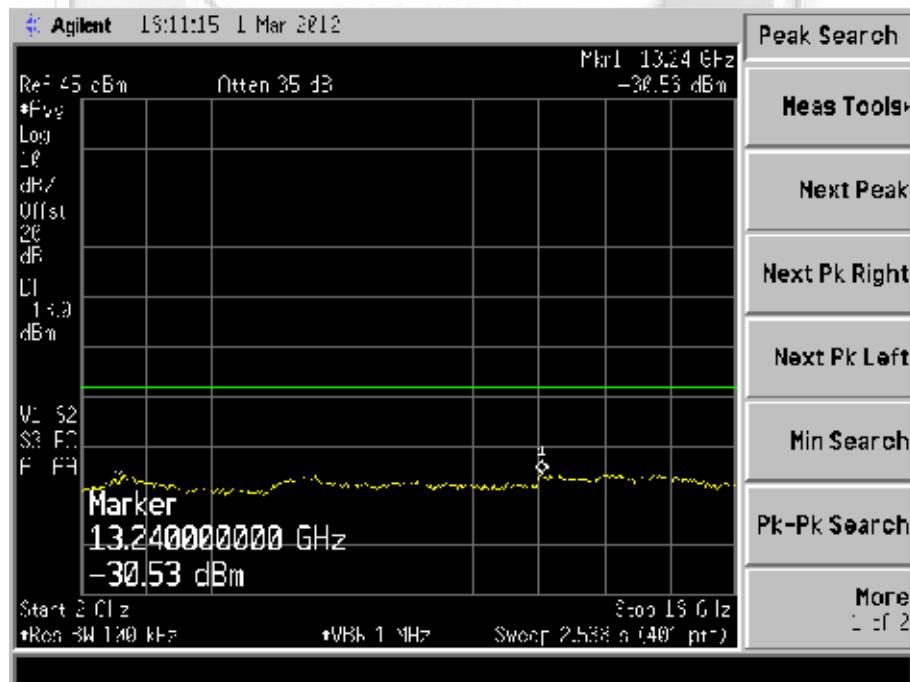

## Plot 78 – Upper Channel



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 13)**

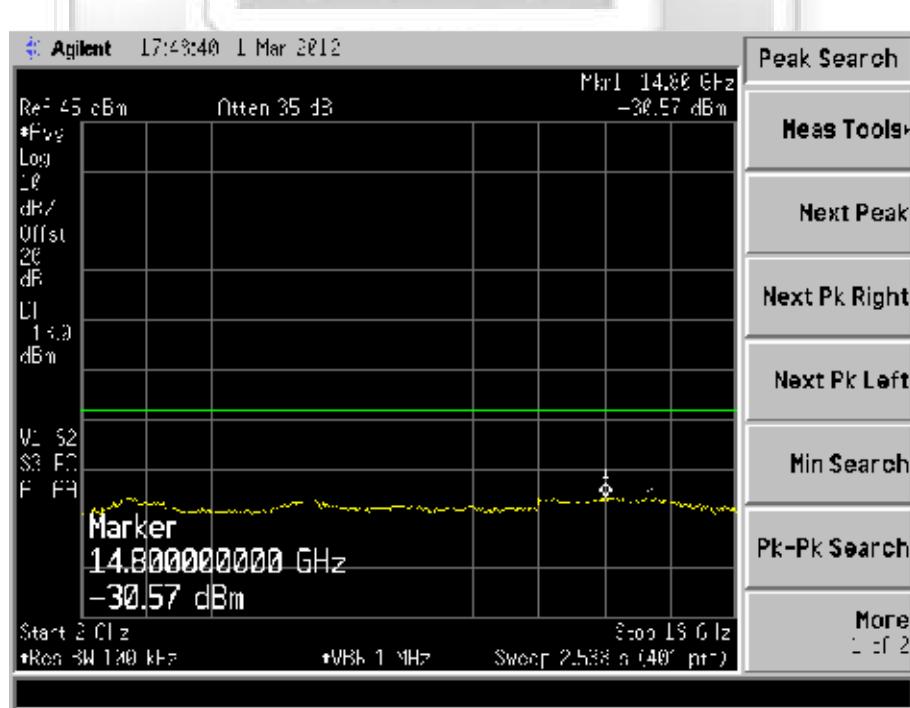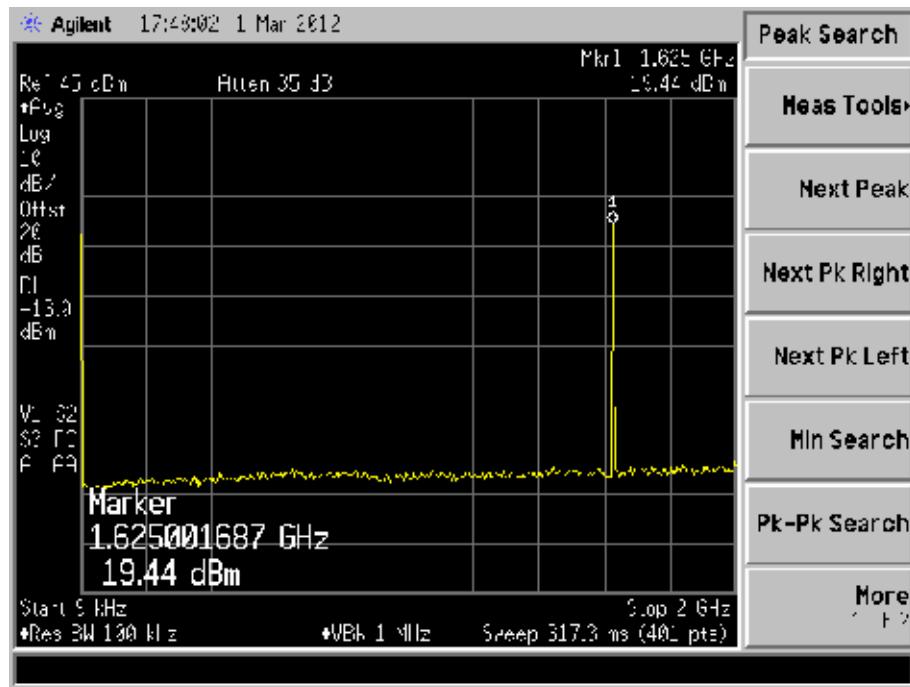



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 13)**

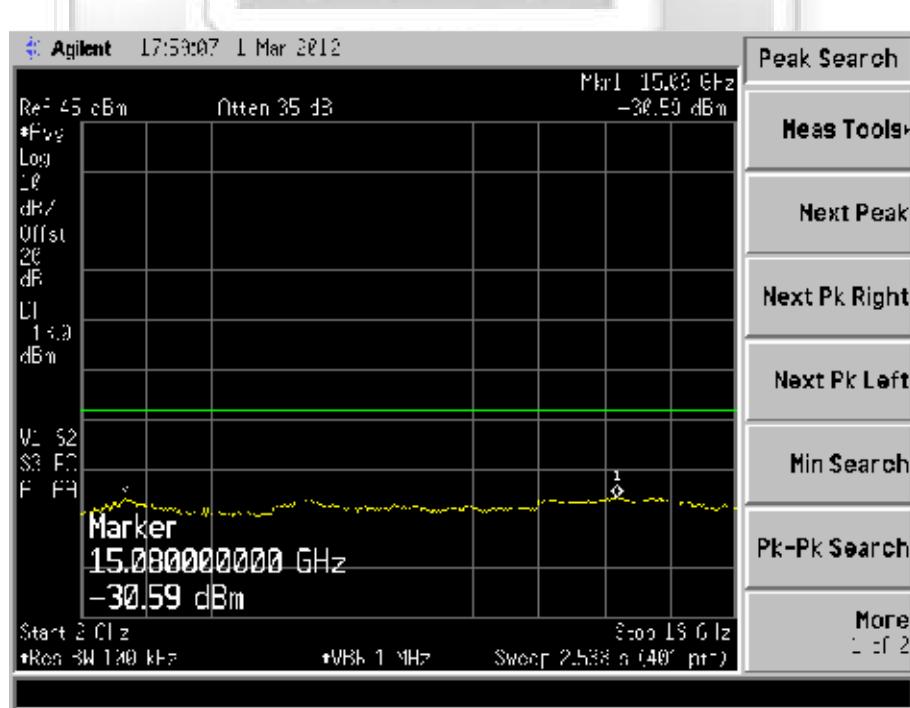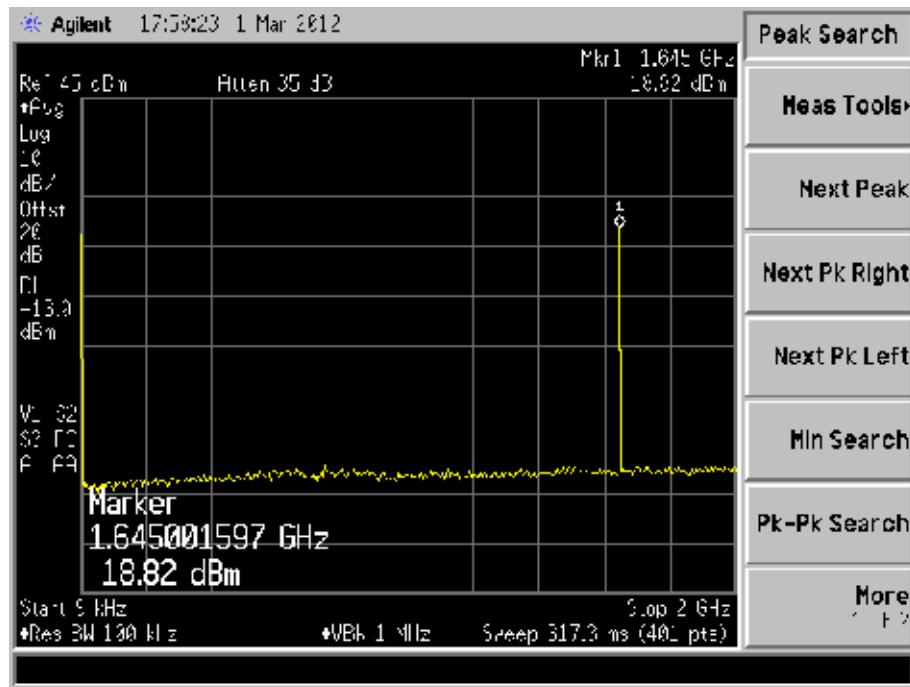



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 13)**

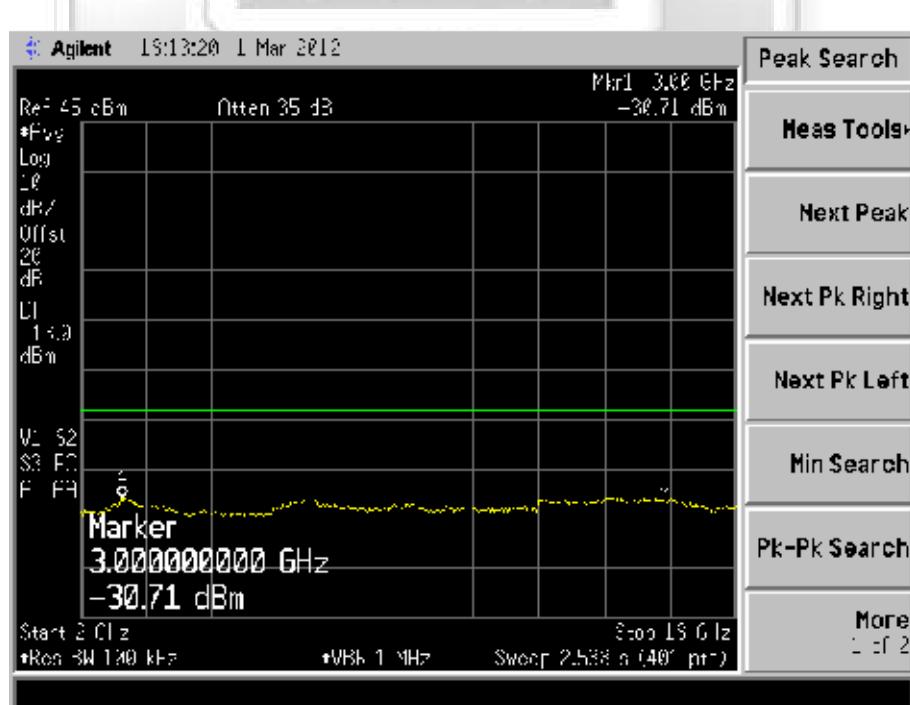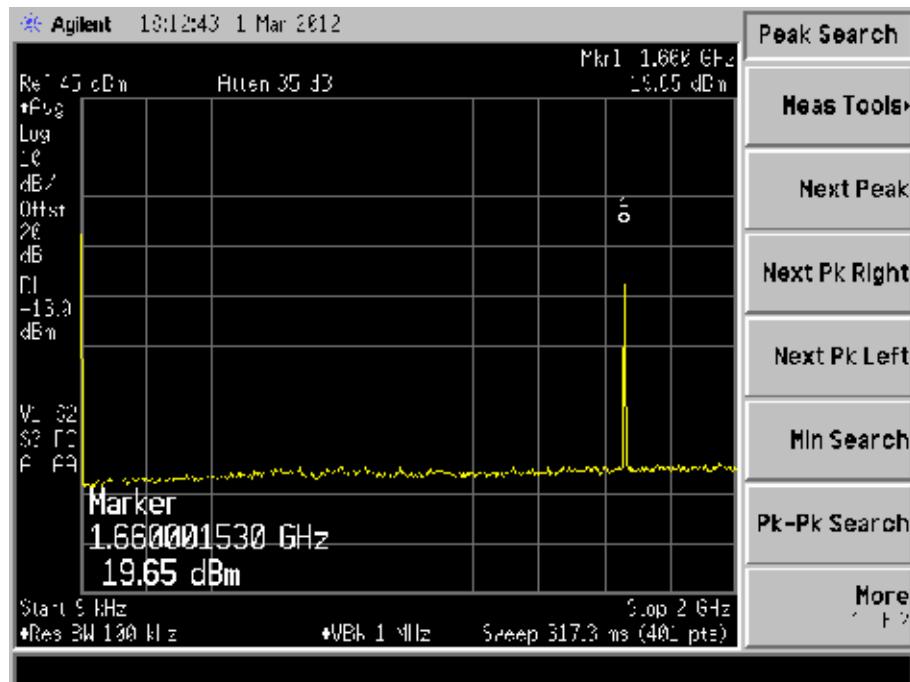



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 15)**

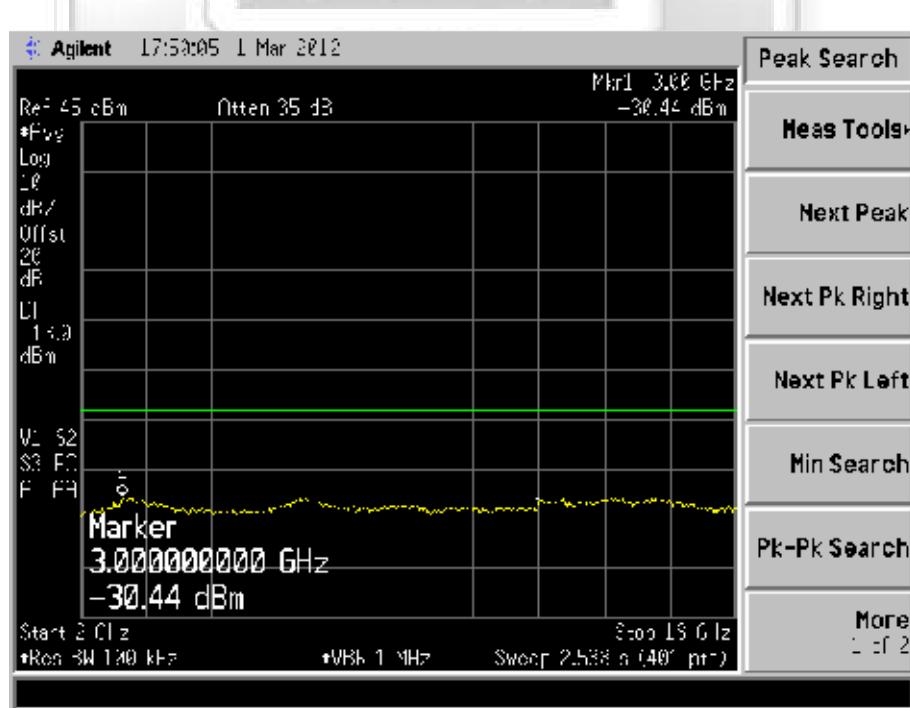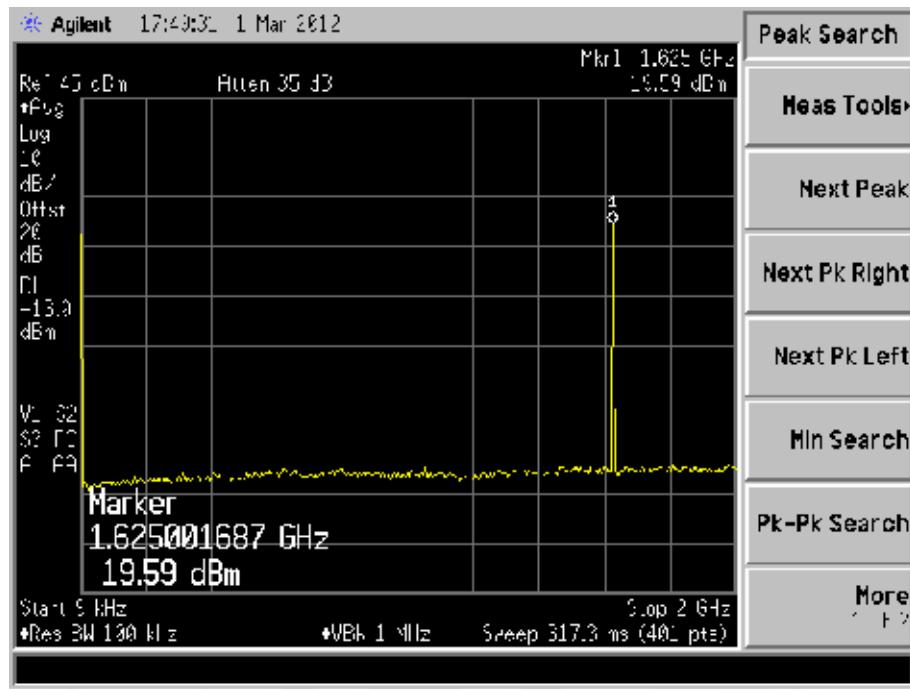



**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 15)**

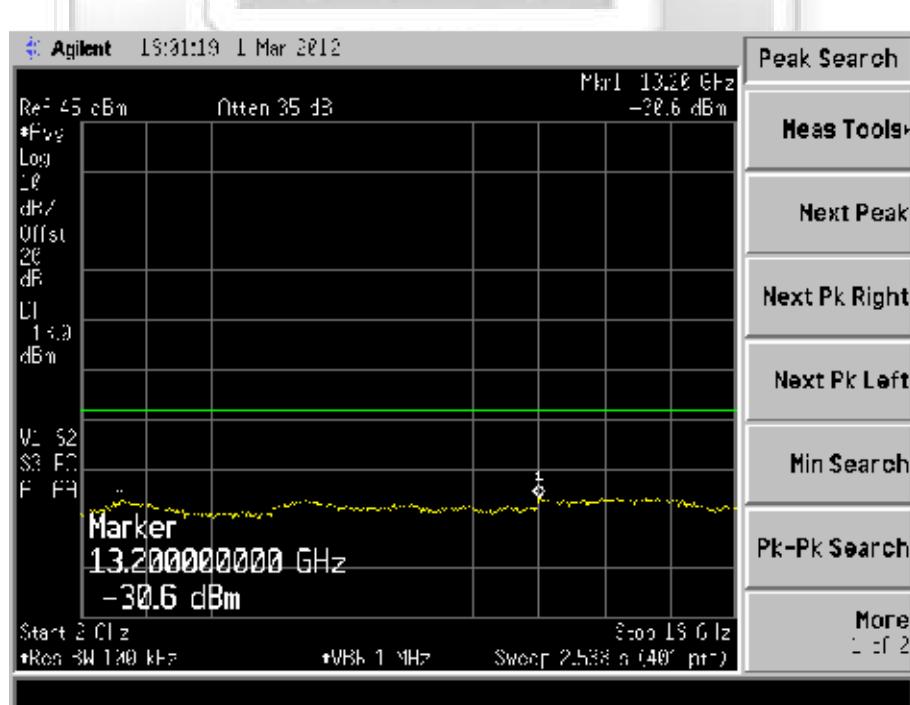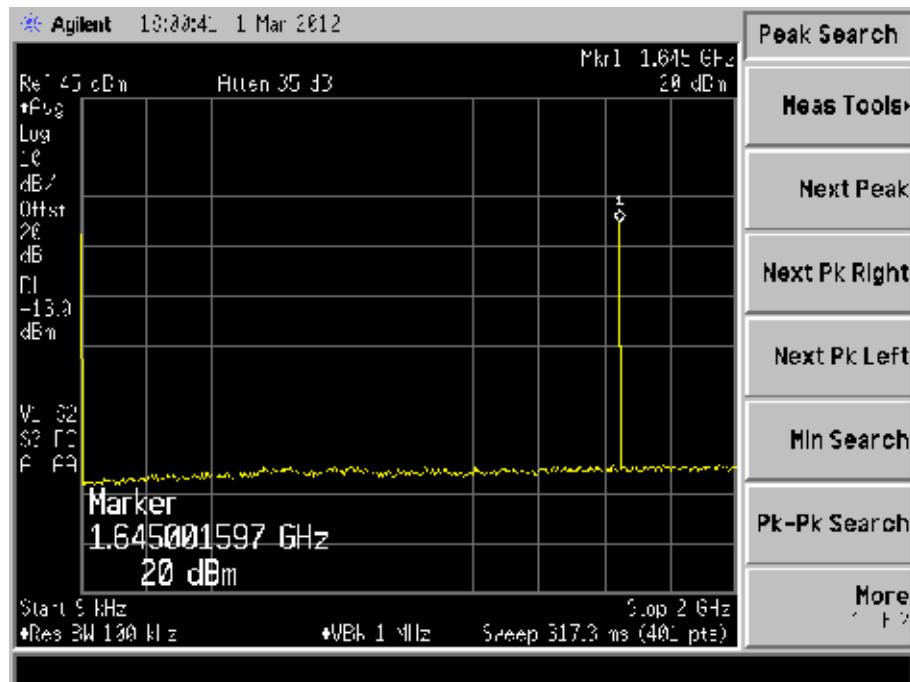

**UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST**

**Out of Band Spurious Plots (Bearer Type: 15)**

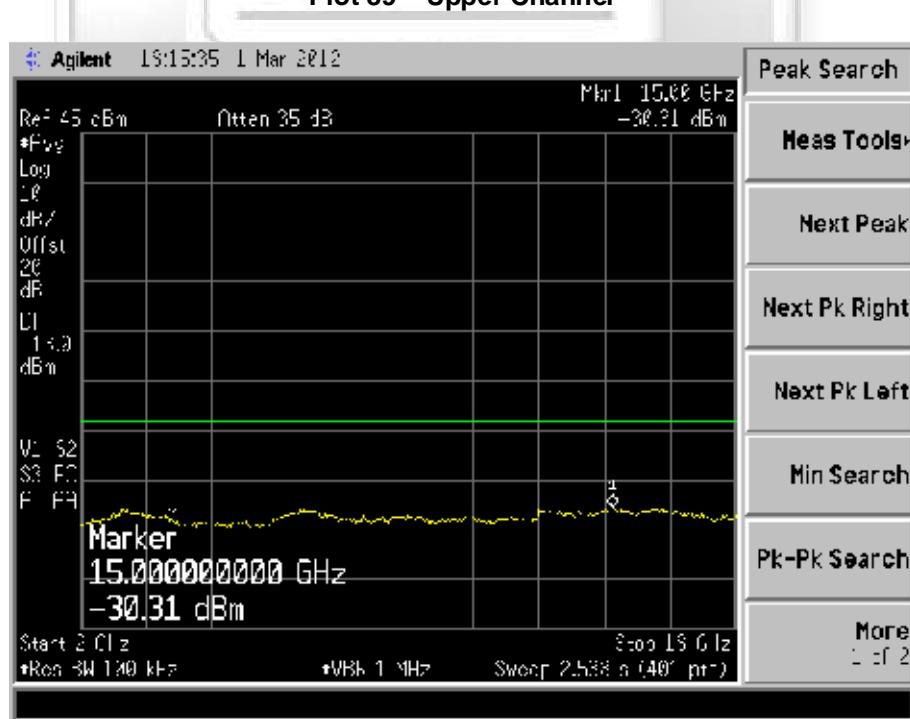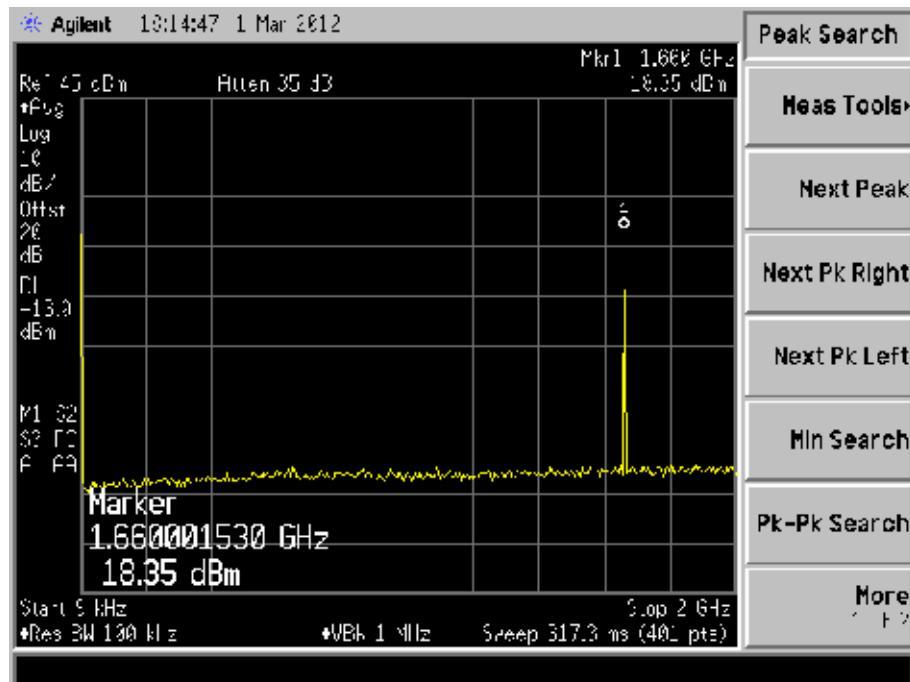

**RADIATED SPURIOUS EMISSION TEST**

**47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Limits**

1. 25.202 Emissions Limitations
  - (f) The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
    - (1) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
    - (2) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;
    - (3) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times logarithm (to the base 10) of the transmitter power in watts.
2. 2.1053 Measurements Required: Field Strength of Spurious Emissions
  - (a) Measurement shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of 2.1049, as appropriate. For equipment operating on frequencies below 890MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
  - (b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
    - (1) Those in which the spurious emission are required to be 60dB or more below the mean power of the transmitter.
    - (2) All equipment operating on frequencies higher than 25MHz.
    - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
    - (4) Other types of equipment as required, when deemed necessary by the Commission.

**47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
EMCO Horn Antenna – H15	3115	0003-6088	20 May 2012
Rohde & Schwarz EMI Test Receiver (20Hz – 26.5GHz)	ESMI	849182/003 848926/007	16 Aug 2012
TDK RF Solutions Hybrid Log Periodic Antenna (30MHz-3GHz)	HLP-3003C	130238	19 Mar 2012
Sonoma Preamplifier (9kHz – 1GHz)	310N	270640	03 Jan 2013
Toyo MicroWave Preamplifier (1GHz - 18GHz)	TPA0188-36	1005	24 Jun 2012
GW Insteck Programmable Power Supply	PSH-3630A	RK200168	30 Jan 2013
Schaffner Bilog Antenna –(30MHz-2GHz) BL3 (Ref)	CBL6112B	2549	19 Jan 2013
EMCO Horn Antenna(1GHz-18GHz) – H15 (Ref)	3115	0003-6008	20 May 2012

## RADIATED SPURIOUS EMISSION TEST

### **47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Setup**


1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant antenna was set at the required test distance away from the EUT and supporting equipment boundary

### **47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Method**


1. The EUT was set to transmit at the maximum power at the lower channel with the modulation on at normal test condition.
2. The receiving antenna (test antenna) was set at vertical polarization with the height of 1m.
3. With the spectrum analyser was set to max hold enabled (peak detector mode), the spurious emissions were searched and recorded. For EUT which is a portable device, the spurious emission search was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces worst emissions.
4. For each spurious emission found, the test antenna was raised or lowered through the specified range of heights (1m – 4m) until a maximum signal level was detected on the test receiver.
5. The EUT was then rotated through 360° in the horizontal plane until the maximum signal was received. The maximum received signal level was recorded as A (in dBm).
6. The EUT was replaced with the substitution antenna with the antenna input was connected to the signal generator via a 10dB attenuator (if required).
7. The signal generator was set to the found spurious frequency. The output level of the signal generator was adjusted until the test receiver was at least 20dB above the level when the signal generator was switched off.
8. The test antenna was raised and lowered through the specified range of heights (1m – 4m) until the maximum signal level was received on the test receiver.
9. The substitution antenna was rotated until the maximum level was detected on the test receiver.
10. The output level of the signal generator was adjusted until the received signal level at the test receiver was equal to the level recorded in step 5 (A dBm). The signal generator output level was recorded as B (in dBm).
11. The spurious emission level, P (e.i.r.p) was computed as followed:  
$$P \text{ (e.i.r.p)} = B - C - D + E$$

where      C      =      cable loss between the signal generator and the substitution  
                  D      =      attenuation level if attenuator is used  
                  E      =      substitution antenna gain
12. The steps 2 to 11 were repeated with the receiving antenna was set to horizontal polarization.
13. Comparison was made on both measured results with vertical and horizontal polarizations. The highest value out of vertical and horizontal polarizations was recorded.
14. The steps 2 to 13 were repeated until all the spurious emissions (up to 10<sup>th</sup> harmonics of the carrier frequency) were measured.
15. The steps 1 to 14 were repeated with the EUT was set to operate at the middle and upper channels respectively.

**RADIATED SPURIOUS EMISSION TEST**

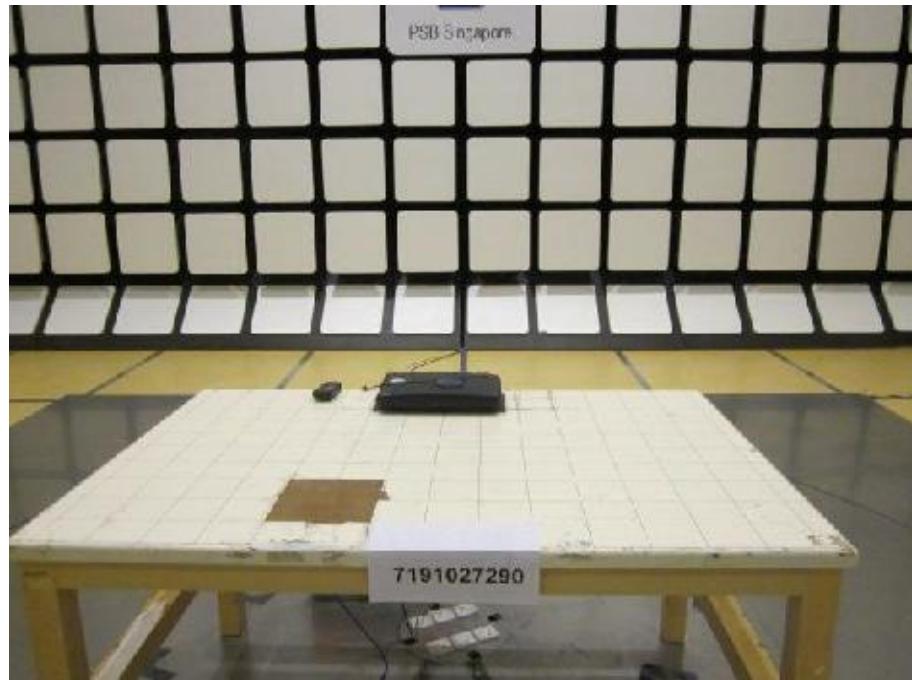

**Radiated Spurious Emissions Test Setup (Front View)**

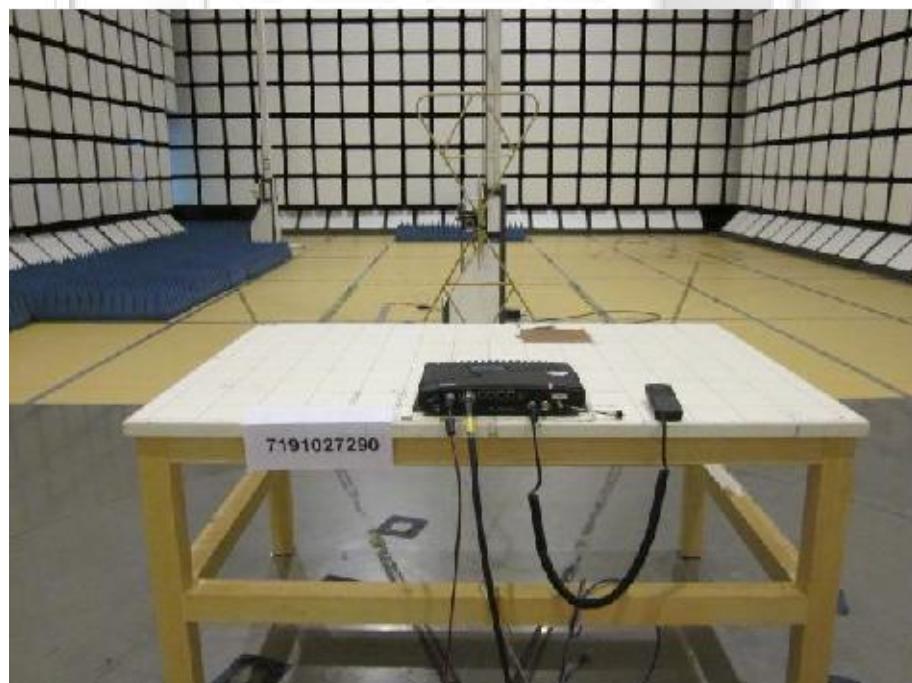

**Radiated Spurious Emissions Test Setup (Rear View)**

**RADIATED SPURIOUS EMISSIONS TEST**

**47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Results**

Operating Mode	Continuous Satellite transmission.	Temperature	24°C
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	60%
Test Distance	3m	Atmospheric Pressure	1030mbar
Type Bearer	15 (Worst Bearer)	Tested By	Jason Lai, Kelvin Cheng

**30MHz – 1GHz**

**Lower Channel**

Frequency (MHz)	Amplitude (dBm)	Limit (dBm)
58.3020	-42.4	-13.0
84.4280	-43.6	-13.0
161.7150	-46.7	-13.0
329.3530	-55.8	-13.0
736.4730	-64.1	-13.0
829.0000	-66.6	-13.0

**Middle Channel**

Frequency (MHz)	Amplitude (dBm)	Limit (dBm)
59.3910	-44.7	-13.0
83.3390	-43.5	-13.0
161.7150	-48.0	-13.0
277.1020	-50.3	-13.0
328.2640	-55.9	-13.0
830.0880	-68.1	-13.0

**Upper Channel**

Frequency (MHz)	Amplitude (dBm)	Limit (dBm)
59.3910	-44.4	-13.0
84.4280	-44.0	-13.0
160.6270	-47.6	-13.0
277.1020	-52.3	-13.0
329.3530	-56.2	-13.0
921.5270	-66.3	-13.0

RADIATED SPURIOUS EMISSIONS TEST

**1GHz – 17GHz**

**Lower Channel**

Frequency (MHz)	Amplitude (dBm)	Limit (dBm)
1016.8330	-68.3	-13.0
1056.1110	-66.9	-13.0
1875.3330	-72.7	-13.0
2301.7780	-61.6	-13.0
2492.5560	-61.6	-13.0
4832.3890	-69.1	-13.0

**Middle Channel**

Frequency (MHz)	Amplitude (dBm)	Limit (dBm)
1016.8330	-64.0	-13.0
1819.2220	-62.0	-13.0
1869.7220	-61.9	-13.0
2492.5560	-63.7	-13.0
2576.7220	-63.9	-13.0
4220.7780	-70.2	-13.0

**Upper Channel**

Frequency (MHz)	Amplitude (dBm)	Limit (dBm)
1016.8330	-68.5	-13.0
1819.2220	-75.5	-13.0
1852.8890	-72.1	-13.0
1880.9450	-73.4	-13.0
1931.4450	-74.8	-13.0
2486.9450	-65.4	-13.0

**RADIATED SPURIOUS EMISSIONS TEST**

**Notes**

1. All possible modes of operation were investigated. Only the worst case emissions measured. All other emissions were relatively insignificant.
2. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
3. The Resolution Bandwidth (RBW) was corrected from 4kHz by  $10\log_{10}[(\text{used RBW}) / 4\text{kHz}]$ .
4. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 20GHz  
RBW: 100kHz      VBW: 300kHz
5. Emission limits are computed based on following:
  - a. Emissions Limits (dBm) (50% - = P - 25 + CF  
100% authorised bandwidth)
  - b. Emissions Limits (dBm) (100% - = P - 35 + CF  
250% authorised bandwidth)
  - c. Emissions Limits (dBm) (> 250% = P - [43 + 10 log<sub>10</sub> P<sub>w</sub>] + 30 + CF  
authorised bandwidth)  
where                    P = Measured mean power in dBm  
                          P<sub>w</sub> = Measured mean power in W  
                          CF = RBW correction factor (see Note 4)
6. Radiated Spurious Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is  $\pm 4.0\text{dB}$ .

## PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

### 47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Limits

25.216(h)(i)(j) Limits on Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service

(h) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FC 03-283 (from November 6, 2003) with assigned uplink frequencies in the 1626.5MHz - 1660.5MHz band shall suppress the power density of emissions in the 1605MHz - 1610MHz band-segment to an extent determined by linear interoperation from -70dBW/MHz at 1605MHz to -46dBW/MHz at 1610MHz, averaged over any 2ms active transmission interval. The e.i.r.p of discrete emissions of less than 700Hz bandwidth from such stations shall not exceed a level determined by linear interoperation from -80dBW at 1605MHz to -56dBW at 1610MHz, averaged over any 2ms active transmission interval.

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1GHz and 3GHz shall not exceed -80dBW/MHz in the 1559MHz - 1610MHz band averaged over any 2ms interval.

(j) A Root-Mean-Square detector shall be used for all power density measurements.

### 47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	06 Jun 2012
EMCO Horn Antenna(1GHz-18GHz) – H15 (Ref)	3115	0003-6008	20 May 2012
Bird 20dB Attenuator	25-A-MFN-20	0209	25 May 2012
GW Insteck Programmable Power Supply	PSH-3630A	RK200168	30 Jan 2013

## **PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

### **47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Setup**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant antenna was set at the required test distance away from the EUT and supporting equipment boundary

### **47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Method**

1. The EUT was set to transmit at the maximum power at the lower channel with the modulation on at normal test condition.
2. The receiving antenna (test antenna) was set at vertical polarization with the height of 1m.
3. A prescan was carried out in the frequency range under investigations with the EMI receiver set to max hold mode. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
4. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
5. The maximized emissions were plotted with inclusion of corrector factor of measured radiated emissions to EIRP.
6. The steps 1 to 5 were repeated with the EUT was set to operate at the middle and upper channels respectively.
7. The measurements were repeated with the EUT in carrier off state (standby).


---

**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

---



**Protection of Aeronautical Radio Navigation Satellite Service Test Setup (Front View)**

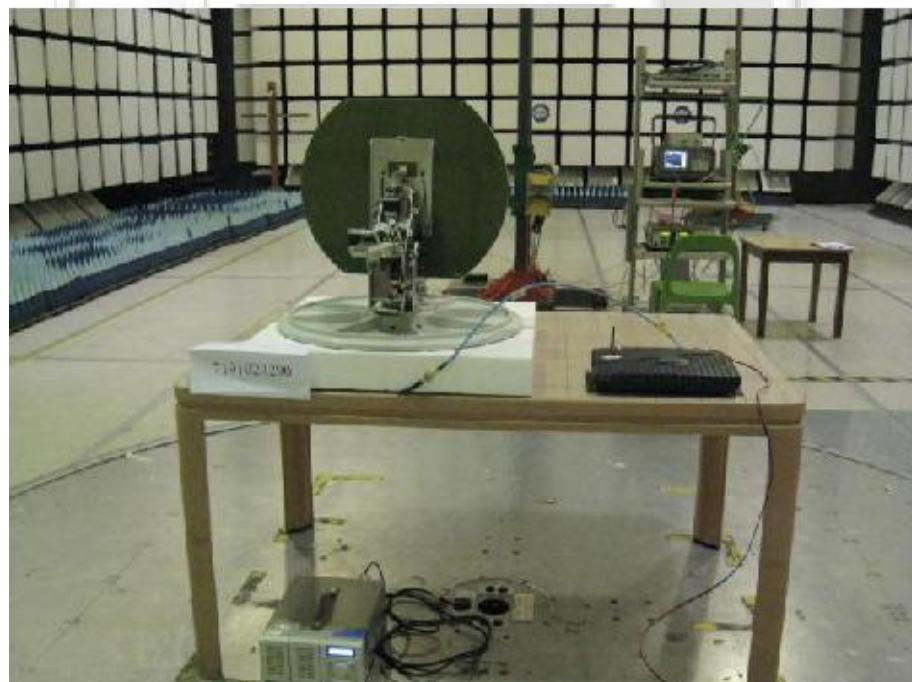

**Protection of Aeronautical Radio Navigation Satellite Service Test Setup (Rear View)**

**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

**47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Results**

Operating Mode	Continuous Satellite transmission	Temperature	24°C
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	60%
Test Distance	3m	Atmospheric Pressure	1030mbar
Attached Plots	91 – 111	Tested By	Dylan Lin, Zechs Ng

All spurious signals found were below the specified limit. Please refer to the attached plots.



Operating Mode	Satellite off (Standby)	Temperature	24°C
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	60%
Test Distance	3m	Atmospheric Pressure	1030mbar
Attached Plots	112	Tested By	Dylan Lin, Zechs Ng

All spurious signals found were below the specified limit. Please refer to the attached plots.




**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 0 - Transmitter On

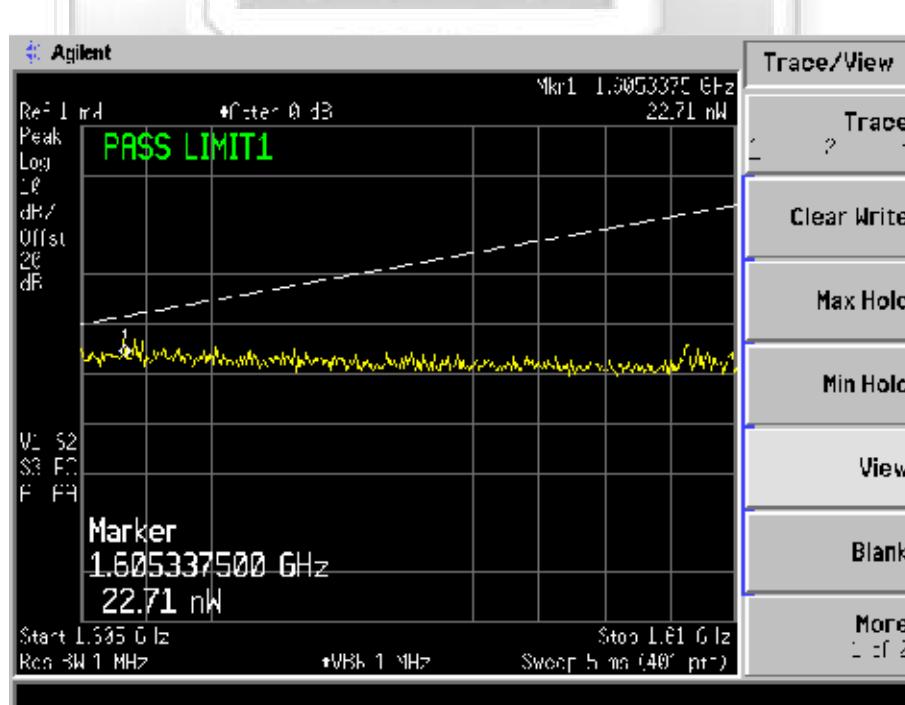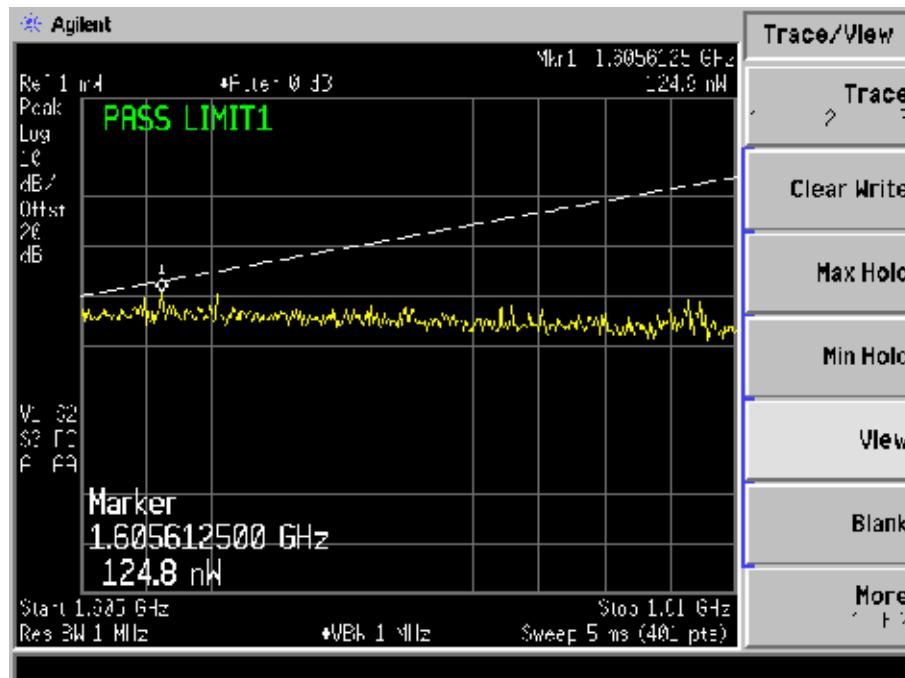


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 0 - Transmitter On

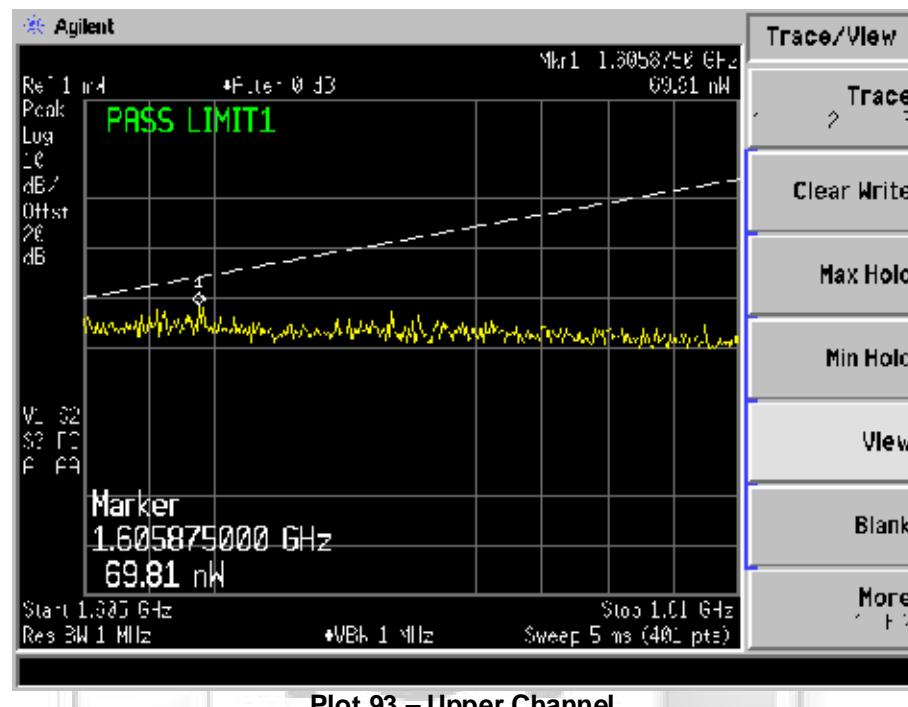


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 3 - Transmitter On

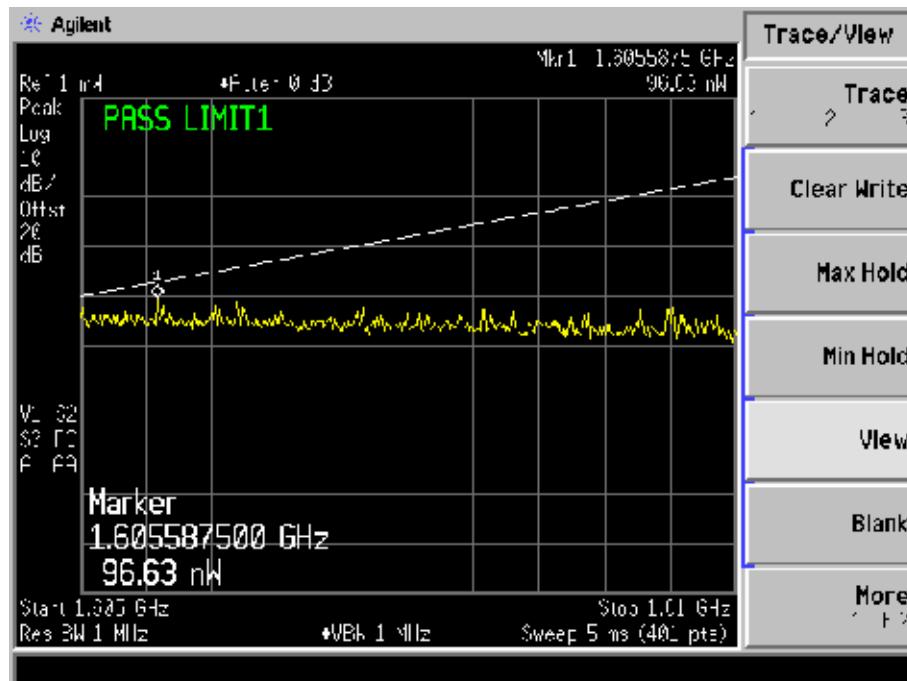


Plot 94 – Lower Channel

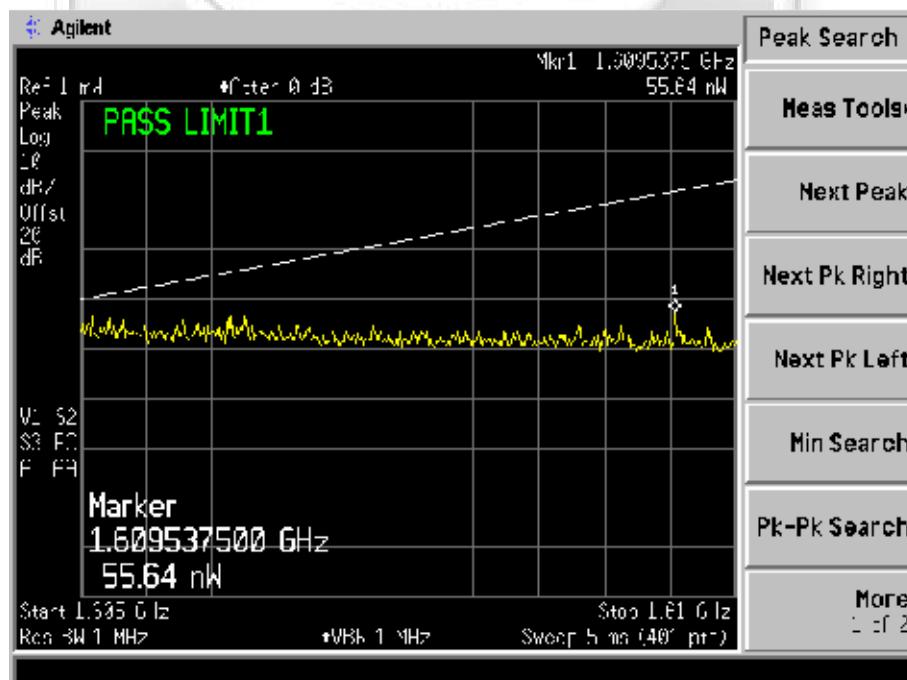

Plot 95 – Middle Channel



**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 3 - Transmitter On

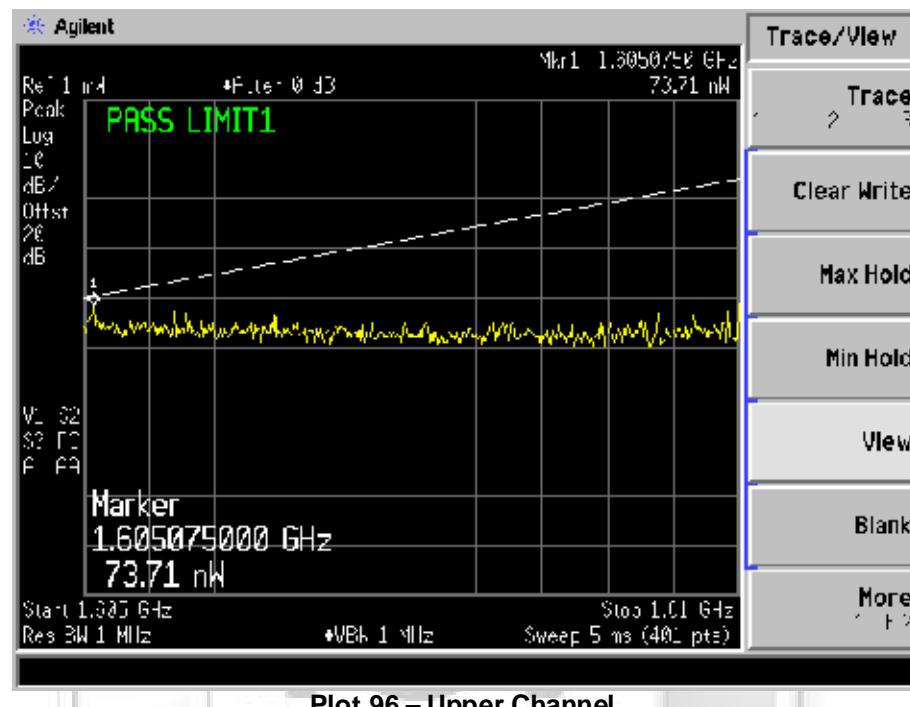


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 5 - Transmitter On

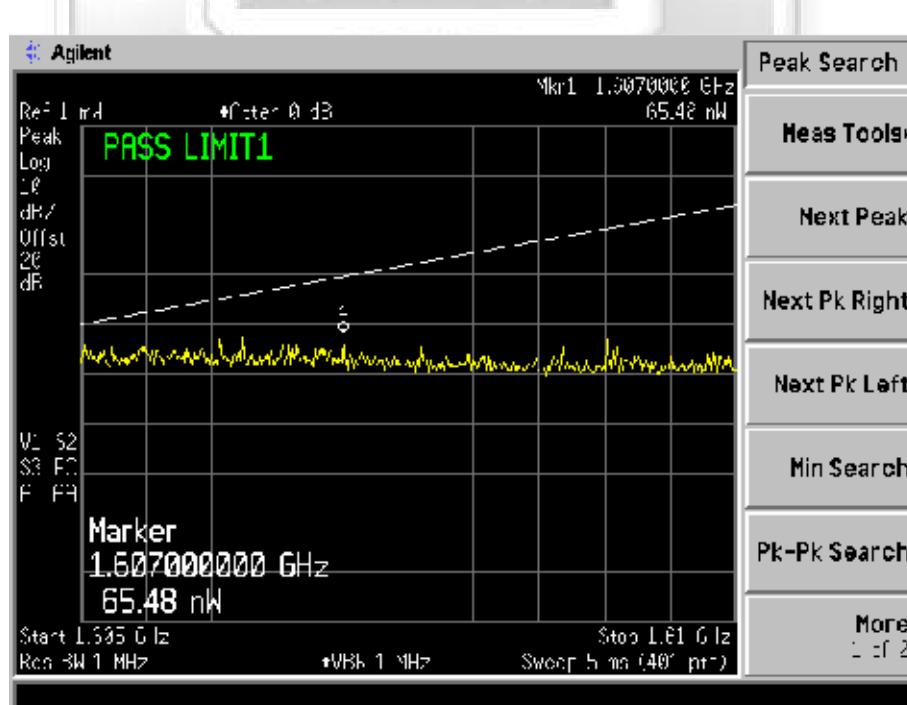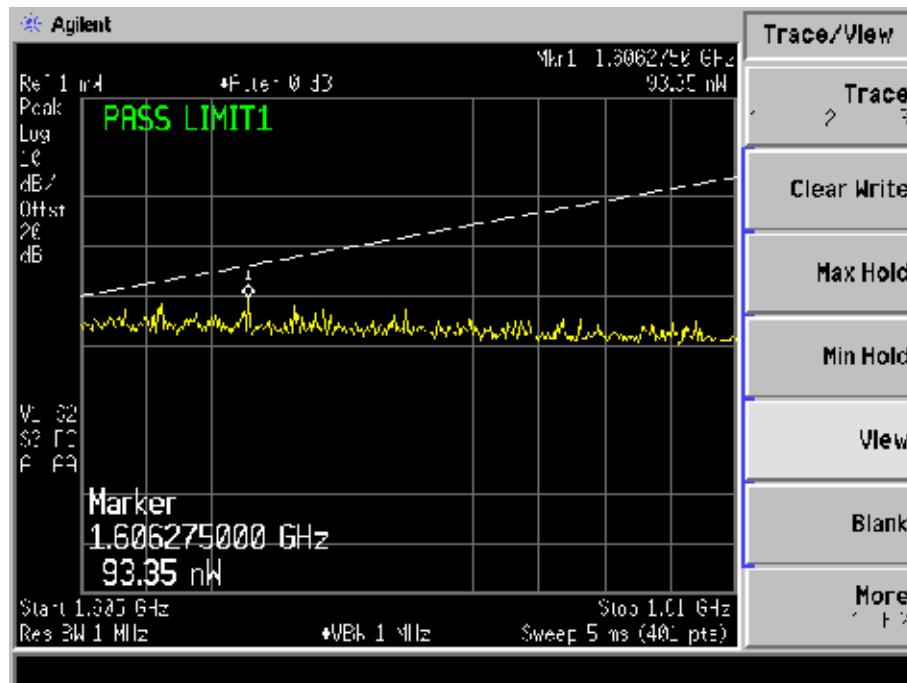



## PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

### Type Bearer: 5 - Transmitter On

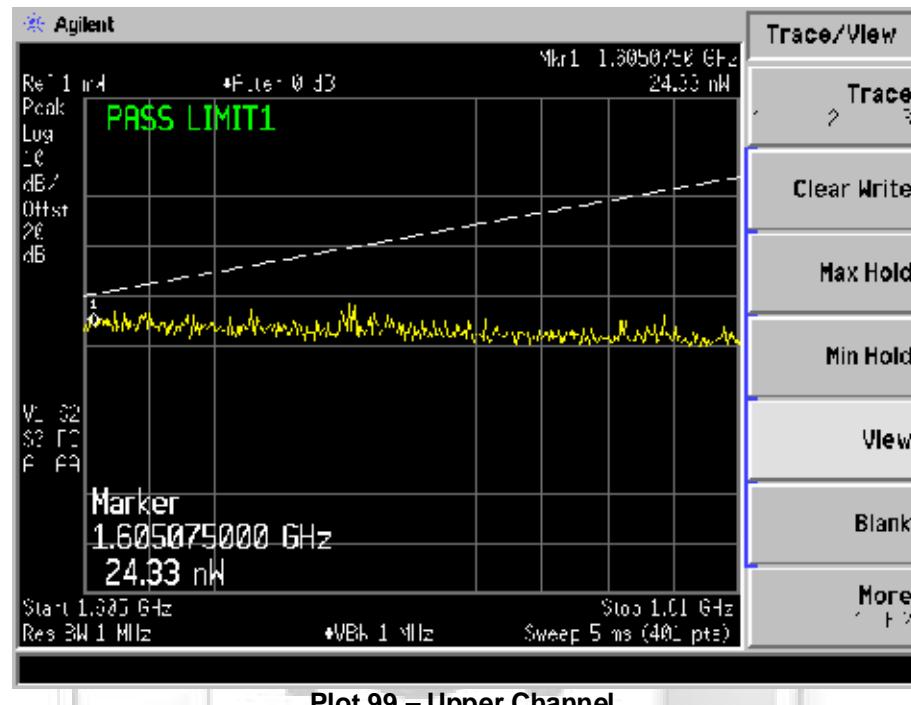


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 7 - Transmitter On

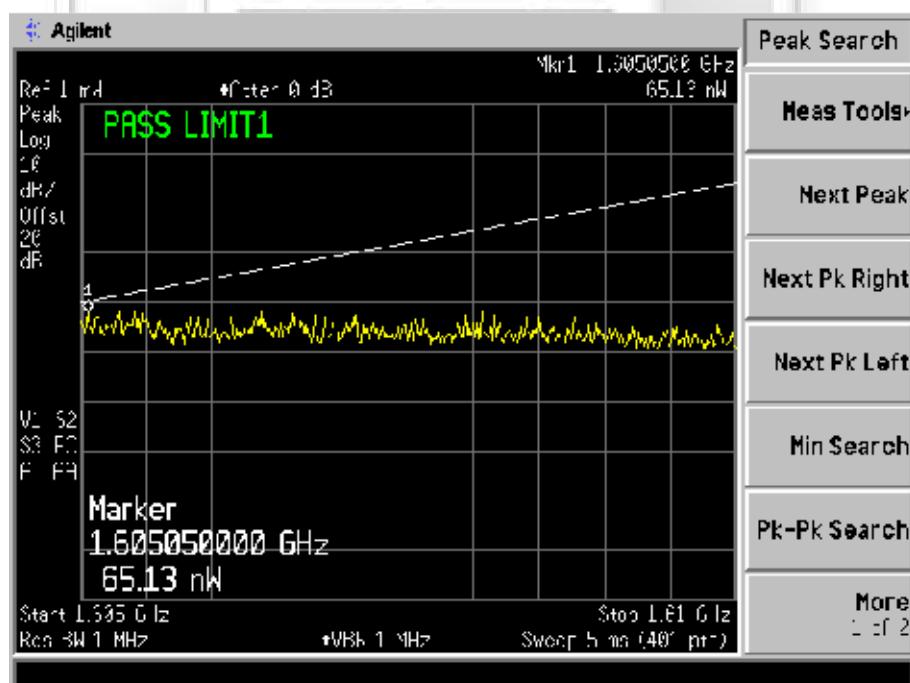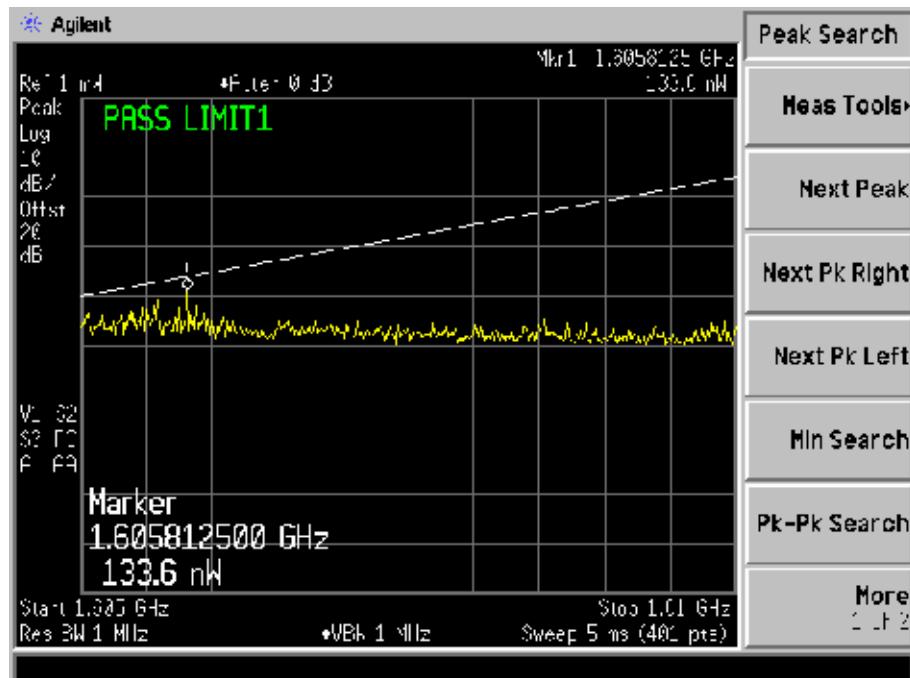


## PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

### Type Bearer: 7 - Transmitter On

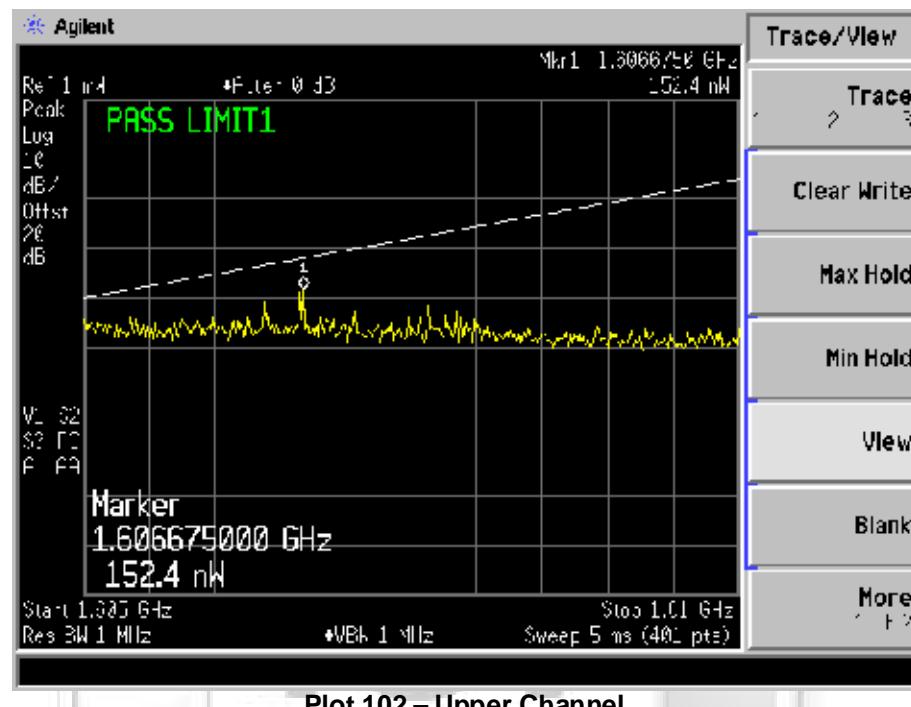


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 11 - Transmitter On

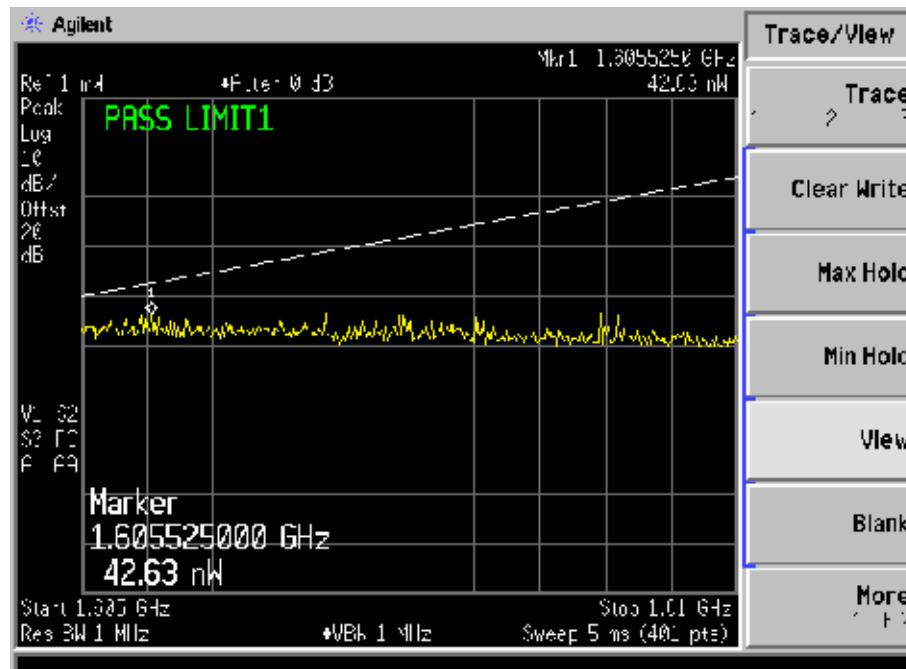


Plot 103 – Lower Channel

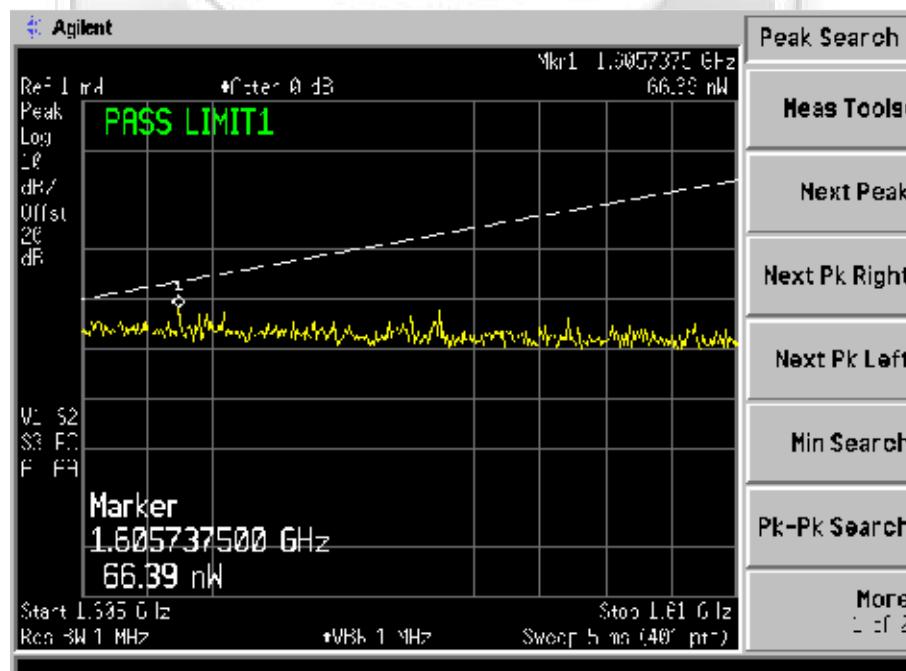

Plot 104 – Middle Channel


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 11 - Transmitter On

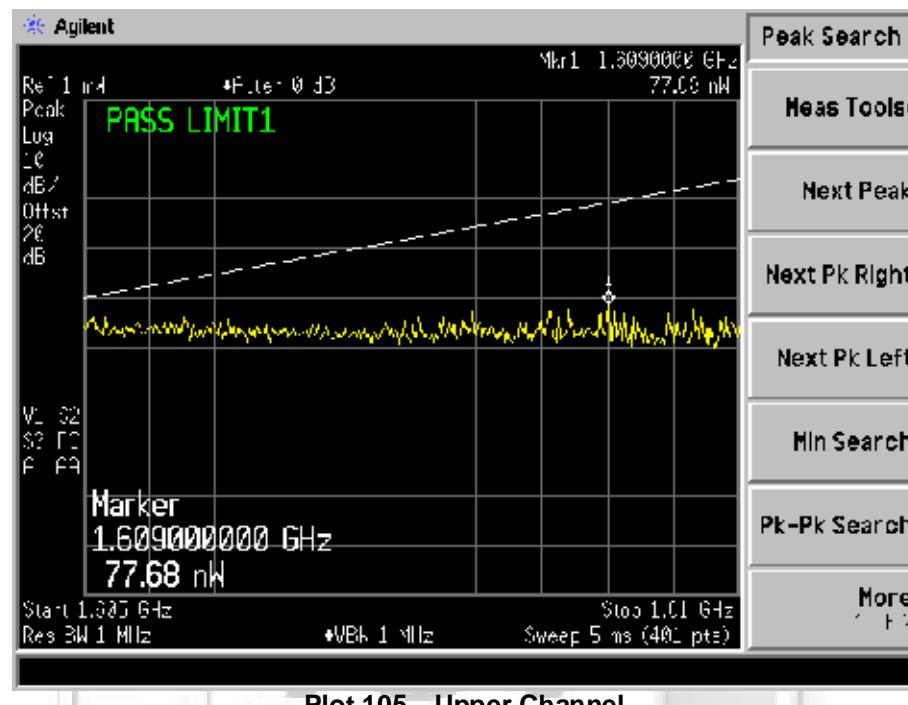


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 13 - Transmitter On

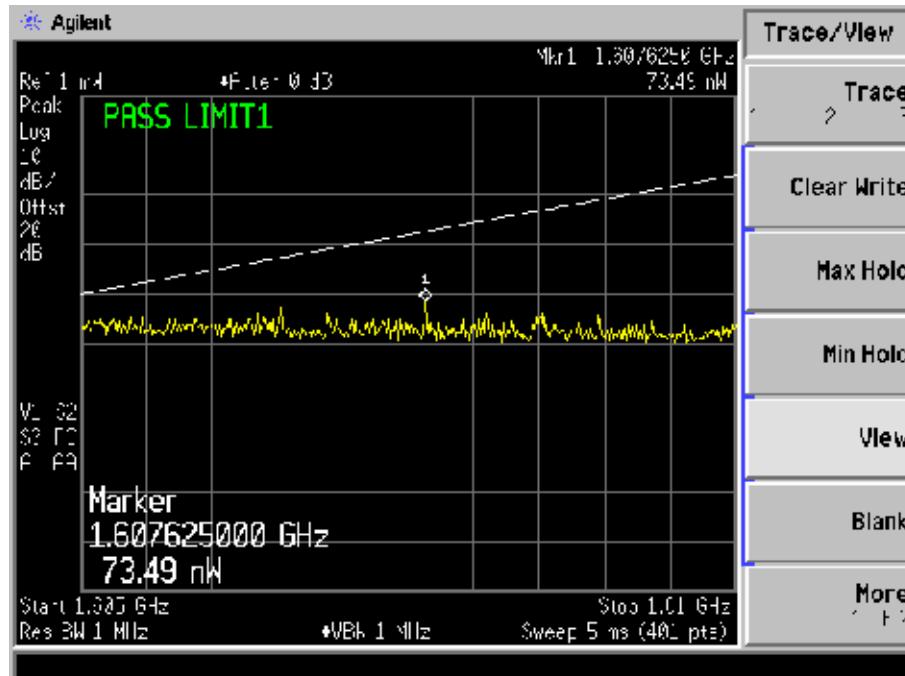


Plot 106 – Lower Channel

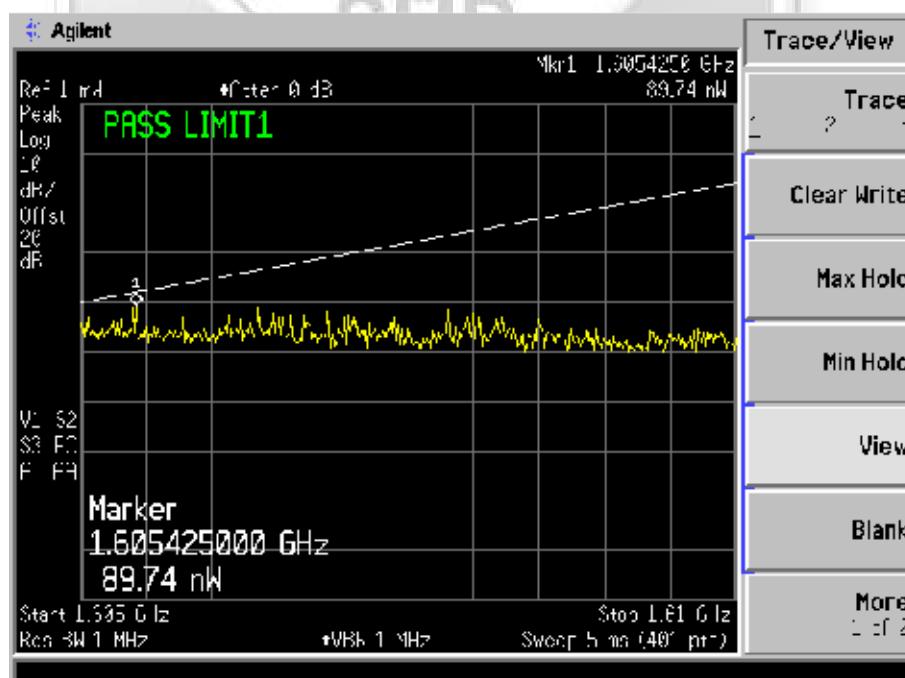

Plot 107 – Middle Channel


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 13 - Transmitter On

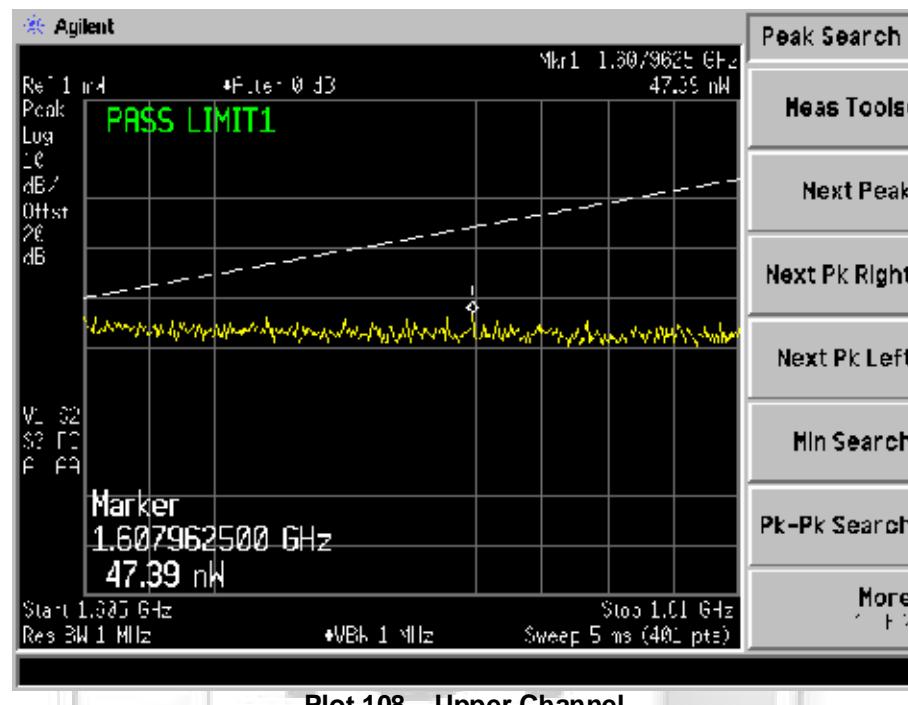


**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Type Bearer: 15 - Transmitter On

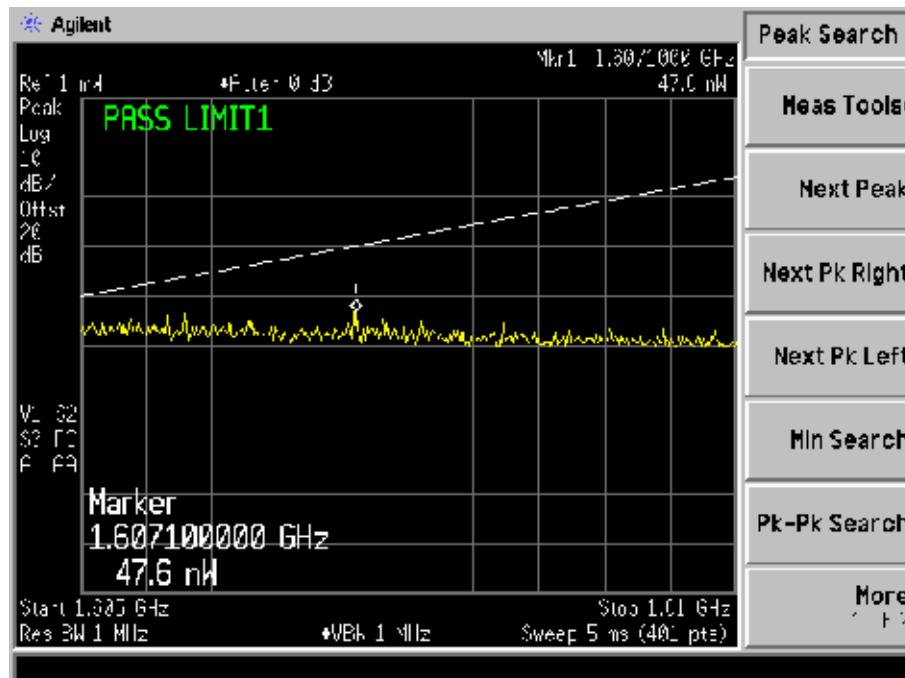

Plot 109 – Lower Channel

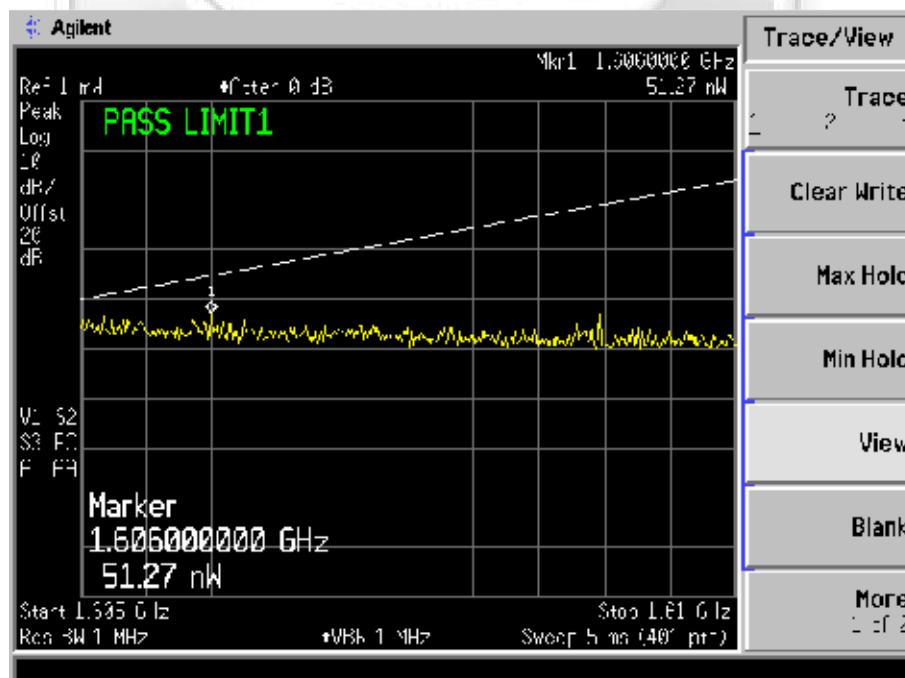


Plot 110 – Middle Channel



PSB Singapore


## PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

### Type Bearer: 15 - Transmitter On

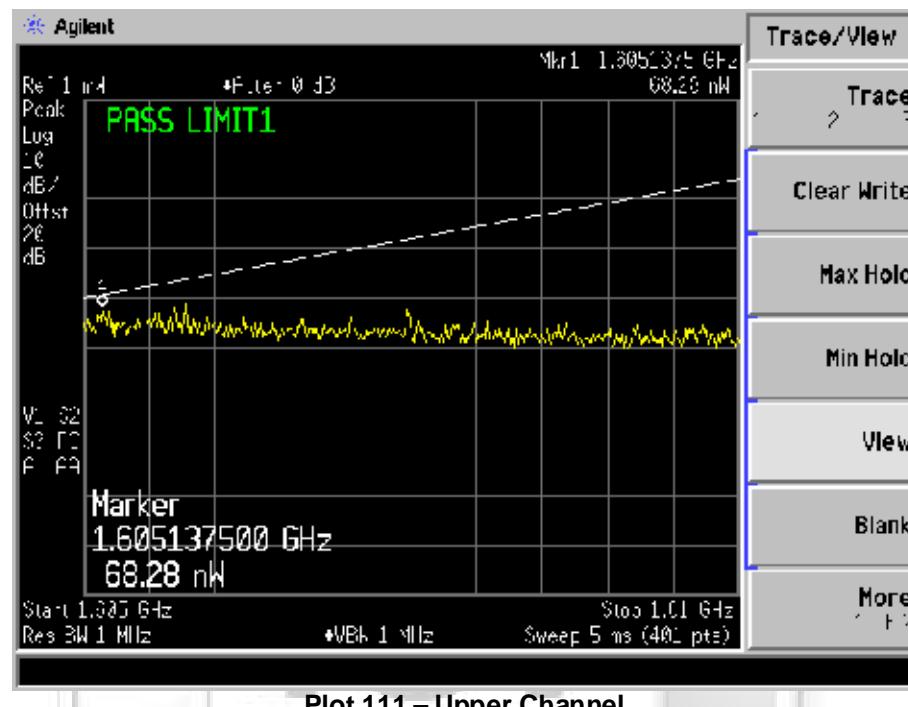

**PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST**

Carrier Off

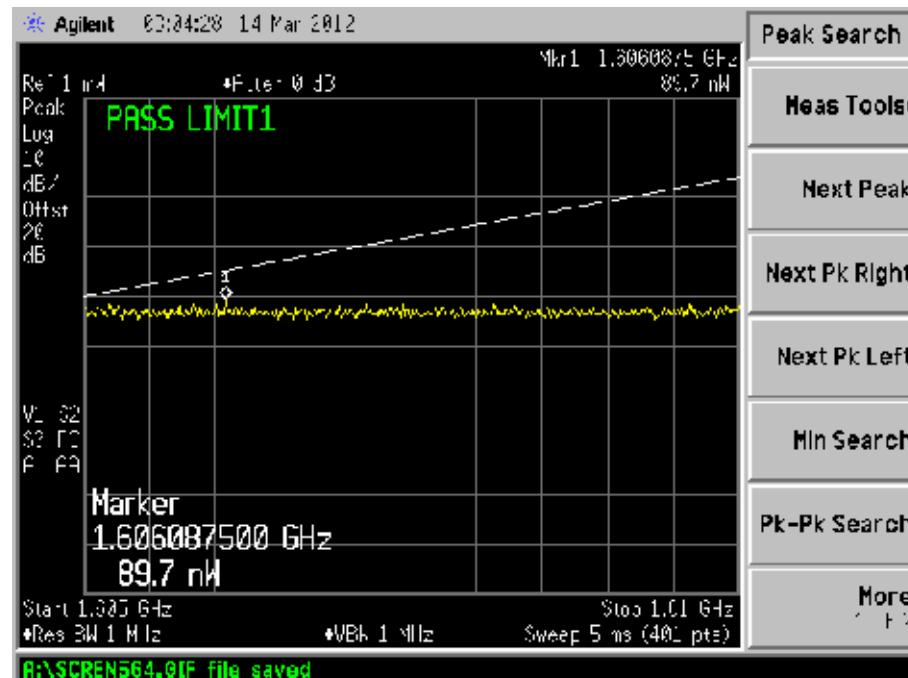

## **FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST**

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Limits**

1. 25.202(d) Frequency Tolerance, Earth Stations  
The carrier frequency of each earth station transmitter authorised in these services shall be maintained within 0.001% (10ppm) of the reference frequency.
2. 2.1055 Measurements Required: Frequency Stability
  - (a) The frequency stability shall be measured with variation of ambient temperature as follows:
    - (1) From -30°C to +50°C for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
    - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at interval of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion of portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.
    - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
      - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
      - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
      - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Agilent Universal Counter	53132A	3736A0628	25 May 2012
Mini-Circuits Precision Fixed Attenuator	BW-S20W5+	Nil	Output Monitor
Instock Wireless Components Combiner	PD7120	Nil	Output Monitor
GW Insteek Programmable Power Supply	PSH-3630A	RK200168	30 Jan 2013

## **FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST**

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Setup**

1. The EUT and supporting equipment were set up as shown in the test setup photo. A temperature-controlled chamber was used.
2. The EUT was connected to an appropriate power source while all other supporting equipment were powered separately from another power source.
3. The RF antenna connector of the EUT was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Method**

1. The temperature chamber was set at 20°C and permitted to stabilize. The EUT was set to transmit at lower channel without modulation. The carrier frequency was measured as the reference frequency.
2. With the EUT power removed, the temperature of the temperature chamber was set to -30°C and permitted to stabilize.
3. The EUT was turned on and set to operate at lower channel without modulation. The maximum change in the carrier frequency was recorded within a minute.
4. The EUT was powered off and the temperature was raised to -20°C.
5. The EUT was left stabilized for at least an hour before next measurement was taken as described in step 3.
6. The steps 4 and 5 were repeated with increment of temperature in 10°C step until the temperature reached 50°C.
7. The steps 1 to 6 were repeated with the EUT was set to operate at the middle and upper channels respectively.

---

**FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST**

---



Frequency Stability (Temperature Variation) Test Setup



**FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST**

**47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Results**

Operating Mode	Continuous Satellite Transmission.	Temperature	See table below
Test Input Power	24Vdc (Worst Voltage)	Relative Humidity	70%
		Atmospheric Pressure	1030mbar
		Tested By	Chelmin Li

**Lower Channel**

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
-30	1.626600518	1.626600000	518.000000	+/-16266
-20	1.626600457	1.626600000	457.000000	+/-16266
-10	1.626600477	1.626600000	477.000000	+/-16266
0	1.626600718	1.626600000	718.000000	+/-16266
10	1.626600834	1.626600000	834.000000	+/-16266
20	1.626600845	1.626600000	845.000000	+/-16266
30	1.626600907	1.626600000	907.000000	+/-16266
40	1.626600936	1.626600000	936.000000	+/-16266
50	1.626600988	1.626600000	988.000000	+/-16266

**Middle Channel**

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
-30	1.643500582	1.643500000	582.000000	+/-16435
-20	1.643500449	1.643500000	449.000000	+/-16435
-10	1.643500546	1.643500000	546.000000	+/-16435
0	1.643500782	1.643500000	782.000000	+/-16435
10	1.643500883	1.643500000	883.000000	+/-16435
20	1.643500887	1.643500000	887.000000	+/-16435
30	1.643500959	1.643500000	959.000000	+/-16435
40	1.643500983	1.643500000	983.000000	+/-16435
50	1.643501032	1.643500000	1032.000000	+/-16435

**FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST**

**Upper Channel**

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
-30	1.660400491	1.660400000	491.000000	+/-16604
-20	1.660400418	1.660400000	418.000000	+/-16604
-10	1.660400542	1.660400000	542.000000	+/-16604
0	1.660400774	1.660400000	774.000000	+/-16604
10	1.660400856	1.660400000	856.000000	+/-16604
20	1.660400857	1.660400000	857.000000	+/-16604
30	1.660400938	1.660400000	938.000000	+/-16604
40	1.660400952	1.660400000	952.000000	+/-16604
50	1.660401008	1.660400000	1008.000000	+/-16604



## **FREQUENCY STABILITY (VOLTAGE VARIATION) TEST**

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Limits**

1. 25.202(d) Frequency Tolerance, Earth Stations  
The carrier frequency of each earth station transmitter authorised in these services shall be maintained within 0.001% (10ppm) of the reference frequency.
2. 2.1055 Measurements Required: Frequency Stability
  - (a) The frequency stability shall be measured with variation of ambient temperature as follows:
    - (1) From -30°C to +50°C for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
    - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at interval of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion of portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.
    - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
      - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
      - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
      - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Instrumentation**

<b>Instrument</b>	<b>Model</b>	<b>S/No</b>	<b>Cal Due Date</b>
Agilent Universal Counter	53132A	3736A0628	25 May 2012
Mini-Circuits Precision Fixed Attenuator	BW-S20W5+	Nil	Output Monitor
Instock Wireless Components Combiner	PD7120	Nil	Output Monitor
GW Instek Programmable Power Supply	PSH-3630A	RK200168	30 Jan 2013

---

## FREQUENCY STABILITY (VOLTAGE VARIATION) TEST


---

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Setup**

1. The EUT and supporting equipment were set up as shown in the test setup photo. A temperature-controlled chamber was used.
2. The EUT was connected to an appropriate power source while all other supporting equipment were powered separately from another power source.
3. The RF antenna connector of the EUT was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.

### **47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Method**

1. The temperature chamber was set at 20°C and permitted to stabilize. The EUT was set to transmit at lower channel without modulation. The carrier frequency was measured as the reference frequency.
2. The EUT was powered from 85% of the nominal supplied voltage and set to operate at lower channel without modulation.
3. The EUT power was varied from 85% to 115% of the nominal supplied voltage. The carrier frequency variation was recorded.
4. The steps 1 to 3 were repeated with the EUT was set to operate at the middle and upper channels respectively.

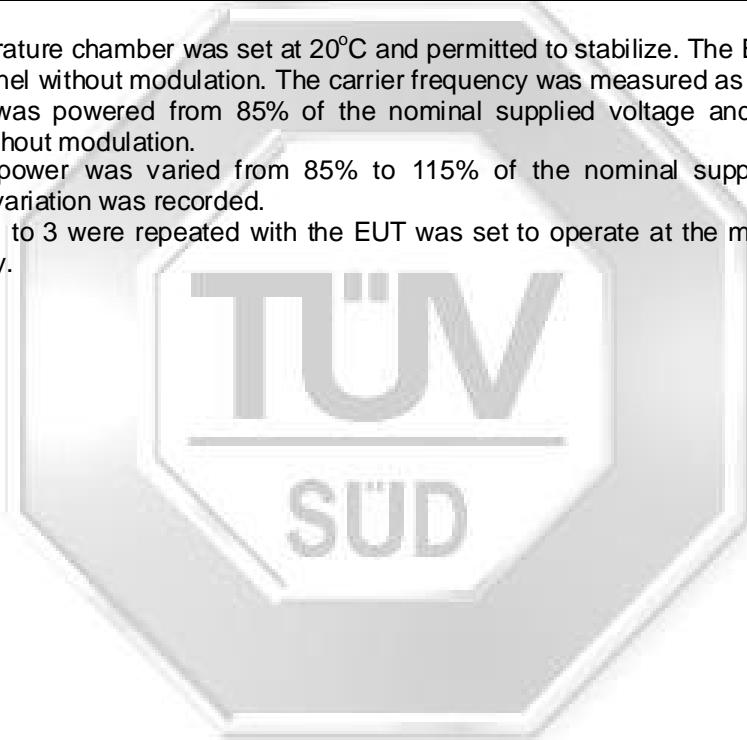

**FREQUENCY STABILITY (VOLTAGE VARIATION) TEST**



Frequency Stability (Voltage Variation) Test Setup



**FREQUENCY STABILITY (VOLTAGE VARIATION) TEST**

**47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Results**

Operating Mode	Continuous Satellite Transmission	Temperature	20°C
Test Input Power	See table below	Relative Humidity	70%
		Atmospheric Pressure	1030mbar
		Tested By	Chelmin Li

**Lower Channel**

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
10.8	1.626600878	1.626600000	878.000000	+/-16266
24.0	1.626600863	1.626600000	863.000000	+/-16266
31.2	1.626600897	1.626600000	897.000000	+/-16266

**Middle Channel**

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
10.8	1.643500930	1.643500000	930.000000	+/-16435
24.0	1.643500887	1.643500000	887.000000	+/-16435
31.2	1.643500942	1.643500000	942.000000	+/-16435

**Upper Channel**

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
10.8	1.660400900	1.660400000	900.000000	+/-16604
24.0	1.660400857	1.660400000	857.000000	+/-16604
31.2	1.660400913	1.660400000	913.000000	+/-16604

## MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

### 47 CFR FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (min)
0.3 - 1.34	614	1.63	100 <sup>Note 2</sup>	30
1.34 - 30	824 / f	2.19 / f	180 / f <sup>2</sup> <sup>Note 2</sup>	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30

#### Notes

1. f = frequency in MHz

2. Plane wave equivalent power density

### 47 CFR FCC Part 1.1310 Maximum Permissible Exposure Computation

The minimum distance to the EUT was computed from the following formula:

$$\begin{aligned} S &= (30GP) / (377d^2) \\ \text{where } S &= 10W/m^2 \\ P &= 5.2119W \\ d &= \text{Test distance} \\ G &= \text{Numerical isotropic gain, 66.07 (18.2dBi)} \end{aligned}$$

Substituting the relevant parameters into the formula:


$$\begin{aligned} d &= \sqrt{(30GP) / 377S} \\ &= \sqrt{(30 \times 5.2119) / (377 \times 10)} \\ &= 1.66m \end{aligned}$$

∴ The EUT shall maintain at least at 1.66m from operators to comply to MPE criteria.

Please note that this Report is issued under the following terms :


1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

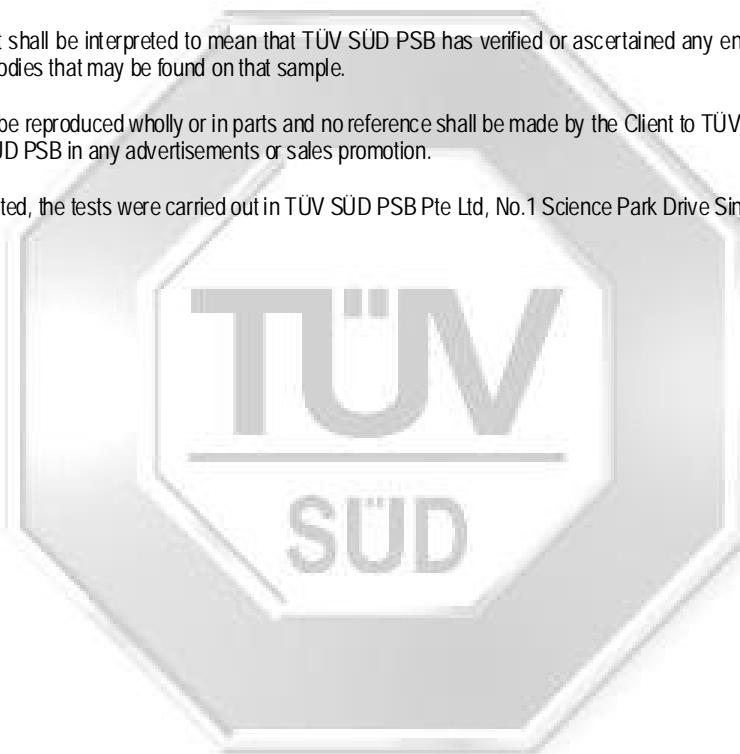

---

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

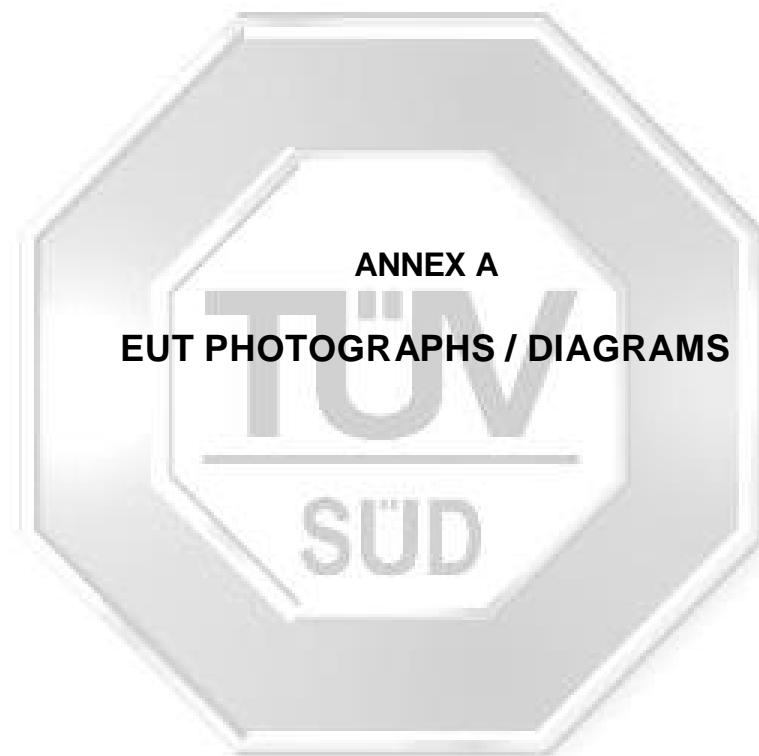

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS – MAIN UNIT**



**Front View**



**Rear View**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS - HANDSET**



**Front View**



**Rear View**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – ANTENNA UNIT**



**Front View**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS – ANTENNA UNIT**

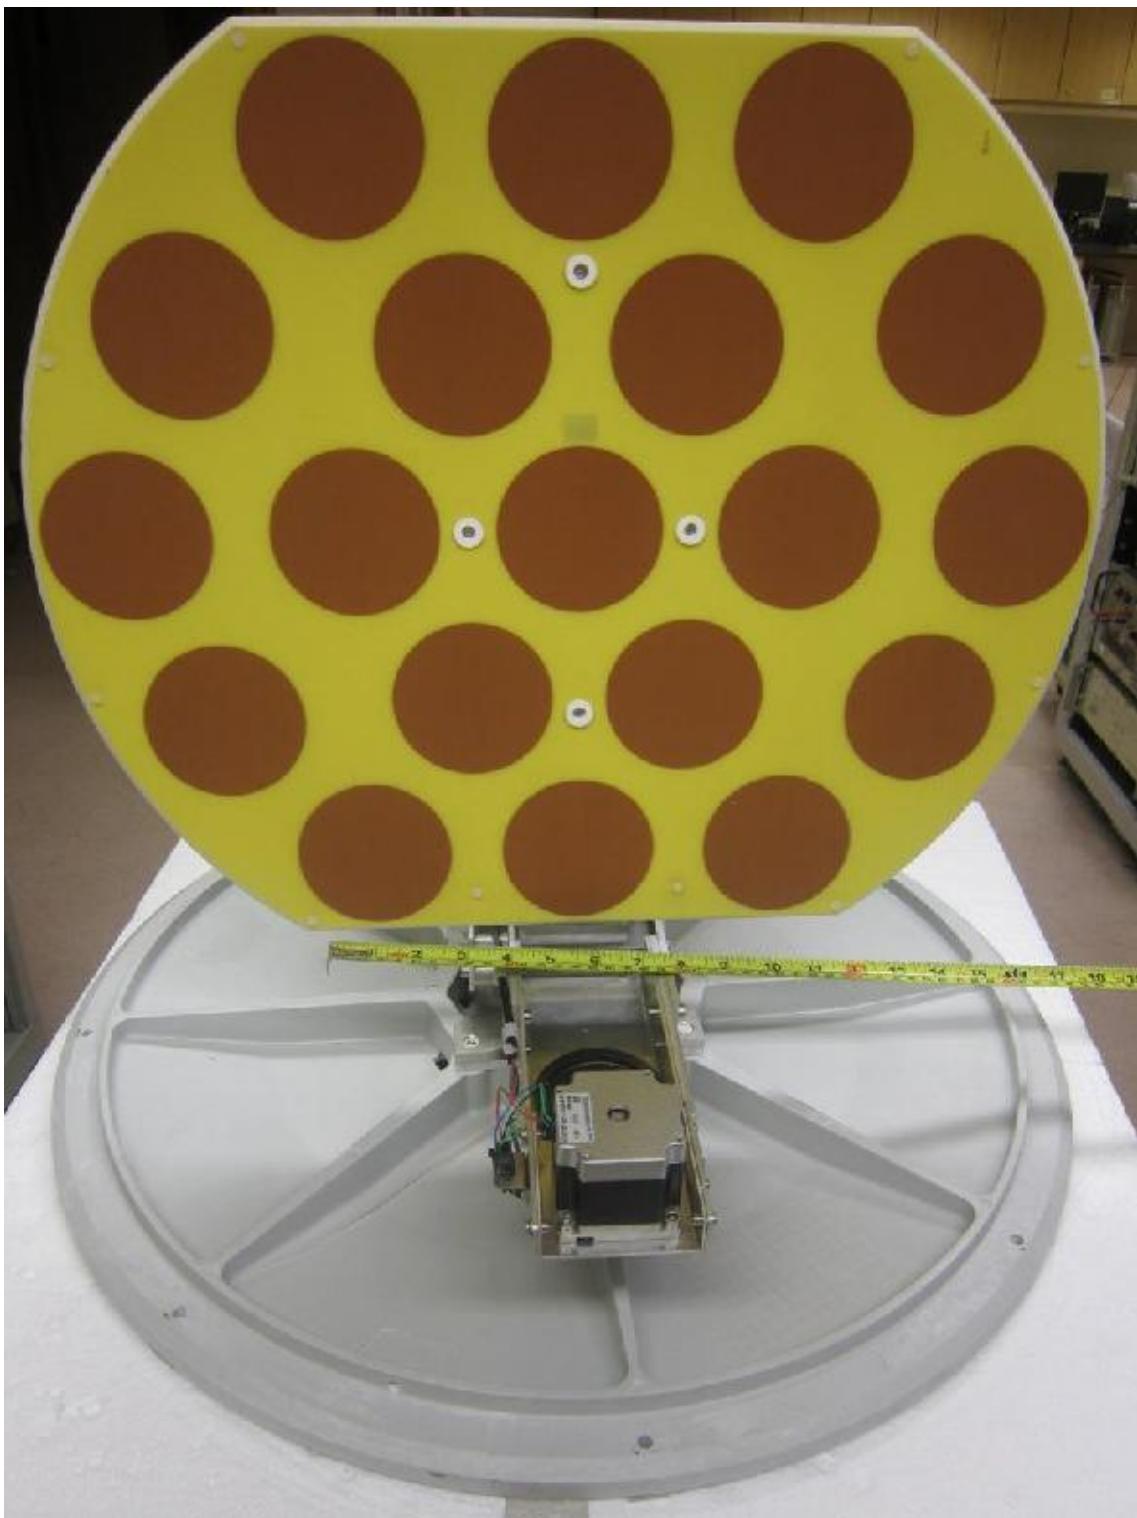


**Internal Front View**

---

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS – ANTENNA UNIT**

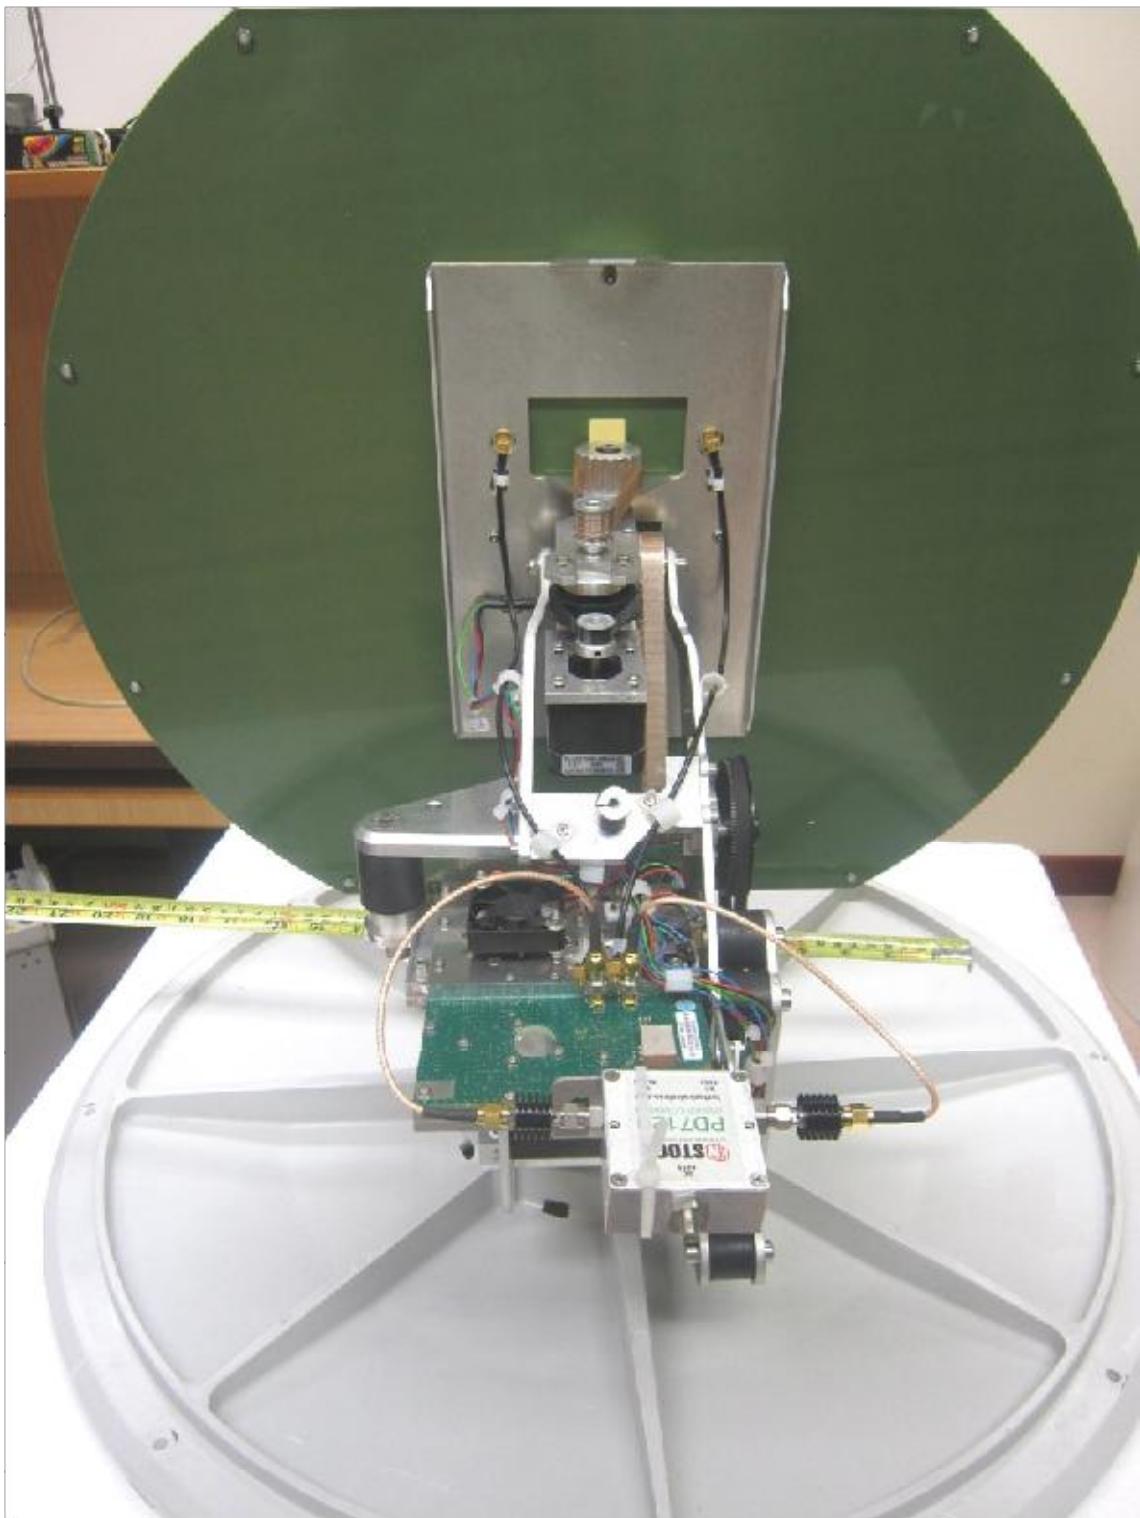

**Internal Rear View**

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS – ANTENNA UNIT



RF ATC Board PCB Component Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

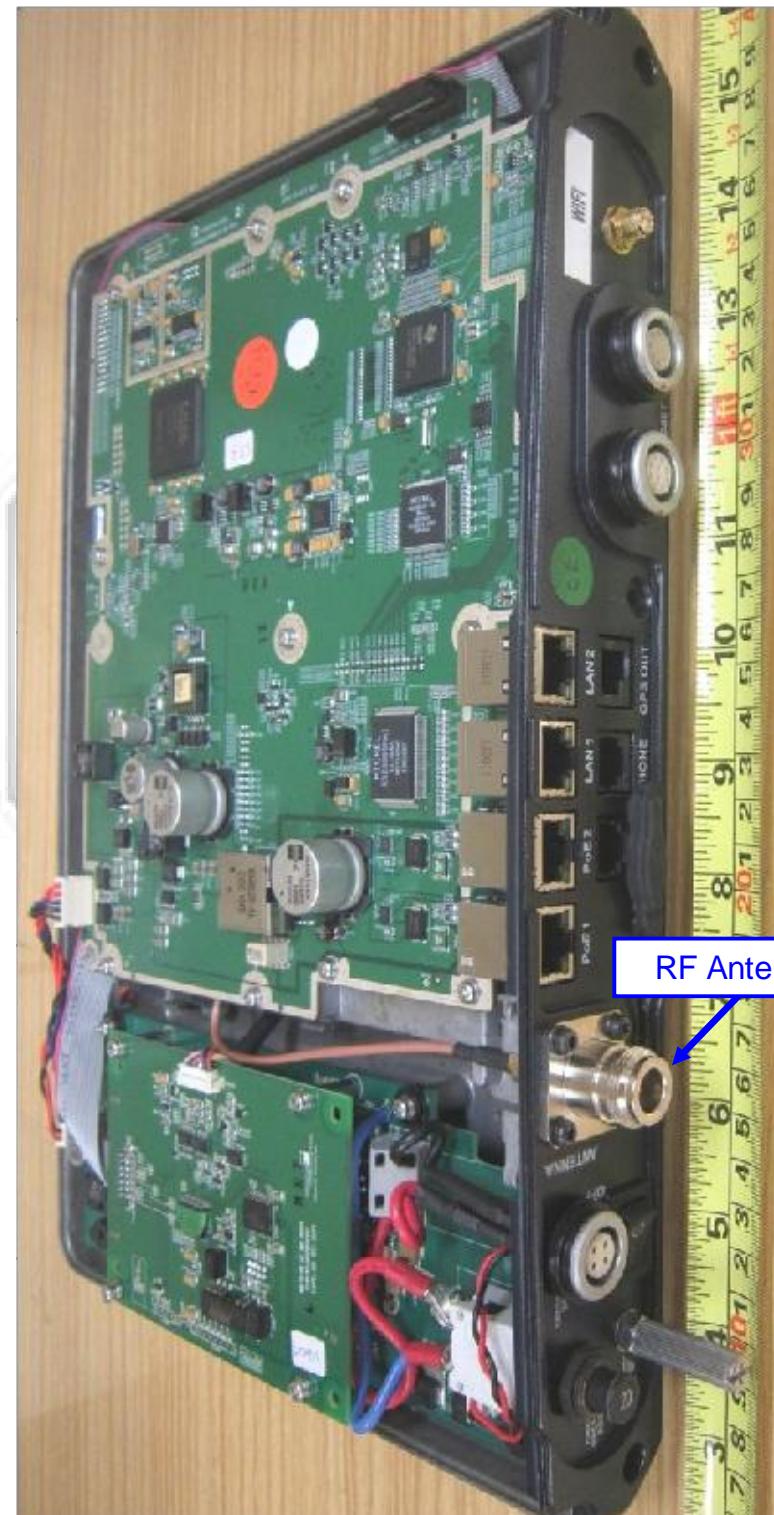

**Internal View**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

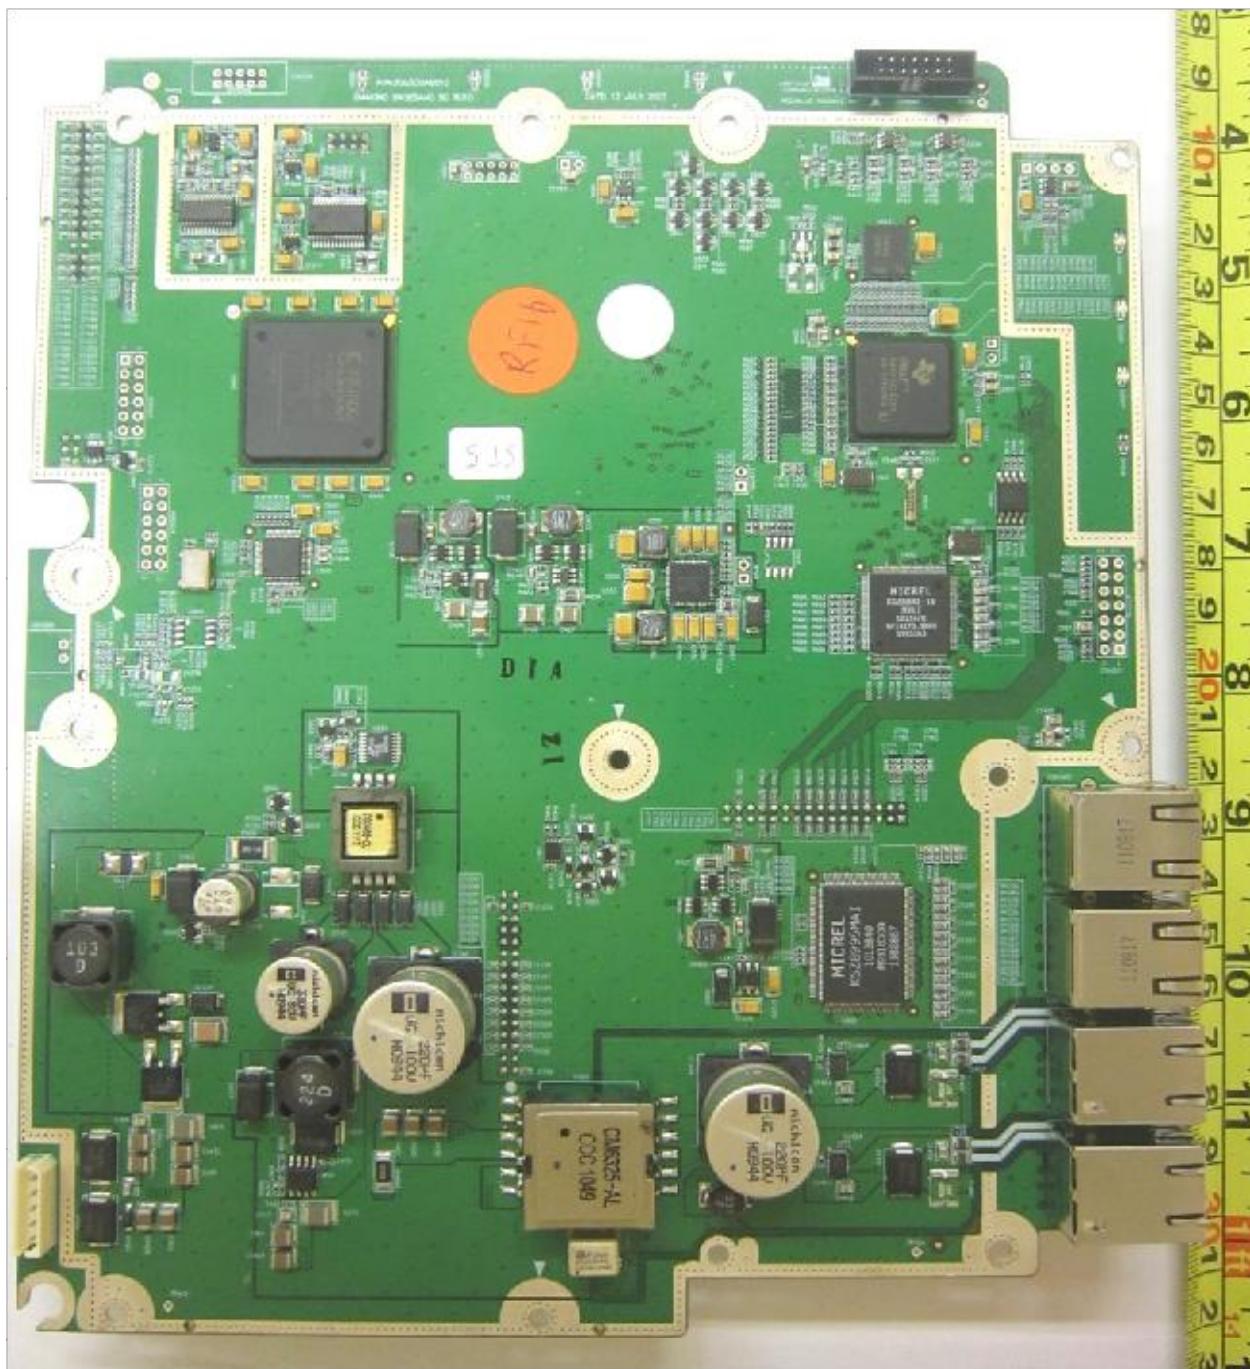

**BaseBand PCB Component Side**

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS – MAIN UNIT

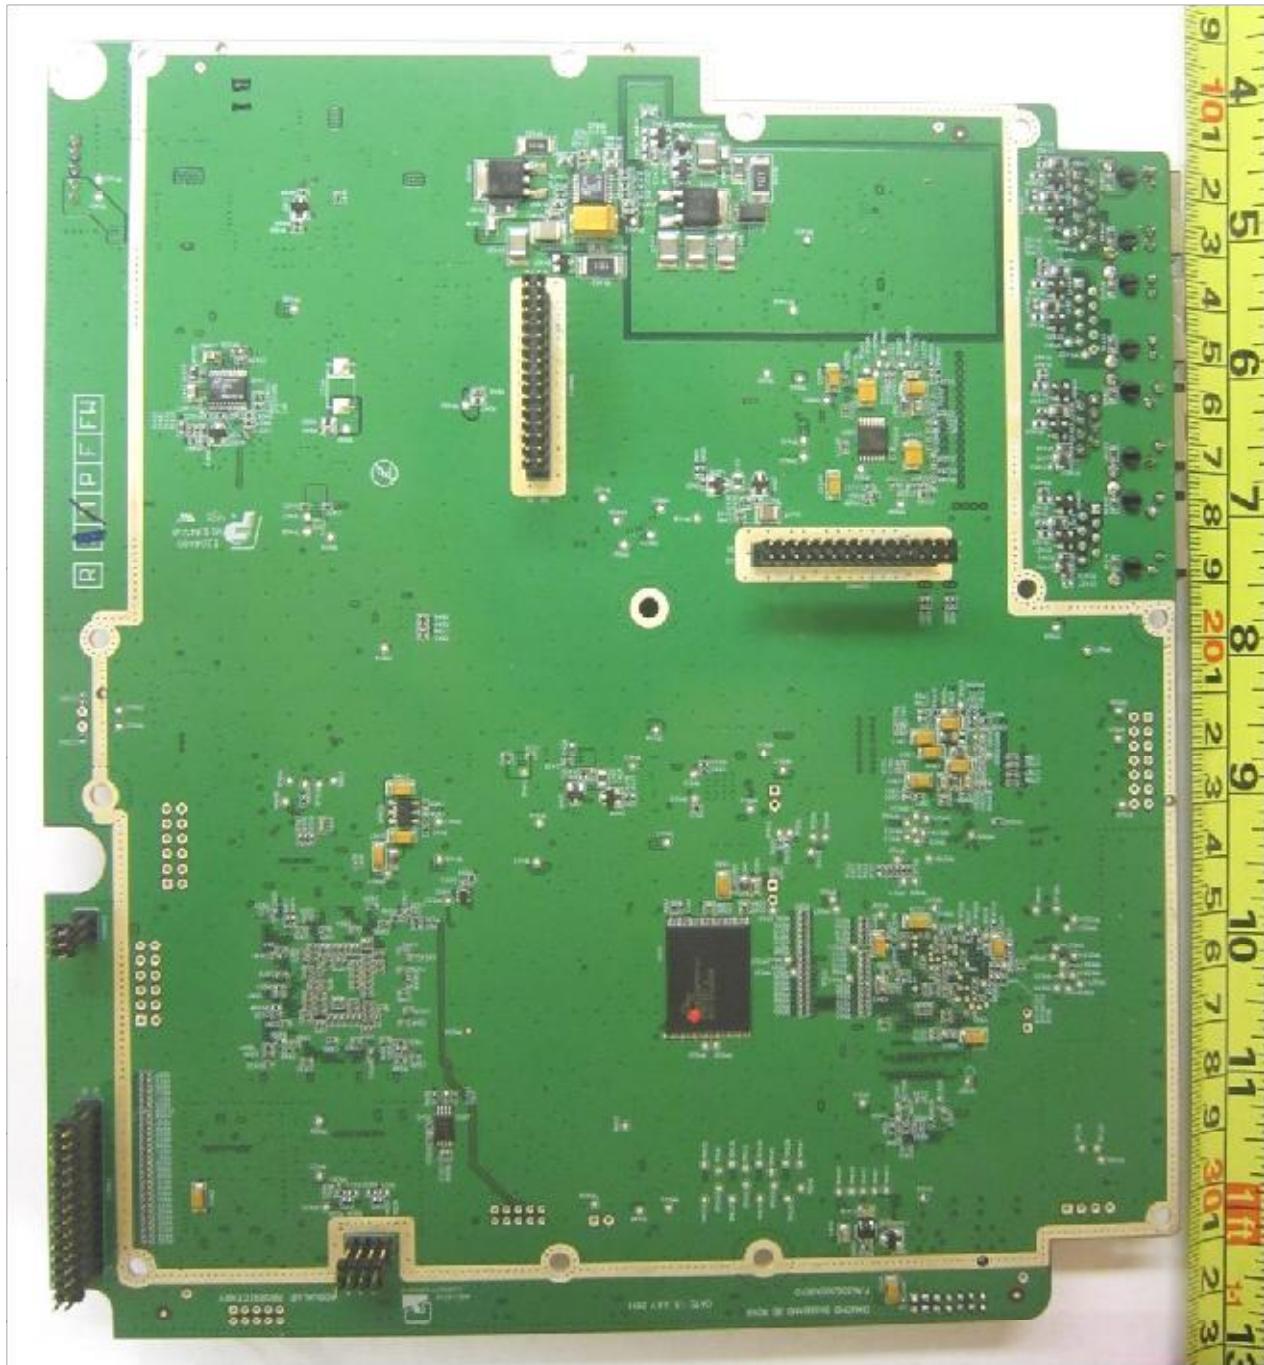

BaseBand PCB Trace Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

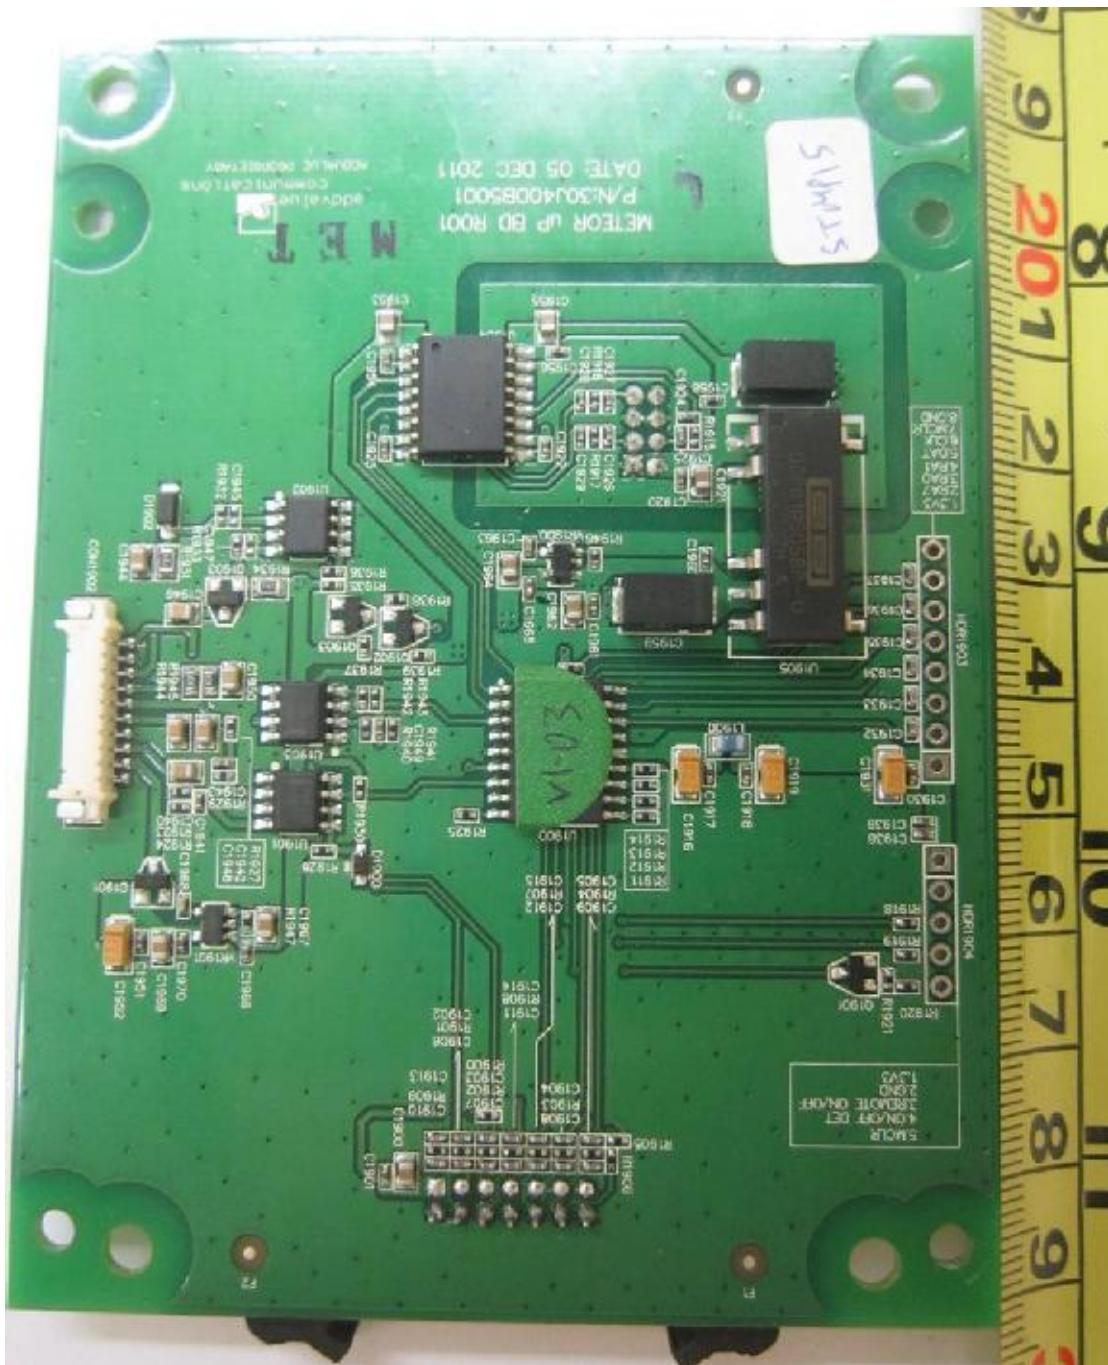

Microprocessor Board PCB Component Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

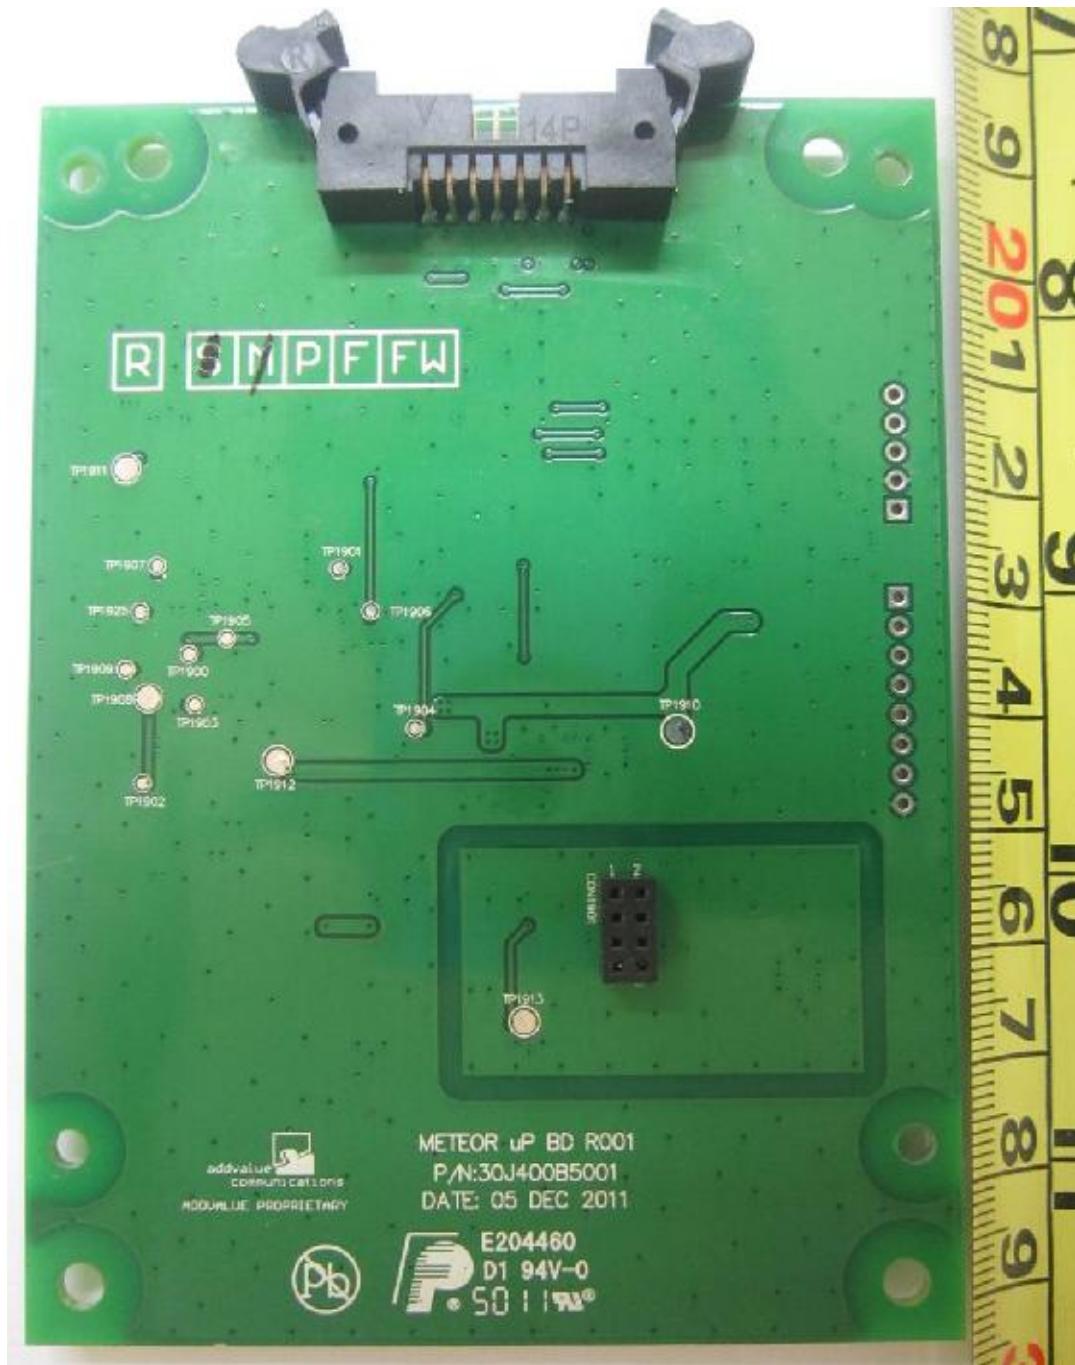

**Microprocessor Board PCB Trace Side**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

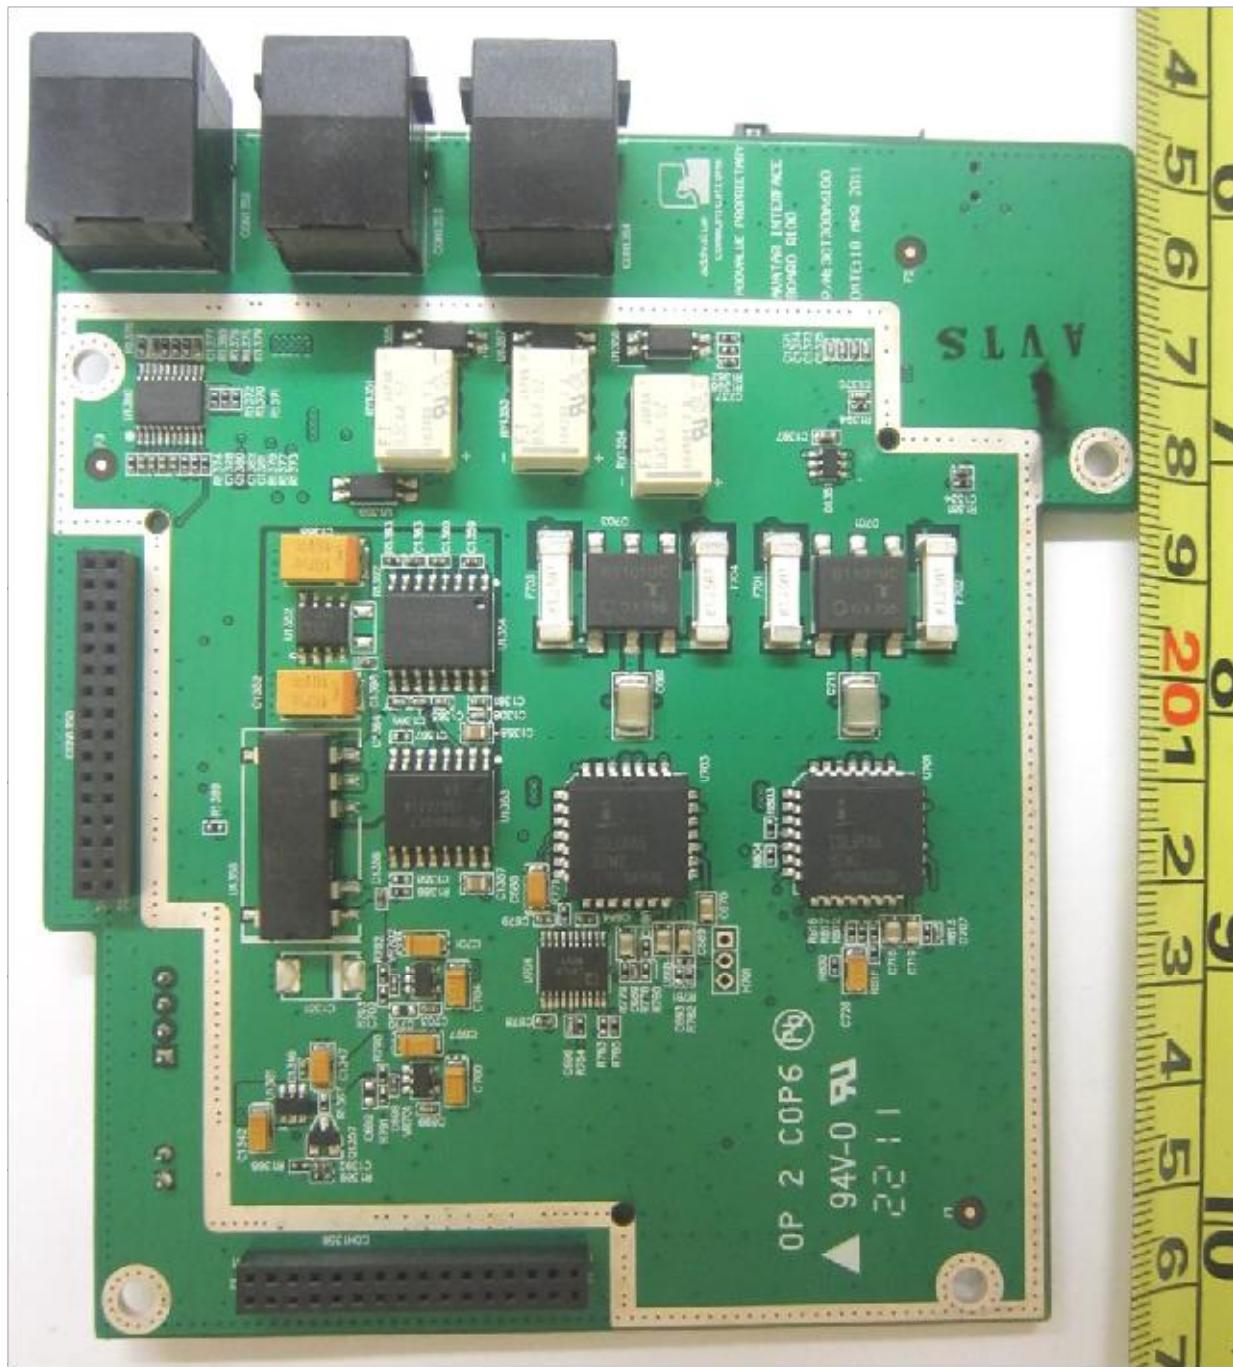

Interface Board PCB Component Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

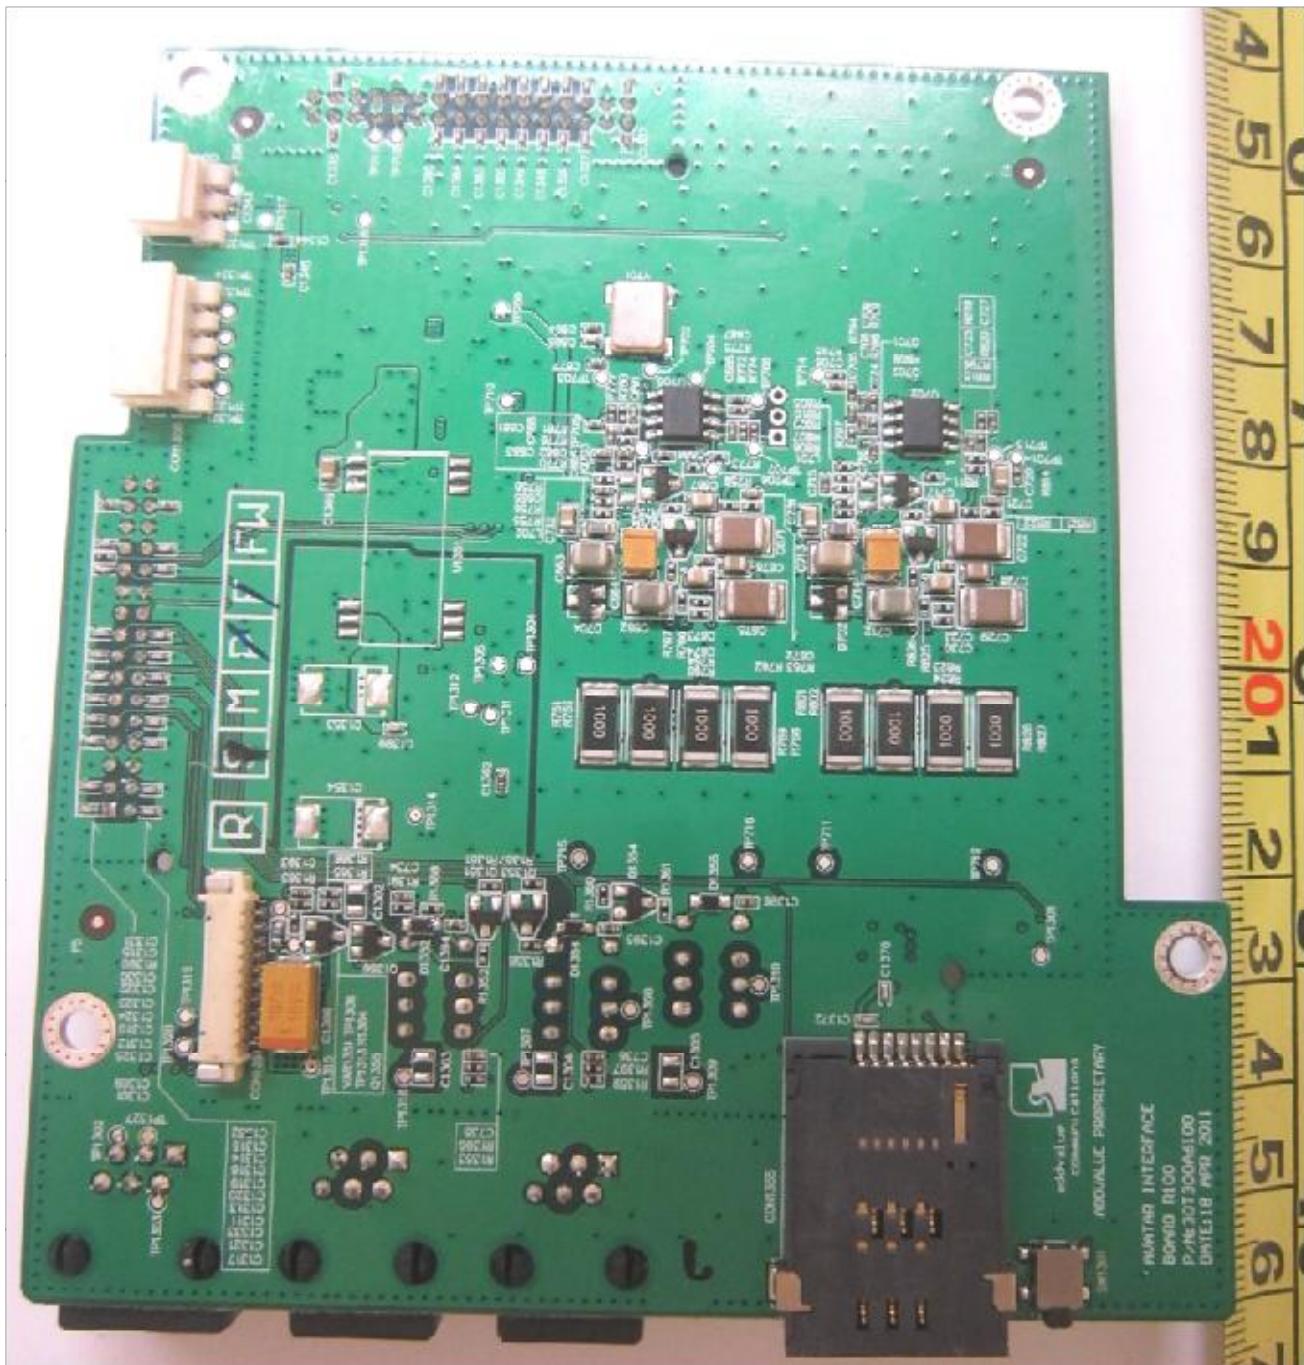

Interface Board PCB Trace Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS – MAIN UNIT**

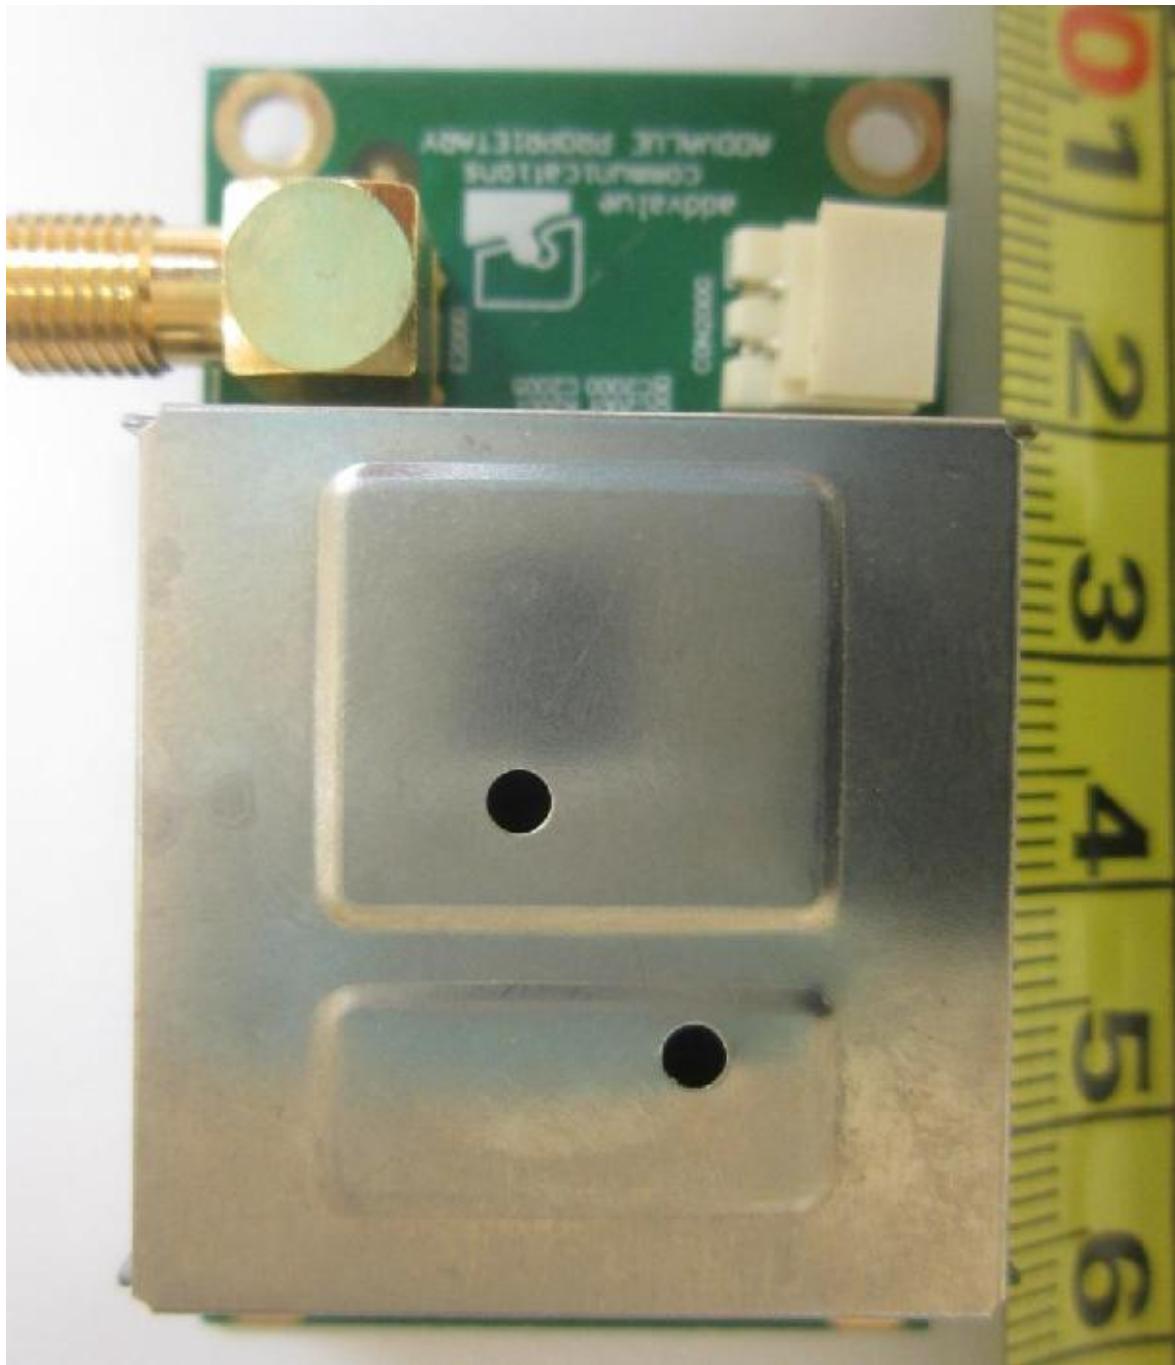

**Crystal Board PCB Component Side**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**



Crystal Board PCB Trace Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

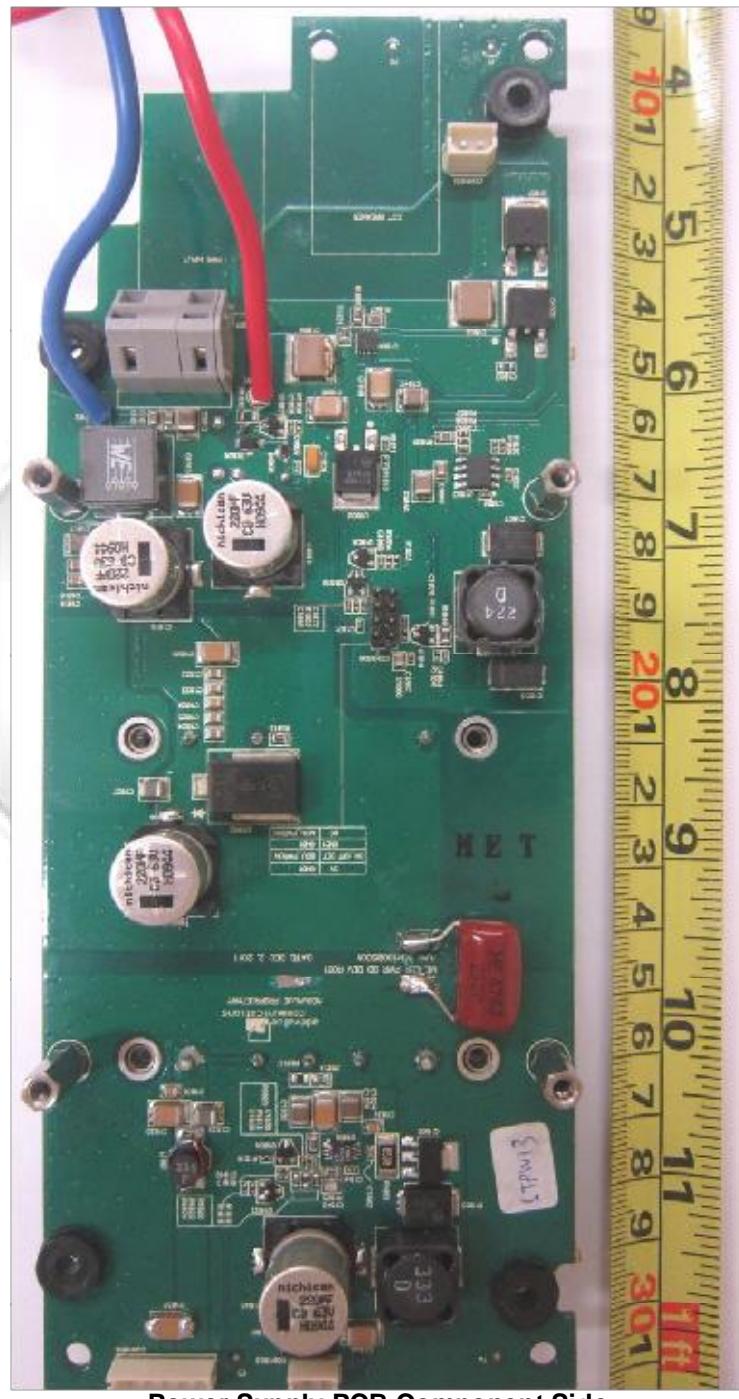

Power Supply PCB Component Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

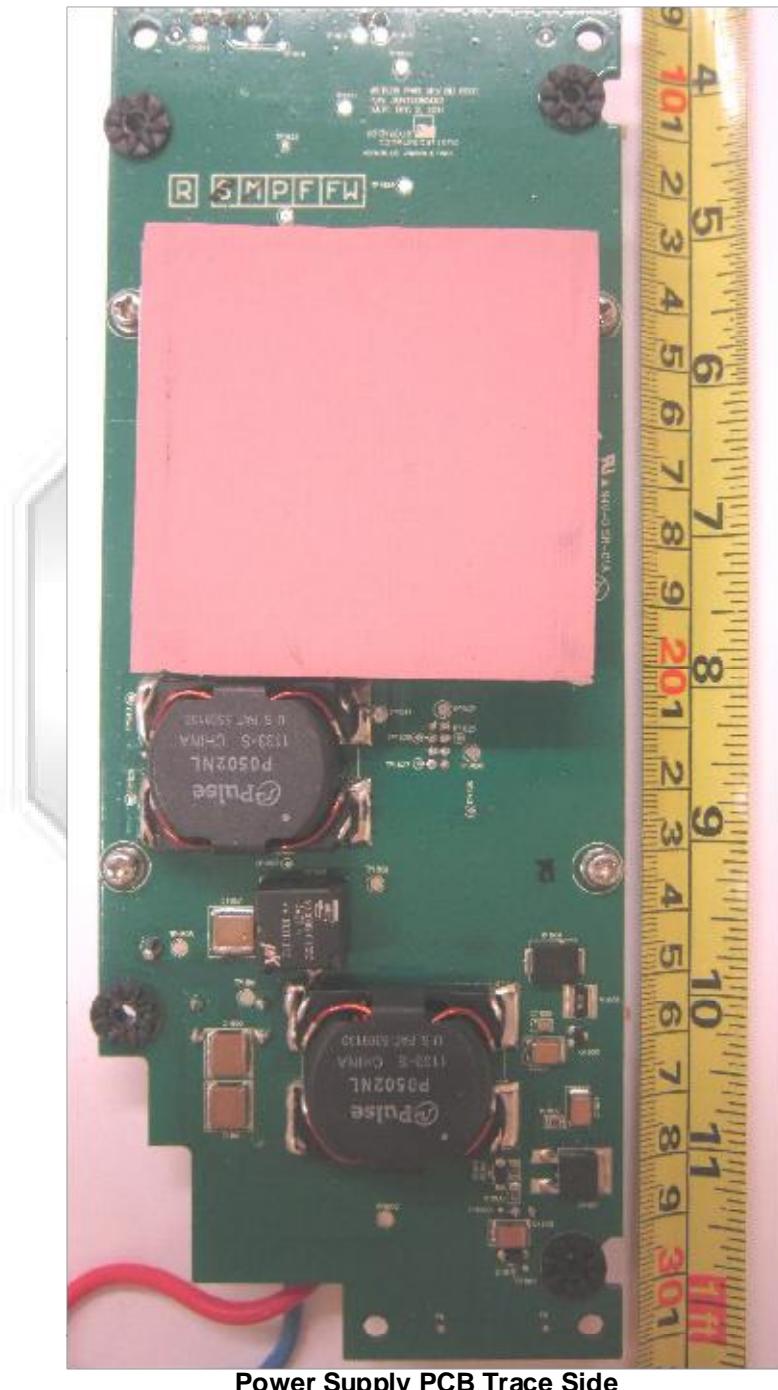

**Power Supply PCB Trace Side**

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS – MAIN UNIT

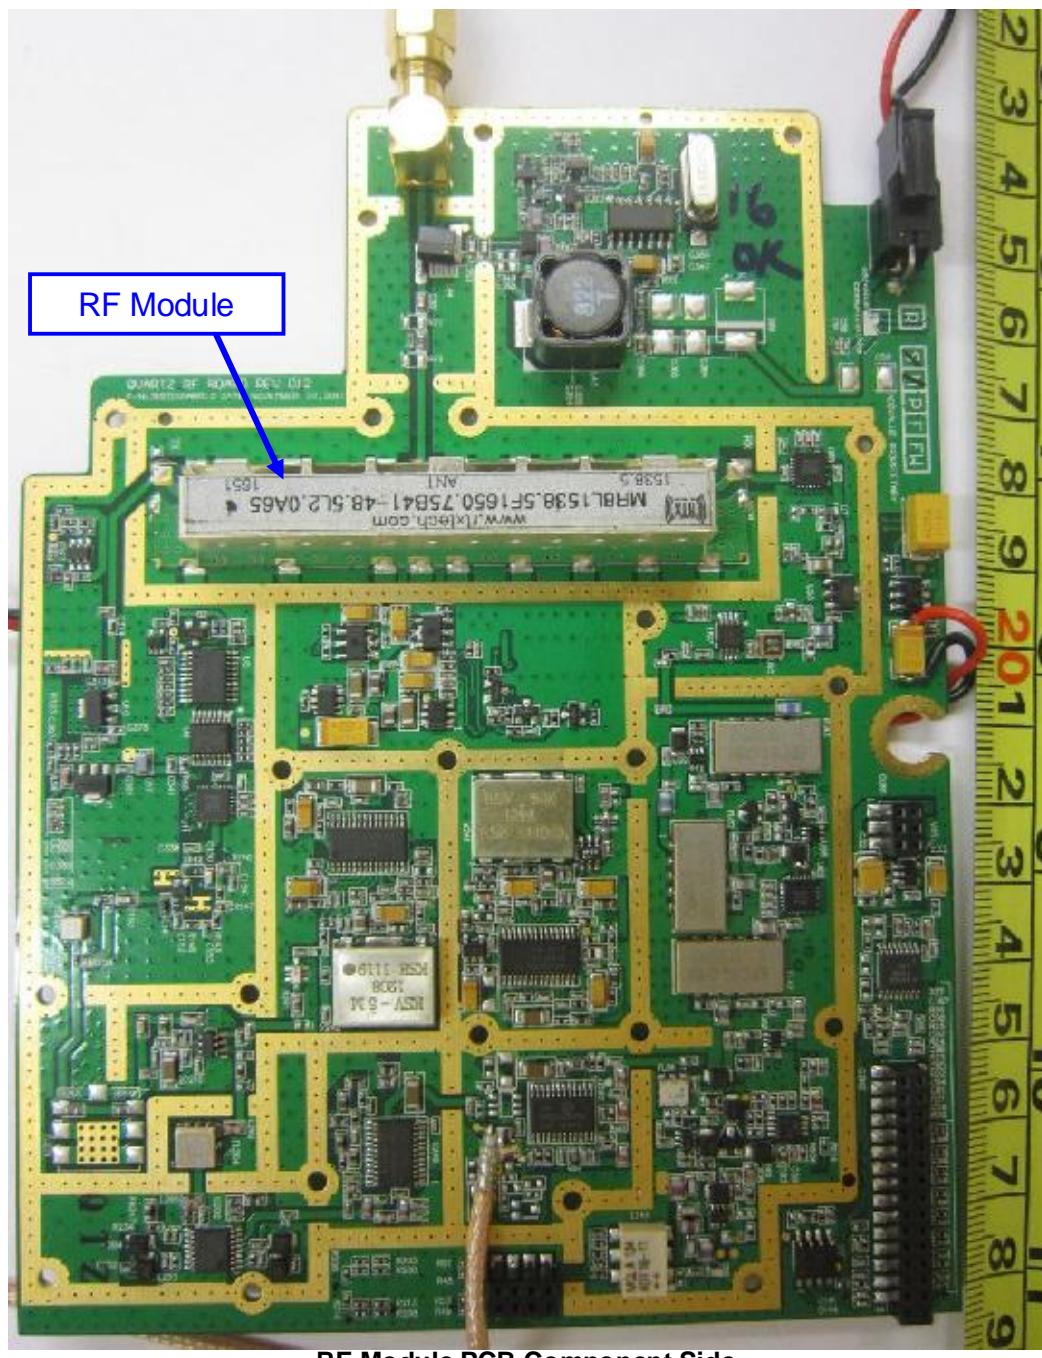

RF Module PCB Component Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**

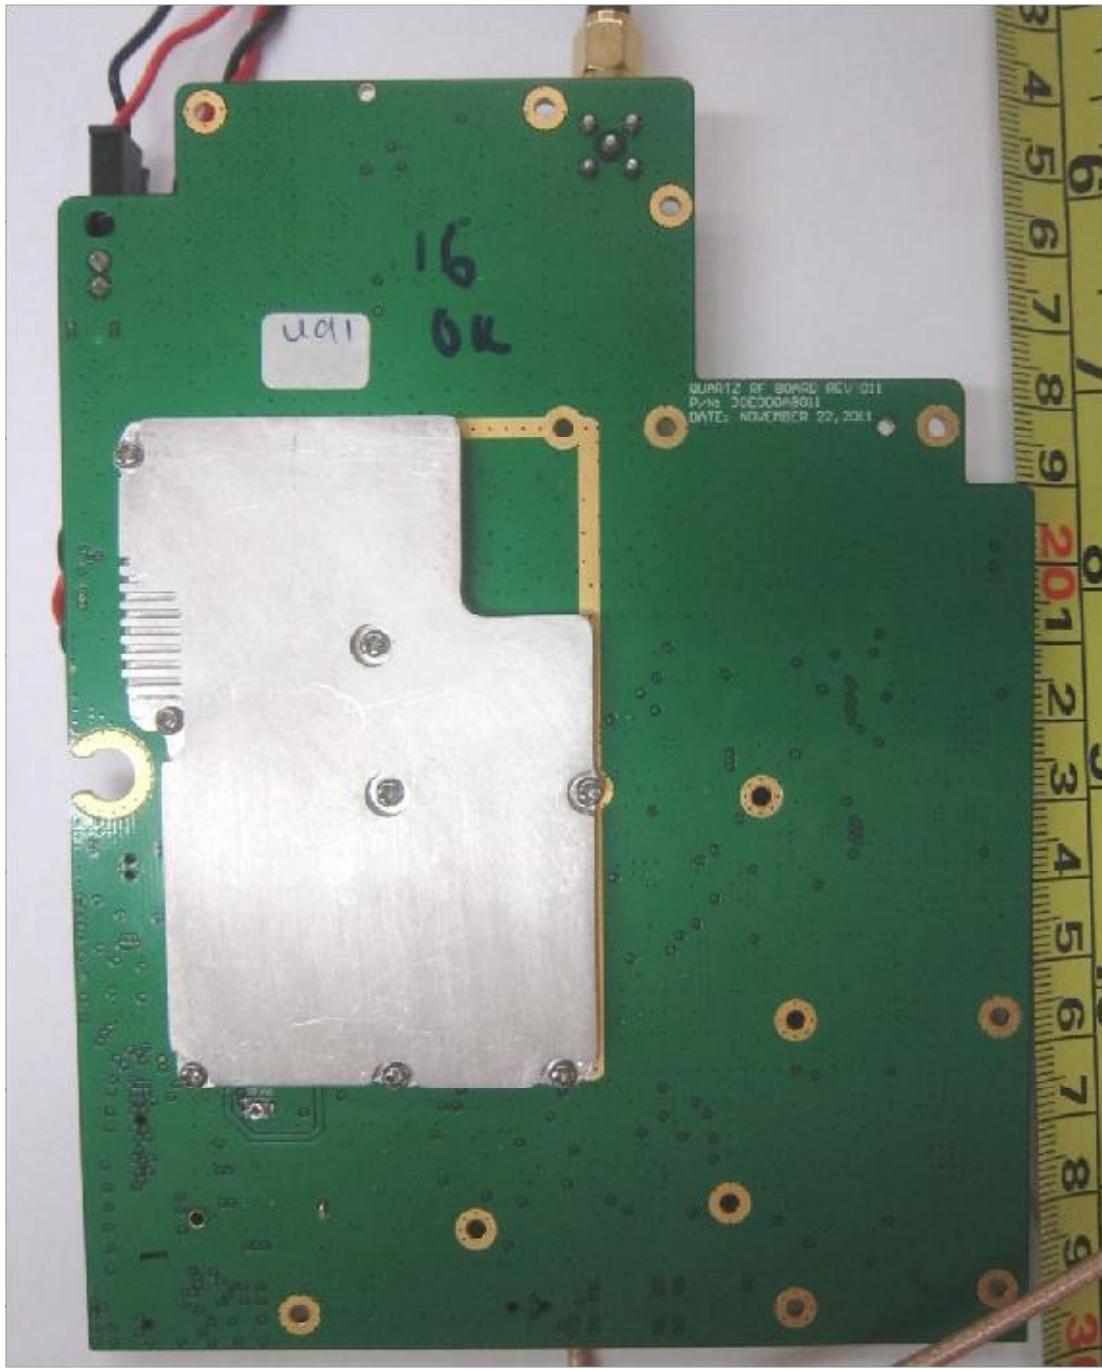

RF Module PCB Trace Side

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS**

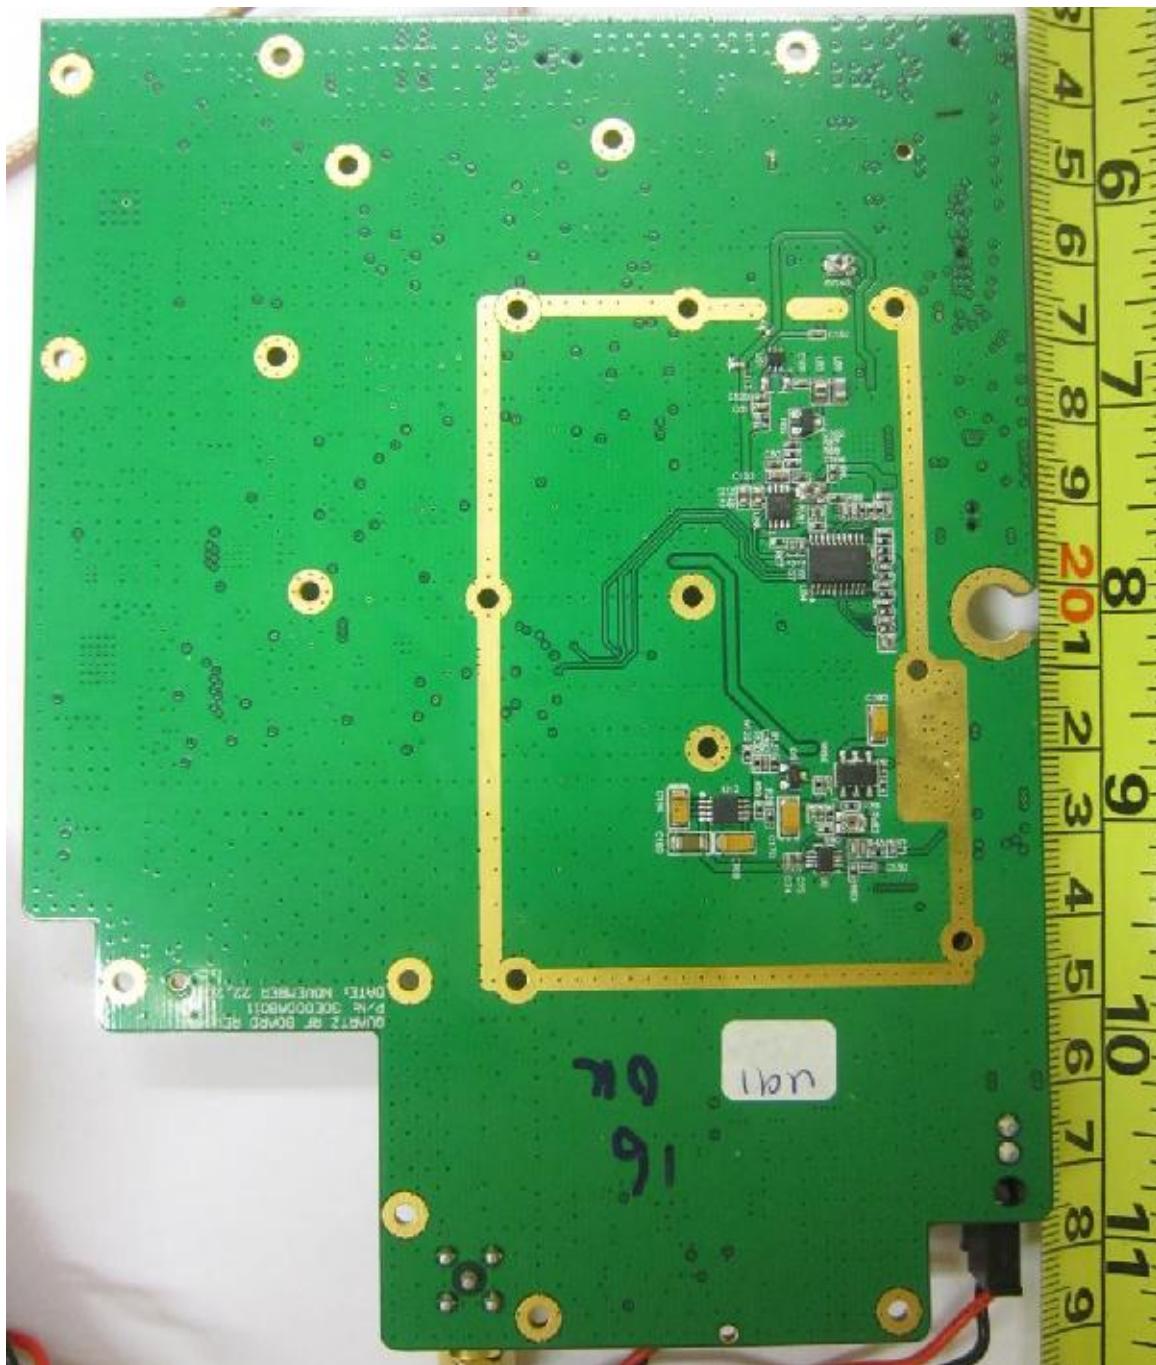

RF Module Circuit with RF Shield Removed

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS – MAIN UNIT**

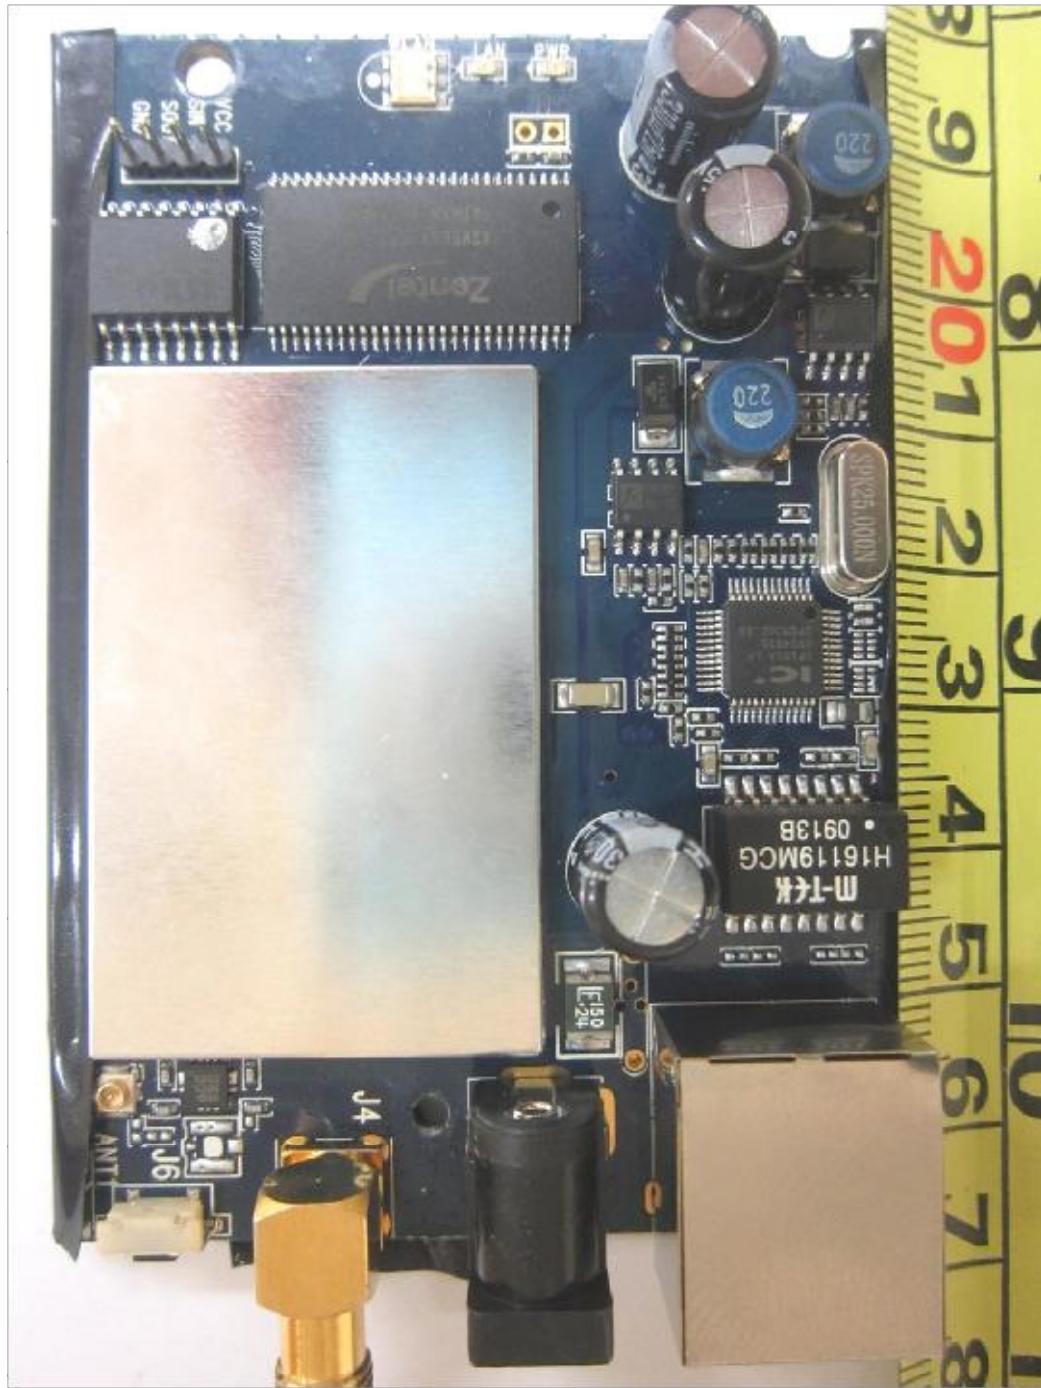

**WiFi Module PCB Component Side**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS – MAIN UNIT**



**WiFi Module PCB Trace Side**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS**

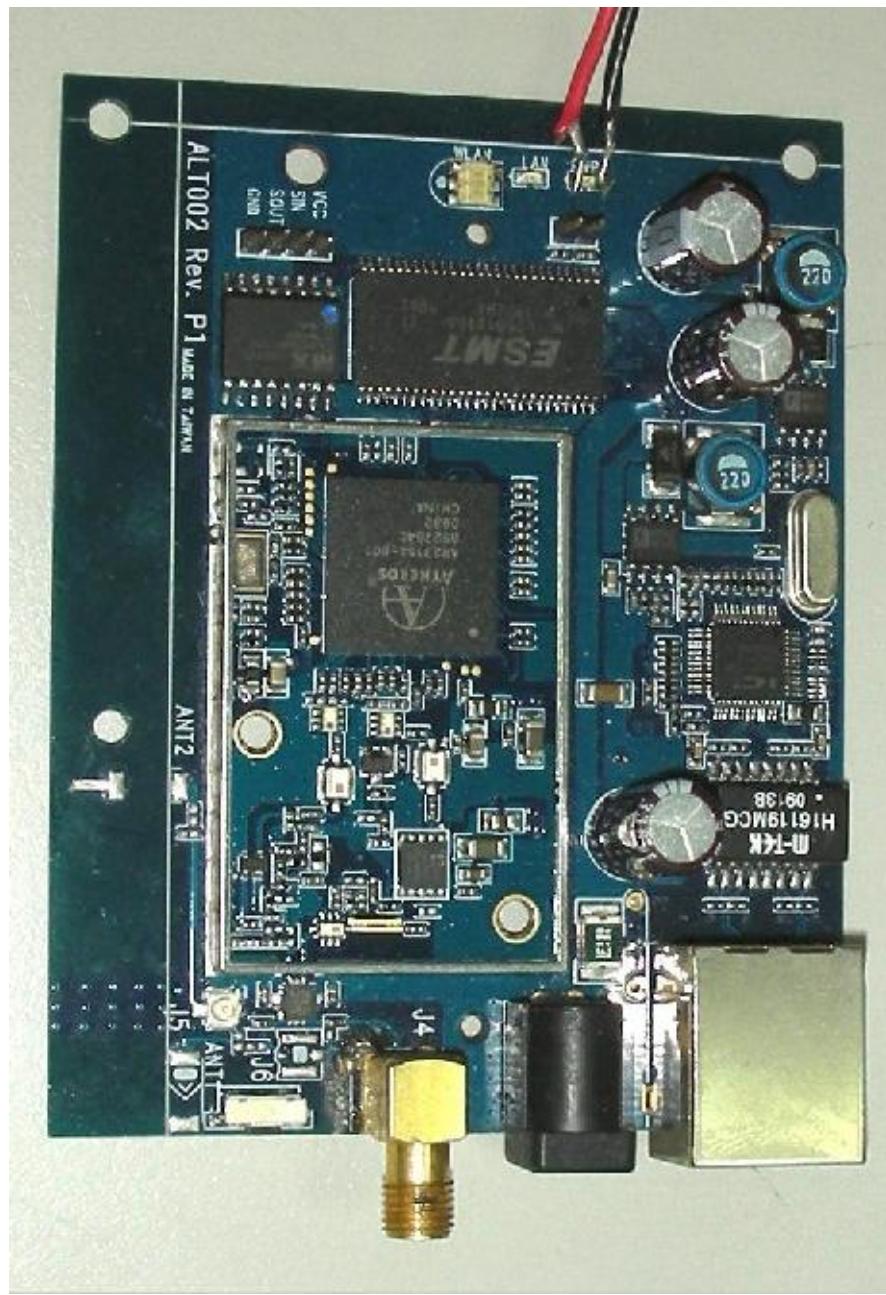

**WiFi Module Circuit with RF Shield Removed Component Side**

**ANNEX A EUT PHOTOGRAPHS / DIAGRAMS**


**EUT PHOTOGRAPHS**



**WiFi Module Circuit with RF Shield Removed Trace Side**

---

**ANNEX B USER MANUALTECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS**

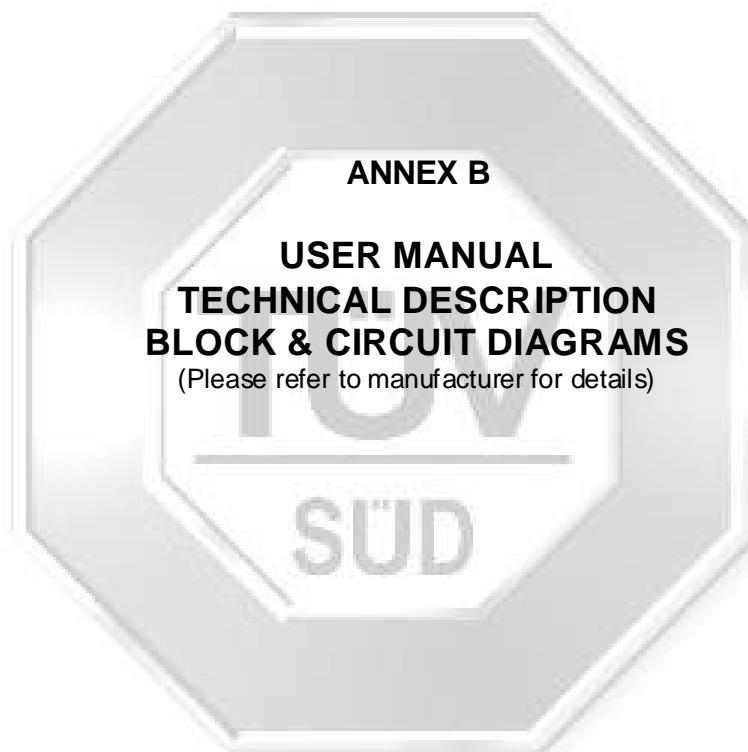

---

**ANNEX C FCC LABEL & POSITION**



**ANNEX C FCC LABEL & POSITION**

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

