



PSB Singapore

Choose certainty.
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
47 CFR FCC Parts 2, 15, and 25 : 2012
OF A
SATELLITE TERMINAL, iSavi
[Model : SH-100]
[FCC ID : QO4-ISAViSH100]

TEST FACILITY

TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
13 International Business Park #01-01, Singapore 609932

FCC REG. NO.

99142 (3m and 10m Semi-Anechoic Chamber, Science Park)

IND. CANADA REG. NO.

2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)

PREPARED FOR

Addvalue Innovation Pte Ltd
8 Tai Seng Link, Level 5 (WING 2),
Singapore 534158

Tel : (65) 6509 5700

Fax : (65) 6509 5701

QUOTATION NUMBER

219192247

JOB NUMBER

7191086396

TEST PERIOD

06 May 2014 – 30 Jun 2014

PREPARED BY

Quek Keng Huat
Higher Associate Engineer

APPROVED BY

Lim Cher Hwee
Assistant Vice President



LA-2007-0380-A
LA-2007-0381-F
LA-2007-0382-B
LA-2007-0382-B-1
LA-2007-0383-G
LA-2007-0383-G-1
LA-2007-0384-G
LA-2007-0385-E
LA-2007-0386-C
LA-2010-0464-D
FFT-2013-0002-A

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

TABLE OF CONTENTS

TEST SUMMARY	3
PRODUCT DESCRIPTION	4
SUPPORTING EQUIPMENT DESCRIPTION.....	6
EUT OPERATING CONDITIONS.....	7
CONDUCTED EMISSION TEST	8
RADIATED EMISSION TEST.....	11
RF OUTPUT POWER TEST	14
UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST	34
RADIATED SPURIOUS EMISSION TEST.....	79
PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST.....	84
FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST	91
FREQUENCY STABILITY (VOLTAGE VARIATION) TEST.....	95
MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST	98
ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS	100
ANNEX B USER MANUALTECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	125
ANNEX C FCC LABEL & POSITION.....	126

TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
47 CFR FCC Parts 2, 15 and 25: 2012		
15.107(a), 15.207	Conducted Emissions	Pass
15.109	Radiated Emissions (Class B)	Pass
2.1046(a), 25.204	RF Output Power	Pass
2.1051, 25.202(f)	Unwanted Emissions at Antenna Terminal	Pass
2.1053, 25.202(f)	Radiated Spurious Emissions	Pass
25.216(h)(i)(j)	Protection of Aeronautical Radio Navigation Satellite Service	Pass
2.1055, 25.202(d)	Frequency Stability (Temperature Variation)	Pass
2.1055, 25.202(d)	Frequency Stability (Voltage Variation)	Pass
1.1310	Maximum Permissible Exposure	Refer to page 98 for details

Notes

- Three channels as listed below, which respectively represent the lower, middle and upper channels (transmit and receive) of the Equipment Under Test (EUT) when it was configured to operate under test mode condition.

Transmit Channel	Frequency (GHz)	Receive Channel	Frequency (GHz)
Lower Channel	1.6266	Lower Channel	1.5251
Middle Channel	1.6435	Middle Channel	1.5420
Upper Channel	1.6604	Upper Channel	1.5589

- The following tests were based on conducted measurement method:
 - RF Output Power
 - Unwanted Emissions at Antenna Terminal
 - Frequency Stability (Temperature Variation)
 - Frequency Stability (Voltage Variation)
- All test measurement procedures are according to ANSI/TIA-603-B-2002.
- The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.

Modifications

No modifications were made.

PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is a SATELLITE TERMINAL, iSavi .
Applicant	: Addvalue Innovation Pte Ltd 8 Tai Seng Link, Level 5 (WING 2), Singapore 534158
Manufacturer	: Addvalue Innovation Pte Ltd 8 Tai Seng Link, Level 5 (WING 2), Singapore 534158
Factor (ies)	: Beyonics Technology (Senai) Sdn Bhd PLO 171, Jalan Perindustrian 7, Kawasan Perindustrian Senai III 81400 Senai, Johor, Malaysia
Model Number(s)	: SH-100
FCC ID	: QO4-ISAViSH100
Brand	: Wideye
Serial Number(s)	: MS-439 (Emission)
Microprocessor(s)	: OMAP L138
Operating Frequency	: 1626.5MHz – 1660.4MHz (Satellite Transmit) 1518.1MHz – 1558.9MHz (Satellite Receive) 1575MHz (GPS) 2412MHz – 2462MHz (WiFi)
Clock / Oscillator Frequency	: <u>Baseband Board</u> 32.768kHz, 4.9152MHz, 24.192MHz & 25.0MHz <u>RF Board</u> 18MHz & 24.192MHz
Modulation	: i. 802.11b 1Mbps: DBPSK ii. 802.11b 2Mbps: DQPSK iii. 802.11b 11Mbps: CCK iv. 802.11g 9Mbps, 802.11n(20MHz) 13Mbps & (40MHz) 27Mbps: BPSK v. 802.11g 18Mbps, 802.11n(20MHz) 39Mbps & (40MHz) 81Mbps: QPSK vi. 802.11g 36Mbps, 802.11n(20MHz) 78Mbps & (40MHz) 162Mbps: 16QAM vii. 802.11g 54Mbps, 802.11n(20MHz) 130Mbps & (40MHz) 270Mbps: 64QAM viii. Bearer 0: R20T05Q ix. Bearer 1: R20T1Q x. Bearer 2: R20T2Q xi. Bearer 3: R20T4.5Q xii. Bearer 7: R5T2Q xiii. Bearer 8: R5T4.5Q
Antenna Gain	: 8.5 dBi



PSB Singapore

PRODUCT DESCRIPTION

Port / Connectors	: Refer to manufacturer's user manual / operating manual
Rated Input Power	: 120V 60Hz
Accessories	: i. Shinning Fair Power Adapter Model SF65-1803600-FC Input 100V-240V 60Hz/50Hz Output 18Vdc 3.6A Serial Number A20140400078842 ii. Battery Pack Model No: SH-100BP3(3ICR19/66) 10.8v 3000mAh, 33Wh





PSB Singapore

SUPPORTING EQUIPMENT DESCRIPTION

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Acer Travelmate 4750	M/N: MS2335 S/N: LXV420302411500B3B2000 FCC ID: DoC	1.8 m unshielded power cable
Delta Electronics AC/DC Adapter	M/N: ADP-65JH DB S/N: 67DW28P00YC FCC ID: DoC	1.80m unshielded power cable



EUT OPERATING CONDITIONS

47 CFR FCC Parts 2, 15 and 25

1. RF Output Power
2. Unwanted Emissions at Antenna Terminal
3. Radiated Spurious Emissions
4. Protection of Aeronautical Radio Navigation Satellite Service
5. Frequency Stability (Temperature Variation)
6. Frequency Stability (Voltage Variation)
7. Maximum Permissible Exposure

The EUT was exercised by operating in following modes with the EUT simulating the transmission and reception using the client's provided test programs, "RFCalib_Start"

Satellite Transmission Mode


- Continuous RF transmission at lower channel at maximum RF power
- Continuous maximum RF transmission at middle channel at maximum RF power
- Continuous maximum RF transmission at upper channel at maximum RF power

Satellite Reception (Receive) Mode

- Continuous RF reception at lower channel
- Continuous RF reception at middle channel
- Continuous RF reception at upper channel

GPS Reception (Receive) Mode

- Continuous GPS signal reception

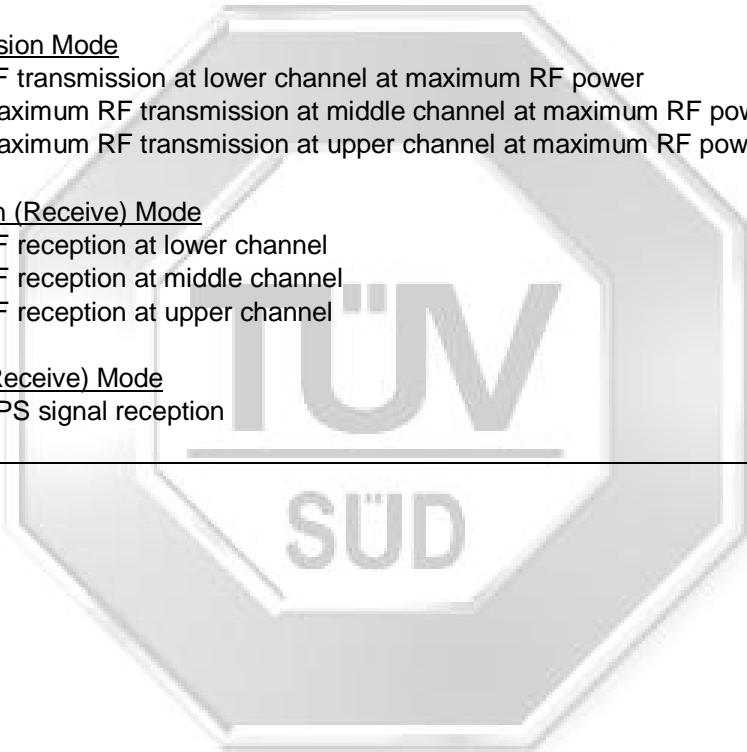

TÜV
SUD

CONDUCTED EMISSION TEST

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Limits

Frequency Range (MHz)	Limit Values (dB μ V)	
	Quasi-peak (Q-P)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreasing linearly with the logarithm of the frequency

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Rohde & Schwarz EMI Test Receiver (9kHz-3GHz)	ESCI	100477	30 Jul 2014	1 year
Schaffner LISN 2-Line V-Network (EUT) (9kHz-30MHz)	NNB41	04/10152	07 Jan 2015	1 year



CONDUCTED EMISSION TEST

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 9kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

Sample Calculation Example

At 20 MHz

Q-P limit = 60.0 dB μ V

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V
(Calibrated for system losses)

Therefore, Q-P margin = $60.0 - 40.0 = 20.0$

i.e. 20.0 dB below Q-P limit

CONDUCTED EMISSION TEST

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Results

Test Input Power	120V 60Hz	Temperature	24°C°C
Line Under Test Mains	AC Mains	Relative Humidity	54%
		Atmospheric Pressure	1035 mbar
		Tested By	Nazrulhizat

Frequency (MHz)	Q-P Value (dB μ V)	Q-P Limit (dB μ V)	Q-P Margin (dB)	AV Value (dB μ V)	AV Limit (dB μ V)	AV Margin (dB)	Line
0.1858	44.3	64.2	19.9	34.8	54.2	19.4	Live
0.7518	33.6	56.0	22.4	25.6	46.0	20.4	Live
1.1618	33.0	56.0	23.0	24.9	46.0	21.1	Neutral
1.3139	34.4	56.0	21.6	25.5	46.0	20.5	Live
2.6630	38.8	56.0	17.2	24.0	46.0	22.0	Live
3.4885	35.1	56.0	20.9	21.7	46.0	24.3	Neutral

Notes

1. All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
9kHz - 30MHz
RBW: 9kHz VBW: 30kHz
4. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz is ± 2.2 dB.

RADIATED EMISSION TEST

47 CFR FCC Part 15.109 Radiated Emission Limits (Class B)

Frequency Range (MHz)	Quasi-Peak Limit Values (dB μ V/m) @ 3m
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0*

* Above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

47 CFR FCC Part 15.109 Radiated Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
R&S Test Receiver – ESI1	ESI40	100010	09 Jul 2014	1 year
Schaffner Bilog Antenna –(30MHz-2GHz) BL3 (Ref)	CBL6112B	2549	23 Jan 2015	1 year
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441056	16 Aug 2014	1 year
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	14 Mar 2015	1 year
EMCO Horn Antenna(1GHz-18GHz)	3115	9901-5671	13 Mar 2015	1 year
K&L Microwave Bandreject Filter	3TNF-1000/2000-N/N	436	Output Monitor	Output Monitor

RADIATED EMISSION TEST

47 CFR FCC Part 15.109 Radiated Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

47 CFR FCC Part 15.109 Radiated Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 10th harmonic of the highest frequency used or generated by the EUT, using the Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

Sample Calculation Example

At 300 MHz

Q-P limit = 37.0 dB μ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 31.0 dB μ V/m
(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 37.0 - 31.0 = 6.0

i.e. 6.0 dB below Q-P limit

RADIATED EMISSION TEST

47 CFR FCC Part 15.109 Radiated Emission Results

Operating Mode	Continuous Satellite Transmission	Temperature	22°C
Test Input Power	120V 60Hz	Relative Humidity	54%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Lim Kay Tak

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB μ V/m)	Q-P Limit (dB μ V/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)
30.8040	26.4	40.0	13.6	118	12	V
64.5520	15.1	40.0	24.9	136	47	V
94.2230	11.2	43.5	32.3	164	180	V
215.9570	25.2	43.5	18.3	134	333	H
229.3920	36.7	46.0	9.3	100	337	H
952.8620	14.8	46.0	31.2	213	20	V

Spurious Emissions above 1GHz - 18GHz

Freq (GHz)	Peak Value (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)
4.7161	45.1	74.0	28.9	39.6	54.0	14.4	100	139	V
5.1556	51.2	74.0	22.8	48.6	54.0	5.4	109	145	V
7.0927	52.1	74.0	21.9	42.7	54.0	11.3	100	137	V
7.5887	57.7	74.0	16.3	30.6	54.0	23.4	100	78	H
9.0222	48.1	74.0	25.9	40.6	54.0	13.4	100	45	V
9.4417	53.2	74.0	20.8	42.5	54.0	11.5	100	130	V

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 1MHz
4. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25.0GHz is ± 4.0 dB.

RF OUTPUT POWER TEST

47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Limits

1. 25.204 Power Limits

(a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1GHz and 5GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

+40dBW in any 4kHz band for $\theta: 0^\circ$

+40dBW + 3.0dBW in any 4kHz band for $0^\circ < \theta \leq 5^\circ$

where θ is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

(c) For angles of evaluation of the horizon greater than 5° there shall be no restriction as to the equivalent isotropically radiated power transmitted by an earth station towards the horizon.

(d) Notwithstanding the e.i.r.p and e.i.r.p density limits specified in the station authorization, each earth station transmission shall be conducted at the lowest power level that will provide the required signal quality as indicated in the application and further amended by coordination agreements.

2. 2.1046 Measurements Required: RF Power Output

(a) For transmission other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4404B	US39440632	3 Apr 2015	1 year
Microwave Communications Laboratories, Inc. (MCLI) 20dB RF Attenuator	FAS-8-20	Nil	Output Monitor	Output Monitor


RF OUTPUT POWER TEST

47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a RF attenuator and a low-loss coaxial cable.
4. The spectrum analyser was then calibrated to the power meter level as shown by the Universal Radio Communicator Tester with a calibrated RF signal source.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, transmitting frequency at lower channel.
2. The maximum peak power of the transmitting frequency was measured and recorded.
3. The RF carrier peak and average pots were plotted.
4. The steps 2 to 4 were repeated with the transmitting frequency was set to middle and upper channels respectively.

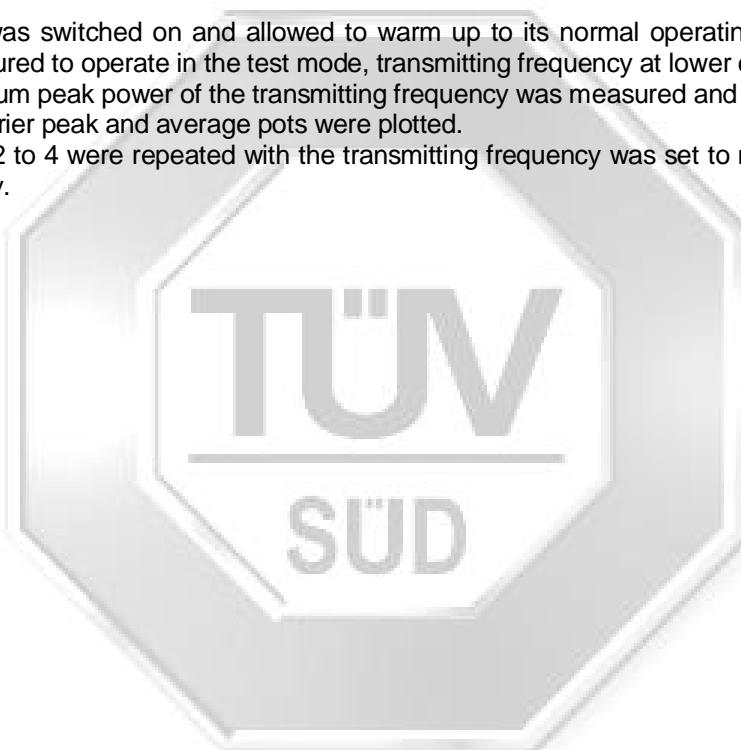

RF OUTPUT POWER TEST

47 CFR FCC Parts 2.1046 and 25.204 RF Output Power Results

Operating Mode	Continuous Satellite Transmission	Temperature	22°C
Test Input Power	120V 60Hz	Relative Humidity	53%
Antenna Gain	8.5dBi	Atmospheric Pressure	1030mbar
Attached Plots	1 – 34	Tested By	Kyaw Soe Hein

Frequency (GHz)	Channel	Peak Output Power (dBm)		Average Output Power (dBm)		Bearer Type
		EIRP	ERP	EIRP	ERP	
1.6266	Lower	39.2	37.1	38.6	36.5	0
1.6435	Middle	40.7	38.6	40.0	37.9	
1.6604	Upper	40.9	38.8	40.7	38.6	
1.6266	Lower	38.4	36.3	38.1	36.0	1
1.6435	Middle	39.2	37.1	38.8	36.7	
1.6604	Upper	40.1	38.0	40.1	38.0	
1.6266	Lower	36.8	34.7	36.7	34.6	2
1.6435	Middle	38.1	36.0	38.0	35.9	
1.6604	Upper	39.0	36.9	38.9	36.8	
1.6266	Lower	36.6	34.5	36.5	34.4	3
1.6435	Middle	38.1	36.0	37.8	35.7	
1.6604	Upper	38.6	36.5	38.6	36.5	
1.6266	Lower	37.0	34.9	36.9	34.8	7
1.6435	Middle	38.1	36.0	37.9	35.8	
1.6604	Upper	39.1	37.0	39.0	36.9	
1.6266	Lower	36.5	34.4	36.4	34.3	8
1.6435	Middle	37.8	35.7	37.7	35.6	
1.6604	Upper	39.8	37.7	39.4	37.3	


Notes

1. RF Output Power Measurement Uncertainty


All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of 95%, with a coverage factor of 2 is $\pm 1.0\text{dB}$.

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 0)

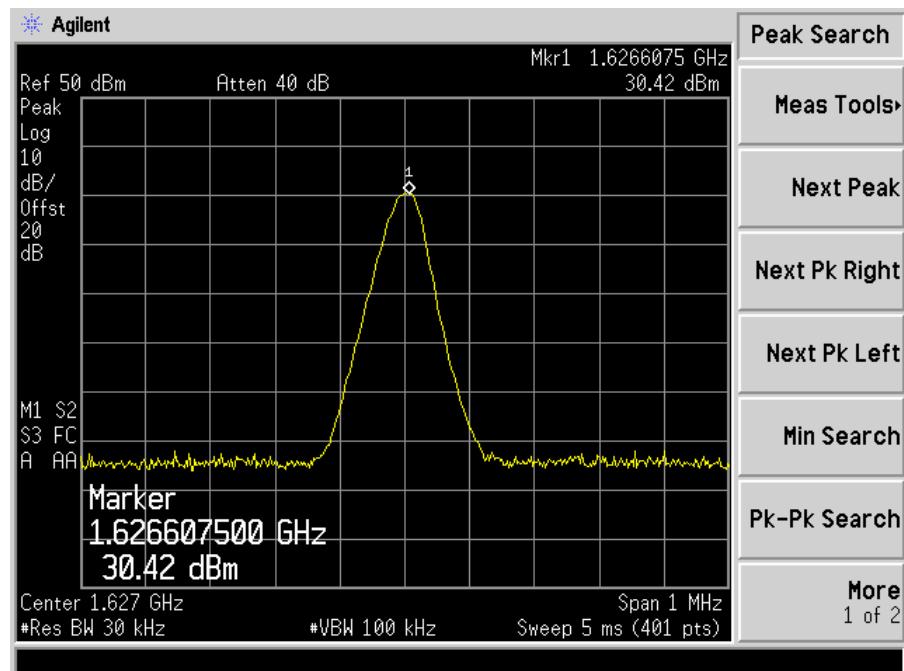


Plot 1 – Lower Channel (Peak)

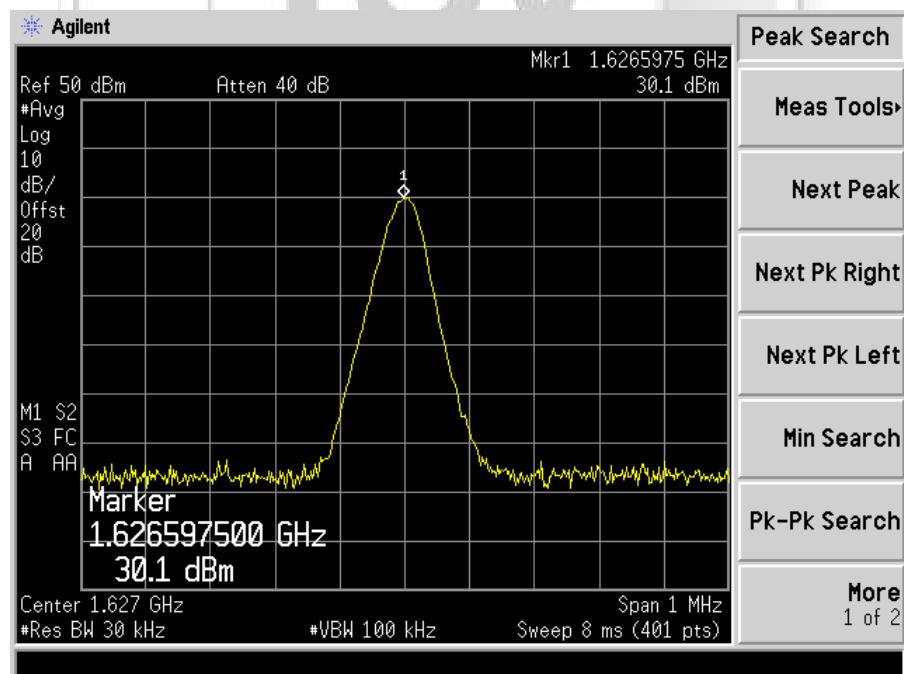


Plot 2 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 1)

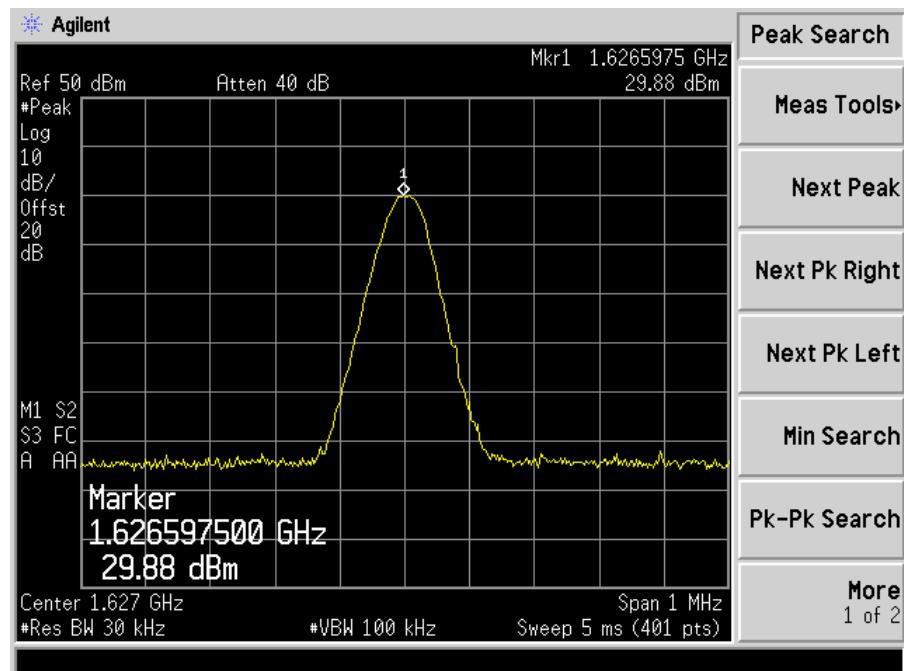


Plot 3 – Lower Channel (Peak)

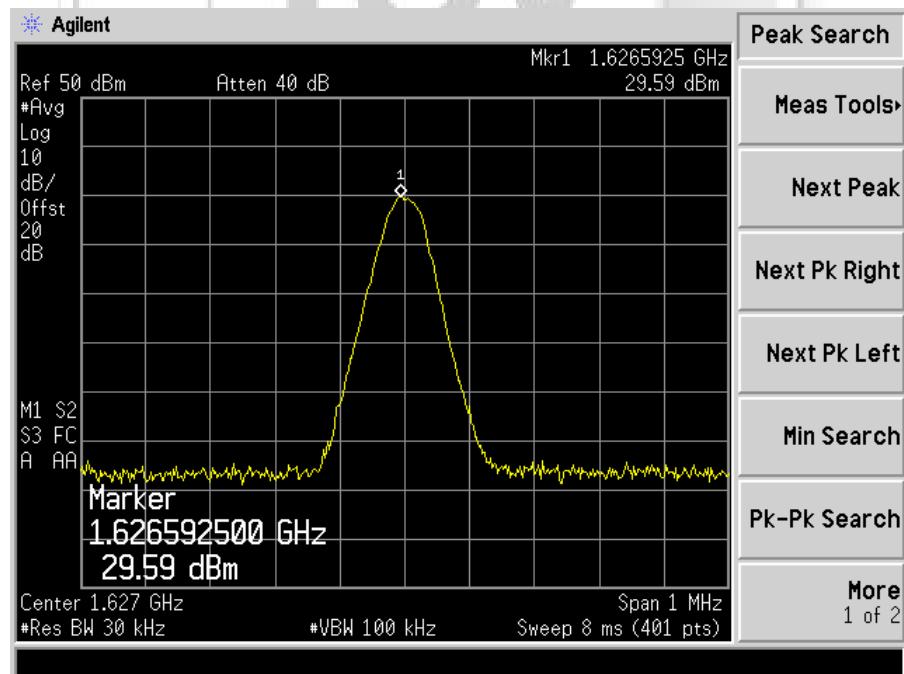


Plot 4 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 2)

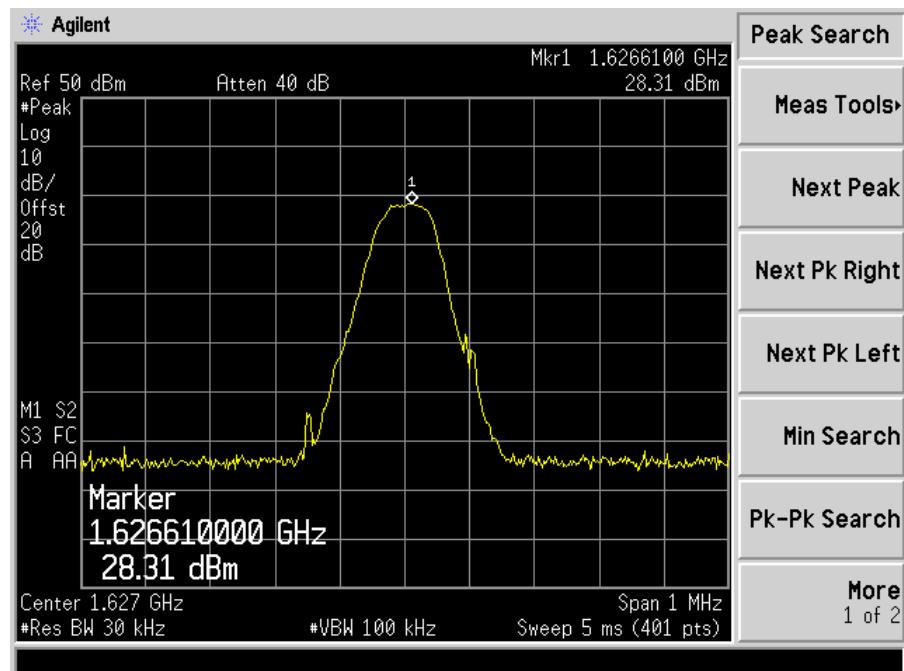


Plot 5 – Lower Channel (Peak)

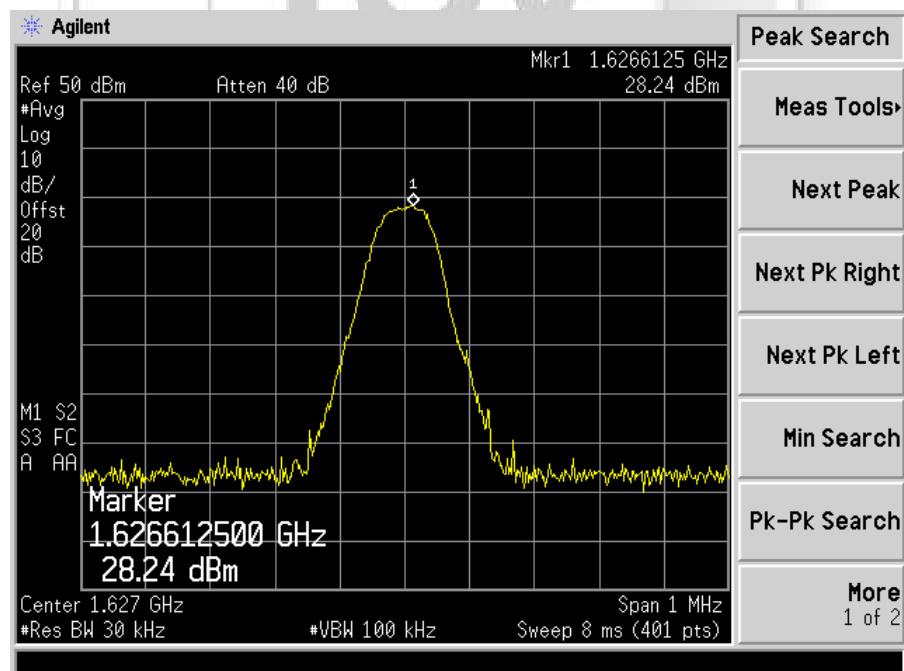


Plot 6 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 3)

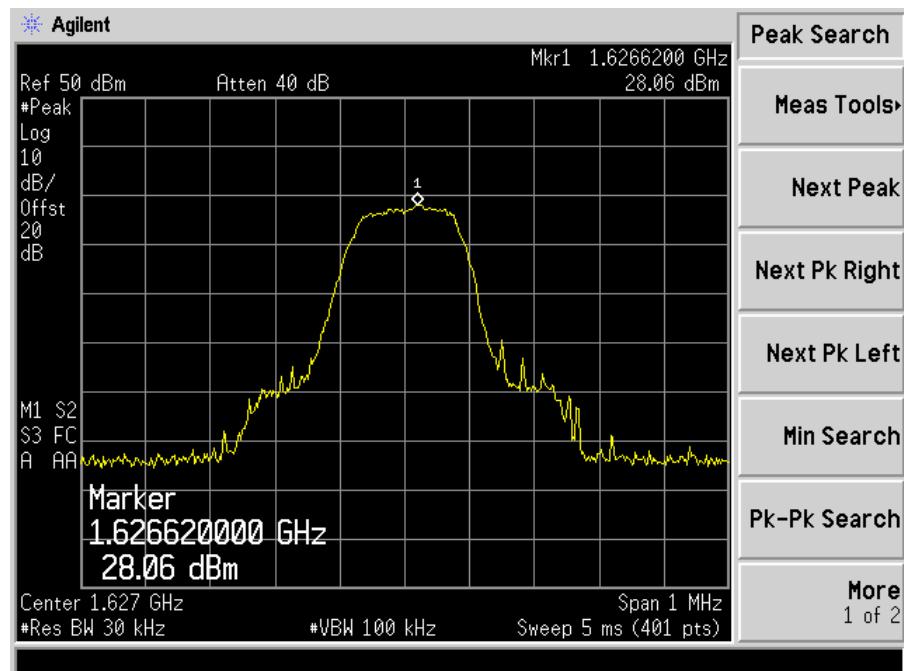


Plot 7 – Lower Channel (Peak)

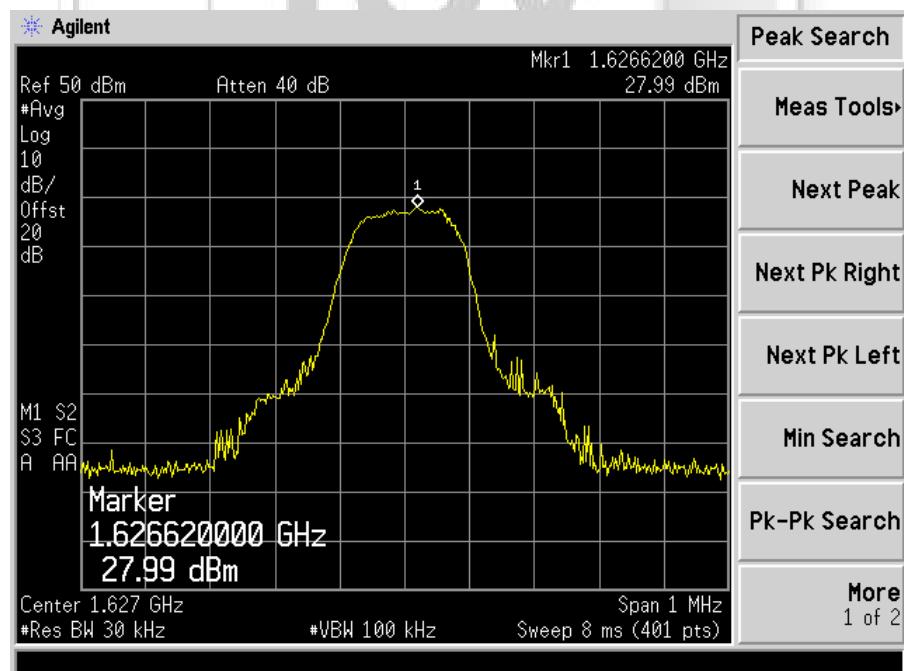


Plot 8 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 7)

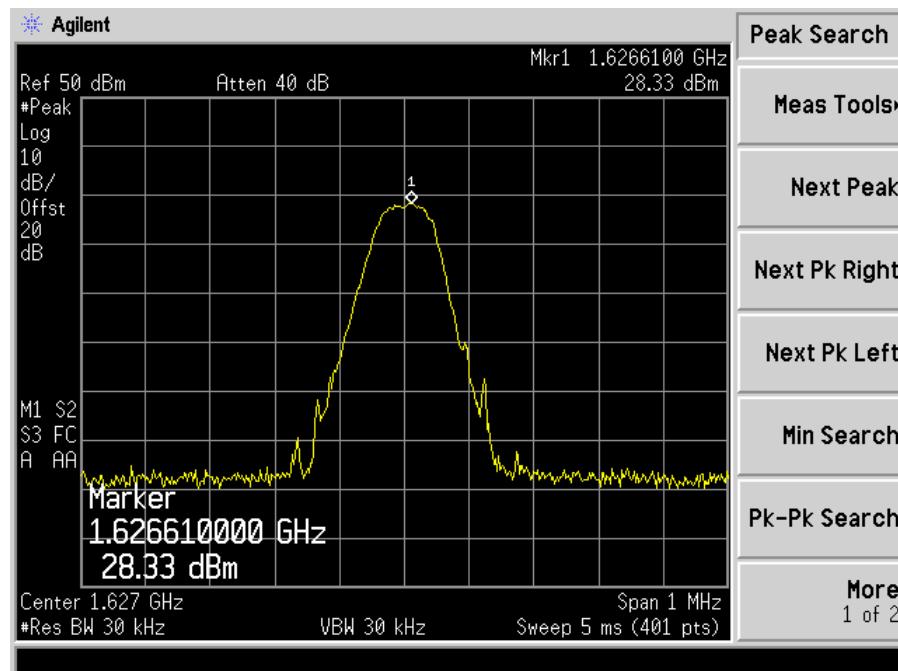


Plot 9 – Lower Channel (Peak)

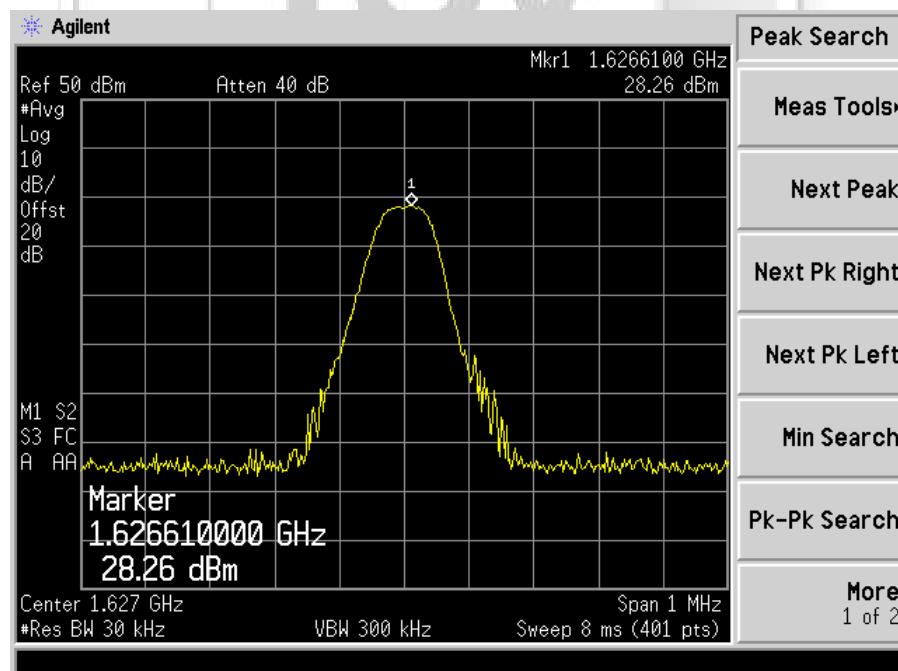


Plot 10 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 8)

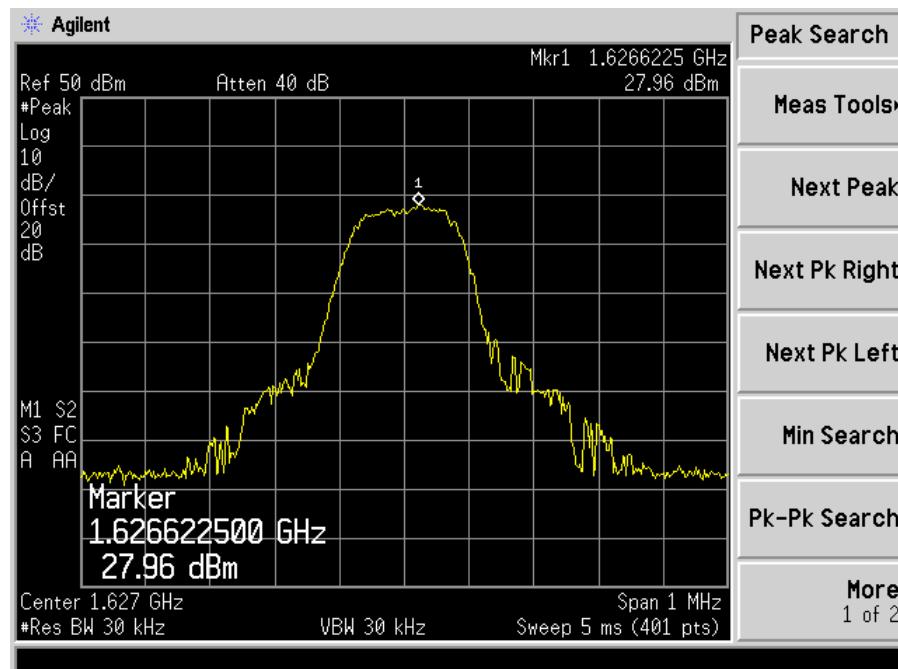


Plot 11 – Lower Channel (Peak)

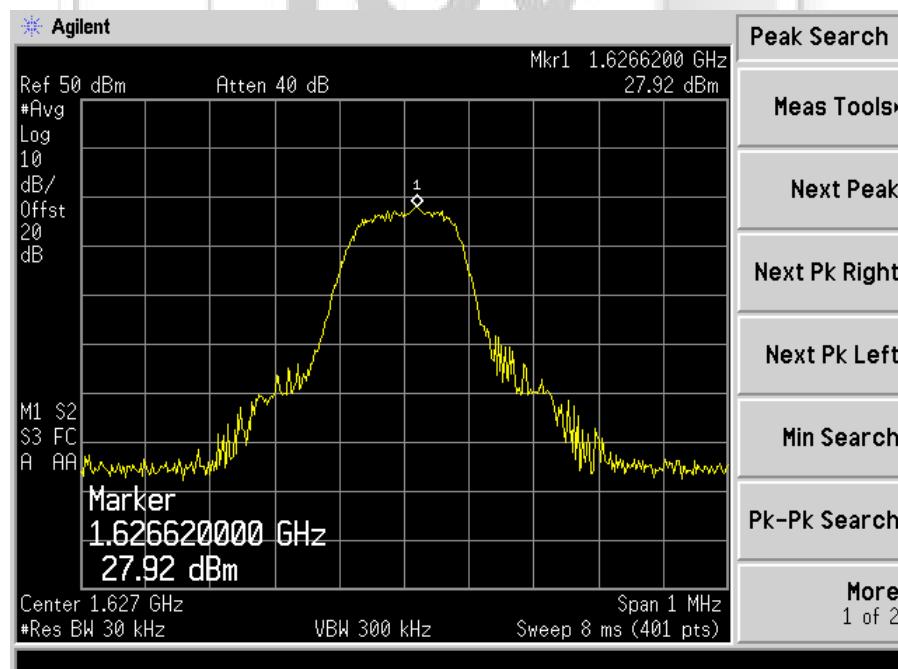


Plot 12 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 1)

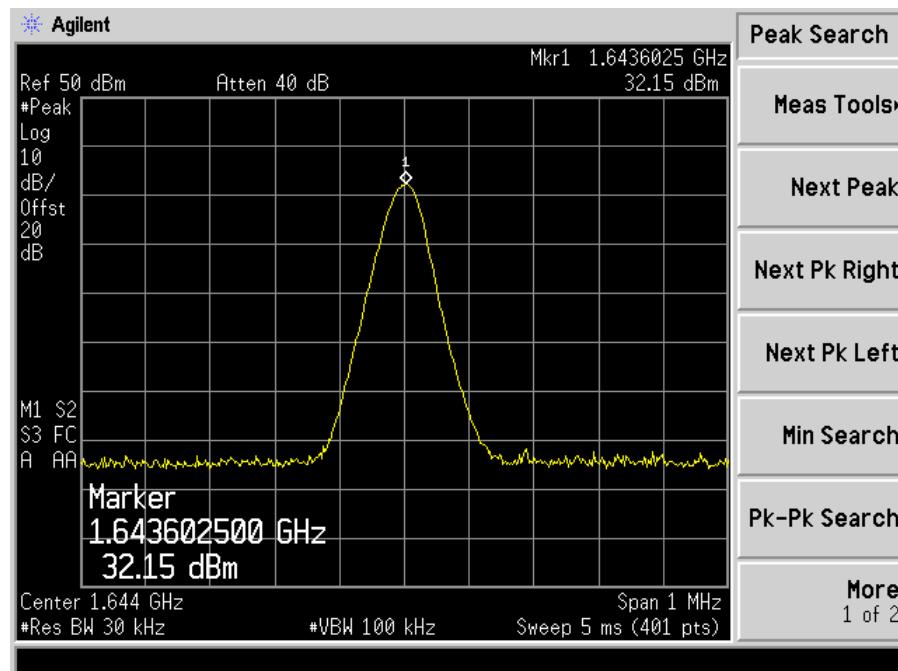


Plot 13 – Middle Channel (Peak)

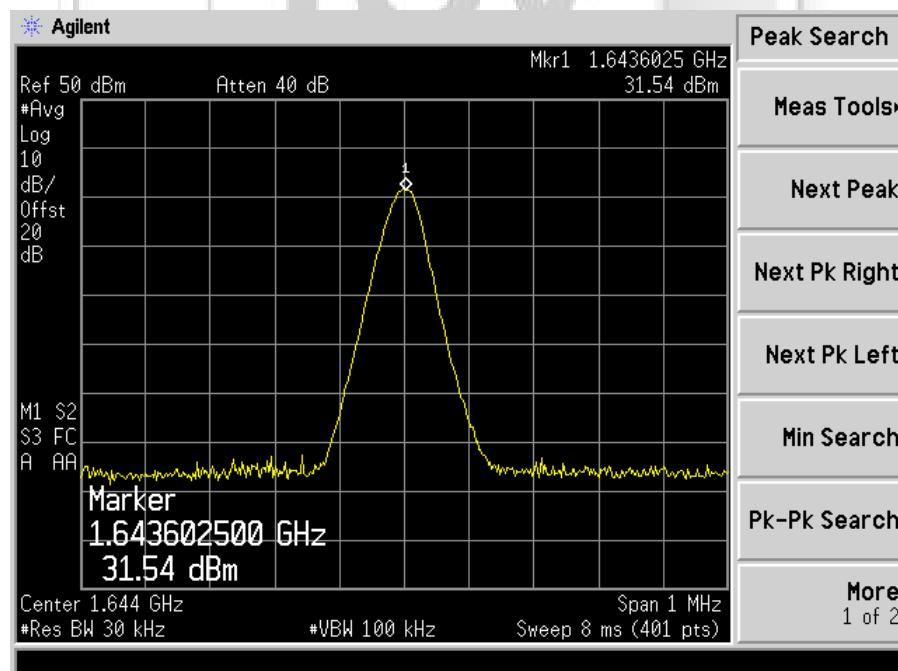


Plot 14 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 2)

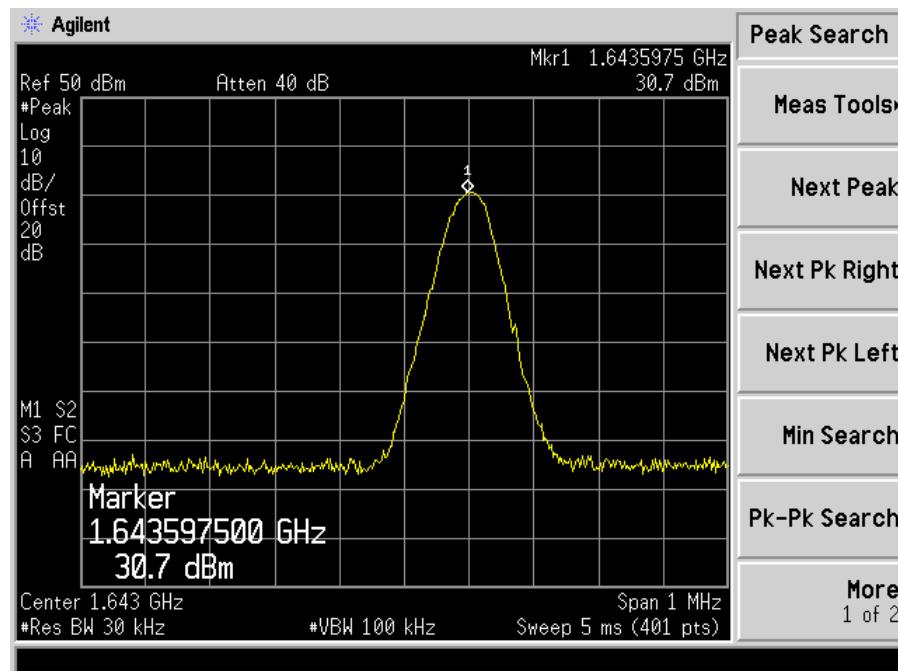


Plot 15 – Middle Channel (Peak)

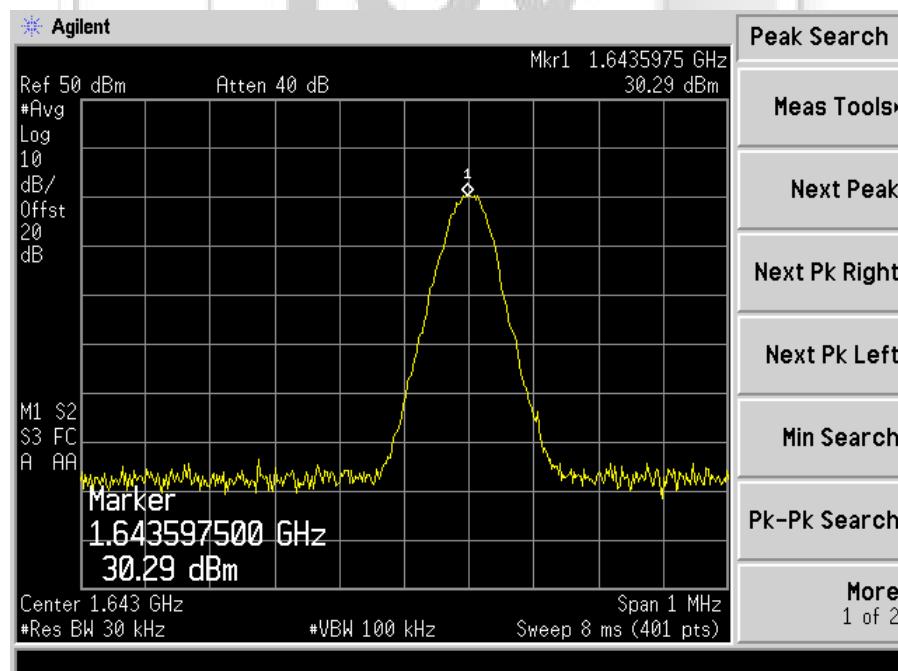


Plot 16 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 3)

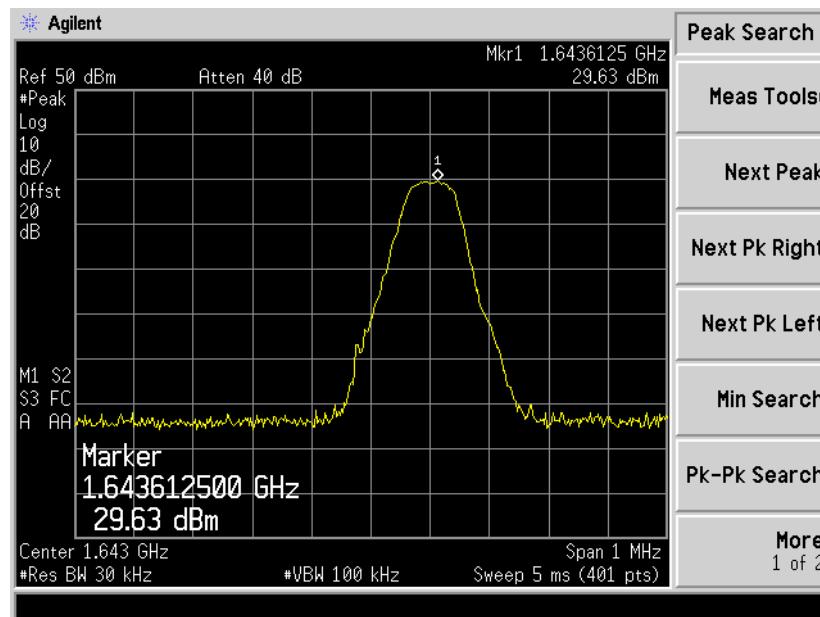


Plot 17 – Middle Channel (Peak)

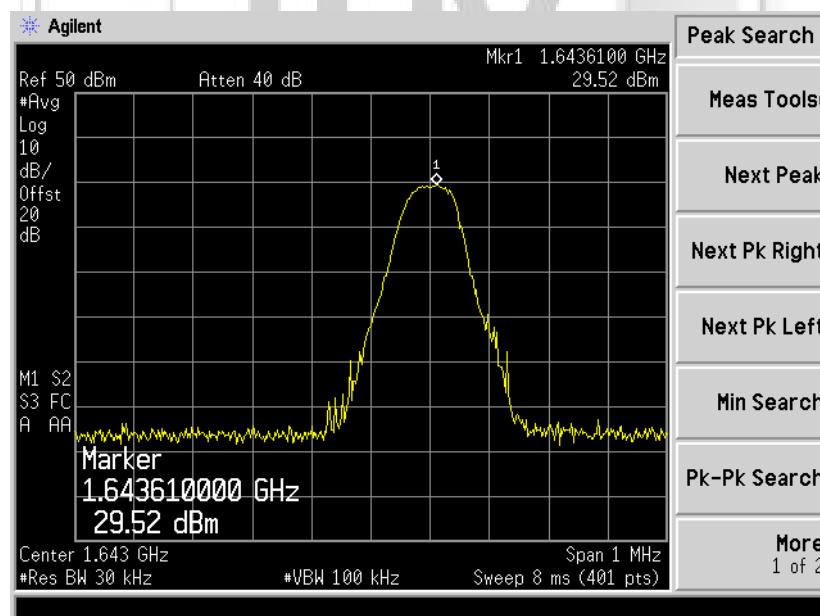


Plot 18 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 7)

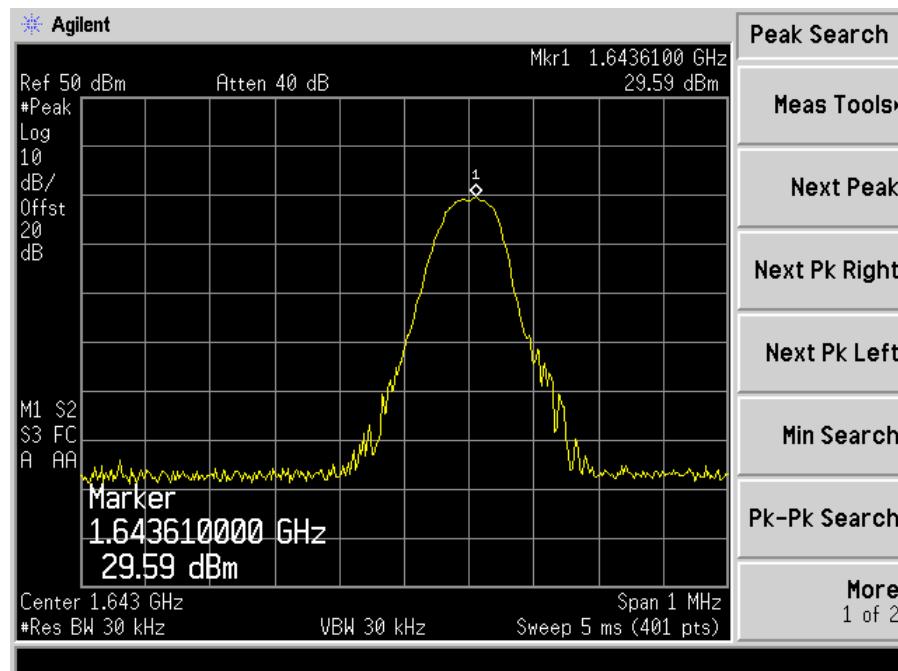


Plot 19 – Middle Channel (Peak)

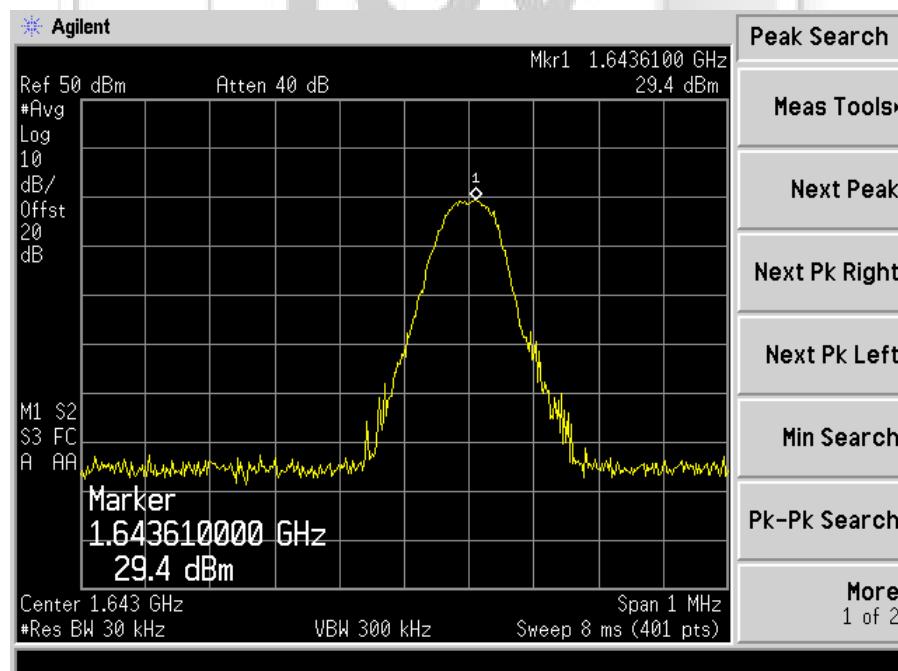


Plot 20 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 8)

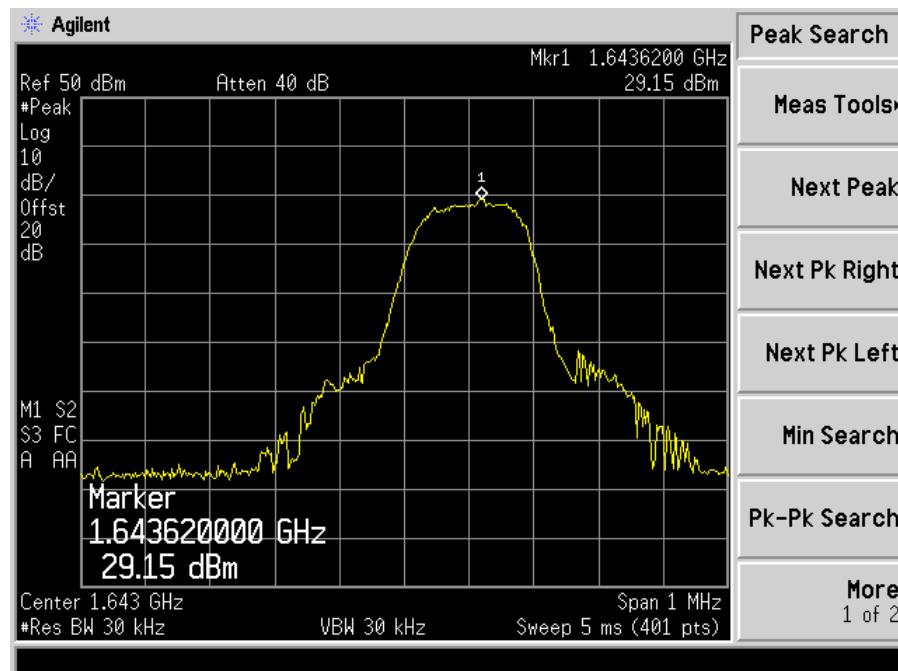


Plot 21 – Middle Channel (Peak)

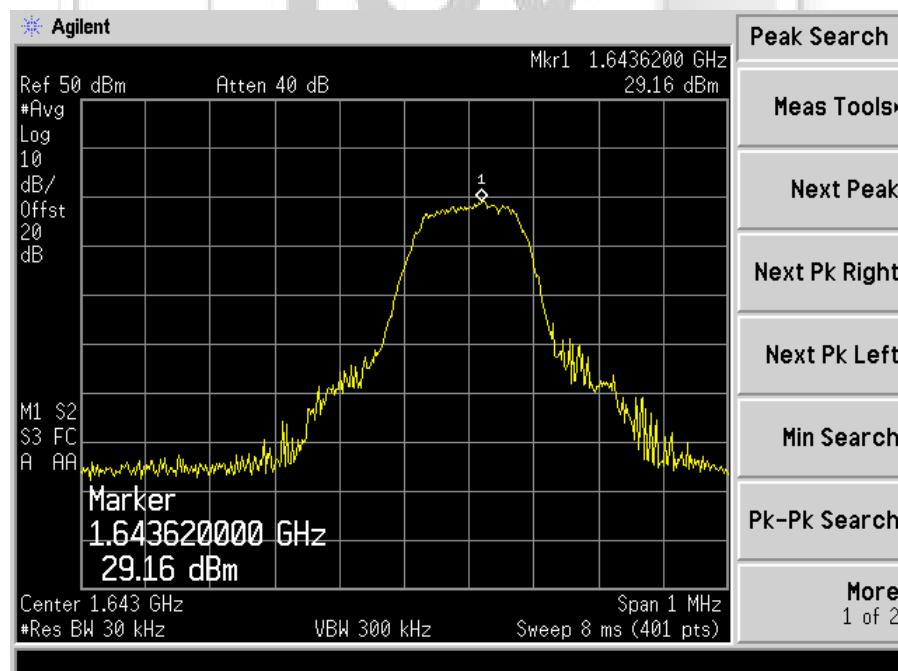


Plot 22 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 0)

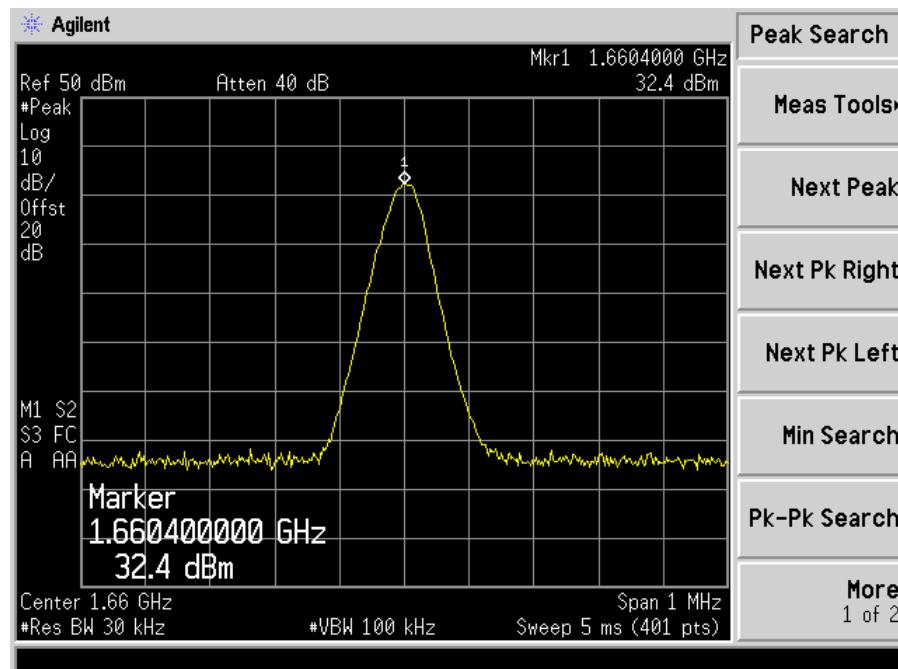


Plot 23 – Upper Channel (Peak)

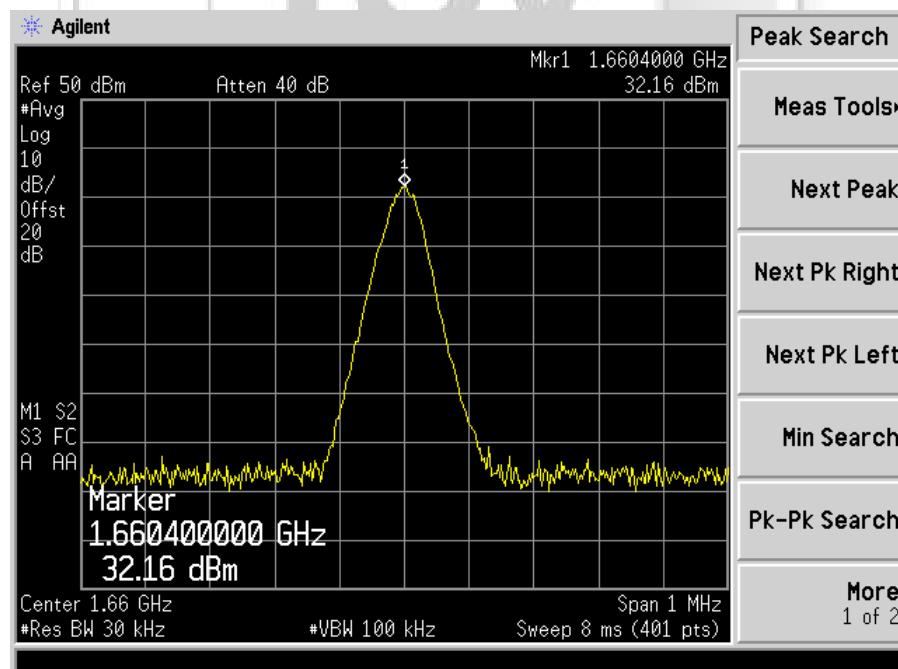


Plot 24 – Upper Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 1)

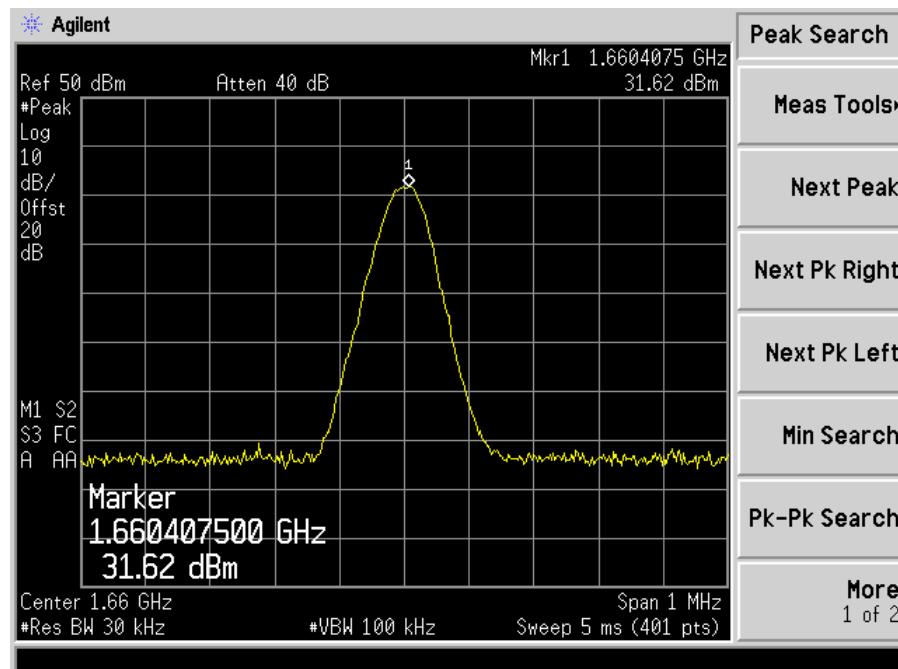


Plot 25 – Upper Channel (Peak)

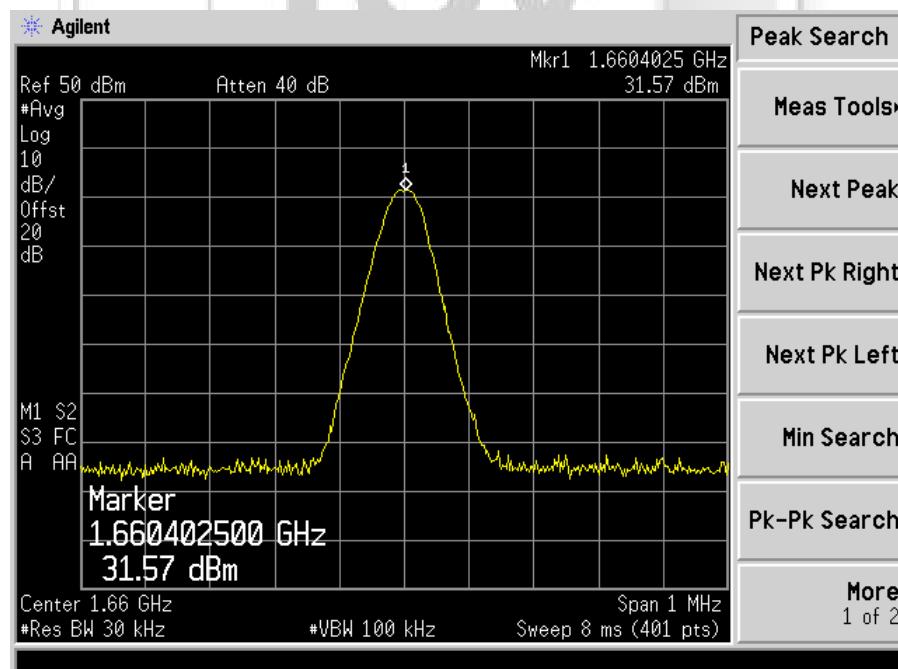


Plot 26 – Upper Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 2)

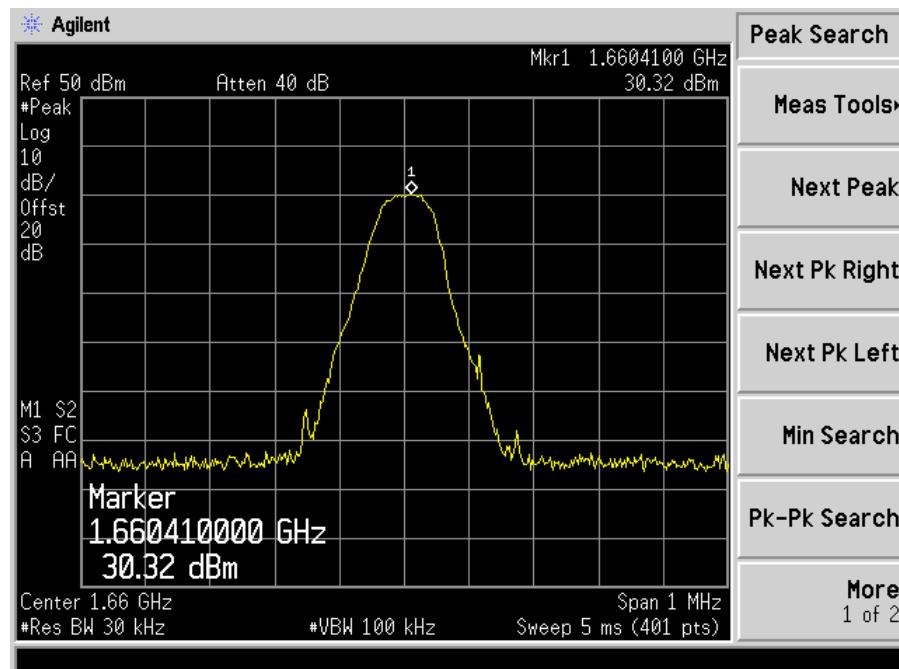


Plot 27 – Upper Channel (Peak)

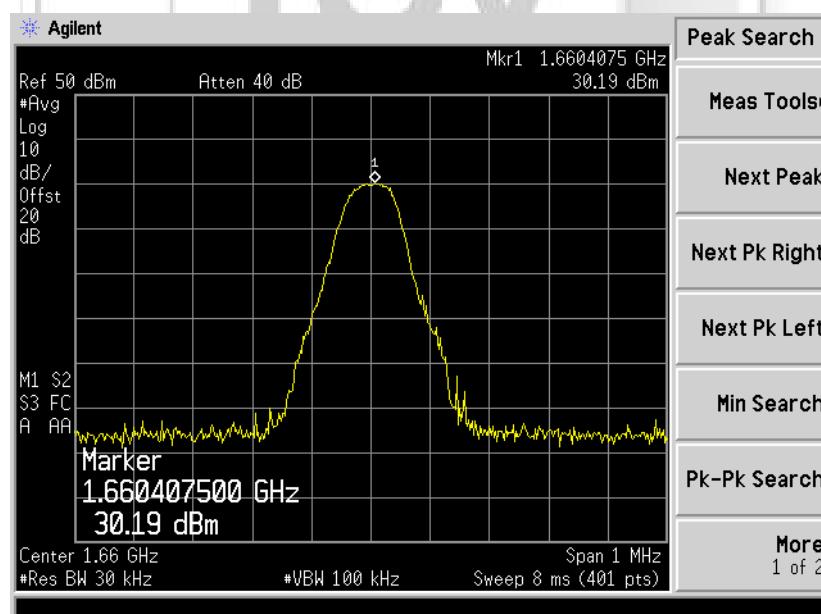


Plot 28 – Upper Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 3)

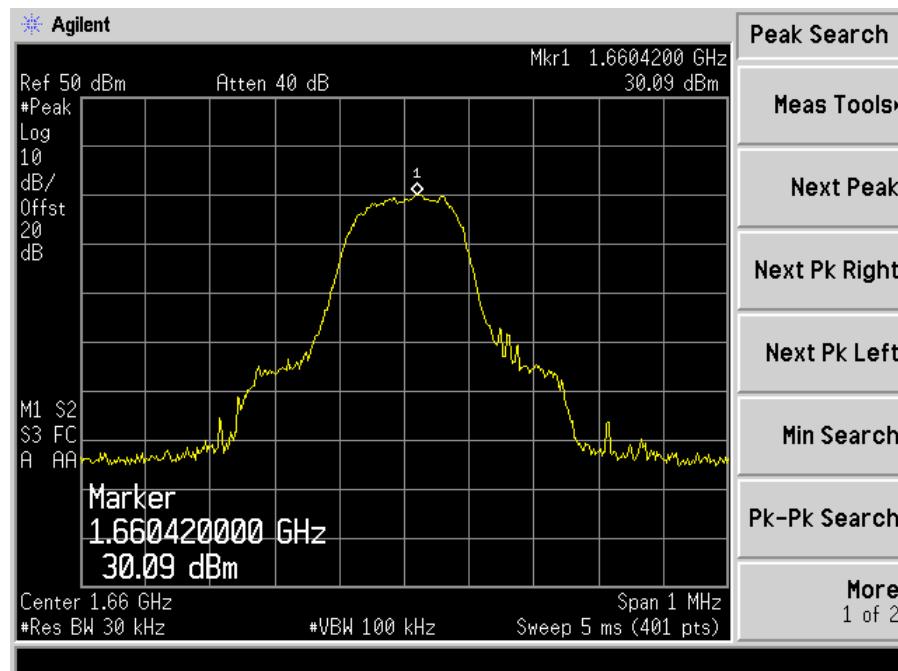


Plot 29 – Upper Channel (Peak)

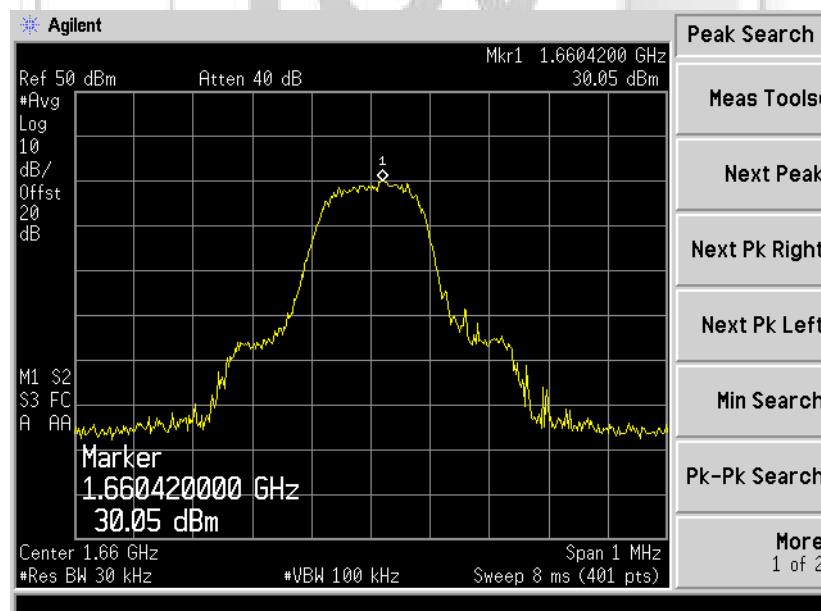


Plot 30 – Upper Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 7)

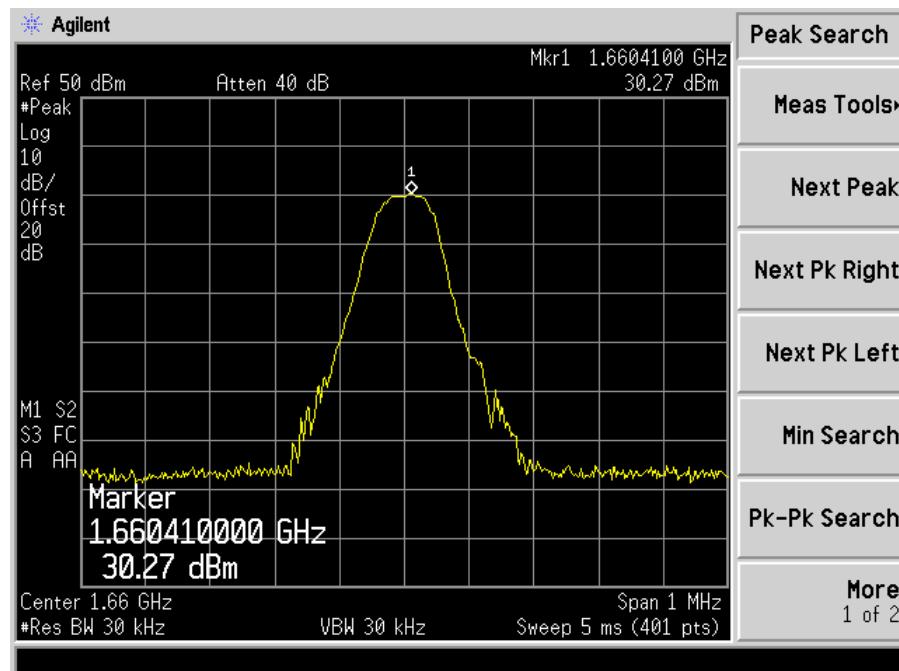


Plot 31 – Upper Channel (Peak)

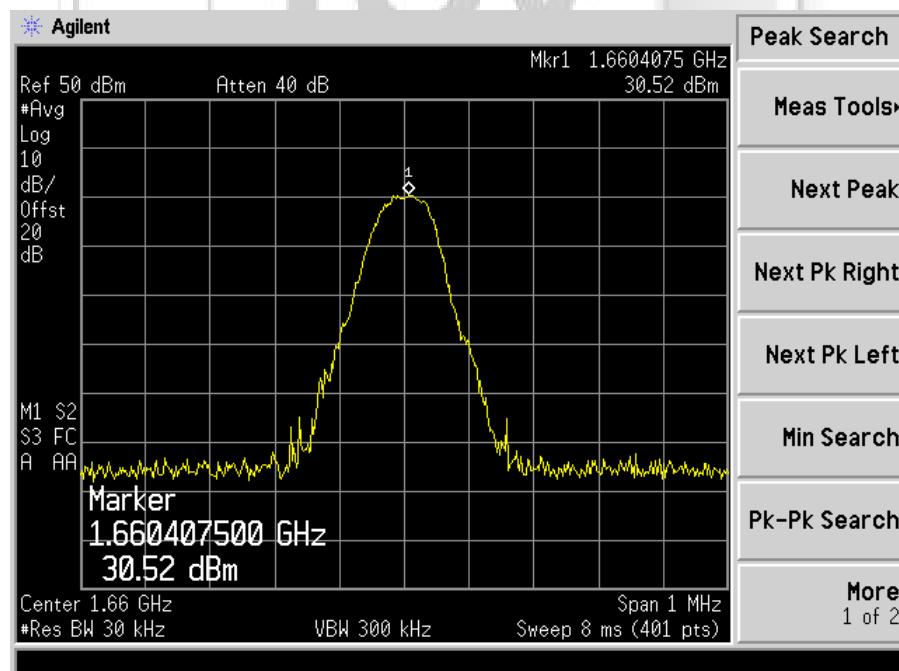


Plot 32 – Upper Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots (Bearer Type: 8)

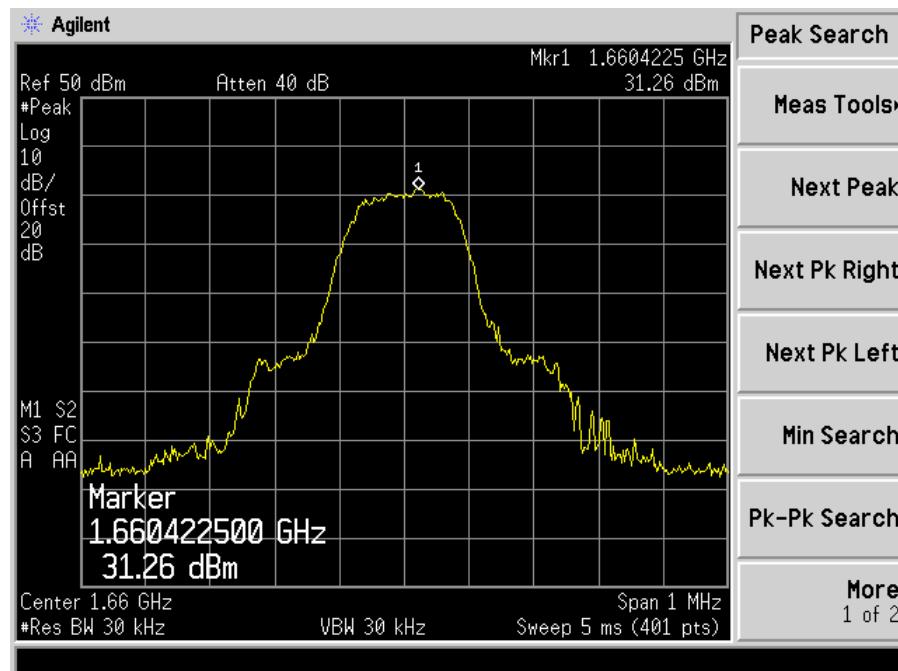

Plot 33 – Upper Channel (Peak)

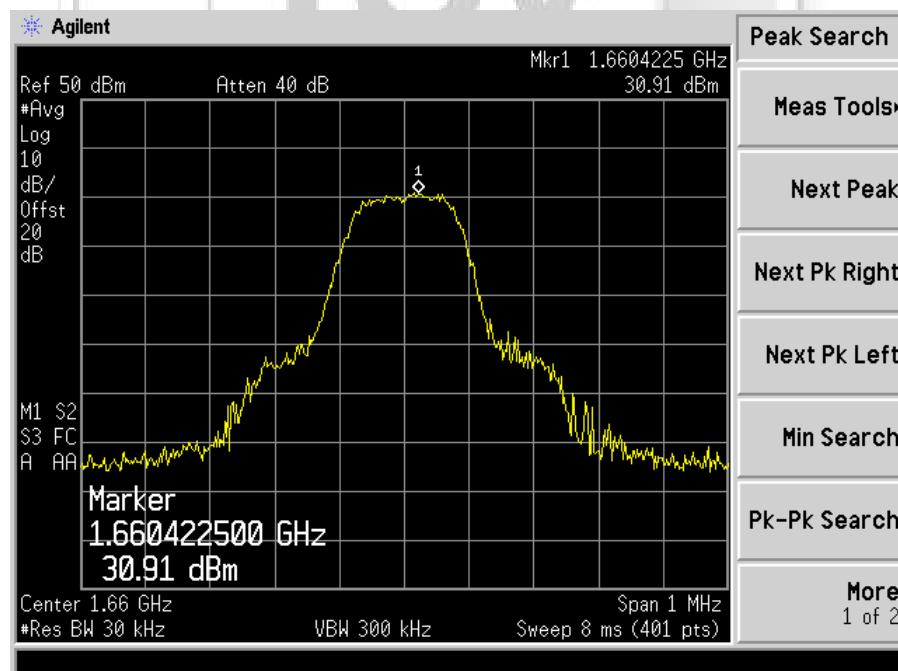

Plot 34 – Upper Channel (Average)

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Limits

1. 25.202 Emissions Limitations
 - (f) The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
 - (1) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
 - (2) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;
 - (3) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times logarithm (to the base 10) of the transmitter power in watts.
2. 2.1051 Measurements Required: Spurious Emissions at Antenna Terminals
The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20dB below the permissible value needed not be specified.

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4404A	MY45304764	3 Apr 2015	1 year
Microwave Communications Laboratories, Inc. (MCLI) 20dB RF Attenuator	FAS-8-20	Nil	Output Monitor	Output Monitor


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

47 CFR FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, transmitting frequency at lower channel.
2. The 26dB bandwidth of the transmitting channel was measured.
3. The emission mask was drawn based on the authorized bandwidth and the measured average output power.
4. The transmitting channel emissions were plotted.
5. The steps 2 to 5 were repeated with the transmitting frequency was set to middle and upper channels respectively.

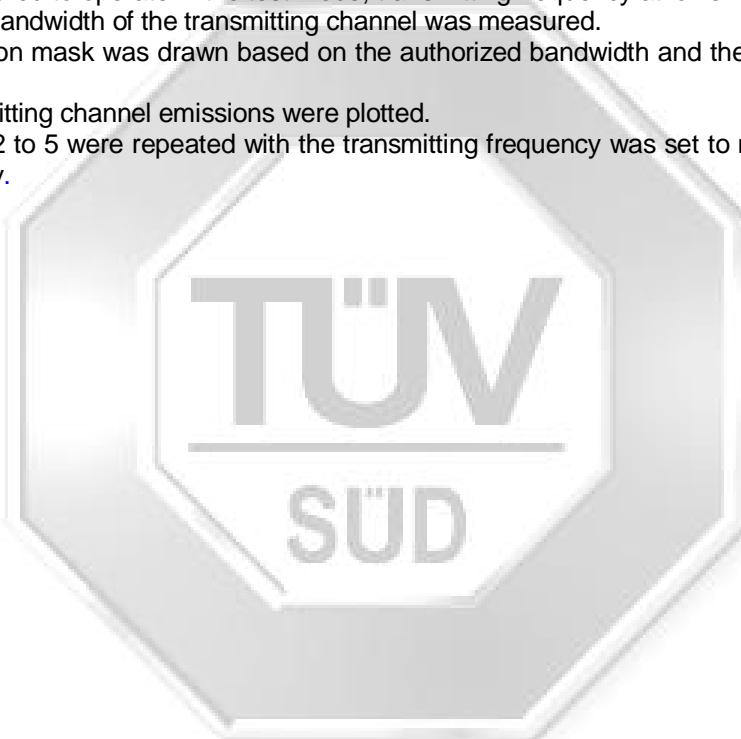

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

47 CFR FCC Parts 25.254(d)(6) and 2.1049 Occupied Bandwidth Results

Operating Mode	Continuous Satellite Transmission	Temperature	21°C
Test Input Power	120V 60Hz	Relative Humidity	52%
Antenna Gain	8.5dBi	Atmospheric Pressure	1030mbar
Attached Plots	35 – 52 (26dB Bandwidth) 53 – 70 (In Band Emissions) 71 – 106 (Out of Band Spurious)	Tested By	Kyaw Soe Hein

All emissions are within the emission mask. Please refer to the attached plots.

Notes


1. The Resolution Bandwidth (RBW) was corrected from 4kHz by $10\log_{10}[(\text{used RBW}) / 4\text{kHz}]$.
2. Emission limits are computed based on following:
 - a. Emissions Limits (dBm) (50% - 100% authorised bandwidth) = $P - 25 + CF$
 - b. Emissions Limits (dBm) (100% - 250% authorised bandwidth) = $P - 35 + CF$
 - c. Emissions Limits (dBm) (> 250% authorised bandwidth) = $P - [43 + 10 \log_{10} P_w] + 30 + CF$

where


P = Measured mean power in dBm
 P_w = Measured mean power in W
 CF = RBW correction factor (see Note 1)

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 0)

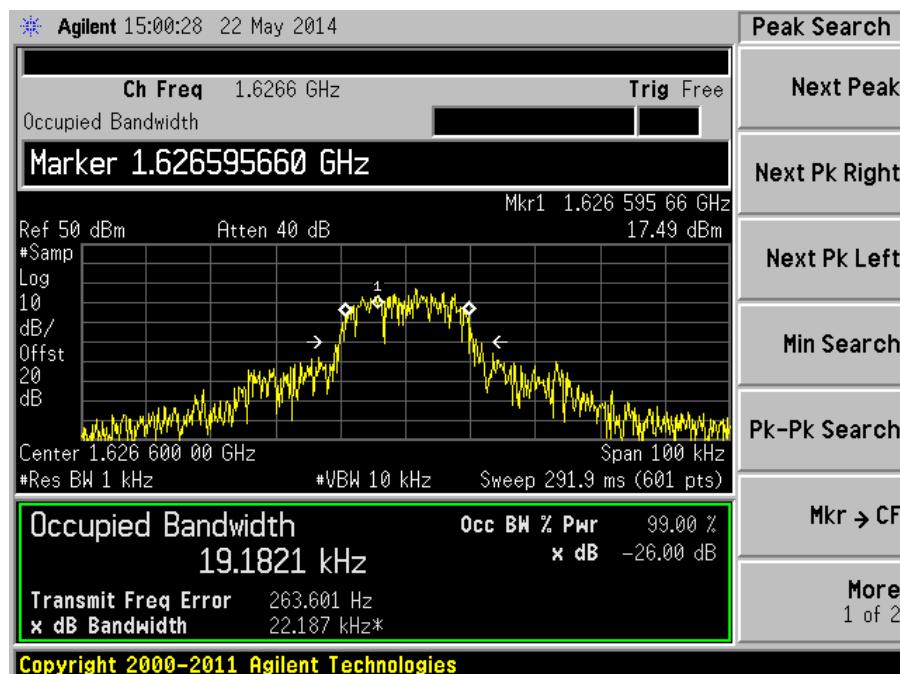


Plot 35 – Lower Channel

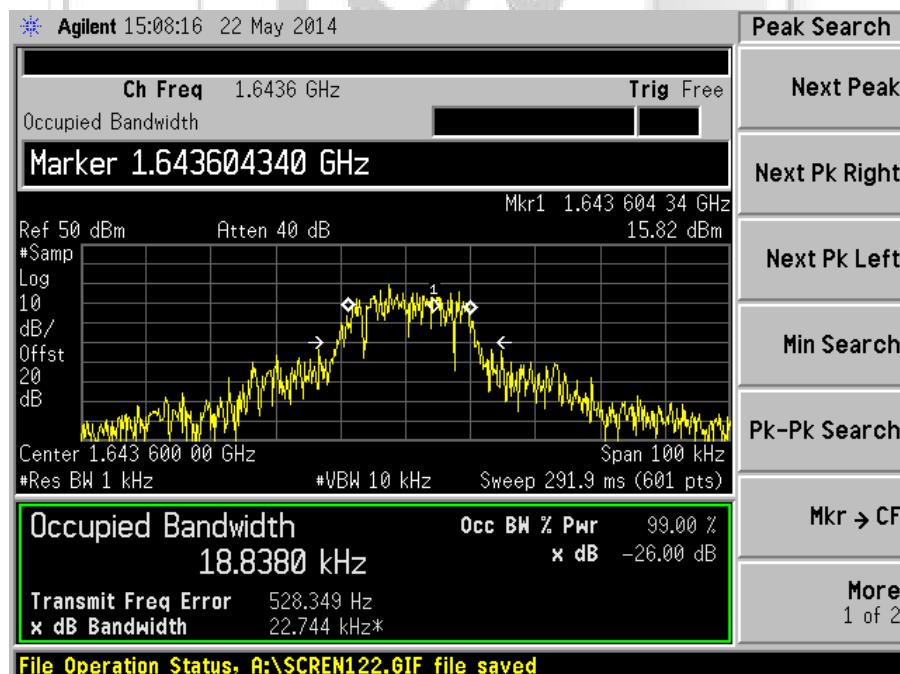

Plot 36 – Middle Channel

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST



26dB Bandwidth Plots (Bearer Type: 0)

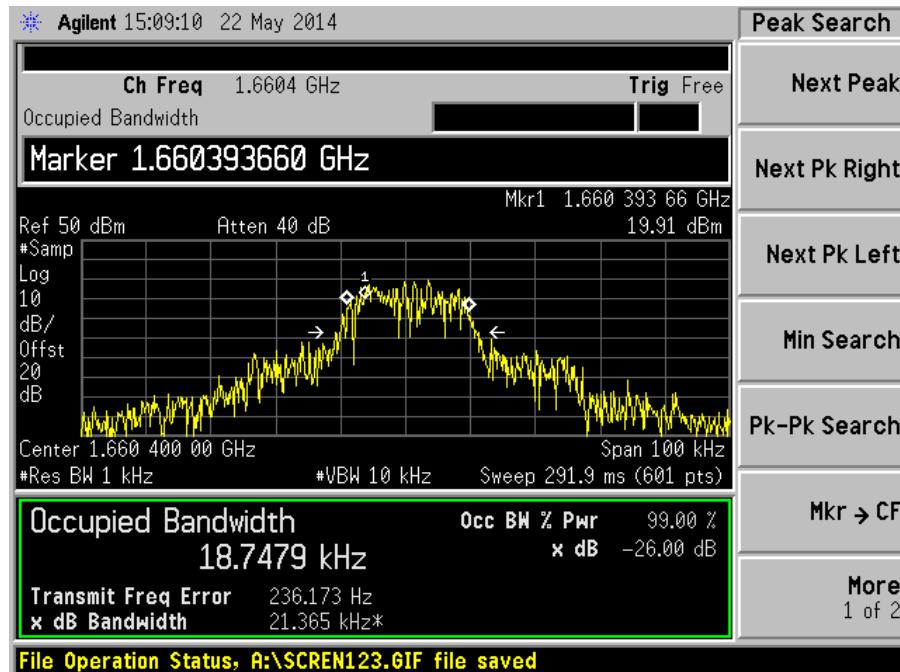

Plot 37 – Upper Channel


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 1)

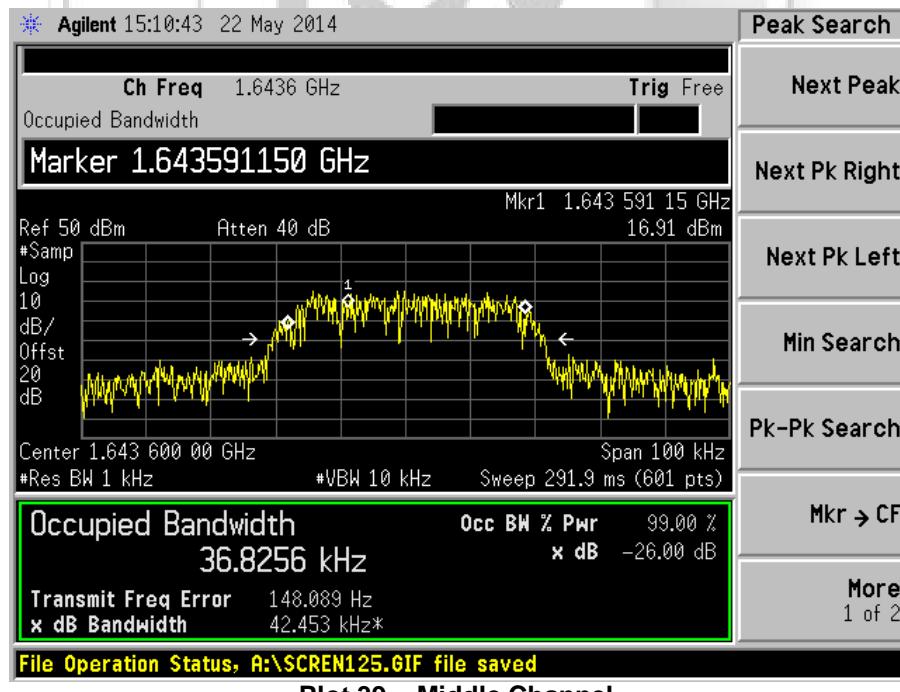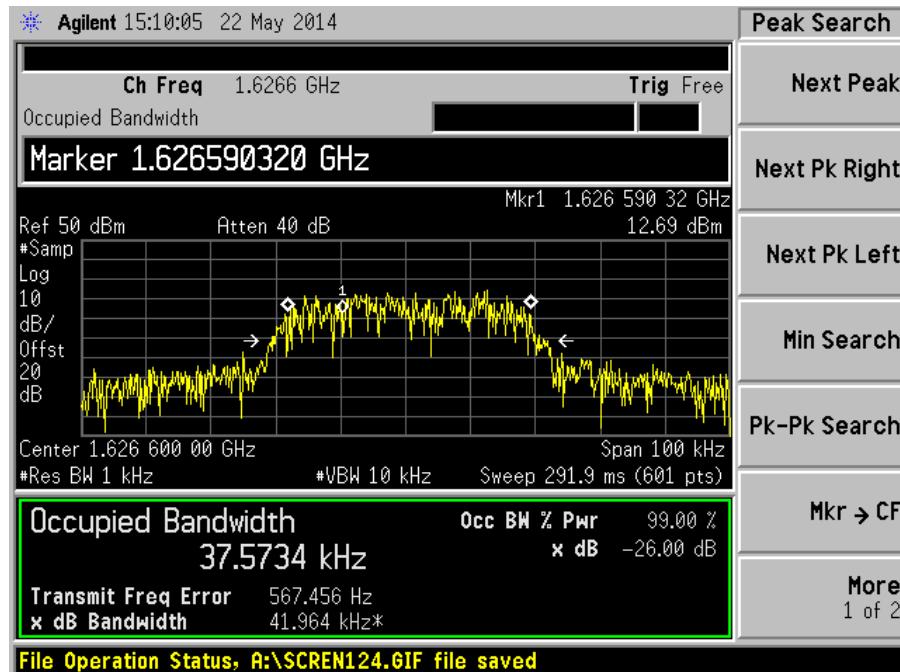

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST



26dB Bandwidth Plots (Bearer Type: 1)

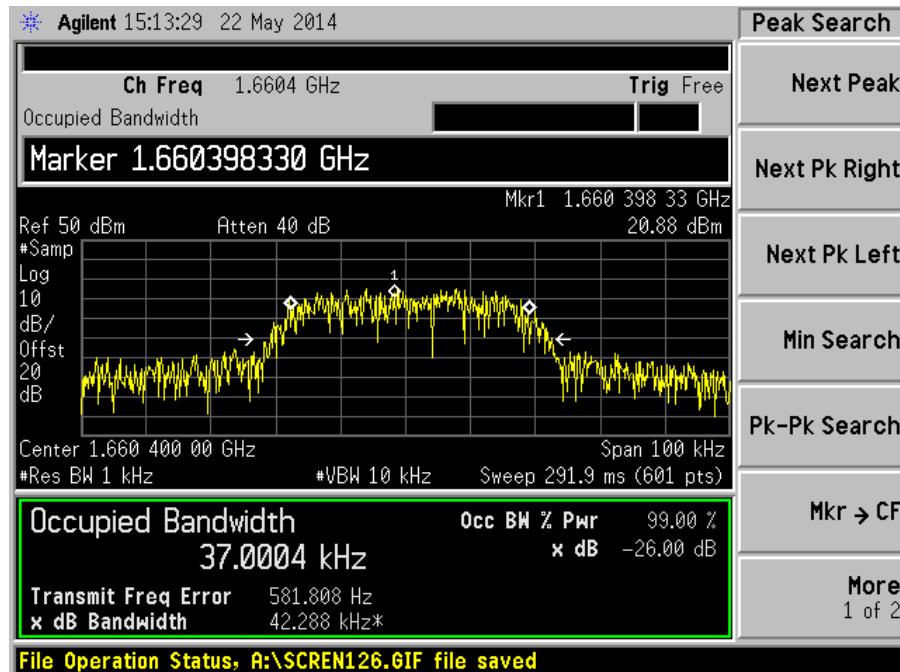

Plot 40 – Upper Channel


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 2)

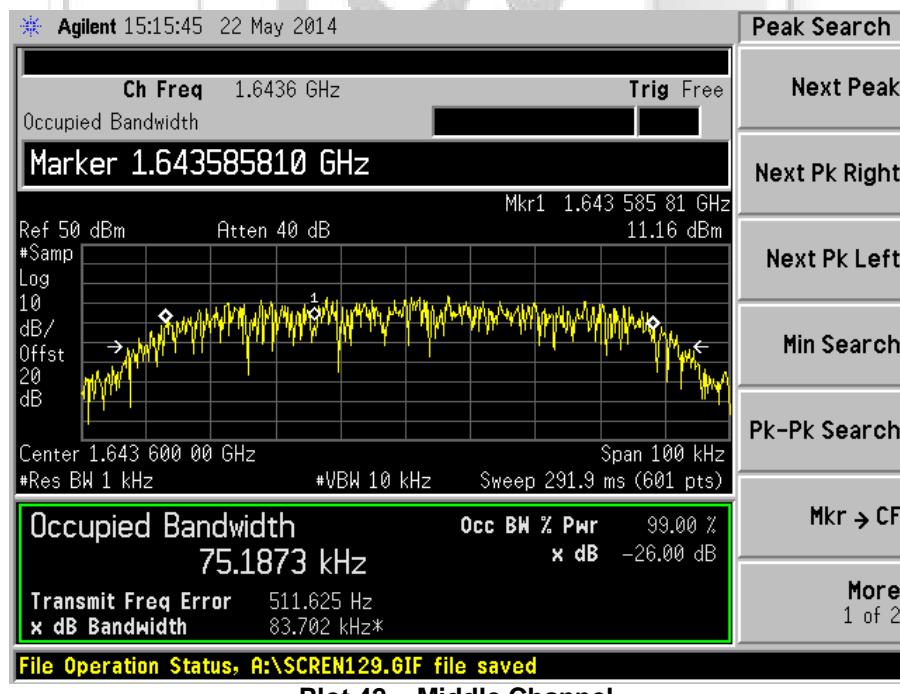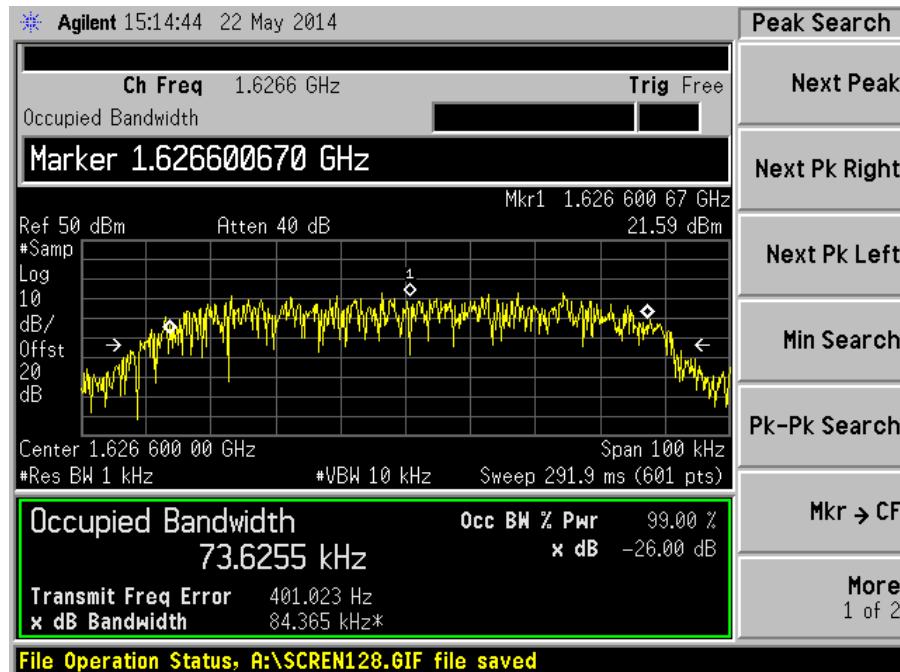

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST



26dB Bandwidth Plots (Bearer Type: 2)

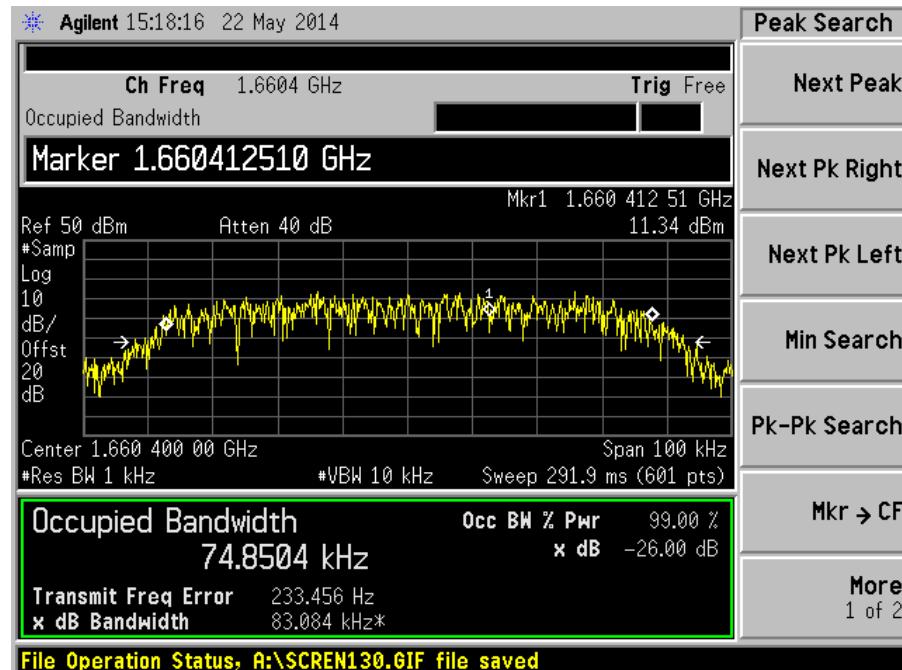

Plot 43 – Upper Channel


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 3)

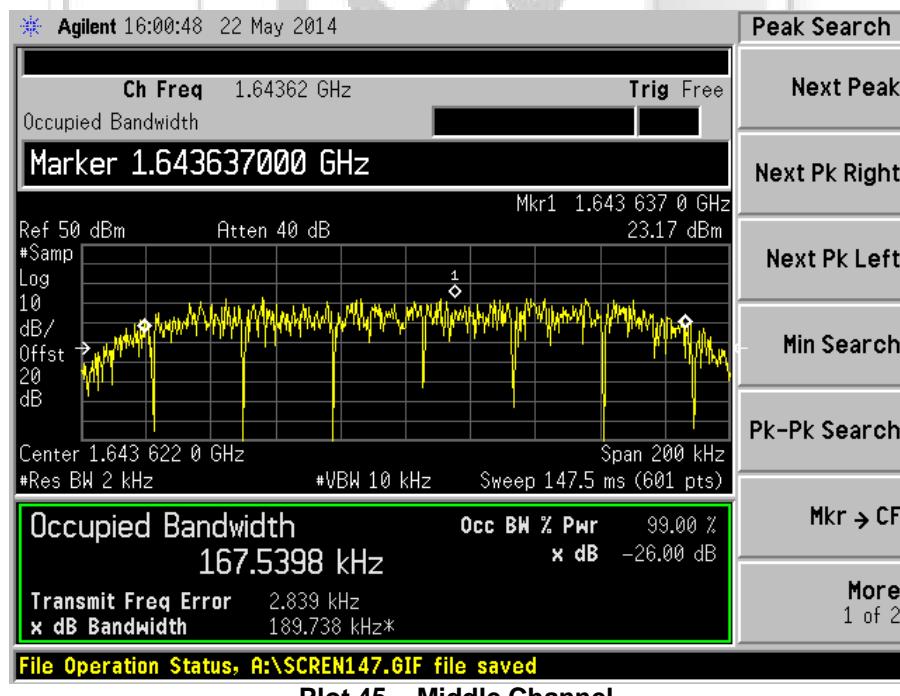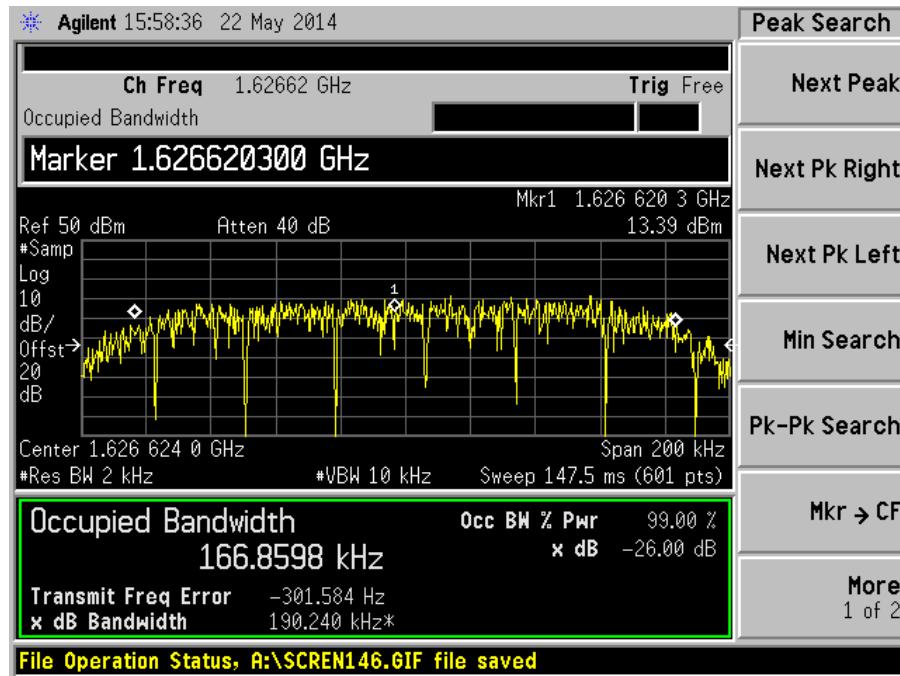

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 3)


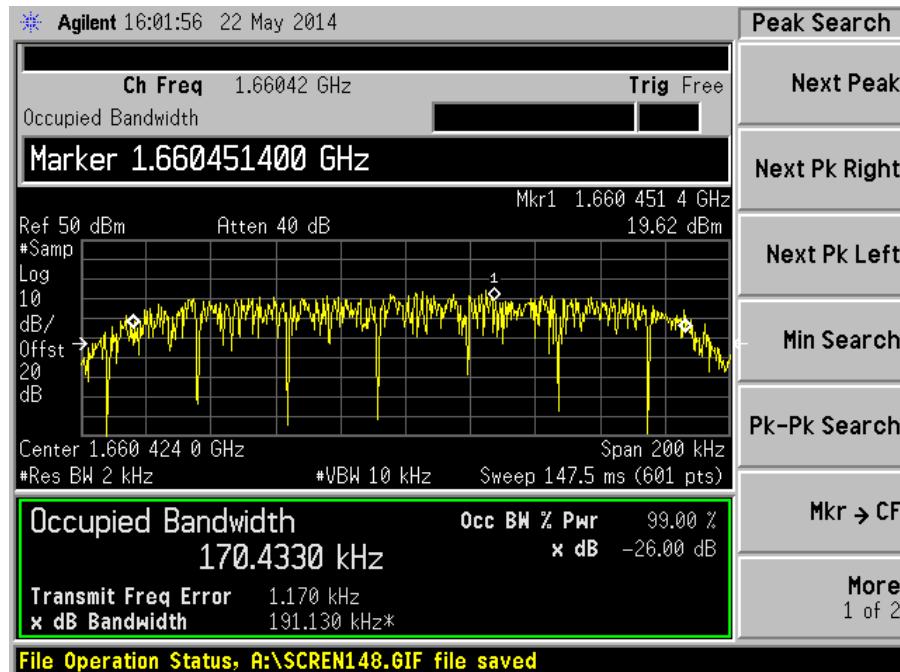


Plot 46 – Upper Channel

TÜV
SÜD


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 7)

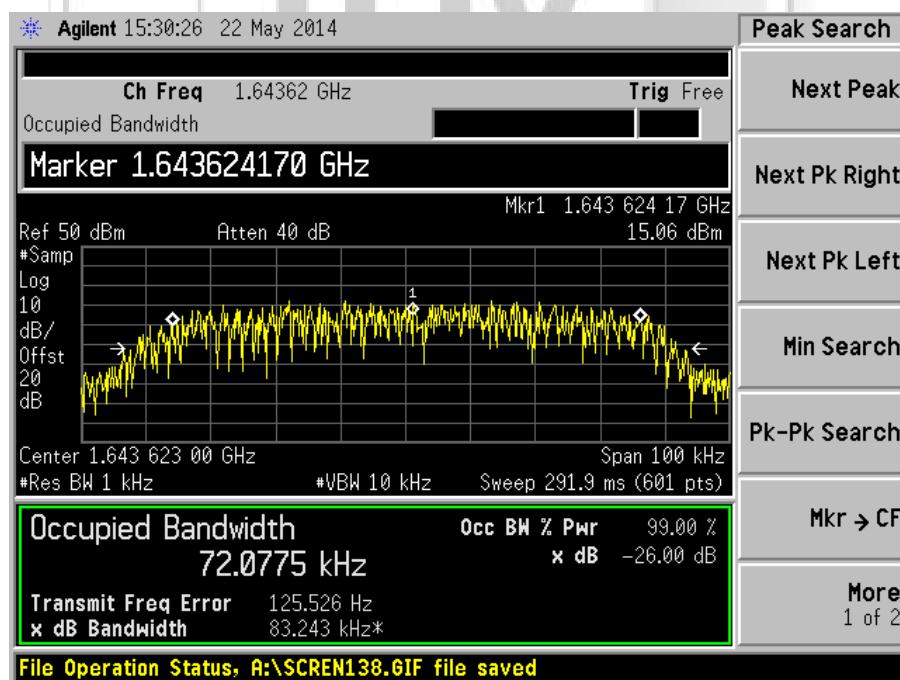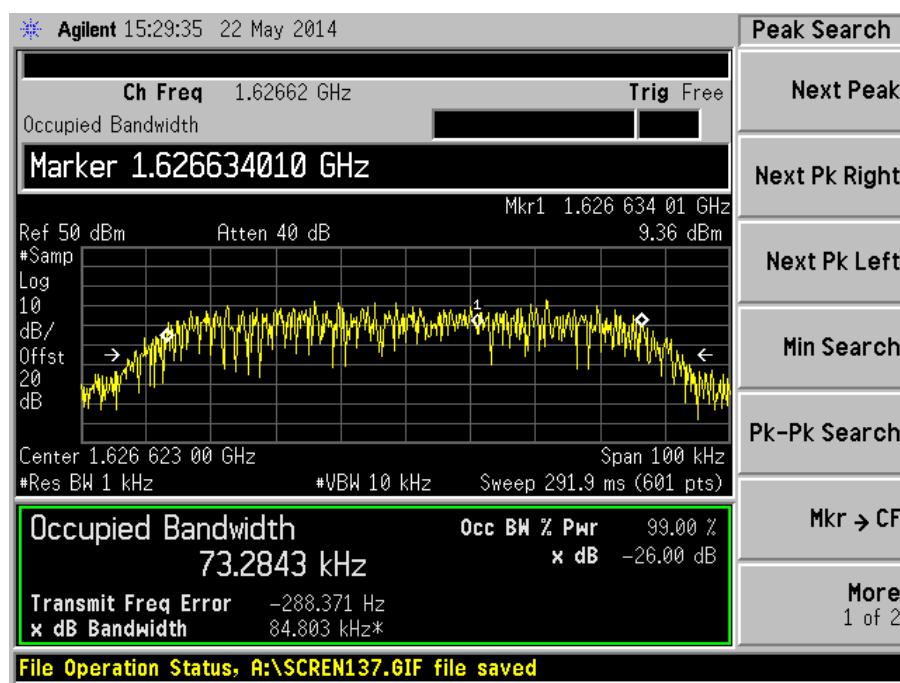



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 7)

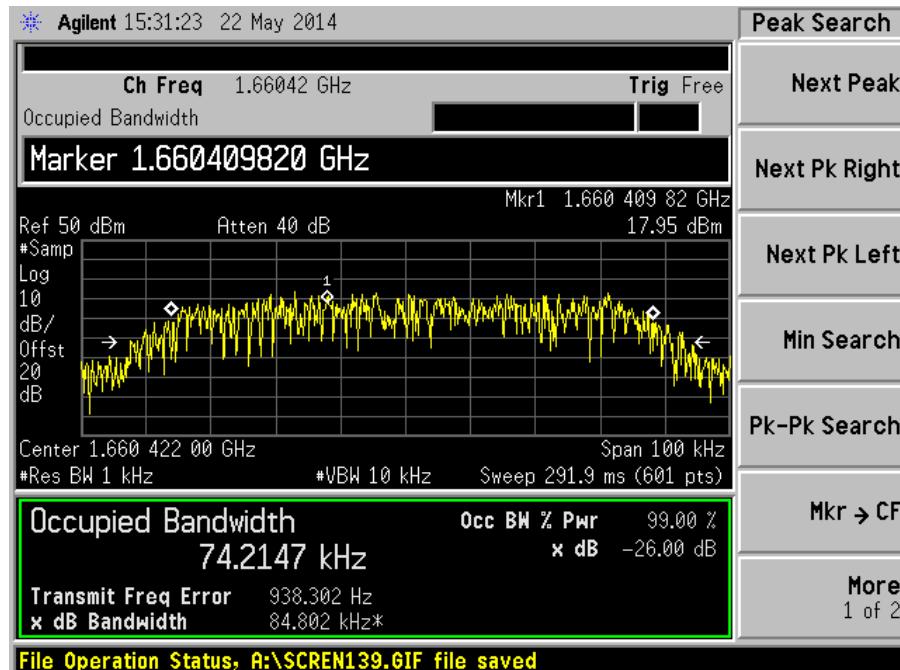


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 8)

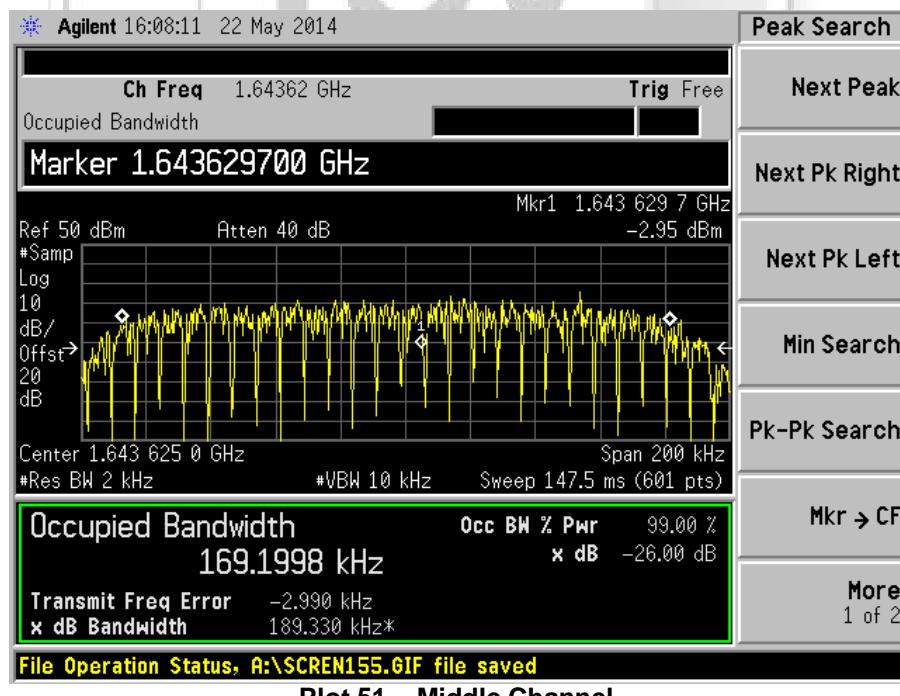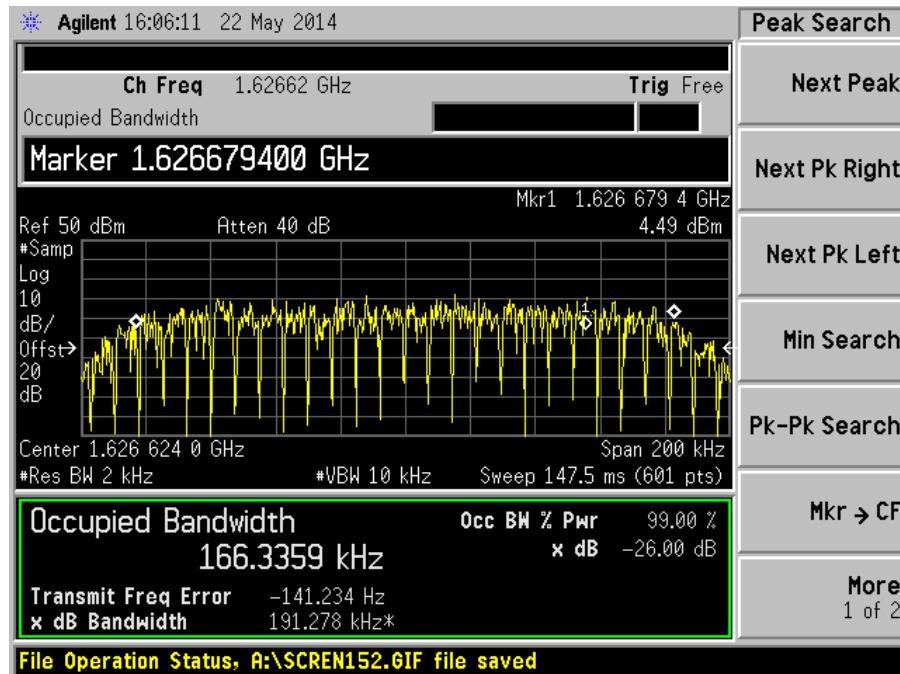

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

26dB Bandwidth Plots (Bearer Type: 8)

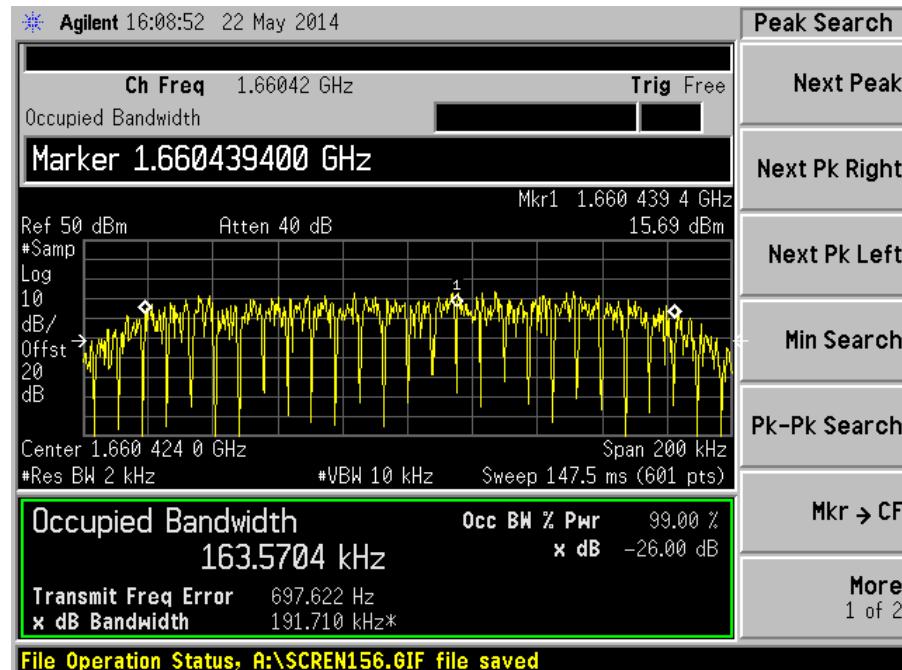

Plot 52 – Upper Channel

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 0)





UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 0)



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST


In Band Emissions Plots (Bearer Type: 1)

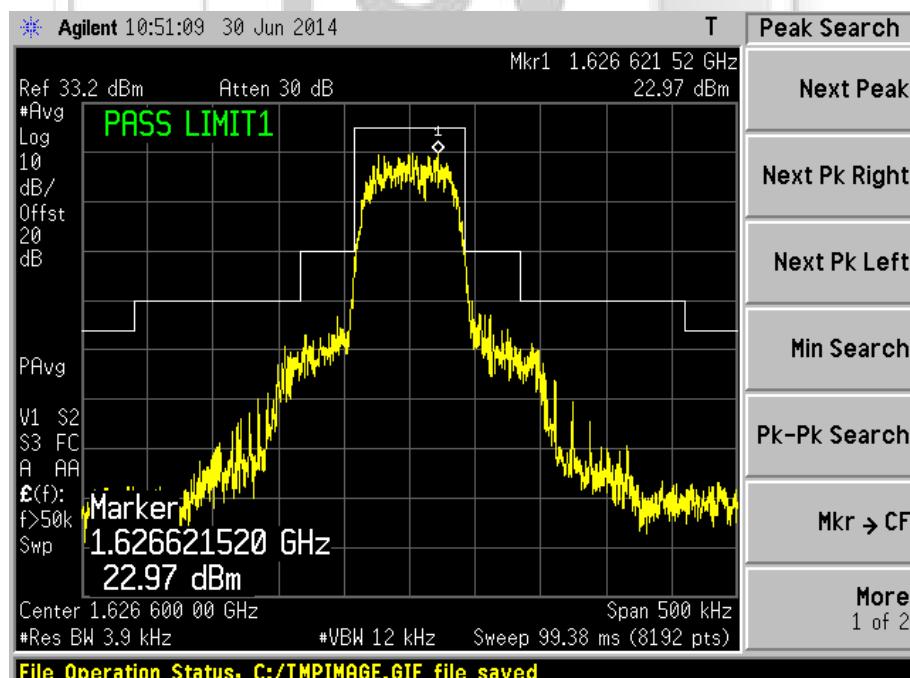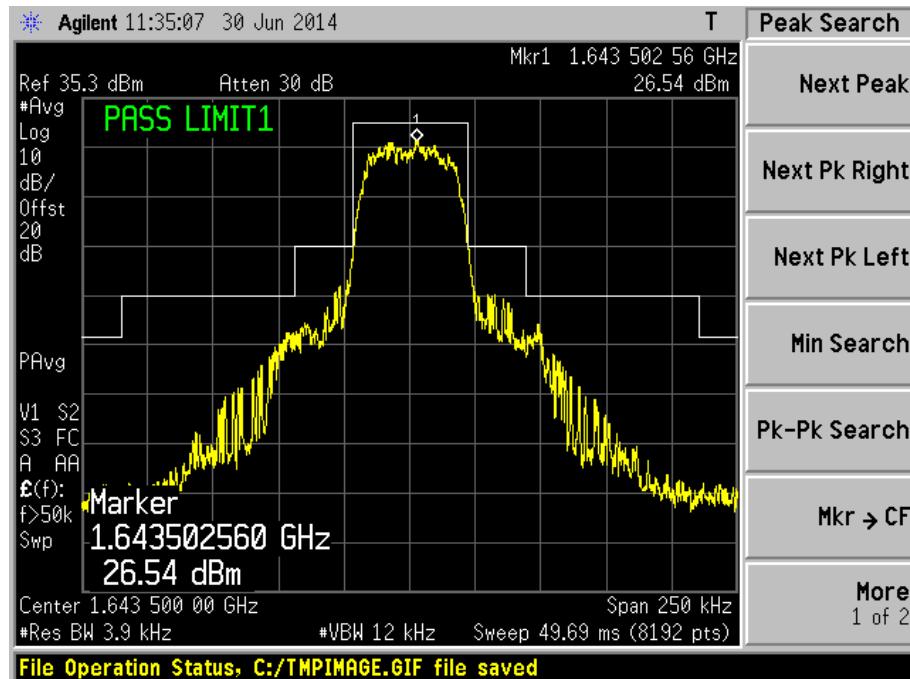

Plot 57 – Middle Channel



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 1)

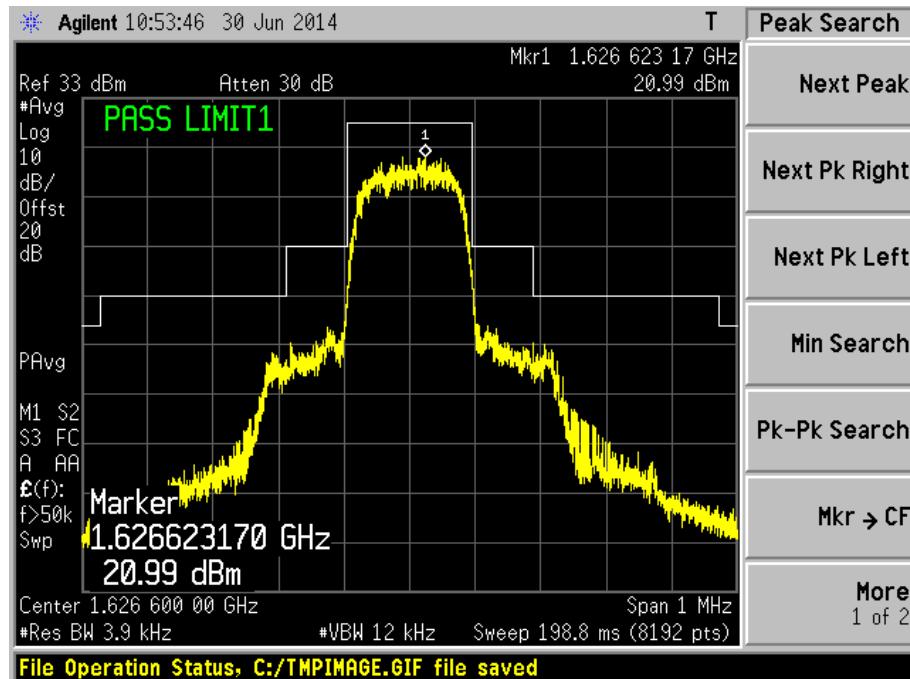


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 2)

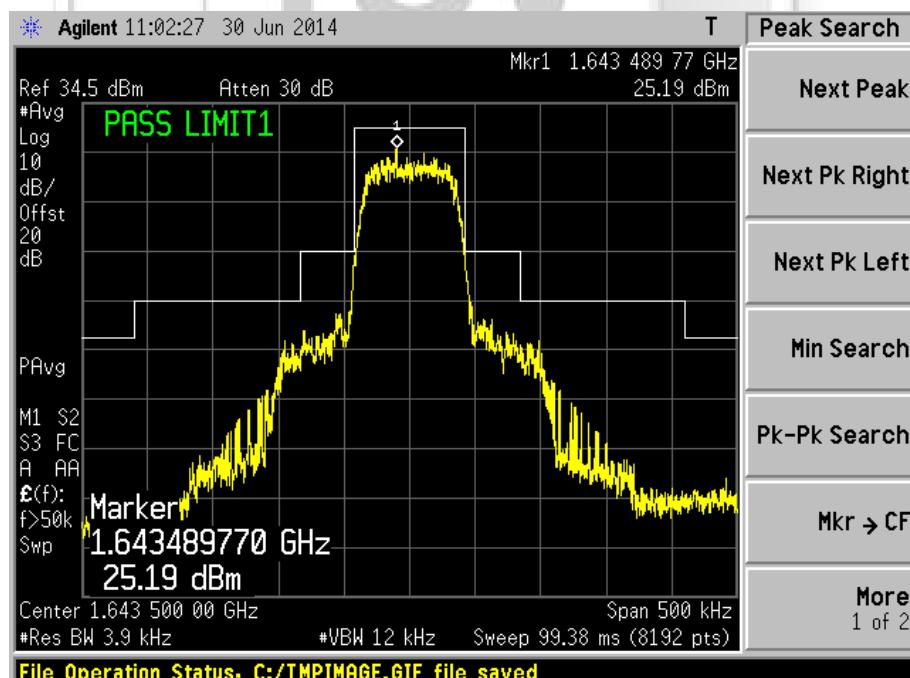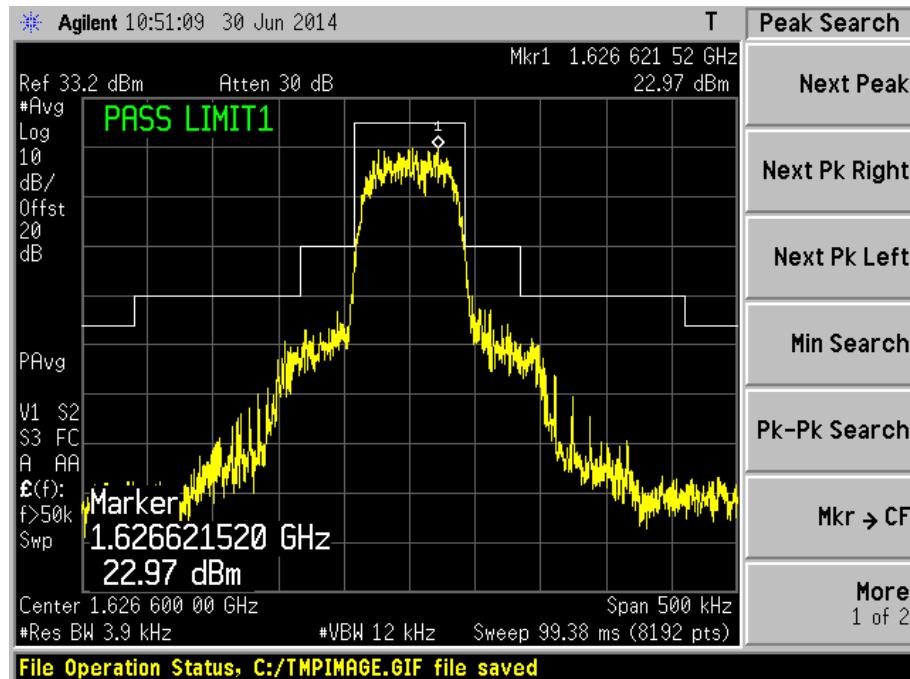



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 2)

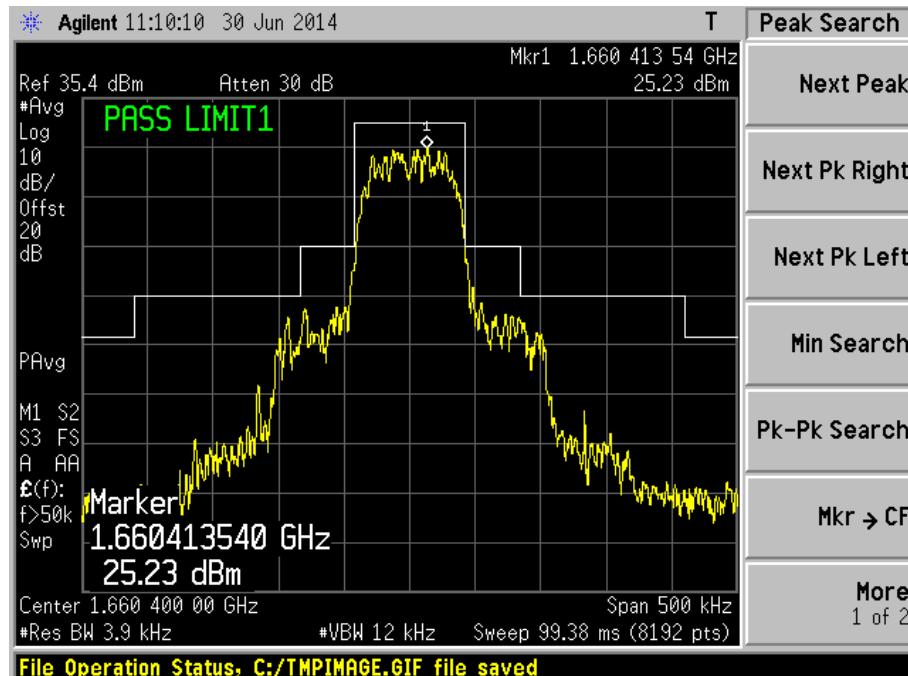


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 3)

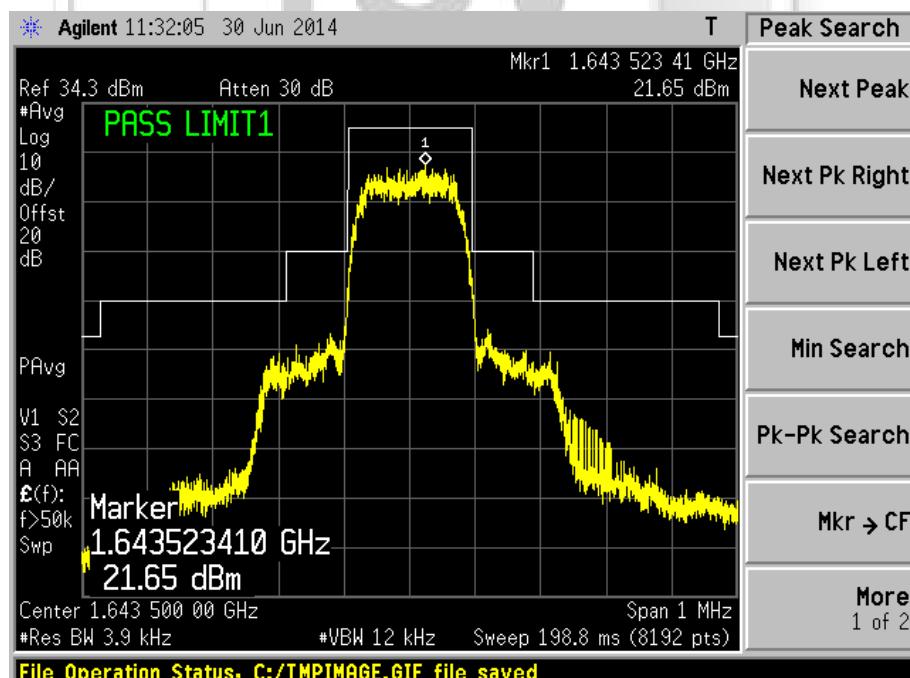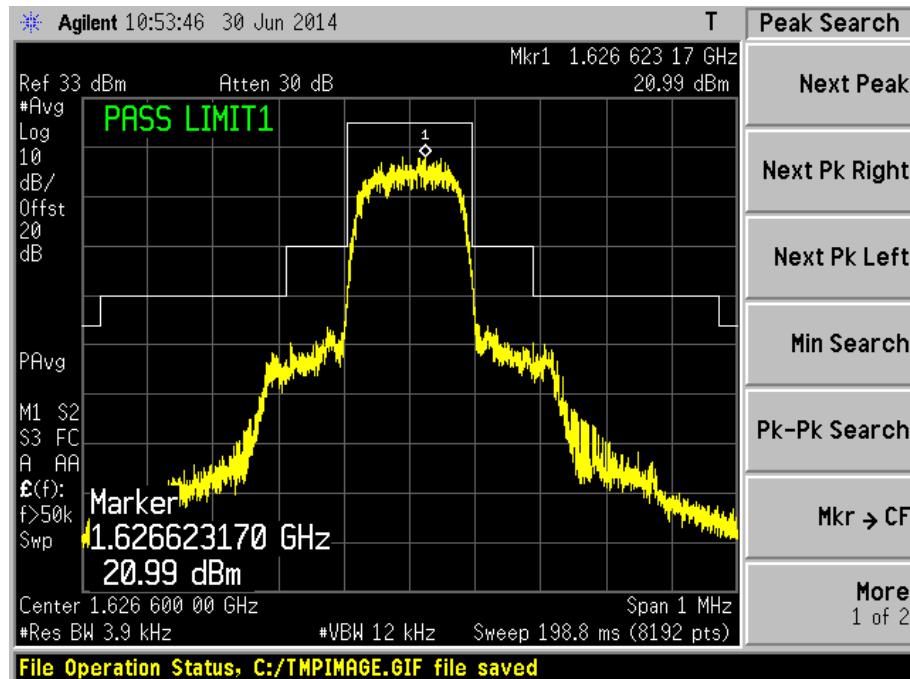



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 3)

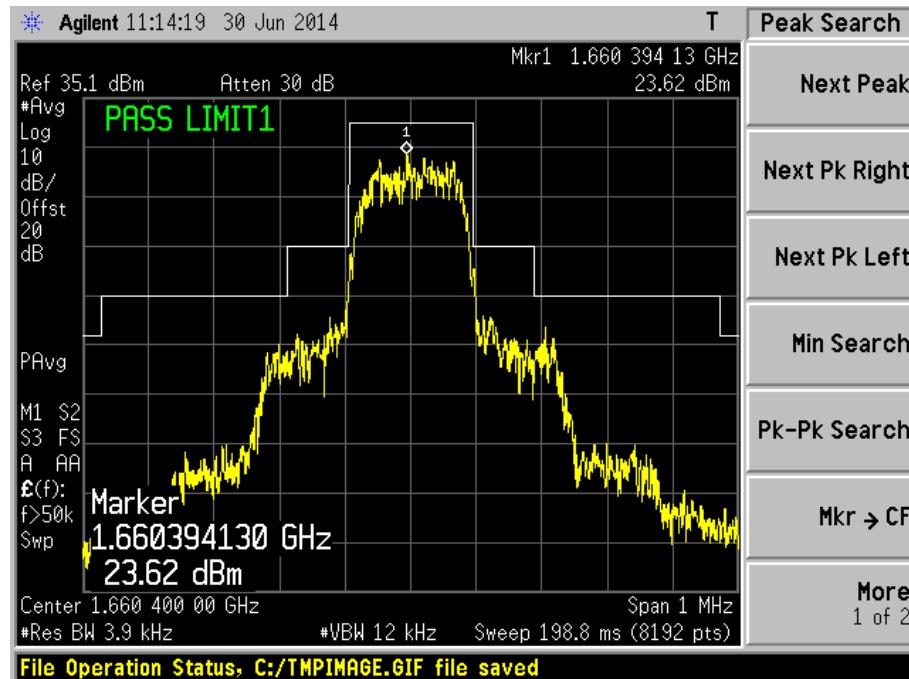


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 7)

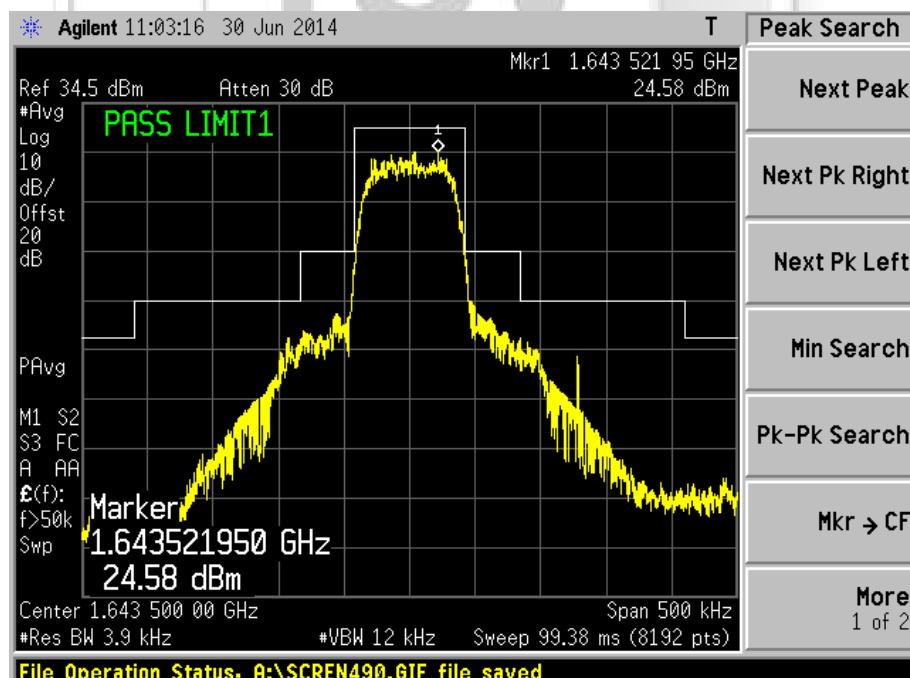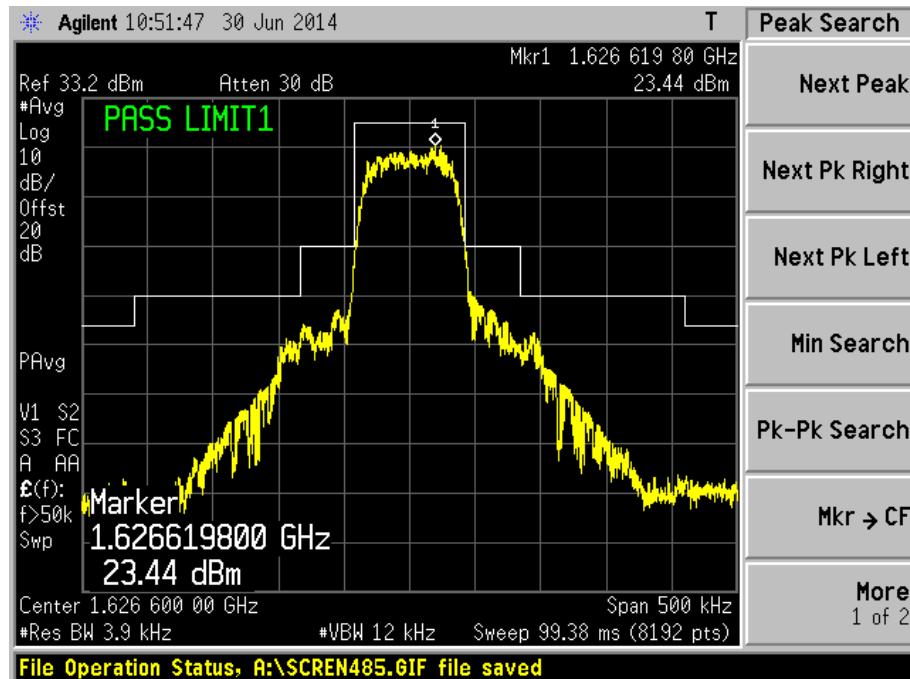



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 7)

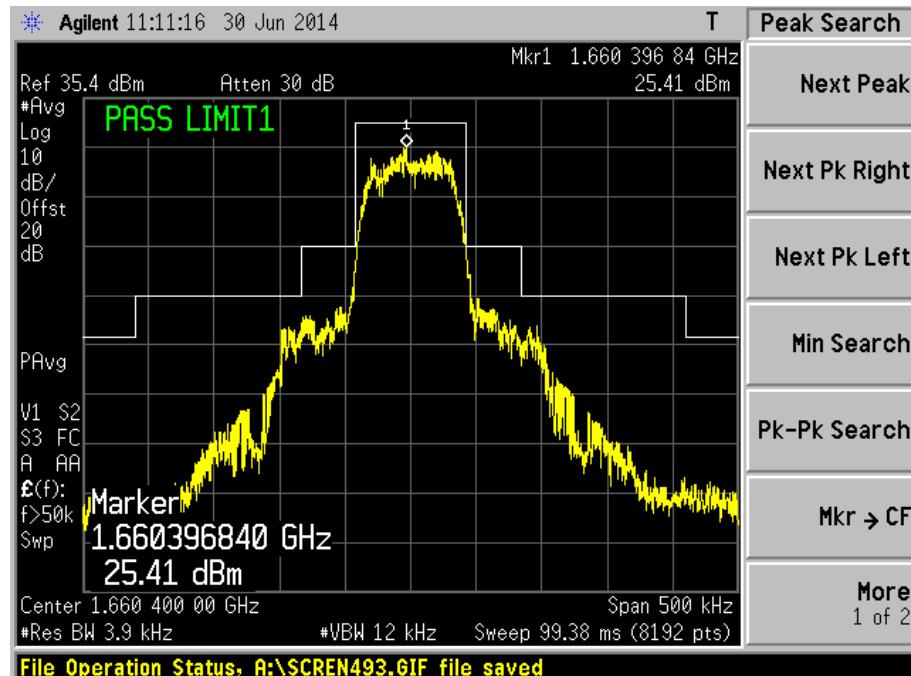


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 8)

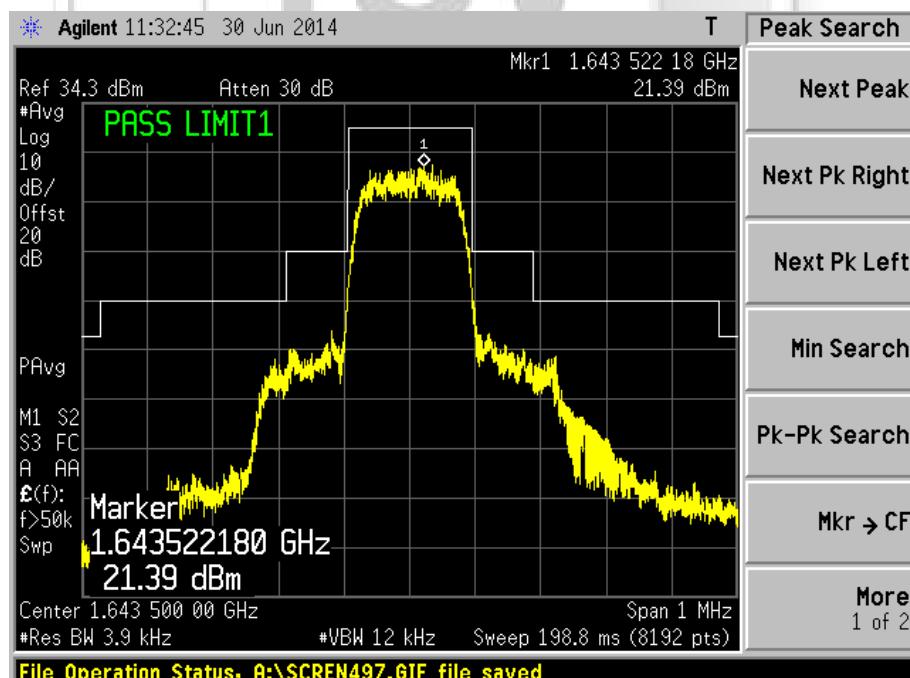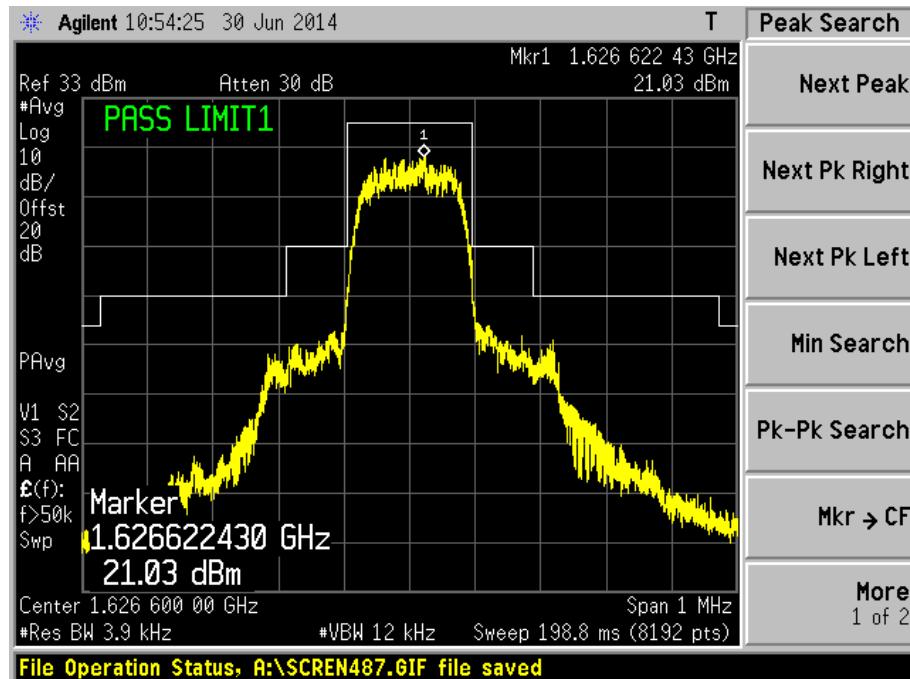



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

In Band Emissions Plots (Bearer Type: 8)

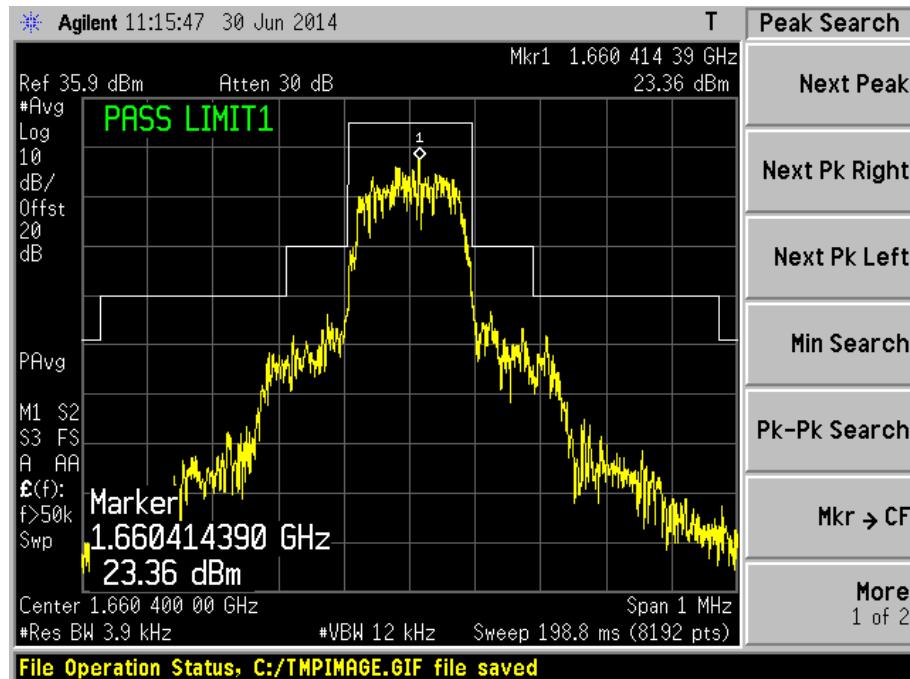



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 0)

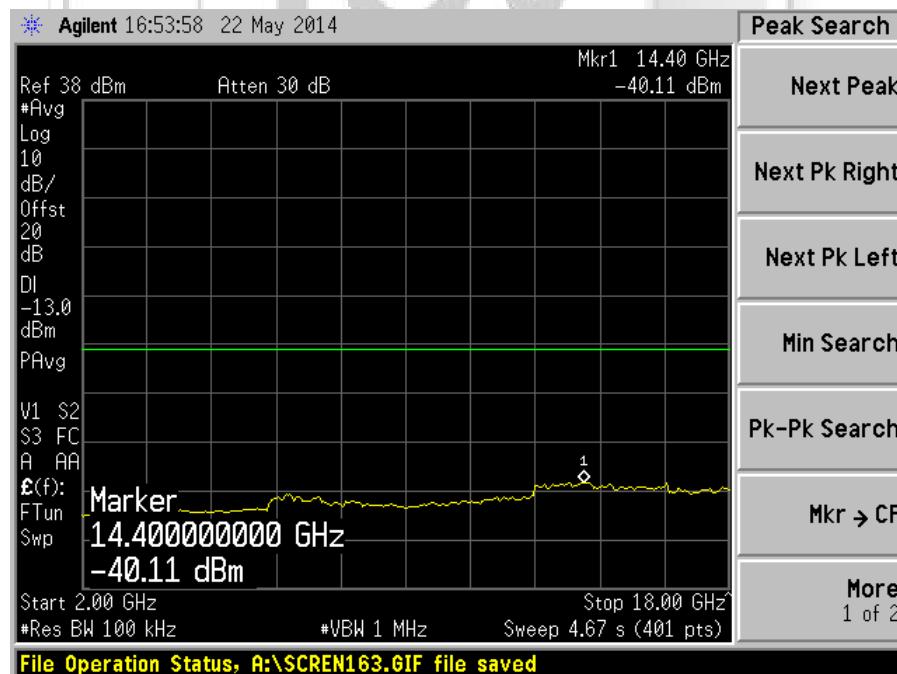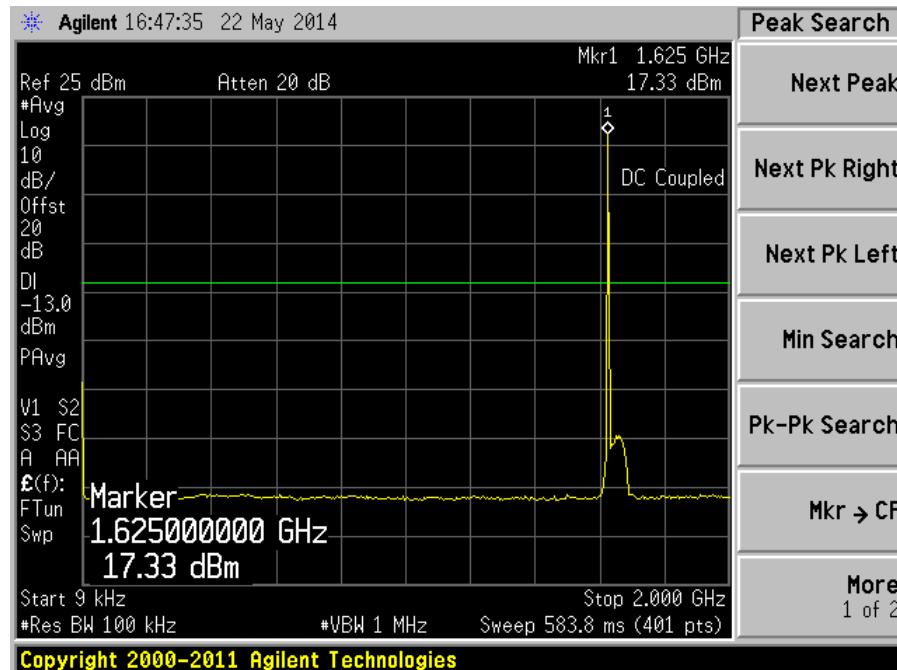



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 0)

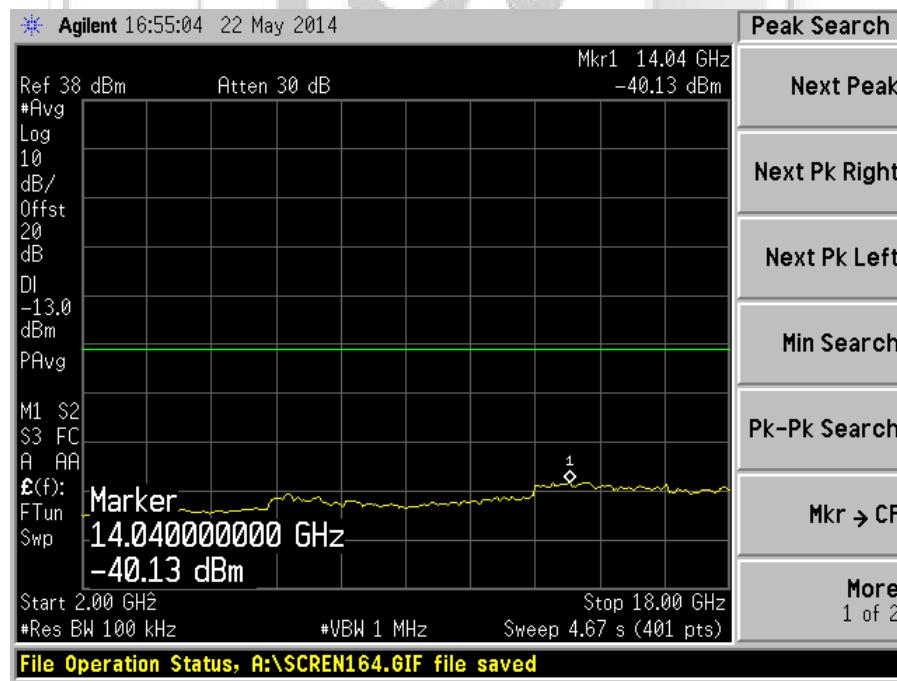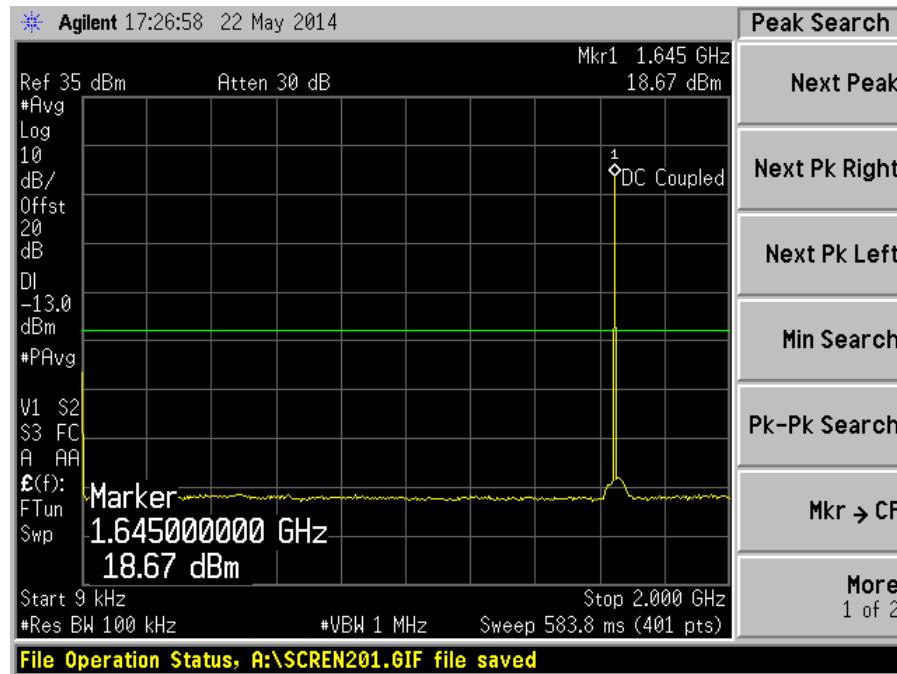



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 0)

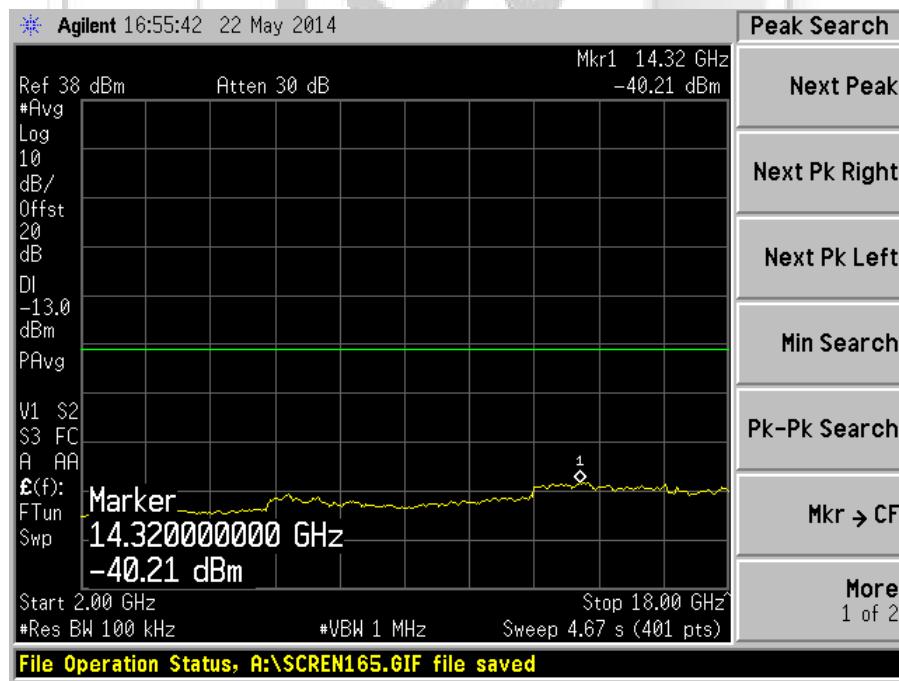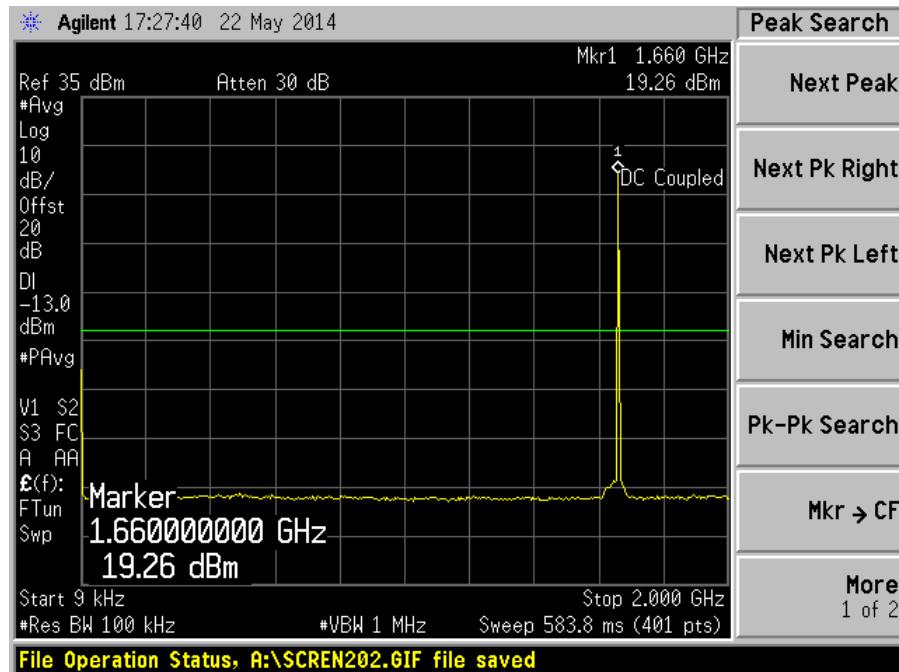



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 1)

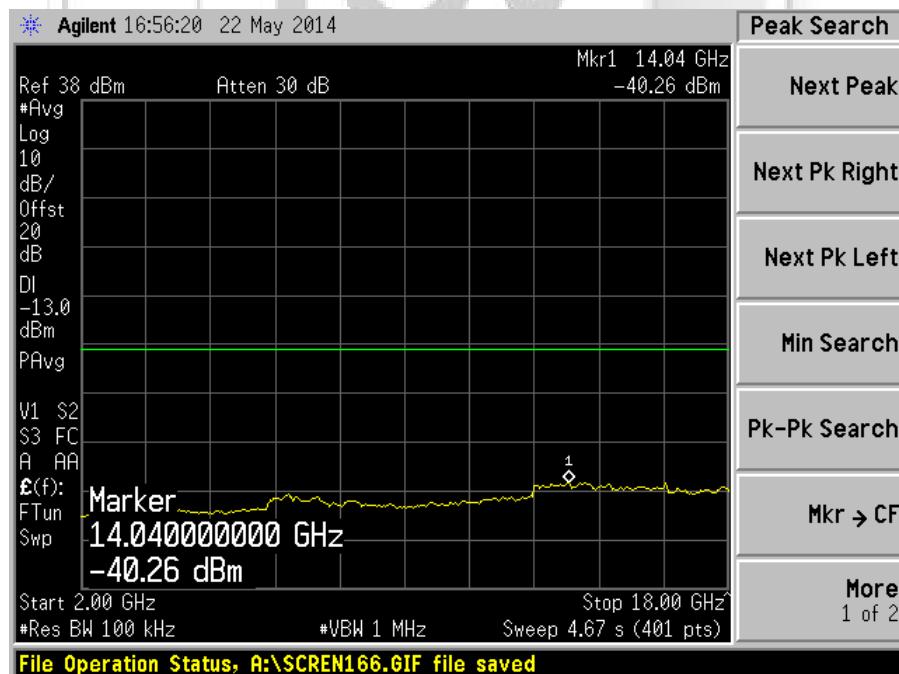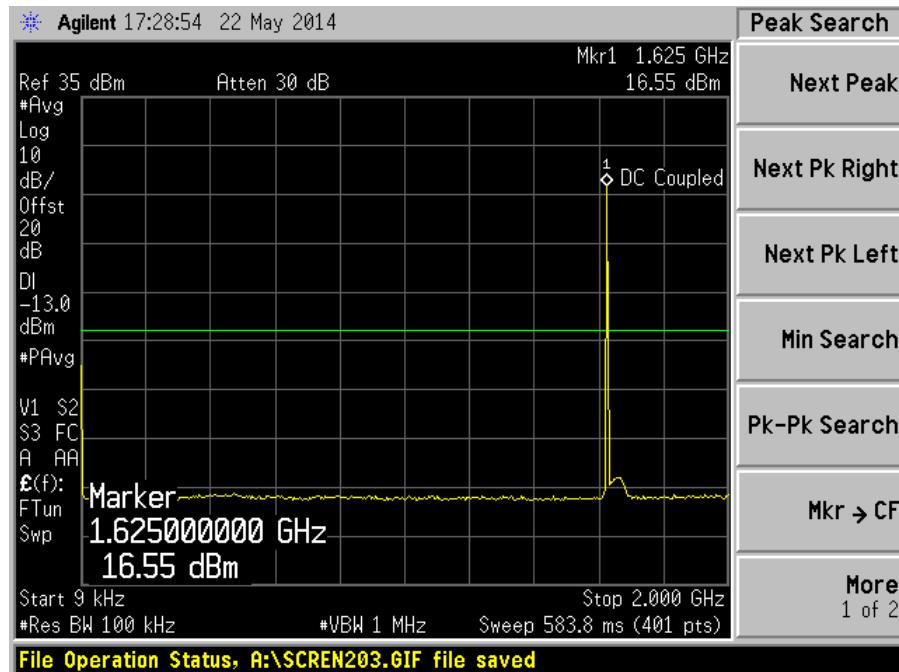


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 1)

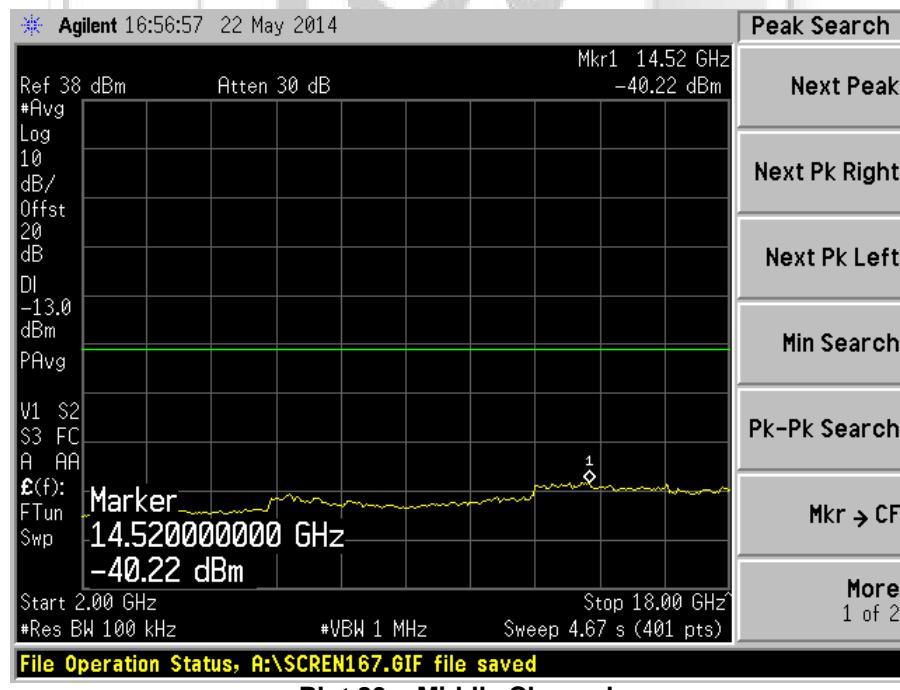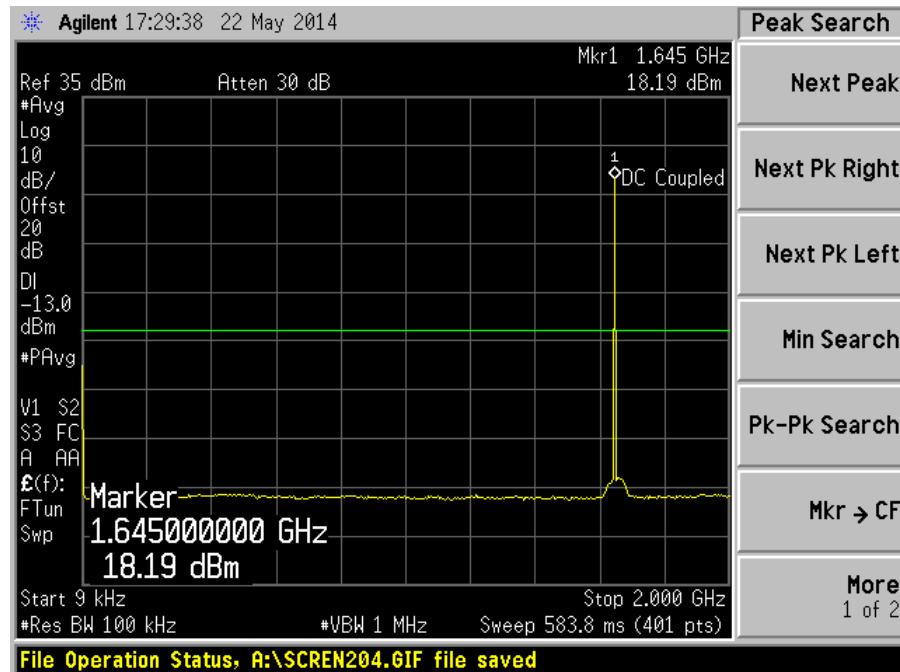


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 1)

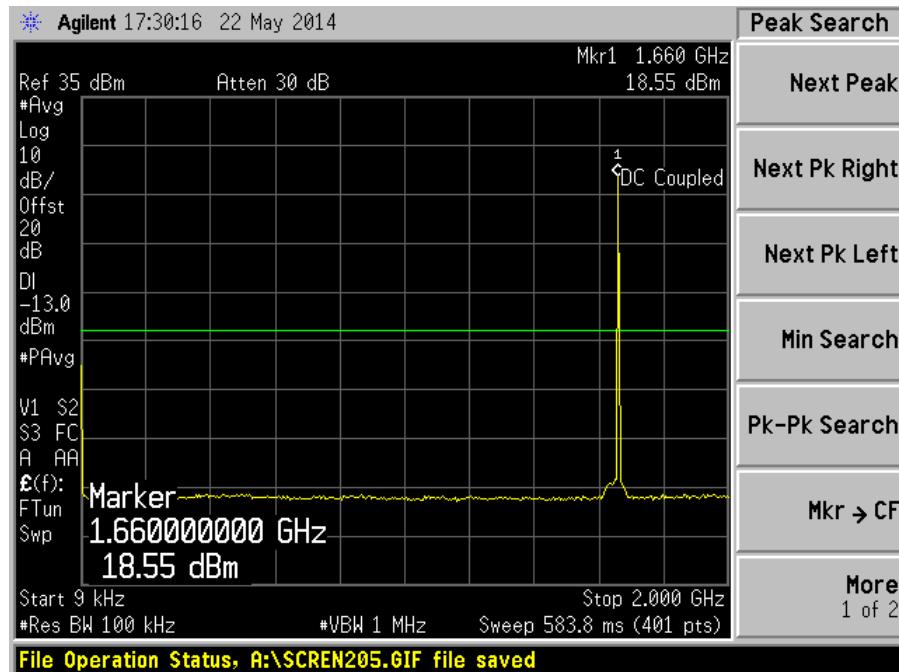



Plot 81 – Upper Channel

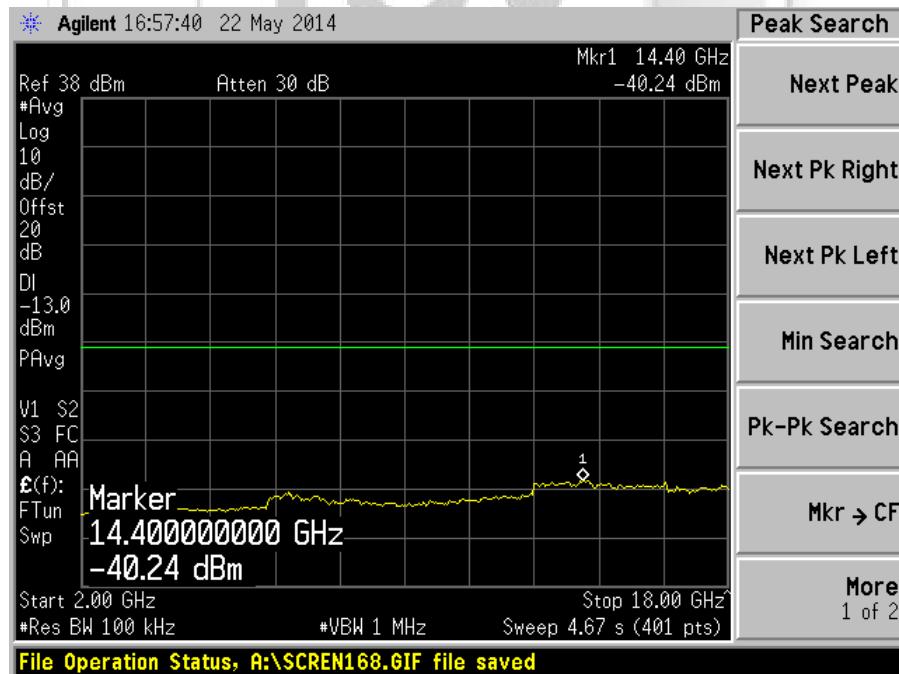

Plot 82 – Upper Channel



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 2)

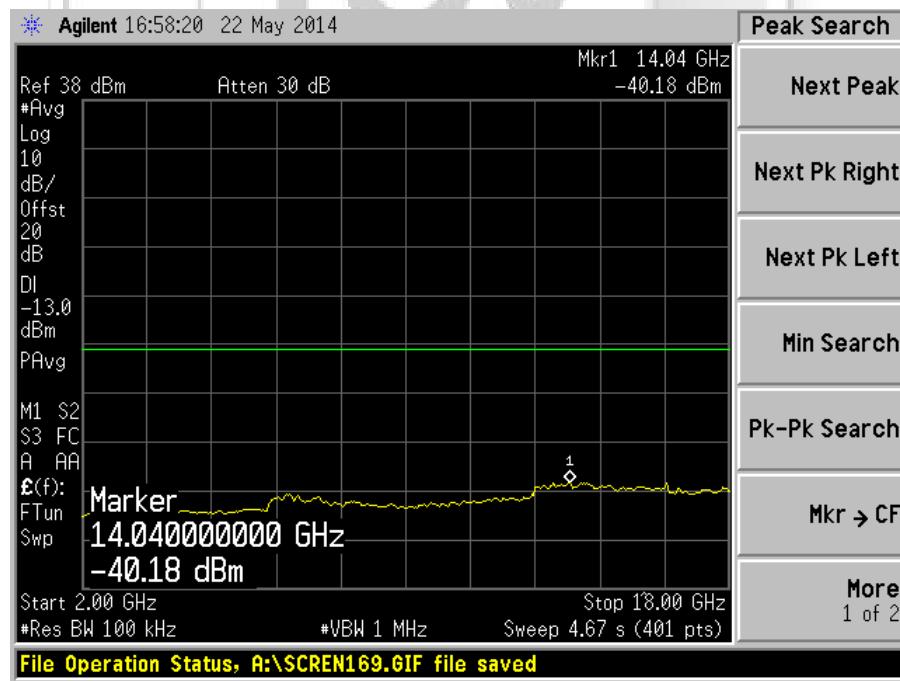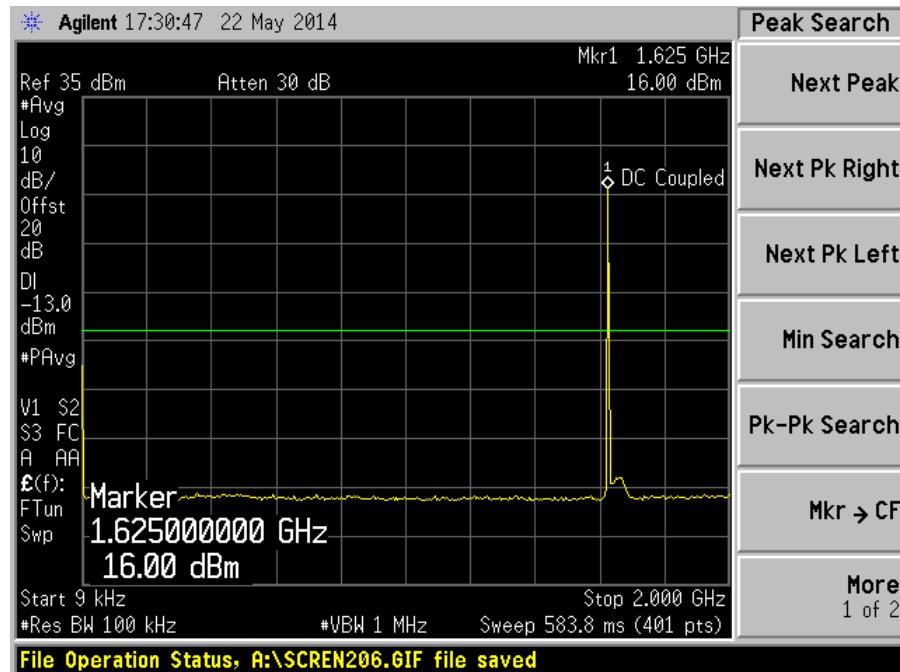


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 2)

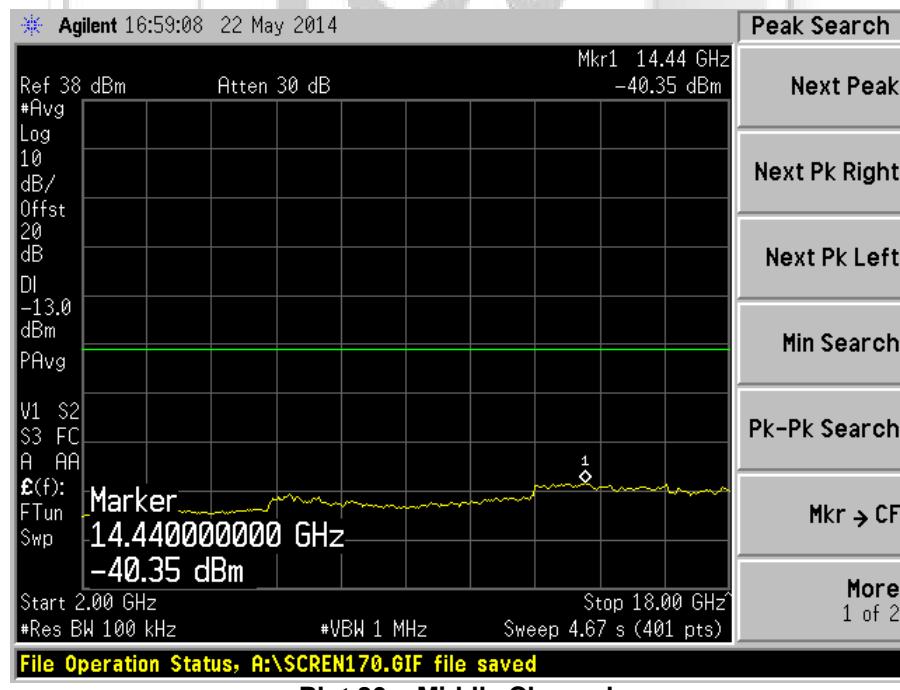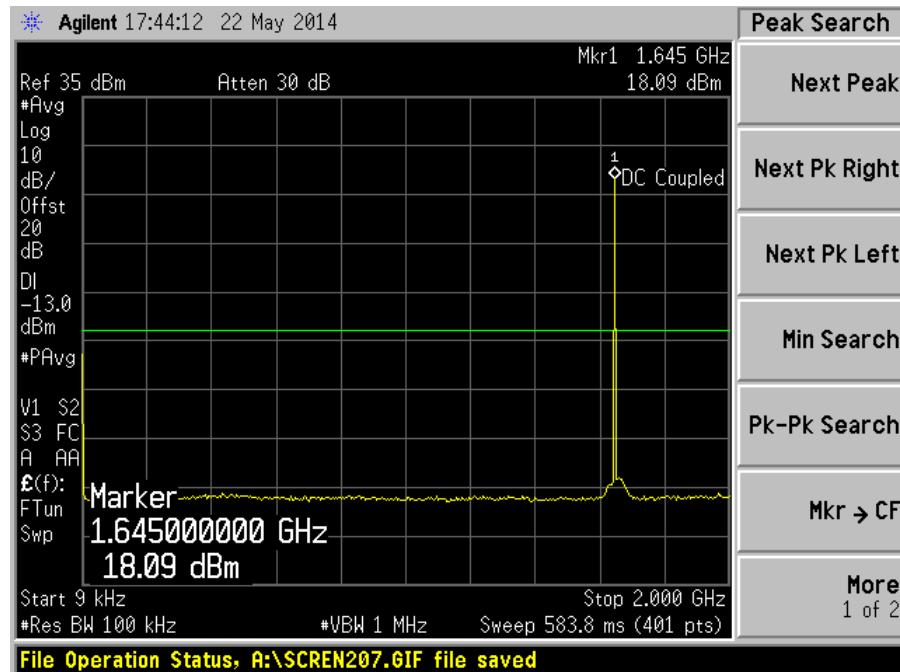


UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 2)

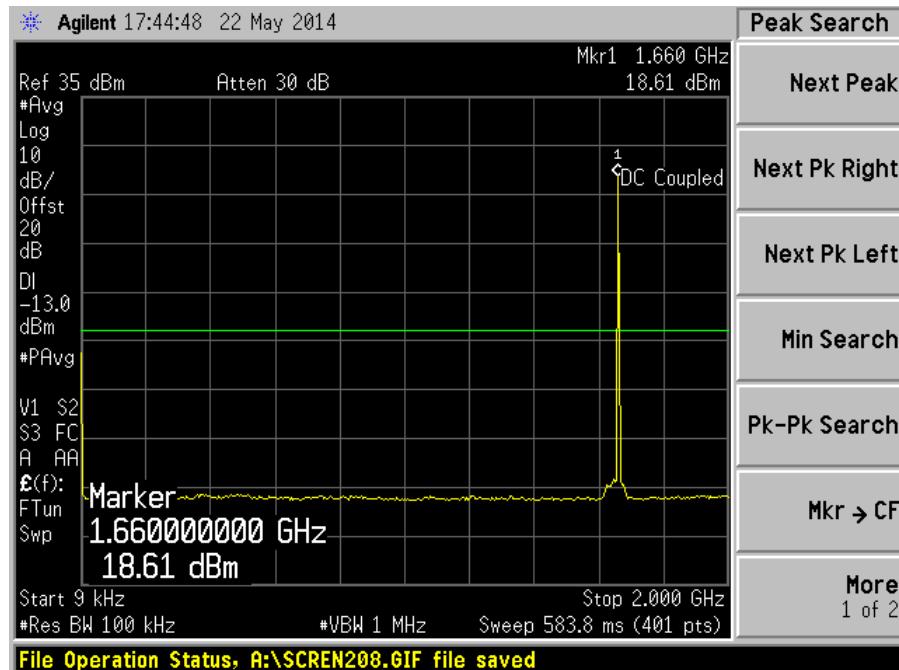



Plot 87 – Upper Channel

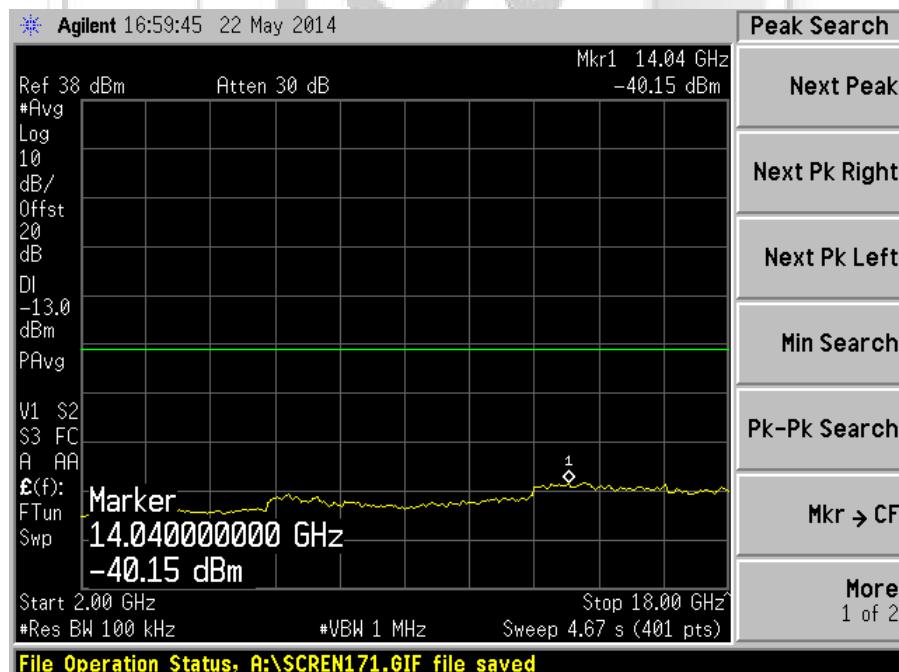

Plot 88 – Upper Channel



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 3)

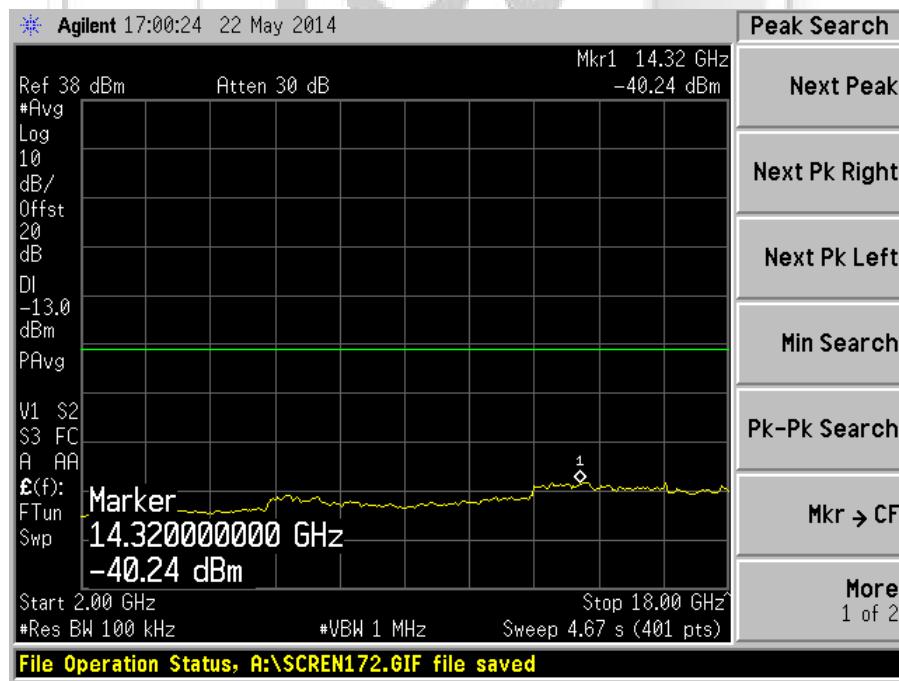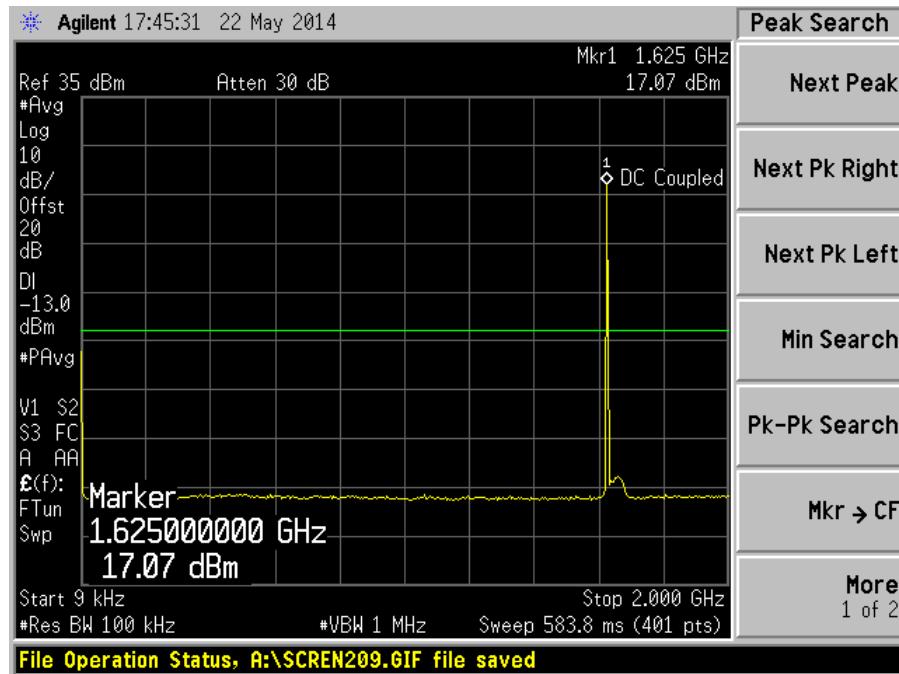



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 3)

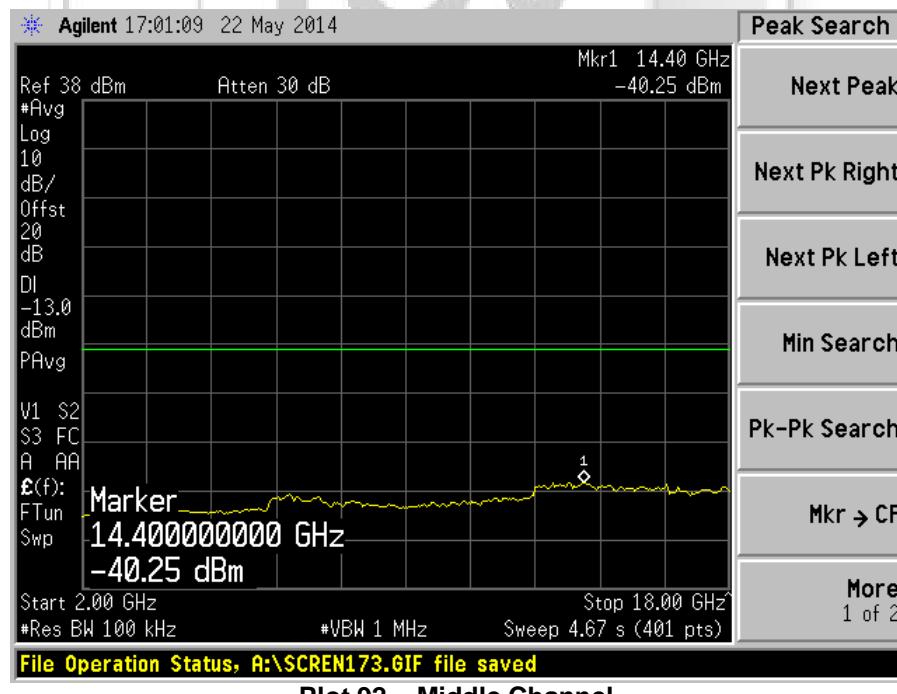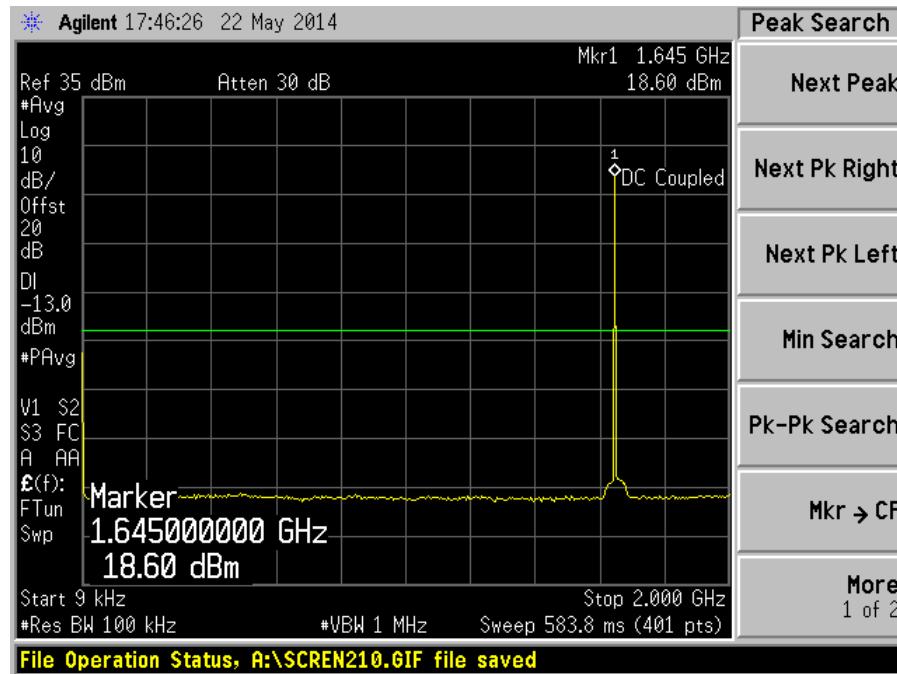



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 3)

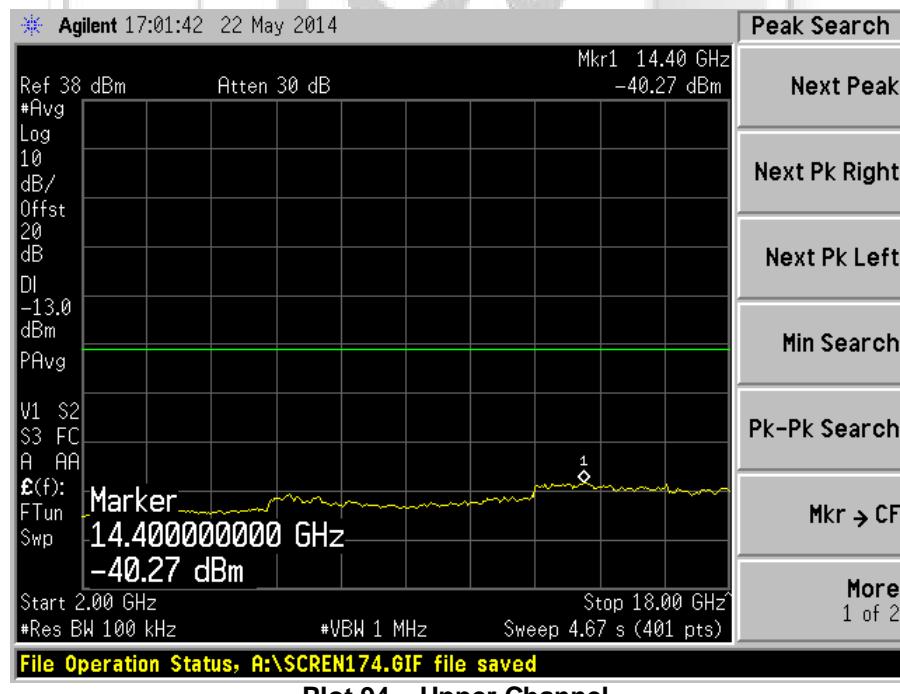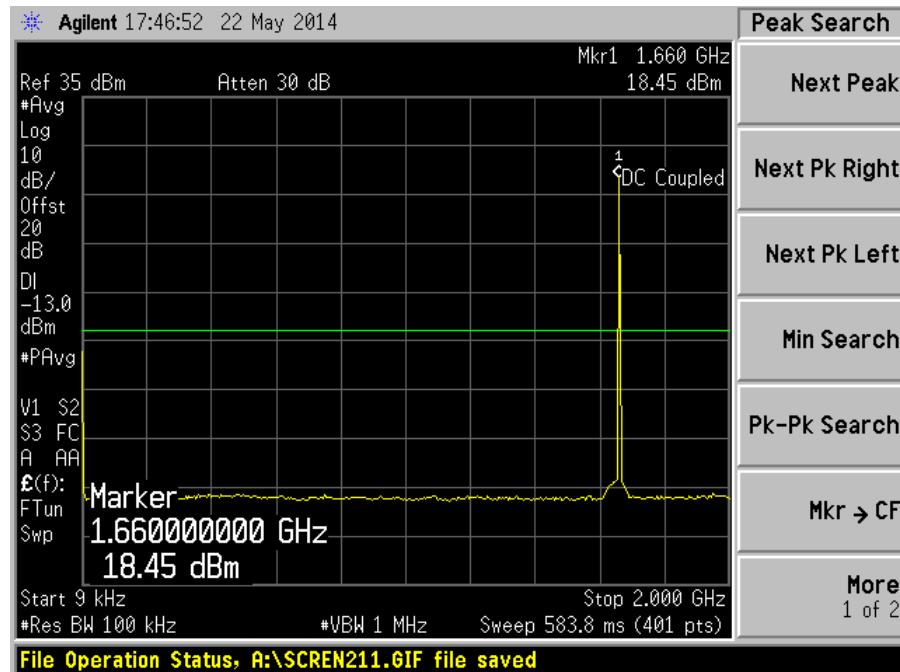



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 7)

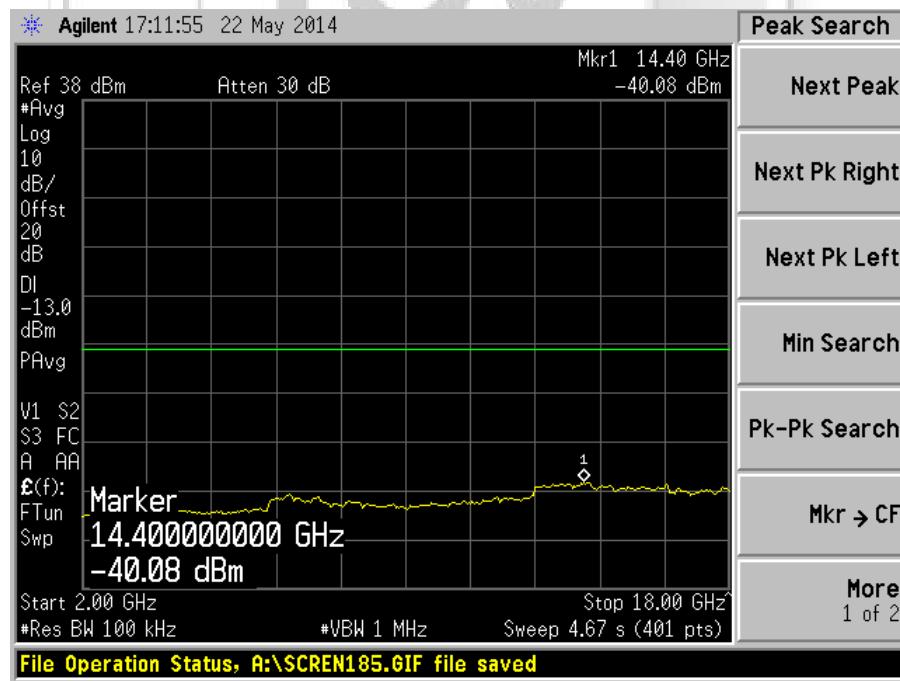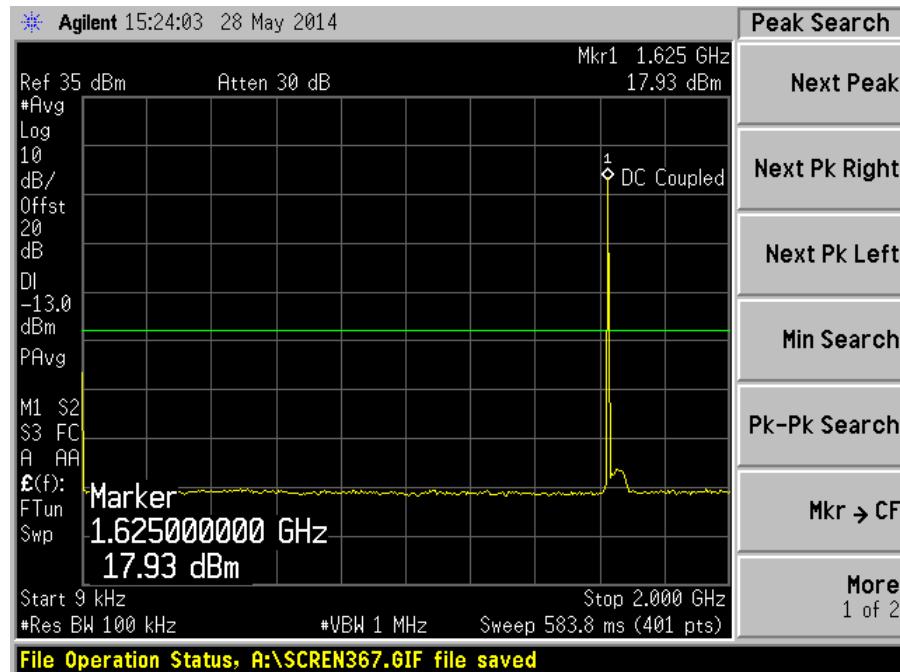



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 7)

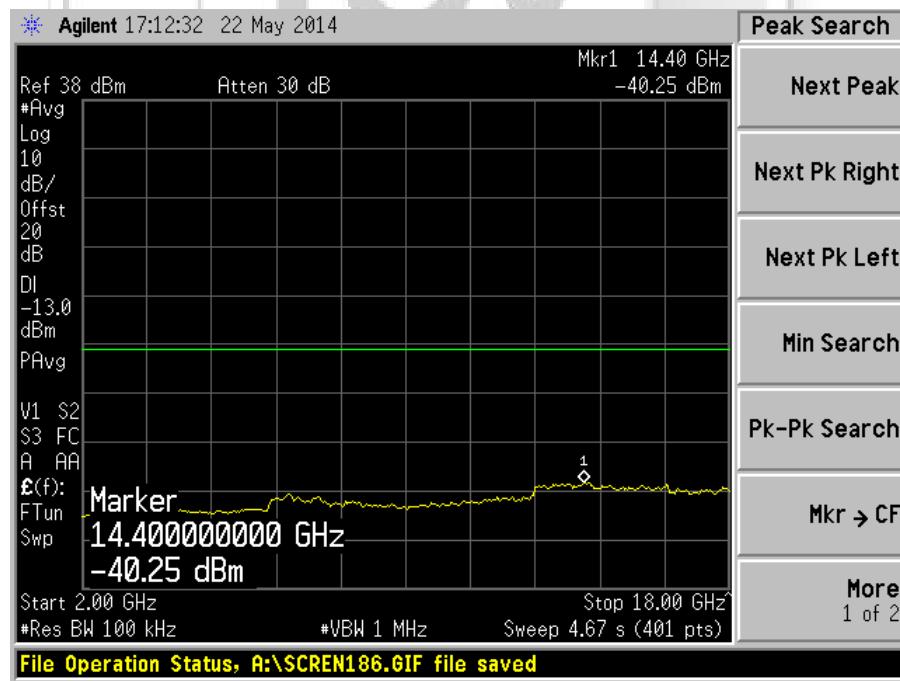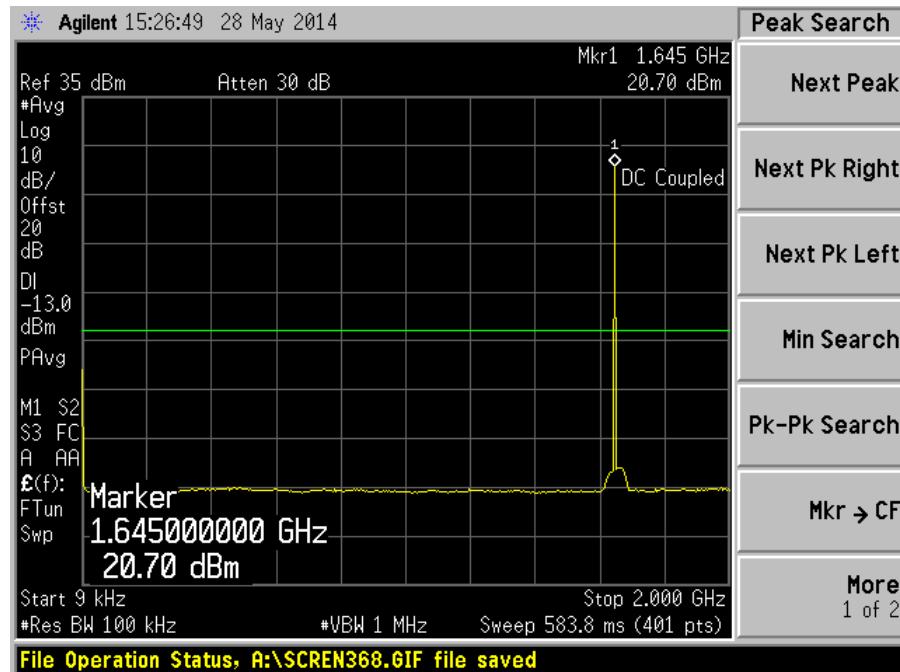



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 7)

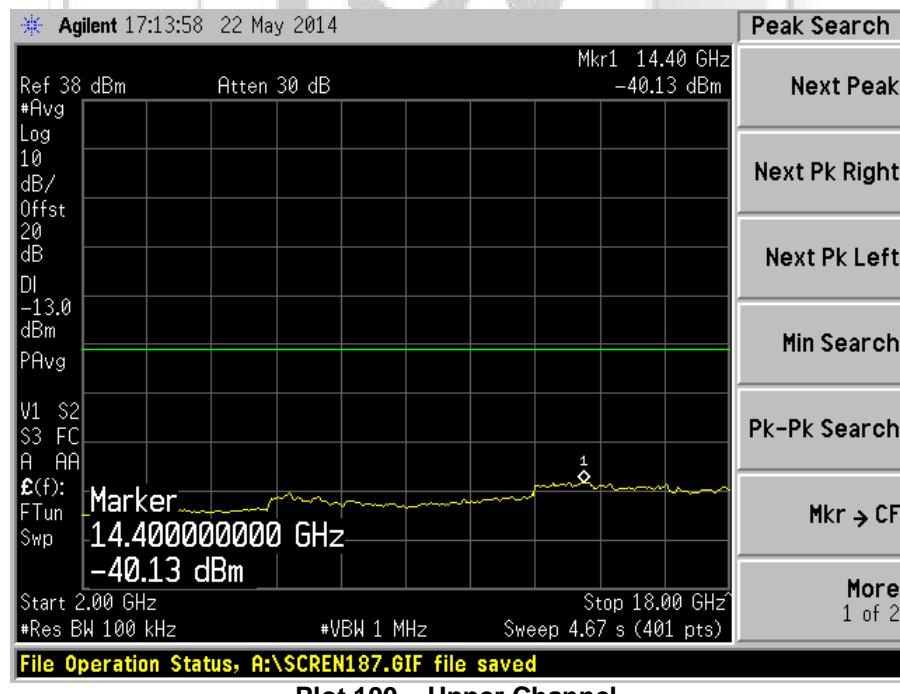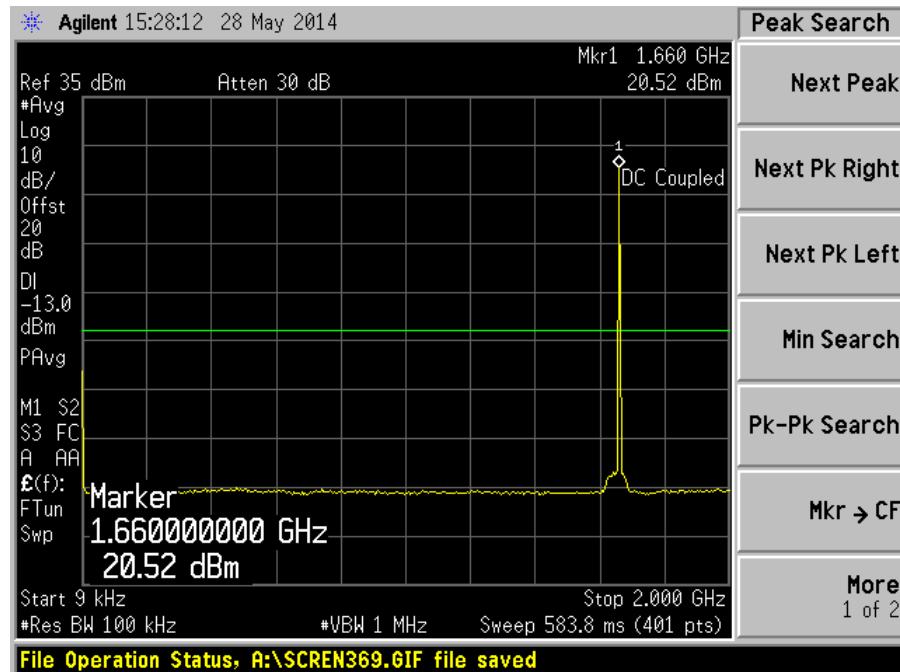



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 8)

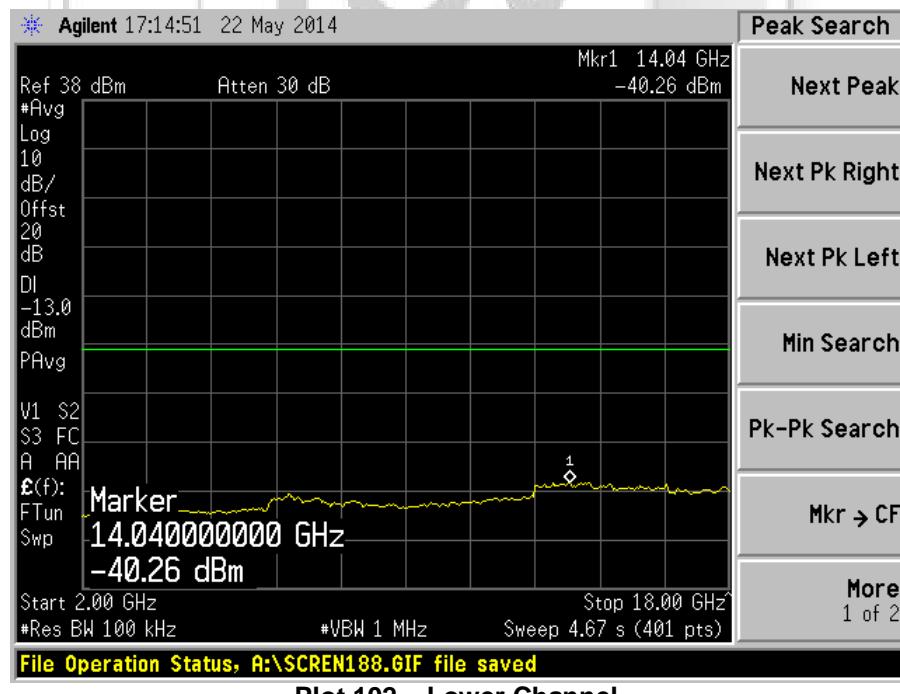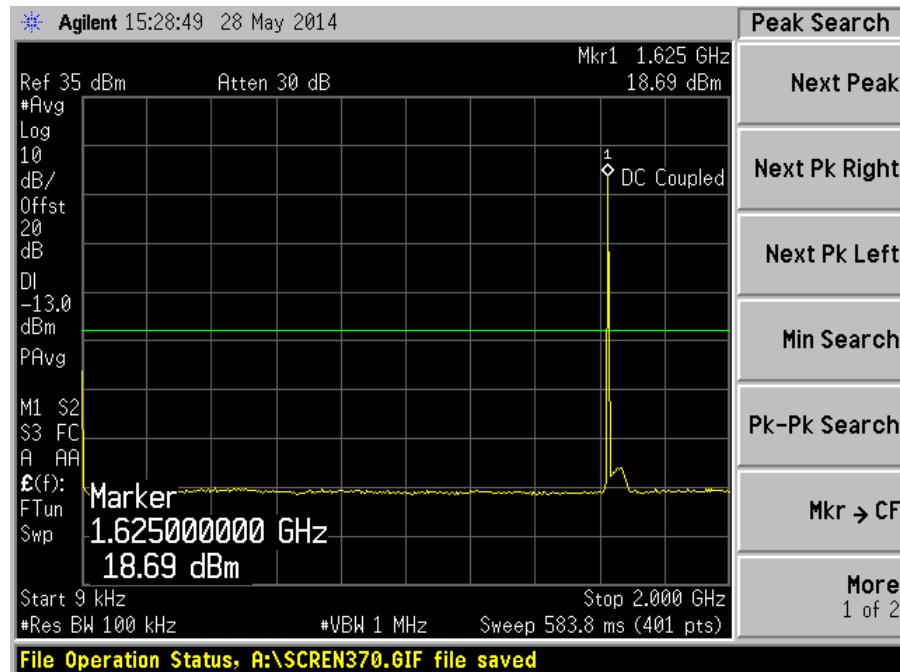



UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 8)

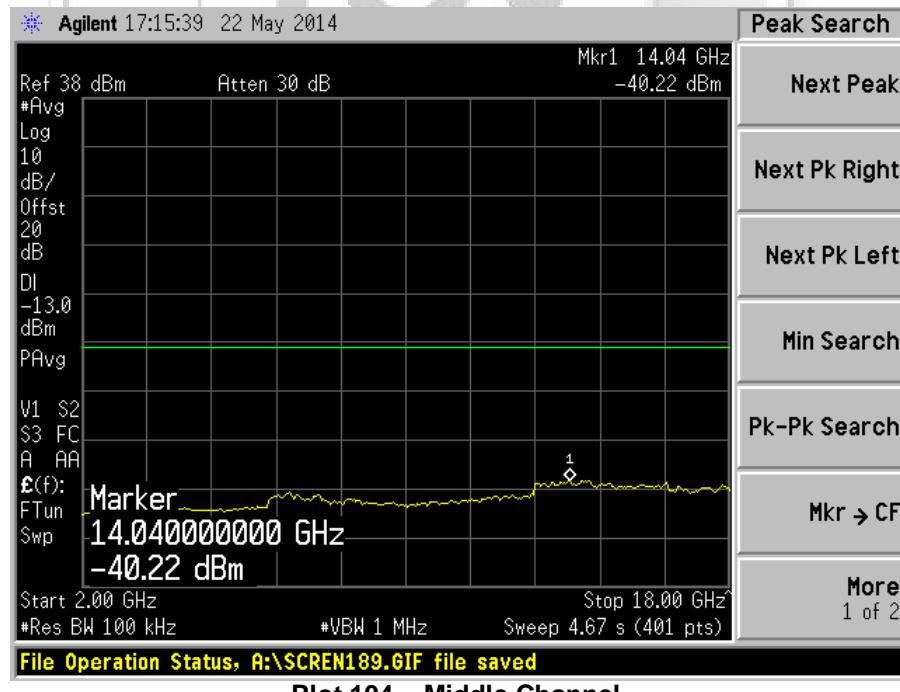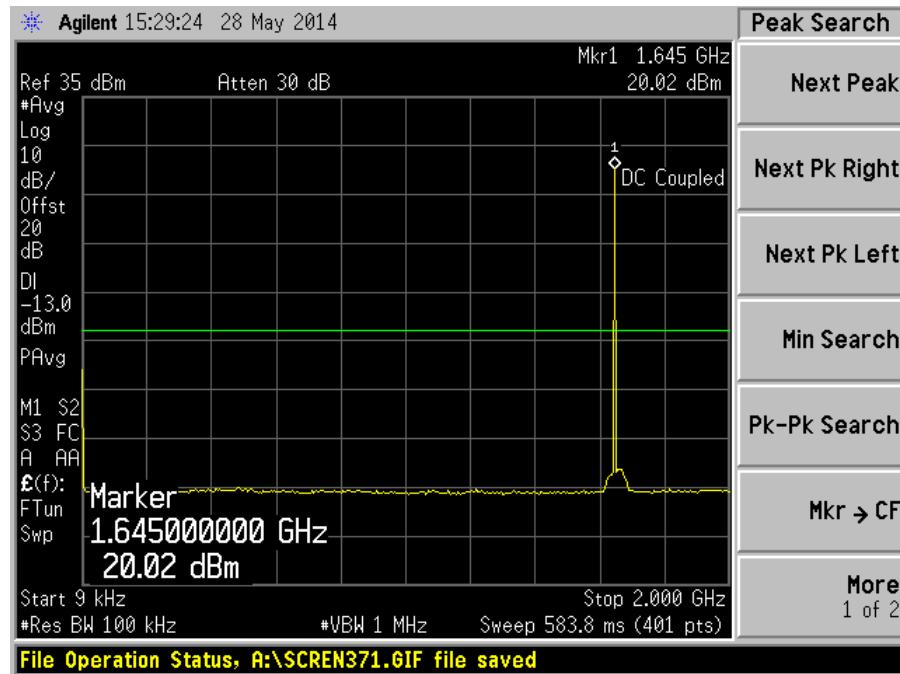

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious Plots (Bearer Type: 8)

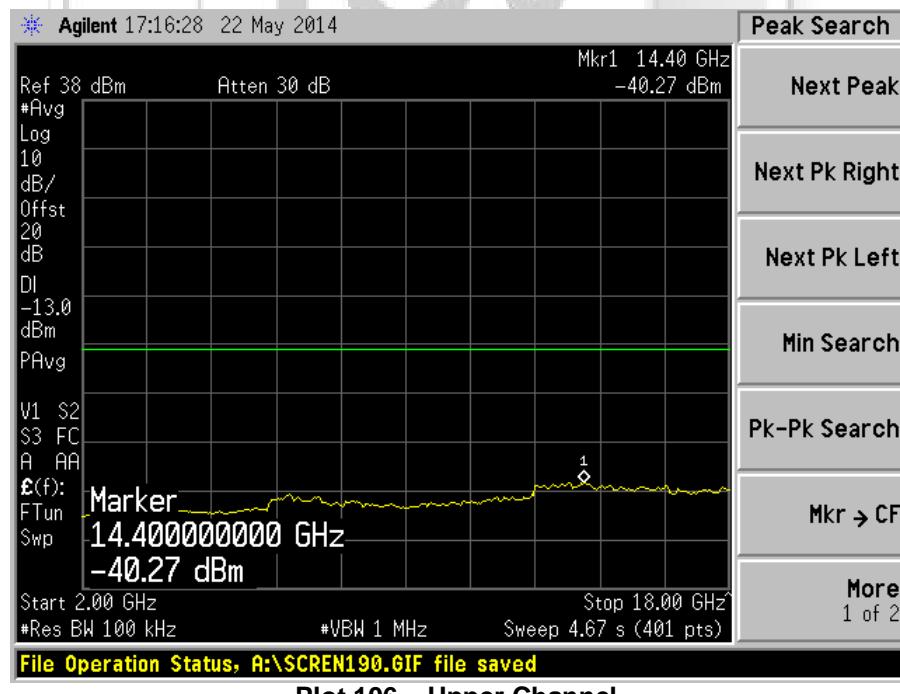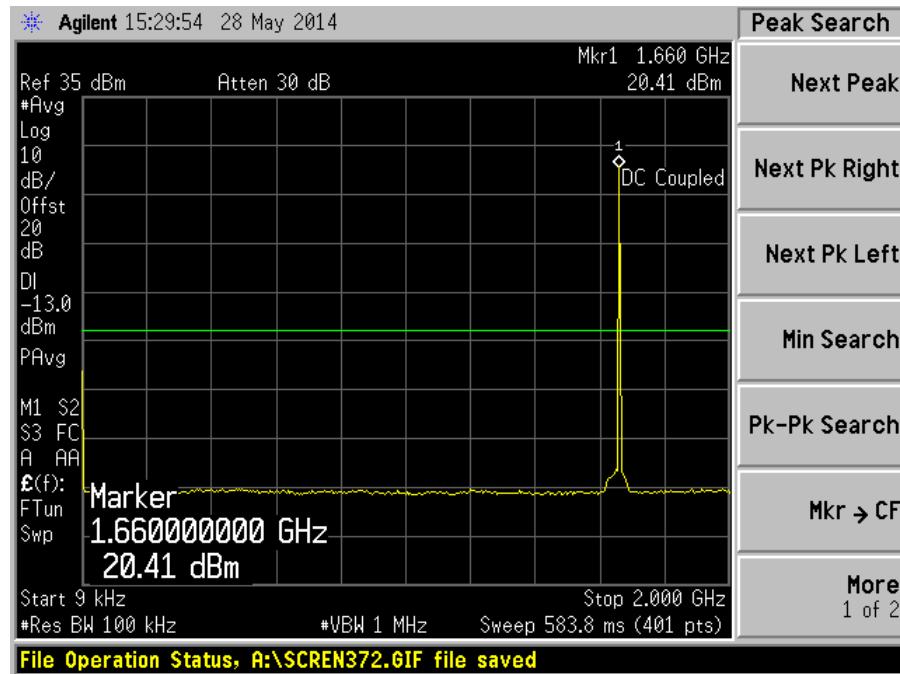

RADIATED SPURIOUS EMISSION TEST

47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Limits

1. 25.202 Emissions Limitations
 - (f) The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
 - (1) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
 - (2) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;
 - (3) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times logarithm (to the base 10) of the transmitter power in watts.
2. 2.1053 Measurements Required: Field Strength of Spurious Emissions
 - (a) Measurement shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of 2.1049, as appropriate. For equipment operating on frequencies below 890MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
 - (b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
 - (1) Those in which the spurious emission are required to be 60dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25MHz.
 - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
 - (4) Other types of equipment as required, when deemed necessary by the Commission.

47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E7405A	MY45106084	01 Aug 2014	1 year
Schaffner Bilog Antenna -(30MHz-2GHz) BL4	CBL6112B	2593	13 Dec 2014	1 year
HP Amplifier (100 kHz to 1.3 GHz)	8447D	2443A03801	19 Mar 2015	1 year
Toyo Preamplifier	TPA011803	00000005	16 Oct 2014	1 year
EMCO Horn Antenna(1GHz-18GHz)	3115	9901-5671	13 Mar 2015	1 year
Micro-tronics Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2014	1 year
K&L Microwave Bandreject Filter	3TNF-1000/2000-N/N	436	Output Monitor	Output Monitor



PSB Singapore

RADIATED SPURIOUS EMISSION TEST

47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant antenna was set at the required test distance away from the EUT and supporting equipment boundary

47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Method

1. The EUT was set to transmit at the maximum power at the lower channel with the modulation on at normal test condition.
2. The receiving antenna (test antenna) was set at vertical polarization with the height of 1m.
3. With the spectrum analyser was set to max hold enabled (peak detector mode), the spurious emissions were searched and recorded. For EUT which is a portable device, the spurious emission search was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces worst emissions.
4. For each spurious emission found, the test antenna was raised or lowered through the specified range of heights (1m – 4m) until a maximum signal level was detected on the test receiver.
5. The EUT was then rotated through 360° in the horizontal plane until the maximum signal was received. The maximum received signal level was recorded as A (in dBm).
6. The EUT was replaced with the substitution antenna with the antenna input was connected to the signal generator via a 10dB attenuator (if required).
7. The signal generator was set to the found spurious frequency. The output level of the signal generator was adjusted until the test receiver was at least 20dB above the level when the signal generator was switched off.
8. The test antenna was raised and lowered through the specified range of heights (1m – 4m) until the maximum signal level was received on the test receiver.
9. The substitution antenna was rotated until the maximum level was detected on the test receiver.
10. The output level of the signal generator was adjusted until the received signal level at the test receiver was equal to the level recorded in step 5 (A dBm). The signal generator output level was recorded as B (in dBm).
11. The spurious emission level, P (e.i.r.p) was computed as followed:
$$P \text{ (e.i.r.p)} = B - C - D + E$$

where C = cable loss between the signal generator and the substitution
 D = attenuation level if attenuator is used
 E = substitution antenna gain
12. The steps 2 to 11 were repeated with the receiving antenna was set to horizontal polarization.
13. Comparison was made on both measured results with vertical and horizontal polarizations. The highest value out of vertical and horizontal polarizations was recorded.
14. The steps 2 to 13 were repeated until all the spurious emissions (up to 10th harmonics of the carrier frequency) were measured.
15. The steps 1 to 14 were repeated with the EUT was set to operate at the middle and upper channels respectively.

RADIATED SPURIOUS EMISSION TEST

47 CFR FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Results

Operating Mode	Continuous Satellite Transmission	Temperature	24°C
Test Input Power	120V 60Hz	Relative Humidity	57%
Test Distance	3m	Atmospheric Pressure	1030mbar
Type Bearer	2 (Worst Bearer)	Tested By	Chang Wai Kit

30MHz – 1GHz

Lower Channel

Frequency (GHz)	Amplitude (dBm)	Limit (dBm)
32.4490	-51.1	-13.0
44.6960	-66.2	-13.0
216.1430	-62.6	-13.0
223.4910	-63.3	-13.0
228.3890	-66.2	-13.0
235.7370	-69.4	-13.0

Middle Channel

Frequency (GHz)	Amplitude (dBm)	Limit (dBm)
32.4490	-51.1	-13.0
44.6960	-66.2	-13.0
54.4930	-73.1	-13.0
216.1430	-63.2	-13.0
223.4910	-63.0	-13.0
265.1280	-70.9	-13.0

Upper Channel

Frequency (GHz)	Amplitude (dBm)	Limit (dBm)
32.4490	-51.0	-13.0
44.6960	-65.9	-13.0
203.8970	-69.0	-13.0
218.5920	-62.6	-13.0
228.3890	-65.9	-13.0
245.5340	-71.2	-13.0

RADIATED SPURIOUS EMISSION TEST

1GHz – 17GHz

Lower Channel

Frequency (GHz)	Amplitude (dBm)	Limit (dBm)
1340.8750	-59.9	-13.0
3259.8750	-31.4	-13.0
4030.0000	-47.5	-13.0
4875.8750	-41.1	-13.0
6511.3130	-54.1	-13.0
6749.9250	-48.8	-13.0

Middle Channel

Frequency (GHz)	Amplitude (dBm)	Limit (dBm)
1328.2500	-60.9	-13.0
3285.1250	-32.9	-13.0
3979.5000	-46.5	-13.0
4926.3750	-42.6	-13.0
6766.9690	-50.6	-13.0
9016.7440	-46.3	-13.0

Upper Channel

Frequency (GHz)	Amplitude (dBm)	Limit (dBm)
1328.7500	-43.6	-13.0
3323.0000	-32.8	-13.0
4030.0000	-47.4	-13.0
6647.6630	-55.1	-13.0
6749.9250	-48.6	-13.0
8999.7000	-42.8	-13.0

RADIATED SPURIOUS EMISSION TEST

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured. All other emissions were relatively insignificant.
2. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
3. The Resolution Bandwidth (RBW) was corrected from 4kHz by $10\log_{10} [(\text{used RBW}) / 4\text{kHz}]$.
4. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 20GHz
RBW: 100kHz VBW: 300kHz
5. Emission limits are computed based on following:
 - a. Emissions Limits (dBm) (50% - = $P - 25 + CF$
100% authorised bandwidth)
 - b. Emissions Limits (dBm) (100% - = $P - 35 + CF$
250% authorised bandwidth)
 - c. Emissions Limits (dBm) (> 250% = $P - [43 + 10 \log_{10} P_w] + 30 + CF$
authorised bandwidth)

where P = Measured mean power in dBm
 P_w = Measured mean power in W
 CF = RBW correction factor (see Note 4)
6. Radiated Spurious Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is $\pm 4.0\text{dB}$.

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Limits

25.216(h)(i)(j) Limits on Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service

(h) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FC 03-283 (from November 6, 2003) with assigned uplink frequencies in the 1626.5MHz - 1660.5MHz band shall suppress the power density of emissions in the 1605MHz - 1610MHz band-segment to an extent determined by linear interoperation from -70dBW/MHz at 1605MHz to -46dBW/MHz at 1610MHz, averaged over any 2ms active transmission interval. The e.i.r.p of discrete emissions of less than 700Hz bandwidth from such stations shall not exceed a level determined by linear interoperation from -80dBW at 1605MHz to -56dBW at 1610MHz, averaged over any 2ms active transmission interval.

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1GHz and 3GHz shall not exceed -80dBW/MHz in the 1559MHz - 1610MHz band averaged over any 2ms interval.

(j) A Root-Mean-Square detector shall be used for all power density measurements.

47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E7405A	MY45106084	01 Aug 2014	1 year
Schaffner Bilog Antenna -(30MHz-2GHz) BL4	CBL6112B	2593	13 Dec 2014	1 year
HP Amplifier (100 kHz to 1.3 GHz)	8447D	2443A03801	19 Mar 2015	1 year
Toyo Preamplifier	TPA011803 6	00000005	16 Oct 2014	1 year
EMCO Horn Antenna(1GHz-18GHz)	3115	9901-5671	13 Mar 2015	1 year
Micro-tronics Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2014	1 year
K&L Microwave Bandreject Filter	3TNF- 1000/2000- N/N	436	Output Monitor	Output Monitor

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant antenna was set at the required test distance away from the EUT and supporting equipment boundary

47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Method

1. The EUT was set to transmit at the maximum power at the lower channel with the modulation on at normal test condition.
2. The receiving antenna (test antenna) was set at vertical polarization with the height of 1m.
3. A prescan was carried out in the frequency range under investigations with the EMI receiver set to max hold mode. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
4. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
5. The maximized emissions were plotted with inclusion of corrector factor of measured radiated emissions to EIRP.
6. The steps 1 to 5 were repeated with the EUT was set to operate at the middle and upper channels respectively.
7. The measurements were repeated with the EUT in carrier off state (standby).

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

47 CFR FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Results


Operating Mode	Continuous Satellite Transmission	Temperature	24°C
Test Input Power	120V 60Hz	Relative Humidity	57%
Test Distance	3m	Atmospheric Pressure	1030mbar
Type Bearer	2 (worst bearer)	Tested By	Chang Wai Kit
Attached Plots	107 – 112		

All spurious signals found were below the specified limit. Please refer to the attached plots.




PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

Type Bearer: 2 - Transmitter On

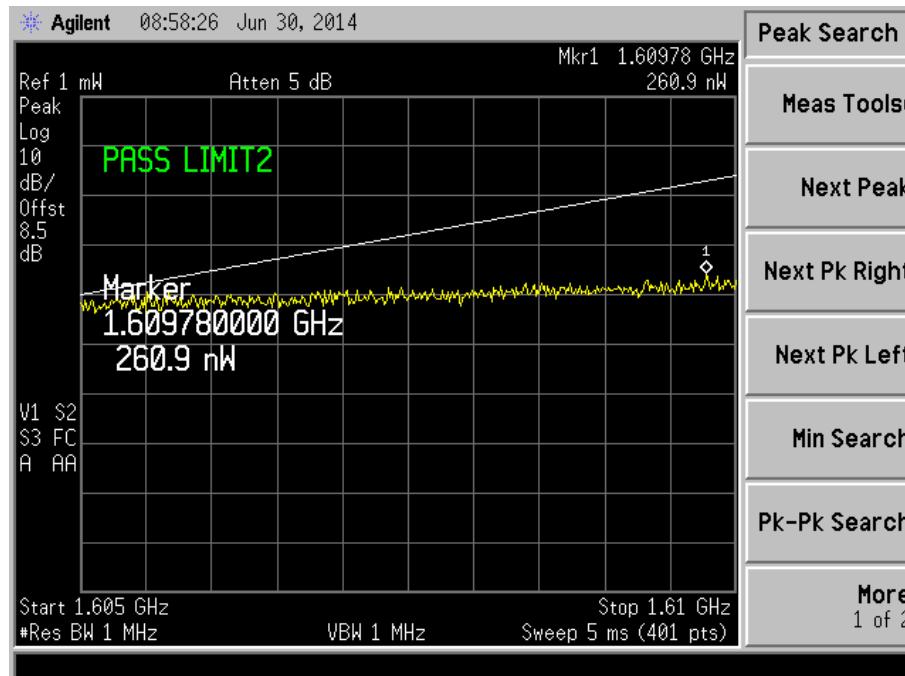


Plot 107 – Lower Channel

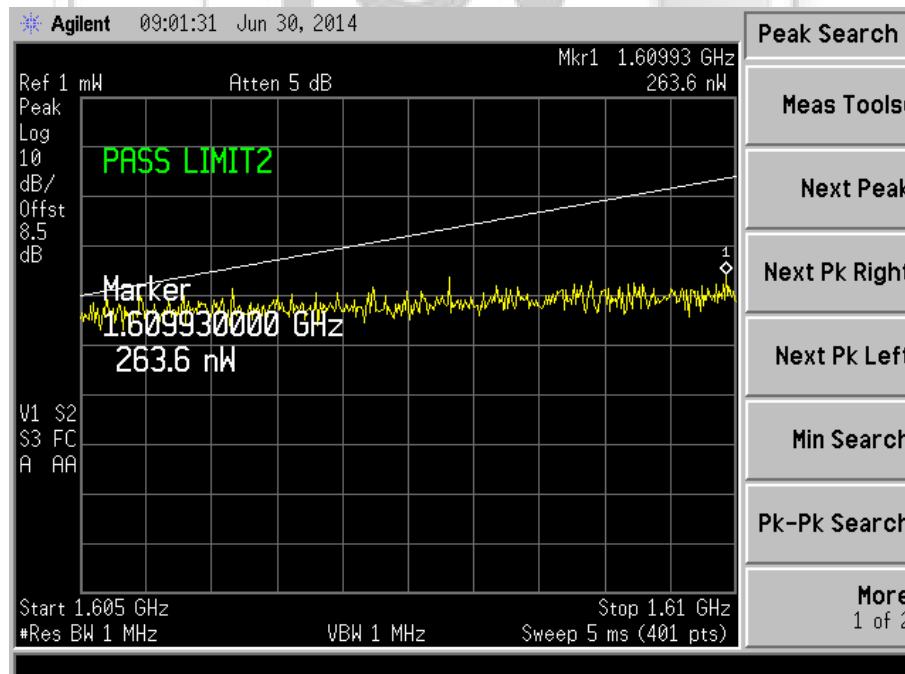

Plot 108 – Middle Channel

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST


Type Bearer: 2 - Transmitter On

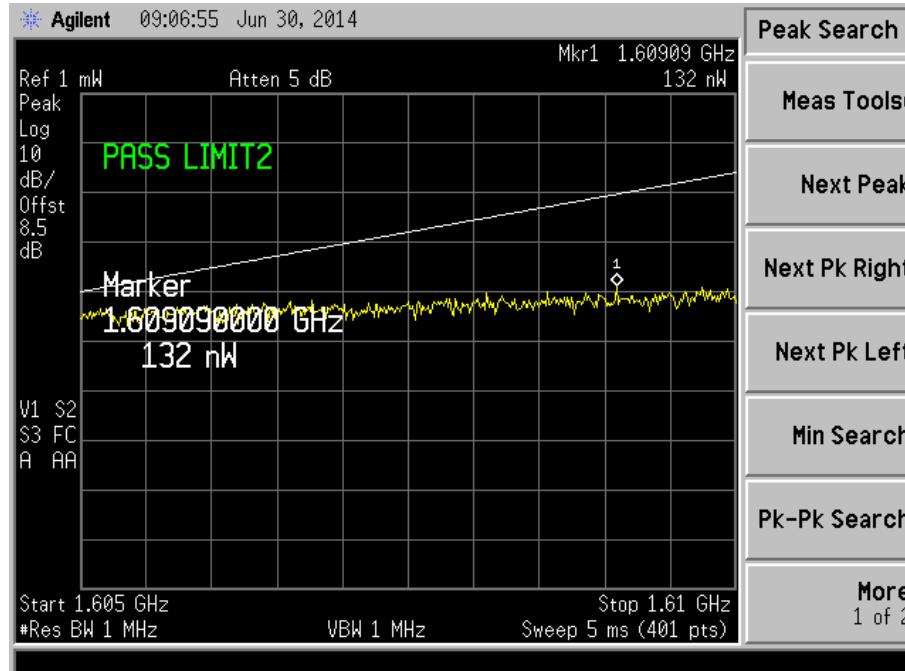


Plot 109 – Upper Channel

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

Carrier Off

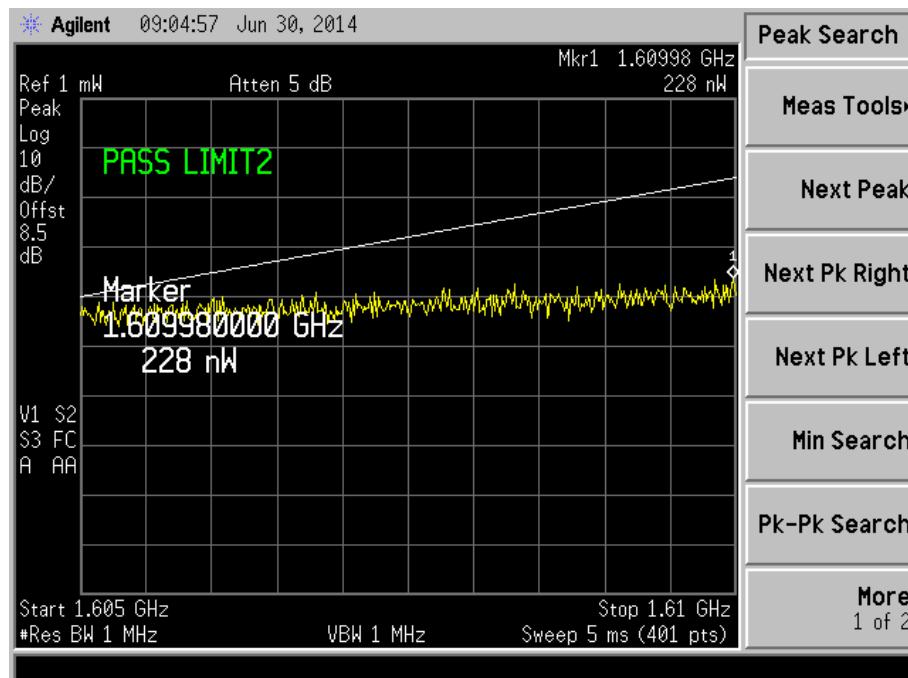


Plot 110 – Lower Channel

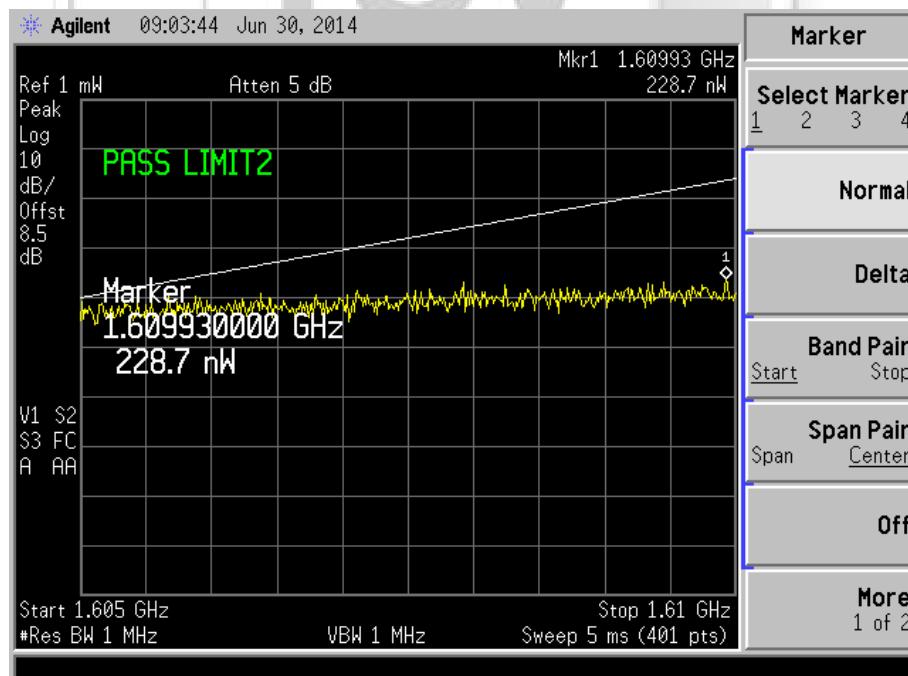

Plot 111 – Middle Channel

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

Carrier Off

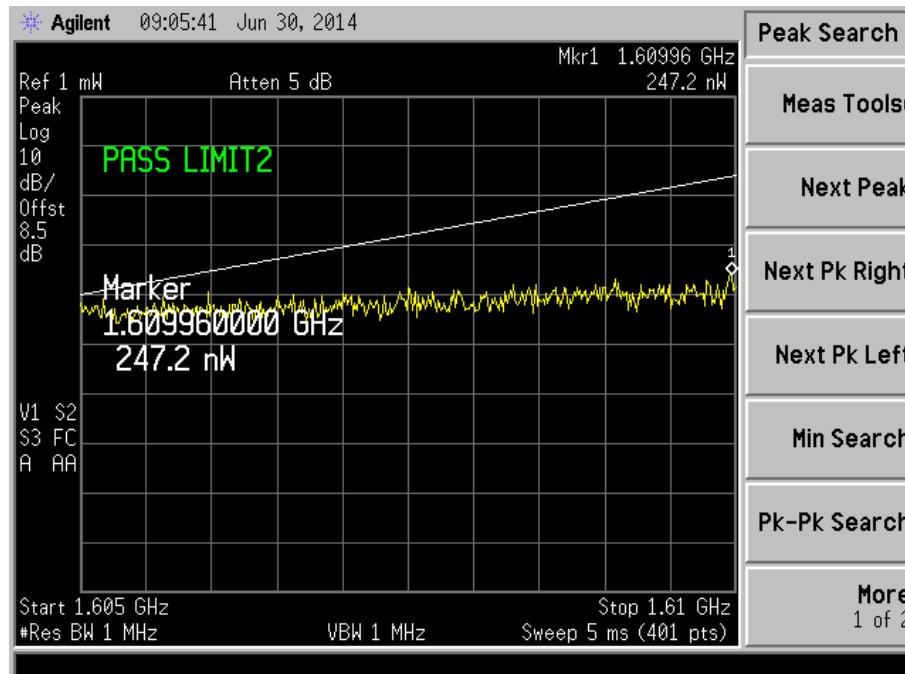

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Limits

1. 25.202(d) Frequency Tolerance, Earth Stations
The carrier frequency of each earth station transmitter authorised in these services shall be maintained within 0.001% (10ppm) of the reference frequency.
2. 2.1055 Measurements Required: Frequency Stability
 - (a) The frequency stability shall be measured with variation of ambient temperature as follows:
 - (1) From -30°C to +50°C for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
 - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at interval of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion of portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.
 - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Microwave Communications Laboratories, Inc. (MCLI) 20dB RF Attenuator	FAS-8-20	Nil	01 Aug 2014	1 year
HP Universal Counter	53132A	3736A06236	13 Dec 2014	1 year
Heraeus-Vötsch Programmable Temp / Humidity Chamber	VLK08/500	Nil	19 Mar 2015	1 year

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Setup

1. The EUT and supporting equipment were set up as shown in the test setup photo. A temperature-controlled chamber was used.
2. The EUT was connected to an appropriate power source while all other supporting equipment were powered separately from another power source.
3. The RF antenna connector of the EUT was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Method

1. The temperature chamber was set at 20°C and permitted to stabilize. The EUT was set to transmit at lower channel without modulation. The carrier frequency was measured as the reference frequency.
2. With the EUT power removed, the temperature of the temperature chamber was set to -30°C and permitted to stabilize.
3. The EUT was turned on and set to operate at lower channel without modulation. The maximum change in the carrier frequency was recorded within a minute.
4. The EUT was powered off and the temperature was raised to -20°C.
5. The EUT was left stabilized for at least an hour before next measurement was taken as described in step 3.
6. The steps 4 and 5 were repeated with increment of temperature in 10°C step until the temperature reached 50°C.
7. The steps 1 to 6 were repeated with the EUT was set to operate at the middle and upper channels respectively.

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Results

Operating Mode	Continuous Satellite Transmission	Temperature	See table below
Test Input Power	120V 60Hz	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Kway Soe Hein

Lower Channel

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
-30	1.6266004203	1.6266000000	420.300000	+/-16266
-20	1.6266004355	1.6266000000	435.500000	+/-16266
-10	1.6266004316	1.6266000000	431.600000	+/-16266
0	1.6266004515	1.6266000000	451.500000	+/-16266
10	1.6266004716	1.6266000000	471.600000	+/-16266
20	1.6266004263	1.6266000000	426.300000	+/-16266
30	1.6266003493	1.6266000000	349.300000	+/-16266
40	1.6266003248	1.6266000000	324.800000	+/-16266
50	1.6266003351	1.6266000000	335.100000	+/-16266

Middle Channel

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
-30	1.6435004537	1.6435000000	453.700000	+/-16435
-20	1.6435004855	1.6435000000	485.500000	+/-16435
-10	1.6435004631	1.6435000000	463.100000	+/-16435
0	1.6435004980	1.6435000000	498.000000	+/-16435
10	1.6435005155	1.6435000000	515.500000	+/-16435
20	1.6435004721	1.6435000000	472.100000	+/-16435
30	1.6435003800	1.6435000000	380.000000	+/-16435
40	1.6435003510	1.6435000000	351.000000	+/-16435
50	1.6435003490	1.6435000000	349.000000	+/-16435

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Results

Upper Channel

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
-30	1.6604004103	1.660400000	410.300000	+/-16604
-20	1.6604004627	1.660400000	462.700000	+/-16604
-10	1.6604004589	1.660400000	458.900000	+/-16604
0	1.6604004134	1.660400000	413.400000	+/-16604
10	1.6604004846	1.660400000	484.600000	+/-16604
20	1.6604004379	1.660400000	437.900000	+/-16604
30	1.6604003343	1.660400000	334.300000	+/-16604
40	1.6604003058	1.660400000	305.800000	+/-16604
50	1.6604003451	1.660400000	345.100000	+/-16604



FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Limits

1. 25.202(d) Frequency Tolerance, Earth Stations
The carrier frequency of each earth station transmitter authorised in these services shall be maintained within 0.001% (10ppm) of the reference frequency.
2. 2.1055 Measurements Required: Frequency Stability
 - (a) The frequency stability shall be measured with variation of ambient temperature as follows:
 - (1) From -30°C to +50°C for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
 - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at interval of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion of portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.
 - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Instrumentation

Instrument	Model	S/No	Cal Due Date	Cal Interval
Microwave Communications Laboratories, Inc. (MCLI) 20dB RF Attenuator	FAS-8-20	Nil	Output Monitor	1 year
HP Universal Counter	53132A	3736A06236	05 Apr 2015	1 year
Heraeus-Vötsch Programmable Temp / Humidity Chamber	VLK08/500	Nil	16 Mar 2015	1 year


FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Setup

1. The EUT and supporting equipment were set up as shown in the test setup photo. A temperature-controlled chamber was used.
2. The EUT was connected to an appropriate power source while all other supporting equipment were powered separately from another power source.
3. The RF antenna connector of the EUT was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Method

1. The temperature chamber was set at 20°C and permitted to stabilize. The EUT was set to transmit at lower channel without modulation. The carrier frequency was measured as the reference frequency.
2. The EUT was powered from 85% of the nominal supplied voltage and set to operate at lower channel without modulation.
3. The EUT power was varied from 85% to 115% of the nominal supplied voltage. The carrier frequency variation was recorded.
4. The steps 1 to 3 were repeated with the EUT was set to operate at the middle and upper channels respectively.

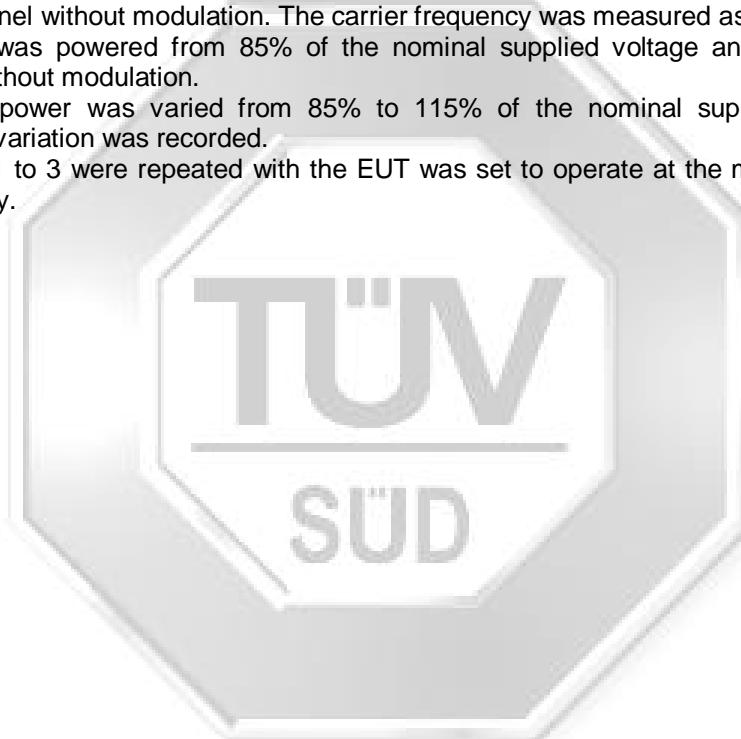

FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

47 CFR FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Results

Operating Mode	Continuous Satellite Transmission	Temperature	20°C
Test Input Power	See table below	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Kway Soe Hein

Lower Channel

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
15.3	1.6266005011	1.6266000000	501.100000	+/-16266
18.0	1.6266005034	1.6266000000	503.400000	+/-16266
20.7	1.6266005038	1.6266000000	503.800000	+/-16266

Middle Channel

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
15.3	1.6435005412	1.6435000000	541.200000	+/-16435
18.0	1.6435005426	1.6435000000	542.600000	+/-16435
20.7	1.6435005432	1.6435000000	543.200000	+/-16435

Upper Channel

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (Hz)	Limit (Hz)
15.3	1.6604005017	1.6604000000	501.700000	+/-16604
18.0	1.6604004915	1.6604000000	491.500000	+/-16604
20.7	1.6604004965	1.6604000000	496.500000	+/-16604

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

47 CFR FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30

Notes

1. f = frequency in MHz
2. Plane wave equivalent power density

47 CFR FCC Part 1.1310 Maximum Permissible Exposure Computation

For a power density of 10W/m², the distance from the EUT was computed by the following formula:

where $S = (30GP) / (377d^2)$
 $S = \text{Power density, } 10\text{W/m}^2$
 $P = 1.738\text{W (maximum peak measured from Maximum Peak Power)}$
 $d = \text{Test distance in metre}$
 $G = \text{Numerical isotropic gain, } 7.08 \text{ (8.5dBi)}$

Substituting the relevant parameters into the formula:

$S = [(30GP) / 377d^2]$
 $d = \sqrt{[(30GP) / 377S]}$
 $d = 0.32\text{m}$

∴ The EUT and the user must be separated at a distance of 0.32m in order to achieve the 10W/m² requirement based on the above computation.



PSB Singapore

Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011






PSB Singapore

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS



ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

TEST SETUP

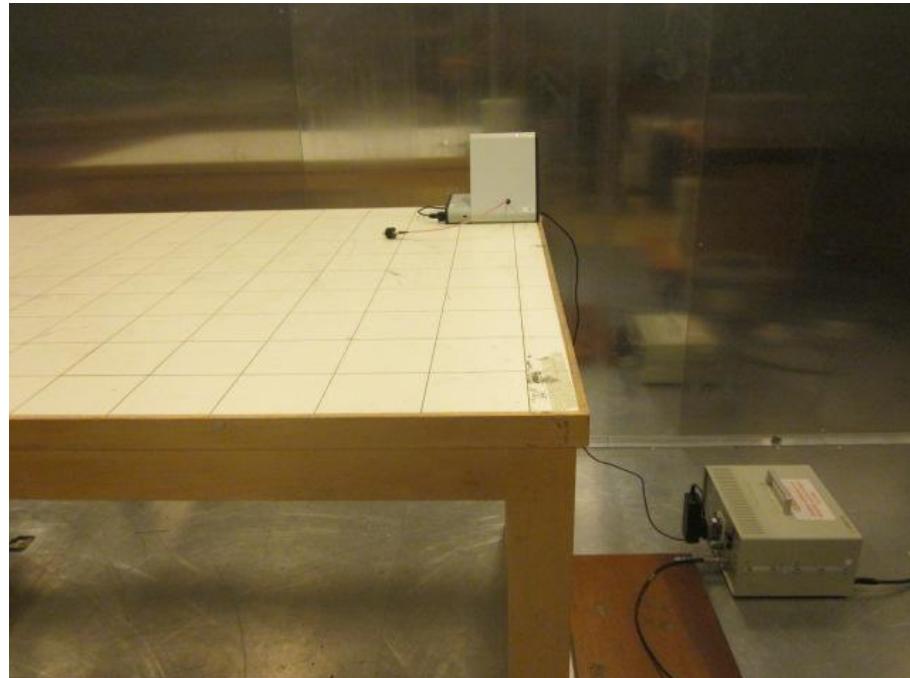

Conducted Emissions Test Setup (Front View)




Conducted Emissions Test Setup (Rear View)

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

TEST SETUP



Radiated Emissions Test Setup (Front View)

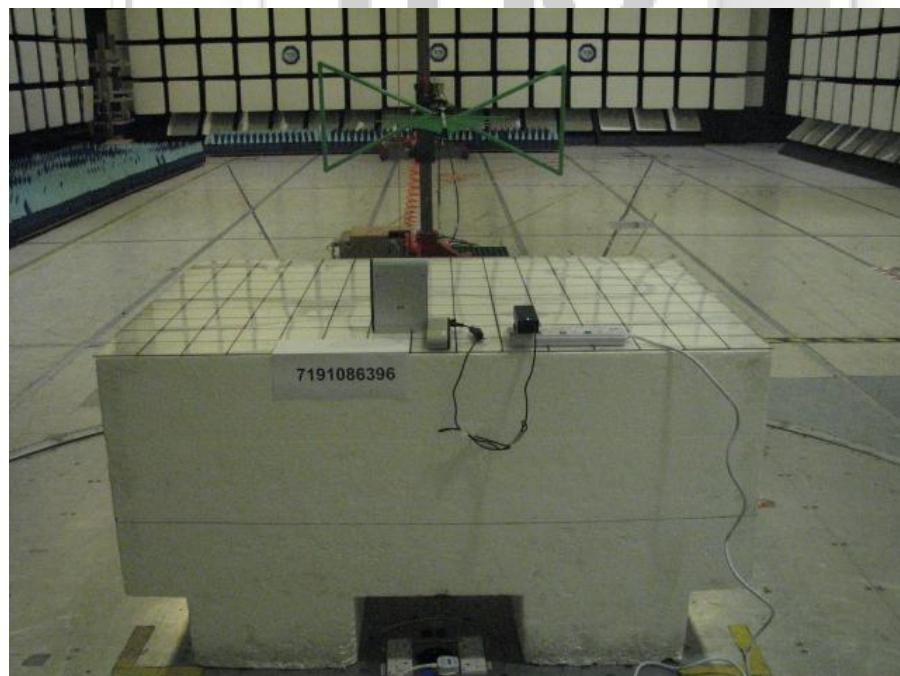

Radiated Emissions Test Setup (Rear View)

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

TEST SETUP




RF Output Power Test Setup




Unwanted Emissions at Antenna Terminal Test Setup

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

TEST SETUP

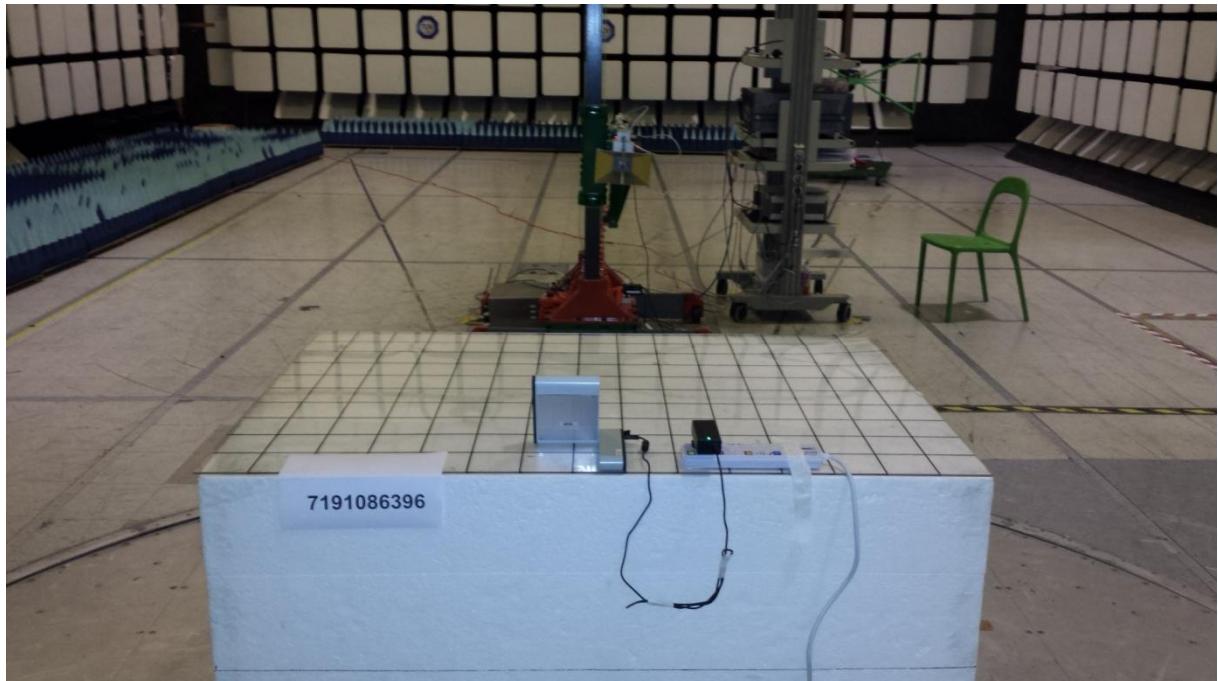

Radiated Spurious Emissions Test Setup (Front View)

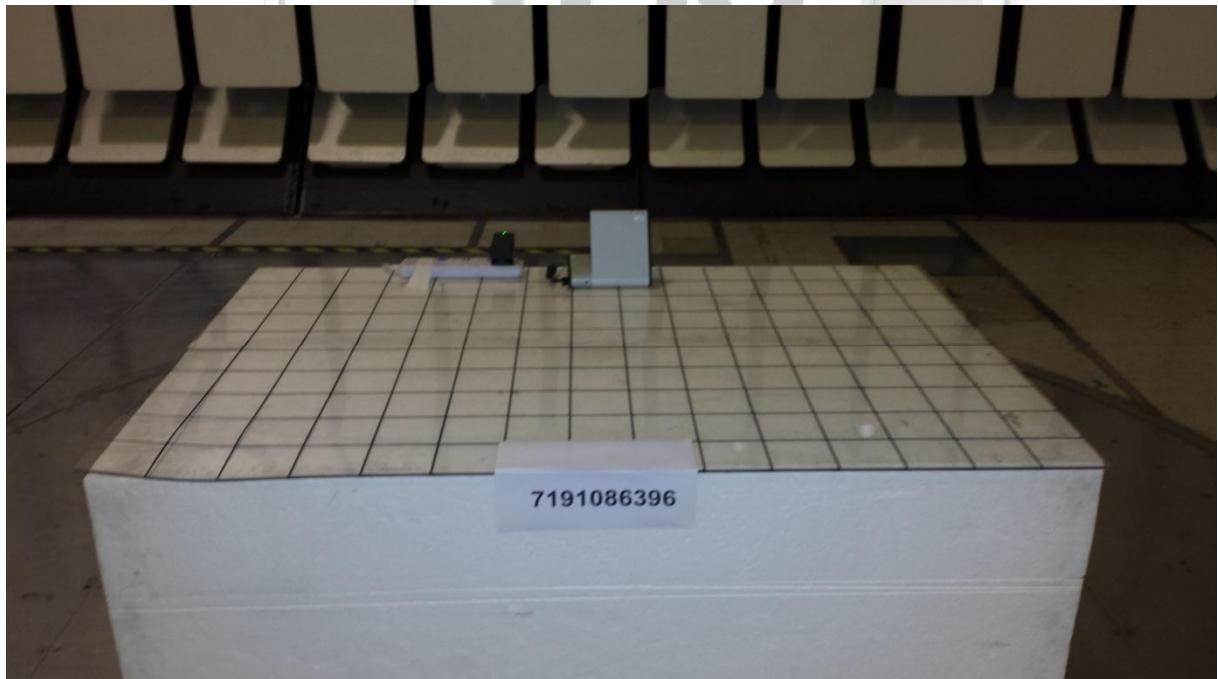


Radiated Spurious Emissions Test Setup (Rear View)

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

TEST SETUP



Protection of Aeronautical Radio Navigation Satellite Service Test Setup (Front View)

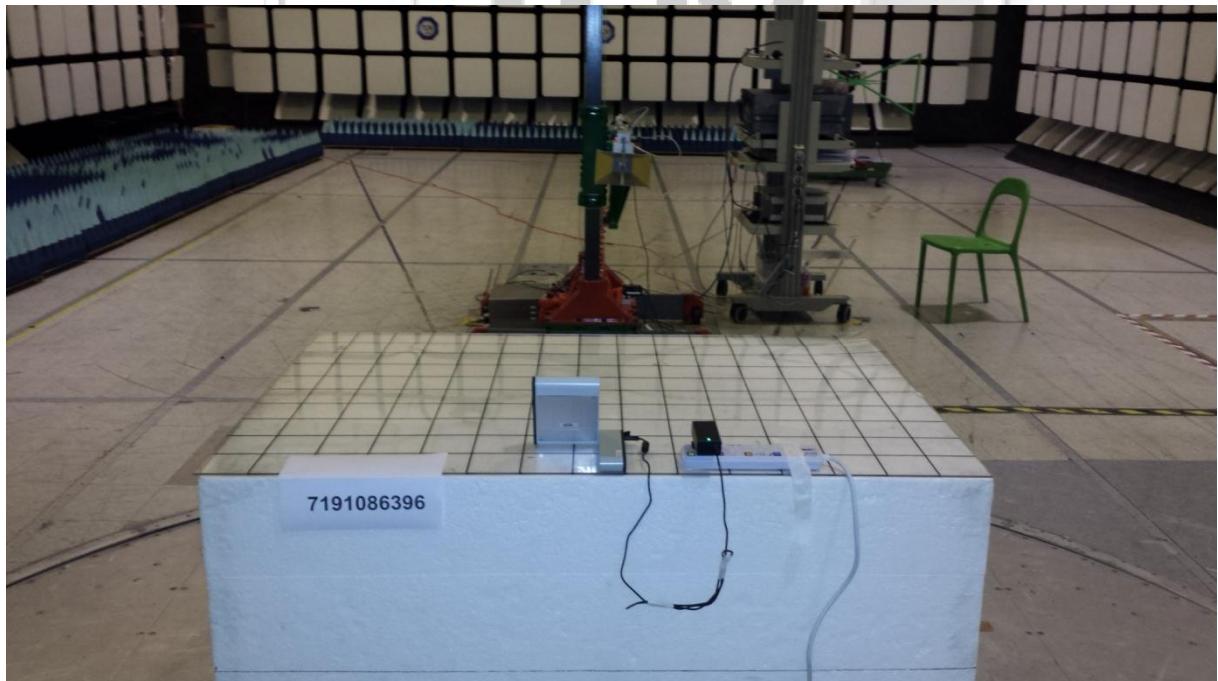

Protection of Aeronautical Radio Navigation Satellite Service Test Setup (Rear View)

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

TEST SETUP




Frequency Stability (Temperature Variation) Test Setup



Frequency Stability (Voltage Variation) Test Setup

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

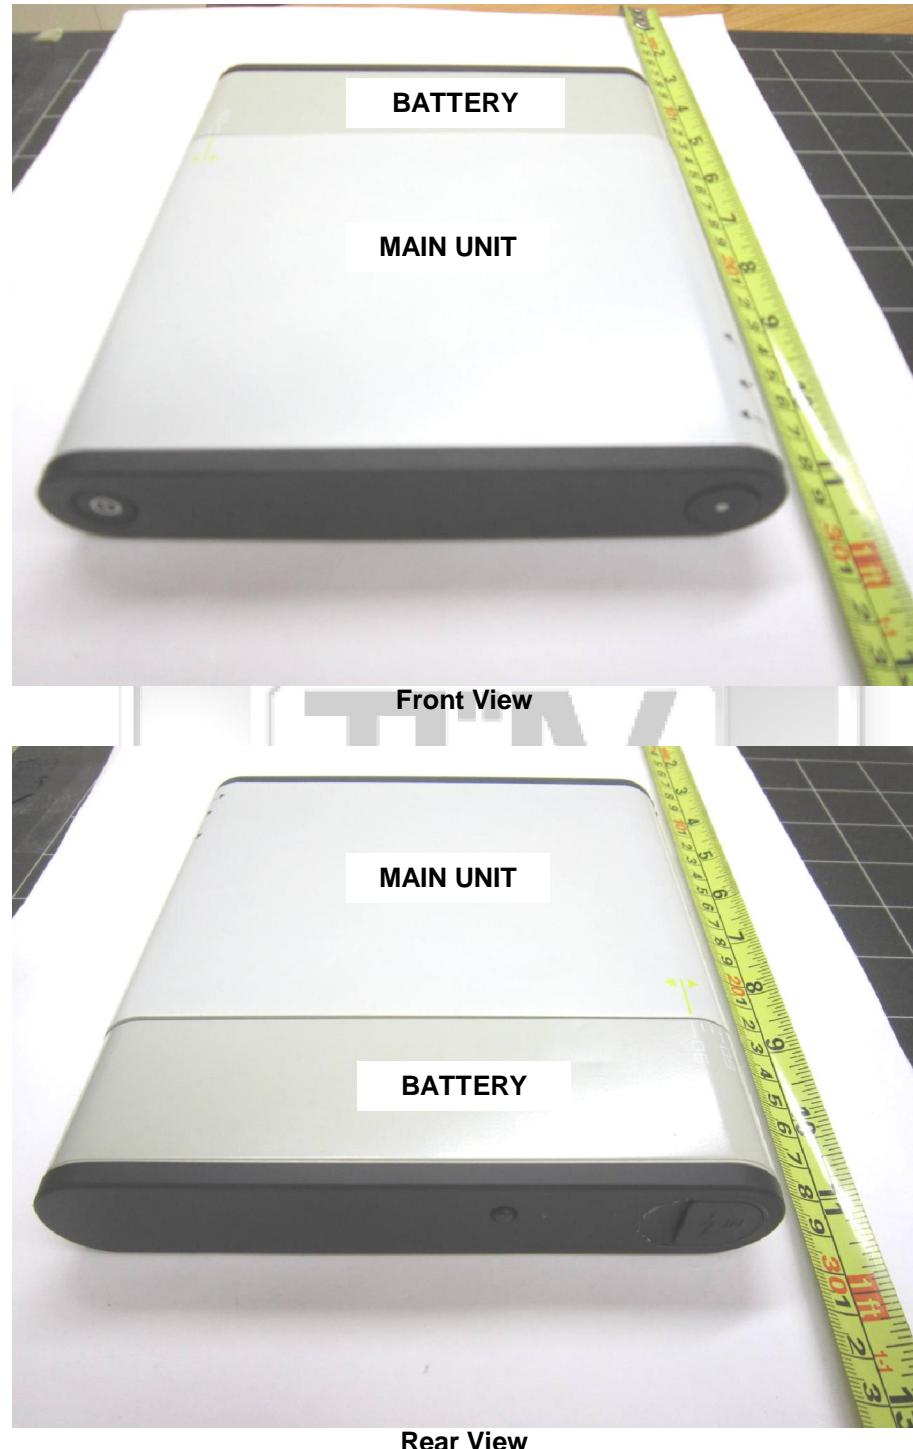

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS




Front View



Rear View

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

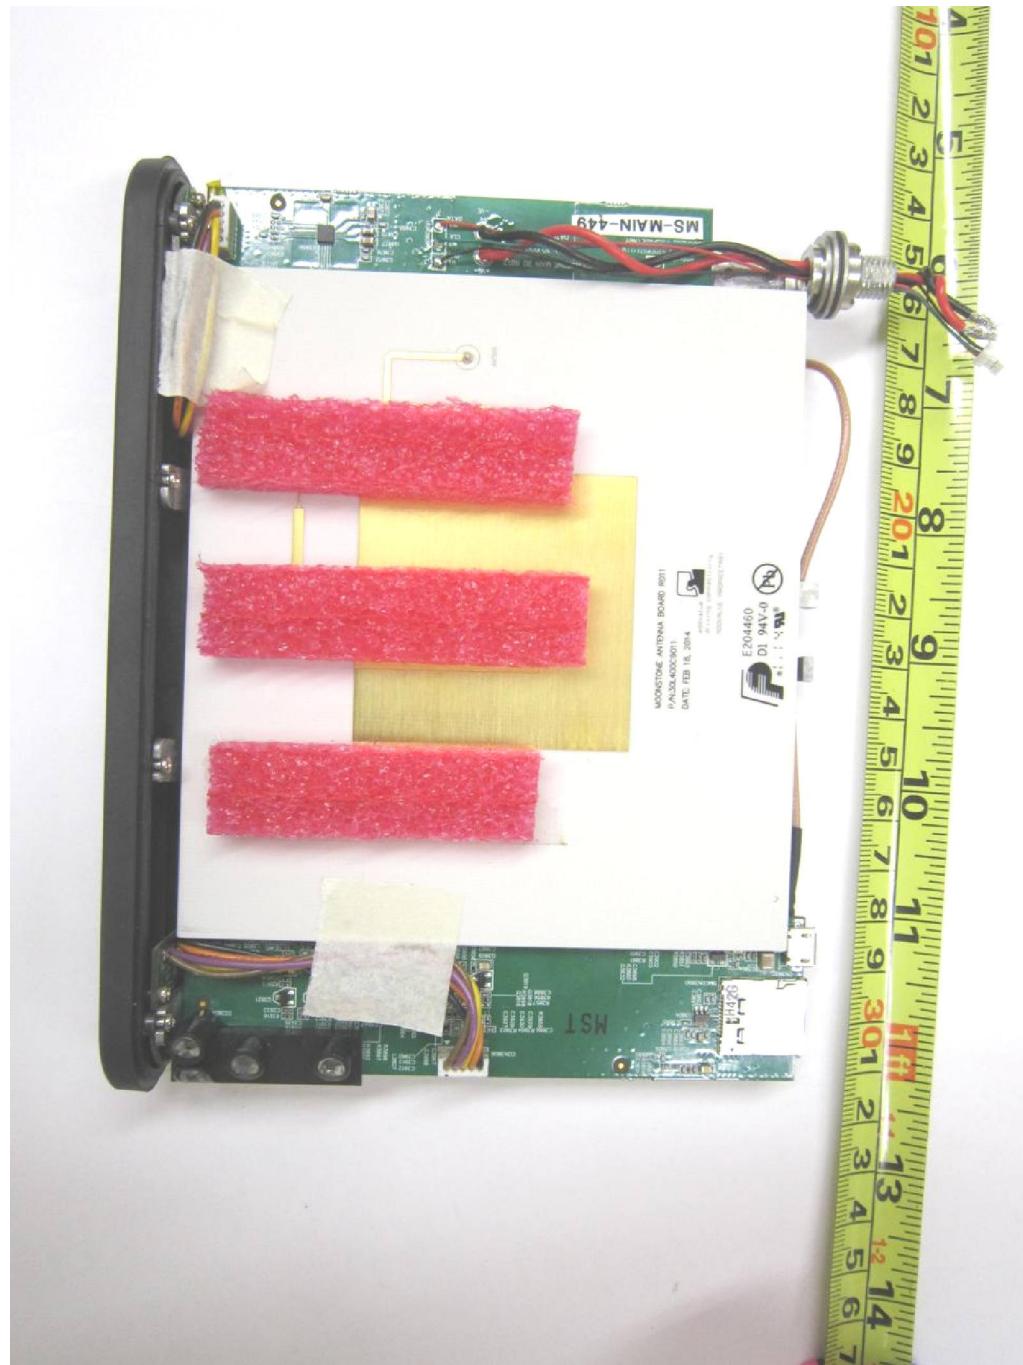

EUT Internal View 1

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

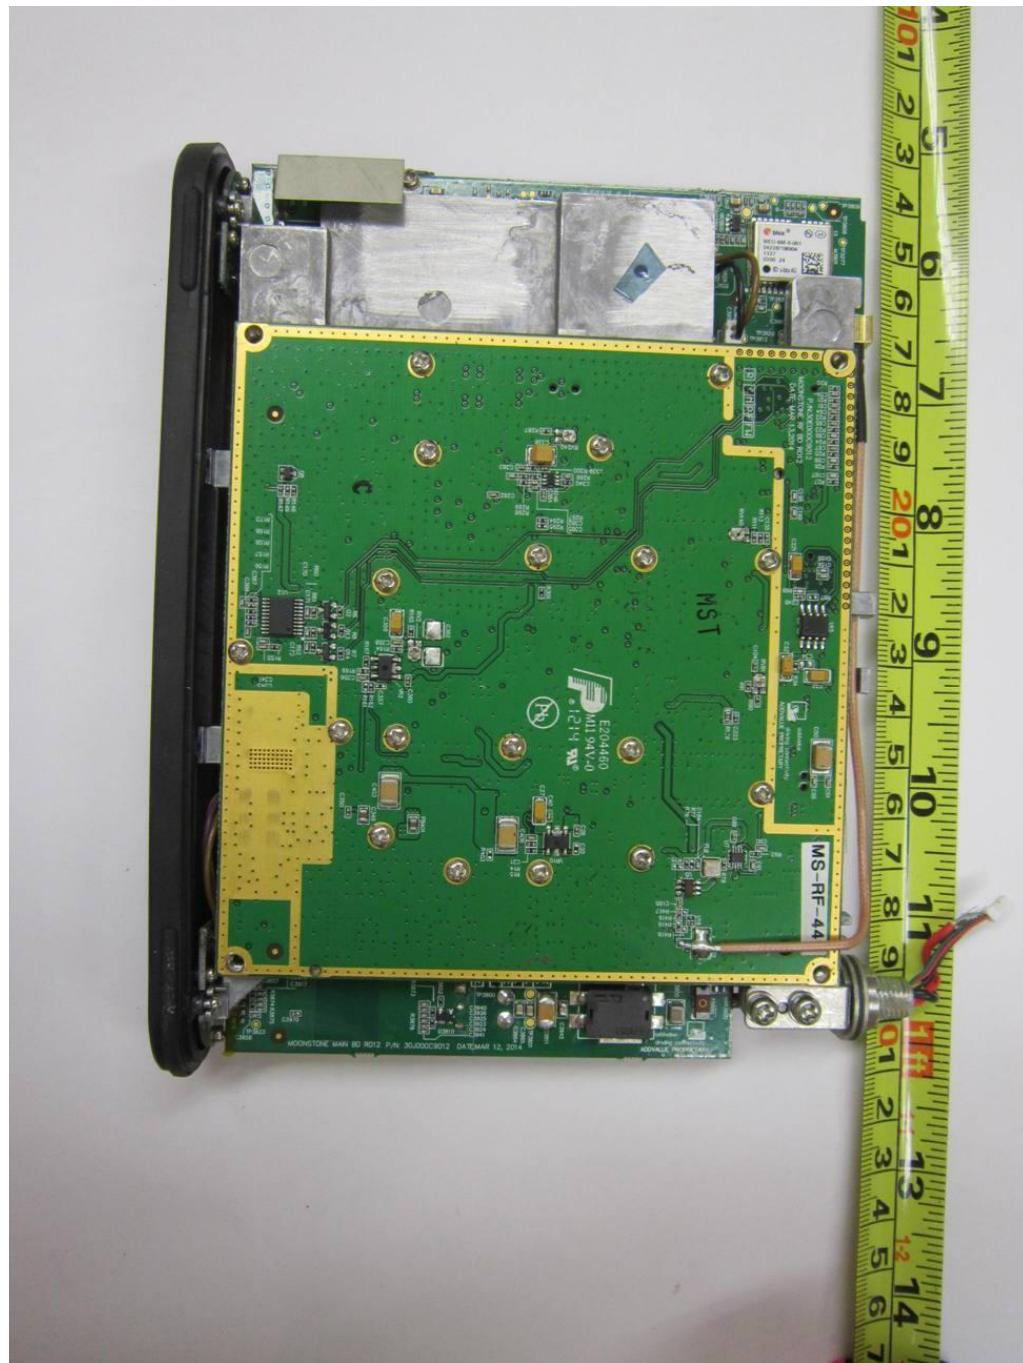

EUT Internal View 2

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

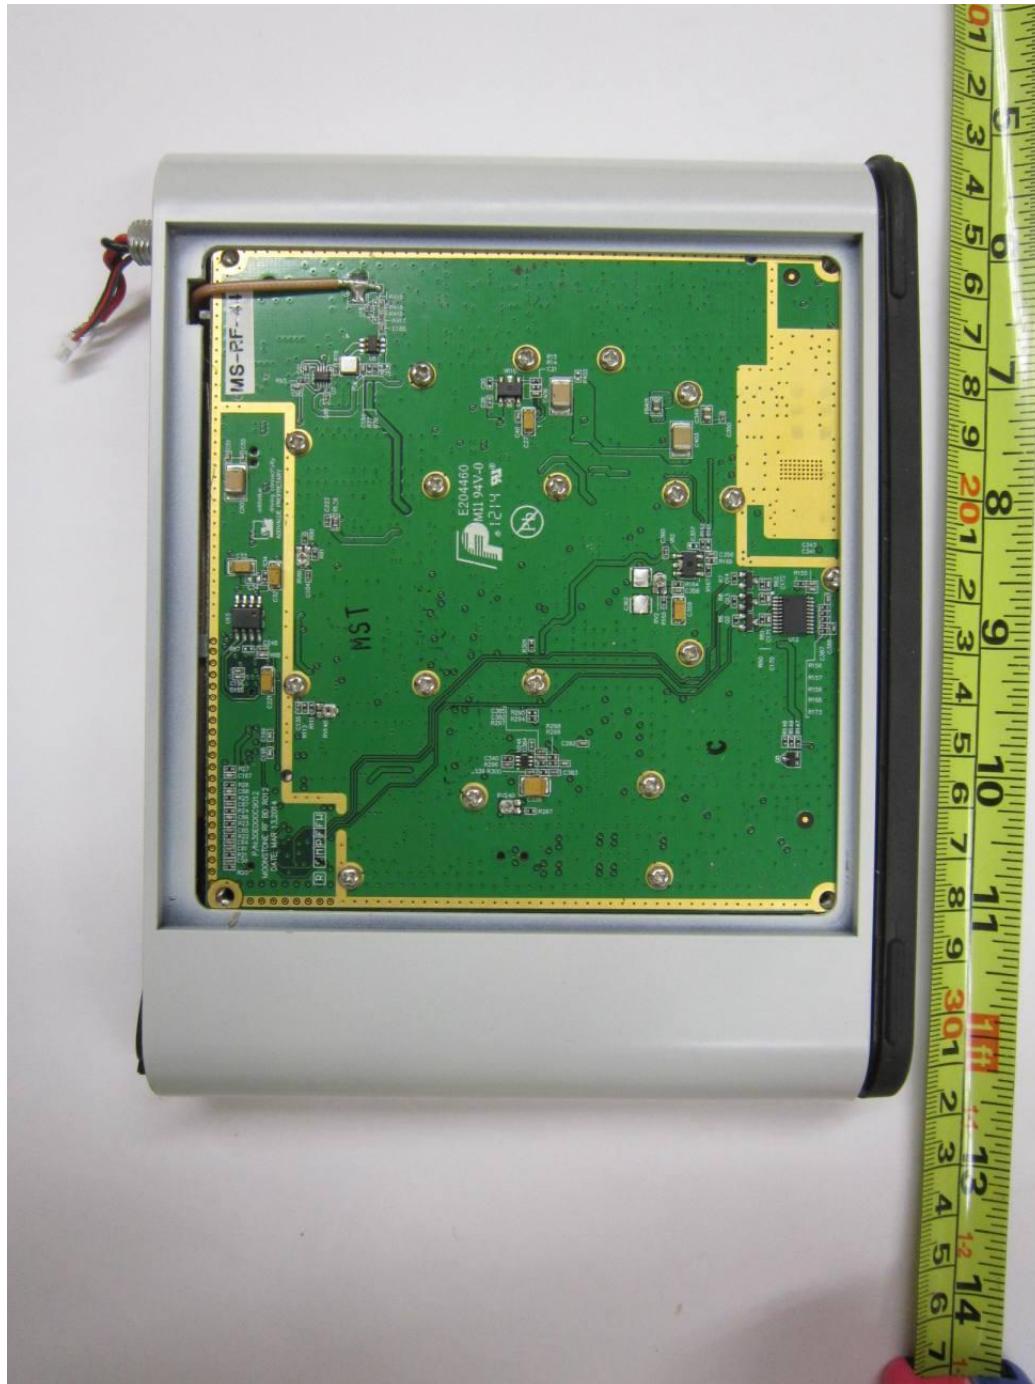

EUT Internal View 3


ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

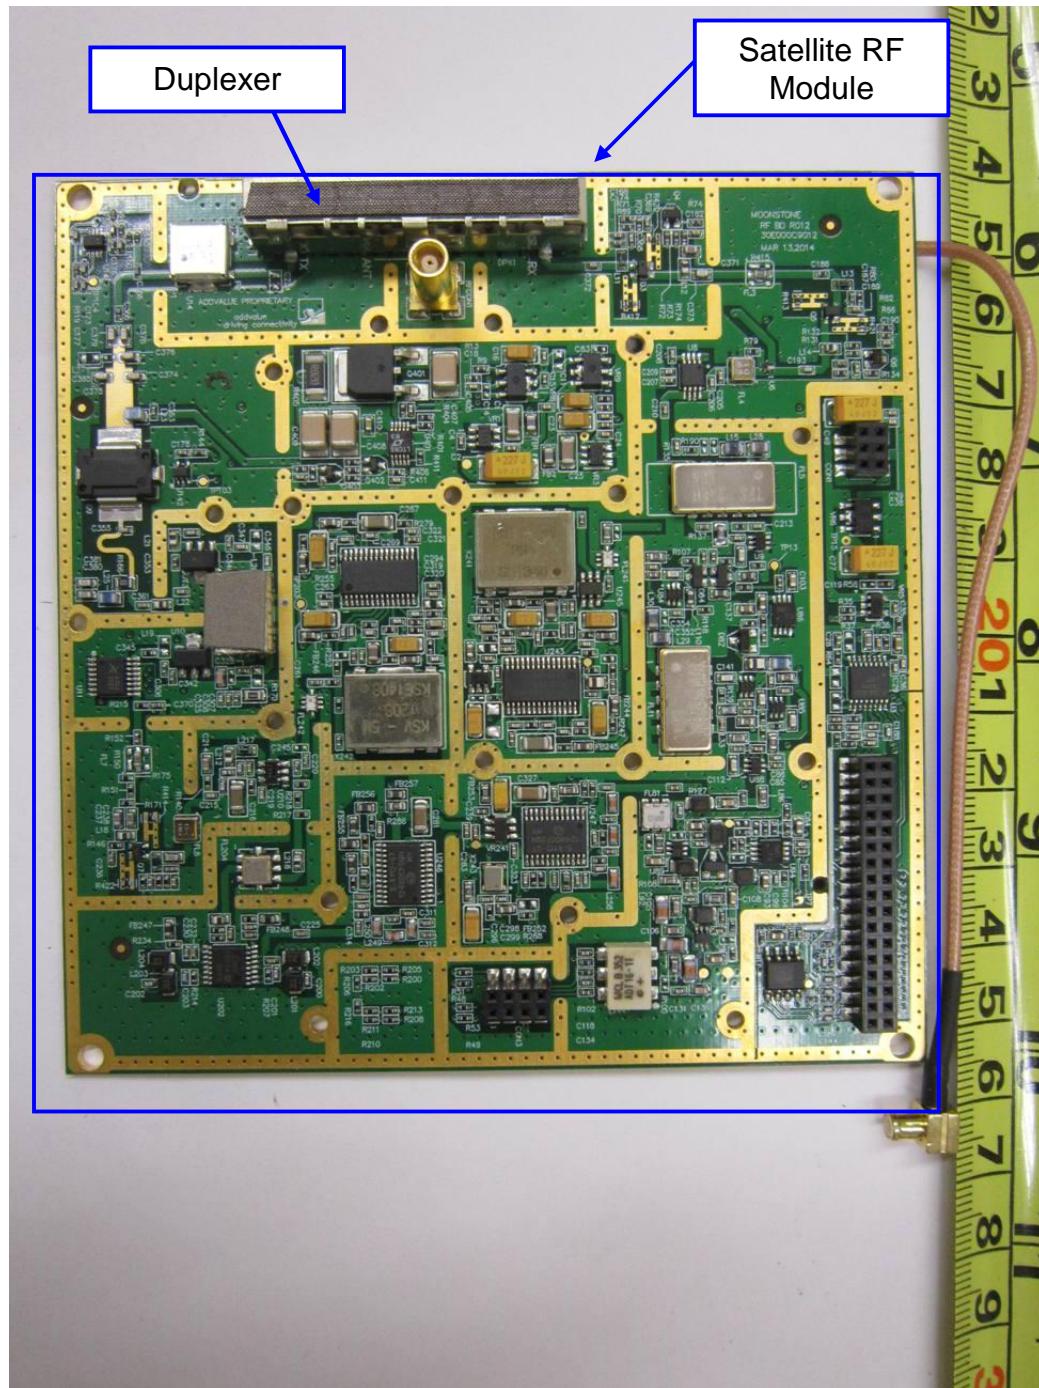

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

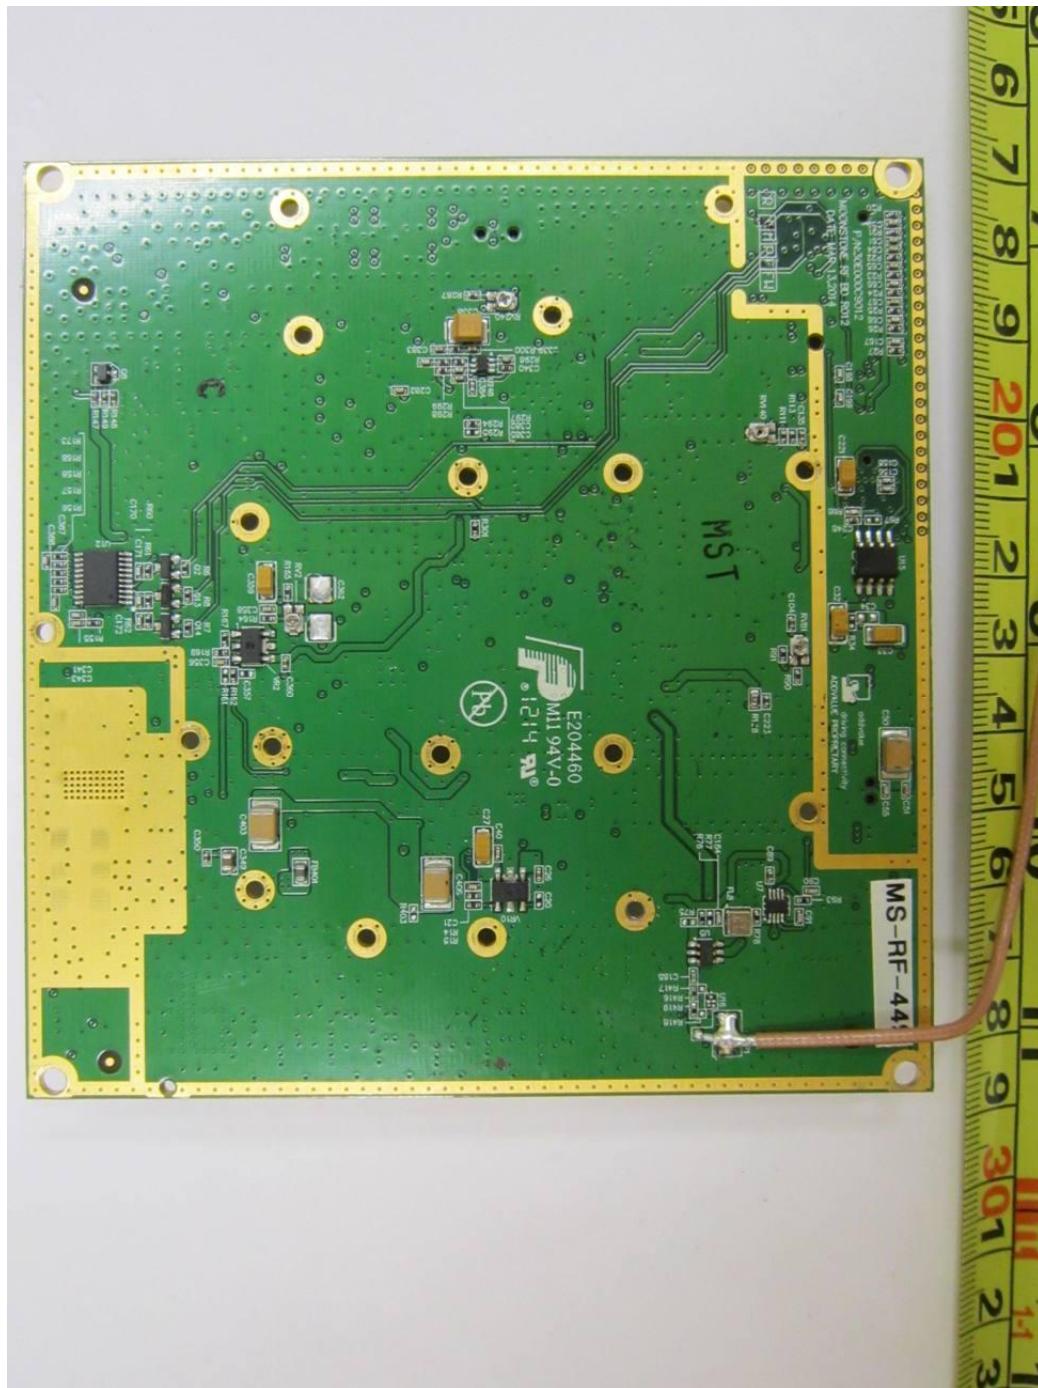

RF PCBA Trace Side

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

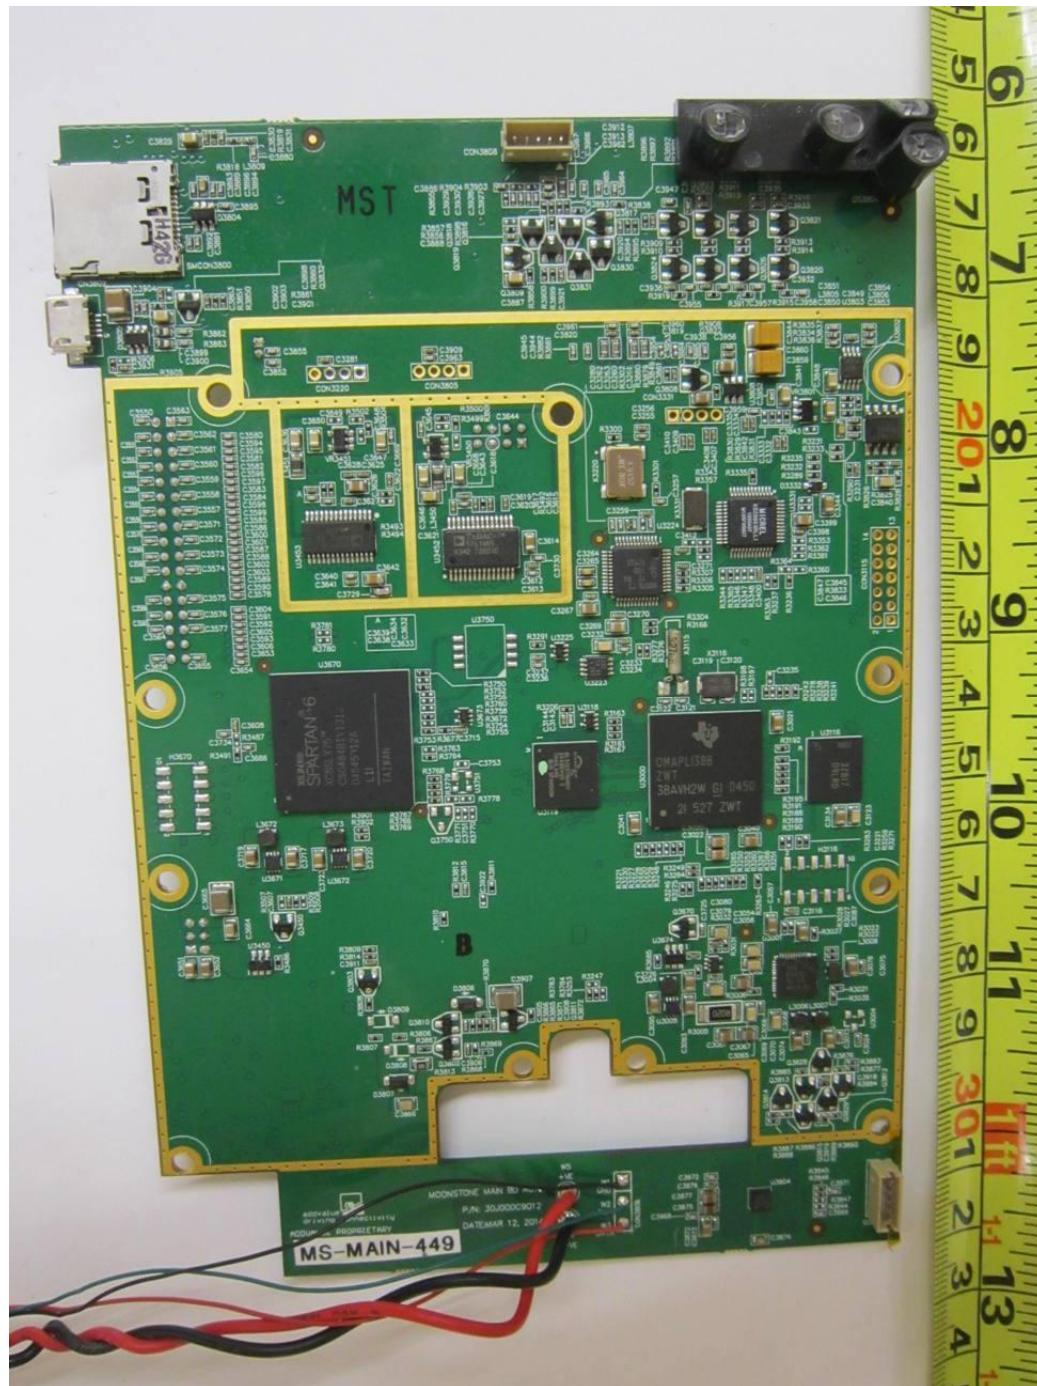

Base-Band PCBA Component Side


ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

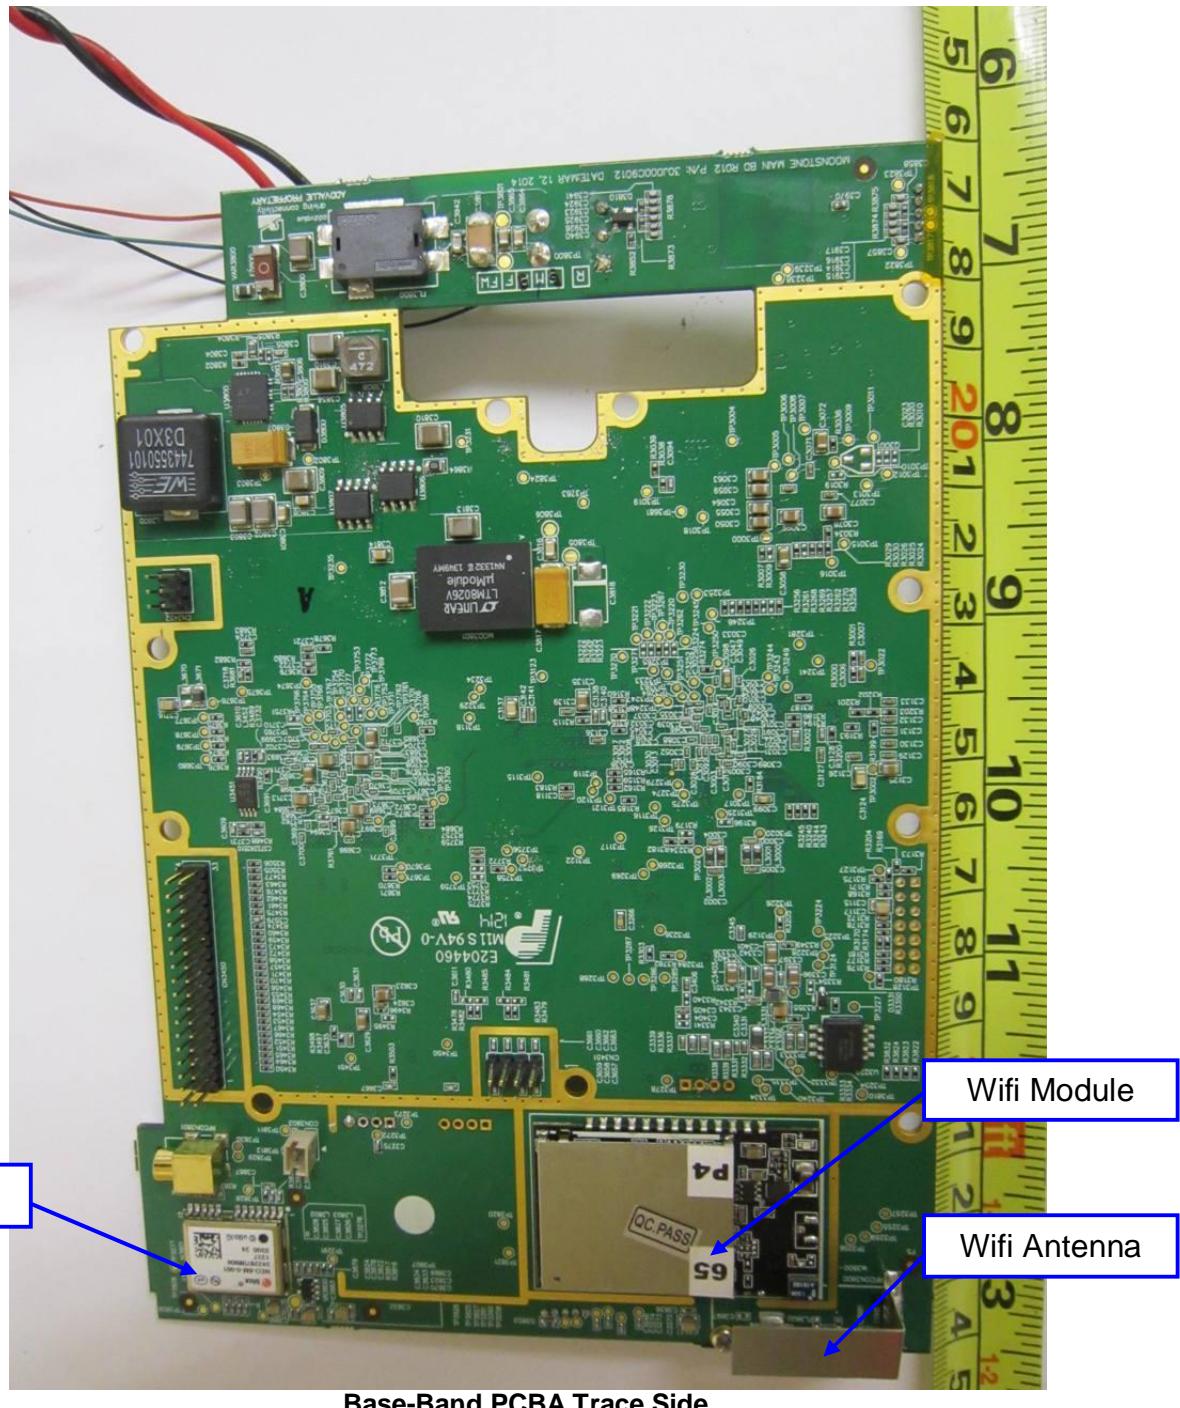

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

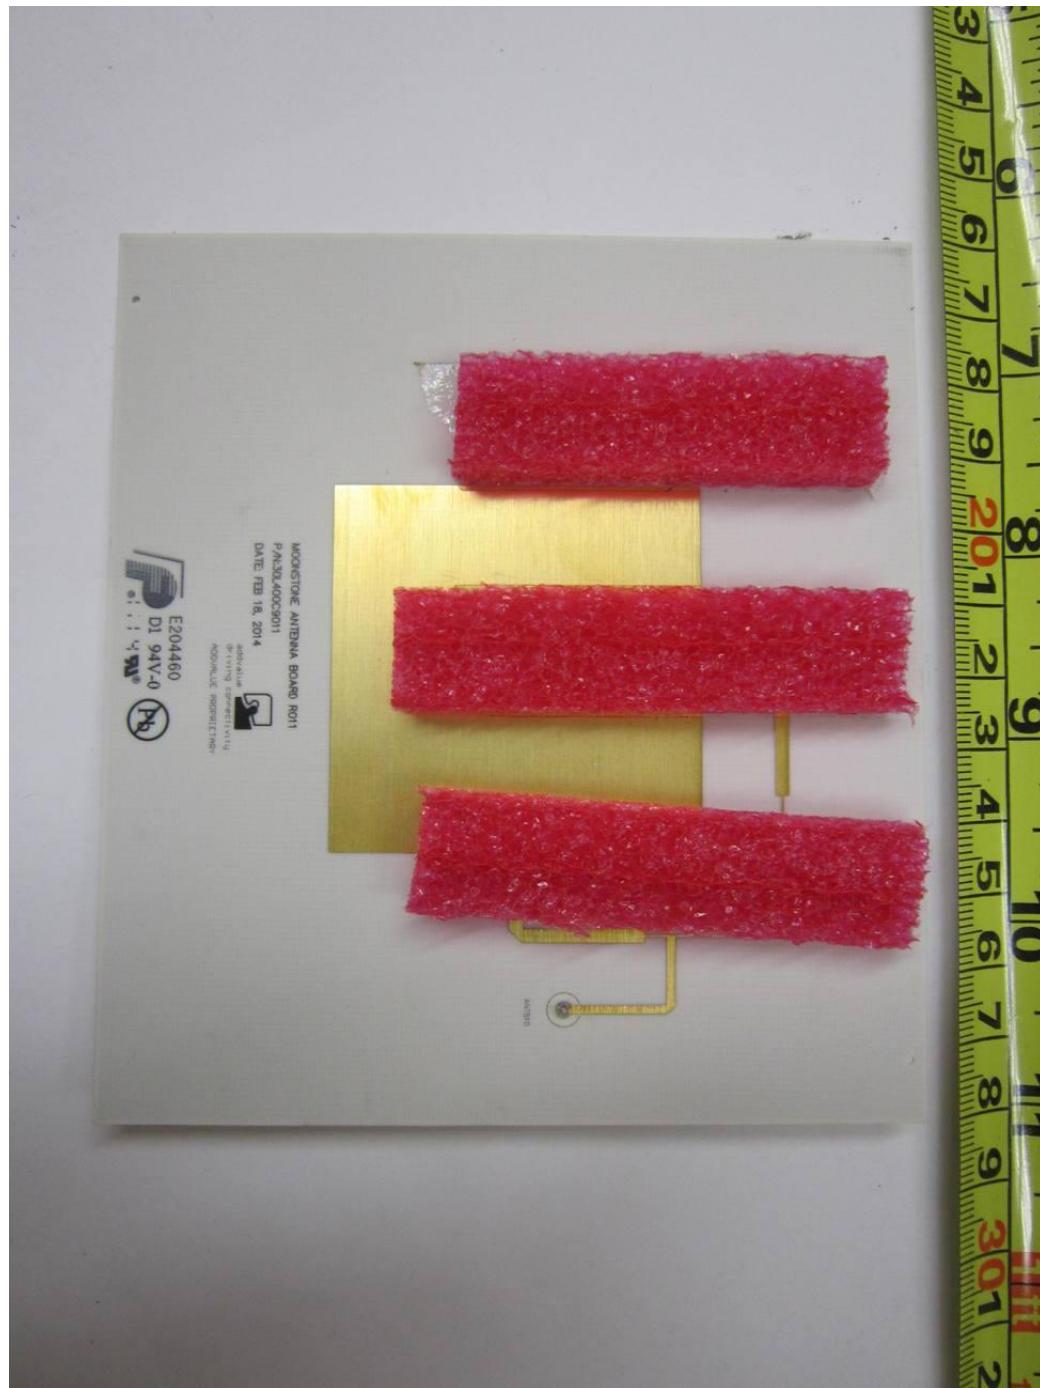

Antenna PCBA Component Side


ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

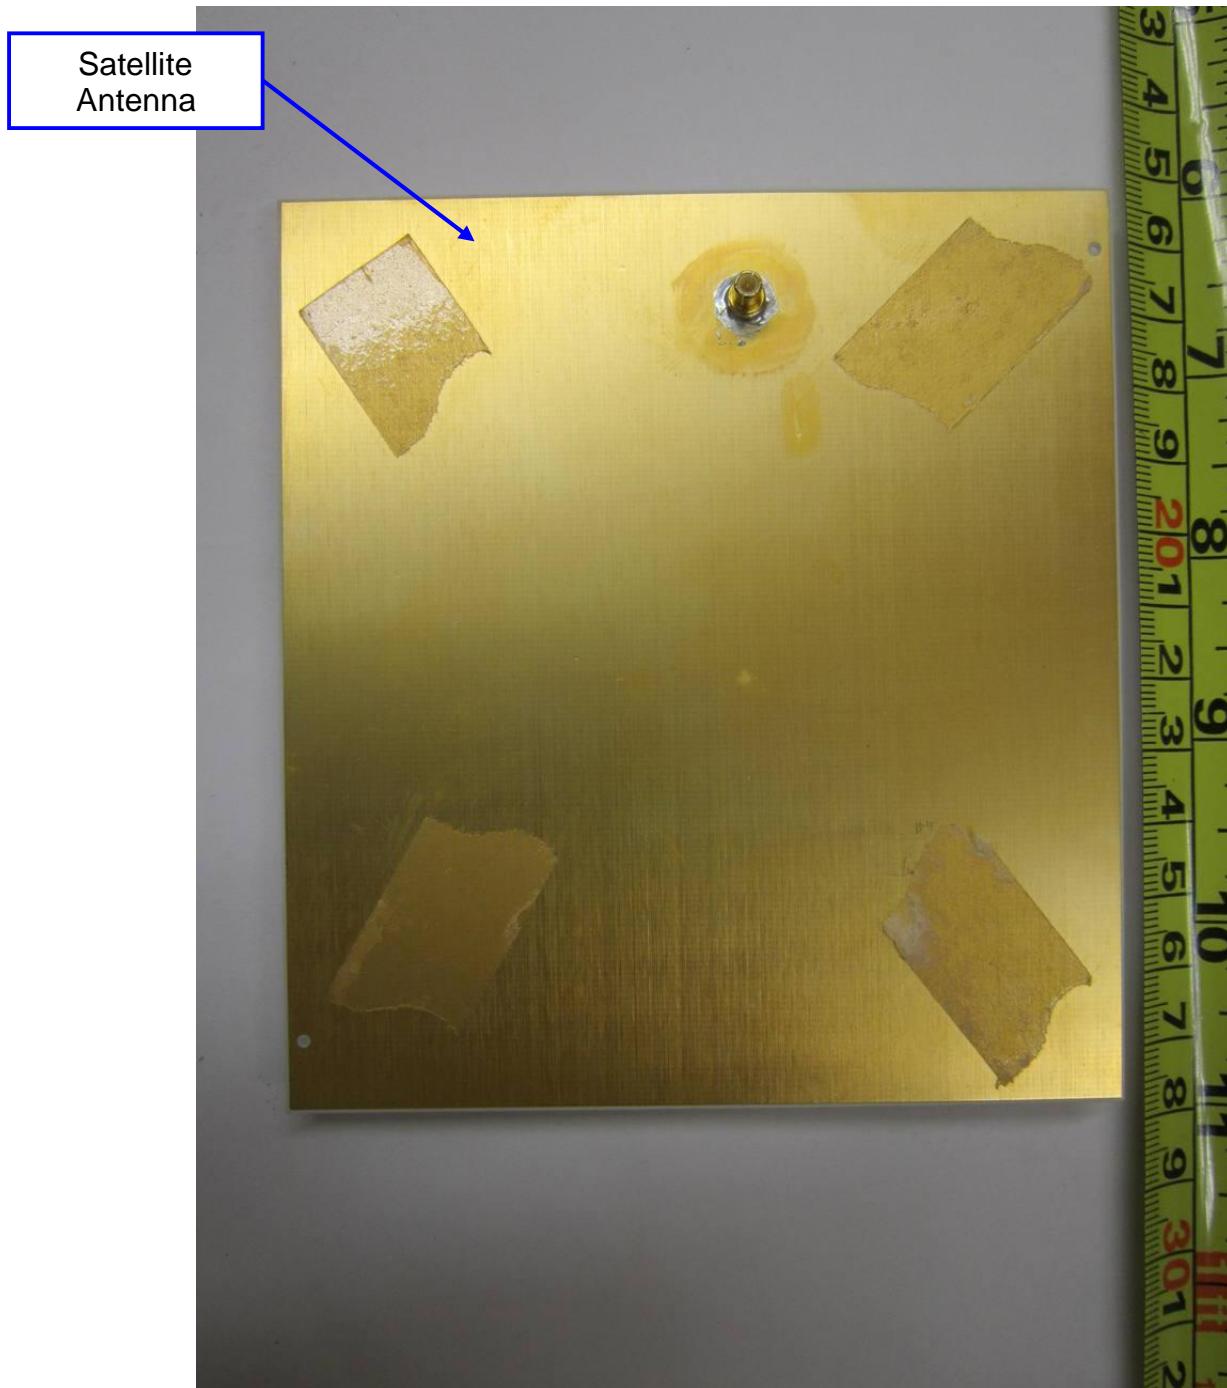

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

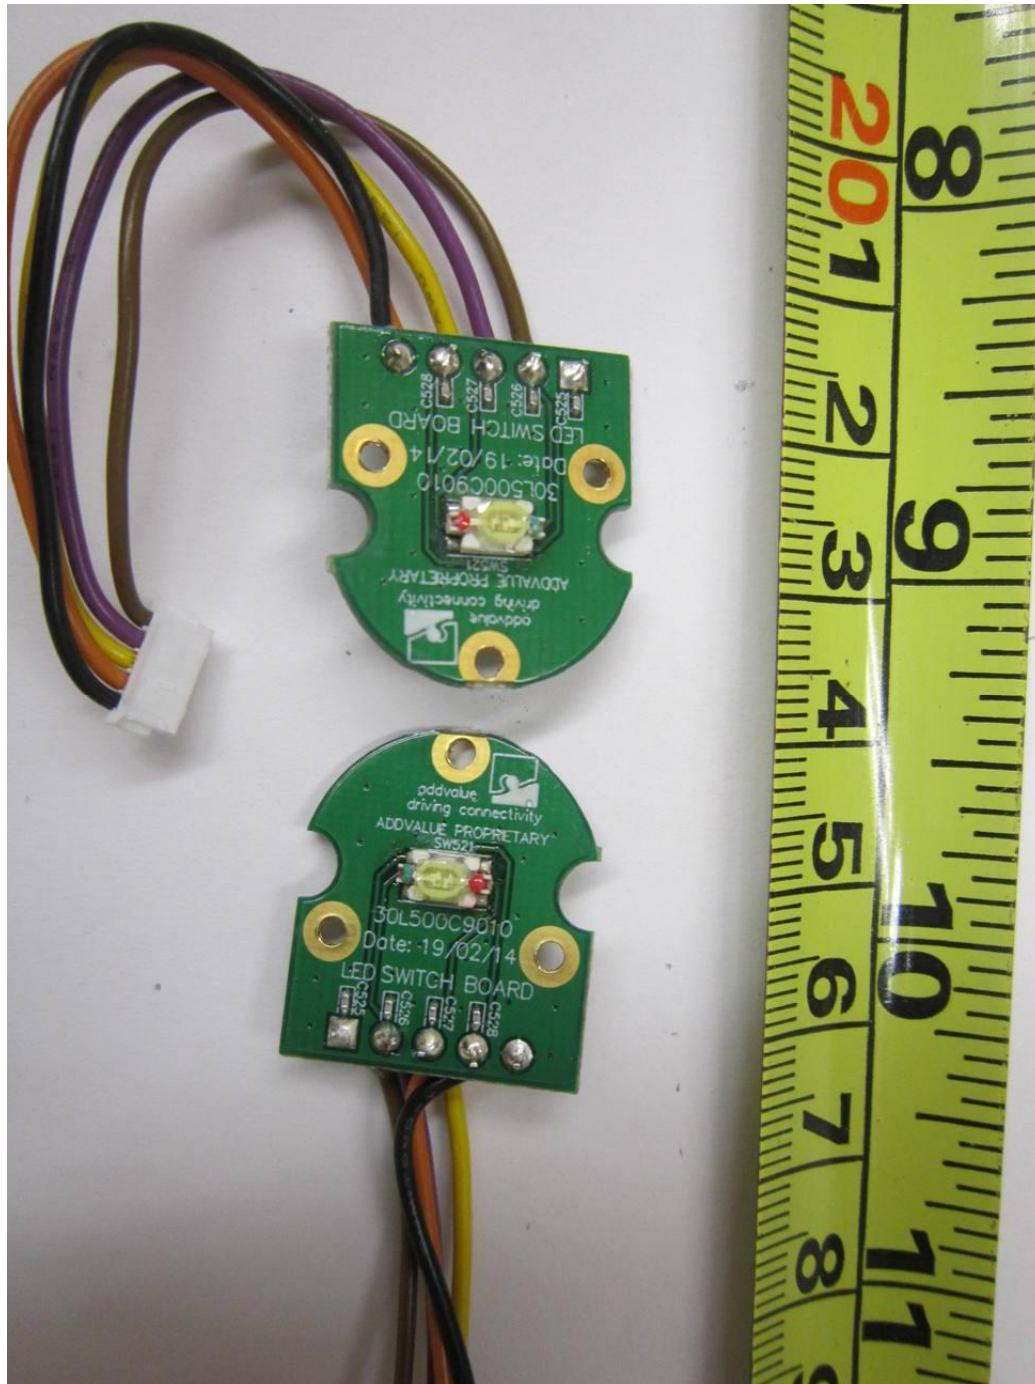

Power Switch & Pointing Mode Switch PCBA Component Side

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

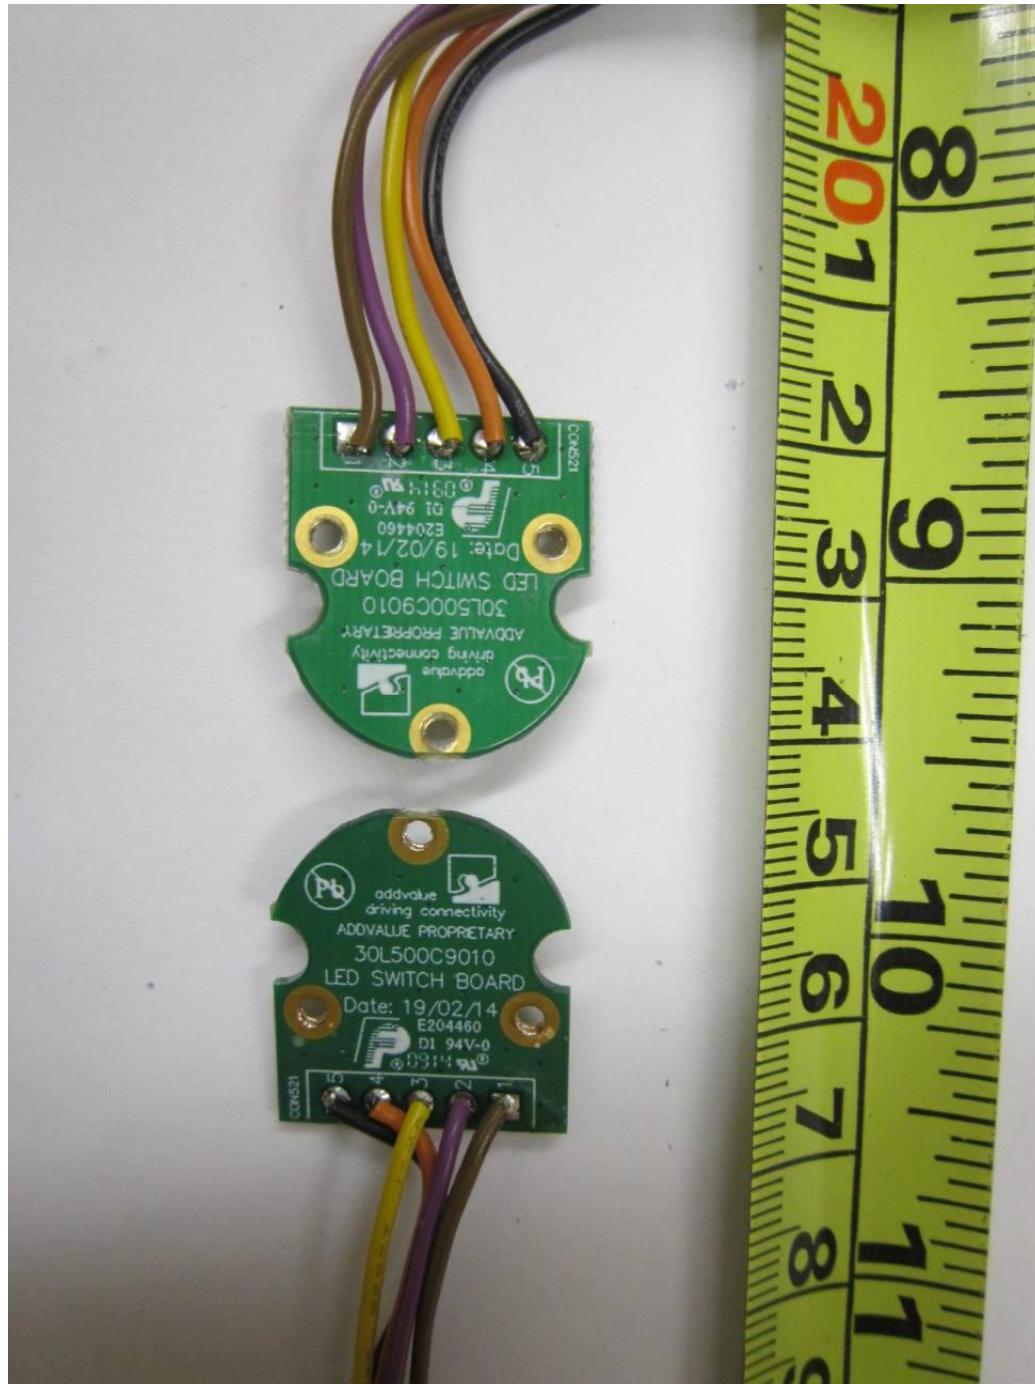

Power Switch & Pointing Mode Switch PCBA Trace Side

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

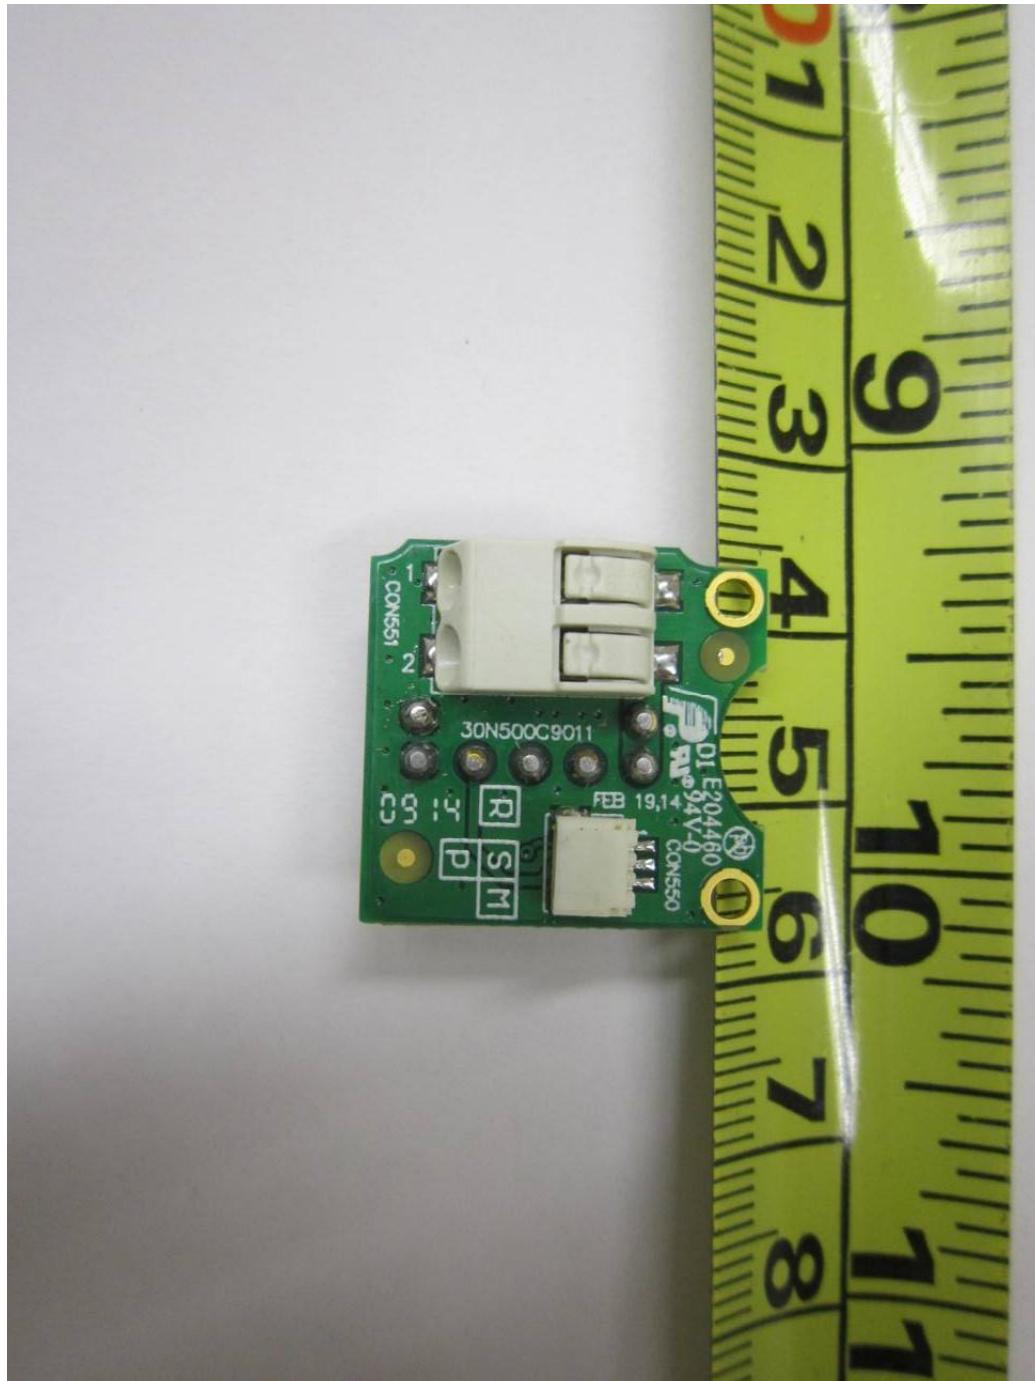

Battery Contact PCBA Component Side

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS



Battery Contact PCBA Trace Side

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

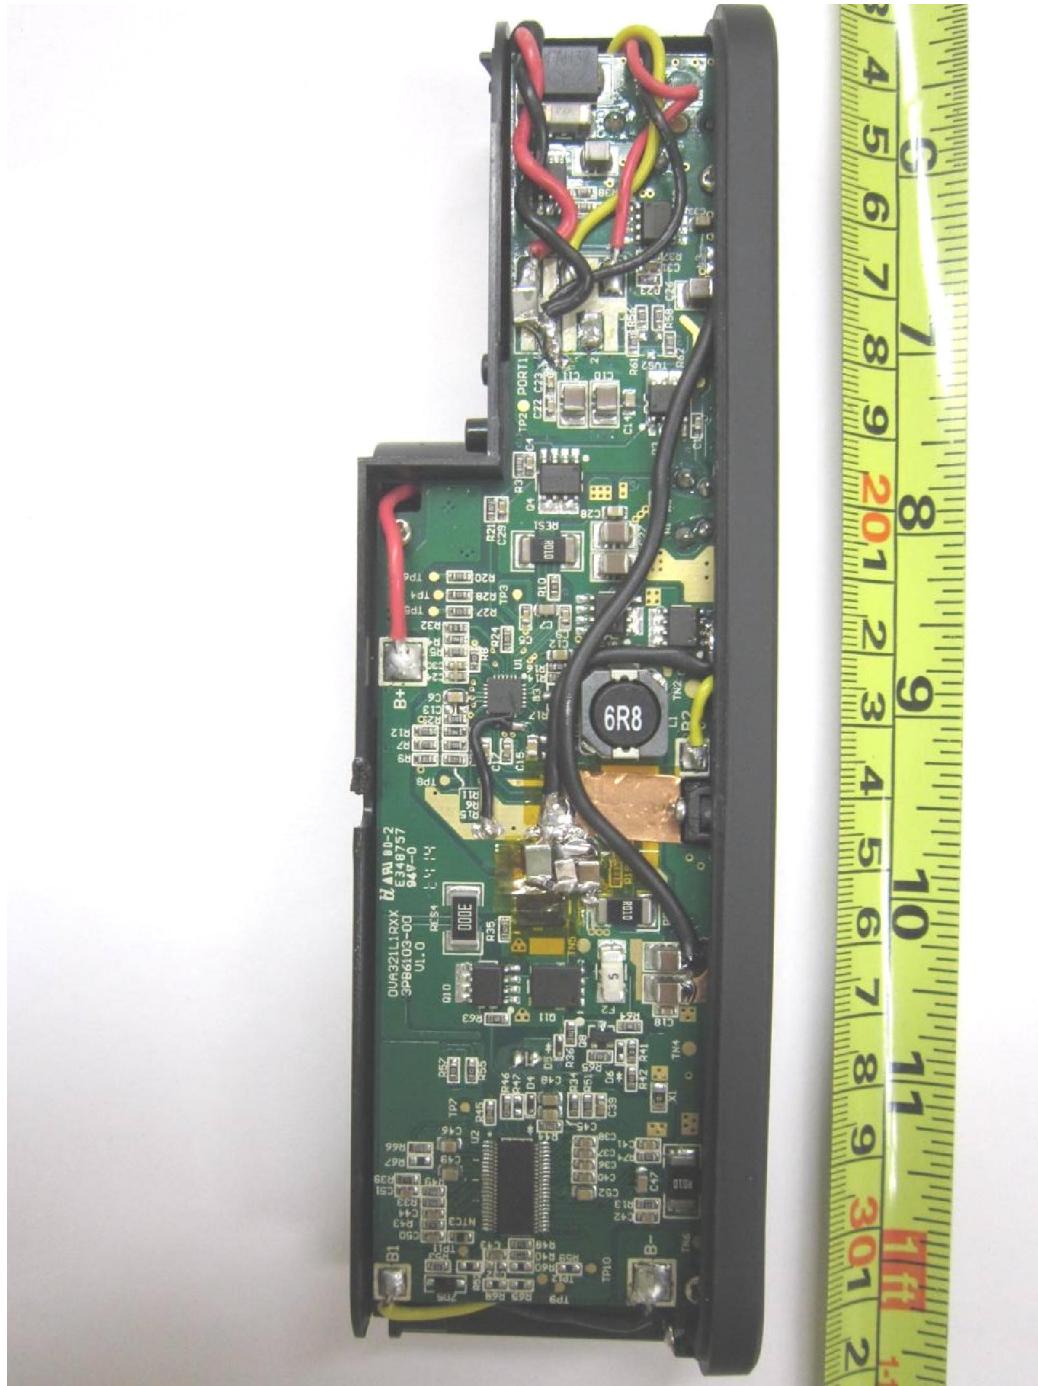

Battery Pack PCBA Component Side

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS



Battery Pack

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

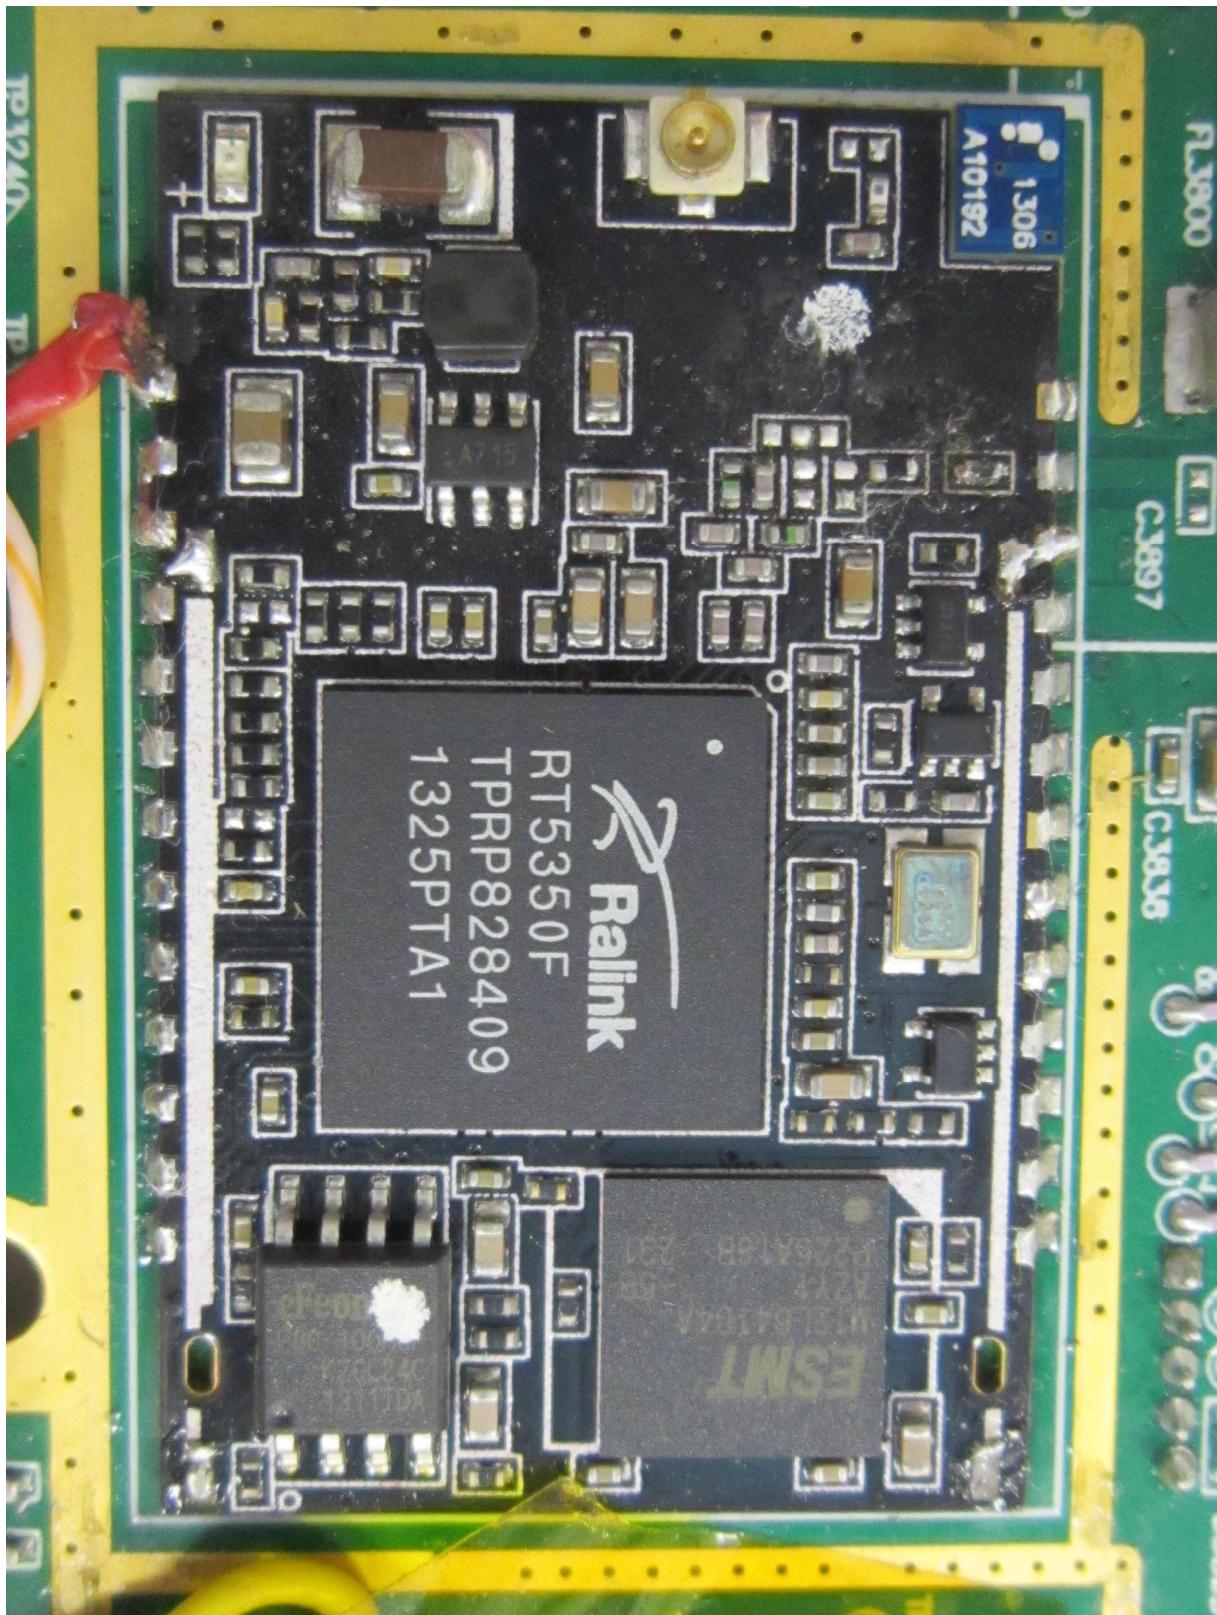

Wifi Module with RF Shield Removed

ANNEX B USER MANUALTECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS





PSB Singapore

ANNEX C FCC LABEL & POSITION



ANNEX C FCC LABEL & POSITION

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

