



TEST REPORT

Report No.:	EM201500260	Application No.:	ZJ201500014-E
Client:	Radio Thermostat Company of America, Inc		
Address:	Unit A 18/F Winner Commercial Building 401-403 Lockhart Road, Wanchai, Hong Kong		
Sample Description:	Thermostat		
Model:	CT110		
FCC ID:	QO8-CT110R1		
Test Specification:	FCC Part 15, Subpart C:2015(15.249)		
Test Date:	2015-03-28 to 2015-06-08		
Issue Date:	2015-06-08		
Test Result:	Pass.		
Prepared By:	Reviewed By:	Approved By:	
Brian Xiao / Test Engineer	Lynn Xiao / Technical Manager	Yong Dai / Manager	
			
Date:2015-06-08	Date:2015-06-08	Date:2015-06-08	
Other Aspects:			
None			
Abbreviations: ok / P = passed; fail / F = failed; n.a. / N = not applicable			
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.			

GRG Metrology and Test Technology Co., Ltd.

Address: 163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, P.R. China

Tel: +86-20-38699960

Fax: +86-20-38695185

Email: emc@grg.net.cn

http://www.grgtest.com

Ver.: 2.0 / 01. Jan. 2011

DIRECTIONS OF TEST

- 1. This station carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.**
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.**
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.**

TABLE OF CONTENTS

1. TEST RESULT SUMMARY	4
2. GENERAL DESCRIPTION OF EUT	5
2.1 APPLICANT	5
2.2 MANUFACTURER	5
2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	5
2.4 TEST OPERATION MODES	5
2.5 LOCAL SUPPORTIVE INSTRUMENTS	5
3. LABORATORY AND ACCREDITATIONS.....	6
3.1 LABORATORY	6
3.2 ACCREDITATIONS	6
3.3 MEASUREMENT UNCERTAINTY.....	6
3.4 LIST OF USED TEST EQUIPMENT AT GRGT	7
4. ANTENNA REQUIREMENT	8
5. EMISSION TEST.....	9
5.1 INTENTIONAL RADIATORS FIELD STRENGTH	9
5.1.1 LIMITS.....	9
5.1.2 TEST PROCEDURE	9
5.1.3 TEST SETUP	10
5.1.4 TEST RESULTS	11
5.2 RADIATED ELECTROMAGNETIC DISTURBANCE.....	15
5.2.1 LIMITS.....	15
5.2.2 TEST PROCEDURES.....	15
5.2.3 TEST SETUP	17
5.2.4 TEST RESULTS	18
5.3 OUT OF BAND EMISSIONS	26
5.3.1 LIMITS.....	26
5.3.2 TEST PROCEDURES.....	26
5.3.3 TEST SETUP	27
5.3.4 TEST RESULTS	28
5.4 CONDUCTED EMISSION MEASUREMENT	32
5.4.1 LIMITS.....	32
5.4.2 TEST PROCEDURES.....	32
5.4.3 TEST SETUP	33
5.4.4 TEST RESULTS	33
APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT.....	34

1. TEST RESULT SUMMARY

FCC Part 15,Subpart C:2015(15.249)			
Standard	Item	Limit / Severity	Result
FCC Part 15,Subpart C:2015(15.249)	Antenna Requirement	FCC Part 15.203	PASS
	Intentional radiators Field Strength	FCC Part 15.249(a)	PASS
	Radiated Electromagnetic Disturbance	FCC Part 15.249 (e)	PASS
	Conduction Emissions	/	N/A(Note)
	Out of Band Emissions	FCC Part 15.249(d)	PASS

Note: The EUT is own DC 3.0V battery supply

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name: Radio Thermostat Company of America, Inc
Address: Unit A 18/F Winner Commercial Building 401-403 Lockhart Road,
Wanchai, Hong Kong

2.2 MANUFACTURER

Name: ZhuHai Herald Datanetics Limited
Address: No.1 PingXi Road 6. Nanping Science and Technology Industrial Park,
Zhuhai, Guangdong, China

2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Thermostat
Model No.: CT110
Trade Name: Radio Thermostat
Power Supply: DC 3.0V
Frequency 908.4MHz
Channel number /

Note: CT110 is designed in two types, the different between them is the groove of line. One for the arc-shaped groove, another for the line groove. Detail refer to the Declaration of difference.

2.4 TEST OPERATION MODES

Test mode: Mode 1:continuous transmission

2.5 LOCAL SUPPORTIVE INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number
Thermostat load	Radio Thermostat	/	/

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests and measurements refer to this report were performed by EMC Laboratory of Guangzhou GRG Metrology and Test Co., Ltd.

Add. : 163 Pingyun Rd, West of Huangpu Ave, Guangzhou, 510656, P. R. China

Telephone: +86-20-38699959, 38699960, 38699961

Fax : +86-20-38695185

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC Listed Lab No. 688188
Canada	Registration No.:8355A-1

3.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	30MHz~1000MHz	4.2dB
	Horizontal	1GHz~18GHz	4.2dB
	Vertical	30MHz~1000MHz	4.4dB
	Vertical	1GHz~18GHz	4.4dB


This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4 LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Radiated Emission				
Bi-Log Antenna	ETS-LINDGREN	3142C	75971	2016-04-17
EMI Receiver	Rohde & Schwarz	ESU40	100106	2016-01-14
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120E3 18	2017-03-03
Intentional radiators Field Strength				
EMI Receiver	Rohde & Schwarz	ESU40	100106	2016-01-14
Bi-Log Antenna	ETS-LINDGREN	3142C	75971	2016-04-17
Out of Band Emissions				
EMI Receiver	Rohde & Schwarz	ESU40	100106	2016-01-14
Bi-Log Antenna	ETS-LINDGREN	3142C	75971	2016-04-17
CE				
L.I.S.N	SCHWARZBECK	NSLK 8127	8127450	2015-08-18
EMI Receiver	R&S	ESCI	100527	2016-03-24

4. ANTENNA REQUIREMENT

The EUT antenna is PCB Printed antenna. Antenna gain is -0.5dBi, which accordance 15.203, is considered sufficient to comply with the provisions of this section.

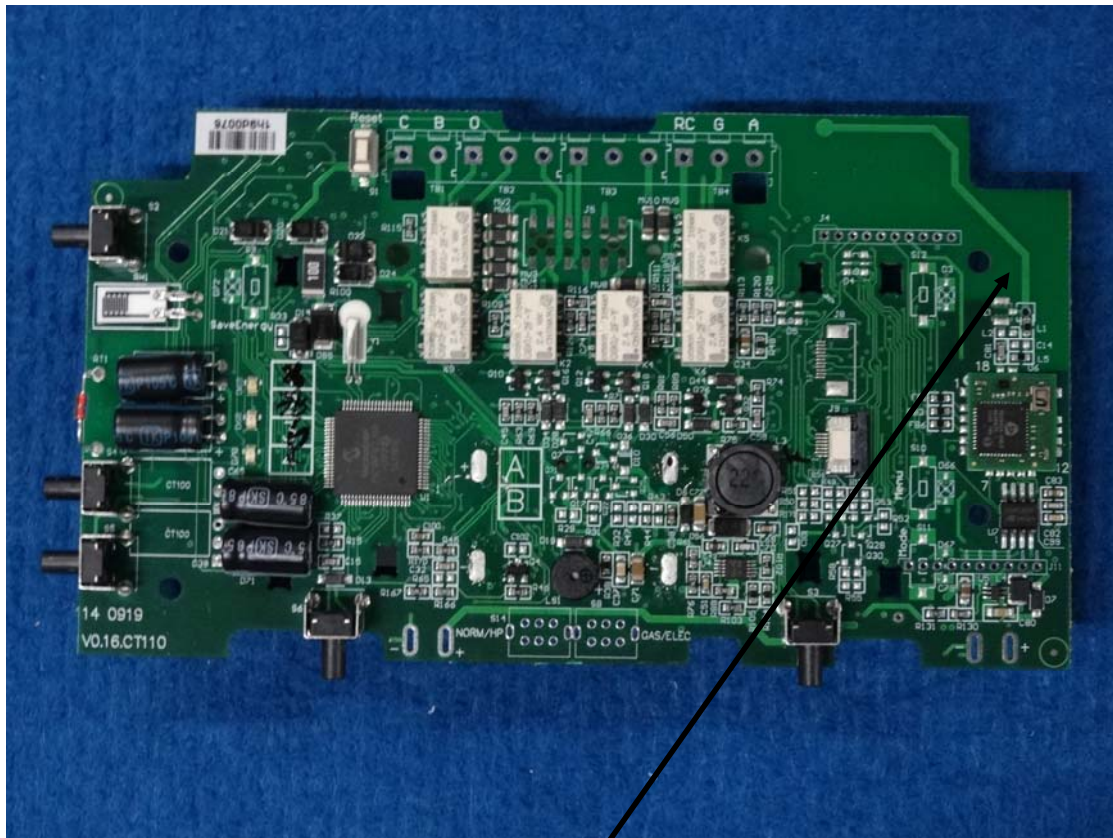

Antenna

5. EMISSION TEST

5.1 INTENTIONAL RADIATORS FIELD STRENGTH

5.1.1 LIMITS

Frequency (MHz)	Field Strength
908.4	50(millivolts/meter)
Field Strength of Harmonics	500(microvolts/meter)

5.1.2 TEST PROCEDURE

Procedure of Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.


The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2009 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the test.

5.1.3 TEST SETUP

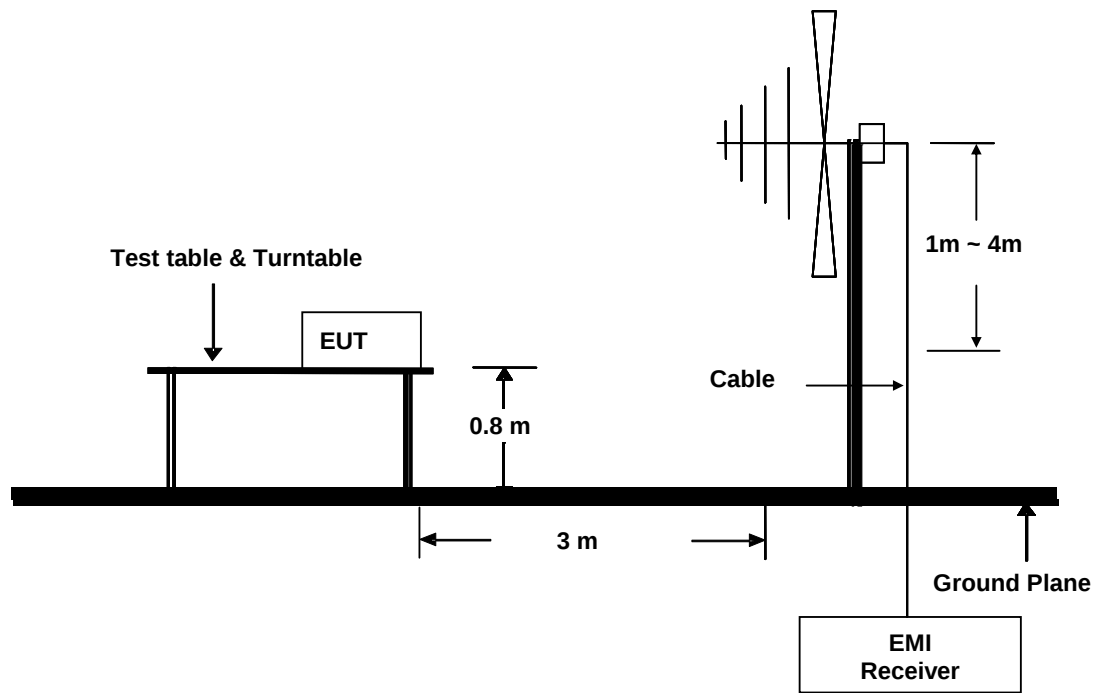

5.1.4 TEST RESULTS


The field strength was measured with an EMI measuring receiver.

Set 100kHz RBW/VBW for Peak detector at a distance of 3m.

Set 120kHz RBW/VBW for QP detector at a distance of 3m.


The arc-shaped groove EUT:

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-03-30
Temp./Hum.(%RH):	22/55%RH	Time:	20:51:05
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

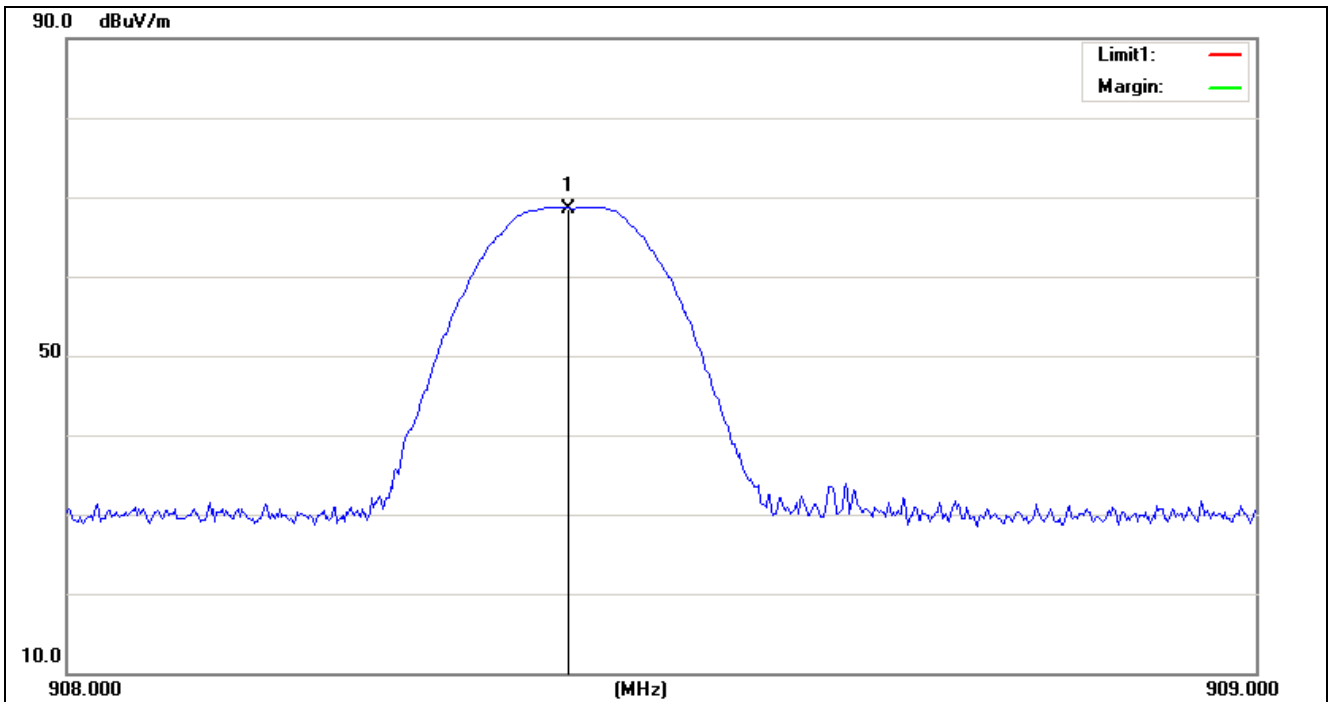

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4215	42.46	26.14	68.60	94.00	25.4	QP


Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-3-26
Temp./Hum.(%RH):	22/55%RH	Time:	20:52:09
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

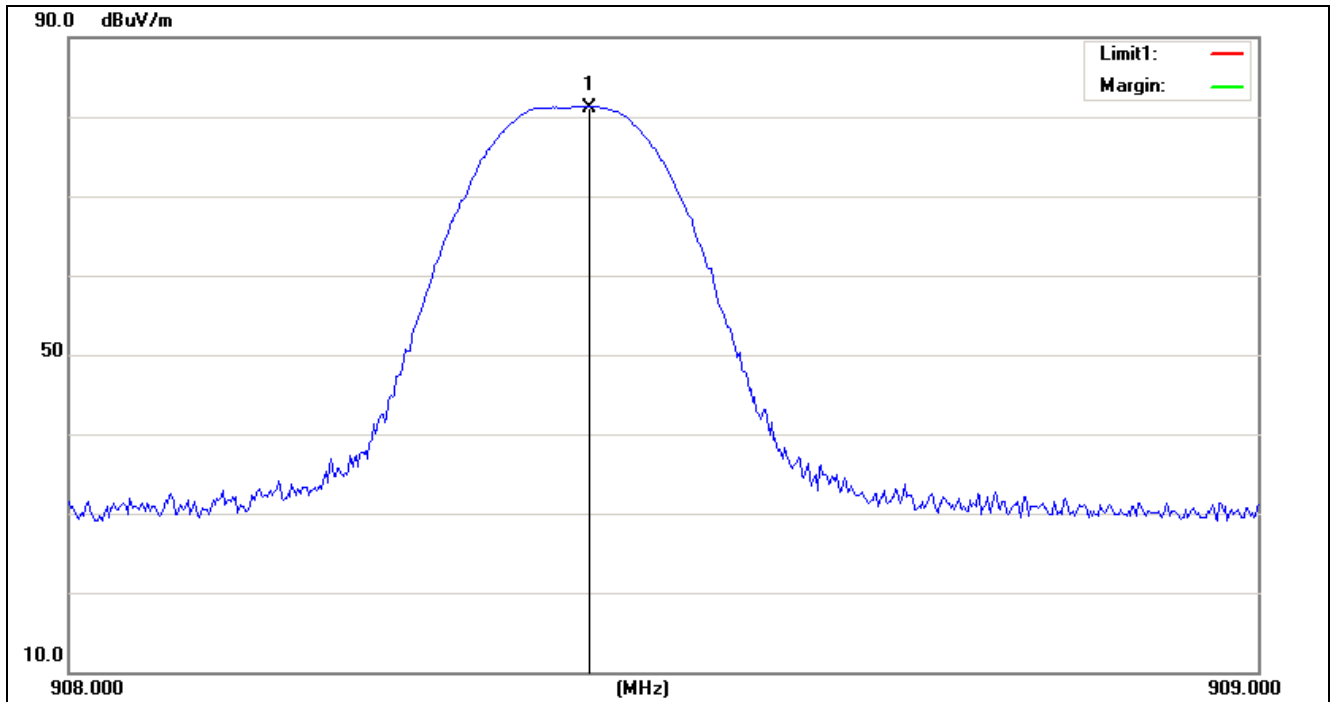

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4375	55.06	26.14	81.20	94.00	12.8	QP


The line groove EUT:

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-03-30
Temp./Hum. (%RH):	22/55%RH	Time:	21:01:25
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

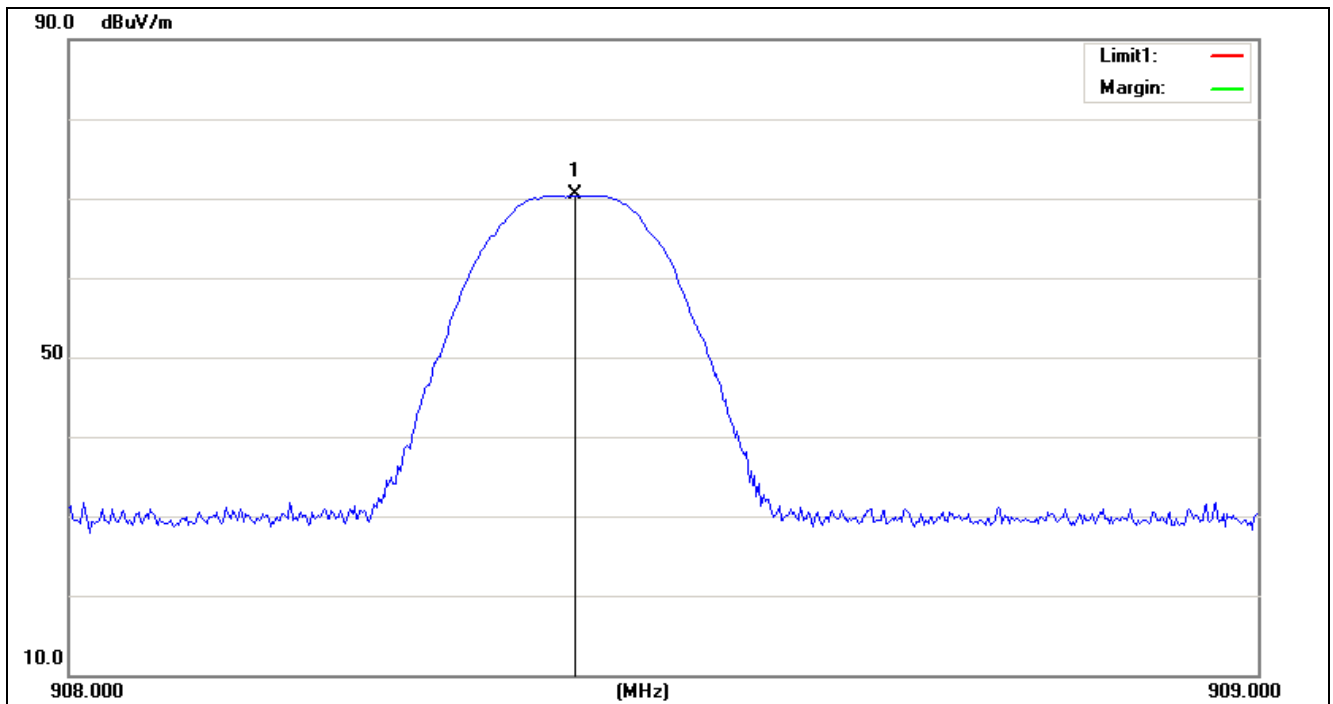

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4263	44.36	26.14	70.50	94.00	23.5	QP

Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-3-26
Temp./Hum.(%RH):	22/55%RH	Time:	21:03:39
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

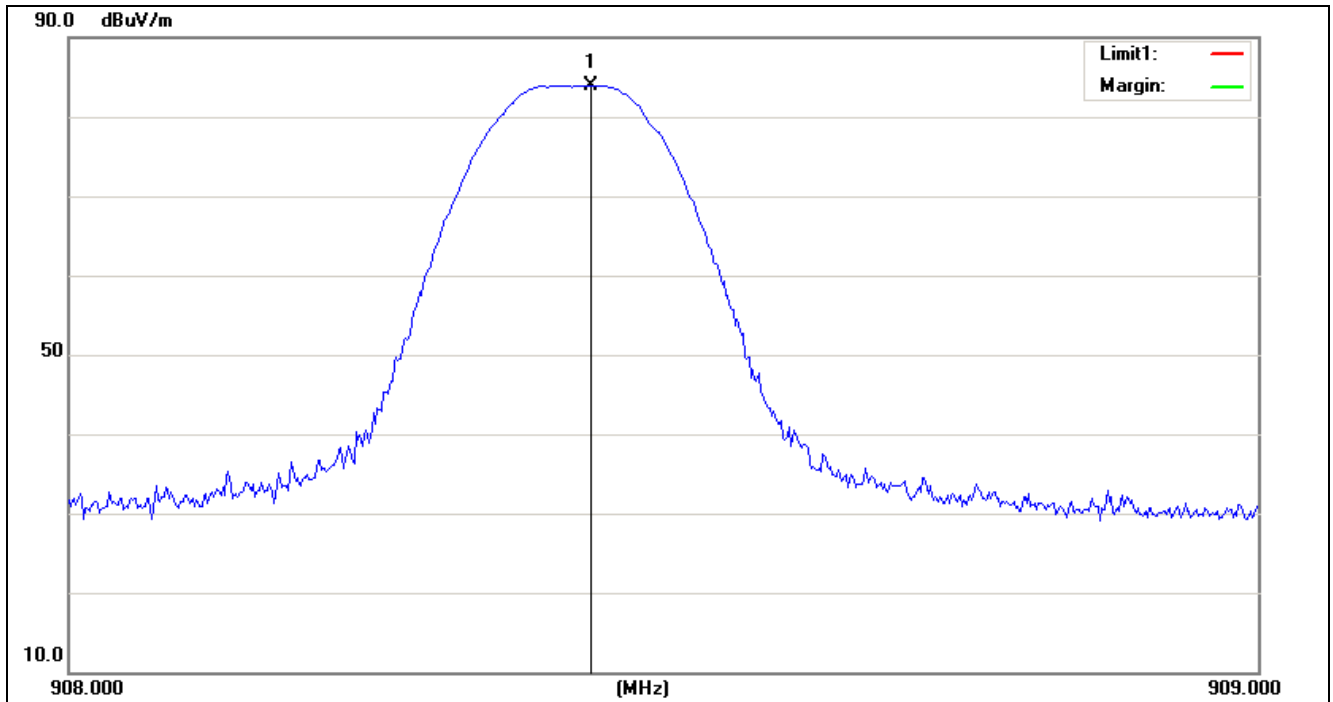

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4391	57.76	26.14	83.90	94.00	10.1	QP

5.2 RADIATED ELECTROMAGNETIC DISTURBANCE

5.2.1 LIMITS

Frequency (MHz)	Quasi-peak(dB μ V/m)
30 ~ 88	40
88~216	43.5
216 ~ 960	46
Above 960	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

Frequency (GHz)	PEAK and AVG(dB μ V/m)
Above 1G	74 PEAK
Above 1G	54 AVG

5.2.2 TEST PROCEDURES

Procedure of Preliminary Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.

The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2009 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test. The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level. Record at least six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only QP reading is presented. The test data of the worst-case condition(s) was recorded.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.2.3 TEST SETUP

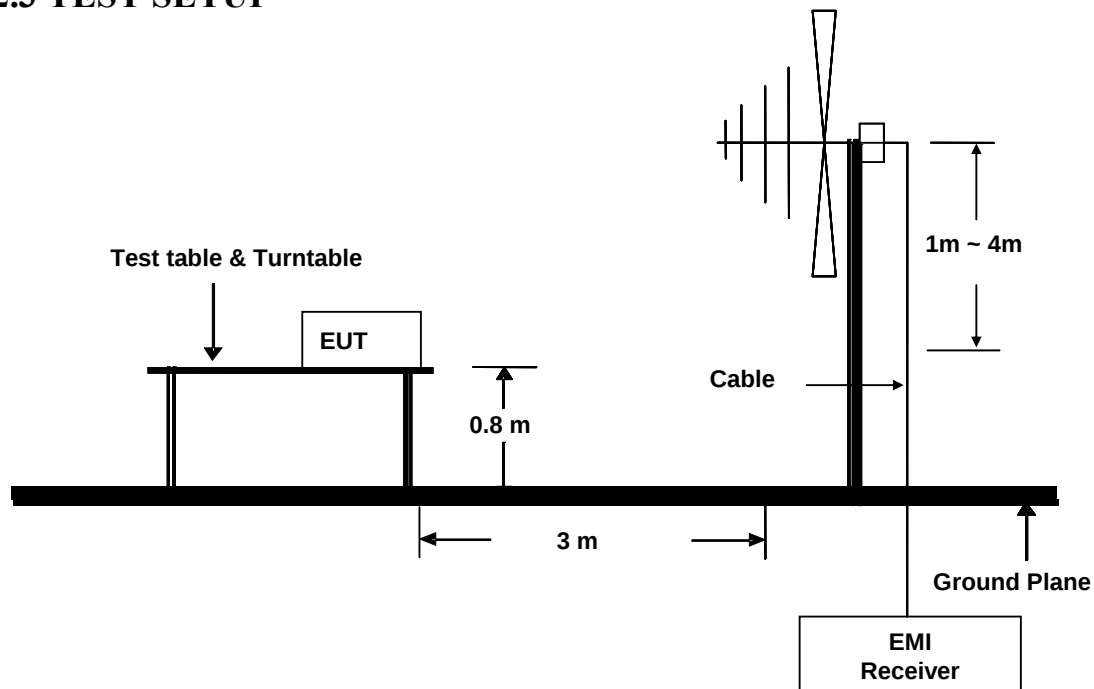


Figure 1. 30MHz to 1GHz radiated emissions test configuration

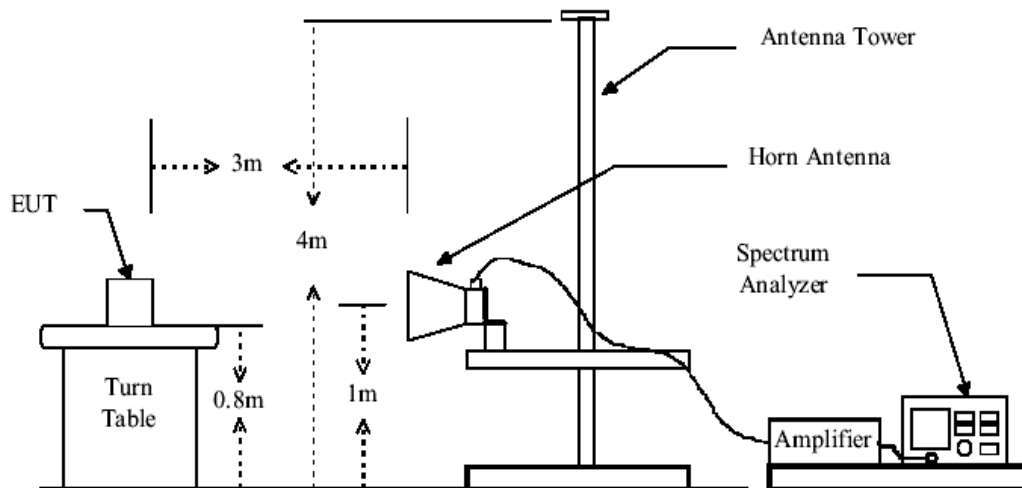


Figure 2 Above 1GHz radiated emissions test configuration

5.2.4 TEST RESULTS


The field strength was measured with an EMI measuring receiver.

Set 100 kHz RBW/VBW for Peak detector and Set 120kHz RBW/VBW fir QP detector at a distance of 3m when we test below 1GHz.

Set 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m when we test above 1GHz.


The arc-shaped groove EUT:

Project No.:	ZJ201500014-E	Polarziation:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-6-8
Temp./Hum.(%RH):	22/55%RH	Time:	14:00:25
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

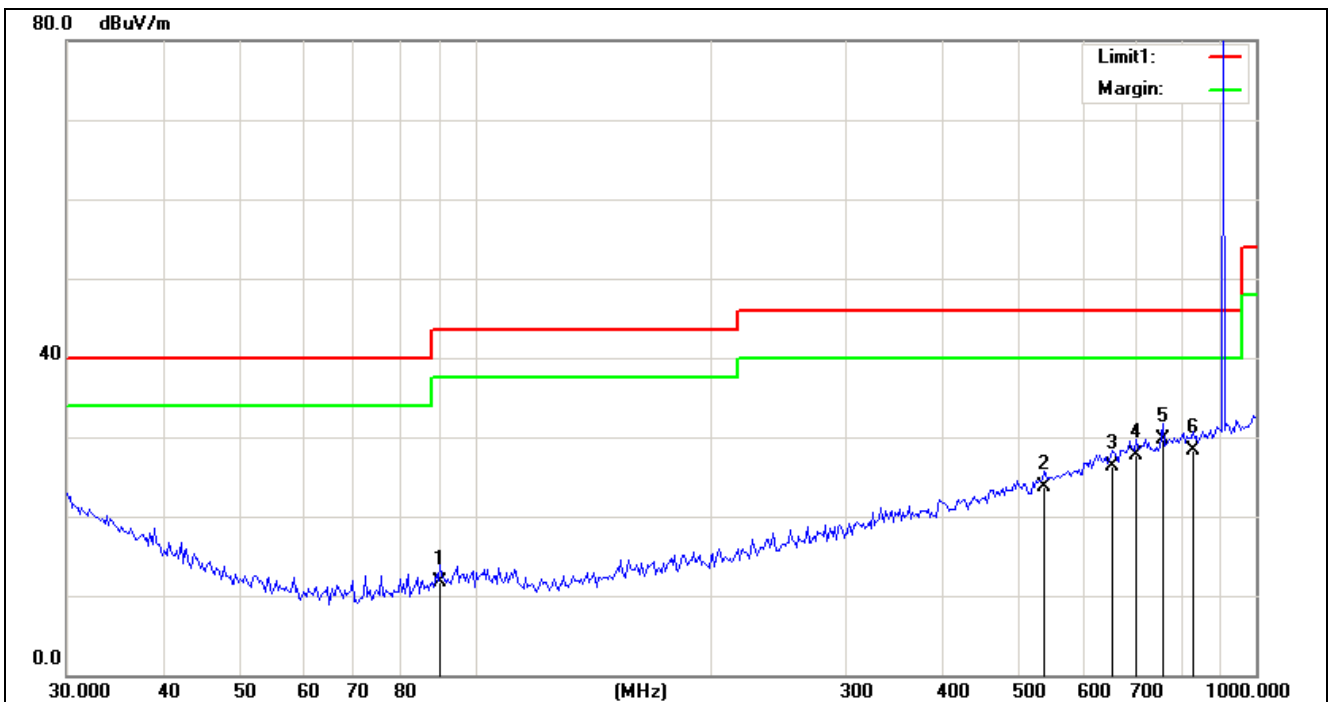


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	90.2529	2.17	9.63	11.80	43.50	-31.70	QP
2	535.9240	2.77	20.93	23.70	46.00	-22.30	QP
3	656.0874	3.33	22.97	26.30	46.00	-19.70	QP
4	701.8557	3.40	24.30	27.70	46.00	-18.30	QP
5	759.3027	5.35	24.35	29.70	46.00	-16.30	QP
6	830.7362	3.13	25.27	28.40	46.00	-17.60	QP

Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-6-8
Temp./Hum.(%RH):	22/55%RH	Time:	14:03:28
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

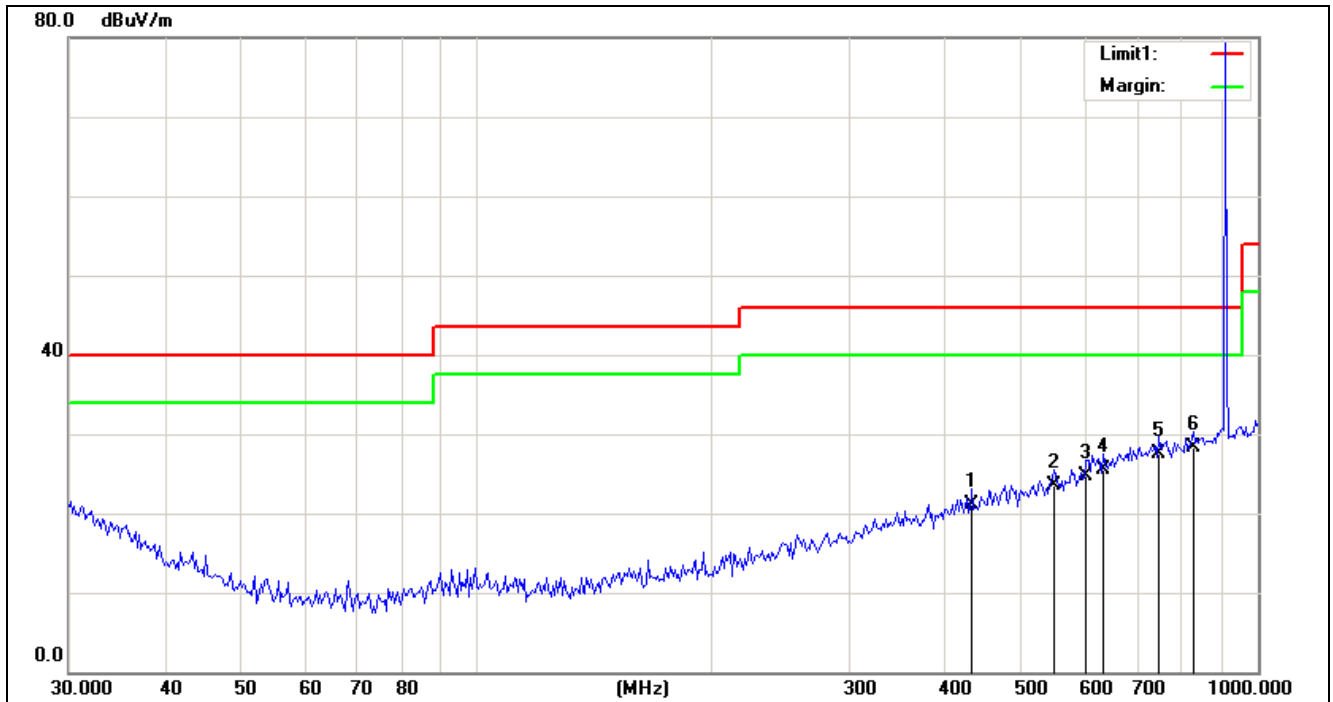


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	430.4507	2.63	18.47	21.10	46.00	-24.90	QP
2	548.1070	2.31	21.19	23.50	46.00	-22.50	QP
3	603.0510	2.37	22.33	24.70	46.00	-21.30	QP
4	634.3348	2.69	22.81	25.50	46.00	-20.50	QP
5	746.6094	3.39	24.21	27.60	46.00	-18.40	QP
6	826.0810	3.00	25.30	28.30	46.00	-17.70	QP

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B	Power Source:	DC 3.0V
Test item:	3m_PEAK		
Temp./Hum.(%RH):	Radiation Test	Date:	2015-6-8
EUT:	22/55%RH	Time:	14:33:12
Model:	Thermostat	Distance:	3m
	CT110	Test Result:	Pass
Note:			

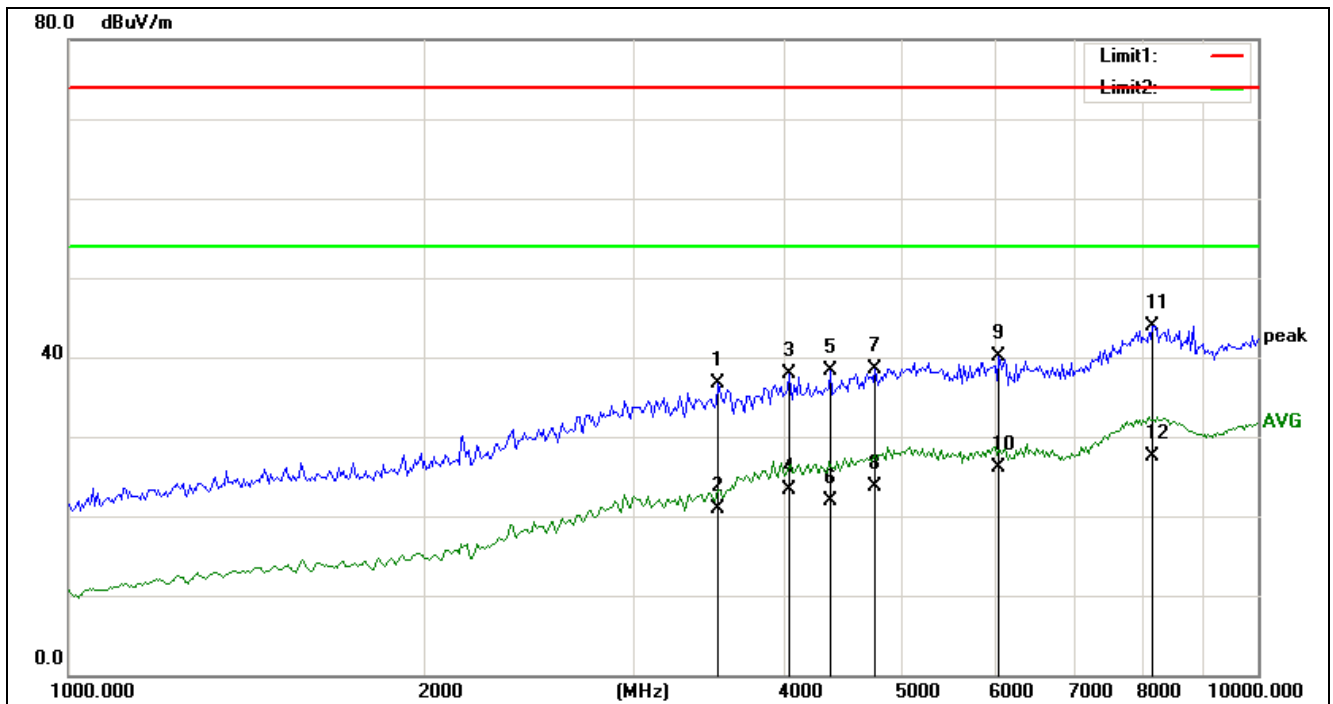

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3519.446	29.94	6.81	36.75	74.00	-37.25	peak
2	3519.446	14.09	6.81	20.90	54.00	-33.10	AVG
3	4034.310	28.95	8.97	37.92	74.00	-36.08	peak
4	4034.310	14.33	8.97	23.30	54.00	-30.70	AVG
5	4375.479	28.55	9.73	38.28	74.00	-35.72	peak
6	4375.479	12.17	9.73	21.90	54.00	-32.10	AVG
7	4763.044	27.89	10.69	38.58	74.00	-35.42	peak
8	4763.044	13.01	10.69	23.70	54.00	-30.30	AVG
9	6054.124	28.47	11.57	40.04	74.00	-33.96	peak
10	6054.124	14.53	11.57	26.10	54.00	-27.90	AVG
11	8163.172	27.32	16.65	43.97	74.00	-30.03	peak
12	8163.172	10.85	16.65	27.50	54.00	-26.50	AVG


Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B	Power Source:	DC 3.0V
Test item:	3m_PEAK		
Temp./Hum.(%RH):	Radiation Test	Date:	2015-6-8
EUT:	22/55%RH	Time:	14:37:41
Model:	Thermostat	Distance:	3m
	CT110	Test Result:	Pass
Note:			

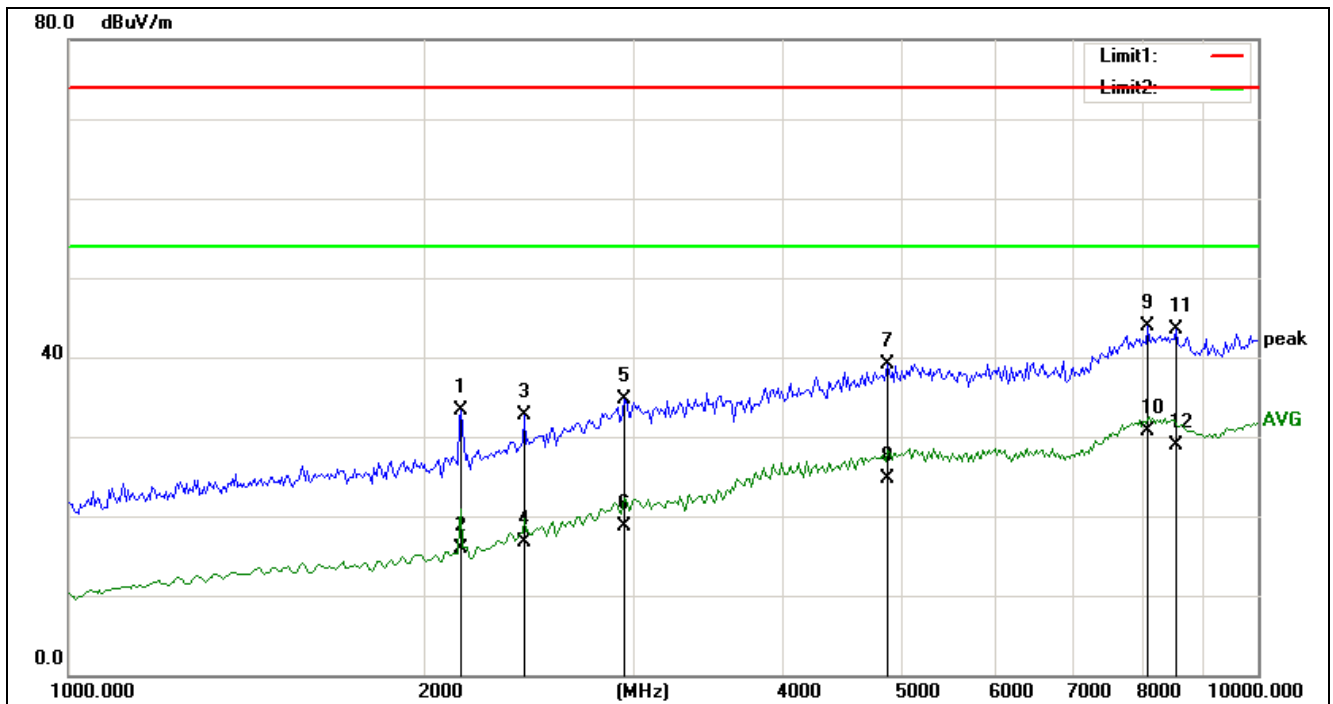

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2138.593	32.87	0.50	33.37	74.00	-40.63	peak
2	2138.593	15.40	0.50	15.90	54.00	-38.10	AVG
3	2415.532	30.91	1.74	32.65	74.00	-41.35	peak
4	2415.532	14.96	1.74	16.70	54.00	-37.30	AVG
5	2937.303	29.09	5.65	34.74	74.00	-39.26	peak
6	2937.303	13.15	5.65	18.80	54.00	-35.20	AVG
7	4887.678	28.14	11.02	39.16	74.00	-34.84	peak
8	4887.678	13.68	11.02	24.70	54.00	-29.30	AVG
9	8073.304	27.18	16.66	43.84	74.00	-30.16	peak
10	8073.304	14.14	16.66	30.80	54.00	-23.20	AVG
11	8532.764	27.00	16.51	43.51	74.00	-30.49	peak
12	8532.764	12.39	16.51	28.90	54.00	-25.10	AVG


The line groove EUT:

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-6-8
Temp./Hum.(%RH):	22/55%RH	Time:	14:06:06
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

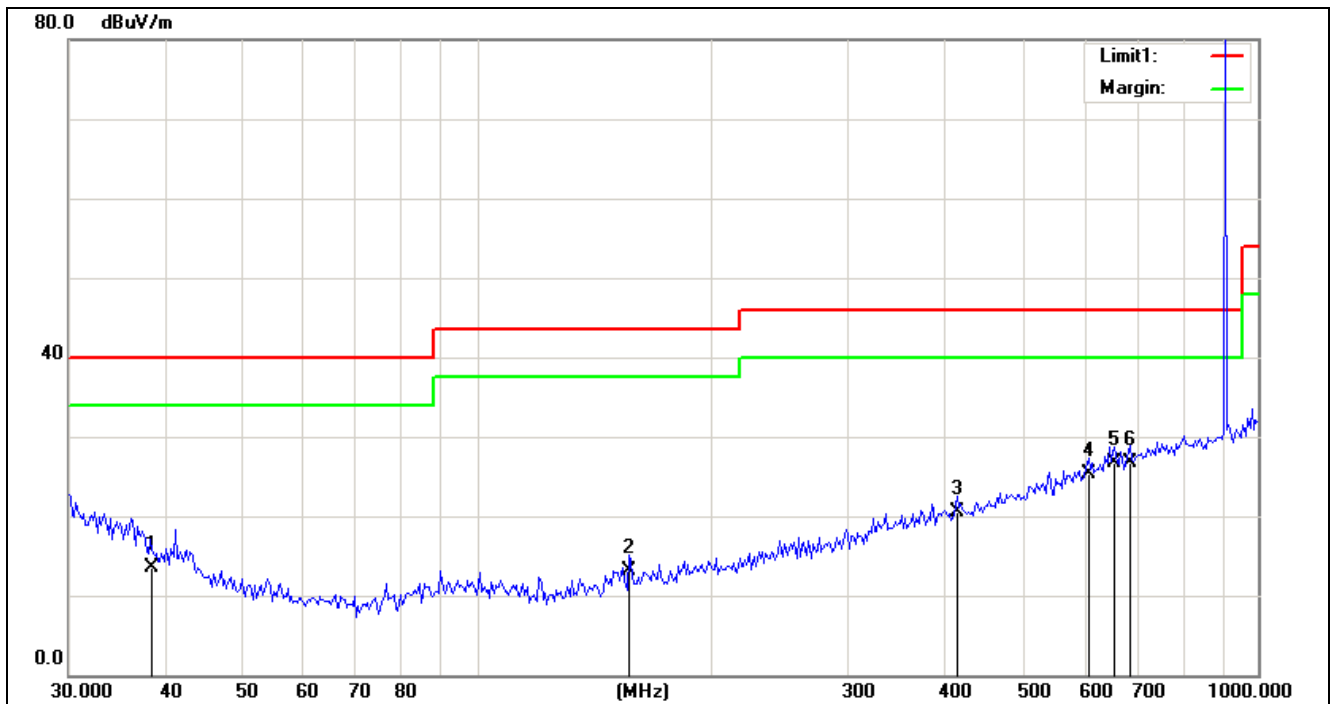


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.4153	-0.69	14.29	13.60	40.00	-26.40	QP
2	156.5422	2.60	10.50	13.10	43.50	-30.40	QP
3	411.5279	2.32	18.28	20.60	46.00	-25.40	QP
4	606.4494	2.90	22.40	25.30	46.00	-20.70	QP
5	656.0874	3.73	22.97	26.70	46.00	-19.30	QP
6	686.2554	2.91	23.89	26.80	46.00	-19.20	QP

Project No.:	ZJ201500014-E	Polarziation:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-6-8
Temp./Hum.(%RH):	22/55%RH	Time:	14:09:00
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:			

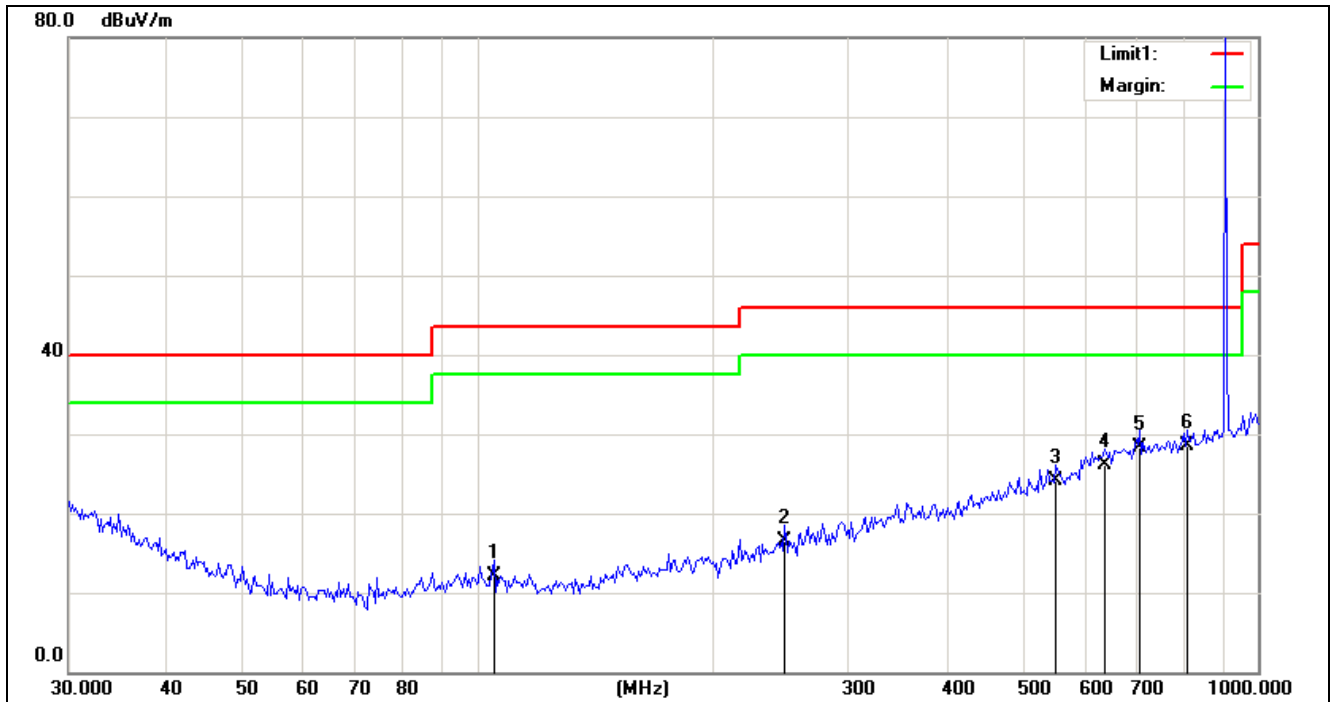


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	105.0401	2.35	9.75	12.10	43.50	-31.40	QP
2	248.1723	2.90	13.60	16.50	46.00	-29.50	QP
3	551.1957	2.87	21.23	24.10	46.00	-21.90	QP
4	637.9096	3.30	22.80	26.10	46.00	-19.90	QP
5	705.8108	4.12	24.28	28.40	46.00	-17.60	QP
6	812.2713	3.42	25.18	28.60	46.00	-17.40	QP

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B	Power Source:	DC 3.0V
Test item:	3m_PEAK		
Temp./Hum.(%RH):	Radiation Test	Date:	2015-03-30
EUT:	22/55%RH	Time:	14:42:55
Model:	Thermostat	Distance:	3m
	CT110	Test Result:	Pass
Note:			

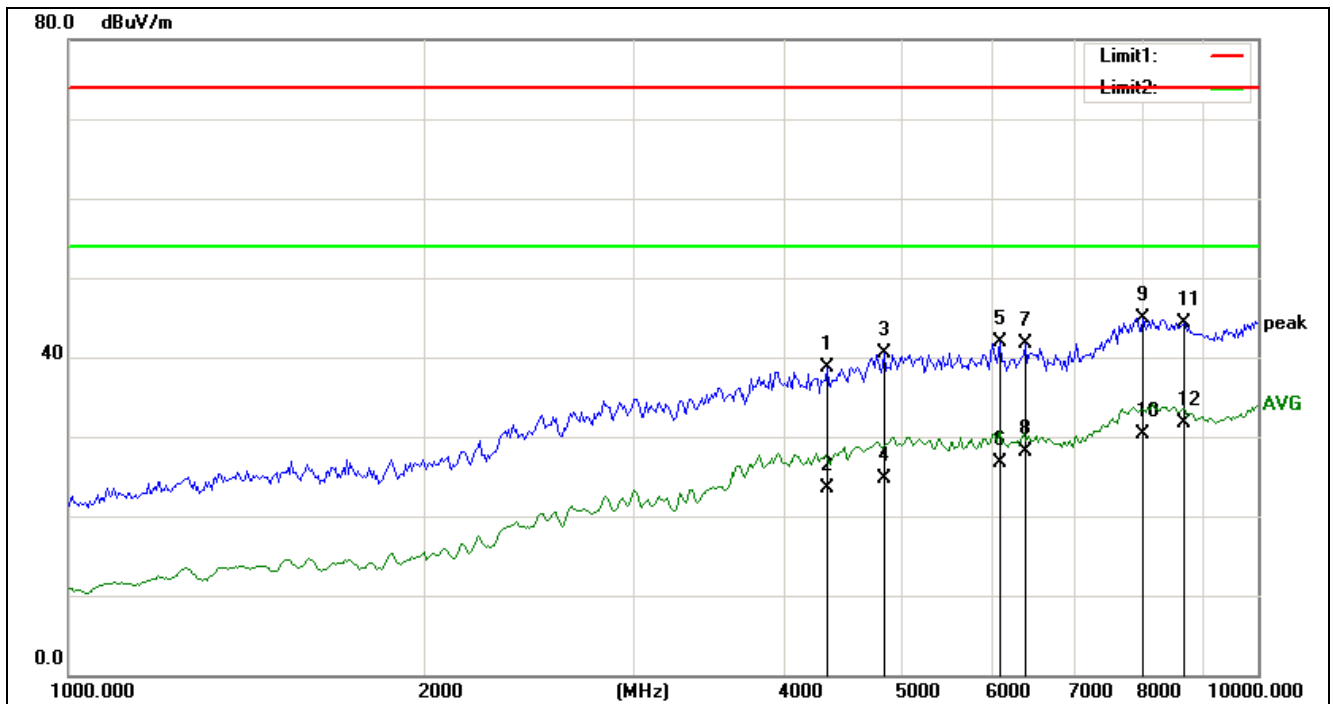

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4343.307	29.10	9.67	38.77	74.00	-35.23	peak
2	4343.307	13.93	9.67	23.60	54.00	-30.40	AVG
3	4851.739	29.54	10.91	40.45	74.00	-33.55	peak
4	4851.739	13.89	10.91	24.80	54.00	-29.20	AVG
5	6076.505	30.33	11.58	41.91	74.00	-32.09	peak
6	6076.505	15.22	11.58	26.80	54.00	-27.20	AVG
7	6375.103	29.93	11.80	41.73	74.00	-32.27	peak
8	6375.103	16.30	11.80	28.10	54.00	-25.90	AVG
9	8013.941	28.22	16.67	44.89	74.00	-29.11	peak
10	8013.941	13.73	16.67	30.40	54.00	-23.60	AVG
11	8659.643	28.10	16.25	44.35	74.00	-29.65	peak
12	8659.643	15.45	16.25	31.70	54.00	-22.30	AVG

Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B	Power Source:	DC 3.0V
Test item:	3m_PEAK		
Temp./Hum.(%RH):	Radiation Test	Date:	2015-3-30
EUT:	22/55%RH	Time:	14:47:03
Model:	Thermostat	Distance:	3m
	CT110	Test Result:	Pass
Note:			

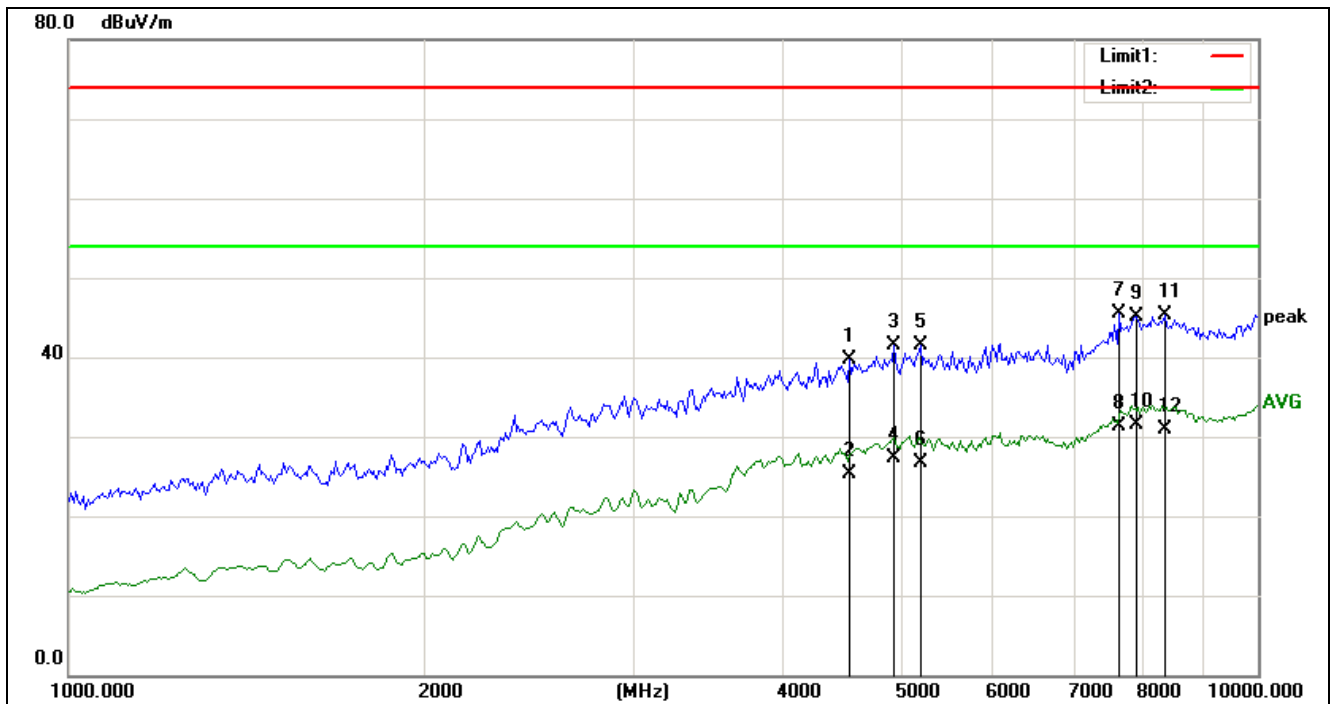

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4539.952	29.53	10.12	39.65	74.00	-34.35	peak
2	4539.952	15.28	10.12	25.40	54.00	-28.60	AVG
3	4942.086	30.34	11.16	41.50	74.00	-32.50	peak
4	4942.086	16.14	11.16	27.30	54.00	-26.70	AVG
5	5204.106	30.36	11.12	41.48	74.00	-32.52	peak
6	5204.106	15.58	11.12	26.70	54.00	-27.30	AVG
7	7638.583	30.12	15.40	45.52	74.00	-28.48	peak
8	7638.583	15.90	15.40	31.30	54.00	-22.70	AVG
9	7896.523	28.71	16.31	45.02	74.00	-28.98	peak
10	7896.523	15.29	16.31	31.60	54.00	-22.40	AVG
11	8345.923	28.64	16.62	45.26	74.00	-28.74	peak
12	8345.923	14.38	16.62	31.00	54.00	-23.00	AVG

5.3 OUT OF BAND EMISSIONS

5.3.1 LIMITS

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

5.3.2 TEST PROCEDURES

Procedure of Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.


The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2009 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the test.

5.3.3 TEST SETUP

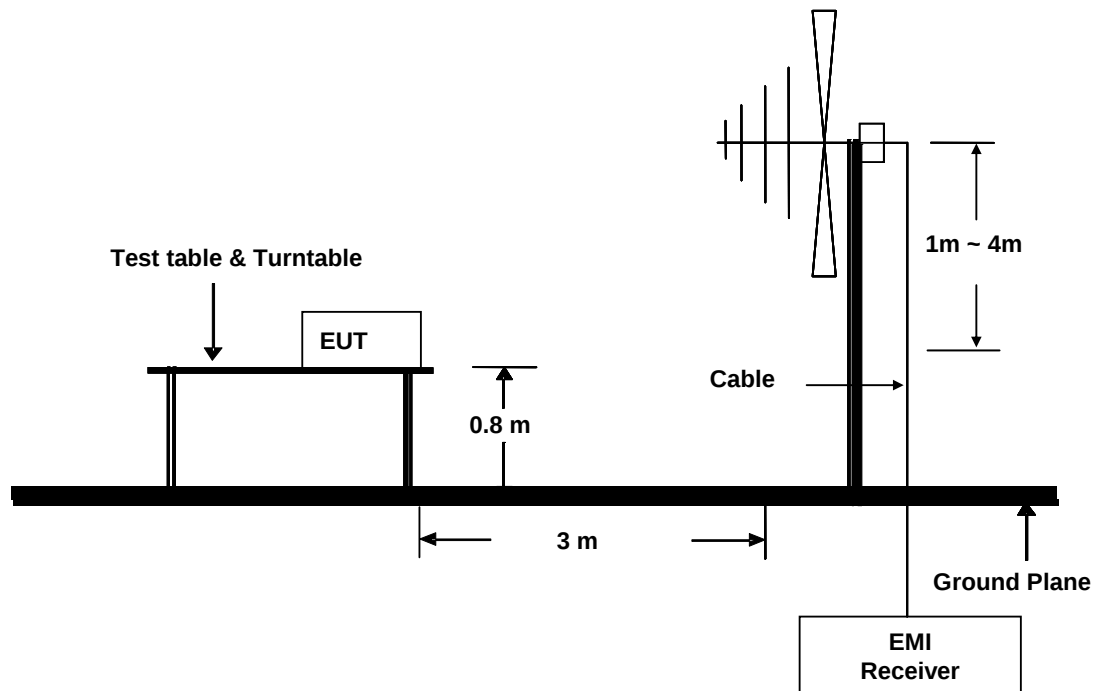


5.3.4 TEST RESULTS

The field strength was measured with an EMI measuring receiver and 100 kHz RBW / VBW for Peak and 120kHz RBW/VBW for QP at a distance of 3m.

Measurement result:


The arc-shaped groove EUT:

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-03-30
Temp./Hum.(%RH):	22/55%RH	Time:	16:25:49
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:	BE		

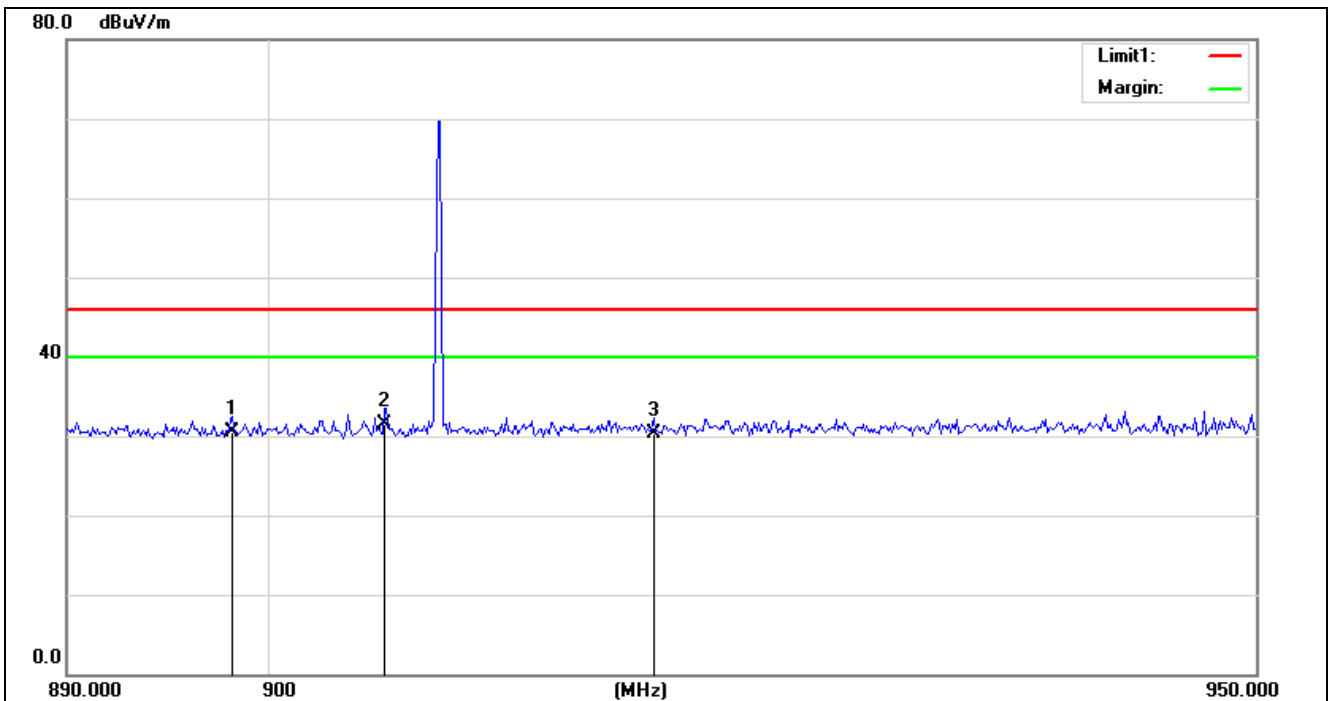

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	898.1731	4.47	26.13	30.60	46.00	-15.40	QP
2	905.7692	5.35	26.15	31.50	46.00	-14.50	QP
3	919.1346	4.20	26.10	30.30	46.00	-15.70	QP


Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-03-30
Temp./Hum.(%RH):	22/55%RH	Time:	16:29:11
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:	BE		

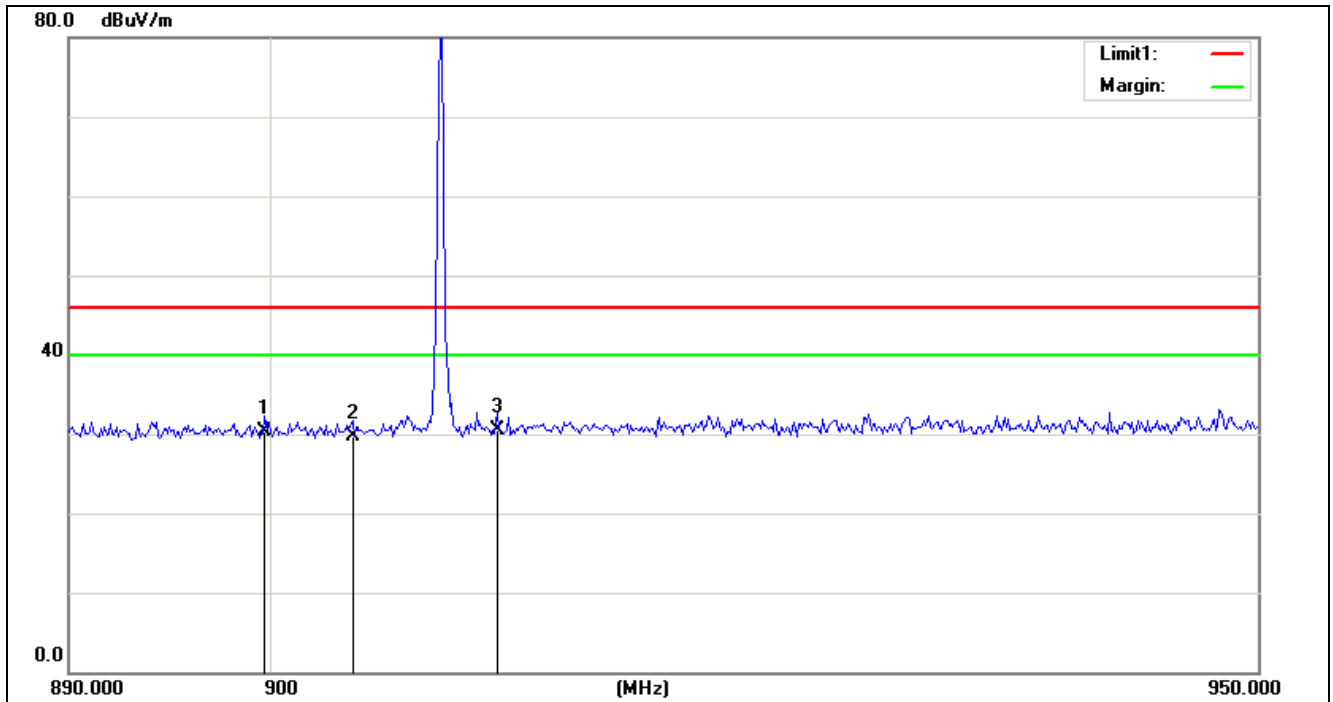

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	899.7115	4.14	26.16	30.30	46.00	-15.70	QP
2	904.0385	3.54	26.16	29.70	46.00	-16.30	QP
3	911.2500	4.47	26.13	30.60	46.00	-15.40	QP


The line groove EUT:

Project No.:	ZJ201500014-E	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-03-30
Temp./Hum.(%RH):	22/55%RH	Time:	17:31:33
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:	BE		

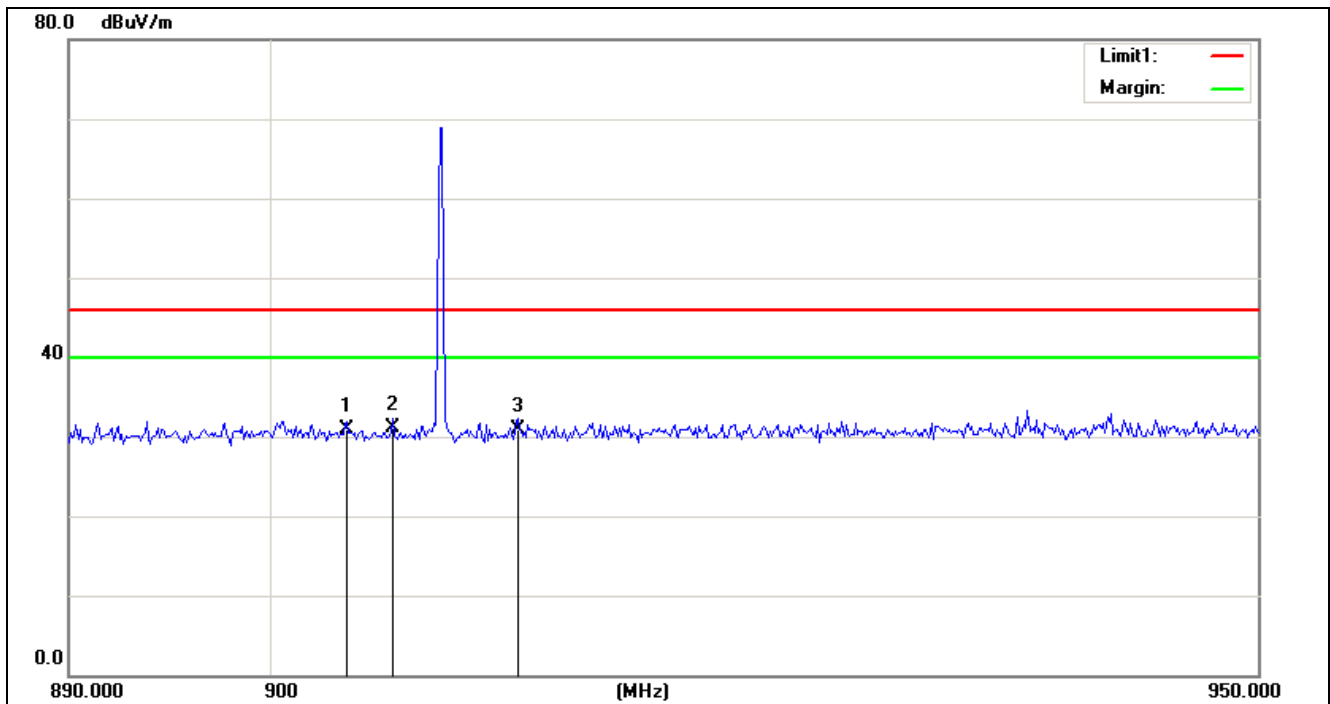

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	903.7500	4.74	26.16	30.90	46.00	-15.10	QP
2	905.9615	5.05	26.15	31.20	46.00	-14.80	QP
3	912.3077	4.87	26.13	31.00	46.00	-15.00	QP

Project No.:	ZJ201500014-E	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3.0V
Test item:	Radiation Test	Date:	2015-03-30
Temp./Hum.(%RH):	22/55%RH	Time:	17:33:10
EUT:	Thermostat	Distance:	3m
Model:	CT110	Test Result:	Pass
Note:	BE		

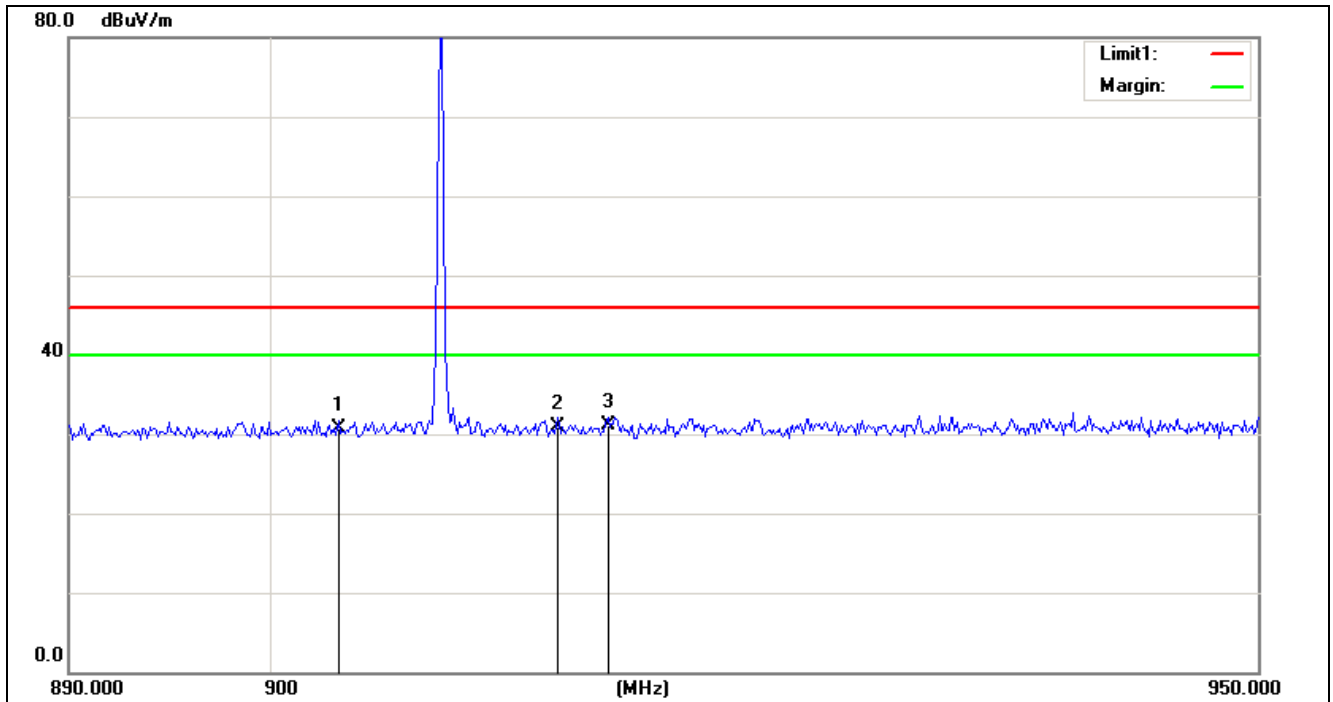

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	903.3654	4.65	26.15	30.80	46.00	-15.20	QP
2	914.3269	4.88	26.12	31.00	46.00	-15.00	QP
3	916.7308	4.99	26.11	31.10	46.00	-14.90	QP

5.4 CONDUCTED EMISSION MEASUREMENT

5.4.1 LIMITS

Frequency range	Limits (dB μ V)	
	Quasi-peak	Average
150kHz $\sim$ 0.5MHz	66 $\sim$ 56	56 $\sim$ 46
0.5 MHz $\sim$ 5 MHz	56	46
5 MHz $\sim$ 30 MHz	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150kHz to 0.5MHz.

5.4.2 TEST PROCEDURES

Procedure of Preliminary Test

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:

- 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or

- 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;

- All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;

- The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;

- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.


- I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.4.3 TEST SETUP

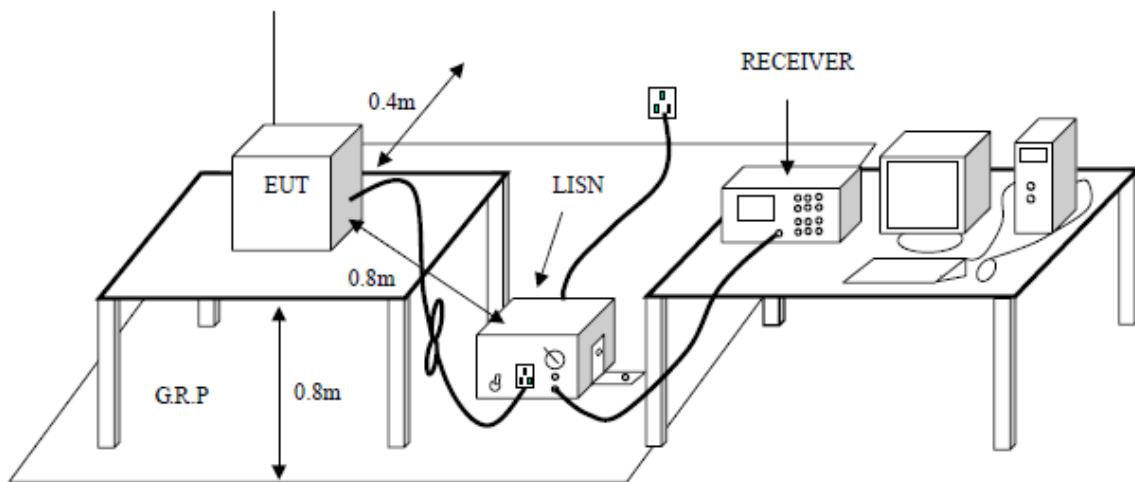


5.4.4 TEST RESULTS

N/A: The EUT is own DC 3.0V battery supply.


APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT

The arc-shaped groove EUT:

Radiated Emission (Below 1GHZ)

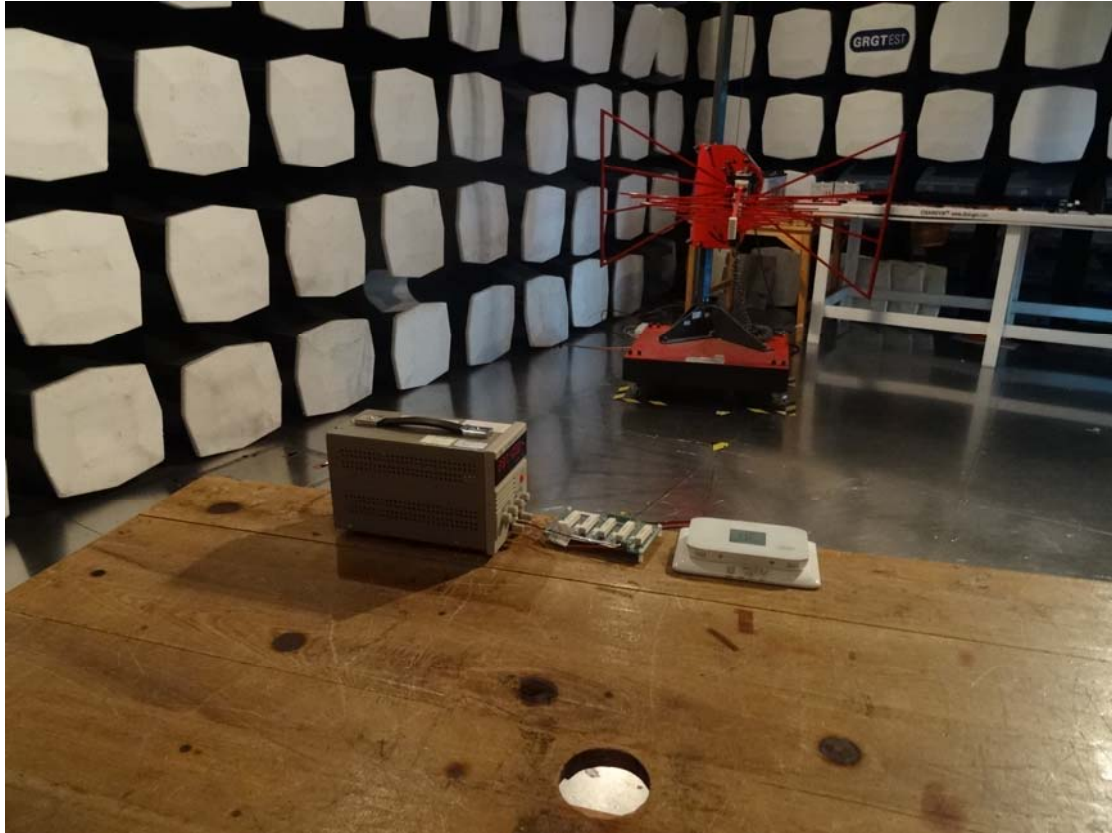

Radiated Emission (Above 1GHz)

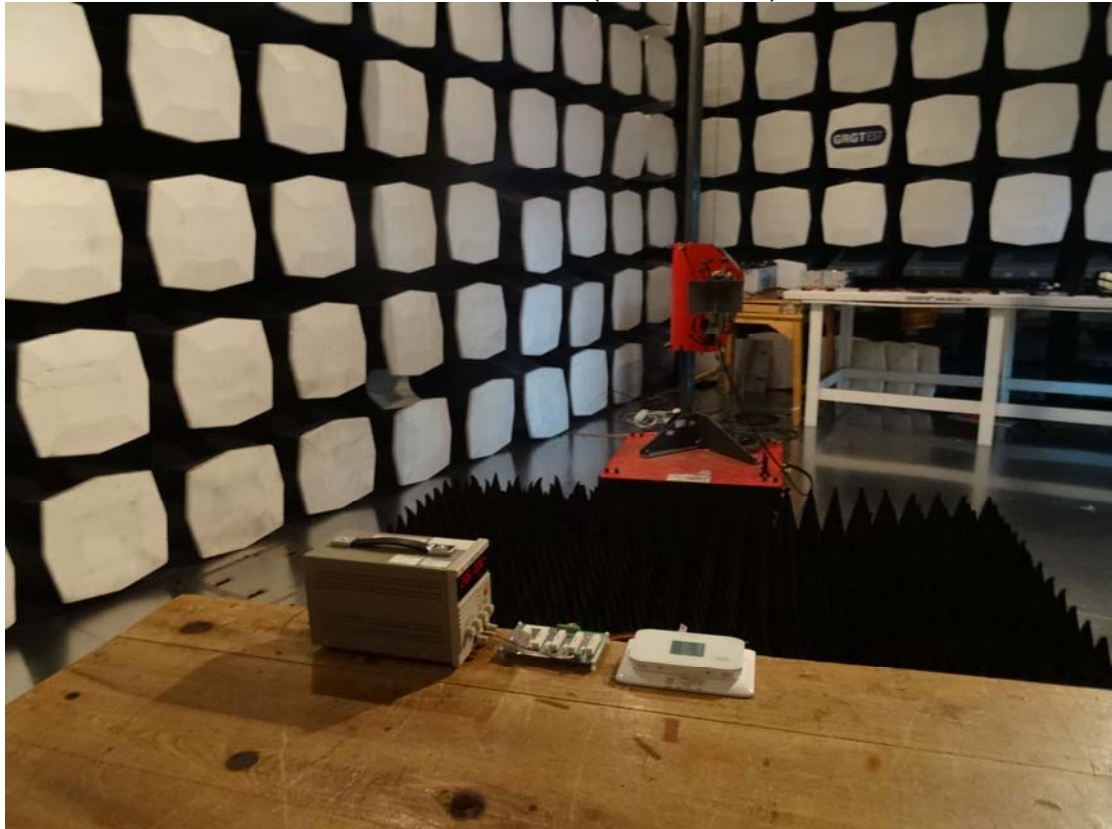


The line groove EUT:

Radiated Emission (Below 1GHZ)



Radiated Emission (Above 1GHz)

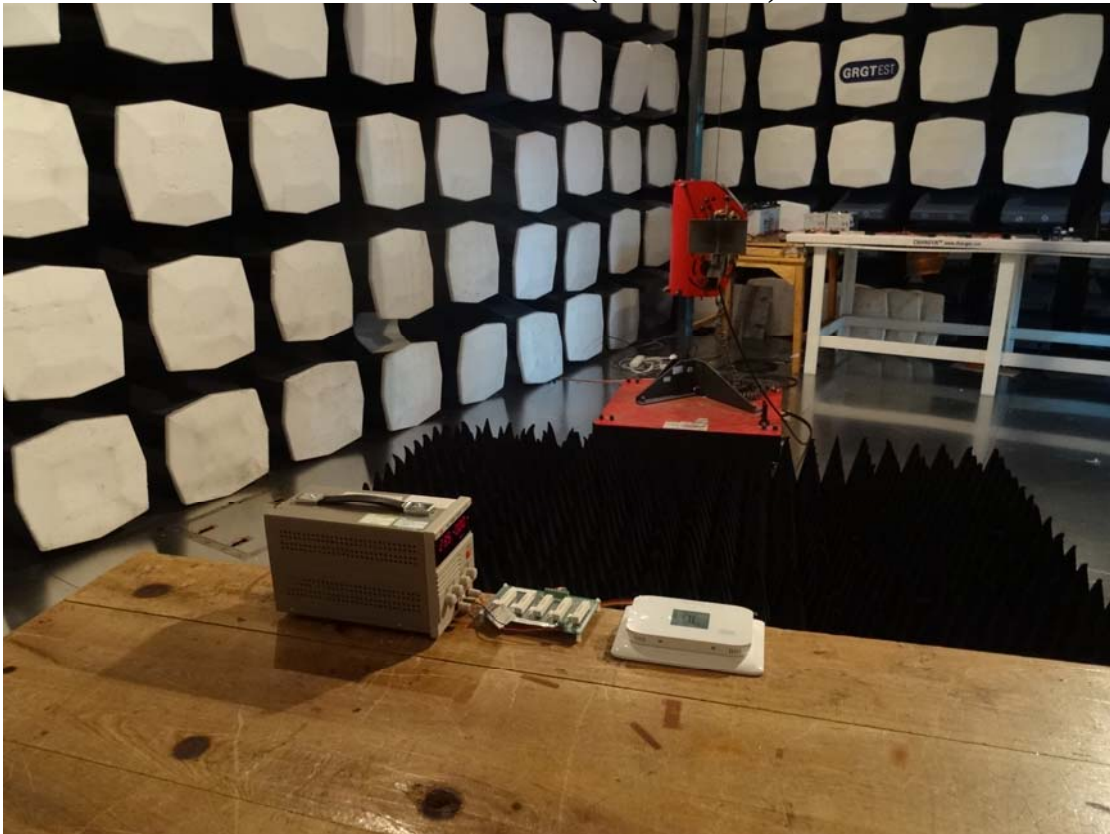

-----This is the last page of the report. -----