

Test Report of FCC CFR 47 Part 15 Subpart C
On Behalf of

SAPPHIRE TECHNOLOGY LIMITED

FCC ID: QPK-EDGEHD

Product Description: NETTOP

Model No.: EDGE HD

Supplementary Model: EDGE HD2

Brand Name: N/A

Prepared for: **SAPPHIRE TECHNOLOGY LIMITED**

Unit 1909 – 1919, 19/F., Tower 2, Grand Central Plaza, 138 Shatin
Rural Committee Road, Shatin, N.T., Hong Kong

Prepared by: **Bontek Compliance Testing Laboratory Co., Ltd**

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028

Report No.: BCT12JR-1841E-1

Issue Date: October 26, 2012

Test Date: October 17~26, 2012

Test by:

Reviewed By:



Vincent Jiang



Kevin Chi

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY.....	4
1.3 TEST FACILITY.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 EUT CONFIGURATION.....	5
2.2 EUT EXERCISE	5
2.3 GENERAL TEST PROCEDURES.....	5
2.4 MEASUREMENT UNCERTAINTY	5
2.5 LIST OF MEASURING EQUIPMENTS USED.....	6
3. SUMMARY OF TEST RESULTS.....	7
4. TEST OF AC POWER LINE CONDUCTED EMISSION	8
4.1 APPLICABLE STANDARD.....	8
4.2 TEST SETUP DIAGRAM.....	8
4.3 TEST RESULT	8
5. TEST OF MAXIMUM PEAK OUTPUT POWER.....	11
5.1 APPLICABLE STANDARD.....	11
5.2 EUT SETUP.....	11
5.3 TEST EQUIPMENT LIST AND DETAILS	11
5.4 TEST PROCEDURE	11
5.5 TEST RESULT	11
6. TEST OF PEAK POWER SPECTRAL DENSITY	21
6.1 APPLICABLE STANDARD.....	21
6.2 EUT SETUP.....	21
6.3 TEST EQUIPMENT LIST AND DETAILS	21
6.4 TEST PROCEDURE	21
6.5 TEST RESULT	21
7. TEST OF 6DB BANDWIDTH.....	31
7.1 APPLICABLE STANDARD.....	31
7.2 EUT SETUP.....	31
7.3 TEST EQUIPMENT LIST AND DETAILS	31
7.4 TEST PROCEDURE	31
7.5 TEST RESULT	31
8. TEST OF CONDUCTED SPURIOUS EMISSION	42
8.1 APPLICABLE STANDARD.....	42
8.2 EUT SETUP.....	42
8.3 TEST EQUIPMENT LIST AND DETAILS	42
8.4 TEST PROCEDURE	42
8.5 TEST RESULT	42
9. TEST OF RADIATED SPURIOUS EMISSION	46
9.1 RADIATED SPURIOUS EMISSION	46
9.1.1 LIMITS.....	46
9.1.2 EUT SETUP	47
9.1.3 TEST PROCEDURE	48
9.1.4 TEST RESULT.....	49
9.2 RESTRICTED BAND EDGES.....	63
10. ANTENNA REQUIREMENT	72
10.1 STANDARD APPLICABLE.....	72

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **SAPPHIRE TECHNOLOGY LIMITED**
Address of applicant: Unit 1909 – 1919, 19/F., Tower 2, Grand Central Plaza, 138 Shatin Rural Committee Road, Shatin, N.T., Hong Kong
Manufacturer: **QINGBANG ELECTRON (SHENZHEN) CO.,LTD.**
Address of manufacturer: Waijing Industry Workshop,5th Industrial Zone,Nanshan District, Shenzhen , Guangdong ,China(Mainland).

General Description of E.U.T

Items	Description
EUT Description:	NETTOP
Trade Name:	N/A
Model No.:	EDGE HD
Supplementary Model:	EDGE HD2
Frequency Band:	IEEE 802.11b/g, IEEE 802.11n HT20 (DTS Band) : 2412MHz~2462MHz, IEEE 802.11n HT40 (DTS Band) : 2422MHz~2452MHz
Channel Spacing:	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Number of Channels:	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate:	maximum of 300Mbps
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Antenna Gain:	1dB
Power Supply:	Input: 19V DC 3.42A
Adapter description:	Model: MN-A065-H190 Input:100-240V 1.5A max 50/60Hz Output: 19V DC 3.42A

* The test data gathered are from the production sample provided by the manufacturer.

1.2 Related Submittal(s) / Grant (s) and Test Methodology

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules and the FCC publication KDB558074 of Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

1.3 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2012-7-25	2013-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
7	Signal generator	Rhode & Schwarz	SMIQ 03HD + option SM-B1, SMIQB11, SMIQB12, SMIQB14, SMIQB17, SMIQB20	1125.5555.46	2012-4-6	2013-4-5
8	GSM system simulator	Rhode & Schwarz	CMU200 + option K20, K21, K22, K23, K24, K27, K28, K29, K42, K65, B12, B41, B52, B66, B56	1100.0008.34	2012-4-6	2013-4-5
9	GSM system simulator	Agilent	8960 Series 10 E1985A + GSM_AMPS	B.01.76 GB42450443	2012-4-6	2013-4-5
10	Spectrum Analyzer	Agilent	E4404B	US41192833	2012-4-6	2013-4-5
11	6dB Attenuator	Atten	Attenuator	DC-4GHz	2012-4-6	2013-4-5
12	Digital Multimeter	Fluke	15B	91280239	2012-4-6	2013-4-5
13	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2012-4-10	2013-4-9
14	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
15	Active Loop Antenna	DAZE	ZN30900A	1200	2012-4-6	2013-4-6
16	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
17	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
18	Spectrum Analyzer	R&S	FSP	100397	2012-11-2	2013-11-1
19	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
20	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(b)	Maximum Peak Output Power	Pass
FCC §15.247(e)	Power Spectral Density	Pass
FCC §15.247(a)	6dB Bandwidth	Pass
FCC §15.247 (d)	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209	Radiated Spurious Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

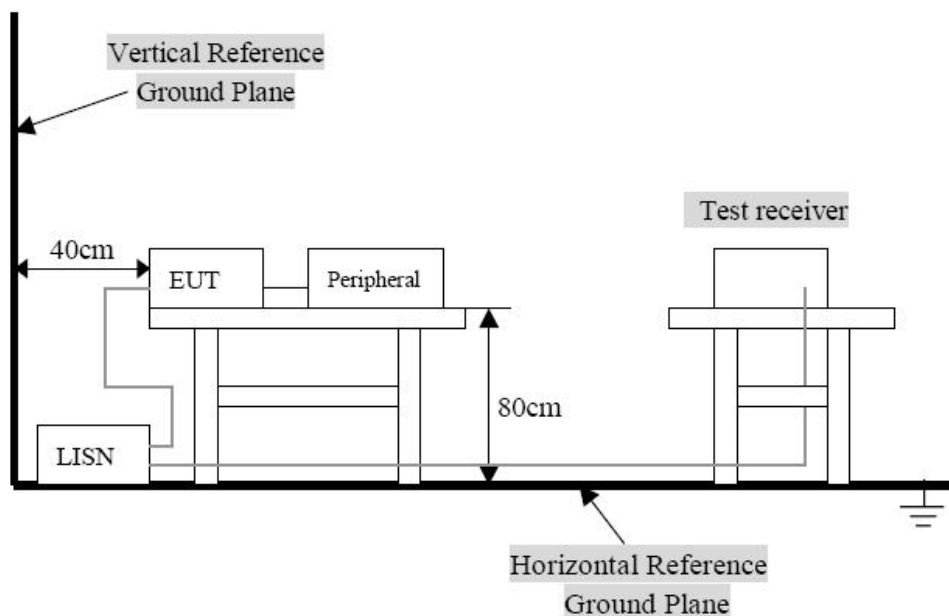

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.


4.3 Test Result

Temperature (°C) : 23~25	EUT: NETTOP
Humidity (%RH) : 45~58	M/N: EDGE HD
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal operation

Conducted Emission:

EUT: NETTOP
Operating Condition: Normal operation
Test Site: Shielded Room
Operator: Andy
Test Specification: AC/DC adapter (AC 120V/60Hz)
Comment: Live Line

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

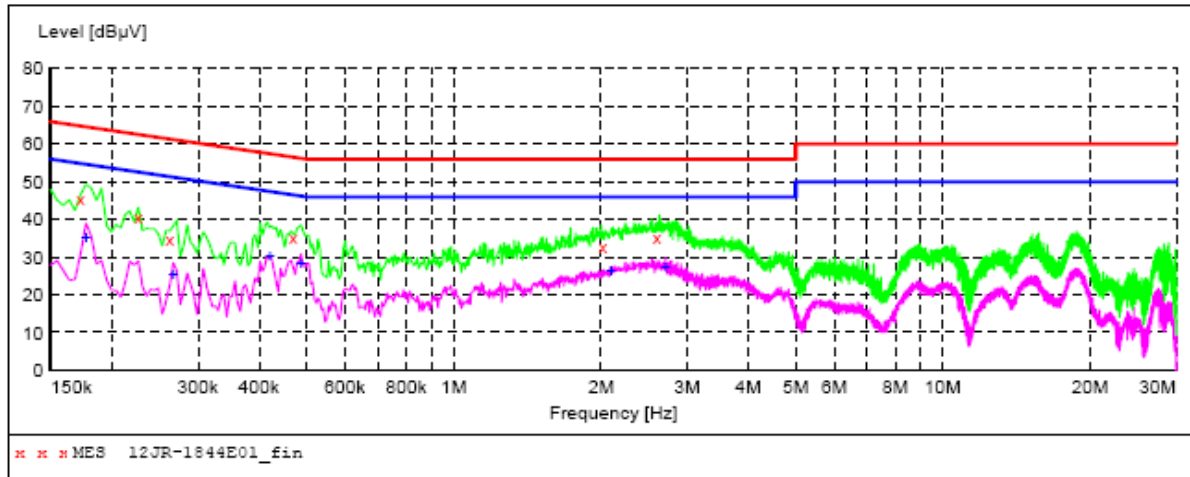

MEASUREMENT RESULT: "12JR-1844E01_fin"

10/19/2012 10:38AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	45.50	11.1	65	19.3	QP	L1	GND
0.226500	40.70	10.7	63	21.9	QP	L1	GND
0.262500	34.70	10.6	61	26.7	QP	L1	GND
0.469500	35.00	10.3	57	21.5	QP	L1	GND
2.017500	32.80	10.2	56	23.2	QP	L1	GND
2.607000	35.00	10.2	56	21.0	QP	L1	GND

MEASUREMENT RESULT: "12JR-1844E01_fin2"


10/19/2012 10:38AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	35.00	11.1	55	19.6	AV	L1	GND
0.267000	25.30	10.6	51	25.9	AV	L1	GND
0.420000	30.20	10.4	47	17.2	AV	L1	GND
0.487500	28.20	10.3	46	18.0	AV	L1	GND
2.098500	26.40	10.2	46	19.6	AV	L1	GND
2.710500	27.70	10.2	46	18.3	AV	L1	GND

Conducted Emission:

EUT: NETTOP
Operating Condition: Normal operation
Test Site: Shielded Room
Operator: Andy
Test Specification: AC/DC adapter (AC 120V/60Hz)
Comment: Neutral Line

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

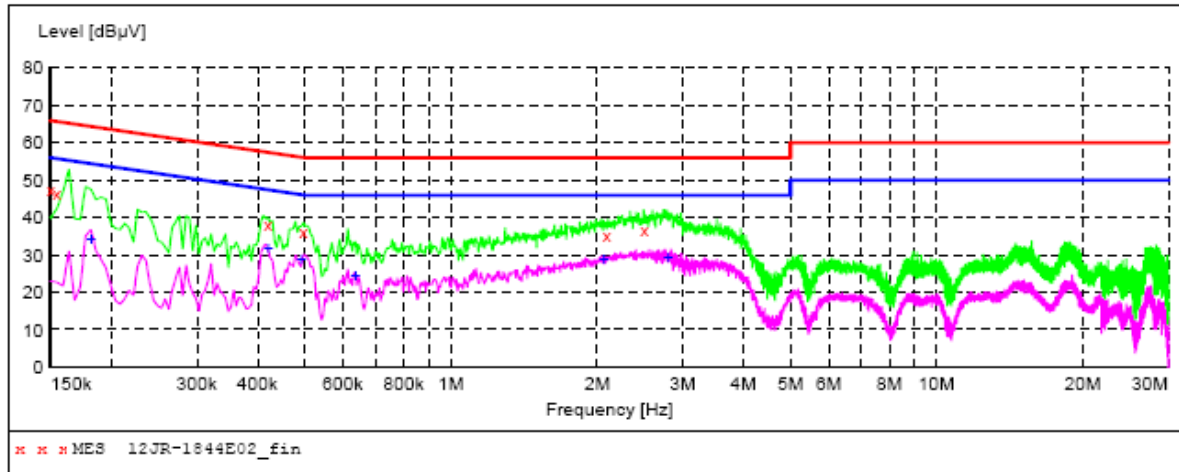

MEASUREMENT RESULT: "12JR-1844E02_fin"

10/19/2012 10:41AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	47.60	11.4	66	18.4	QP	N	GND
0.154500	46.40	11.4	66	19.4	QP	N	GND
0.420000	38.40	10.4	57	19.0	QP	N	GND
0.496500	36.20	10.3	56	19.9	QP	N	GND
2.094000	35.20	10.2	56	20.8	QP	N	GND
2.503500	36.50	10.2	56	19.5	QP	N	GND

MEASUREMENT RESULT: "12JR-1844E02_fin2"

10/19/2012 10:41AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	34.40	11.0	54	20.0	AV	N	GND
0.420000	31.70	10.4	47	15.7	AV	N	GND
0.492000	28.90	10.3	46	17.2	AV	N	GND
0.636000	24.60	10.2	46	21.4	AV	N	GND
2.067000	28.70	10.2	46	17.3	AV	N	GND
2.800500	29.30	10.2	46	16.7	AV	N	GND

5. Test of Maximum Peak Output Power

5.1 Applicable Standard

Refer to FCC §15.247 (b)

5.2 EUT Setup

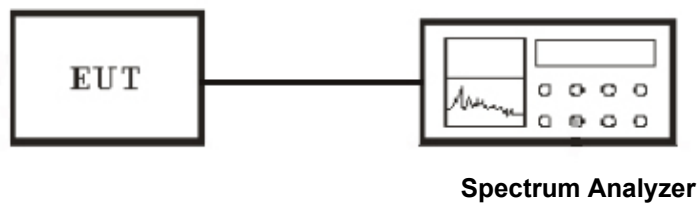

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Measurement of Digital Transmission Systems Operating under Section 15.247

5.5 Test Result

Temperature (°C) : 22~23	EUT: NETTOP
Humidity (%RH) : 50~54	M/N: EDGE HD
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	11.52	30	PASS
Middle	2437	11.06	30	PASS
High	2462	10.85	30	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	6.30	30	PASS
Middle	2437	6.19	30	PASS
High	2462	6.02	30	PASS

NOTE : 1. At final test to get the worst-case emission at 54Mbps.

IEEE 802.11n HT20mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	6.24	30	PASS
Middle	2437	6.06	30	PASS
High	2462	5.30	30	PASS


NOTE : 1. At final test to get the worst-case emission at 12Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2422	1.97	30	PASS
Middle	2437	2.10	30	PASS
High	2452	2.01	30	PASS

NOTE : 1. At final test to get the worst-case emission at 22Mbps.


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Low)

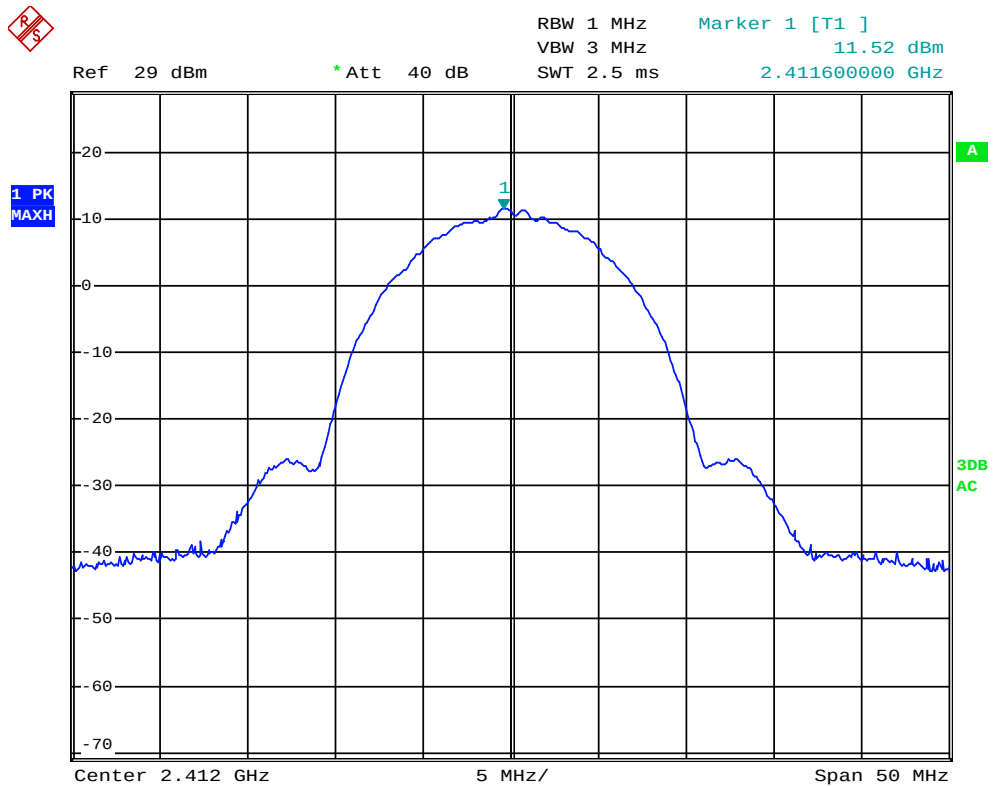

MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Mid)

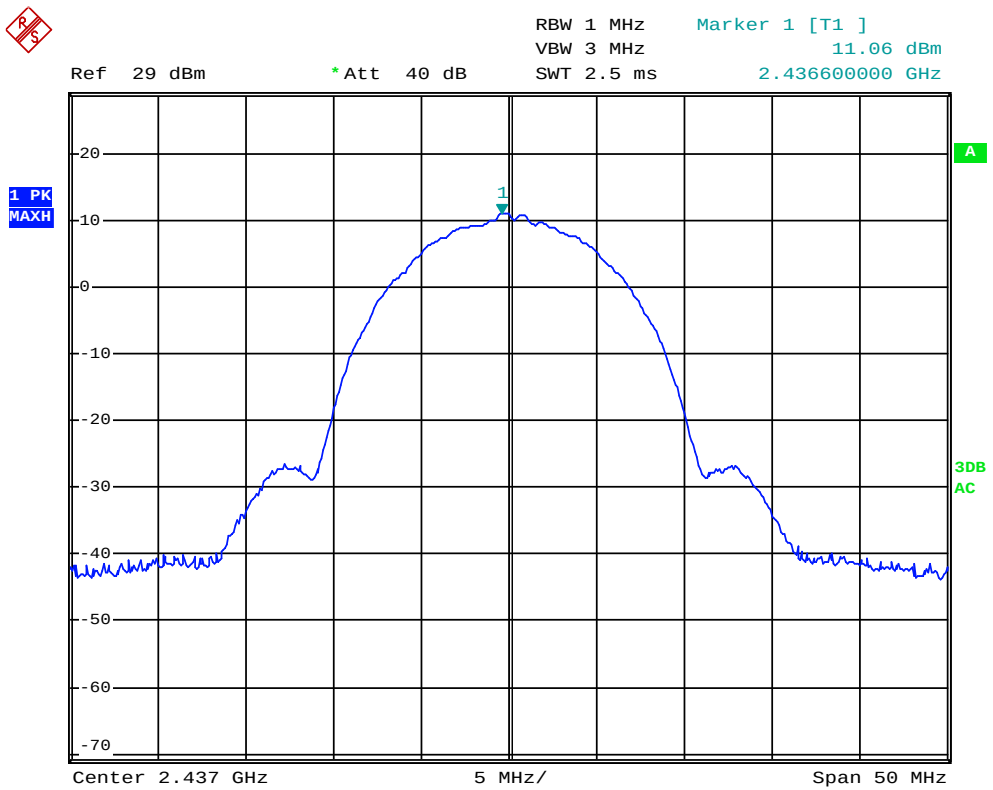


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH High)

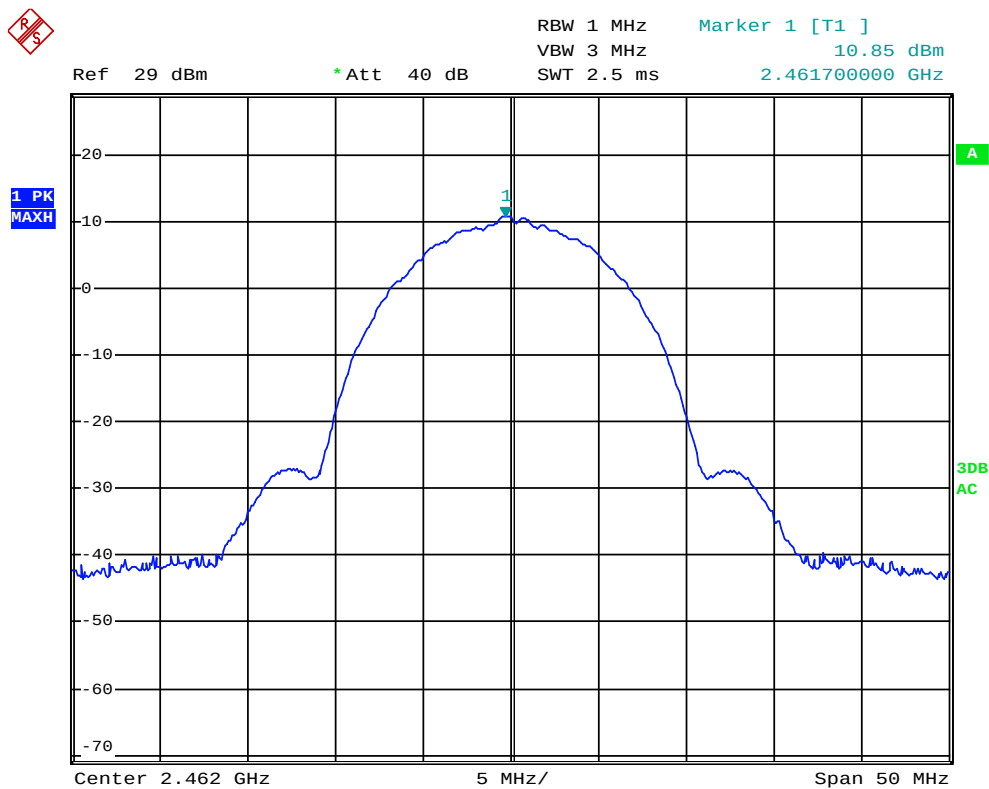

MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Low)




RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 6.30 dBm
Ref 29 dBm * Att 40 dB SWT 2.5 ms 2.415300000 GHz

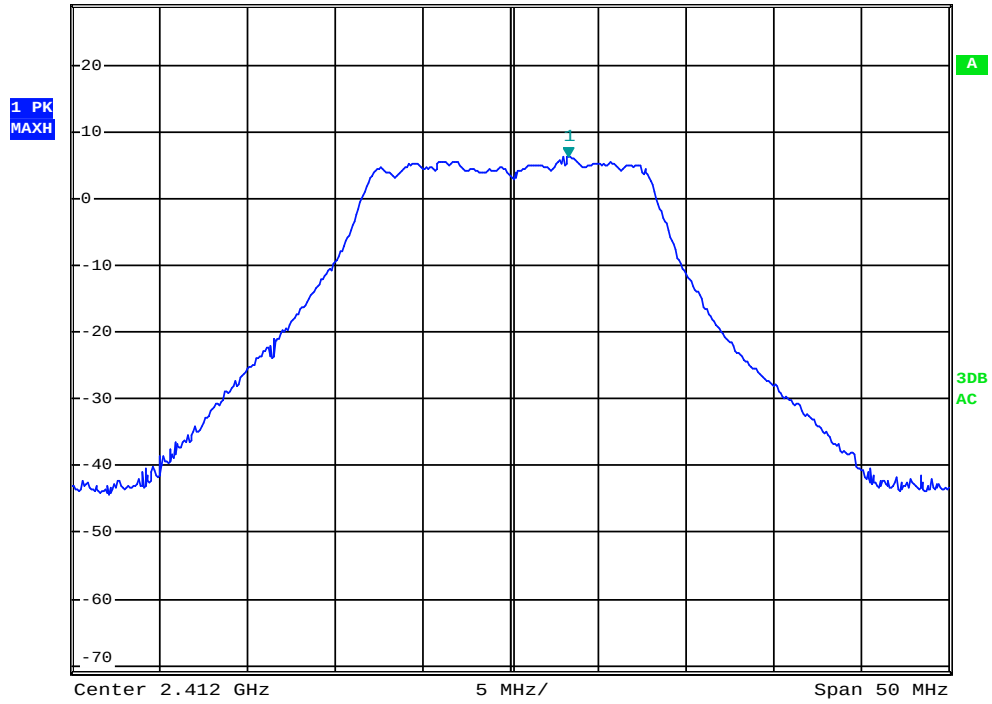


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Mid)




RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 6.19 dBm
Ref 29 dBm * Att 40 dB SWT 2.5 ms 2.440300000 GHz

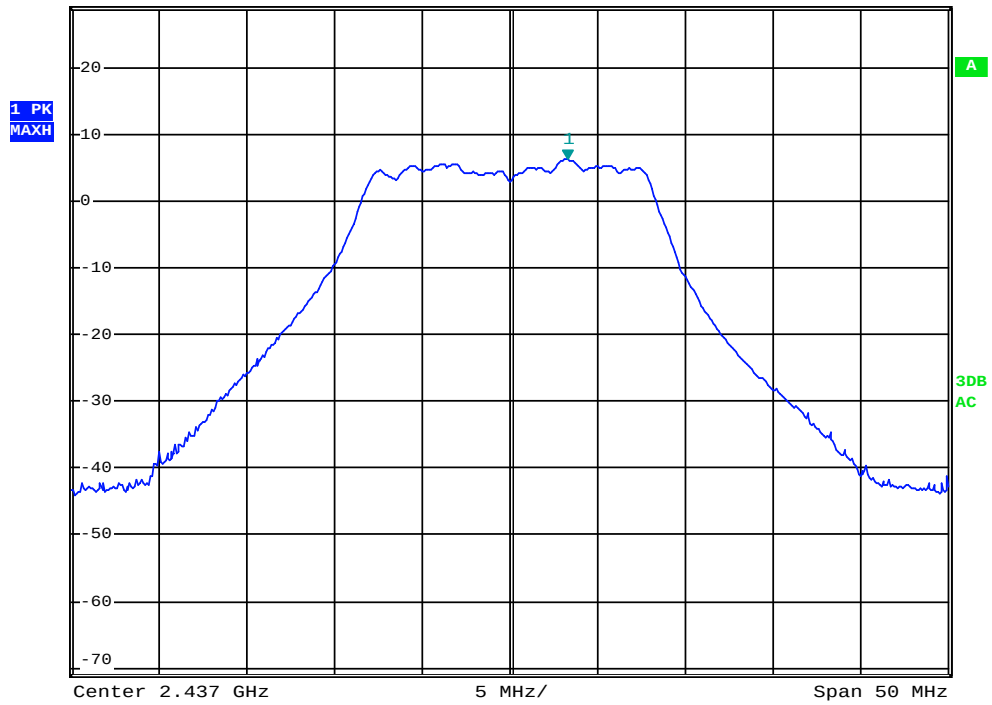


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH High)

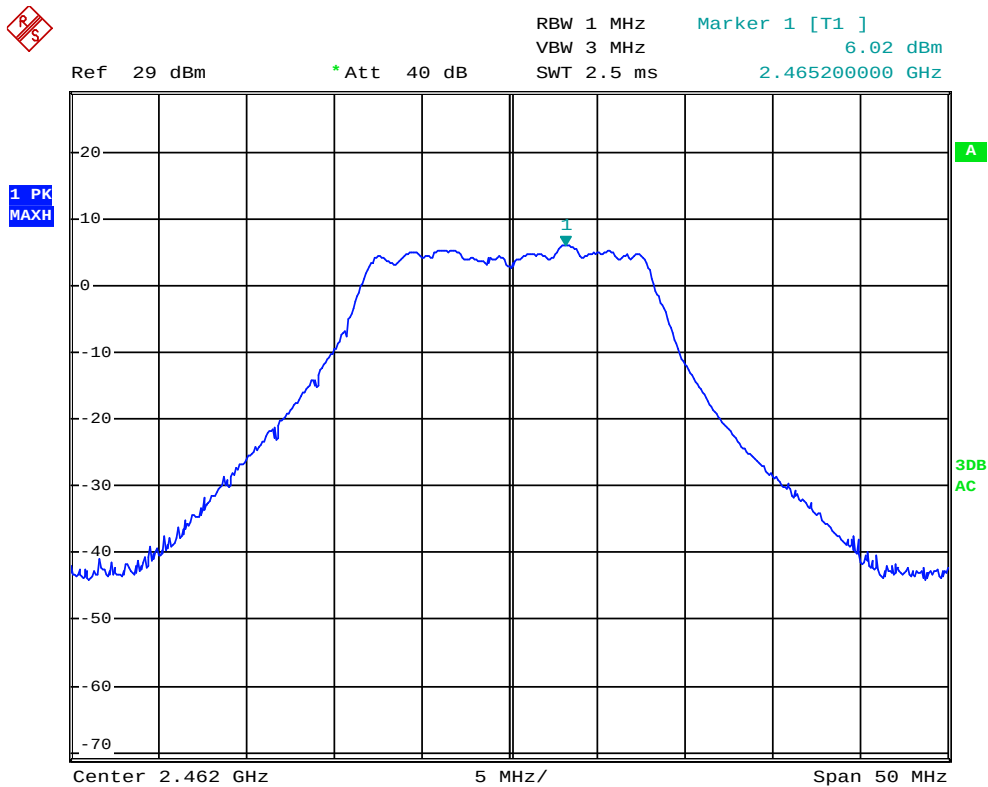


MAXIMUM PEAK OUTPUT POWER (802.11nHT20 MODE CH Low)

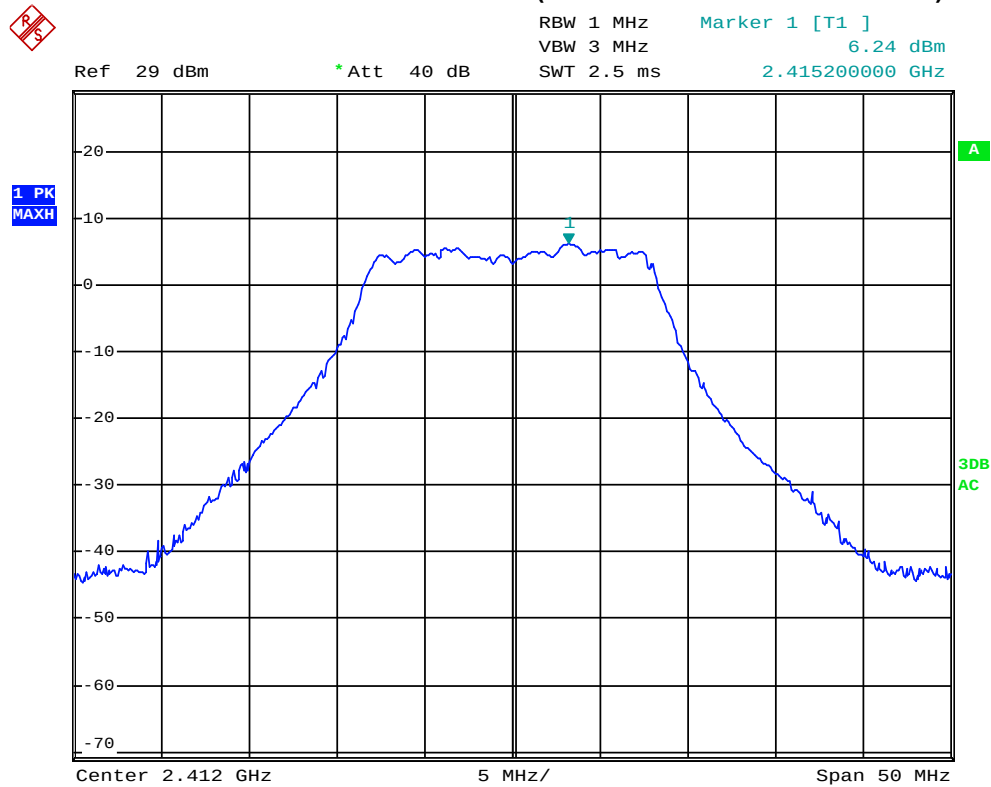


MAXIMUM PEAK OUTPUT POWER (802.11nHT20 MODE CH Mid)

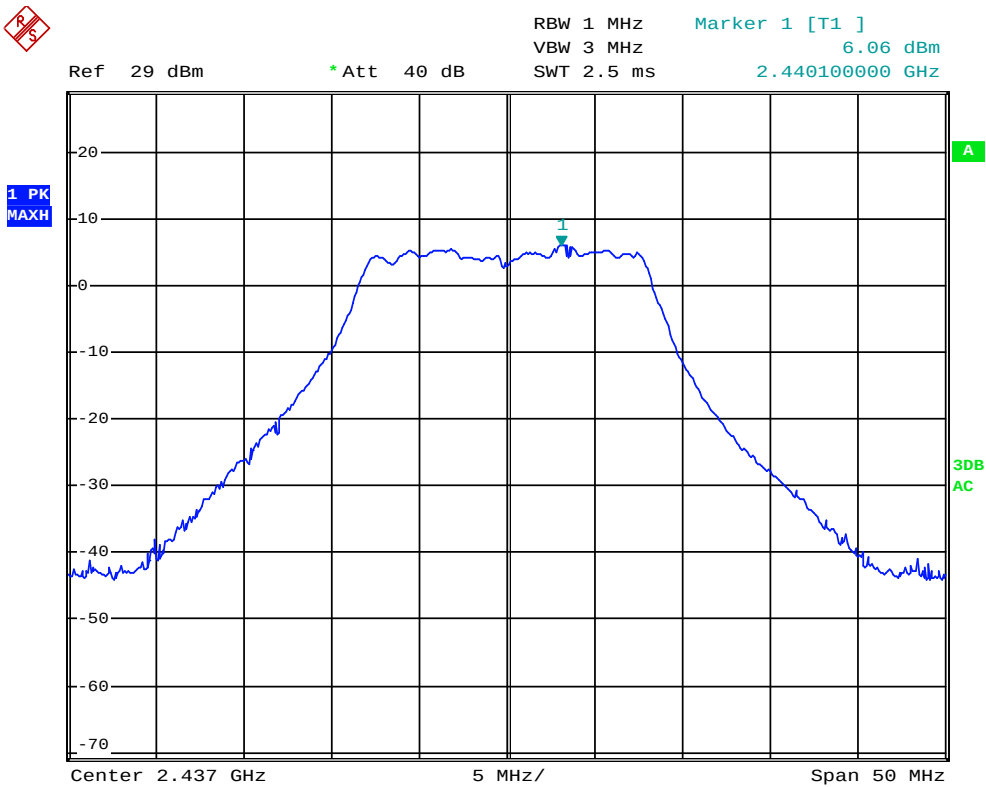


MAXIMUM PEAK OUTPUT POWER (802.11nHT20 MODE CH High)

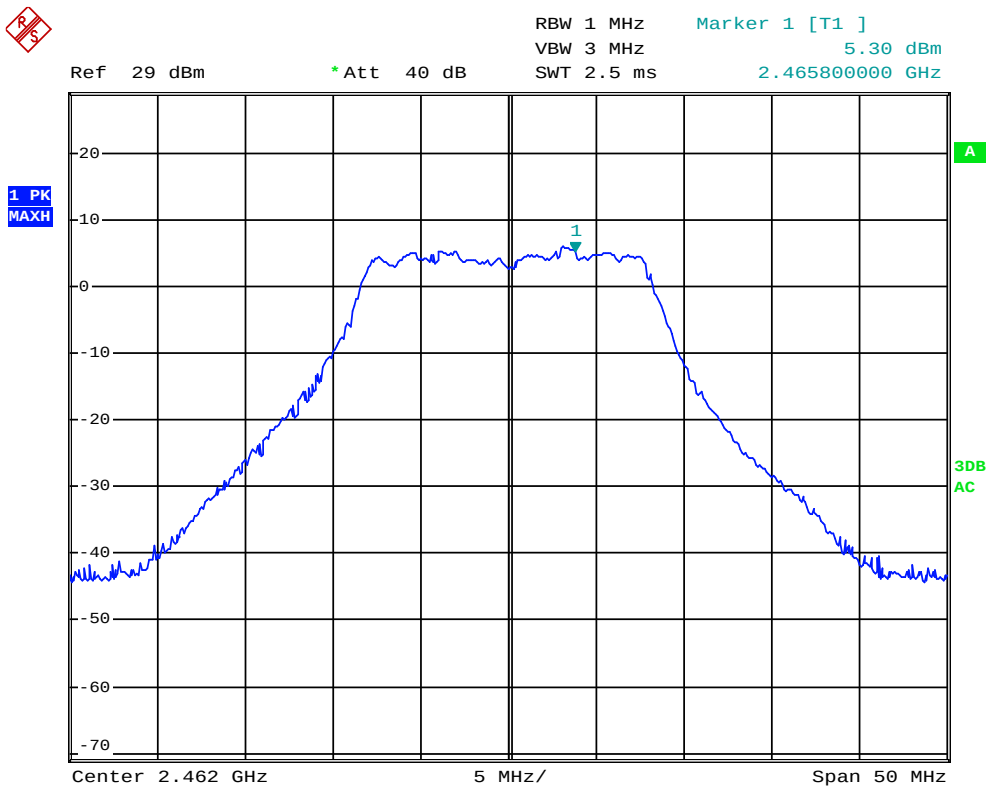


MAXIMUM PEAK OUTPUT POWER (802.11nHT40 MODE CH Low)

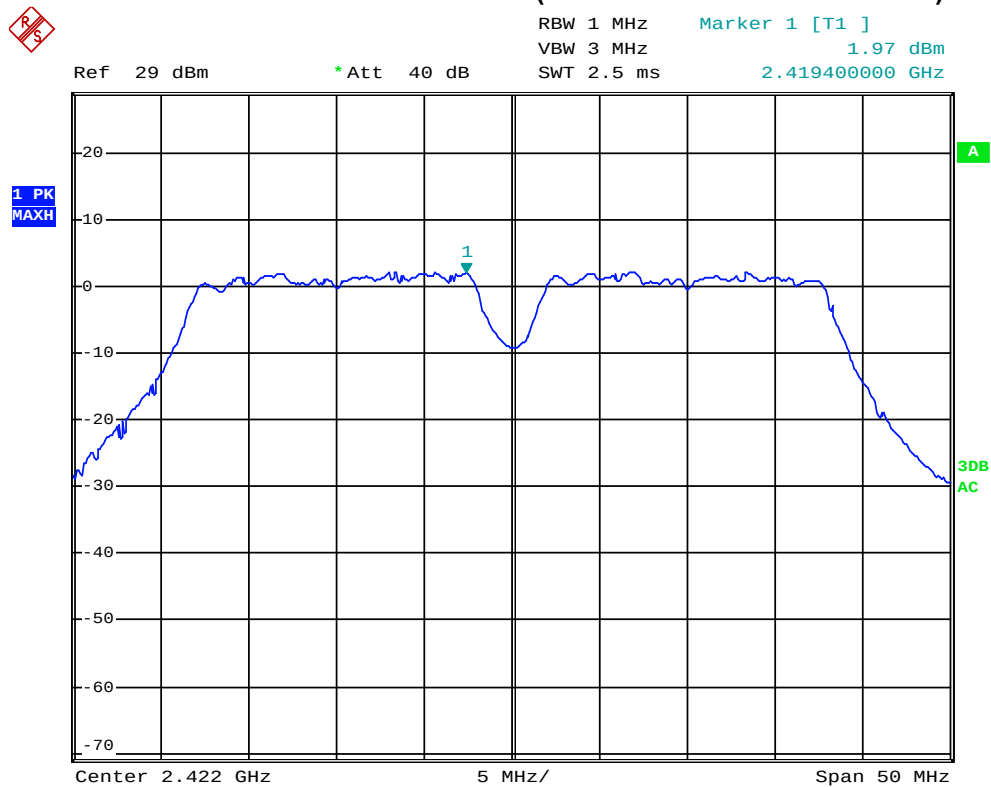

MAXIMUM PEAK OUTPUT POWER (802.11nHT40 MODE CH Mid)

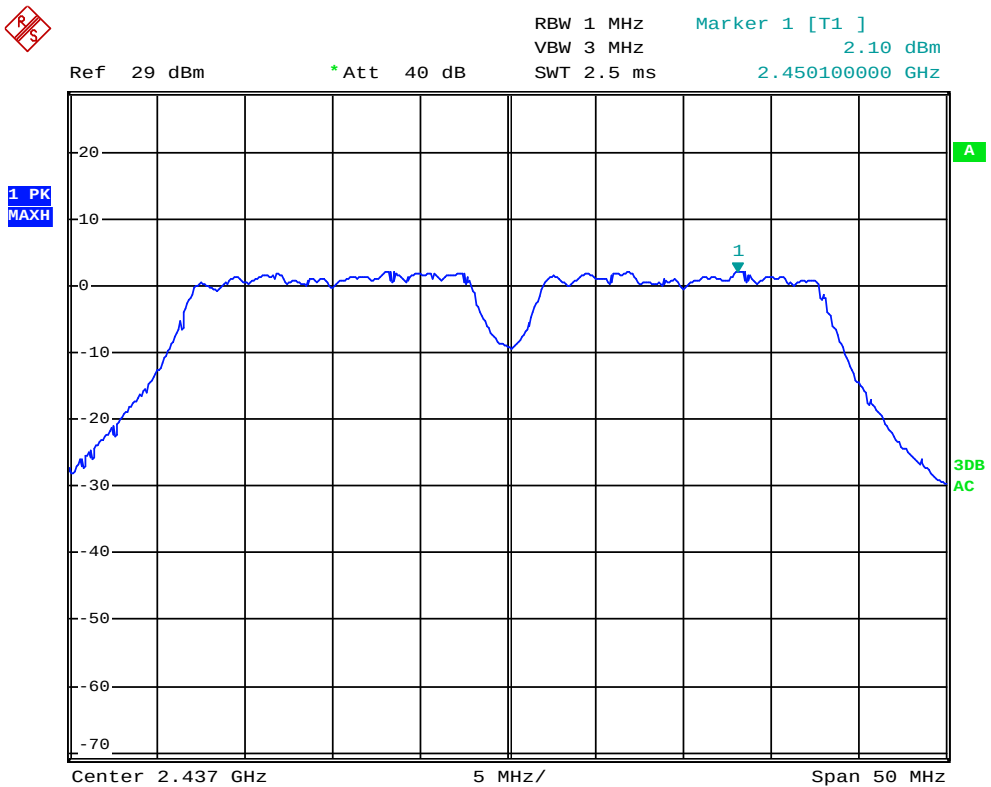

MAXIMUM PEAK OUTPUT POWER (802.11nHT40 MODE CH High)

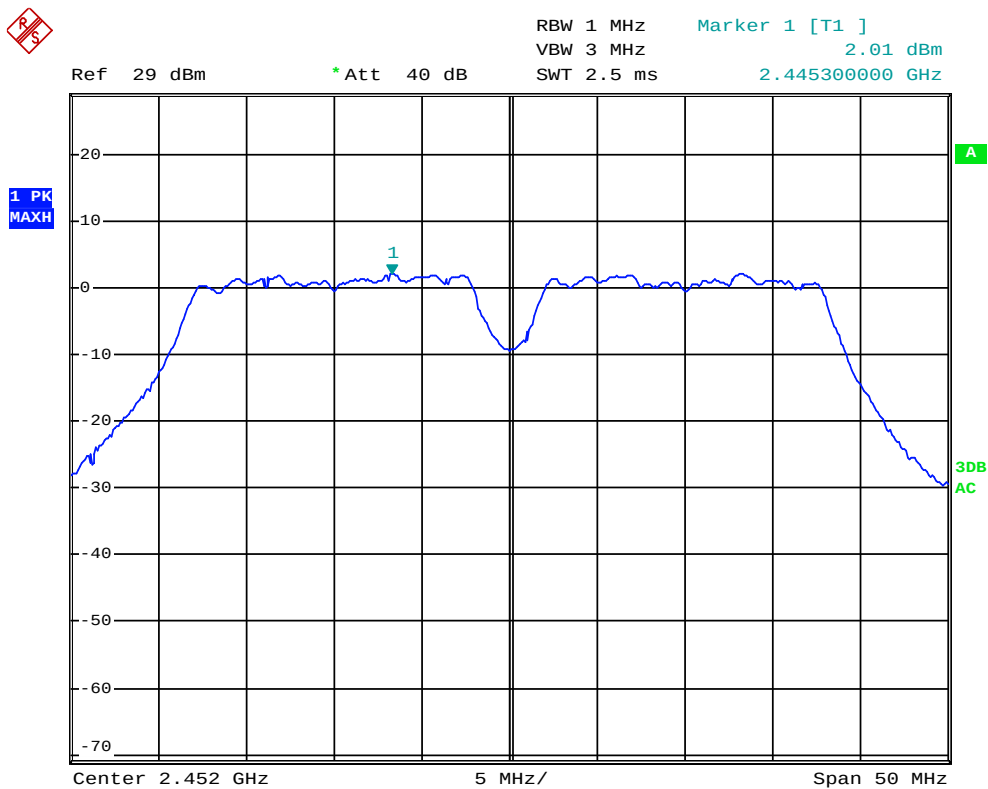


6. Test of Peak Power Spectral Density

6.1 Applicable Standard

Refer to FCC §15.247 (e).

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 EUT Setup

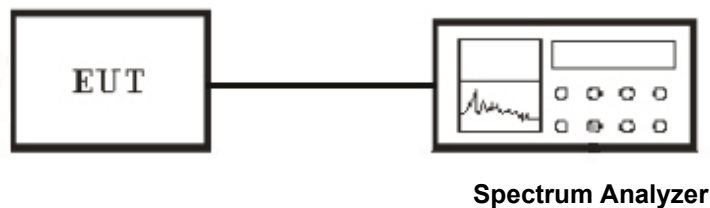

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using $RBW=3\text{KHz}$ and $VBW \geq RBW$, set sweep time=span / 3KHz.

The power spectral density was measured and recorded. The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Test Result

Temperature (°C) : 22~23	EUT: NETTOP
Humidity (%RH) : 50~54	M/N: EDGE HD
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-13.86	8	PASS
Middle	2437	-14.45	8	PASS
High	2462	-14.56	8	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11 g mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-18.90	8	PASS
Middle	2437	-19.50	8	PASS
High	2462	-19.81	8	PASS

NOTE : 1. At final test to get the worst-case emission at 54Mbps.

IEEE 802.11nHT20 mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-18.94	8	PASS
Middle	2437	-19.04	8	PASS
High	2462	-19.47	8	PASS


NOTE : 1. At final test to get the worst-case emission at 12Mbps.

IEEE 802.11nHT40 mode


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2422	-22.71	8	PASS
Middle	2437	-22.49	8	PASS
High	2452	-22.53	8	PASS

NOTE : 1. At final test to get the worst-case emission at 22Mbps.


POWER SPECTRAL DENSITY (802.11b MODE CH Low)

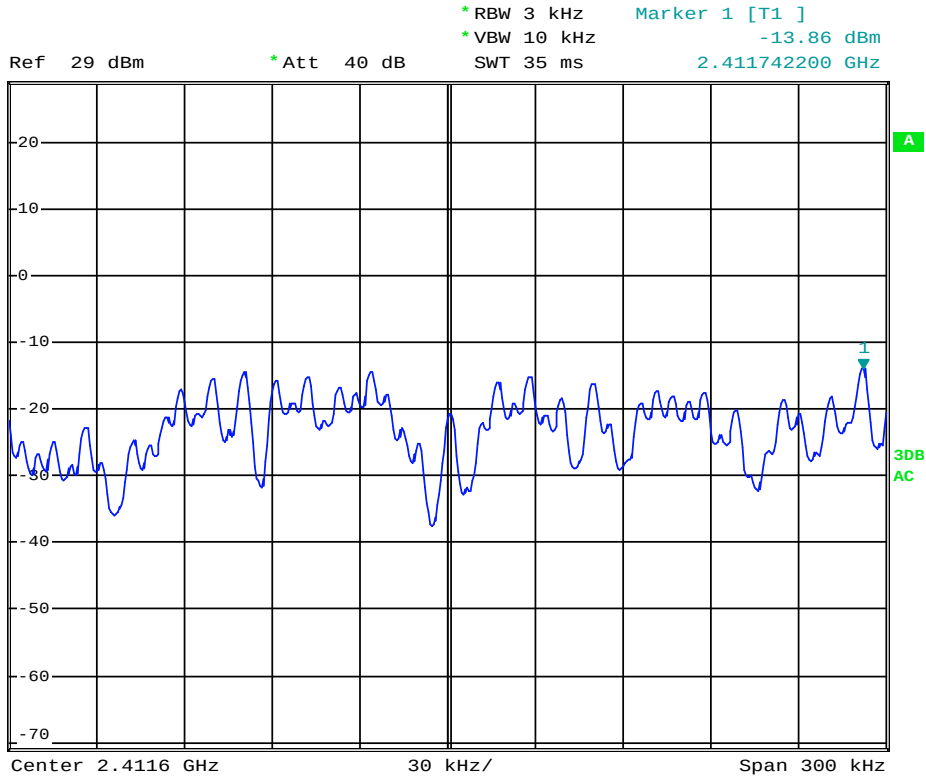


POWER SPECTRAL DENSITY (802.11b MODE CH Mid)

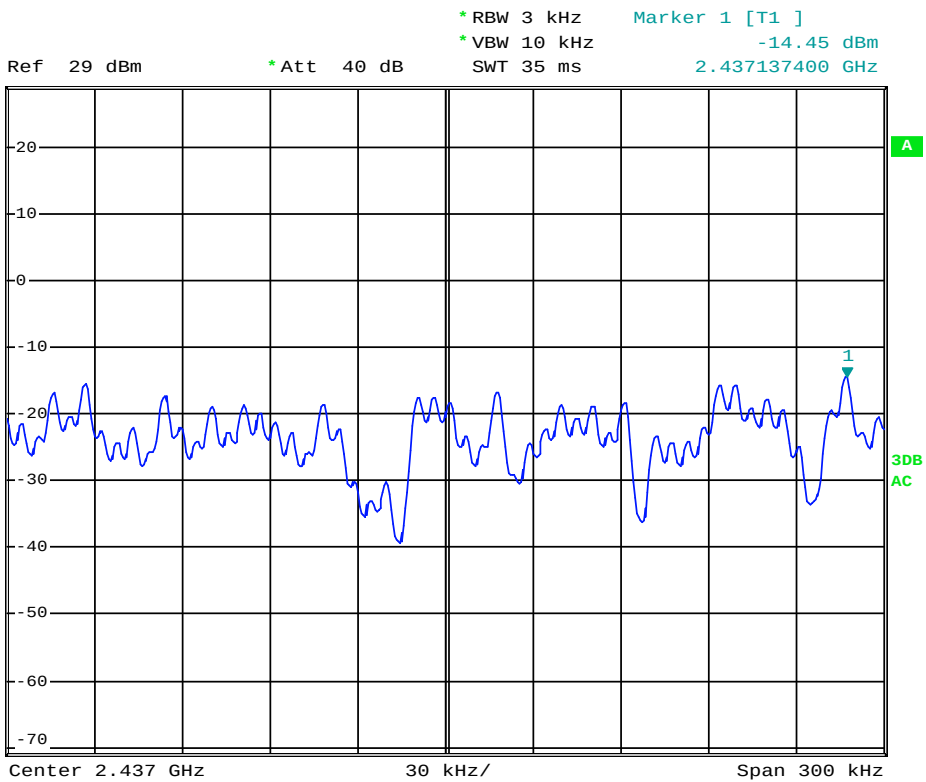


POWER SPECTRAL DENSITY (802.11b MODE CH High)

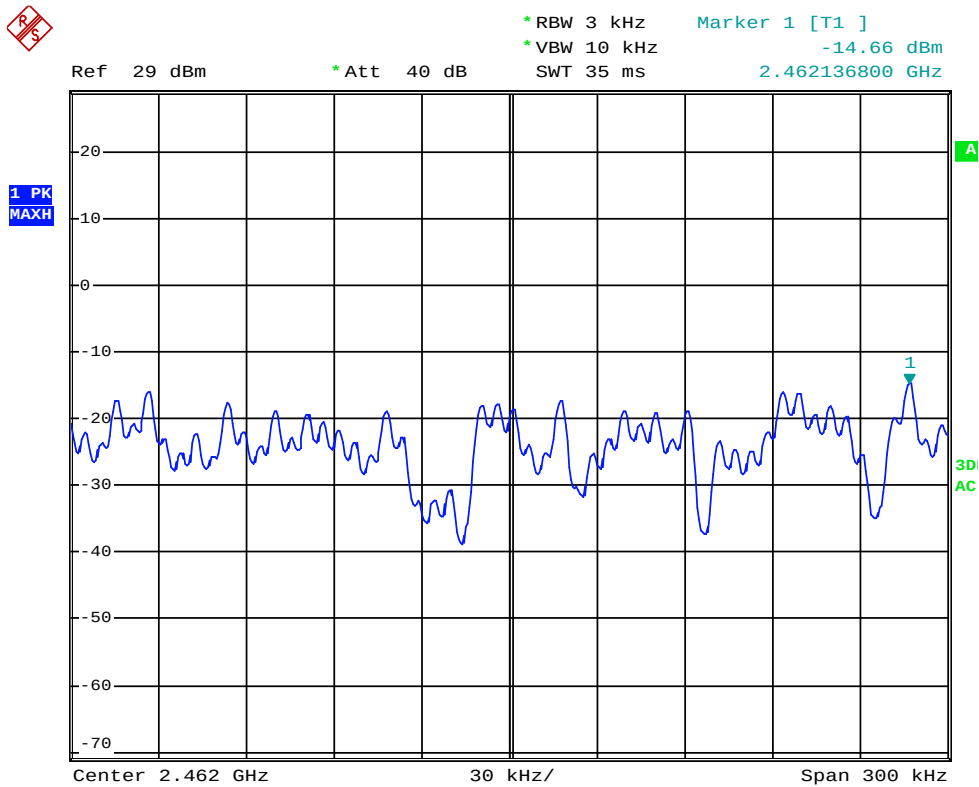

POWER SPECTRAL DENSITY (802.11g MODE CH Low)

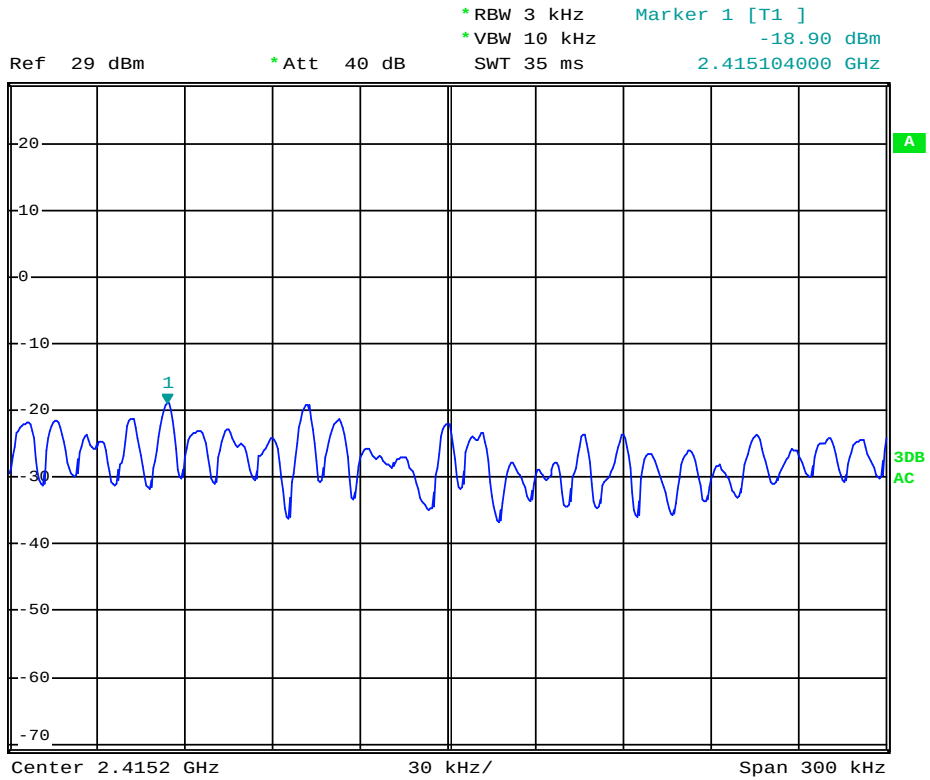


POWER SPECTRAL DENSITY (802.11g MODE CH Mid)

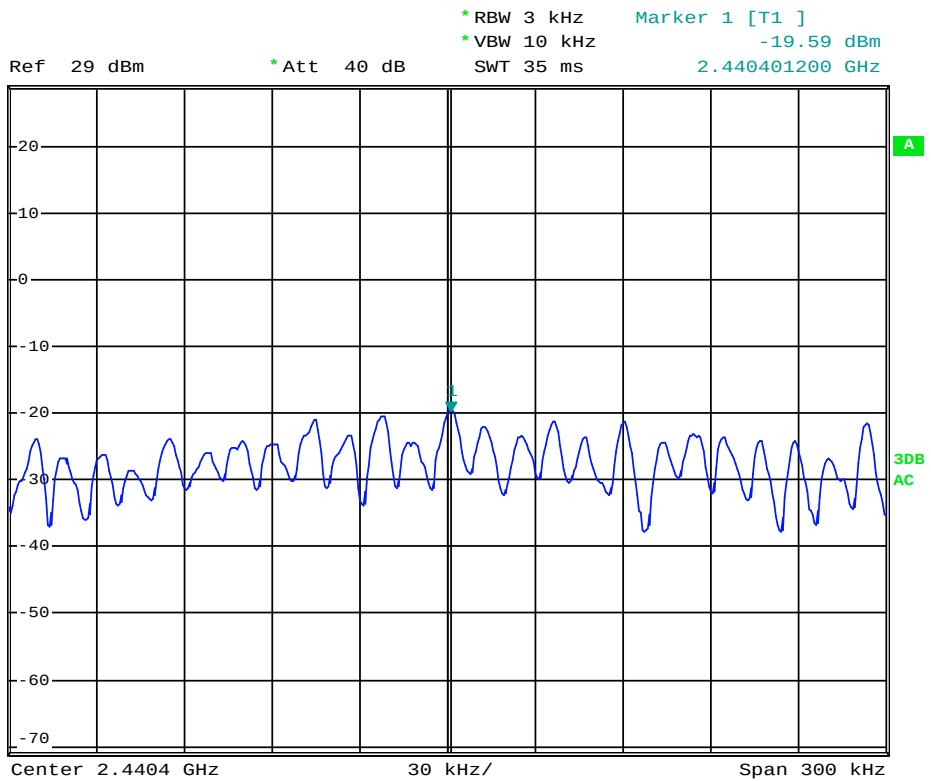


POWER SPECTRAL DENSITY (802.11g MODE CH High)




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -19.81 dBm
SWT 35 ms 2.465400600 GHz

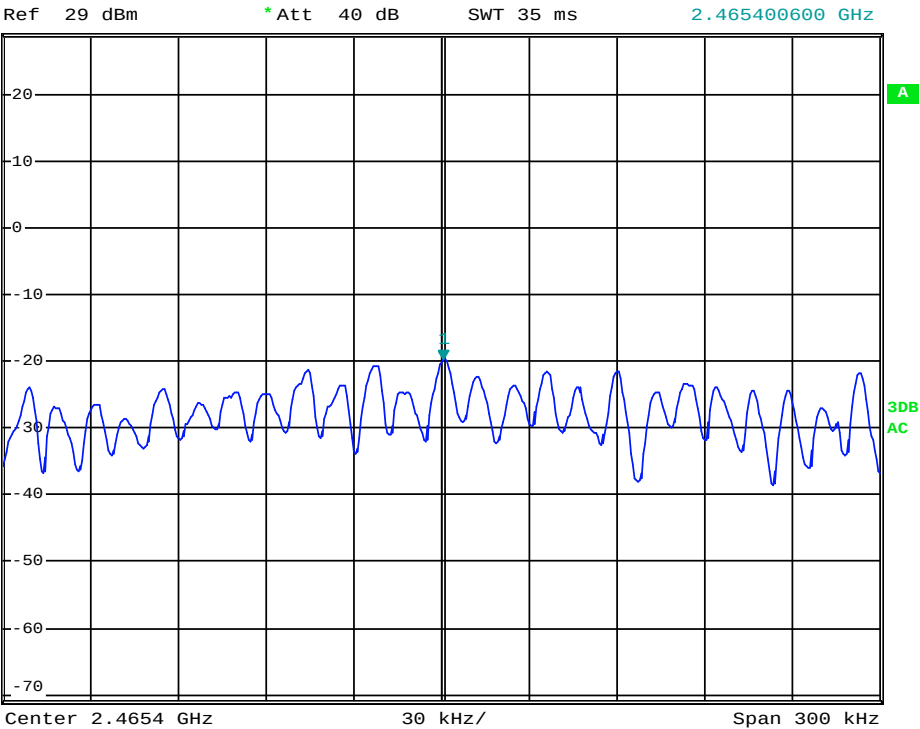

POWER SPECTRAL DENSITY (802.11nHT20 MODE CH Low)

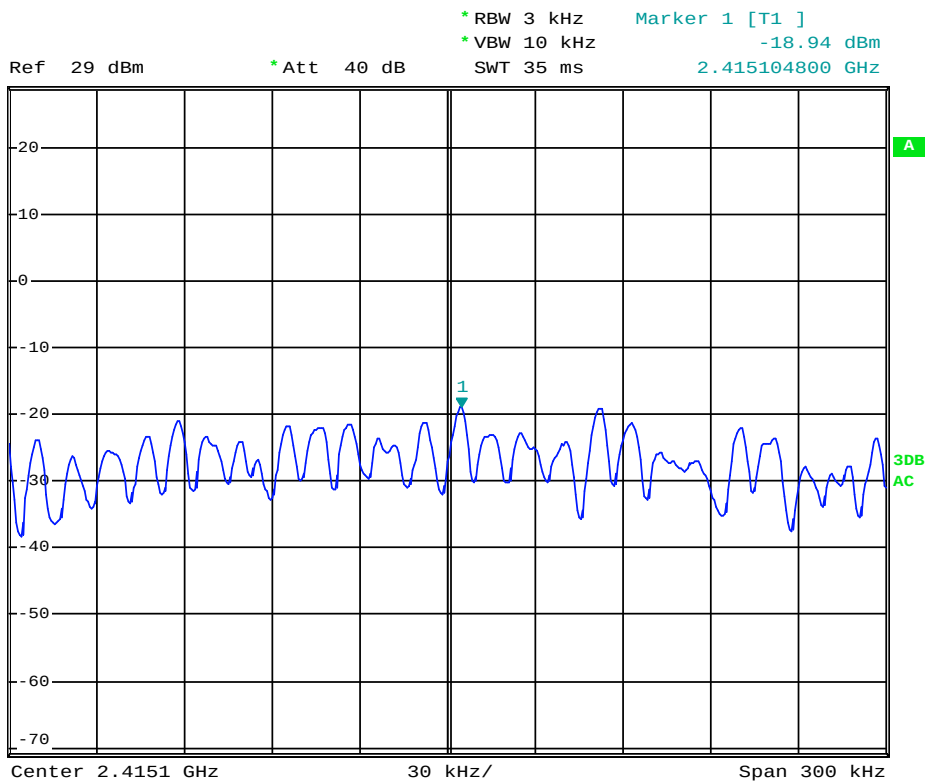

POWER SPECTRAL DENSITY (802.11nHT20 MODE CH Mid)

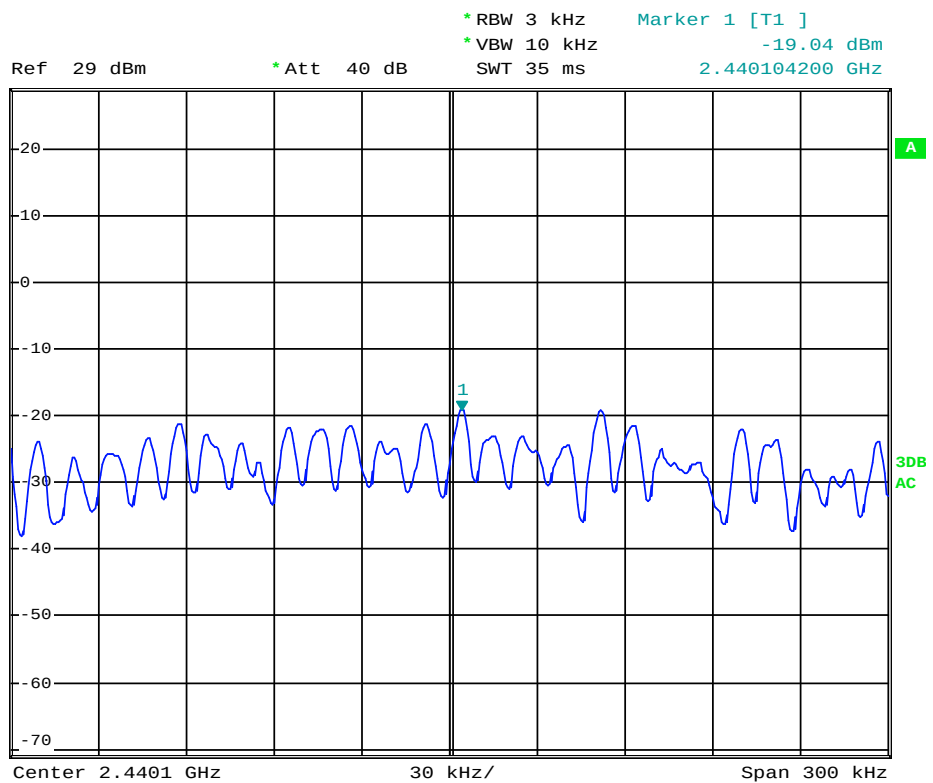

POWER SPECTRAL DENSITY (802.11nHT20 MODE CH High)




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -19.47 dBm
SWT 35 ms 2.465151200 GHz

Ref 29 dBm

*Att 40 dB



1 PK
MAXH

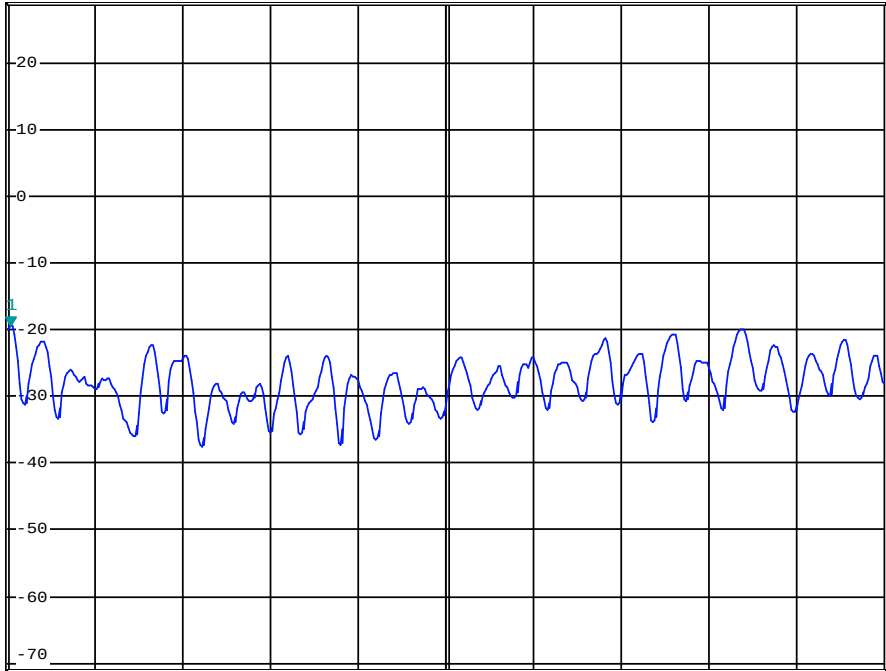


Center 2.4653 GHz

30 kHz/

Span 300 kHz

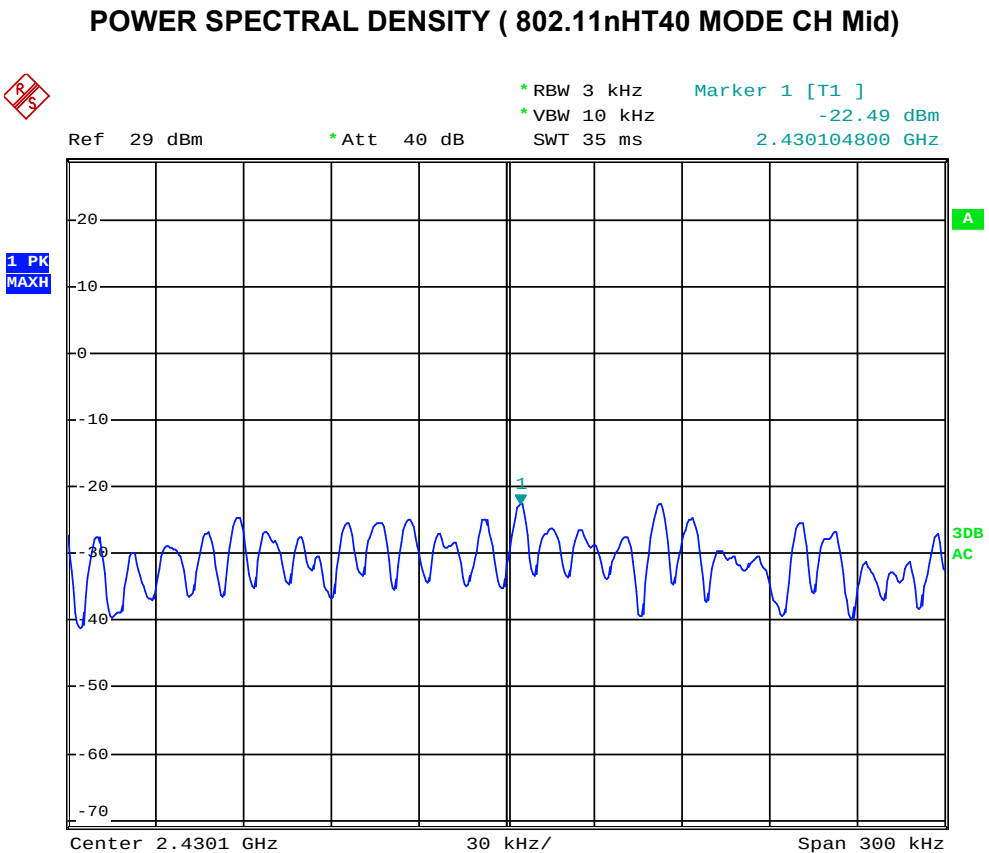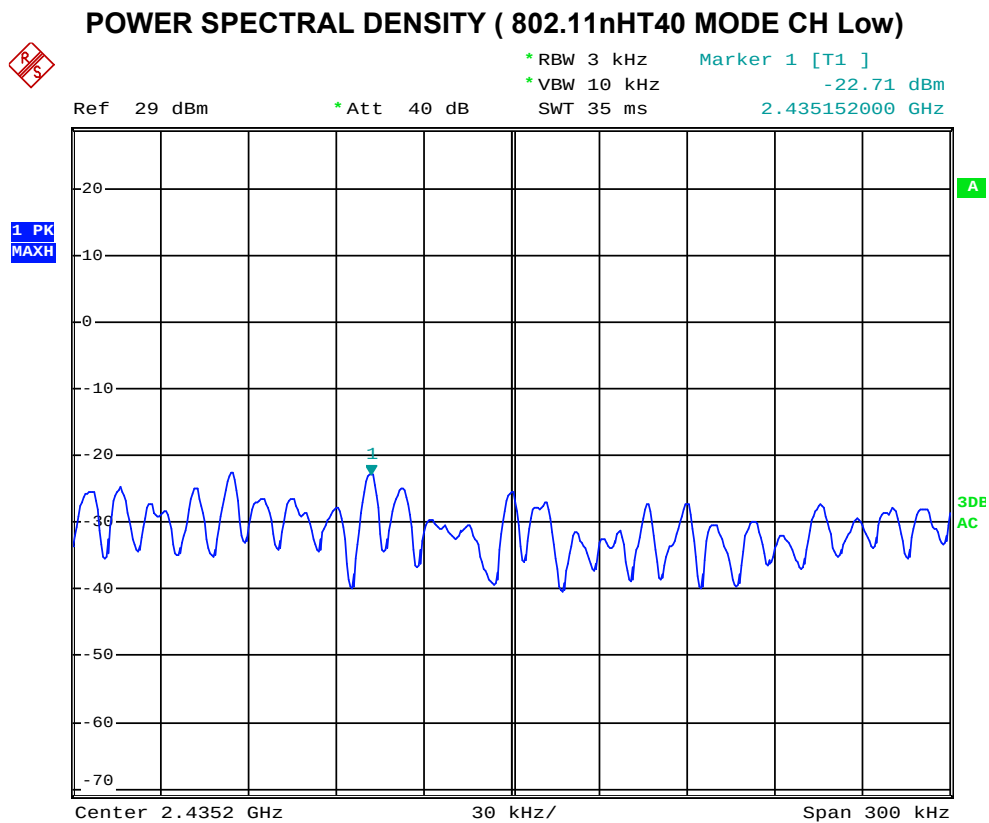

POWER SPECTRAL DENSITY (802.11nHT40 MODE CH High)

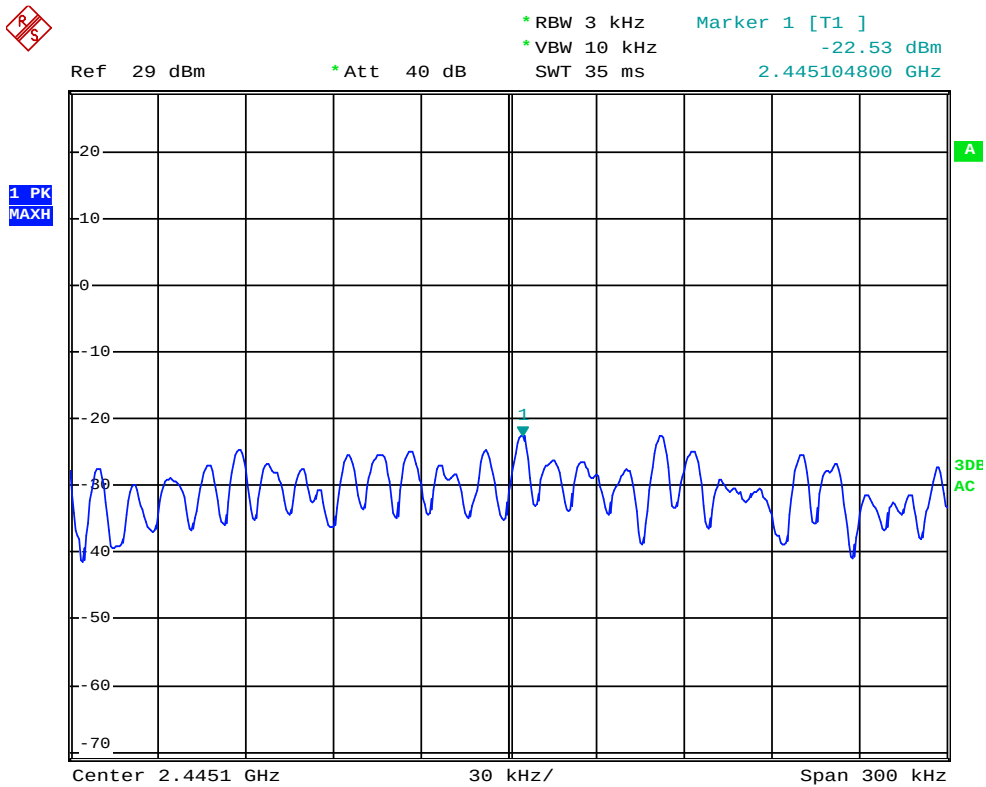


7. Test of 6dB Bandwidth

7.1 Applicable Standard

Refer to FCC §15.247 (a) (2), The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 EUT Setup

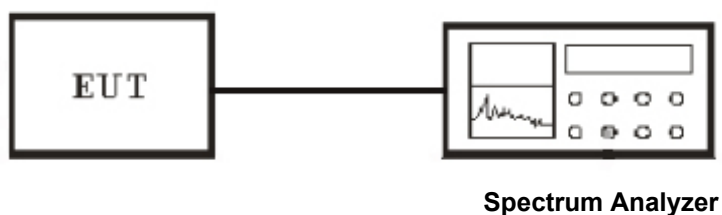

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.5 Test Result

Temperature (°C) : 22~23	EUT: NETTOP
Humidity (%RH) : 50~54	M/N: EDGE HD
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	8400	500	PASS
Middle	2437	8700	500	PASS
High	2462	8500	500	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16600	500	PASS
Middle	2437	16500	500	PASS
High	2462	16600	500	PASS

NOTE : 1. At final test to get the worst-case emission at 54Mbps.

IEEE 802.11nHT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16600	500	PASS
Middle	2437	16500	500	PASS
High	2462	16600	500	PASS


NOTE : 1. At final test to get the worst-case emission at 12Mbps.

IEEE 802.11 nHT40mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2422	36500	500	PASS
Middle	2437	36600	500	PASS
High	2452	36600	500	PASS

NOTE : 1. At final test to get the worst-case emission at 22Mbps.

6dB BANDWIDTH (802.11b MODE CH Low)

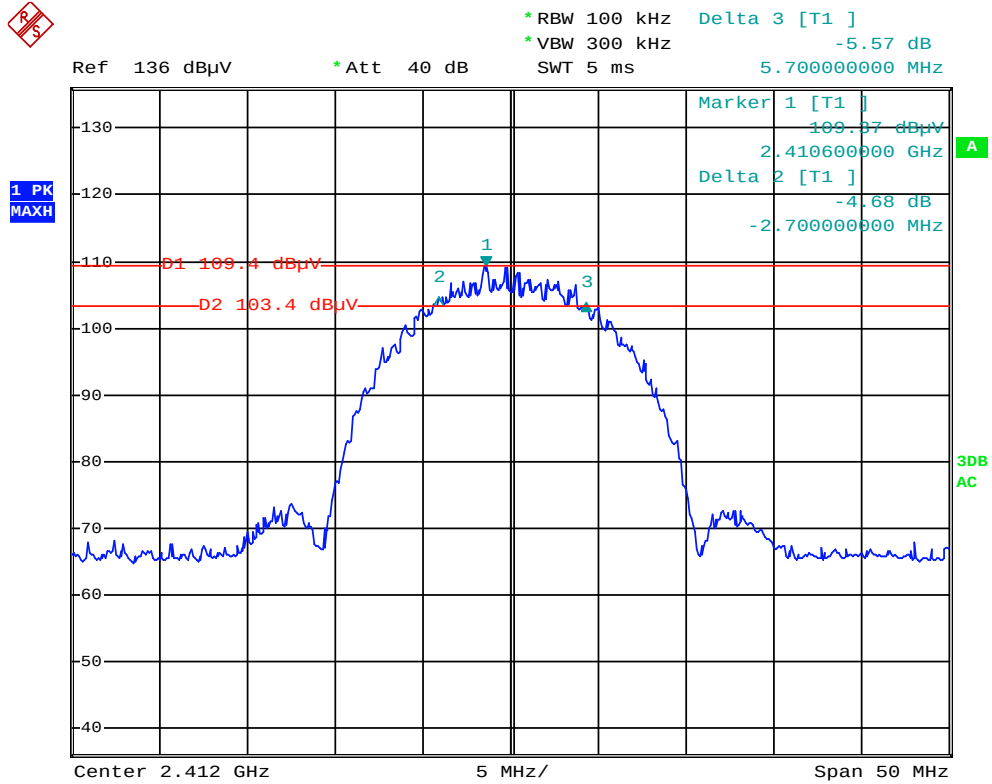

6dB BANDWIDTH (802.11b MODE CH Mid)

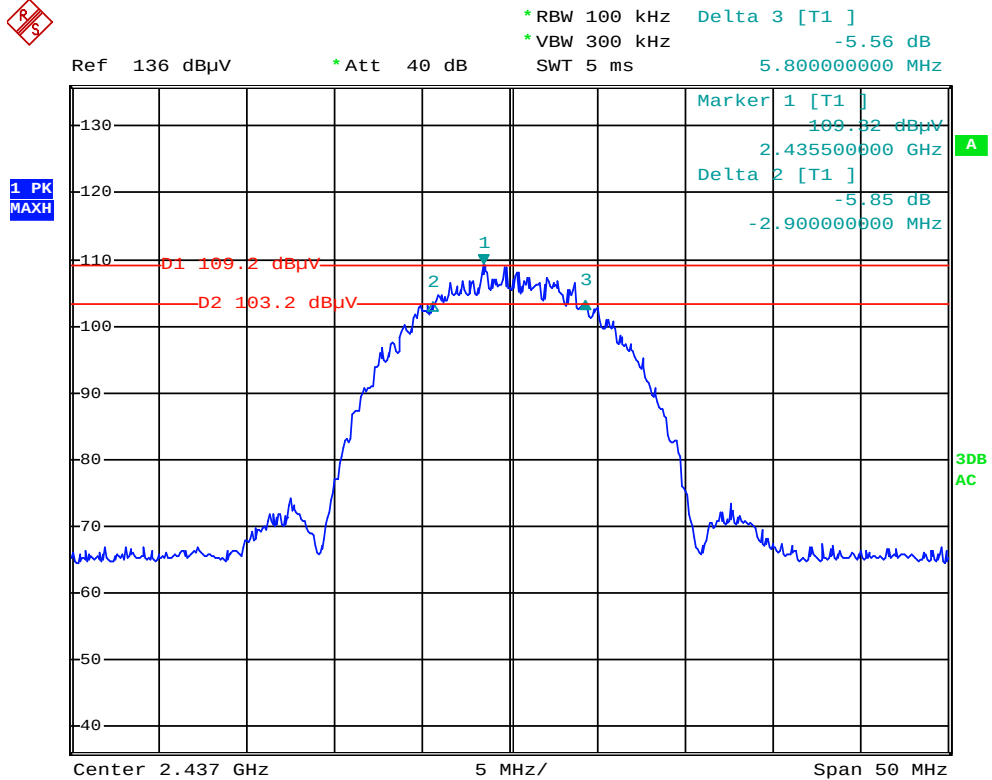

6dB BANDWIDTH (802.11b MODE CH High)



*RBW 100 kHz Delta 3 [T1]
 *VBW 300 kHz -5.59 dB
 SWT 5 ms 5.800000000 MHz


Ref 136 dBμV

*Att 40 dB

SWT 5 ms

5.800000000 MHz

1 PK
MAXH

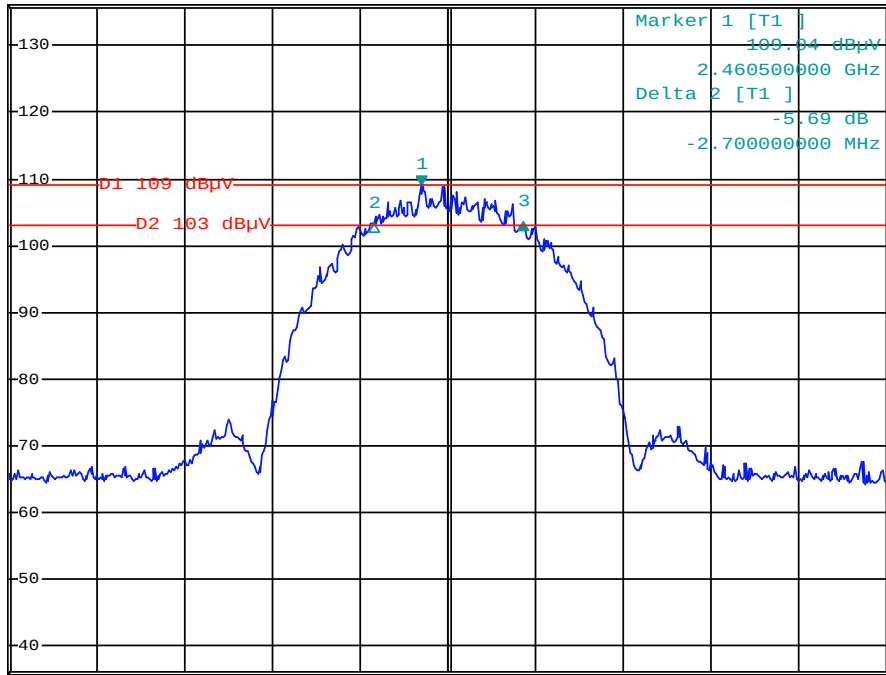

Center 2.462 GHz


5 MHz/

Span 50 MHz


3dB
AC



6dB BANDWIDTH (802.11g MODE CH Low)

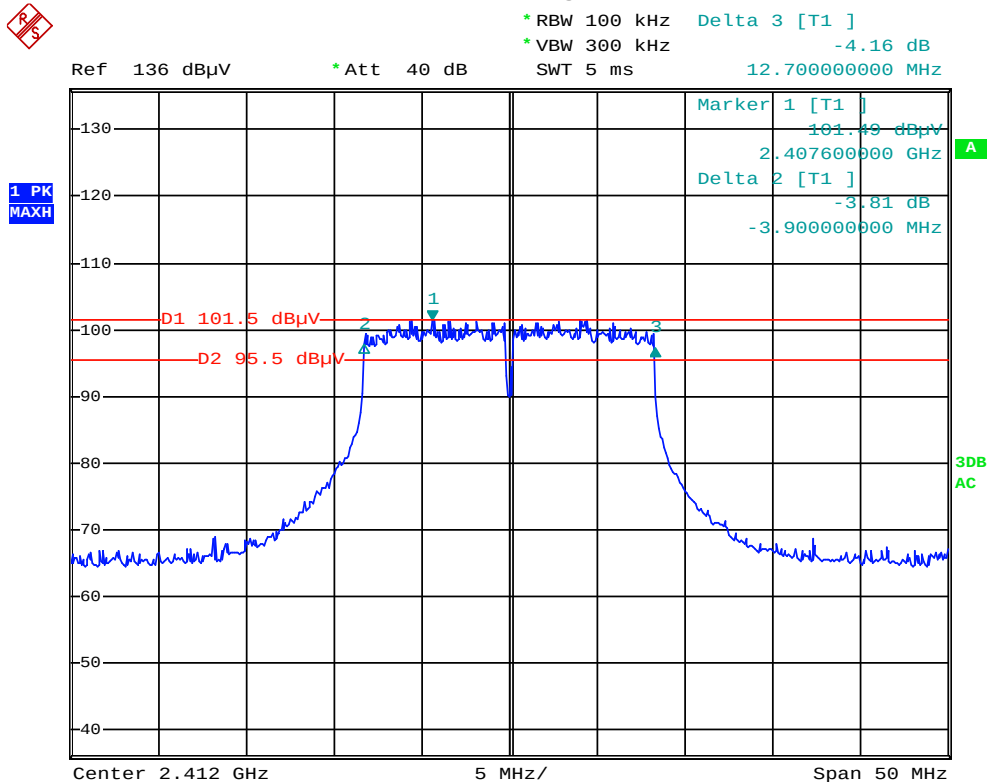


6dB BANDWIDTH (802.11g MODE CH Mid)

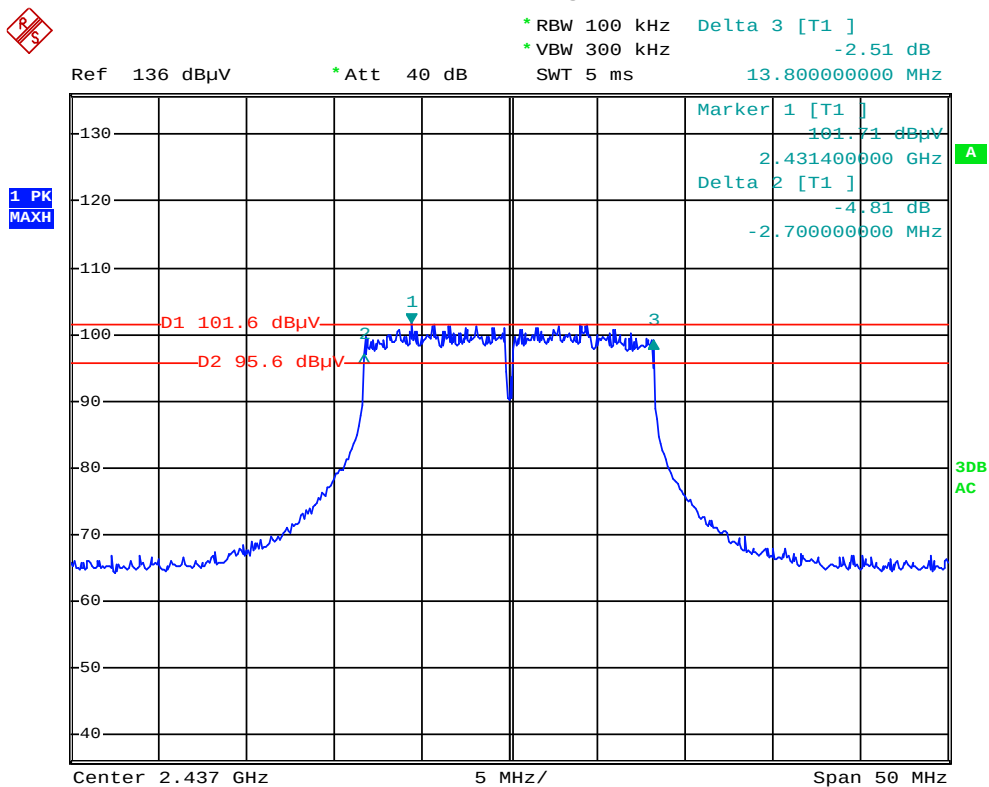


6dB BANDWIDTH (802.11g MODE CH High)




Ref 136 dBμV * Att 40 dB * RBW 100 kHz Delta 3 [T1]
* VBW 300 kHz -4.24 dB
SWT 5 ms 11.800000000 MHz

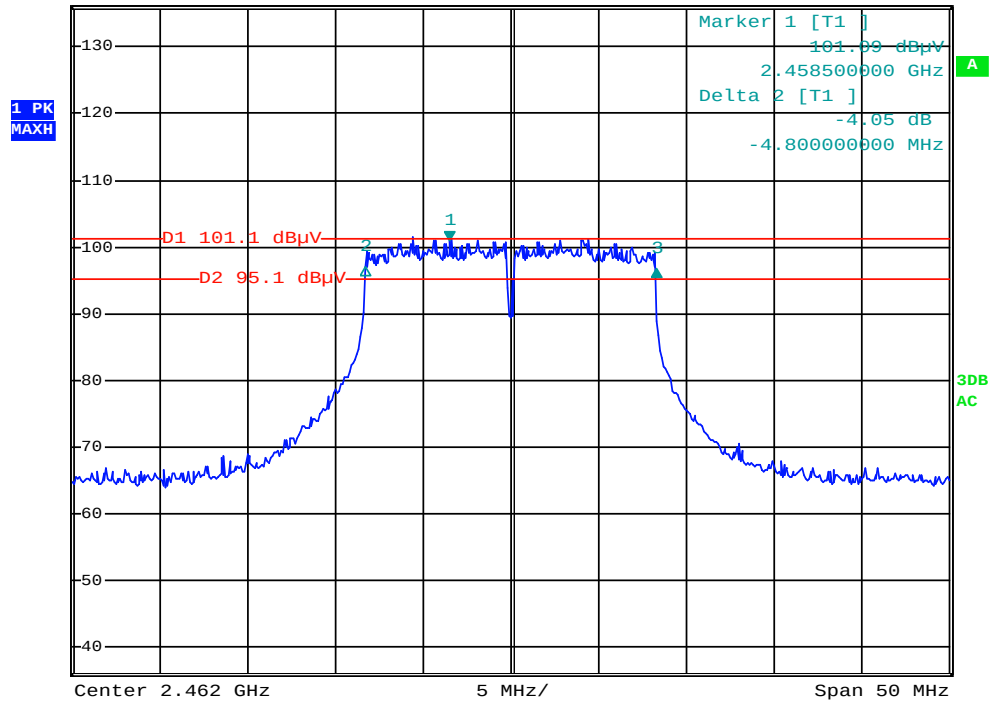

6dB BANDWIDTH (802.11nHT20 MODE CH Low)

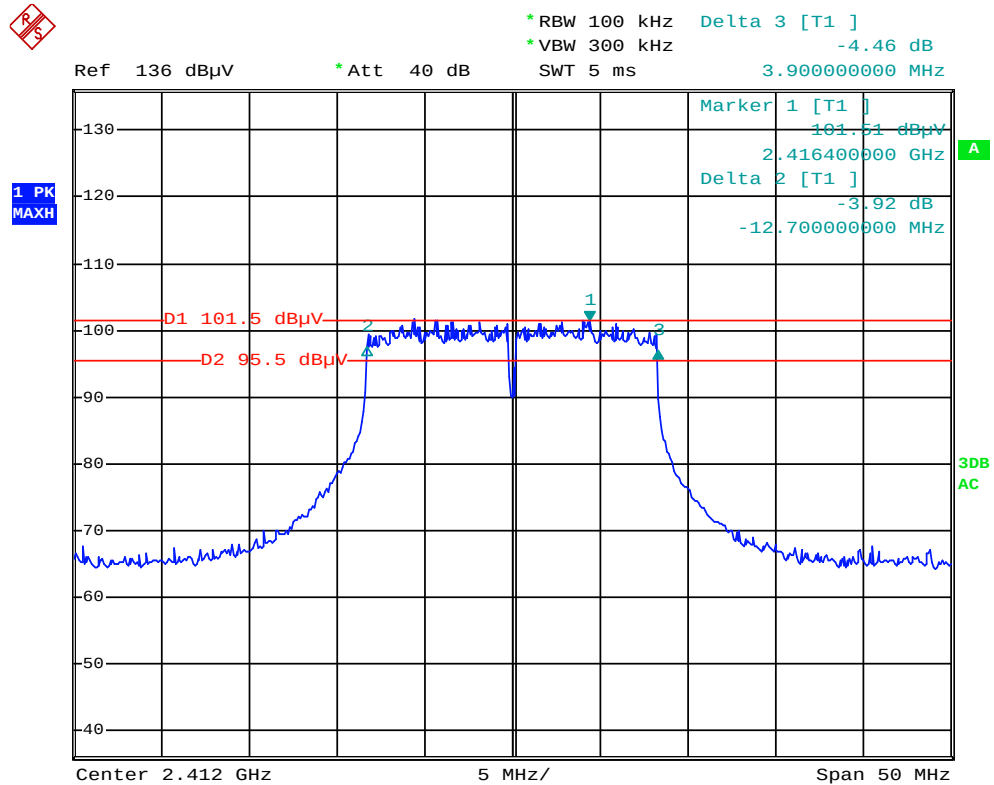

6dB BANDWIDTH (802.11 nHT20 MODE CH Mid)

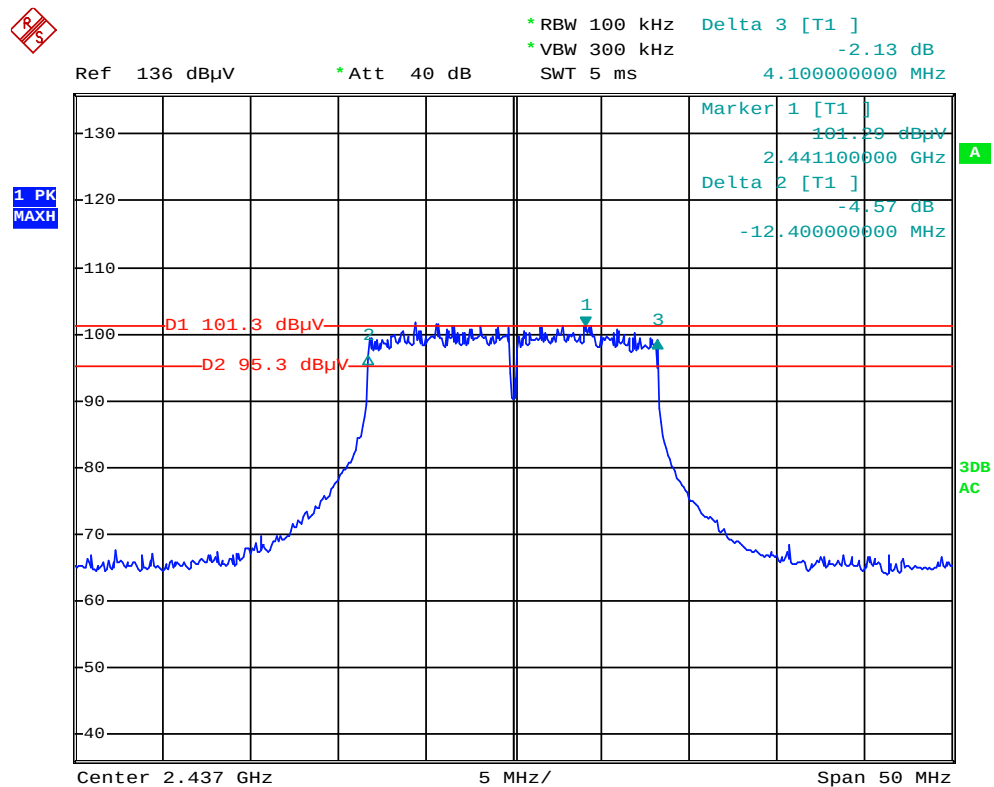


6dB BANDWIDTH (802.11 nHT20 MODE CH High)





*RBW 100 kHz Delta 3 [T1]
 *VBW 300 kHz -4.62 dB
 Ref 136 dBμV *Att 40 dB SWT 5 ms 13.900000000 MHz

1 PK
 MAXH

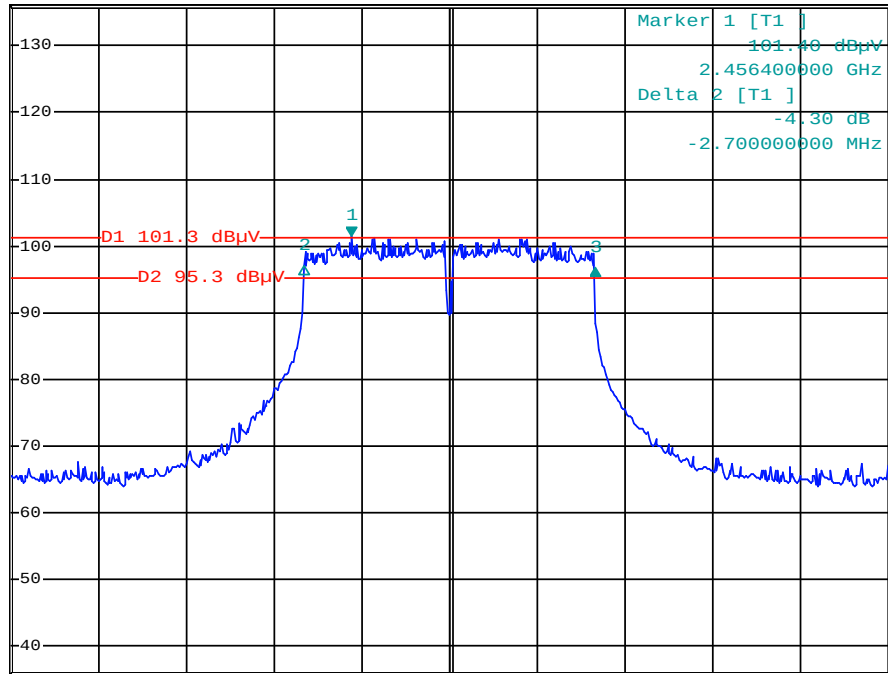

Center 2.462 GHz 5 MHz/ Span 50 MHz

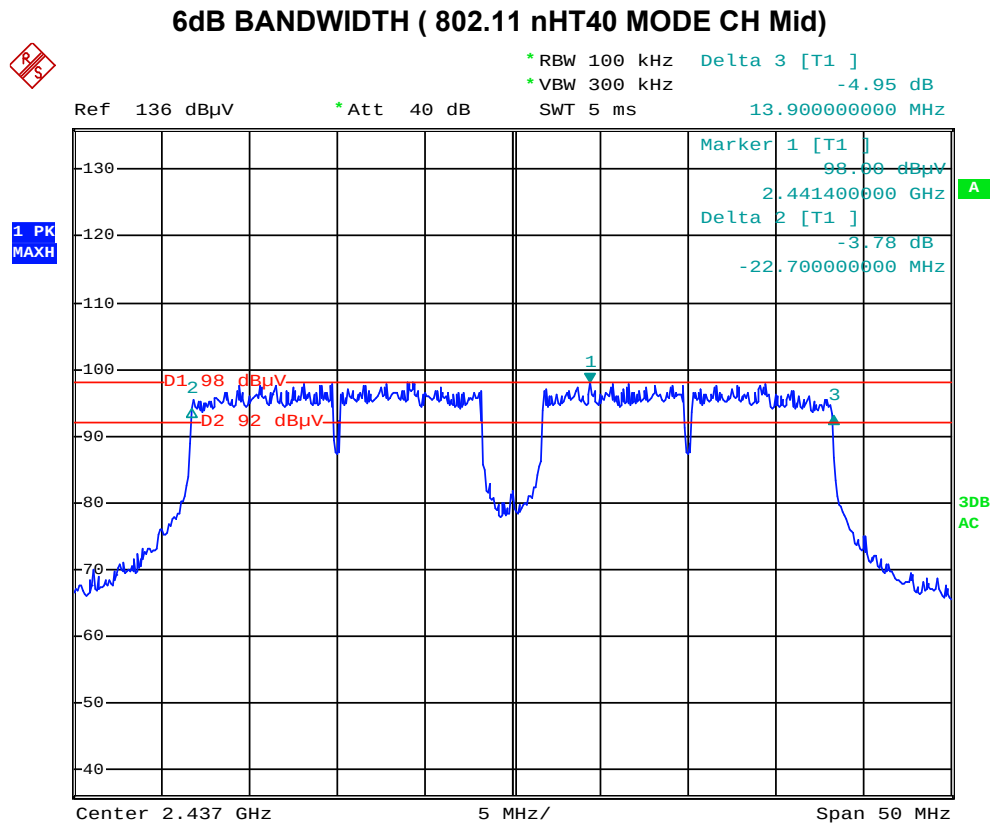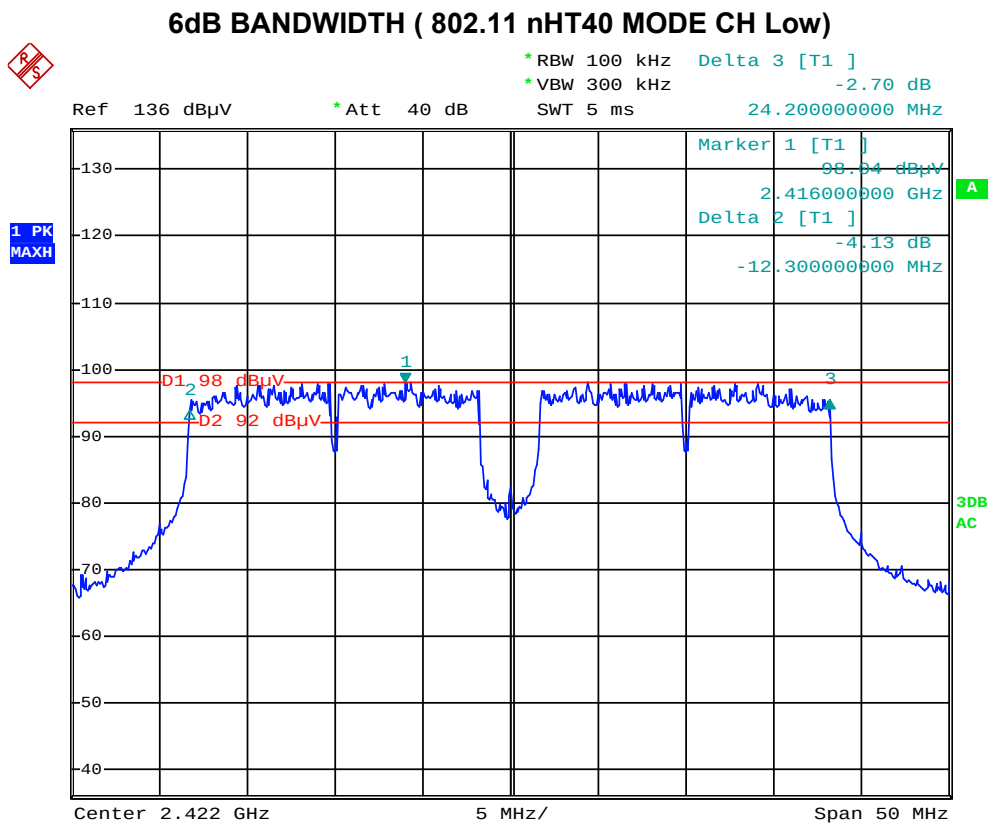

6dB BANDWIDTH (802.11 nHT40 MODE CH High)



*RBW 100 kHz Delta 2 [T1]
 *VBW 300 kHz -3.43 dB
 SWT 5 ms -22.700000000 MHz


Ref 136 dBμV

*Att 40 dB

SWT 5 ms

-22.700000000 MHz

1 PK
 MAXH

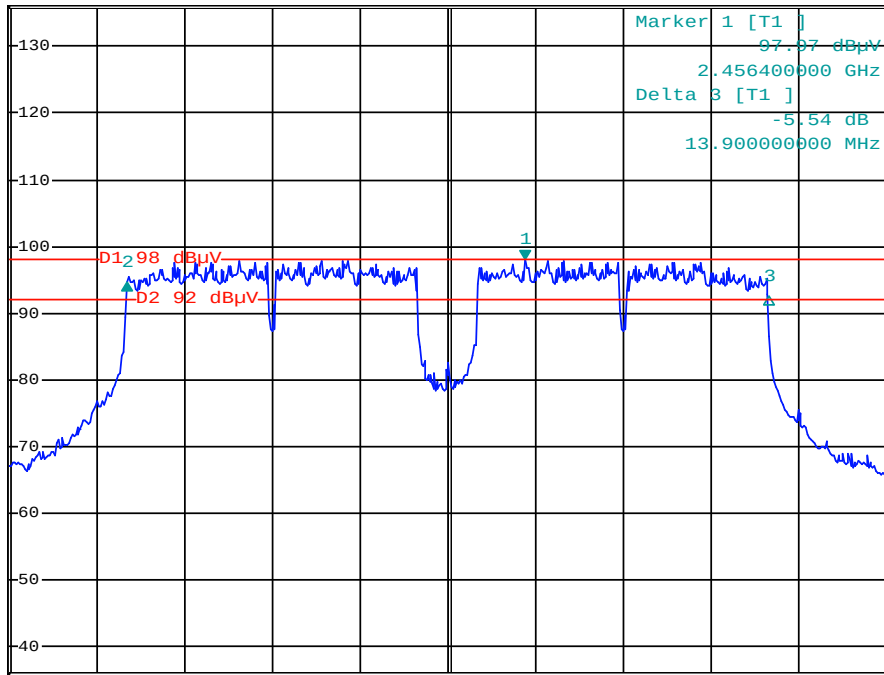

Center 2.452 GHz

5 MHz/

Span 50 MHz


8. Test of Conducted Spurious Emission

8.1 Applicable Standard

Refer to FCC §15.247 (d)

Output power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

8.2 EUT Setup

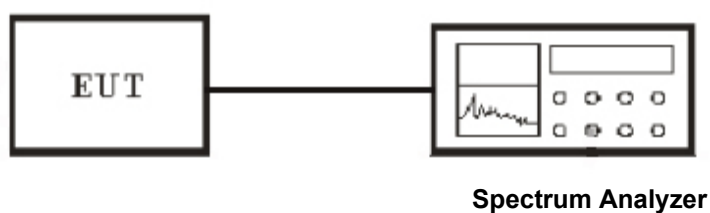

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz. The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

8.5 Test Result

Temperature (°C) : 22~23	EUT: NETTOP
Humidity (%RH) : 50~54	M/N: EDGE HD
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

IEEE 802.11b mode
CH Low

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.1125	110.05	N/A	N/A	
1857.1245	52.50	90.05	-37.55	PASS
4825.5464	54.13	90.05	-36.92	PASS
6449.1380	60.27	90.05	-30.23	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.1524	111.11	N/A	N/A	
1761.2522	54.10	91.11	-36.01	PASS
4782.1533	55.76	92.11	-36.35	PASS
6778.8255	53.51	92.11	-38.60	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2459.8996	110.85	N/A	N/A	
1641.1877	54.25	90.85	-36.60	PASS
5453.7467	55.84	90.85	-35.01	PASS
6241.8413	57.21	90.85	-33.64	PASS

IEEE 802.11g mode
CH Low

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2411.6999	103.10	N/A	N/A	
2009.7145	53.01	83.10	-30.07	PASS
4575.0145	55.11	83.10	-27.99	PASS
67453.8045	56.55	83.10	-26.55	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2436.9263	103.45	N/A	N/A	
1674.4288	55.01	83.45	-29.83	PASS
5546.7935	55.25	83.45	-28.25	PASS
6556.8537	56.76	83.45	-26.69	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.0052	102.90	N/A	N/A	
2180.5222	55.56	82.90	-27.34	PASS
5891.6222	55.39	82.90	-27.51	PASS
6979.0556	56.27	82.90	-26.63	PASS

IEEE 802.11n HT20 mode

CH Low

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.0412	103.15	N/A	N/A	
2041.2156	54.67	83.15	-28.48	PASS
5780.7898	55.64	83.15	-27.51	PASS
6925.9919	56.45	83.15	-26.70	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2436.8988	103.05	N/A	N/A	
1989.4778	54.17	83.05	-28.88	PASS
5568.7765	55.74	83.05	-27.31	PASS
6234.8076	55.82	83.05	-27.23	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.8765	102.87	N/A	N/A	
2196.6555	54.35	82.87	-28.52	PASS
5546.5642	55.17	82.87	-27.70	PASS
6755.4342	55.25	82.87	-27.62	PASS

IEEE 802.11n HT40 mode
CH Low

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2421.9887	101.65	N/A	N/A	
1980.7889	55.75	81.65	-25.90	PASS
5982.8768	57.35	81.65	-24.30	PASS
6785.4656	58.73	81.65	-22.92	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.4322	101.55	N/A	N/A	
1845.8432	55.36	81.55	-26.19	PASS
5185.2654	57.21	81.55	-24.34	PASS
6432.7453	58.54	81.55	-23.01	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2452.6535	101.34	N/A	N/A	
1957.4554	54.34	81.34	-27.00	PASS
5789.8456	56.99	81.34	-24.35	PASS
6761.1345	57.87	81.34	-23.47	PASS

9. Test of Radiated Spurious Emission

9.1 Radiated Spurious Emission

9.1.1 Limits

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

15.209 (b) In the emission table above, the tighter limit applies at the band edges.

9.1.2 EUT Setup

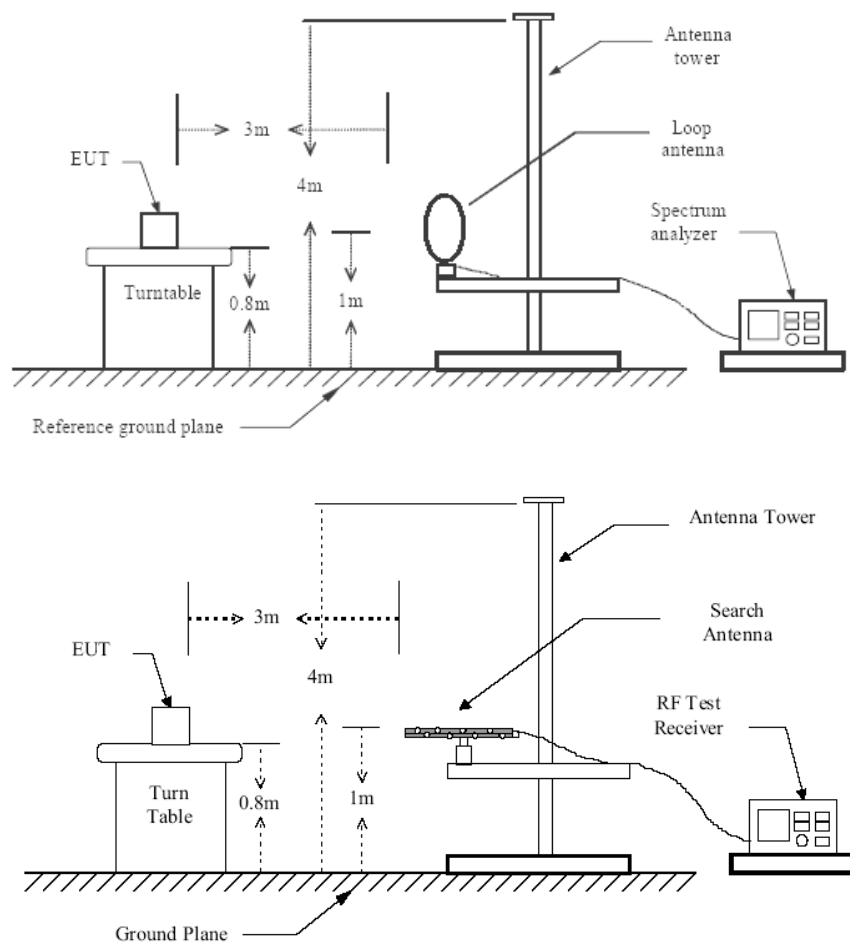


Figure 1 : Frequencies measured below 1 GHz configuration

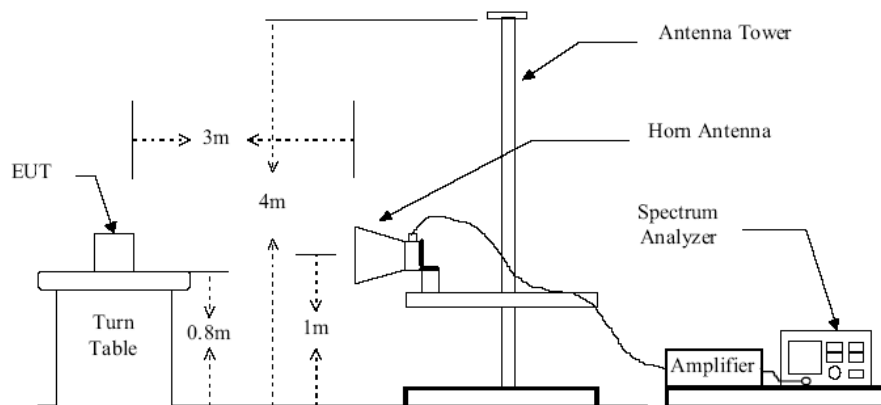


Figure 2 : Frequencies measured above 1 GHz configuration

9.1.3 Test Procedure

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 26GHz.
9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
10. For emission above 1GHz, Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.
11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
- 2.The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
- 3.The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

9.1.4 Test Result

Temperature (°C) : 22~23	EUT: NETTOP
Humidity (%RH) : 50~54	M/N: EDGE HD
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal operation & TX Mode

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

1. EUT was lie vertically, and then its Antenna oriented upward
2. EUT was lie vertically, and then its Antenna oriented downward
3. EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

WORST-CASE RADIATED EMISSION BELOW 30 MHz

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
0.410	22.11	7.76	1.02	30.89	67.0	-36.11	QP
15.45	20.50	8.75	1.21	30.46	49.5	-19.04	QP
19.38	18.20	8.73	1.05	26.98	49.5	-22.52	QP
24.35	22.80	7.33	1.68	31.81	49.5	-17.69	QP

WORST-CASE RADIATED EMISSION BELOW 1 GHz

Normal operating Mode:
Horizontal

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
78.10	26.14	8.98	1.18	36.30	40.00	-3.70	QP
149.89	18.58	12.60	1.59	32.77	43.50	-10.73	QP
398.27	15.77	14.44	2.72	37.92	46.00	-8.08	QP
640.69	15.65	18.00	3.05	36.60	46.00	-9.40	QP
778.37	10.74	21.05	3.95	35.74	46.00	-10.26	QP
816.35	11.55	21.80	4.14	37.49	46.00	-8.51	QP
N/A	----	----	----	----	----	----	----

Vertical

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
141.55	22.41	7.89	1.01	31.31	40.00	-8.69	QP
196.15	16.12	12.60	1.59	30.31	43.50	-13.19	QP
215.27	25.71	12.20	2.02	39.93	46.00	-6.07	QP
241.02	22.85	14.44	2.72	40.01	46.00	-5.99	QP
504.12	16.52	18.00	3.05	37.57	46.00	-8.47	QP
751.01	13.23	21.80	4.14	39.17	46.00	-6.83	QP
N/A	----	----	----	----	----	----	----

REMARK: Emission level (dB μ V/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB μ V).

WORST-CASE RADIATED EMISSION ABOVE 1 GHz

IEEE 802.11b TX (CH Low)

Horizontal

TX / IEEE 802.11b mode / CH Low					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4823.25	53.78	32.81	3.70	41.34	0.69	49.65	74.00	-24.35	P
*	4823.25	42.16	32.81	3.70	41.34	0.69	38.03	54.00	-15.97	A
	7236.31	51.58	38.83	4.93	41.42	1.44	55.35	74.00	-18.65	P
	7236.31	40.01	38.83	4.93	41.42	1.44	43.78	54.00	-10.22	A
	9645.85	48.75	38.75	5.74	38.43	0.61	55.42	74.00	-18.58	P
	9645.85	37.69	38.75	5.74	38.43	0.61	44.36	54.00	-9.64	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH Low					Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4824.15	51.24	32.81	3.71	41.34	0.69	47.12	74.00	-26.88	P
*	4824.15	39.25	32.81	3.71	41.34	0.69	35.13	54.00	-18.87	A
	7236.35	49.85	38.83	4.93	41.42	1.44	53.62	74.00	-20.38	P
	7236.35	37.49	38.83	4.93	41.42	1.44	41.26	54.00	-12.74	A
	9647.95	50.24	38.75	5.74	38.43	0.61	56.92	74.00	-17.08	P
	9647.95	39.68	38.75	5.74	38.43	0.61	46.36	54.00	-7.64	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11b TX (CH Middle)

Horizontal

					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4876.67	51.44	32.93	3.73	41.41	0.71	47.4	74.00	-26.6	P
*	4876.67	42.12	32.93	3.73	41.41	0.71	38.08	54.00	-15.92	A
*	7309.34	50.40	38.93	4.96	41.32	1.59	54.56	74.00	-19.44	P
*	7309.34	39.58	38.93	4.96	41.32	1.59	43.74	54.00	-10.26	A
	9747.79	50.01	38.85	5.75	38.24	0.55	56.92	74.00	-17.08	P
	9747.79	38.81	38.85	5.75	38.24	0.55	45.72	54.00	-8.28	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

Vertical

	TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4876.95	53.8	32.93	3.73	41.42	0.71	49.76	74.00	-24.24	P
*	4876.95	44.00	32.93	3.73	41.42	0.71	39.96	54.00	-14.04	A
*	7309.35	51.67	38.93	4.96	41.32	1.59	55.83	74.00	-18.17	P
*	7309.35	41.09	38.93	4.96	41.32	1.59	45.25	54.00	-8.75	A
	9748.46	52.30	38.85	5.75	38.24	0.55	59.21	74.00	-14.79	P
	9748.46	40.73	38.85	5.75	38.24	0.55	47.64	54.00	-6.36	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11b TX (CH High)

Horizontal

TX / IEEE 802.11b mode / CH High					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4923.75	52.59	33.03	3.76	41.49	0.73	48.63	74.00	-25.37	P
*	4923.75	42.24	33.03	3.76	41.49	0.73	38.28	54.00	-15.72	A
*	7385.39	51.37	39.04	4.99	41.21	1.76	55.95	74.00	-18.05	P
*	7385.39	39.64	39.04	4.99	41.21	1.76	44.22	54.00	-9.78	A
	9848.25	50.37	38.95	5.76	38.06	0.49	57.52	74.00	-16.48	P
	9848.25	39.09	38.95	5.76	38.06	0.49	46.23	54.00	-7.77	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH High					Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4924.03	52.72	33.03	3.76	41.49	0.73	48.76	74.00	-25.24	P
*	4924.03	42.33	33.03	3.76	41.49	0.73	38.37	54.00	-15.63	A
*	7386.08	51.29	39.04	4.99	41.21	1.76	55.87	74.00	-18.13	P
*	7386.08	39.45	39.04	4.99	41.21	1.76	44.03	54.00	-9.97	A
	9847.35	50.99	38.95	5.76	38.06	0.49	58.13	74.00	-15.87	P
	9847.35	40.23	38.95	5.76	38.06	0.49	47.37	54.00	-6.63	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH Low)

Horizontal

	TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4824.23	53.13	32.81	3.71	41.34	0.69	49.01	74.00	-24.99	P
*	4824.23	43.12	32.81	3.71	41.34	0.69	39.00	54.00	-15.00	A
	7236.00	52.25	38.83	4.93	41.42	1.44	56.02	74.00	-17.98	P
	7236.00	41.36	38.83	4.93	41.42	1.44	45.13	54.00	-8.87	A
	9642.15	51.23	38.74	5.74	38.44	0.61	57.89	74.00	-16.11	P
	9642.15	39.96	38.74	5.74	38.44	0.61	46.62	54.00	-7.38	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

Vertical

	TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4824.00	53.12	32.81	3.70	41.34	0.69	48.99	74.00	-25.01	P
*	4824.00	42.85	32.81	3.70	41.34	0.69	38.72	54.00	-15.28	A
	7236.39	50.50	38.83	4.93	41.42	1.44	54.27	74.00	-19.73	P
	7236.39	40.40	38.83	4.93	41.42	1.44	44.17	54.00	-9.83	A
	9641.57	51.09	38.74	5.74	38.44	0.62	57.75	74.00	-16.25	P
	9641.57	40.13	38.74	5.74	38.44	0.62	46.79	54.00	-7.21	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH Middle)

Horizontal

TX / IEEE 802.11g mode / CH Middle					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4871.16	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
*	4871.16	41.35	32.92	3.73	41.41	0.71	37.30	54.00	-16.70	A
*	7318.25	49.85	38.95	4.96	41.31	1.61	54.06	74.00	-19.94	P
*	7318.25	40.22	38.95	4.96	41.31	1.61	44.43	54.00	-9.57	A
	9748.35	50.24	38.85	5.75	38.24	0.55	57.15	74.00	-16.85	P
	9748.35	39.58	38.85	5.75	38.24	0.55	46.49	54.00	-7.51	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH Middle					Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4871.56	53.62	32.92	3.73	41.41	0.71	49.57	74.00	-24.43	P
*	4871.56	44.17	32.92	3.73	41.41	0.71	40.12	54.00	-13.88	A
*	7317.24	51.24	38.94	4.96	41.31	1.61	55.45	74.00	-18.55	P
*	7317.24	42.33	38.94	4.96	41.31	1.61	46.54	54.00	-7.46	A
	9747.26	52.34	38.85	5.75	38.25	0.55	59.25	74.00	-14.75	P
	9747.26	40.4	38.85	5.75	38.25	0.55	47.31	54.00	-6.69	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH High)

Horizontal

	TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4924.35	51.23	33.03	3.76	41.49	0.73	47.27	74.00	-26.73	P
*	4924.35	40.28	33.03	3.76	41.49	0.73	36.32	54.00	-17.72	A
*	7384.86	49.87	39.04	4.99	41.21	1.75	54.44	74.00	-19.56	P
*	7384.86	38.65	39.04	4.99	41.21	1.75	43.22	54.00	-10.78	A
	9847.56	50.14	38.95	5.76	38.06	0.49	57.28	74.00	-16.72	P
	9847.56	39.86	38.95	5.76	38.06	0.49	47.00	54.00	-7.00	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

Vertical

	TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4923.66	53.22	33.03	3.76	41.49	0.73	49.26	74.00	-24.74	P
*	4923.66	42.61	33.03	3.76	41.49	0.73	38.65	54.00	-15.35	A
*	7385.91	51.33	39.04	4.99	41.21	1.76	55.91	74.00	-18.09	P
*	7385.91	40.25	39.04	4.99	41.21	1.76	44.83	54.00	-9.17	A
	9847.59	52.64	38.95	5.76	38.06	0.49	59.78	74.00	-14.22	P
	9847.59	40.24	38.95	5.76	38.06	0.49	47.38	54.00	-6.62	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH Low)

Horizontal

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.35	51.66	32.81	3.71	41.34	0.69	47.54	74.00	-26.46	P
4824.35	40.37	32.81	3.71	41.34	0.69	36.25	54.00	-17.75	A
7235.86	52.64	38.83	4.93	41.43	1.43	56.41	74.00	-17.59	P
7235.86	40.39	38.83	4.93	41.43	1.43	44.16	54.00	-9.84	A
9648.35	51.64	38.75	5.74	38.43	0.61	58.32	74.00	-15.68	P
9648.35	40.06	38.75	5.74	38.43	0.61	46.74	54.00	-7.26	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4823.78	52.85	32.81	3.70	41.34	0.69	48.72	74.00	-25.28	P
4823.78	41.46	32.81	3.70	41.34	0.69	37.33	54.00	-16.67	A
7236.66	53.47	38.83	4.93	41.42	1.44	57.24	74.00	-16.76	P
7236.66	41.46	38.83	4.93	41.42	1.44	45.23	54.00	-8.77	A
9647.55	52.35	38.75	5.74	38.43	0.61	59.02	74.00	-14.98	P
9647.55	40.57	38.75	5.74	38.43	0.61	47.24	54.00	-6.76	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH Middle)

Horizontal

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4872.99	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
4872.99	40.36	32.92	3.73	41.41	0.71	36.31	54.00	-17.69	A
7311.51	49.87	38.94	4.96	41.32	1.60	54.05	74.00	-19.95	P
7311.51	38.65	38.94	4.96	41.32	1.60	42.83	54.00	-11.17	A
9748.27	50.23	38.85	5.75	38.24	0.55	57.14	74.00	-16.86	P
9748.27	39.84	38.85	5.75	38.24	0.55	46.75	54.00	-7.25	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4873.26	52.14	32.92	3.73	41.41	0.71	48.09	74.00	-25.91	P
4873.26	42.33	32.92	3.73	41.41	0.71	38.28	54.00	-15.72	A
7312.25	51.84	38.94	4.96	41.32	1.60	56.02	74.00	-17.98	P
7312.25	40.25	38.94	4.96	41.32	1.60	44.43	54.00	-9.57	A
9748.65	51.68	38.85	5.75	38.24	0.55	58.59	74.00	-15.41	P
9748.65	41.25	38.85	5.75	38.24	0.55	48.16	54.00	-5.84	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH High)

Horizontal

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4924.09	51.35	33.03	3.76	41.49	0.73	47.39	74.00	-26.61	P
4924.09	40.56	33.03	3.76	41.49	0.73	36.60	54.00	-17.40	A
7386.76	50.49	39.04	4.99	41.21	1.76	55.07	74.00	-18.93	P
7386.76	39.69	39.04	4.99	41.21	1.76	44.27	54.00	-9.73	A
9849.59	50.08	38.95	5.76	38.06	0.49	57.23	74.00	-16.77	P
9849.59	39.86	38.95	5.76	38.06	0.49	47.01	54.00	-6.99	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.98	53.24	33.03	3.76	41.48	0.73	49.28	74.00	-24.72	P
4923.98	42.16	33.03	3.76	41.48	0.73	38.20	54.00	-15.78	A
7385.66	52.88	39.04	4.99	41.21	1.75	57.45	74.00	-16.55	P
7385.66	41.32	39.04	4.99	41.21	1.75	45.89	54.00	-8.11	A
9849.78	52.34	38.95	5.76	38.06	0.49	59.49	74.00	-14.51	P
9849.78	40.65	38.95	5.76	38.06	0.49	47.80	54.00	-6.20	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH Low)

Horizontal

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4843.16	50.45	32.85	3.72	41.36	0.70	46.36	74.00	-27.64	P
4843.16	40.07	32.85	3.72	41.36	0.70	35.98	54.00	-18.02	A
7264.86	50.08	38.87	4.94	41.38	1.50	54.00	74.00	-20.00	P
7264.86	38.77	38.87	4.94	41.38	1.50	42.69	54.00	-11.31	A
9687.35	50.45	38.79	5.75	38.36	0.59	57.22	74.00	-16.78	P
9687.35	39.18	38.79	5.75	38.36	0.59	45.95	54.00	-8.05	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4844.65	52.85	32.86	3.72	41.37	0.70	48.76	74.00	-25.24	P
4844.65	41.56	32.86	3.72	41.37	0.70	37.47	54.00	-16.53	A
7265.44	51.45	38.87	4.94	41.38	1.50	55.38	74.00	-18.62	P
7265.44	40.54	38.87	4.94	41.38	1.50	44.47	54.00	-9.53	A
9686.35	53.47	38.79	5.75	38.36	0.59	60.24	74.00	-13.76	P
9686.35	41.78	38.79	5.75	38.36	0.59	48.55	54.00	-5.45	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH Middle)

Horizontal

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4873.78	52.30	32.92	3.73	41.41	0.71	48.35	74.00	-25.65	P
4873.78	39.65	32.92	3.73	41.41	0.71	35.64	54.00	-18.36	A
7312.31	51.30	38.94	4.96	41.32	1.60	55.52	74.00	-18.48	P
7312.31	41.22	38.94	4.96	41.32	1.60	45.41	54.00	-8.59	A
9747.84	50.93	38.85	5.75	38.24	0.55	57.85	74.00	-16.15	P
9747.84	40.03	38.85	5.75	38.24	0.55	46.84	54.00	-7.16	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4874.59	53.47	32.92	3.73	41.41	0.71	49.43	74.00	-24.57	P
4874.59	41.35	32.92	3.73	41.41	0.71	37.31	54.00	-16.69	A
7312.24	53.08	38.94	4.96	41.32	1.60	57.26	74.00	-16.74	P
7312.24	42.54	38.94	4.96	41.32	1.60	46.72	54.00	-7.28	A
9747.16	51.45	38.85	5.75	38.25	0.55	58.36	74.00	-15.64	P
9747.16	40.37	38.85	5.75	38.25	0.55	47.28	54.00	-6.72	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH High)

Horizontal

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4903.26	50.14	32.99	3.75	41.45	0.72	46.14	74.00	-27.86	P
4903.26	39.87	32.99	3.75	41.45	0.72	35.87	54.00	-18.13	A
7354.89	51.24	39.00	4.98	41.26	1.69	55.65	74.00	-18.35	P
7354.89	38.59	39.00	4.98	41.26	1.69	43.00	54.00	-11.00	A
9808.35	50.24	38.91	5.76	38.13	0.51	57.29	74.00	-16.71	P
9808.35	39.87	38.91	5.76	38.13	0.51	46.92	54.00	-7.08	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4904.15	52.68	32.99	3.75	41.46	0.72	48.68	74.00	-25.32	P
4904.15	41.45	32.99	3.75	41.46	0.72	37.45	54.00	-16.55	A
7353.65	53.46	39.00	4.98	41.26	1.69	57.86	74.00	-16.14	P
7353.65	40.36	39.00	4.98	41.26	1.69	44.76	54.00	-9.24	A
9808.15	52.35	38.91	5.76	38.13	0.52	59.4	74.00	-14.6	P
9808.15	41.46	38.91	5.76	38.13	0.52	48.51	54.00	-5.49	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit

4. The other emission levels were 20dB below the limit

5. The test limit distance is 3M limit.

9.2 RESTRICTED BAND EDGES

TEST RESULT

IEEE 802.11b mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	52.14	74	-21.86	Peak
LOW	2390	45.99	54	-8.01	Average
	2483.5	51.11	74	-22.89	Peak
HIGH	2483.5	50.32	54	-3.68	Average

IEEE 802.11g mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	50.69	74	-23.31	Peak
LOW	2390	44.14	54	-19.86	Average
	2483.5	49.13	74	-24.87	Peak
HIGH	2483.5	47.78	54	-6.22	Average


IEEE 802.11n HT20 mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	50.30	74	-23.70	Peak
LOW	2390	42.82	54	-11.18	Average
	2483.5	49.34	74	-24.66	Peak
HIGH	2483.5	45.48	54	-9.52	Average


IEEE 802.11n HT40 mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	50.55	74	-23.45	Peak
LOW	2390	43.72	54	-10.28	Average
	2483.5	53.58	74	-20.42	Peak
HIGH	2483.5	49.32	54	-4.68	Average

CH Low (802.11b MODE-Peak)

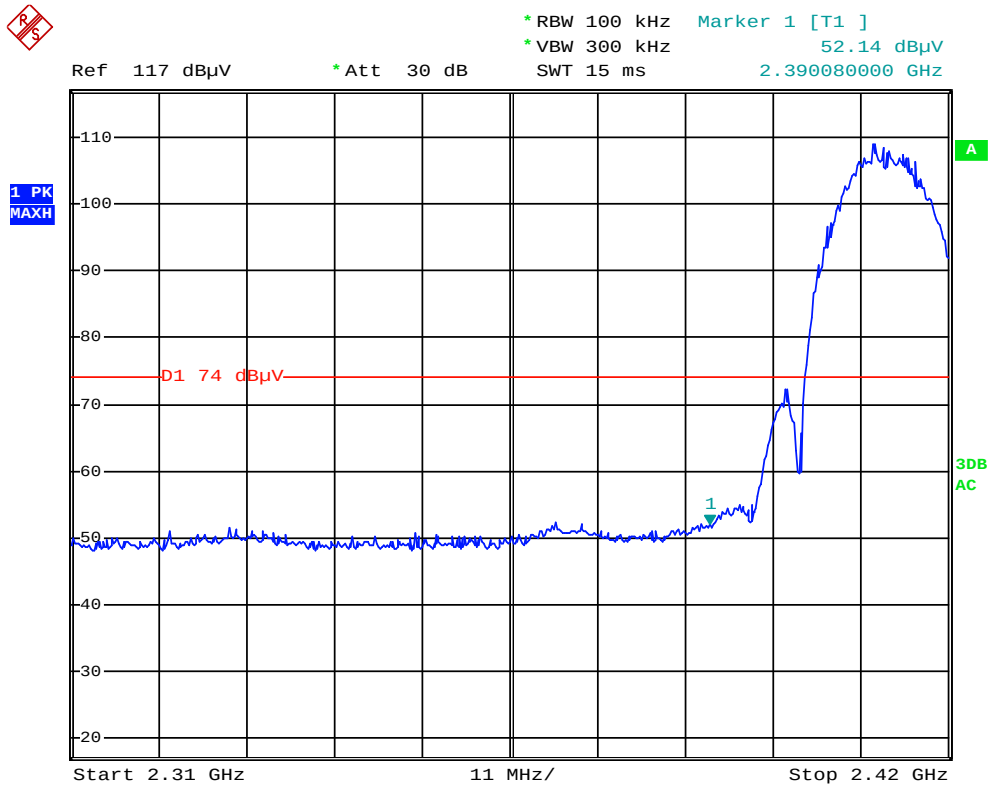


CH Low (802.11b MODE-Average)

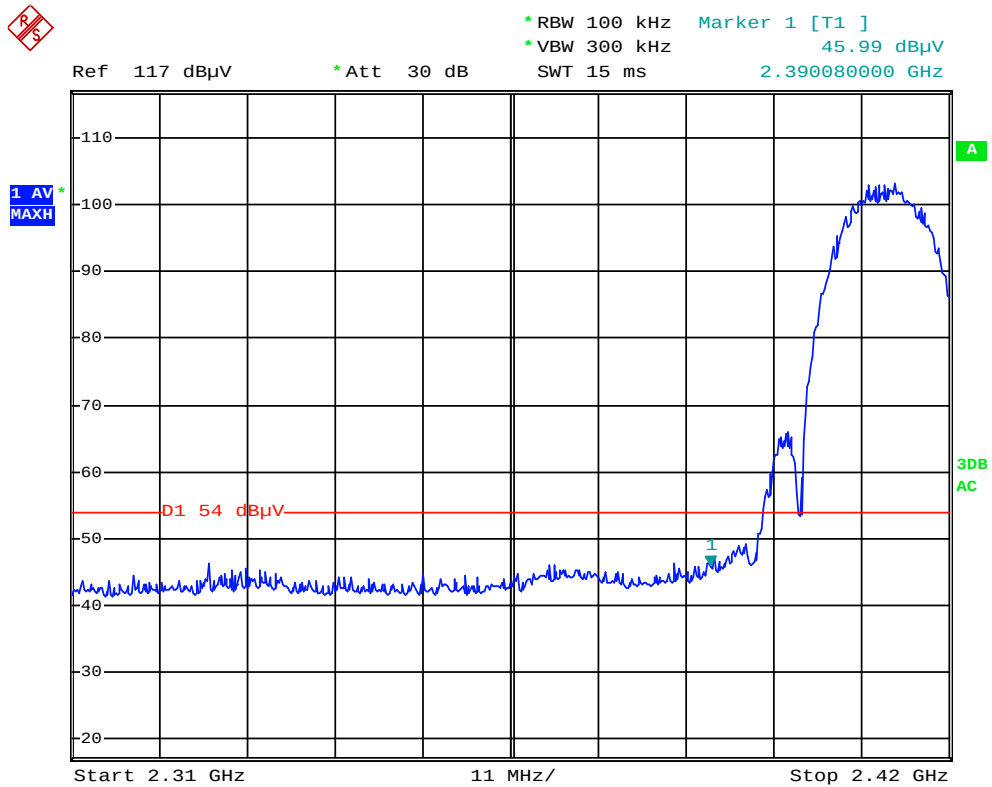



CH High (802.11b MODE-Peak)


*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 51.11 dBμV
Ref 117 dBμV *Att 30 dB SWT 5 ms 2.483500000 GHz

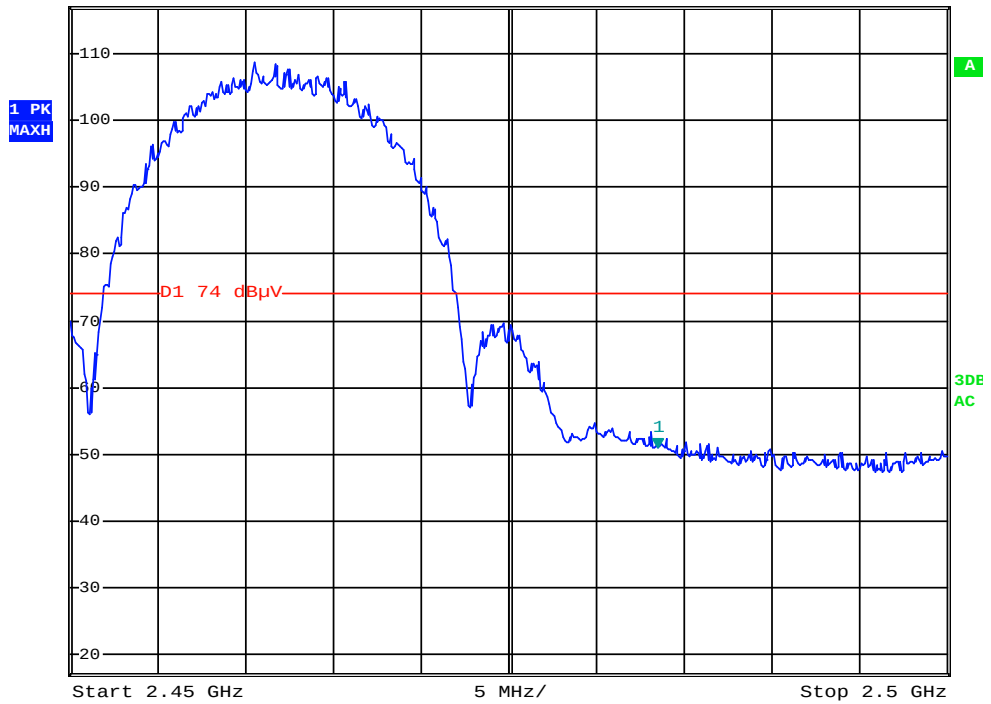


CH High (802.11b MODE-Average)




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 50.32 dBμV
Ref 117 dBμV *Att 30 dB SWT 5 ms 2.483500000 GHz

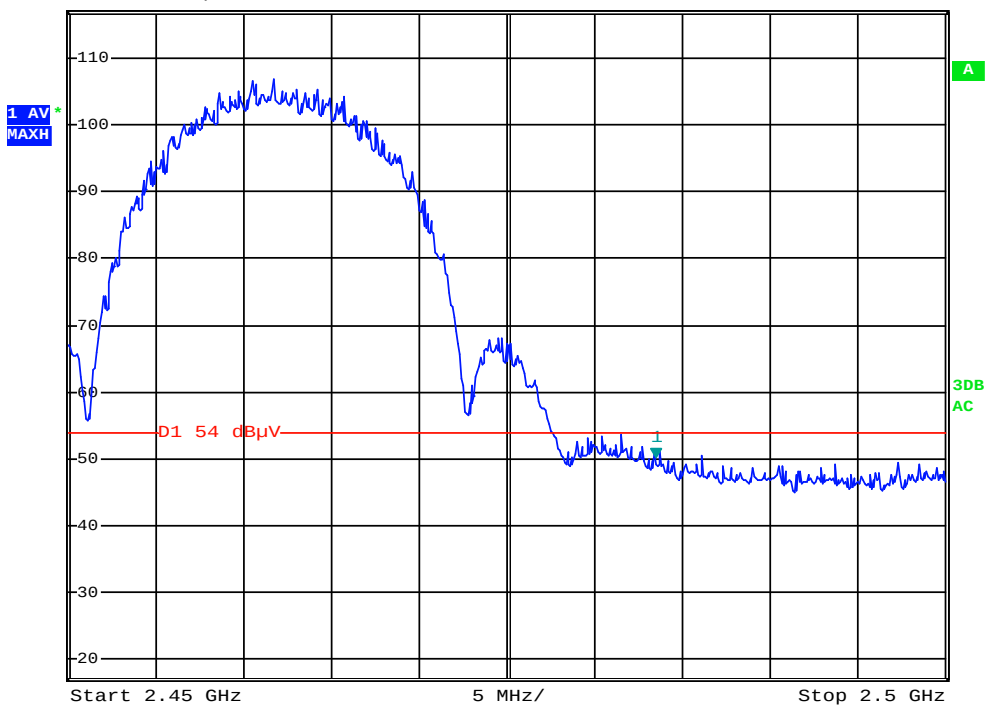


CH Low (802.11g MODE-Peak)

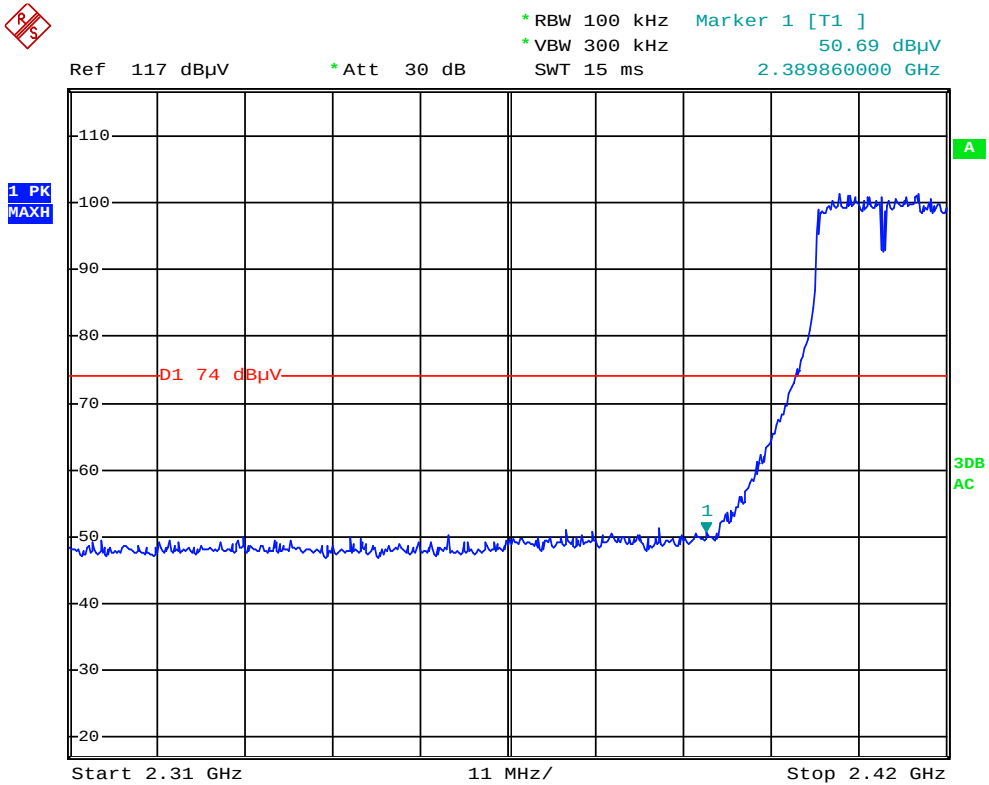


CH Low (802.11g MODE-Average)

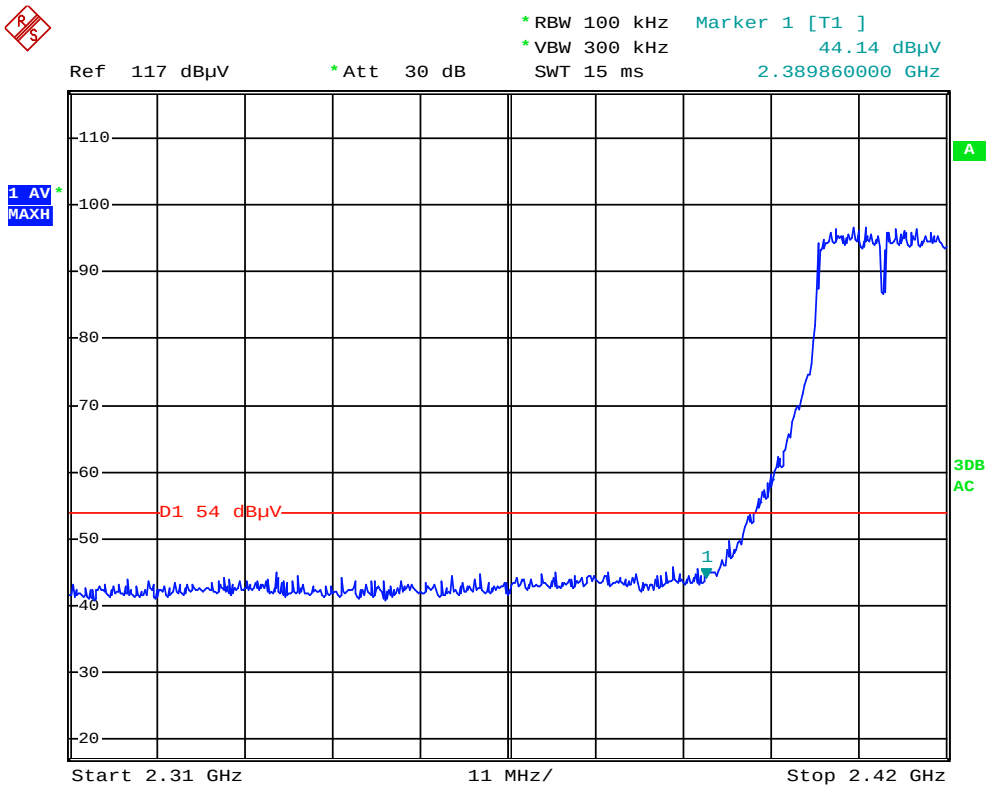

CH High (802.11g MODE-Peak)

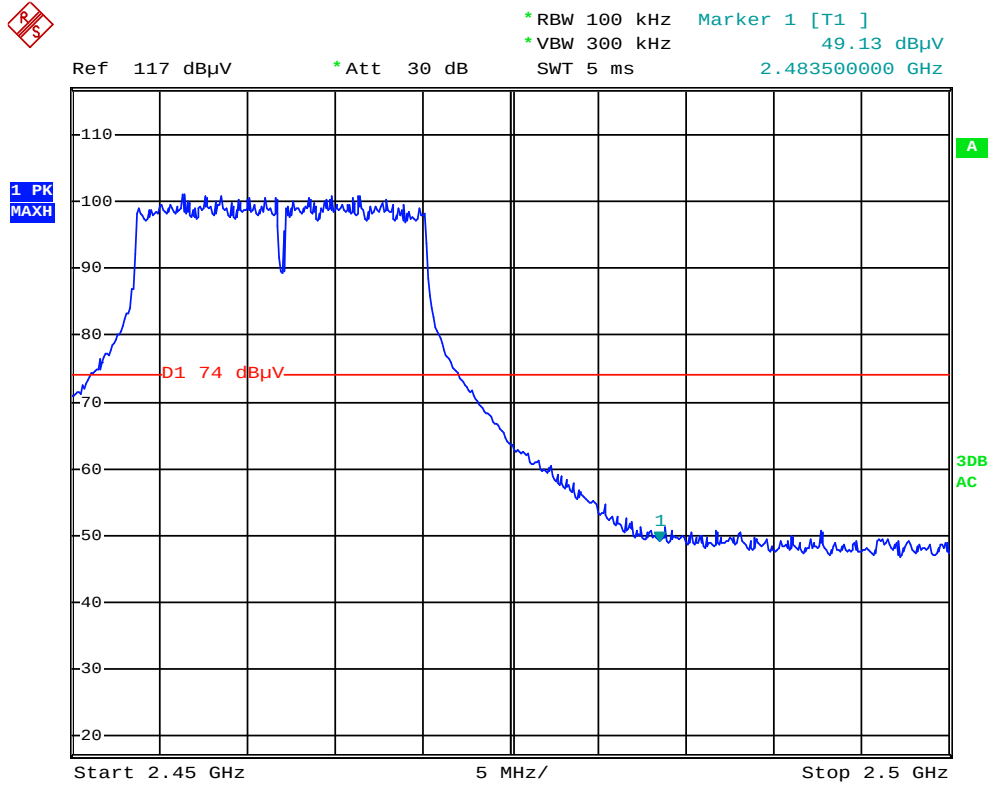


CH High (802.11g MODE-Average)

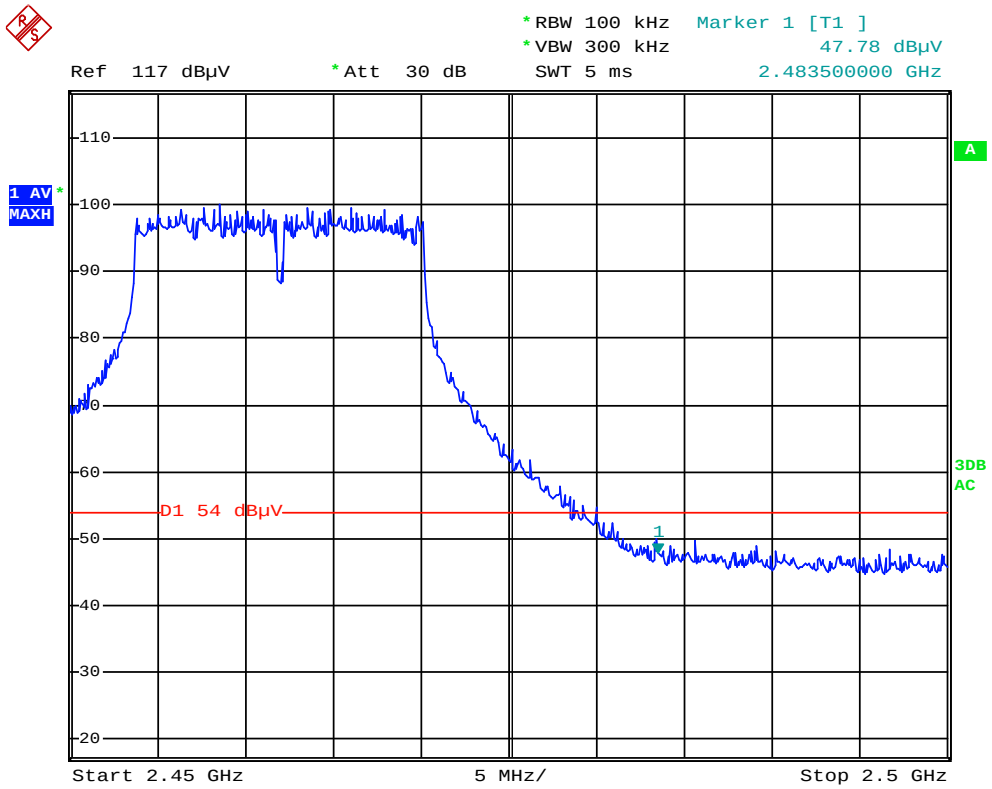




CH Low (802.11n HT20 MODE-Peak)

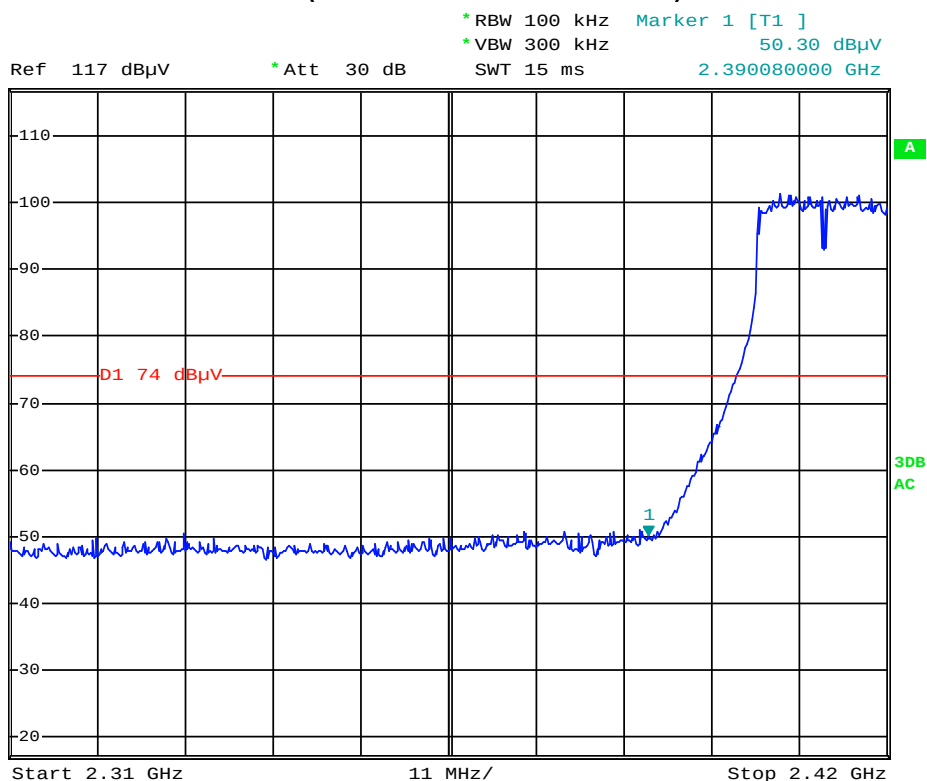


CH Low (802.11n HT20 MODE-Average)

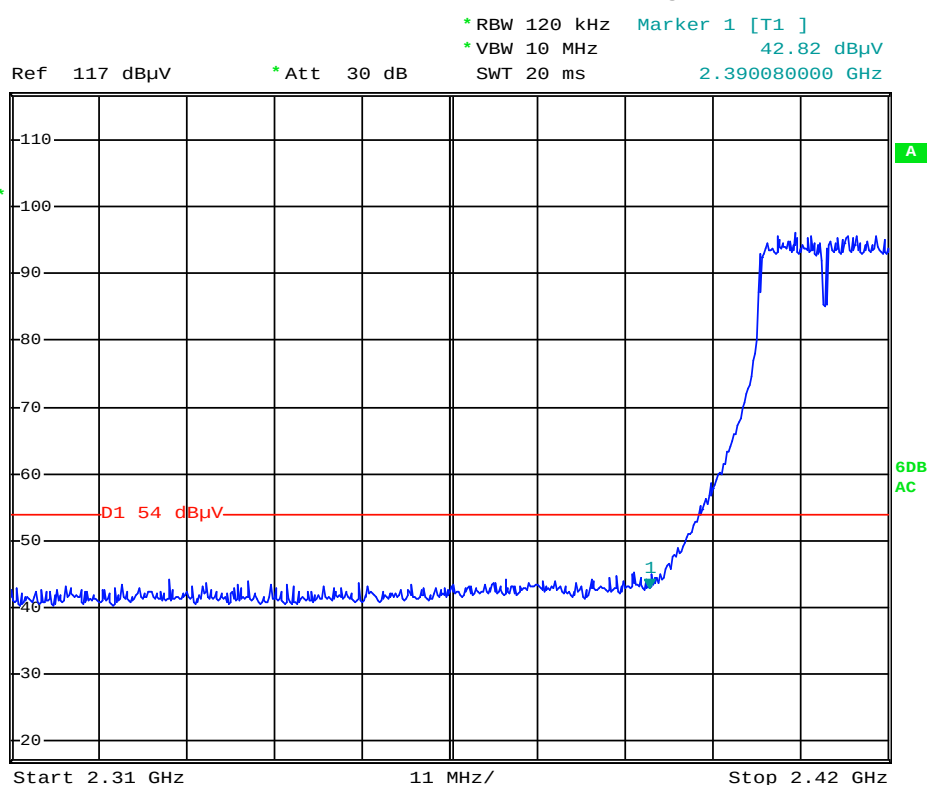




CH High (802.11n HT20 MODE-Peak)

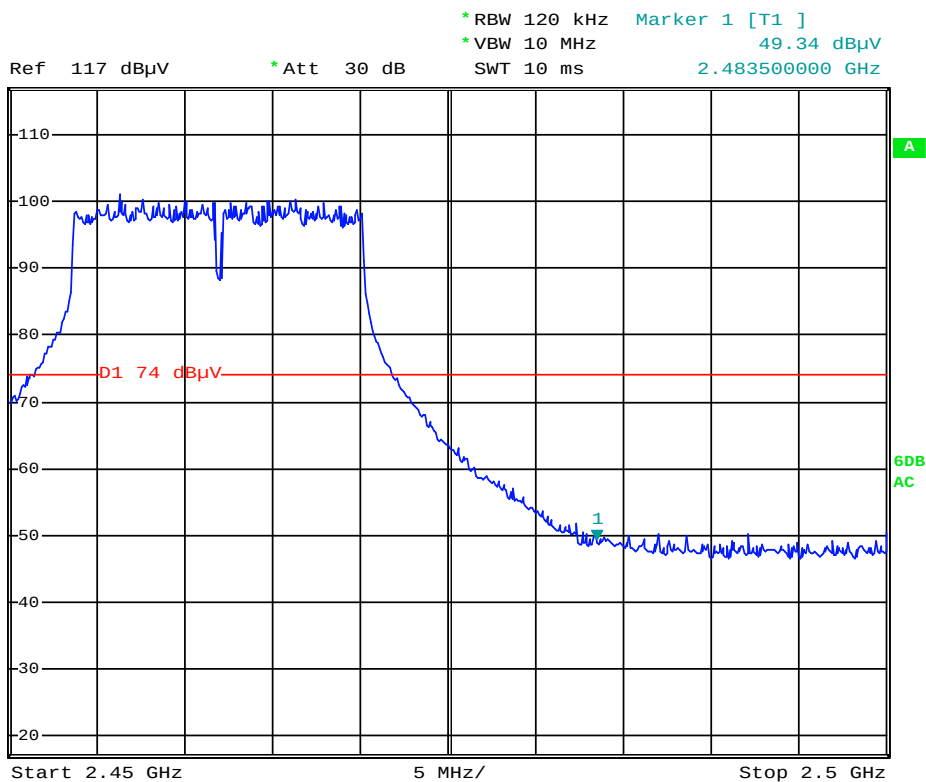


CH High (802.11n HT20 MODE-Average)

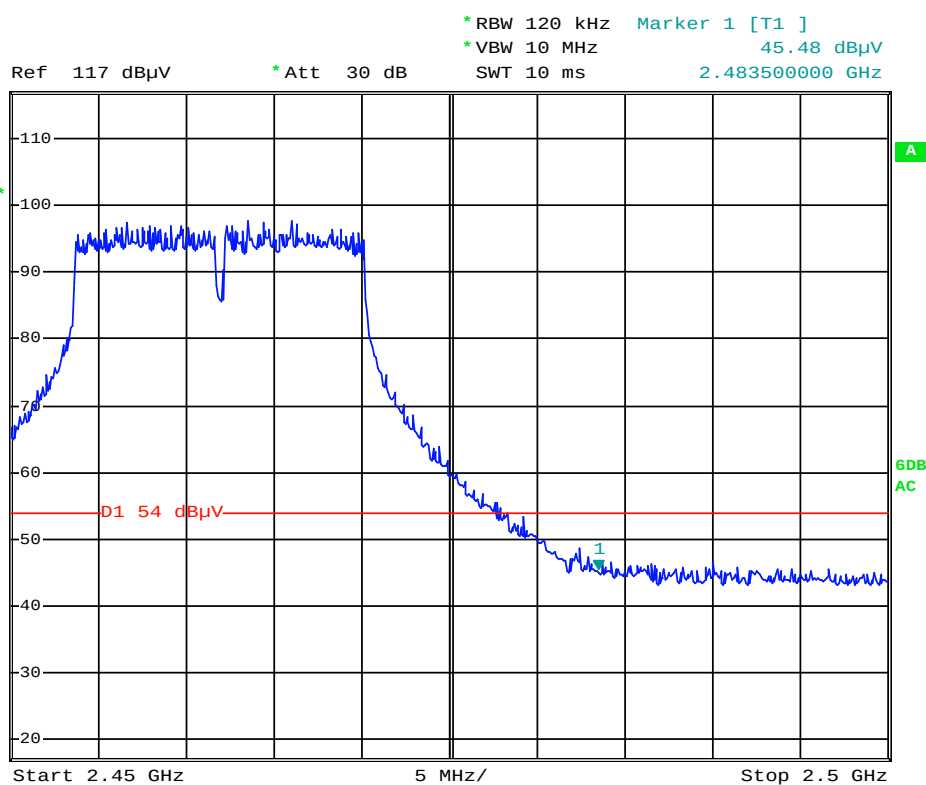




CH Low (802.11n HT40 MODE-Peak)

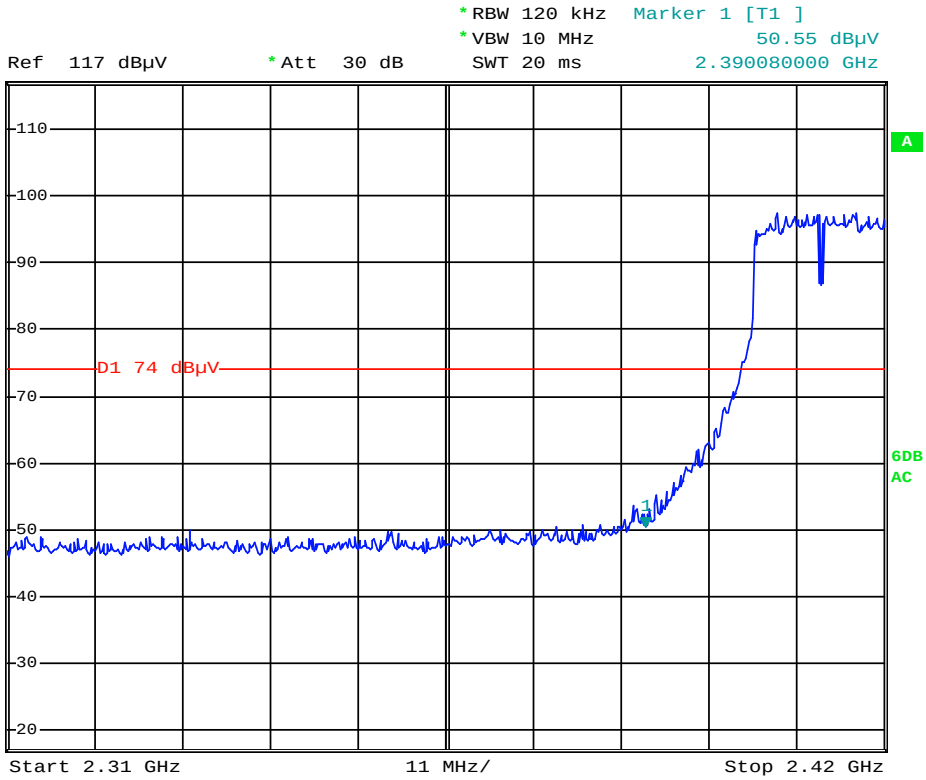


CH Low (802.11n HT40 MODE-Average)

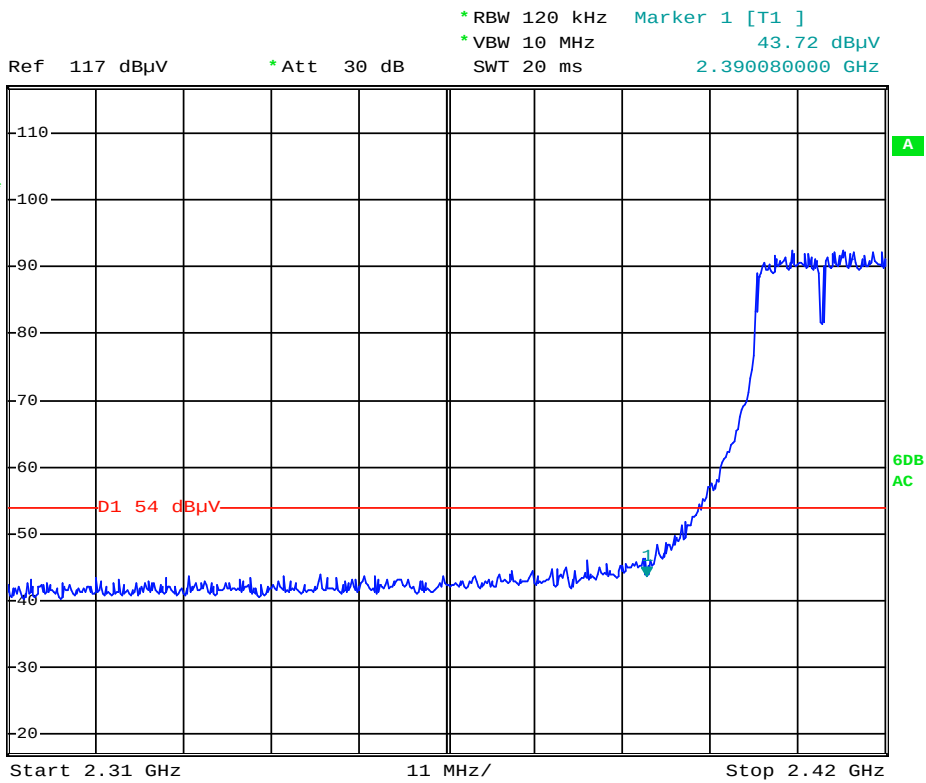




CH High (802.11n HT40 MODE–Peak)

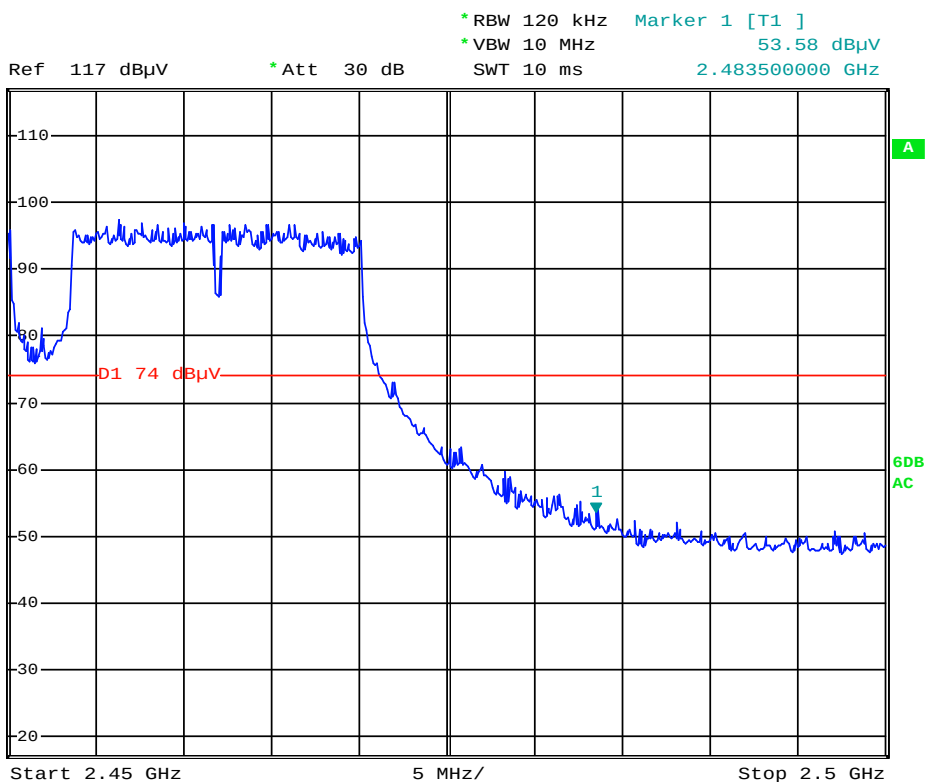

CH High (802.11n HT40 MODE–Average)

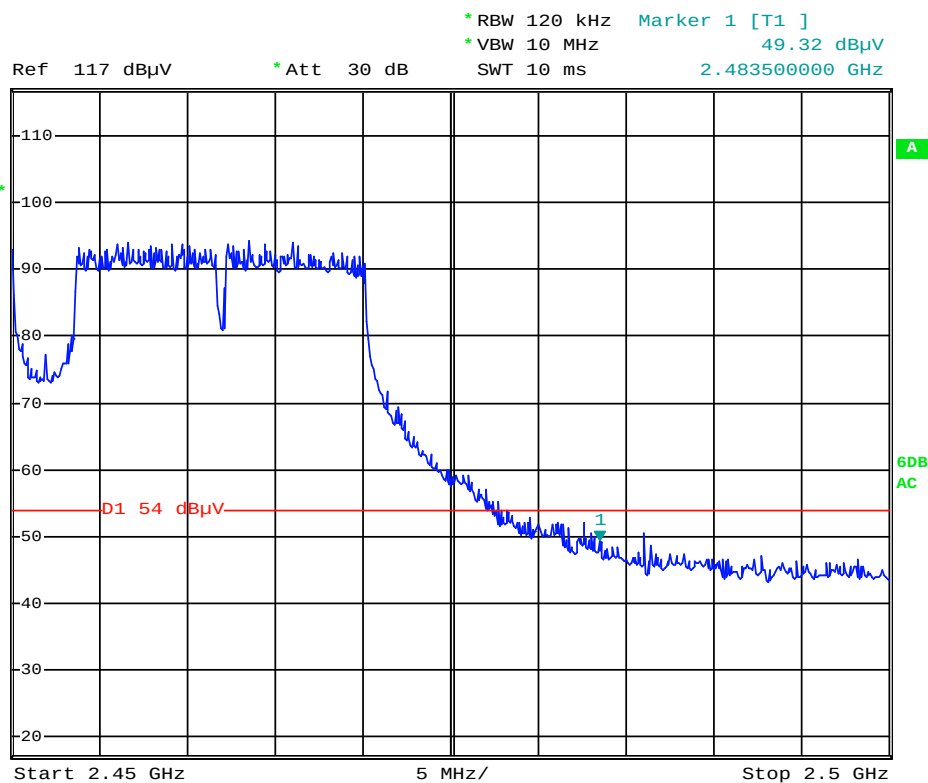

10. ANTENNA REQUIREMENT

10.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

10.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.