



# Emissions Test Report

**EUT Name:** UHF Data Transceiver

**EUT Model:** TX3

FCC Part 90

*Prepared for:*

Joe Winkler  
Everyday Wireless LLC  
2033 Penn Avenue  
West Lawn, PA 19609  
Tel: (610) 678-2100  
Fax: (610) 678-2193

*Prepared by:*

TUV Rheinland of North America  
762 Park Avenue  
Youngsville, NC 27596  
Tel: (919) 554-3668  
Fax: (919) 554-3542  
<http://www.tuv.com/>

*Report/Issue Date:* 16 December 2004  
*Report Number:* 30462675.001

## Statement of Compliance

*Manufacturer:* Everyday Wireless LLC  
2033 Penn Avenue  
West Lawn, PA 19609  
(610) 678-2100

*Requester / Applicant:* Joe Winkler

*Name of Equipment:* UHF Data Transceiver  
Model No. TX3

*Type of Equipment:* Intentional Radiator

*Class of Equipment:* N/A

*Application of Regulations:* FCC Part 90

*Test Dates:* 28 October 2004 to 14 December 2004

*Guidance Documents:*

Emissions: FCC 47 CFR Part 90

*Test Methods:*

Emissions: ANSI/TIA-603-B-2002

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland of North America, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that a sample of one, of the equipment described above, has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government. This report contains data that are not covered by NVLAP accreditation. This report shall not be reproduced except in full, without the written authorization of the laboratory.

---

16 December 2004

Date

NVLAP Signatory

## Table of Contents

<b>1</b>	<b>EXECUTIVE SUMMARY.....</b>	<b>4</b>
1.1	SCOPE .....	4
1.2	PURPOSE.....	4
<b>2</b>	<b>LABORATORY INFORMATION .....</b>	<b>4</b>
2.1	ACCREDITATIONS & ENDORSEMENTS .....	4
2.2	TEST FACILITIES.....	5
2.3	MEASUREMENT UNCERTAINTY.....	5
2.4	CALIBRATION TRACEABILITY .....	6
<b>3</b>	<b>TEST REPORT INFORMATION.....</b>	<b>7</b>
3.1	2.1033 APPLICATION FOR CERTIFICATION INFORMATION.....	7
3.2	2.1046 RF POWER OUTPUT .....	9
3.3	2.1047 MODULATION CHARACTERISTICS.....	10
3.4	90.210 EMISSION MASK .....	10
3.5	2.1051 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	14
3.6	2.1053 FIELD STRENGTH OF SPURIOUS RADIATION .....	16
3.7	2.1055 FREQUENCY STABILITY.....	17
3.8	90.214 TRANSIENT FREQUENCY BEHAVIOR .....	18
<b>4</b>	<b>TEST EQUIPMENT USE LIST .....</b>	<b>23</b>
<b>5</b>	<b>TEST SETUP PHOTOS.....</b>	<b>24</b>

## 1 Executive Summary

### 1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 90 based on the results of testing performed on *28 October 2004* through *14 December 2004* on the *UHF Data Transceiver* Model No. *TX3* manufactured by Everyday Wireless LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission

TUV Rheinland of North America at the 762 Park Ave. Youngsville, N.C 27596 address is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / NVLAP

TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:1999 and ISO 9002 (Lab code 200094-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Japan - VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and

approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. R-1174, R-1679, C-1790 and C-1791).

## **2.1.4 Acceptance By Mutual Recognition Arrangement**

The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland of North America at the 762 Park Ave. Youngsville, N.C 27596 address test results and test reports within the scope of the laboratory NIST / NVLAP accreditation will be accepted by each member country.

## **2.2 Test Facilities**

All of the test facilities are located at 762 Park Ave., Youngsville, North Carolina 27596, USA.

### **2.2.1 Emission Test Facility**

The Open Area Test Site and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:1992, at a test distance of 3 and 10 meters. This site has been described in reports dated May 12, 1997, submitted to the FCC, and accepted by letter dated June 25, 1997 (31040/SIT 1300F2). The site is listed with the FCC and accredited by NVLAP (code 200094-0). The 5m semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:1992, at a test distance of 3 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### **2.2.2 Immunity Test Facility**

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7m x 3.7m x 3.175mm thick aluminum floor connected to PE ground. For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6m x 0.8m x 0.8m high non-conductive table with a 3.175mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470 k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50cm x 50cm x 3.175mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470 k $\Omega$  resistors. For each of the other tests, the HCP is removed.

RF Field Immunity testing is performed in a 7.3m x 3.7m x 3.2m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.9m x 3.7m x 3.175mm thick aluminum ground plane which is connected to one end of the anechoic chamber.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## **2.3 Measurement Uncertainty**

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> addition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities, equal to the positive square root of a

sum of terms, the terms being the variances or co-variances of these other quantities weighted according to how the measurement result varies with changes in these quantities. The term standard uncertainty is the result of a measurement expressed as a standard deviation.

*The Expanded Uncertainty* defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurand. The fraction may be viewed as the coverage probability or level of confidence of the interval.

The test system for conducted emissions is defined as the LISN, spectrum analyzer, coaxial cables, and pads. The test system for radiated emissions is defined as the antenna, spectrum analyzer, pre-amplifier, coaxial cables, and pads. The test system for radiated immunity is defined as the antenna, amplifier, cables, signal generator field probe and spectrum analyzer. The test system for conducted immunity is defined as the coupling/decoupling device, amplifier, cables, signal generator and spectrum analyzer. The test system for voltage variations and interruptions immunity is defined as the AC power source and the interruptions generator. The test system for electrical fast transient immunity is defined as the AC power output source and the fast transient generator. The test system for lightning surge immunity is defined as the AC power output source and the lightning surge generator. The test system for electrostatic discharge immunity is defined as the air and contact discharge generators. The test system for power frequency magnetic field immunity is defined as the AC voltage source. The test system for the damped oscillatory wave immunity is defined as the AC power output source and the oscillatory wave generator. The test system for harmonic current and voltage flicker test is defined as the AC power source and the detection devices. The conducted emissions test system has a combined standard uncertainty of  $\pm 1.2$  dB. The radiated emissions test system has a combined standard uncertainty of  $\pm 1.6$  dB. The radiated immunity test system has a combined standard uncertainty of  $\pm 2.7$  dB. The conducted immunity test system has a combined standard uncertainty of  $\pm 1.5$  dB. The voltage variations and interruptions immunity test system has a combined standard uncertainty of  $\pm 4.3$  dB. The electrical fast transients immunity test system has a combined standard uncertainty of  $\pm 5.8$  dB. The lightning surge immunity test system has a combined standard uncertainty of  $\pm 8.0$  dB. The electrostatic discharge immunity test system has a combined standard uncertainty of  $\pm 4.1$  dB. The power frequency magnetic field immunity test system has a combined standard uncertainty of  $\pm 0.58$  dB. The damped oscillatory wave immunity test system has a combined standard uncertainty of  $\pm 8.7$  dB. The harmonic current and voltage flicker test system has a combined standard uncertainty of  $\pm 11.6$  dB. The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## **2.4 Calibration Traceability**

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Guide 17025:1999.

### 3 Test Report Information

#### 3.1 2.1033 Application for Certification Information

2.1033 (c) TECHNICAL DESCRIPTION

2.1033 (3) User Manual - Included in the Exhibits.

2.1033 90.209

(4) Type of Emission: 11K3F1D For 12.5 kHz

For 25kHz & 12 kHz

Bn = 2M + 2DK

M = 9600 Bits per second

D = 850 kHz (Peak Deviation)

K = 1

Bn =  $2(9600/2) + 2(825)(1) = 9600 + 1650 = 11.25k$

ALLOWED AUTHORIZED BANDWIDTH = 20.00 kHz

For 12.5 kHz

ALLOWED AUTHORIZED BANDWIDTH = 11.25 kHz

2.1033 (5) Frequency Range: 450-470 MHz

(6) Power Range and Controls: There are NO user Power controls.

(7) Maximum Output Power Rating:

45 Watts, into a 50 ohm resistive load.

(8) DC Voltages and Current into Final Amplifier:

INPUT POWER: (13.6V)(7.57A) = 102.95 Watts

(9) Tune-up procedure. The tune-up procedure is given in the Exhibits.

2.1033 (10) A schematic diagram and a description of all circuitry and devices for determining and stabilizing frequency, for suppression of spurious radiation, and for limiting power is included in the Exhibits.

2.1033(c) (11) A photograph or drawing of the equipment identification label is shown in the Exhibits.

2.1033(c) (12) Photographs of the equipment of sufficient clarity to reveal equipment construction and layout and label locations are shown in the Exhibits.

2.1033(c) (13) For Equipment employing digital modulation, a detail description of the modulation technique. This UUT uses FSK to modulate the transmitter.

2.1033(c) (14) data required for 2.1046 to 2.1057. See Below.

### 3.2 2.1046 RF Power Output


#### RF power output.

RF power is measured by connecting a 50-ohm, Resistive wattmeter to the RF output connector, with a nominal battery voltage of 13.6 VDC, and the transmitter properly adjusted the RF output measures:

POWER OUTPUT

OUTPUT POWER: 45 Watts

#### METHOD OF MEASURING RF POWER OUTPUT

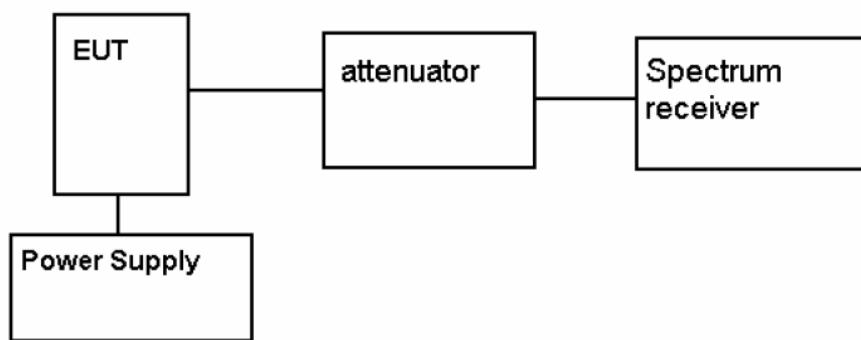

### **3.3 2.1047 Modulation Characteristics**

NOT APPLICABLE, F1 type of emission.

### **3.4 90.210 Emission Mask**

90.210 (c)

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the unmodulated carrier output power as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10kHz: At least  $83 \log (fd/5)$  dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least  $29 \log (fd/11)$ db or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least  $43 + 10 \log (Po)$  dB.

90.210 (d) Emission Mask D - 12.5 kHz channel bandwidth equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power(P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more

than 5.625 kHz but no more than 12.5 kHz: At least 7.27  
( $fd - 2.88$  kHz) dB.


(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $fd$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

#### Radiotelephone Transmitter with Modulation Limiter


Test procedure: TIA/EIA-603 para 2.2.11, with the exception that various tones were used.

#### Test procedure diagram


#### OCCUPIED BANDWIDTH AND MASK MEASUREMENT

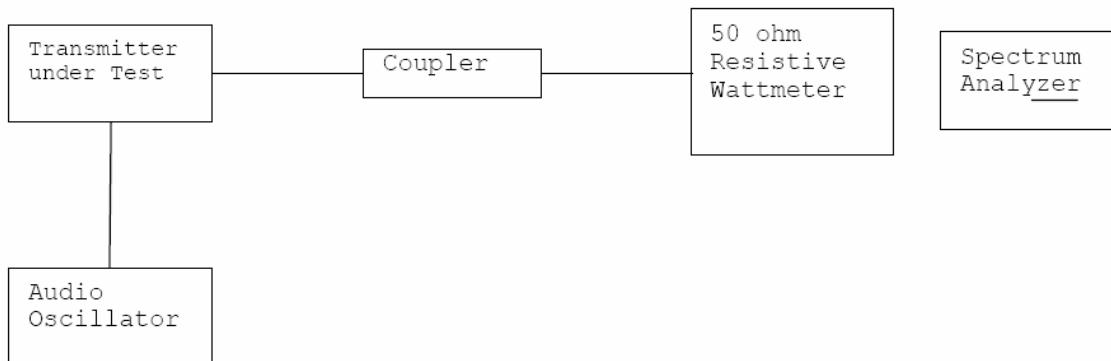


**Emission Mask C PLOT 463.7MHz**

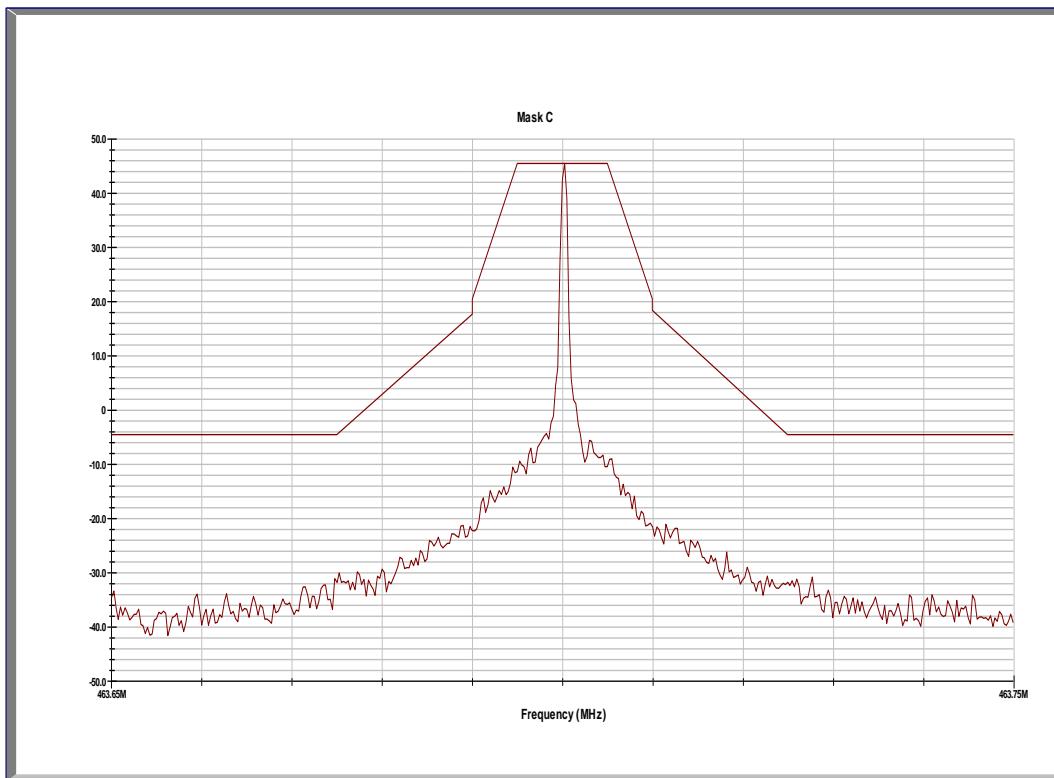

**Emission Mask D Plot 463.7 MHz**

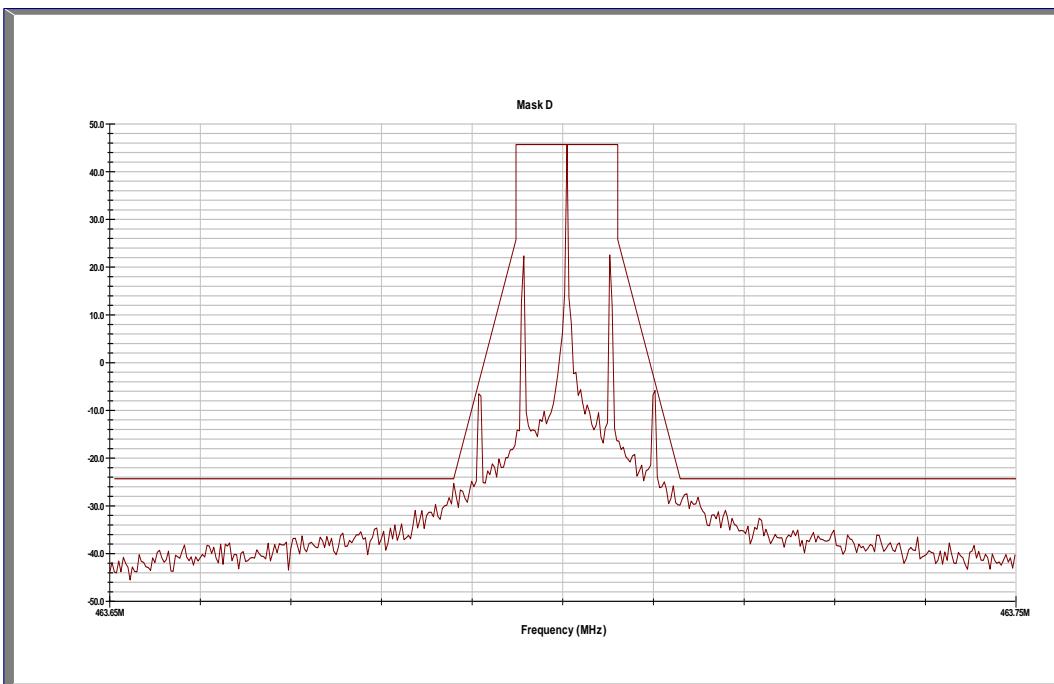

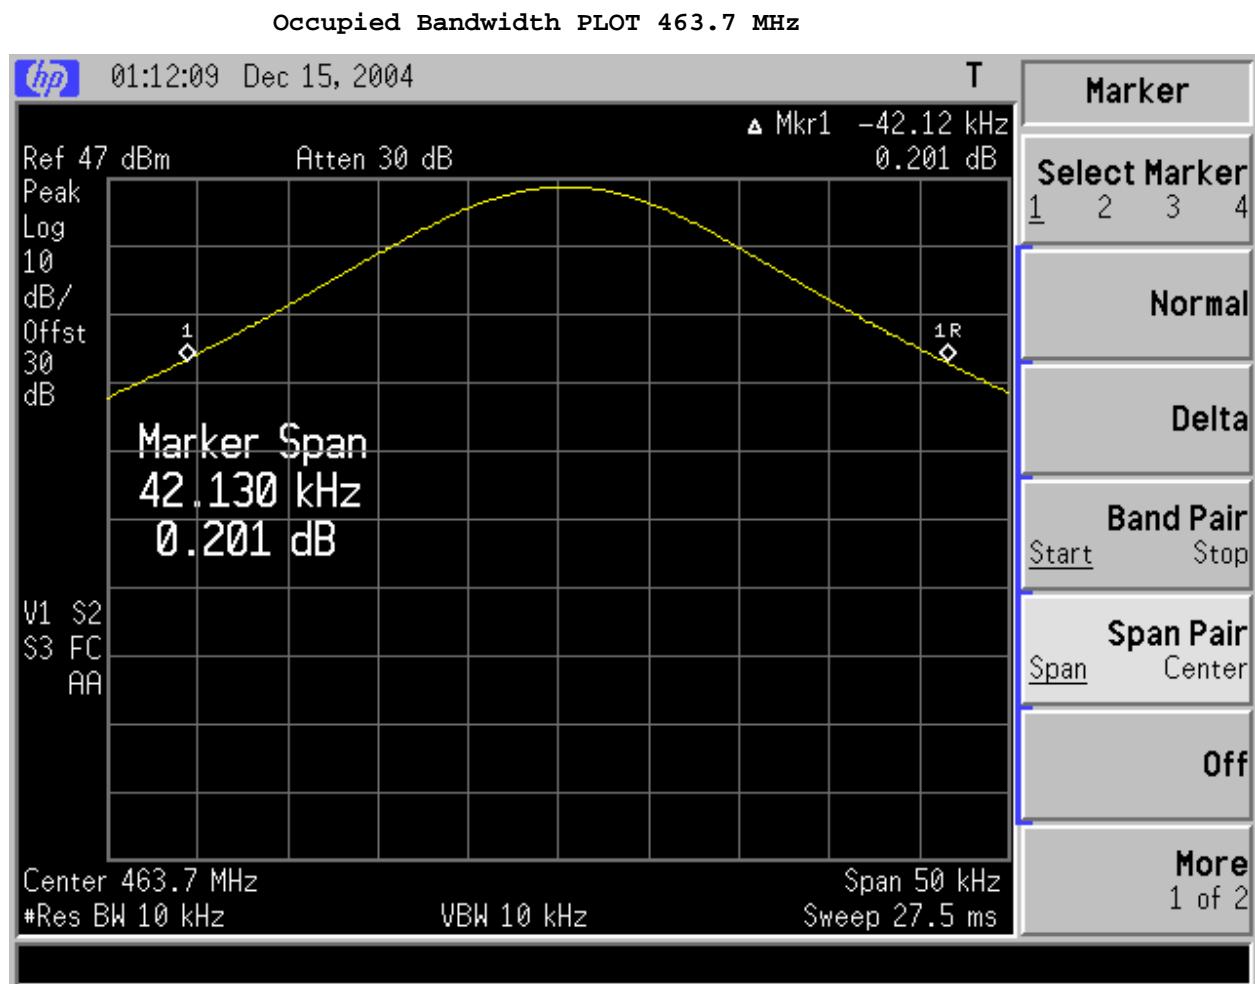

### **3.5 2.1051 Spurious Emissions at Antenna Terminals**


Data provided below shows the level of conducted spurious responses. The transmitter under test was programmed to generate a continuous wave (CW) carrier signal at peak power to measure carrier and harmonic conducted emissions. The output of the transmitter was connected to a standard load and from the standard load through a pre-selector filter of the HP model E7405A spectrum analyzer used. The spectrum was scanned from 0 to at least the 10<sup>th</sup> harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS: Emissions must be  $50 + 10\log(P_o)$  dB below the mean power output of the transmitter.

For 12.5 kHz:  $50 + 10\log(45) = 66.53$  dBc

EMISSION FREQUENCY MHz	dB BELOW CARRIER
450	N/a
900	85.91
1350	80.46
1800	91.11
2250	85.51
2700	81.51
3150	92.61
3600	90.31
4050	91.77
4500	85.36
463.7	N/a
927.4	84.47
1391.1	81.39
1854.8	91.47
2318.5	88.77
2782.2	85.2
3245.9	91.37
3709.6	91.57
4173.3	93.47
4637	88.07
470	N/a
940	71.7
1410	71.47
1880	86.49
2350	86.89
2820	91.69
3290	100.49
3760	98.09
4230	98.39
4700	91.59

Method of Measuring Conducted Spurious Emissions

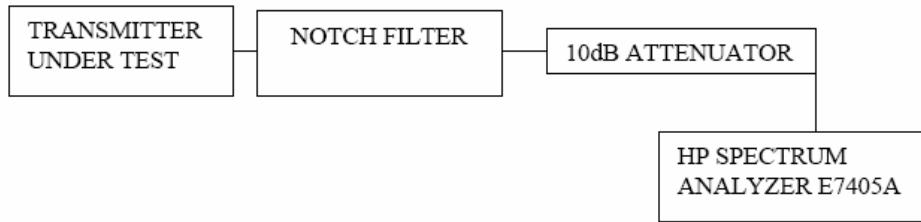

**METHOD OF MEASUREMENT:** The transmitter under test was programmed to generate a continuous wave (CW) carrier signal at peak power to measure carrier and harmonic conducted emissions. The output of the transmitter was connected to a standard load and from the standard load through a pre-selector filter of the HP model E7405A spectrum analyzer used. The spectrum was scanned from 0 to at least the 10<sup>th</sup> harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

### **3.6 2.1053 Field Strength of Spurious Radiation**

NAME OF TEST: RADIATED SPURIOUS EMISSIONS


REQUIREMENTS: Emissions must be  $50 + 10\log(P_o)$  dB below the mean power output of the transmitter.

$$50 + 10\log(45) = 66.53 \text{ dBc}$$

DATA:

**See Separate Test Report**

Method of Measuring Radiated Spurious Emissions

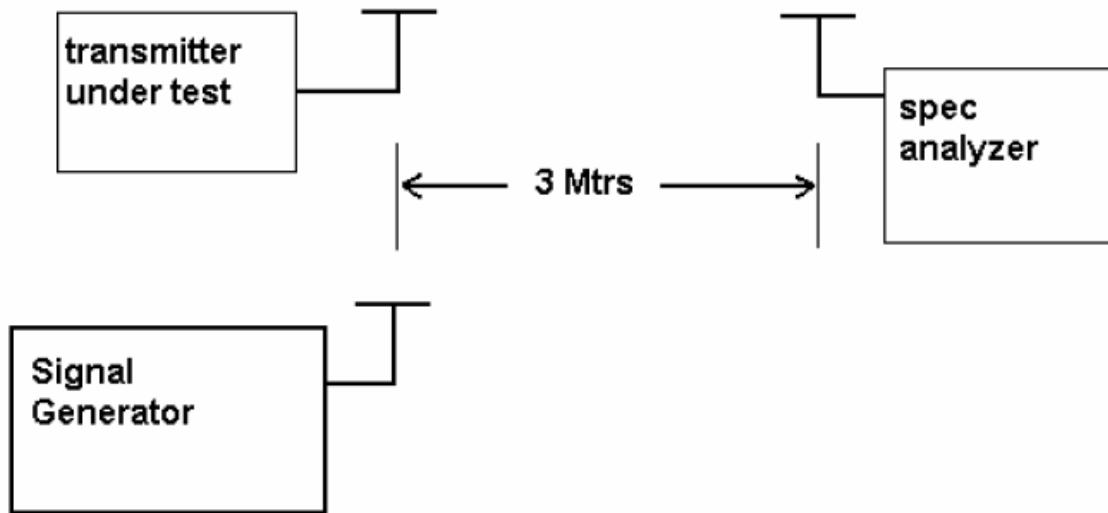

Method of Measurements: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method.

### **3.7 2.1055 Frequency Stability**

90.213(a)(1)

Temperature and voltage tests were performed to verify that the frequency remains within the .00015%, 1.5 ppm specification limit, for 25 kHz spacing & 0.00025% for 12.5 KHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30°C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10° increments up to + 50 degrees C. Readings were also taken at minus 15% of the battery voltage of 13.6 VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

**See Separate Test Report**

### **3.8 90.214 Transient Frequency Behavior**


REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 450-500 MHz
t1	+ 12.5 kHz	10.0 ms
t2	+ 6.25 kHz	25.0 ms
t3,t4	+ 12.5 kHz	10.0 ms



TEST PROCEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows:



1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

90.214 Transient Frequency Behavior  
(Continued)


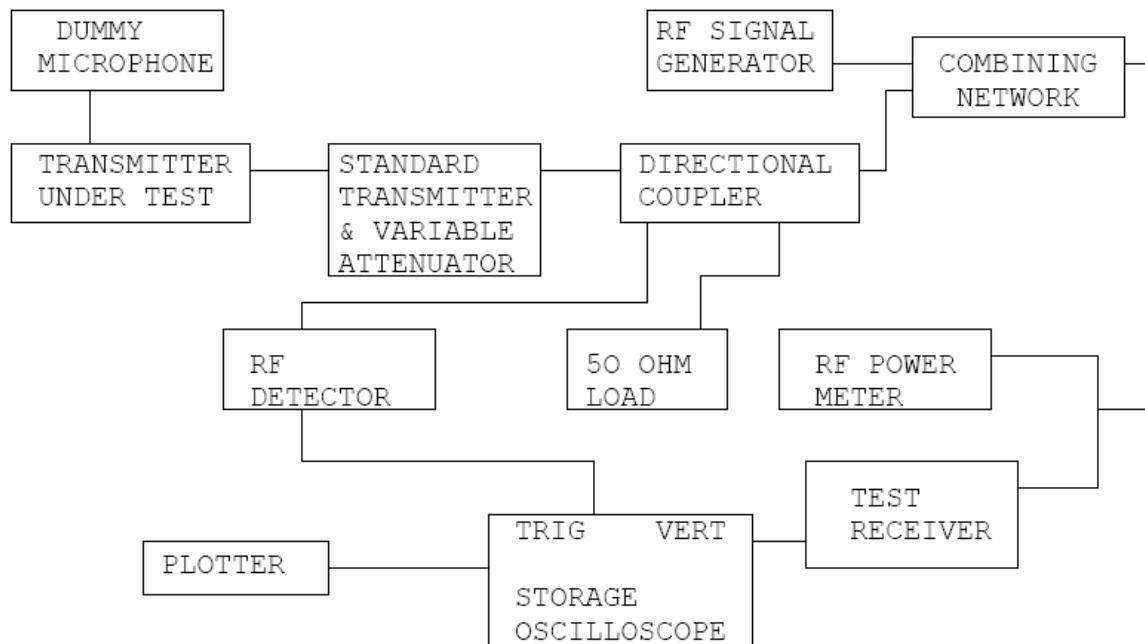


TRANSIENT FREQUENCY RESPONSE GRAPH – 12.5 (450MHz)

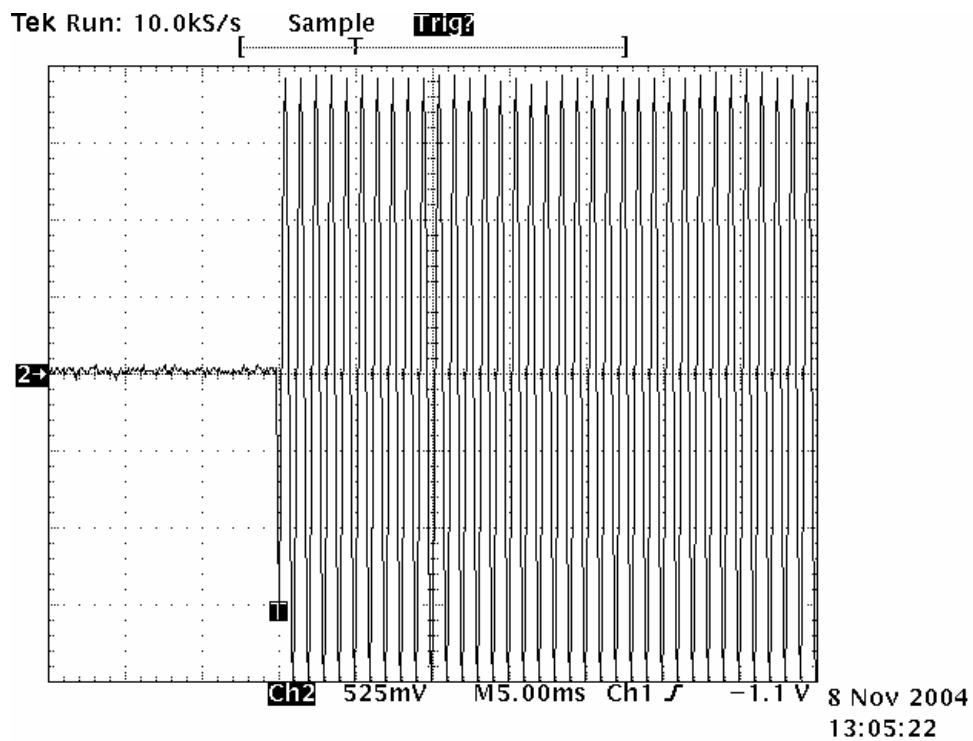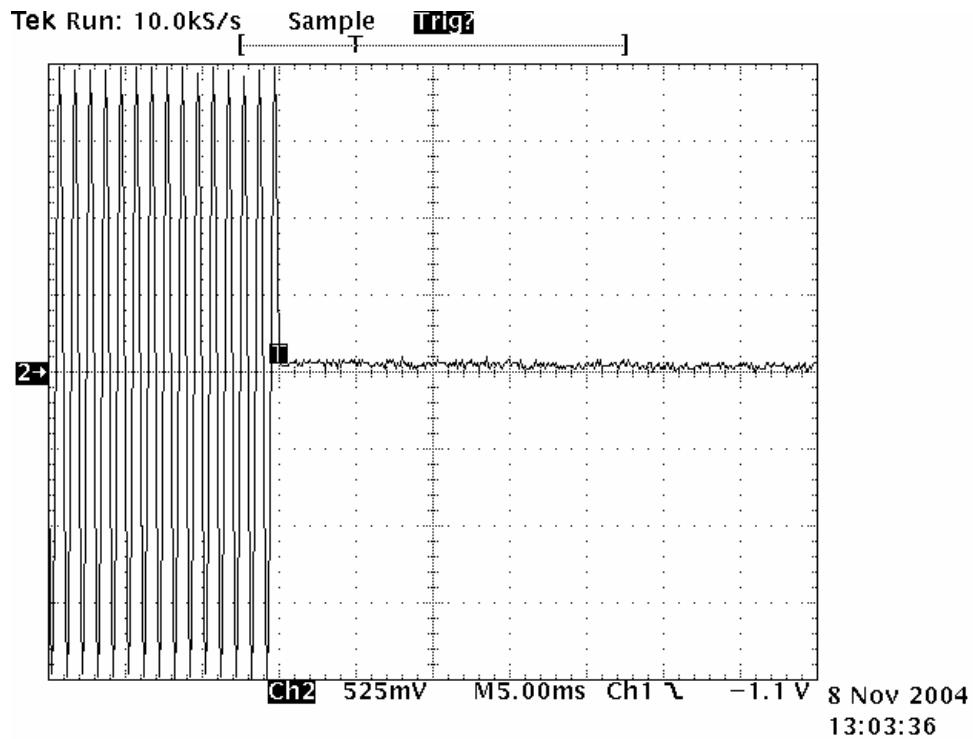

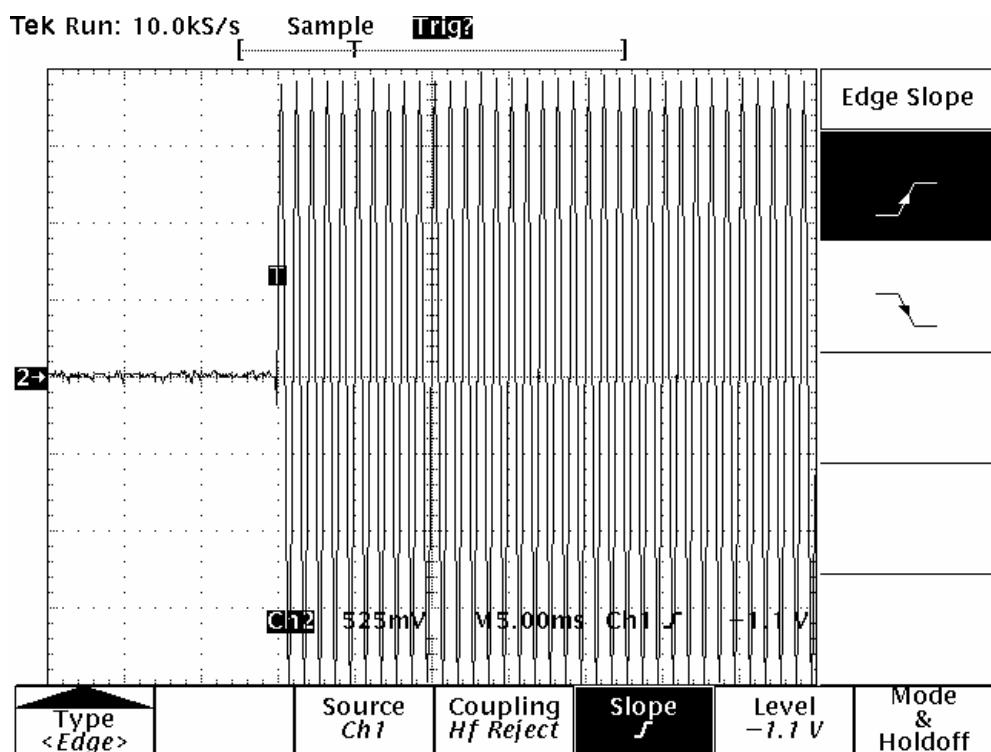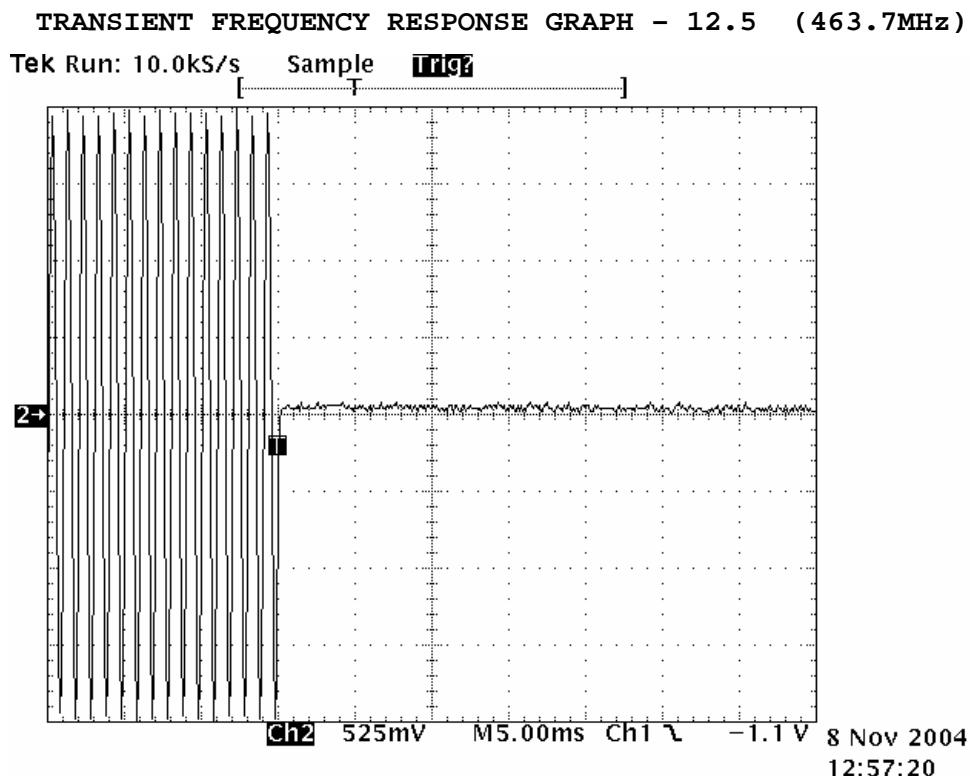

TRANSIENT FREQUENCY RESPONSE GRAPH - 12.5 (470MHz)

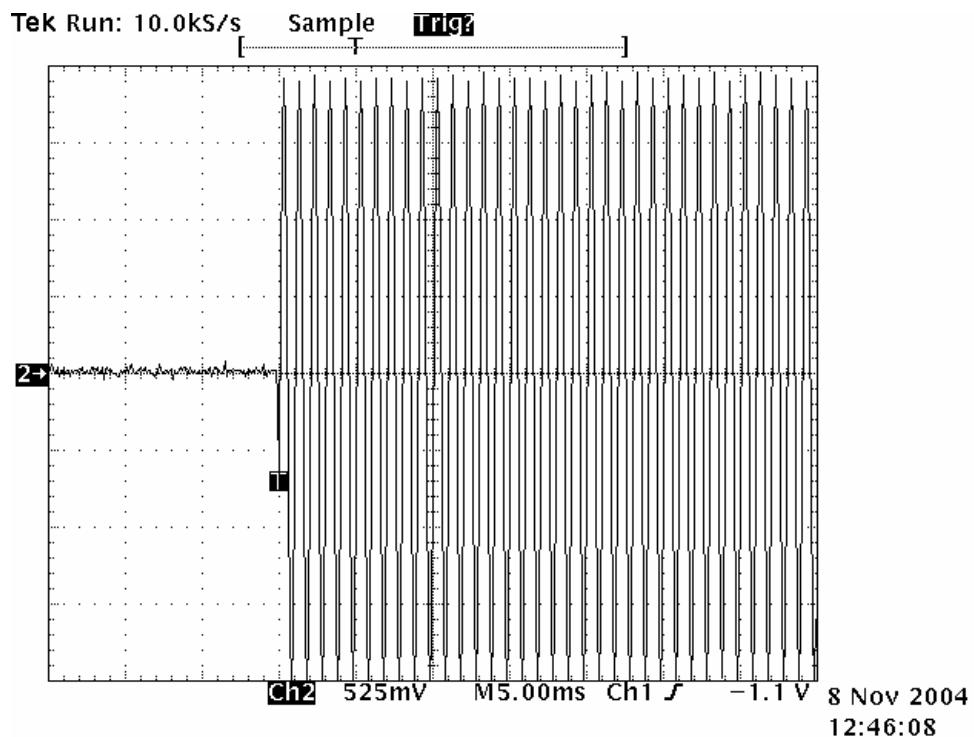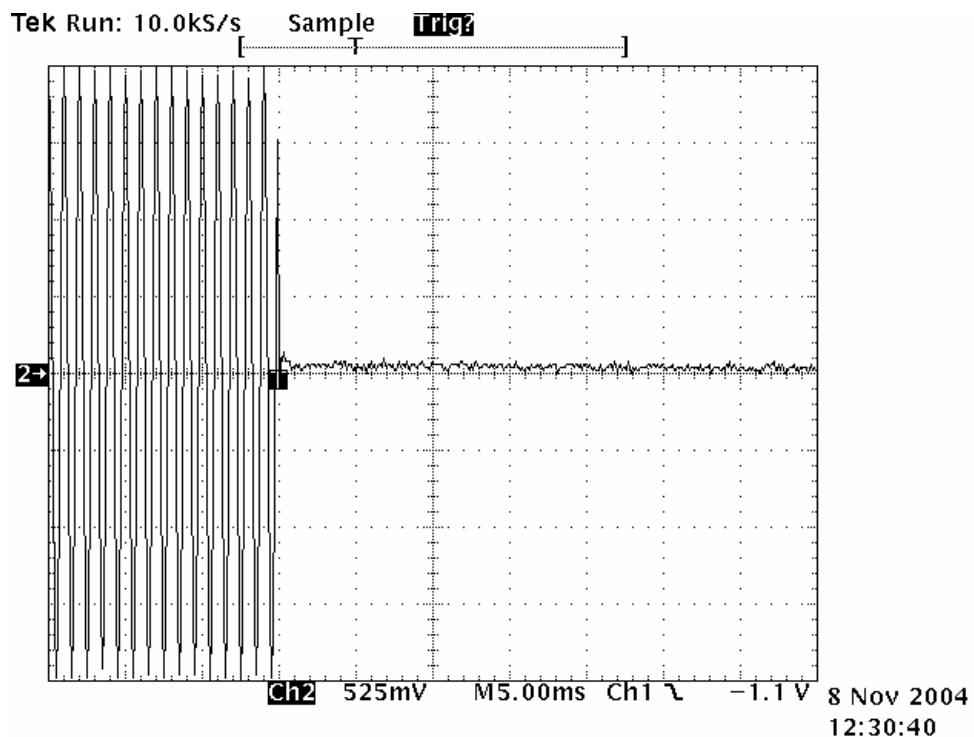

## 4 Test Equipment Use List


Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	10-May-04	10-May-05
Ant. Log Periodic	AH Systems	SAS-516	133	19-Jan-04	19-Jan-05
Antenna Horn	EMCO	3115	2236	14-Oct-04	14-Oct-05
Cable, Coax	Andrew	FSJ1-50A	031	16-Jan-04	16-Jan-05
Cable, Coax	Andrew	FSJ1-50A	034	19-Jan-04	19-Jan-05
Cable, Coax	Thermax	RG 142 B/U	035	19-Jan-04	19-Jan-05
Cable, Coax	Andrew	FSJ1-50A	042	15-Jan-04	15-Jan-05
Cable, Coax	Andrew	FSJ1-50A	045	15-Jan-04	15-Jan-05
Chamber, Semi-Anechoic	Braden Shielding	5 meter	A67631	27-Jan-04	27-Jan-05
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	11-Aug-04	11-Aug-05
Ant. Dipole Set BL 1-4	EMCO	3121C	9302-914	20-Oct-04	20-Oct-05
Antenna Horn	EMCO	3115	5770	11-Mar-04	11-Mar-05
Meter, Multi	Fluke	79-3	69200606	6-Aug-04	6-Aug-05
Meter, RF Power	Boonton	4231A	66801	22-Aug-04	22-Aug-05
Meter, Temp/Humid/Barom	Fisher	02-400	01	13-Aug-04	13-Aug-05
Oscilloscope	Tektronix	TDS 680B	B030230	14-Feb-04	14-Feb-05
Power Sensor	Boonton	51075	32091	22-Aug-04	22-Aug-05
Power Sensor	Boonton	51011-EMC	32203	22-Aug-04	22-Aug-05
Power Supply, DC	Lambda	LK343A FM	D24270	CNR II	CNR II
Receiver	IFR	1200A	844912/002	CNR II	CNR II

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.


## 5 Test Setup Photos



Spurious Emissions At Antenna Port, Output Power, Mask, and Bandwidth Test

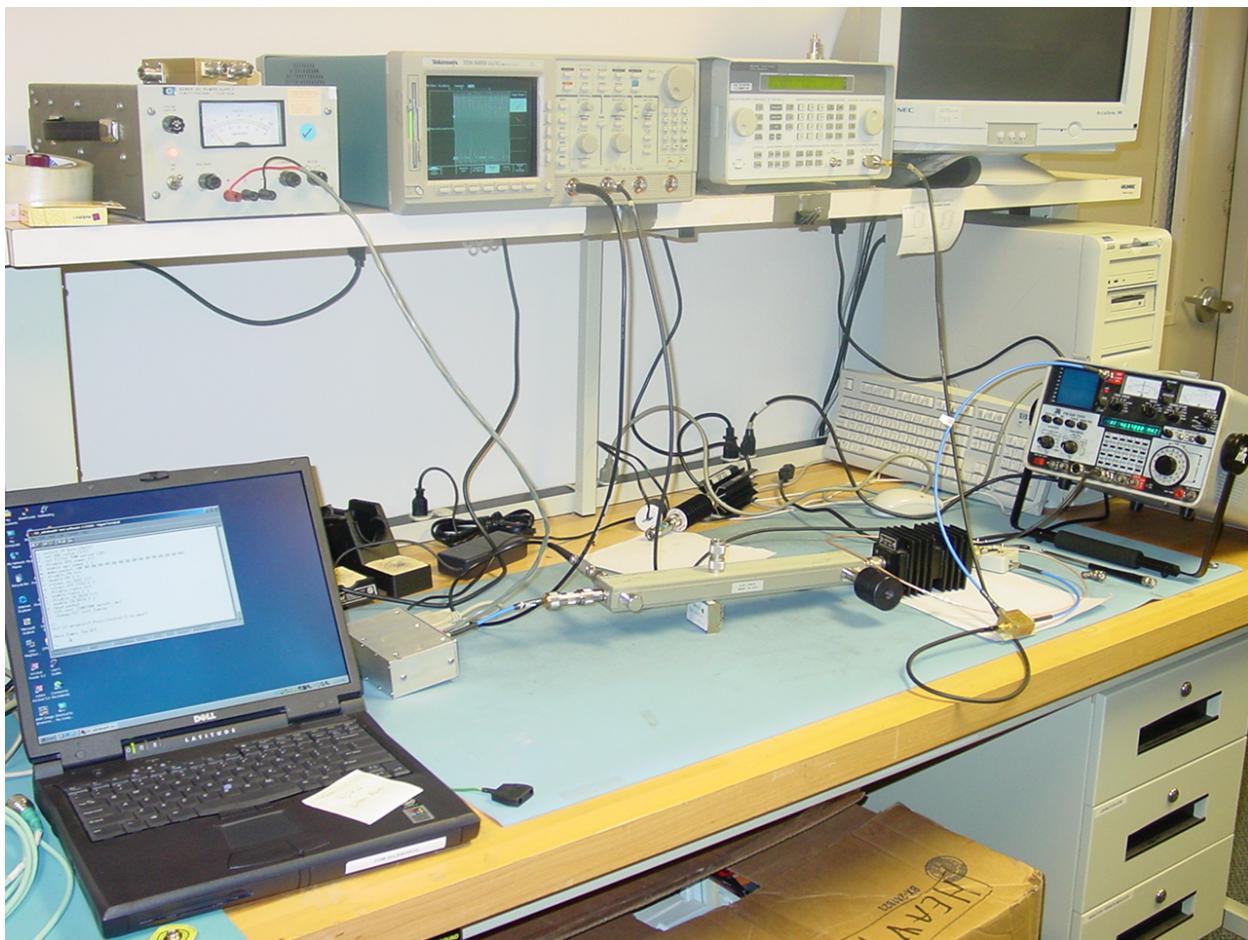

Transient Frequency Behavior

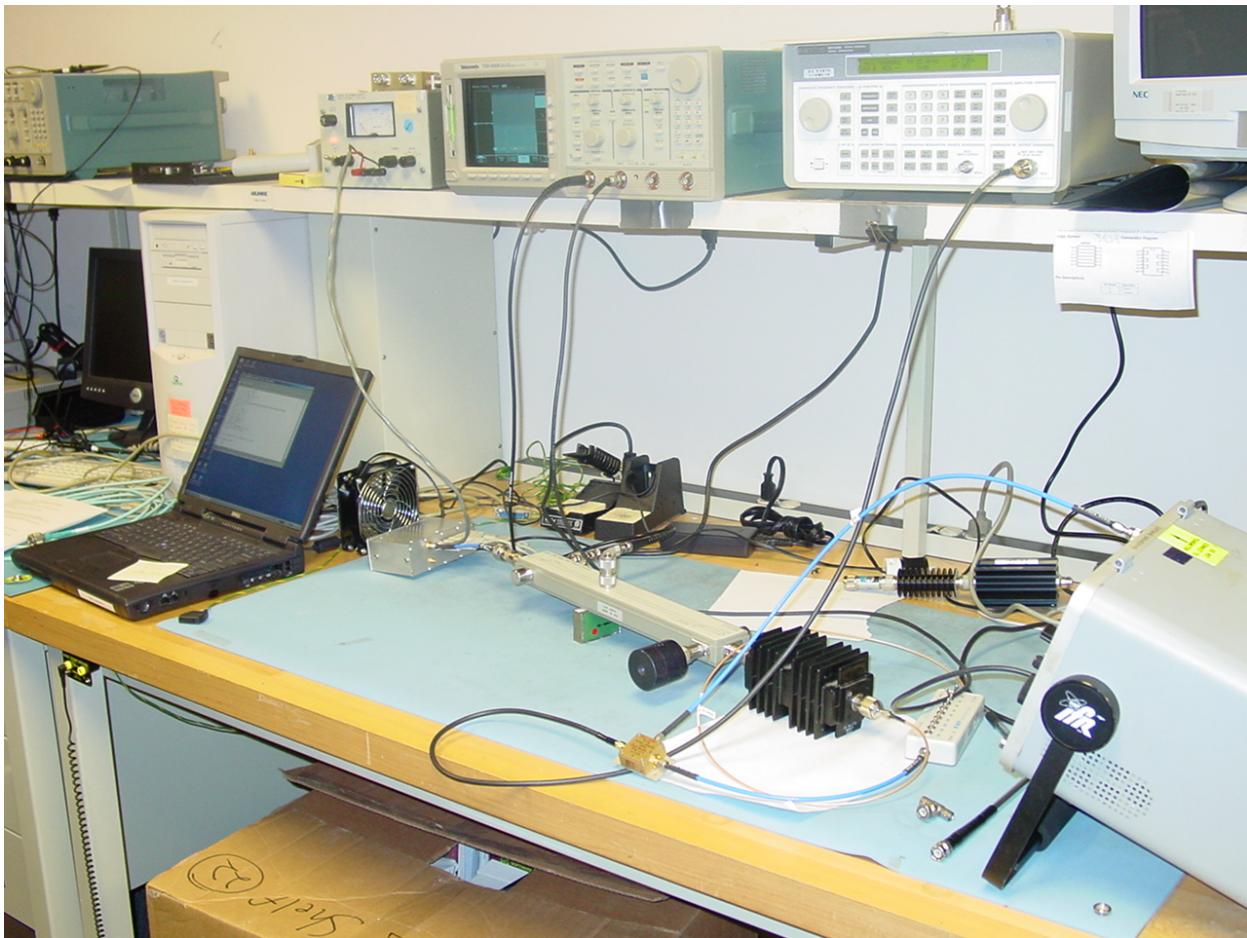

Transient Frequency Behavior