



# TEST REPORT

Report Number: C20T00030-RFA01-V00

Applicant MobiWire SAS  
Product Name 4G Smart phone  
Model Name MobiWire Ituha, MBW Vodafone Smart N12  
Brand Name MobiWire  
FCC ID QPN-ITUHA

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part 2/22/24, ANSI/TIA-603-E, ANSI C63.26, KDB 971168 D01.

Prepared by

刘艳

Reviewed by

范凌艳

Approved by

李海雷

Issue Date

2021-03-15

**Industrial Internet Innovation Center (Shanghai) Co., Ltd.**

## NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity and the measurement accuracy.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

**Test Laboratory:**

Industrial Internet Innovation Center (Shanghai) Co., Ltd.  
Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China  
Tel: +86 21 63843300



### Revision Version

| Report Number       | Revision | Date       | Memo                            |
|---------------------|----------|------------|---------------------------------|
| C20T00030-RFA01-V00 | 00       | 2021-03-15 | Initial creation of test report |

## CONTENTS

|  |    |
|--|----|
| 1. TEST LABORATORY .....   | 6  |
| 1.1. TESTING LOCATION .....                                      | 6  |
| 1.2. TESTING ENVIRONMENT .....                                   | 6  |
| 1.3. PROJECT INFORMATION .....                                   | 6  |
| 2. CLIENT INFORMATION .....                                      | 7  |
| 2.1. APPLICANT INFORMATION .....                                 | 7  |
| 2.2. MANUFACTURER INFORMATION .....                              | 7  |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) ..... | 8  |
| 3.1. ABOUT EUT .....   | 8  |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....   | 8  |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....    | 8  |
| 4. REFERENCE DOCUMENTS .....                                     | 9  |
| 4.1. REFERENCE DOCUMENTS FOR TESTING .....                       | 9  |
| 4.2. REFERENCE INFORMATION FROM CLIENT .....                     | 9  |
| 5. TEST SUMMARY .....  | 10 |
| 5.1. SUMMARY OF TEST RESULTS .....                               | 10 |
| 5.2. STATEMENTS .....  | 11 |
| 6. MEASUREMENT RESULTS .....                                     | 12 |
| 6.1. OUTPUT POWER .....  | 12 |
| 6.2. PEAK-TO-AVERAGE POWER RATIO .....                           | 16 |
| 6.3. OCCUPIED BANDWIDTH .....                                    | 18 |
| 6.4. -26DB EMISSION BANDWIDTH .....                              | 25 |
| 6.5. BAND EDGE AT ANTENNA TERMINALS .....                        | 33 |
| 6.6. FREQUENCY STABILITY .....                                   | 38 |

|   |    |
|---|----|
| 6.7. CONDUCTED SPURIOUS EMISSION .....  | 43 |
| 6.8. RADIATED .....                     | 51 |
| 7. TEST EQUIPMENT LIST.....             | 73 |
| ANNEX A: MEASUREMENT UNCERTAINTY .....  | 74 |
| ANNEX B: ACCREDITATION CERTIFICATE..... | 75 |

## 1. Test Laboratory

### 1.1. Testing Location

|                     |  |
|---------------------|--|
| Company Name        | Industrial Internet Innovation Center (Shanghai) Co., Ltd. |
| Address             | Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China    |
| FCC Designation No. | CN1177   |

### 1.2. Testing Environment

|                    |             |
|--------------------|-------------|
| Normal Temperature | 15°C~35°C   |
| Relative Humidity  | 30%RH~60%RH |
| Supply Voltage     | 120V/60Hz   |

### 1.3. Project Information

|                    |            |
|--------------------|------------|
| Project Leader     | Xu Yuting  |
| Testing Start Date | 2020-12-08 |
| Testing End Date   | 2021-03-05 |

## 2. Client Information

### 2.1. Applicant Information

|              |  |
|--------------|--|
| Company Name | MobiWire SAS                                   |
| Address      | 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE France |
| Telephone    | +33 625 028 368-33                             |

### 2.2. Manufacturer Information

|              |  |
|--------------|--|
| Company Name | MobiWire SAS                                   |
| Address      | 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE France |
| Telephone    | +33 625 028 368-33                             |

### 3. Equipment under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

|                                      |  |
|--------------------------------------|--|
| Product Name                         | 4G Smart phone   |
| Model name                           | MobiWire Ituha, MBW Vodafone Smart N12   |
| Supported Radio Technology and Bands | GSM850/GSM900/GSM1800/GSM1900<br>WCDMA Band I/ II/V/VIII<br>LTE Band 1/3/7/8/20/28B<br>BT5.1<br>WLAN 802.11b/g/n<br>GNSS GLONASS G1/GPS L1 |
| Hardware Version                     | V00A   |
| Software Version                     | VFD_NZ_SMART_N12_SS_O_T_L_V01  |
| FCC ID                               | QPN-ITUHA  |
| Extreme Temperature                  | -10°C~55°C   |
| Nominal Voltage                      | 3.80V  |
| Extreme High Voltage                 | 4.35V  |
| Extreme Low Voltage                  | 3.60V  |

#### 3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI      | HW Version | SW Version                    | Date of Receipt |
|---------|-----------------|------------|-------------------------------|-----------------|
| N01     | 352110690001343 | V00A       | VFD_NZ_SMART_N12_SS_O_T_L_V01 | 2020-12-03      |
| N04     | 352110690004057 | V00A       | VFD_NZ_SMART_N12_SS_O_T_L_V01 | 2020-12-03      |
| N05     | 352110690003984 | V00A       | VFD_NZ_SMART_N12_SS_O_T_L_V01 | 2020-12-03      |

\*EUT ID: is internally used to identify the test sample in the lab.

#### 3.3. Internal Identification of AE used during the test

| AE ID* | Description | Model | SN/Remark |
|--------|-------------|-------|-----------|
| AE1    | RF cable    | ---   | AE1       |

\*AE ID: is internally used to identify the test sample in the lab.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference      | Title   | Version    |
|----------------|---|------------|
| FCC Part 2     | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS                                   | 2018-10-01 |
| FCC Part 22    | PUBLIC MOBILE SERVICES  | 2018-10-01 |
| FCC Part 24    | PERSONAL COMMUNICATIONS SERVICES  | 2018-10-01 |
| ANSI-TIA-603-E | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                             | 2016       |
| ANSI C63.26    | American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio | 2015       |
| KDB 971168 D01 | Measurement Guidance for Certification of Licensed Digital Transmitters   | v03r01     |

### 4.2. Reference Information from client

Antenna gain Information of the test sample provided by MobiWire SAS

Maximum of Antenna Gain:

GSM850: -2dBi; PCS1900: -0.5dBi

WCDMA BANDII: -0.5dBi; WCDMA BANDV: -2dBi

## 5. Test Summary

### 5.1. Summary of Test Results

| Measurement Items              | Sub-clause                         | Verdict |
|--------------------------------|------------------------------------|---------|
| Output Power                   | 2.1046/22.913(a)/24.232(c)         | P       |
| Peak-to-Average Ratio          | 24.232(d)                          | P       |
| 99%Occupied Bandwidth          | 2.1049(h)(i)/ 22.917(b)            | P       |
| -26dB Emission Bandwidth       | 22.917(b)/§24.238(b)               | P       |
| Band Edge at antenna terminals | 22.917(a)/24.238(a)                | P       |
| Frequency stability            | 2.1055/24.235                      | P       |
| Conducted Spurious mission     | 2.1053/22.917(a)/24.238(a)         | P       |
| Emission Limit                 | 2.1051/22.917/24.238/22.913/24.232 | P       |

Note: please refer to Annex C in this test report for the detailed test results.

The following terms are used in the above table.

|    |  |
|----|--|
| P  | Pass, the EUT complies with the essential requirements in the standard.        |
| NM | Not measure, the test was not measured by 3IN.                                 |
| NA | Not applicable, the test was not applicable.                                   |
| F  | Fail, the EUT does not comply with the essential requirements in the standard. |



## 5.2. Statements

The MobiWire Ituha, MBW Vodafone Smart N12, manufactured by MobiWire SAS is a new product for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

## 6. Measurement Results

### 6.1. OUTPUT POWER

#### 6.1.1. Summary

During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio.

Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### 6.1.2. Conducted

##### 6.1.2.1. Method of Measurements

Method of measurements please refer to KDB971168 D01 v03 clause 5.

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSQ(peak).

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 1732.6 MHz, 1712.4MHz and 1752.6MHz for WCDMA Band IV; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

##### 6.1.2.2 Test procedures:

1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 6.1.2.3 Limit:

22.913(a) Mobile stations are limited to 7watts.

24.232(c) Mobile and portable stations are limited to 2 watts.

##### 6.1.2.4 Test Procedure:

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the signal analyzer reading.

**6.1.2.5 GSM Test Condition:**

| RBW  | VBW   | Sweep time | Span  |
|------|-------|------------|-------|
| 3MHz | 10MHz | Auto       | 50MHz |

**6.1.2.6 WCDMA Test Condition:**

| RBW   | VBW   | Sweep time | Span  |
|-------|-------|------------|-------|
| 10MHz | 30MHz | Auto       | 50MHz |

**6.1.2.7 Measurement results:**

| GSM 850 (GMSK)         |                  |                |
|------------------------|------------------|----------------|
| Channel/fc(MHz)        | Peak power (dBm) | AV power (dBm) |
| Low 128/824.2          | 32.20            | 32.10          |
| Mid 189/836.4          | 32.40            | 32.23          |
| High 251/848.8         | 32.40            | 32.13          |
| GPRS 850 (GMSK 1 Slot) |                  |                |
| Channel/fc(MHz)        | Peak power (dBm) | AV power (dBm) |
| Low 128/824.2          | 32.20            | 32.15          |
| Mid 189/836.4          | 32.40            | 32.27          |
| High 251/848.8         | 32.40            | 32.35          |
| EDGE 850 (8PSK 1 Slot) |                  |                |
| Channel/fc(MHz)        | Peak power (dBm) | AV power (dBm) |
| Low 128/824.2          | 31.45            | 31.35          |
| Mid 189/836.4          | 31.65            | 31.55          |
| High 251/848.8         | 31.73            | 31.43          |

| GSM 1900(GMSK)          |                  |                |
|-------------------------|------------------|----------------|
| Channel/fc(MHz)         | Peak power (dBm) | AV power (dBm) |
| Low 512/1850.2          | 28.80            | 28.46          |
| Mid 661/1880            | 29.10            | 29.02          |
| High 810/1909.8         | 29.40            | 29.14          |
| GPRS 1900 (GMSK 1 Slot) |                  |                |
| Channel/fc(MHz)         | Peak power (dBm) | AV power (dBm) |
| Low 512/1850.2          | 28.80            | 28.56          |
| Mid 661/1880            | 29.10            | 29.01          |
| High 810/1909.8         | 29.40            | 29.32          |
| EDGE 1900 (8PSK 1 Slot) |                  |                |
| Channel/fc(MHz)         | Peak power (dBm) | AV power (dBm) |
| Low 512/1850.2          | 27.53            | 27.43          |
| Mid 661/1880            | 27.84            | 27.65          |
| High 810/1909.8         | 28.19            | 28.06          |

| WCDMA II         |                  |                |
|------------------|------------------|----------------|
| Channel/fc(MHz)  | Peak power (dBm) | AV power (dBm) |
| Low 9663/1852.6  | 23.00            | 22.98          |
| Mid 9800 /1880   | 23.07            | 23.01          |
| High 9937/1907.4 | 23.13            | 23.03          |
| WCDMA BAND V     |                  |                |
| Channel/fc(MHz)  | Peak power (dBm) | AV power (dBm) |
| Low 4358/826.6   | 22.99            | 22.69          |
| Mid 4400/835     | 23.13            | 23.03          |
| High 4457/846.4  | 22.97            | 22.47          |

## 6.2. Peak-to-Average Power Ratio

Method of test measurements please refer to KDB971168 D01 v03 clause 5.7.

### 6.2.1 PAPR Limit

The peak-to-average power ratio (PAPR) of the transmission may not exceed 13dB

### 6.2.2 Test procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2.
  - 1) Select the spectrum analyzer CCDF function.
  - 2) Set  $RBW \geq$  signal's occupied bandwidth.
  - 3) Set the number of counts to a value that stabilizes the measured CCDF curve;
  - 4) Sweep time  $\geq 1s$ .
3. Record the maximum PAPR level associated with a probability of 0.1%.

### 6.2.3 Test results:

| <b>GSM850</b>   |       |       |       |
|-----------------|-------|-------|-------|
| Channel         | 128   | 189   | 251   |
| Frequency (MHz) | 824.2 | 836.4 | 848.8 |
| PAPR(dB)        | 8.43  | 8.40  | 8.49  |
| <b>GPRS850</b>  |       |       |       |
| Channel         | 128   | 189   | 251   |
| Frequency (MHz) | 824.2 | 836.4 | 848.8 |
| PAPR(dB)        | 8.49  | 8.40  | 8.43  |
| <b>EDGE 850</b> |       |       |       |
| Channel         | 128   | 189   | 251   |
| Frequency (MHz) | 824.2 | 836.4 | 848.8 |
| PAPR(dB)        | 8.40  | 8.43  | 8.43  |

| <b>GSM1900</b>   |        |      |        |
|------------------|--------|------|--------|
| Channel          | 512    | 661  | 810    |
| Frequency (MHz)  | 1850.2 | 1880 | 1909.8 |
| PAPR(dB)         | 8.33   | 8.49 | 8.40   |
| <b>GPRS1900</b>  |        |      |        |
| Channel          | 512    | 661  | 810    |
| Frequency (MHz)  | 1850.2 | 1880 | 1909.8 |
| PAPR(dB)         | 8.43   | 8.53 | 8.40   |
| <b>EDGE 1900</b> |        |      |        |
| Channel          | 512    | 661  | 810    |
| Frequency (MHz)  | 1850.2 | 1880 | 1909.8 |
| PAPR(dB)         | 8.49   | 8.53 | 8.49   |

| <b>WCDMA Band II</b> |        |       |        |
|----------------------|--------|-------|--------|
| Channel              | 9262   | 9400  | 9538   |
| Frequency (MHz)      | 1852.4 | 1880  | 1907.6 |
| PAPR(dB)             | 8.40   | 8.40  | 8.46   |
| <b>WCDMA Band V</b>  |        |       |        |
| Channel              | 4132   | 4183  | 4233   |
| Frequency (MHz)      | 826.4  | 836.4 | 846.6  |
| PAPR(dB)             | 8.46   | 8.43  | 8.43   |

## 6.3. Occupied Bandwidth

Method of test please refer to KDB971168 D01 v03 clause 4.0.

### 6.3.1. Occupied Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

### 6.3.2 Test Procedure:

1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW  $\geq$  3 times RBW,.
3. 99% bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

### 6.3.3 Test result:

| GSM850  |        |   |        |
|---|--------|---|--------|
| Channel 128, 824.2MHz,<br>Occupied Bandwidth (99%)(kHz) | 248.40 | Channel 189, 836.4MHz,<br>Occupied Bandwidth (99%)(kHz) | 247.70 |
| <p>Date: 28.NOV.2020 08:49:28</p>                       |        | <p>Date: 28.NOV.2020 08:50:32</p>                       |        |
| Channel 251, 848.8MHz,<br>Occupied Bandwidth (99%)(kHz) | 245.40 |   | /      |
| <p>Date: 28.NOV.2020 08:51:36</p>                       |        |   | /      |


### GPRS850

Channel 128, 824.2MHz,  
Occupied Bandwidth (99%)(kHz)


243.90

Channel 189, 836.4MHz,  
Occupied Bandwidth (99%)(kHz)

243.60

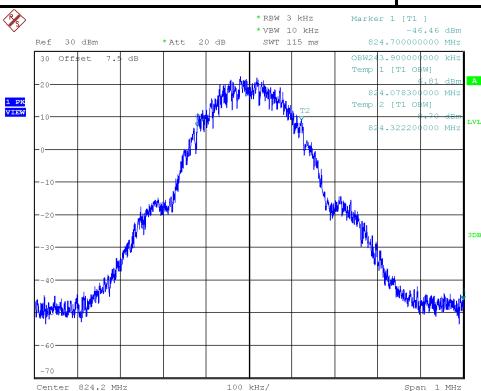


Date: 28.NOV.2020 08:52:33

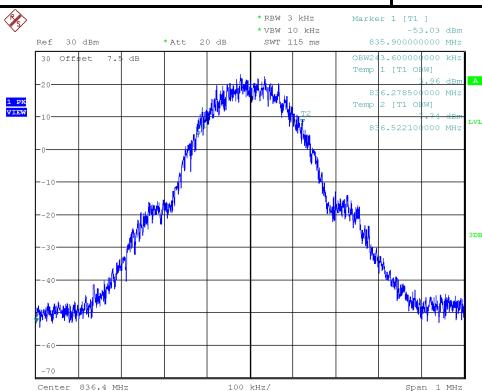

Date: 28.NOV.2020 08:53:28

Channel 251, 848.8MHz,  
Occupied Bandwidth (99%)(kHz)

247.40

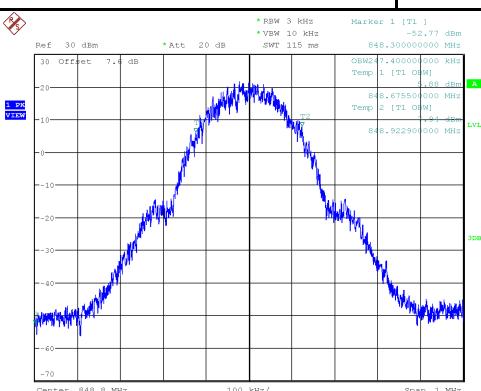

Date: 28.NOV.2020 08:54:22

/

/


### EDGE850

Channel 128, 824.2MHz,  
Occupied Bandwidth (99%)(kHz)


244.90

Channel 189, 836.4MHz,  
Occupied Bandwidth (99%)(kHz)





244.60

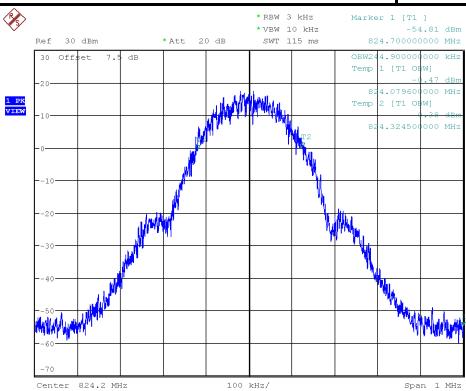


Date: 28.NOV.2020 08:55:16



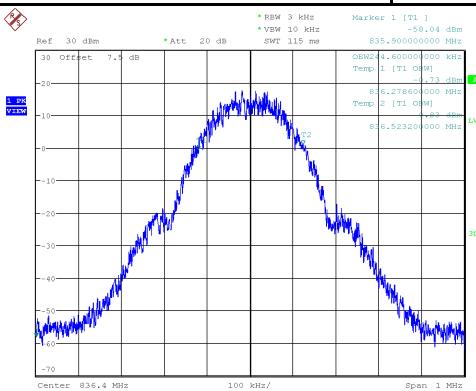


Date: 28.NOV.2020 08:56:11

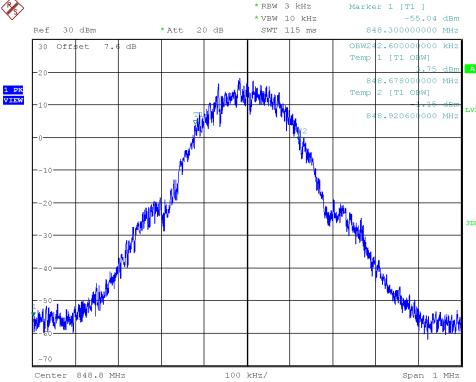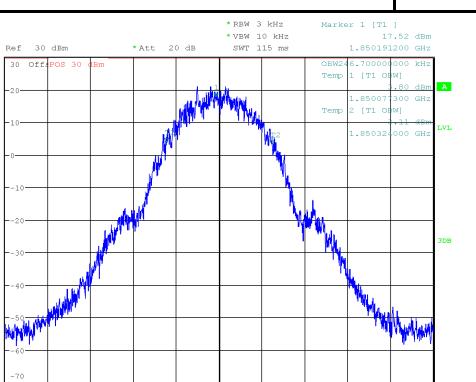
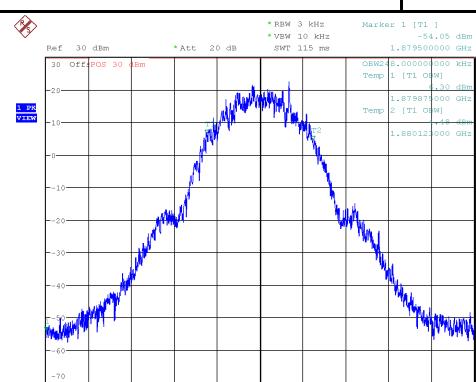
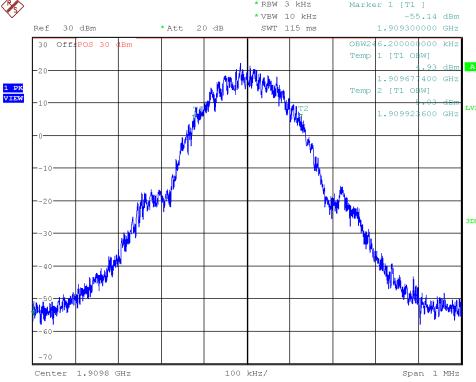
|  |               |  |               |
|--|---------------|--|---------------|
| <p>Channel 251, 848.8MHz,<br/>Occupied Bandwidth (99%)(kHz)</p>  <p>Date: 28.NOV.2020 08:57:06</p>    | <p>242.60</p> | <p>/</p>   |               |
| <p>GSM1900</p>   |               |  |               |
| <p>Channel 512, 1850.2 MHz<br/>Occupied Bandwidth (99%)(kHz)</p>  <p>Date: 28.NOV.2020 08:59:08</p>  | <p>246.70</p> | <p>Channel 661, 1880 MHz<br/>Occupied Bandwidth (99%)(kHz)</p>  <p>Date: 28.NOV.2020 09:00:11</p> | <p>248.00</p> |
| <p>Channel 810, 1909.8 MHz<br/>Occupied Bandwidth (99%)(kHz)</p>  <p>Date: 28.NOV.2020 09:28:27</p> | <p>246.20</p> | <p>/</p>   |               |

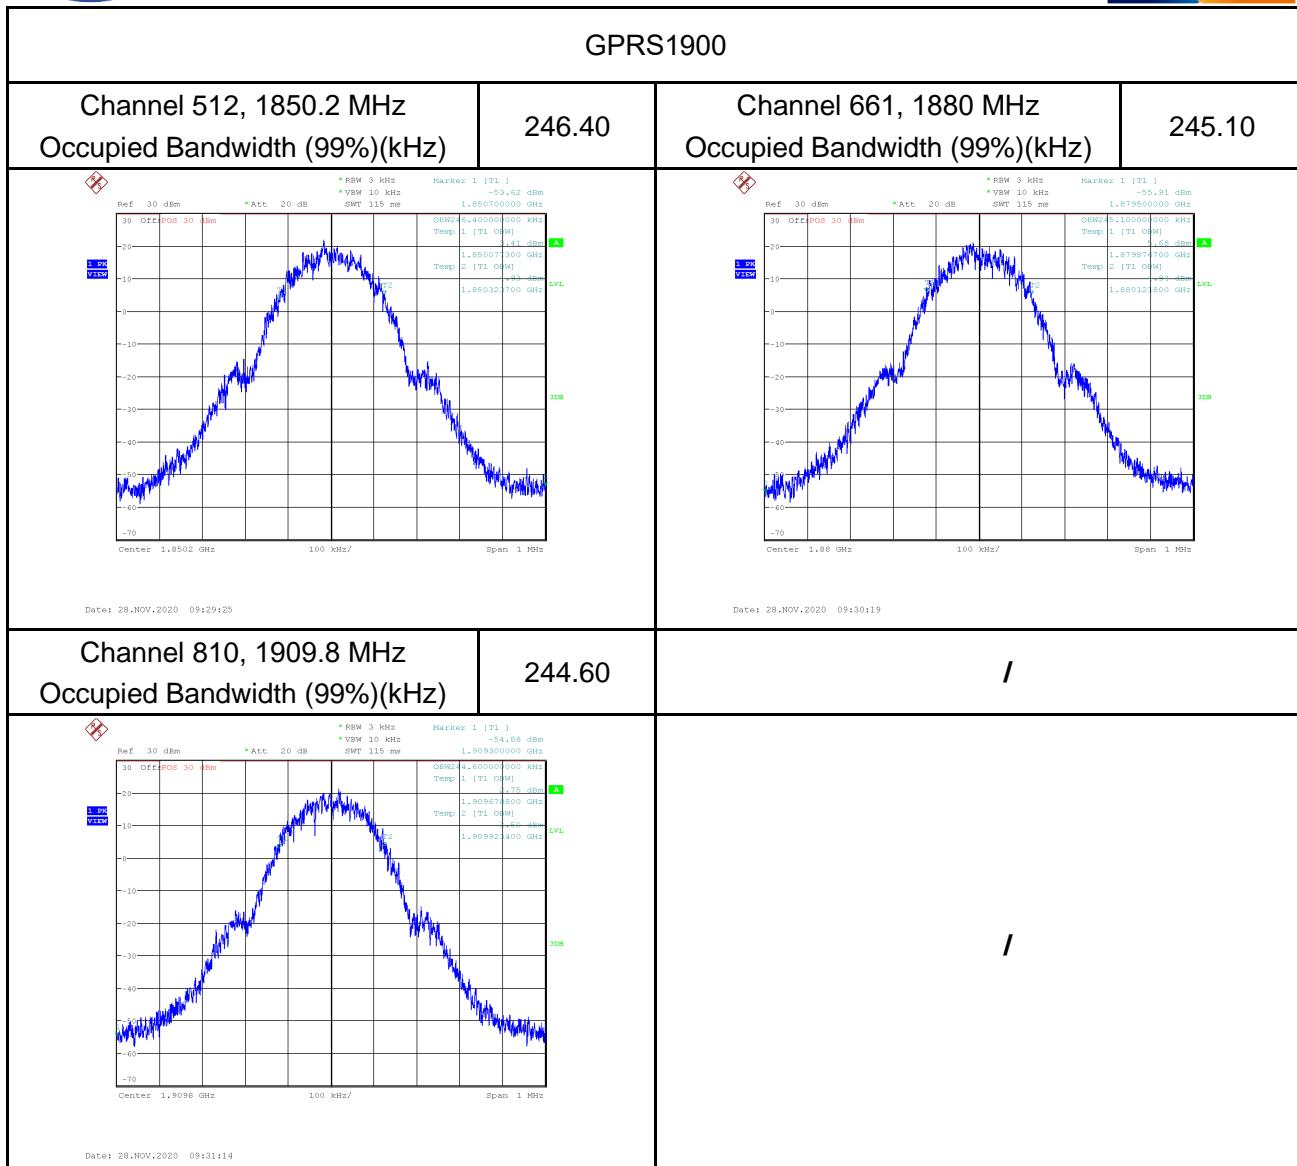




**EDGE1900**
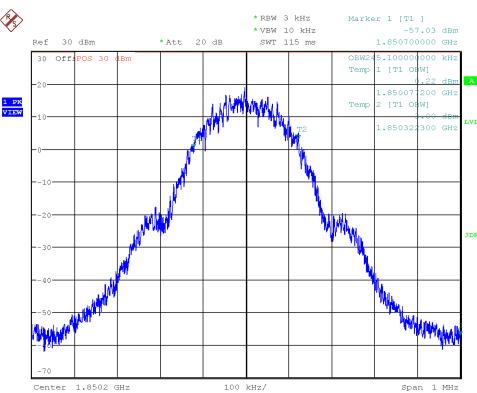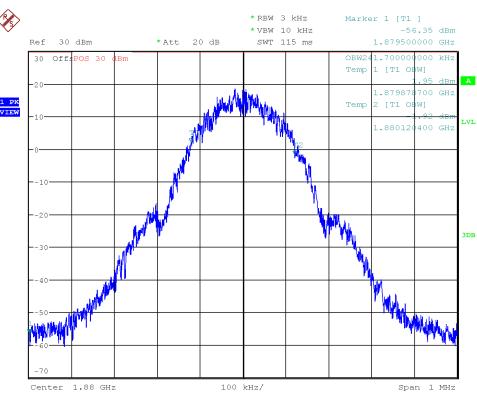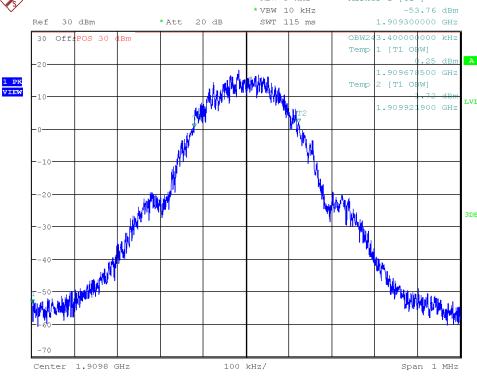
|  |                            |  |                            |
|--|----------------------------|--|----------------------------|
| Channel 512, 1850.2 MHz<br>Occupied Bandwidth (99%)(kHz)                           | 245.10                     | Channel 661, 1880 MHz<br>Occupied Bandwidth (99%)(kHz)                             | 241.70                     |
|   | Date: 28.NOV.2020 09:32:09 |  | Date: 28.NOV.2020 09:33:03 |
| Channel 810, 1909.8 MHz<br>Occupied Bandwidth (99%)(kHz)                           | 243.40                     | /  | /                          |
|  | Date: 28.NOV.2020 09:33:58 | /  | /                          |

## WCDMA BAND II
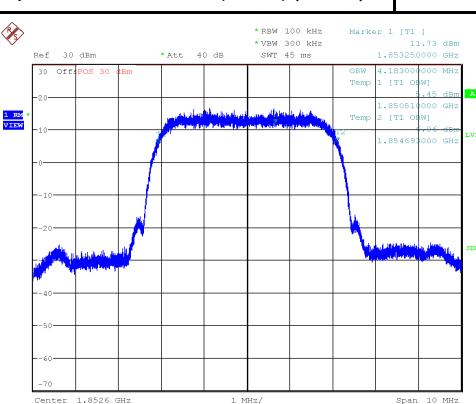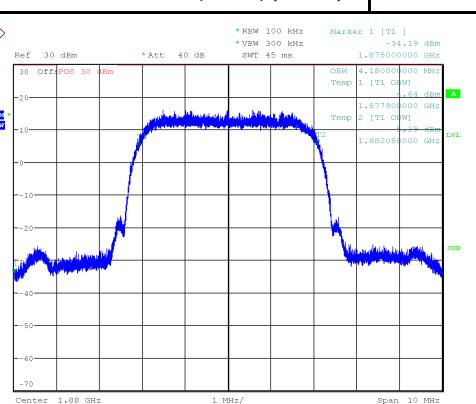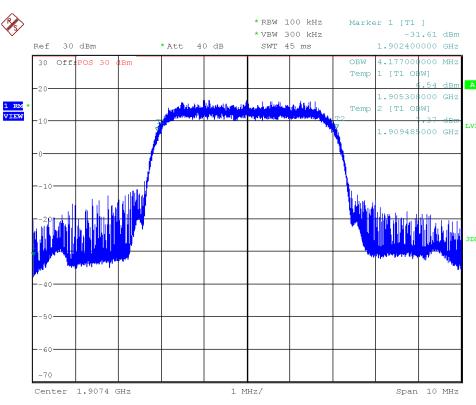
|   |       |   |                  |
|---|-------|---|------------------|
| Channel 9262, 1852.4 MHz<br>Occupied Bandwidth (99%)(MHz)   | 4.183 | Channel 9400, 1880 MHz<br>Occupied Bandwidth (99%)(MHz)   | 4.180            |
| <br><small>Ref 30 dBm * RBW 100 kHz Marker 1 [T1] 11.73 dBm<br/>           Att 40 dB * VBM 300 kHz SMT 45 ms 1.853250000 GHz<br/>           SWR 1.000000000<br/>           Temp 1 [T1 OBM] 1.853250000 GHz<br/>           Temp 2 [T1 OBM] 1.854469000 GHz</small><br><small>Center 1.8526 GHz 1 MHz/ Span 10 MHz</small>   |       | <br><small>Ref 30 dBm * RBW 100 kHz Marker 1 [T1] -34.19 dBm<br/>           Att 40 dB * VBM 300 kHz SMT 45 ms 1.875000000 GHz<br/>           SWR 4.180000000<br/>           Temp 1 [T1 OBM] 1.877981000 GHz<br/>           Temp 2 [T1 OBM] 1.882088000 GHz</small><br><small>Center 1.88 GHz 1 MHz/ Span 10 MHz</small> |                  |
| <small>Date: 28.NOV.2020 12:45:42</small>   |       | <small>Date: 28.NOV.2020 12:46:39</small>   |                  |
| Channel 9538, 1907.6 MHz<br>Occupied Bandwidth (99%)(MHz)   | 4.177 | <small>/</small>  | <small>/</small> |
| <br><small>Ref 30 dBm * RBW 100 kHz Marker 1 [T1] -31.61 dBm<br/>           Att 40 dB * VBM 300 kHz SMT 45 ms 1.900240000 GHz<br/>           SWR 1.000000000<br/>           Temp 1 [T1 OBM] 1.905300000 GHz<br/>           Temp 2 [T1 OBM] 1.909480000 GHz</small><br><small>Center 1.9074 GHz 1 MHz/ Span 10 MHz</small> |       |   |                  |
| <small>Date: 28.NOV.2020 12:47:35</small>   |       |   |                  |

### WCDMA BAND V
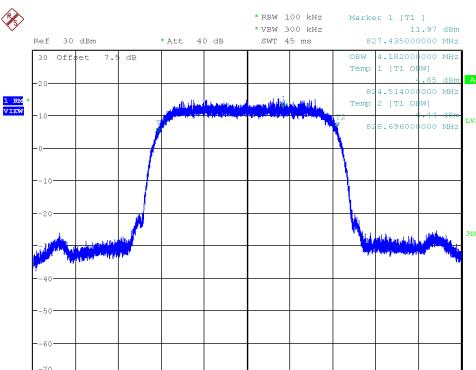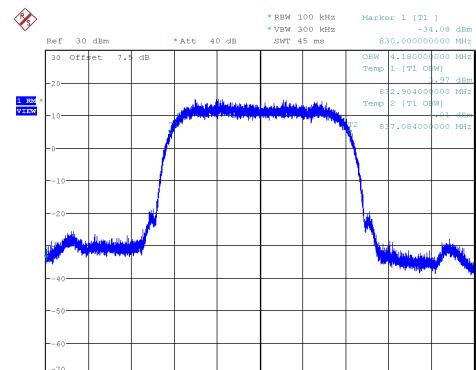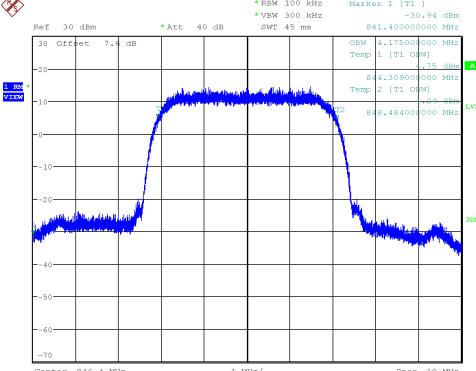
|  |       |  |       |
|--|-------|--|-------|
| Channel 4132, 826.4MHz<br>Occupied Bandwidth (99%)(MHz)  | 4.182 | Channel 4183, 836.6MHz<br>Occupied Bandwidth (99%)(MHz)  | 4.180 |
|  <p>RBW 100 kHz Marker 1 [T1] 11.97 dBm<br/>   VBM 300 kHz 827.435000000 MHz<br/>   SWT 45 ms Temp 1 [T1 OEM] -1.65 dBm T1<br/>   Temp 2 [T1 OEM] 84.514000000 MHz<br/>   84.514000000 MHz<br/>   84.696000000 MHz<br/>   LVL</p>   |       |  <p>RBW 100 kHz Marker 1 [T1] -34.08 dBm<br/>   VBM 300 kHz 830.000000000 MHz<br/>   SWT 45 ms Temp 1 [T1 OEM] -1.97 dBm T1<br/>   Temp 2 [T1 OEM] 82.904000000 MHz<br/>   82.904000000 MHz<br/>   82.904000000 MHz<br/>   LVL</p> |       |
| Date: 28.NOV.2020 12:41:57   |       | Date: 28.NOV.2020 12:42:54   |       |
| Channel 4233, 846.6 MHz<br>Occupied Bandwidth (99%)(MHz)   | 4.175 | /  |       |
|  <p>RBW 100 kHz Marker 1 [T1] -30.94 dBm<br/>   VBM 300 kHz 841.400000000 MHz<br/>   SWT 45 ms Temp 1 [T1 OEM] -1.75 dBm T1<br/>   Temp 2 [T1 OEM] 84.309000000 MHz<br/>   84.309000000 MHz<br/>   84.484000000 MHz<br/>   LVL</p> |       | /  |       |
| Date: 28.NOV.2020 12:43:51   |       |  |       |

## 6.4. -26dB Emission Bandwidth

Method of test please refer to KDB971168 D01 v03 clause 4.0.

### 6.4.1. -26dB Emission Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

### 6.4.2 Test Procedure:




1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW  $\geq$  3 times RBW,.
3. 26dB bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

### 6.4.3 Measurement methods:




For GSM: signal analyzer setting as: RBW=3KHz;VBW=10KHz;Span=1MHz.

For WCDMA: signal analyzer setting as: RBW=50KHz;VBW=200KHz;Span=10MHz.

#### 6.4.4 Test results:
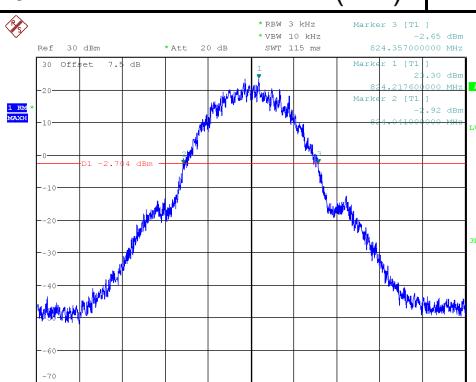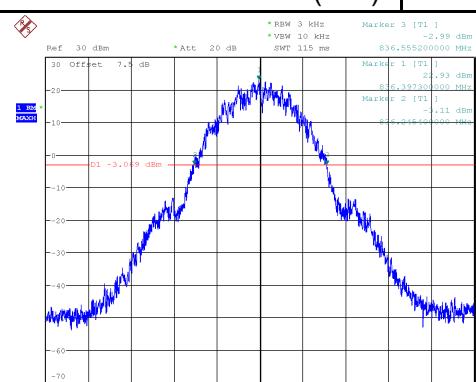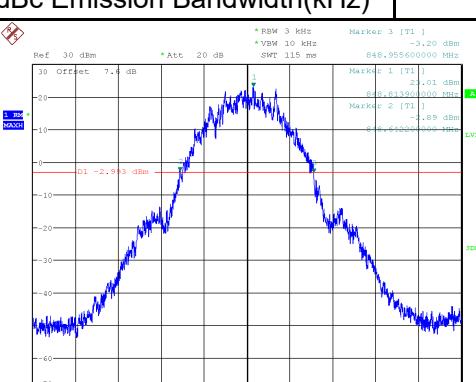
| GSM850   |        |  |        |
|--|--------|--|--------|
| Channel 128, 824.2MHz,<br>-26dBc Emission Bandwidth(kHz)   | 316.00 | Channel 189, 836.4MHz,<br>-26dBc Emission Bandwidth(kHz)   | 310.00 |
|  <p>Date: 28.NOV.2020 11:45:53</p>  |        |  <p>Date: 28.NOV.2020 11:47:04</p> |        |
| Channel 251, 848.8MHz,<br>-26dBc Emission Bandwidth(kHz)   | 313.00 |  | /      |
|  <p>Date: 28.NOV.2020 11:48:16</p> |        |  | /      |






## GPRS850

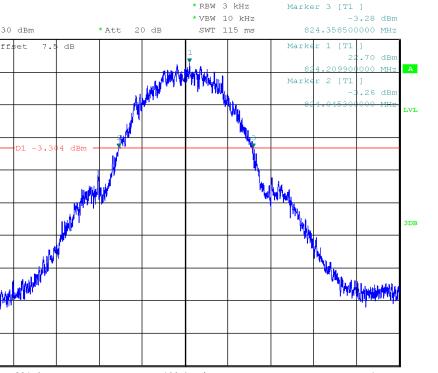
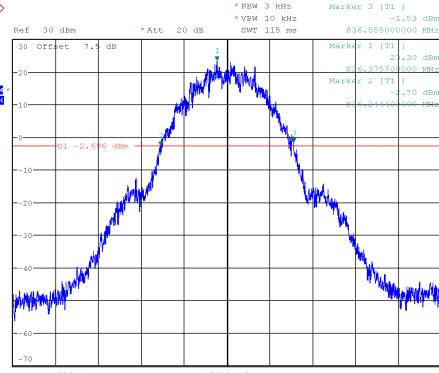
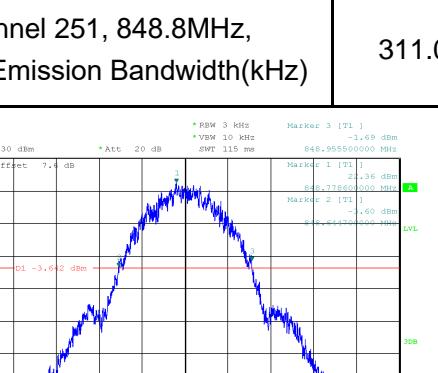
|  |        |  |        |
|--|--------|--|--------|
| Channel 128, 824.2MHz,<br>-26dBc Emission Bandwidth(kHz)                           | 311.00 | Channel 189, 836.4MHz,<br>-26dBc Emission Bandwidth(kHz)                           | 311.00 |
|   |        |  |        |
| Date: 28.NOV.2020 11:49:24   |        | Date: 28.NOV.2020 11:50:26   |        |
| Channel 251, 848.8MHz,<br>-26dBc Emission Bandwidth(kHz)                           | 311.00 |  |        |
|  |        |  |        |
| Date: 28.NOV.2020 11:51:27   |        |  |        |




### EDGE850





|  |        |  |        |
|--|--------|--|--------|
| Channel 128, 824.2MHz,<br>-26dBc Emission Bandwidth(kHz) | 312.00 | Channel 189, 836.4MHz,<br>-26dBc Emission Bandwidth(kHz) | 310.00 |
|  |        |  |        |
| Date: 28.NOV.2020 11:52:29                               |        | Date: 28.NOV.2020 11:53:31                               |        |
| Channel 251, 848.8MHz,<br>-26dBc Emission Bandwidth(kHz) | 314.00 | /  |        |
|  |        | /  |        |
| Date: 28.NOV.2020 11:54:32                               |        |  |        |

### GSM1900
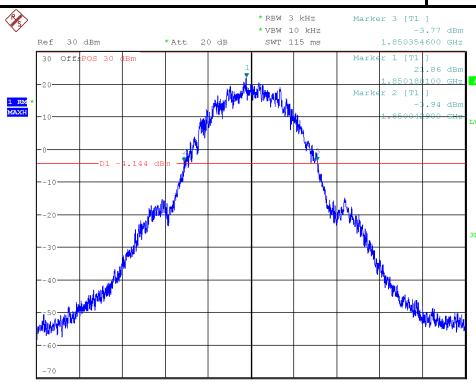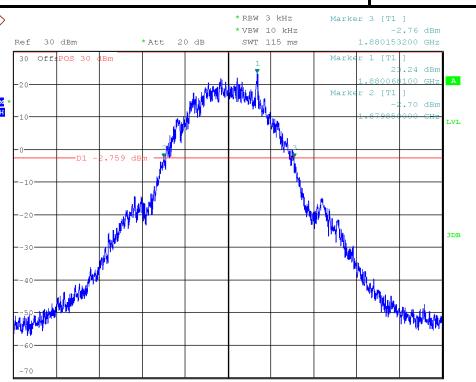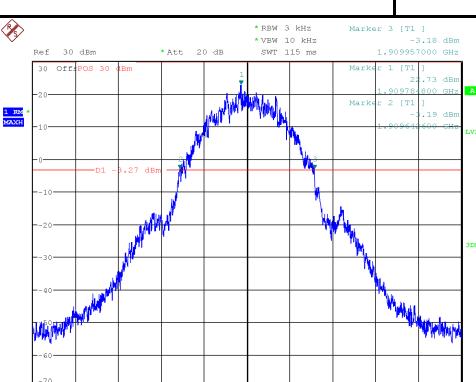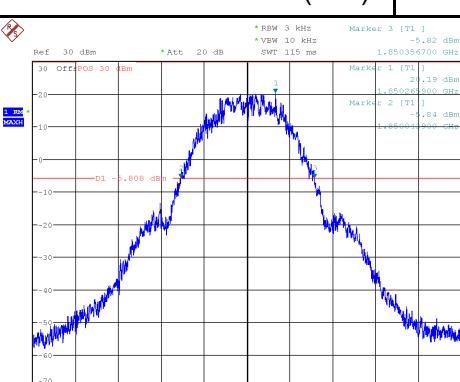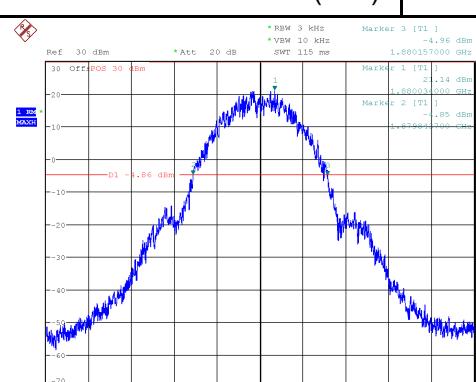
|   |        |  |        |
|---|--------|--|--------|
| Channel 512, 1850.2 MHz<br>-26dBc Emission Bandwidth(kHz)                           | 312.00 | Channel 661, 1880 MHz<br>-26dBc Emission Bandwidth(kHz)                              | 303.00 |
|    |        |    |        |
| Date: 28.NOV.2020 11:27:37  |        | Date: 28.NOV.2020 11:28:54   |        |
| Channel 810, 1909.8 MHz<br>-26dBc Emission Bandwidth(kHz)                           | 314.00 |  | /      |
|   |        |  | /      |
| Date: 28.NOV.2020 11:37:37  |        |  |        |
| <b>GPRS1900</b>   |        |  |        |
| Channel 512, 1850.2 MHz<br>-26dBc Emission Bandwidth(kHz)                           | 313.00 | Channel 661, 1880 MHz<br>-26dBc Emission Bandwidth(kHz)                              | 313.00 |
|  |        |  |        |
| Date: 28.NOV.2020 11:38:45  |        | Date: 28.NOV.2020 11:39:46   |        |
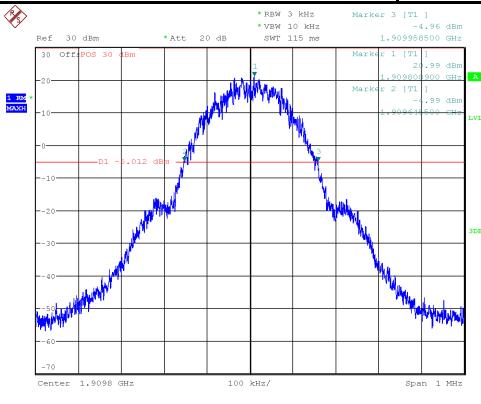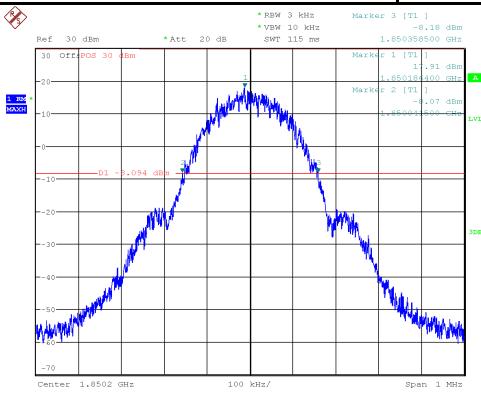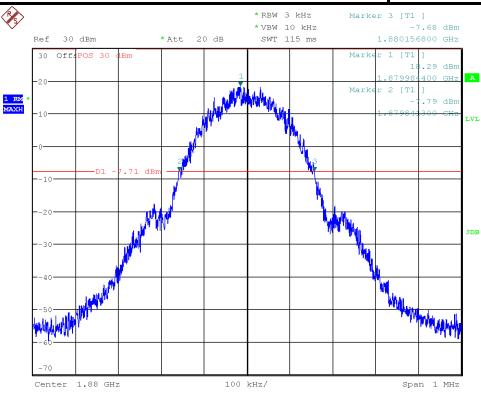
|  |   |   |
|--|---|---|
| Channel 810, 1909.8 MHz<br>-26dBc Emission Bandwidth(kHz)                          | 313.00  | /   |
|   |   |   |
| EDGE 1900  |   |   |
| Channel 512, 1850.2 MHz<br>-26dBc Emission Bandwidth(kHz)                          | 317.00  | Channel 661, 1880 MHz<br>-26dBc Emission Bandwidth(kHz) |
|  |  | 315.00  |
| Date: 28.NOV.2020 11:40:47   |   | Date: 28.NOV.2020 11:42:51                              |
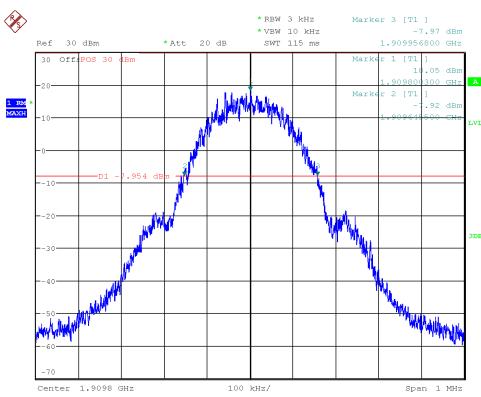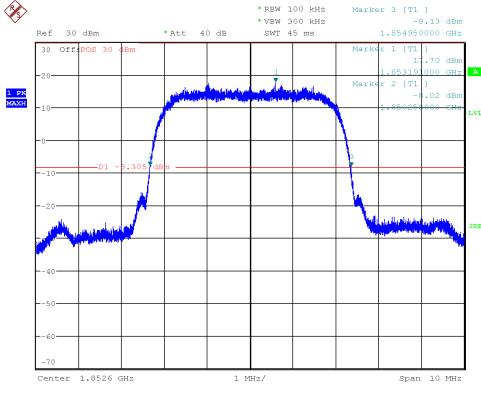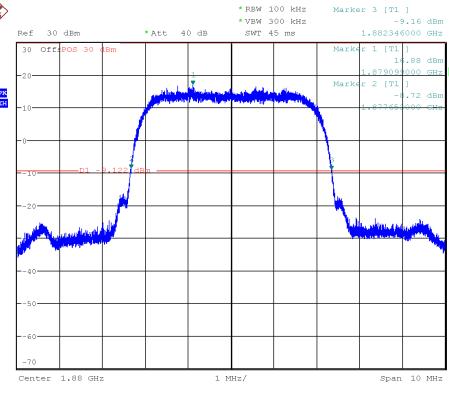
|   |        |  |       |
|---|--------|--|-------|
| Channel 810, 1909.8 MHz<br>-26dBc Emission Bandwidth(kHz)                           | 311.00 | /  |       |
|    |        | /  |       |
| WCDMA BAND II   |        |  |       |
| Channel 9262, 1852.4 MHz<br>-26dBc Emission Bandwidth(MHz)                          | 4.692  | Channel 9400, 1880 MHz<br>-26dBc Emission Bandwidth(MHz)                             |       |
|  | 4.692  |  | 4.693 |
| Date: 28.NOV.2020 11:43:52  |        | Date: 28.NOV.2020 12:50:11   |       |
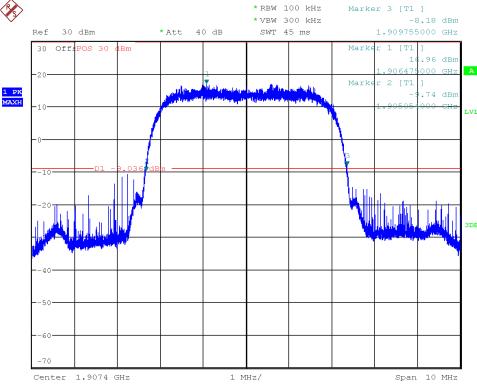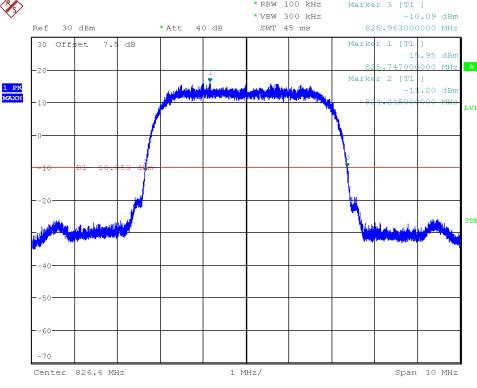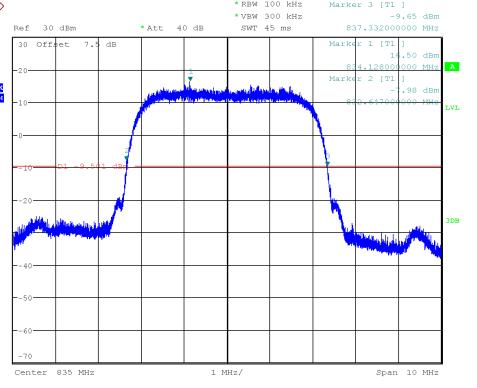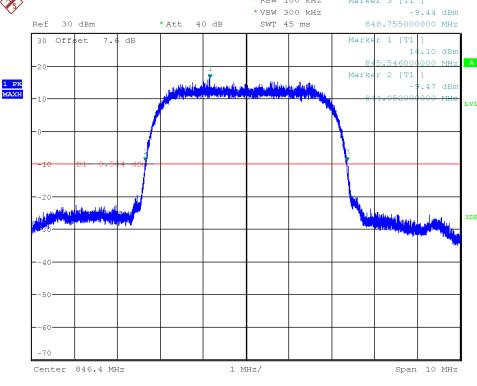
|   |       |  |
|---|-------|--|
| <p>Channel 9538, 1907.6 MHz<br/>-26dBc Emission Bandwidth(MHz)</p>  <p>Date: 28.NOV.2020 12:51:04</p>  | 4.701 | /  |
| WCDMA BAND V  |       |  |
| <p>Channel 4132, 826.4MHz<br/>-26dBc Emission Bandwidth(MHz)</p>  <p>Date: 28.NOV.2020 12:58:47</p>   | 4.718 | <p>Channel 4183, 836.6MHz<br/>-26dBc Emission Bandwidth(MHz)</p>  <p>Date: 28.NOV.2020 12:59:40</p> |
| <p>Channel 4233, 846.6 MHz<br/>-26dBc Emission Bandwidth(MHz)</p>  <p>Date: 28.NOV.2020 13:00:32</p> | 4.703 | /  |

## 6.5 Band Edge at antenna terminals

Method of test measurements please refer to KDB971168 D01 v03 clause 6


### 6.5.1 Limit:

The magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specification in the instruction manual and/or alignment procedure, shall not be less than  $43+10\log$  (Mean power in watts) dBc below the mean power output outside a license's frequency block(-13dBm).

### 6.5.2 Test procedure:


1. The RF output of the transceiver was connected to a signal analyzer through appropriate attenuation.
2. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band
4. The limit line is derived from  $43+10\log(P)$  Db below the transmitter power P(Watts)  
 $=P(W)-[43+10\log(P)](Db)$   
 $=[30+10\log(P)](dBm)-[43+10\log(P)](Db)$   
 $=-13dBm$

### 6.5.3 Test Result:

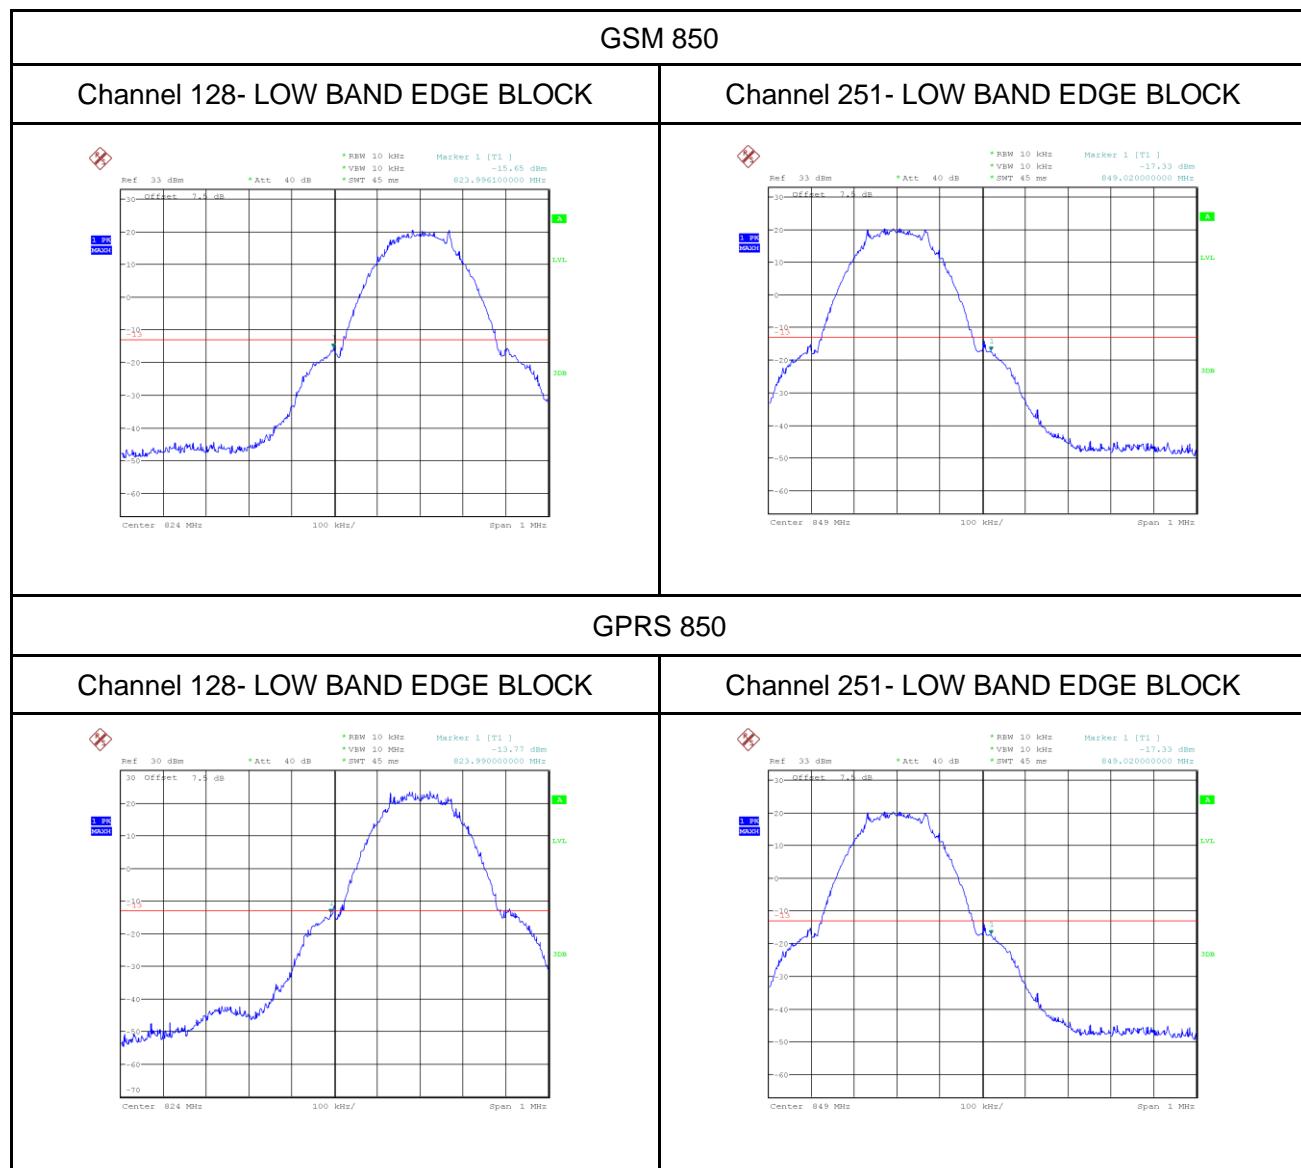


### EDGE 850

#### Channel 128- LOW BAND EDGE BLOCK

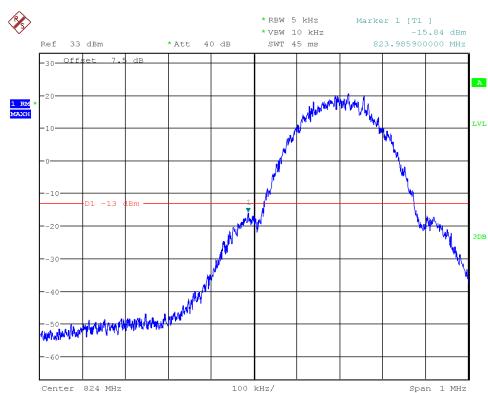


#### Channel 251- LOW BAND EDGE BLOCK

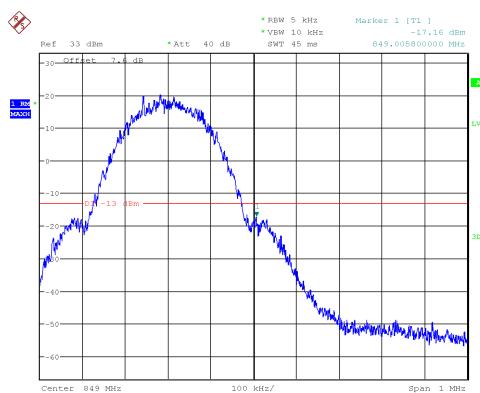


### GSM 1900

#### Channel 512- LOW BAND EDGE BLOCK

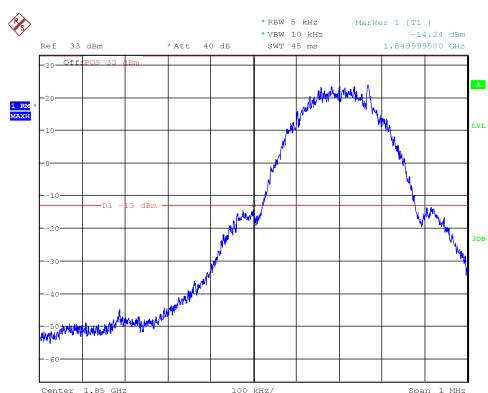


#### Channel 810- LOW BAND EDGE BLOCK

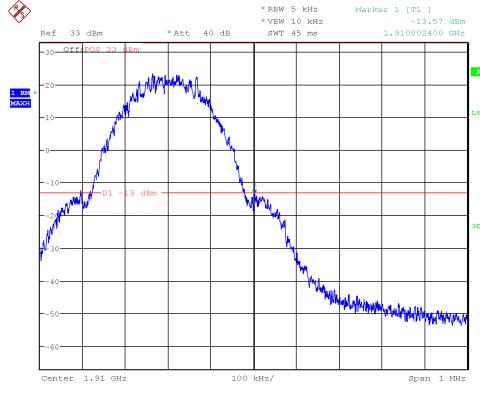


### GPRS1900

#### Channel 512- LOW BAND EDGE BLOCK

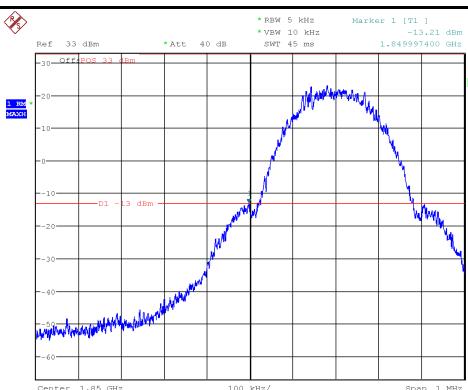


#### Channel 810- LOW BAND EDGE BLOCK

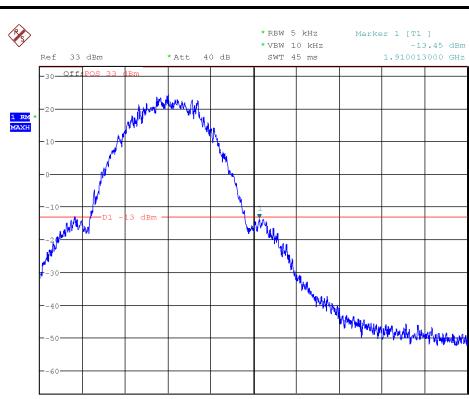


Date: 28.NOV.2020 11:21:26

### EDGE1900

#### Channel 512- LOW BAND EDGE BLOCK

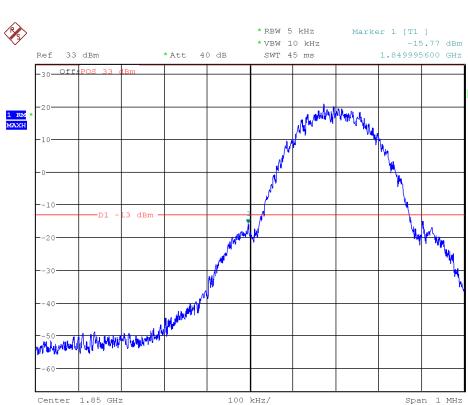


#### Channel 810- LOW BAND EDGE BLOCK

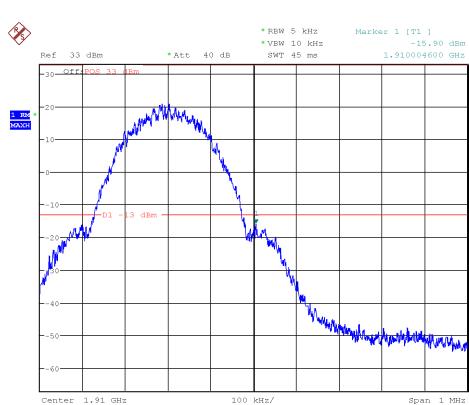


Date: 28.NOV.2020 11:25:32

### WCDMA BAND II

#### Channel 9262- LOW BAND EDGE BLOCK

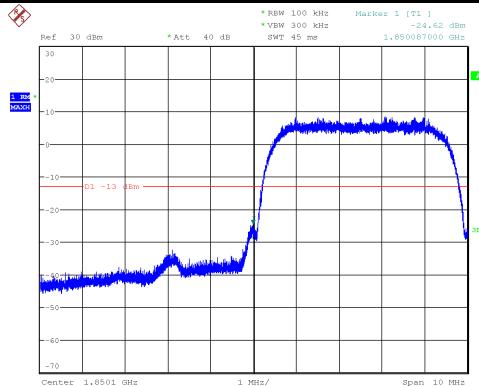


#### Channel 9538- HIGH BAND EDGE BLOCK

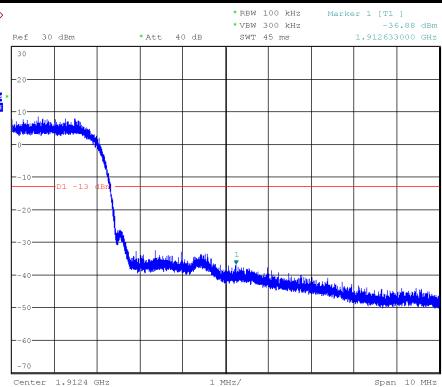

Date: 28.NOV.2020 13:41:12


### WCDMA BAND V

#### Channel 4132- LOW BAND EDGE BLOCK

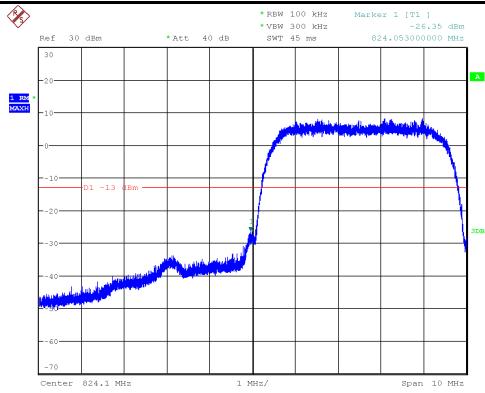

Date: 28.NOV.2020 13:38:33

#### Channel 4233- HIGH BAND EDGE BLOCK

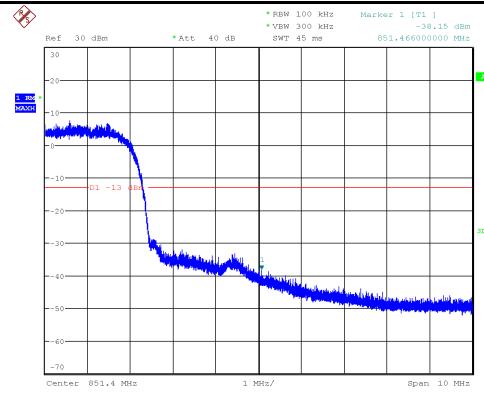

Date: 28.NOV.2020 13:42:11

## 6.6. FREQUENCY STABILITY

Method of test measurements please refer to KDB971168 D01 v03 clause 9

### 6.6.1. Method of Measurement and test procedures

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of GSM850, PCS1900, WCDMA BANDII, WCDMA BANDIV and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 6.6.2. Measurement Limit

#### 6.6.2.1. For Hand carried battery powered equipment

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages was varied from 85% to 115%.

### 6.6.2.2. For equipment powered by primary supply voltage

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

### 6.6.3 Test results

**GSM850Mid Channel/fc(MHz) 189/836.4**

#### Frequency Error VS Temperature

| Power Supply (VDc) | Environment Temperature(°C) | Frequency error(Hz) | Limit (Hz) |
|--------------------|-----------------------------|---------------------|------------|
| 3.80               | -30                         | -2.26               | 84         |
| 3.80               | -20                         | -2.45               | 84         |
| 3.80               | -10                         | 3.00                | 84         |
| 3.80               | 0                           | 7.72                | 84         |
| 3.80               | 10                          | 1.03                | 84         |
| 3.80               | 20                          | 4.04                | 84         |
| 3.80               | 30                          | 2.71                | 84         |
| 3.80               | 40                          | -0.36               | 84         |
| 3.80               | 50                          | 4.23                | 84         |

#### Frequency Error VS Voltage

| Power Supply (VDc) | Environment Temperature(°C) | Frequency error(Hz) | Limit (Hz) |
|--------------------|-----------------------------|---------------------|------------|
| 3.60               | 25                          | 4.20                | 84         |
| 3.80               | 25                          | 1.58                | 84         |
| 4.35               | 25                          | 2.65                | 84         |

PCS1900 Mid Channel/fc(MHz) 661/1880

**Frequency Error VS Temperature**

| Power Supply<br>(VDc) | Environment<br>Temperature(°C) | Frequency error(Hz) | Limit<br>(Hz) |
|-----------------------|--------------------------------|---------------------|---------------|
| 3.80                  | -30                            | 15.85               | 196           |
| 3.80                  | -20                            | 15.43               | 196           |
| 3.80                  | -10                            | 30.19               | 196           |
| 3.80                  | 0                              | 19.08               | 196           |
| 3.80                  | 10                             | 21.34               | 196           |
| 3.80                  | 20                             | 19.08               | 196           |
| 3.80                  | 30                             | 21.34               | 196           |
| 3.80                  | 40                             | 14.30               | 196           |
| 3.80                  | 50                             | 21.37               | 196           |

**Frequency Error VS Voltage**

| Power Supply<br>(VDc) | Environment<br>Temperature(°C) | Frequency error(Hz) | Limit<br>(Hz) |
|-----------------------|--------------------------------|---------------------|---------------|
| 3.60                  | 25                             | 16.59               | 196           |
| 3.80                  | 25                             | 18.05               | 196           |
| 4.35                  | 25                             | 16.24               | 196           |

**WCDMA BAND II Mid Channel/fc(MHz) 9400 /1880**
**Frequency Error VS Temperature**

| Power Supply (VDc) | Environment Temperature(°C) | Frequency error(Hz) | Limit (Hz) |
|--------------------|-----------------------------|---------------------|------------|
| 3.80               | -30                         | -14.691             | 4700       |
| 3.80               | -20                         | -8.833              | 4700       |
| 3.80               | -10                         | -17.338             | 4700       |
| 3.80               | 0                           | -10.114             | 4700       |
| 3.80               | 10                          | -18.461             | 4700       |
| 3.80               | 20                          | -8.519              | 4700       |
| 3.80               | 30                          | -15.793             | 4700       |
| 3.80               | 40                          | -11.265             | 4700       |
| 3.80               | 50                          | -5.300              | 4700       |

**Frequency Error VS Voltage**

| Power Supply (VDc) | Environment Temperature(°C) | Frequency error(Hz) | Limit (Hz) |
|--------------------|-----------------------------|---------------------|------------|
| 3.60               | 25                          | -12.181             | 4700       |
| 3.80               | 25                          | -8.254              | 4700       |
| 4.35               | 25                          | -12.875             | 4700       |

WCDMA BAND V Mid Channel/fc(MHz) 4183/836.6

**Frequency Error VS Temperature**

| Power Supply (VDc) | Environment Temperature(°C) | Frequency error(Hz) | Limit (Hz) |
|--------------------|-----------------------------|---------------------|------------|
| 3.80               | -30                         | -4.749              | 2091.5     |
| 3.80               | -20                         | -5.429              | 2091.5     |
| 3.80               | -10                         | -6.938              | 2091.5     |
| 3.80               | 0                           | -9.048              | 2091.5     |
| 3.80               | 10                          | -10.443             | 2091.5     |
| 3.80               | 20                          | -11.251             | 2091.5     |
| 3.80               | 30                          | -8.147              | 2091.5     |
| 3.80               | 40                          | -11.108             | 2091.5     |
| 3.80               | 50                          | -5.572              | 2091.5     |

**Frequency Error VS Voltage**

| Power Supply (VDc) | Environment Temperature(°C) | Frequency error(Hz) | Limit (Hz) |
|--------------------|-----------------------------|---------------------|------------|
| 3.60               | 25                          | -9.52               | 2091.5     |
| 3.80               | 25                          | -4.549              | 2091.5     |
| 4.35               | 25                          | -2.496              | 2091.5     |

## 6.7. CONDUCTED SPURIOUS EMISSION

### 6.7.1. GSM Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:

The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;Get the result.

4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### GSM 850 Transmitter

| Channel | Frequency (MHz) |
|---------|-----------------|
| 128     | 824.2           |
| 189     | 836.4           |
| 251     | 848.8           |

#### PCS 1900 Transmitter

| Channel | Frequency (MHz) |
|---------|-----------------|
| 512     | 1850.2          |
| 661     | 1880.0          |
| 810     | 1909.8          |

### 6.7.1.1. Measurement Limit


Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


### 6.7.1.2. Measurement result

**Spurious emission limit -13dBm.**

**Note: peak above the limit line is the carrier frequency.**

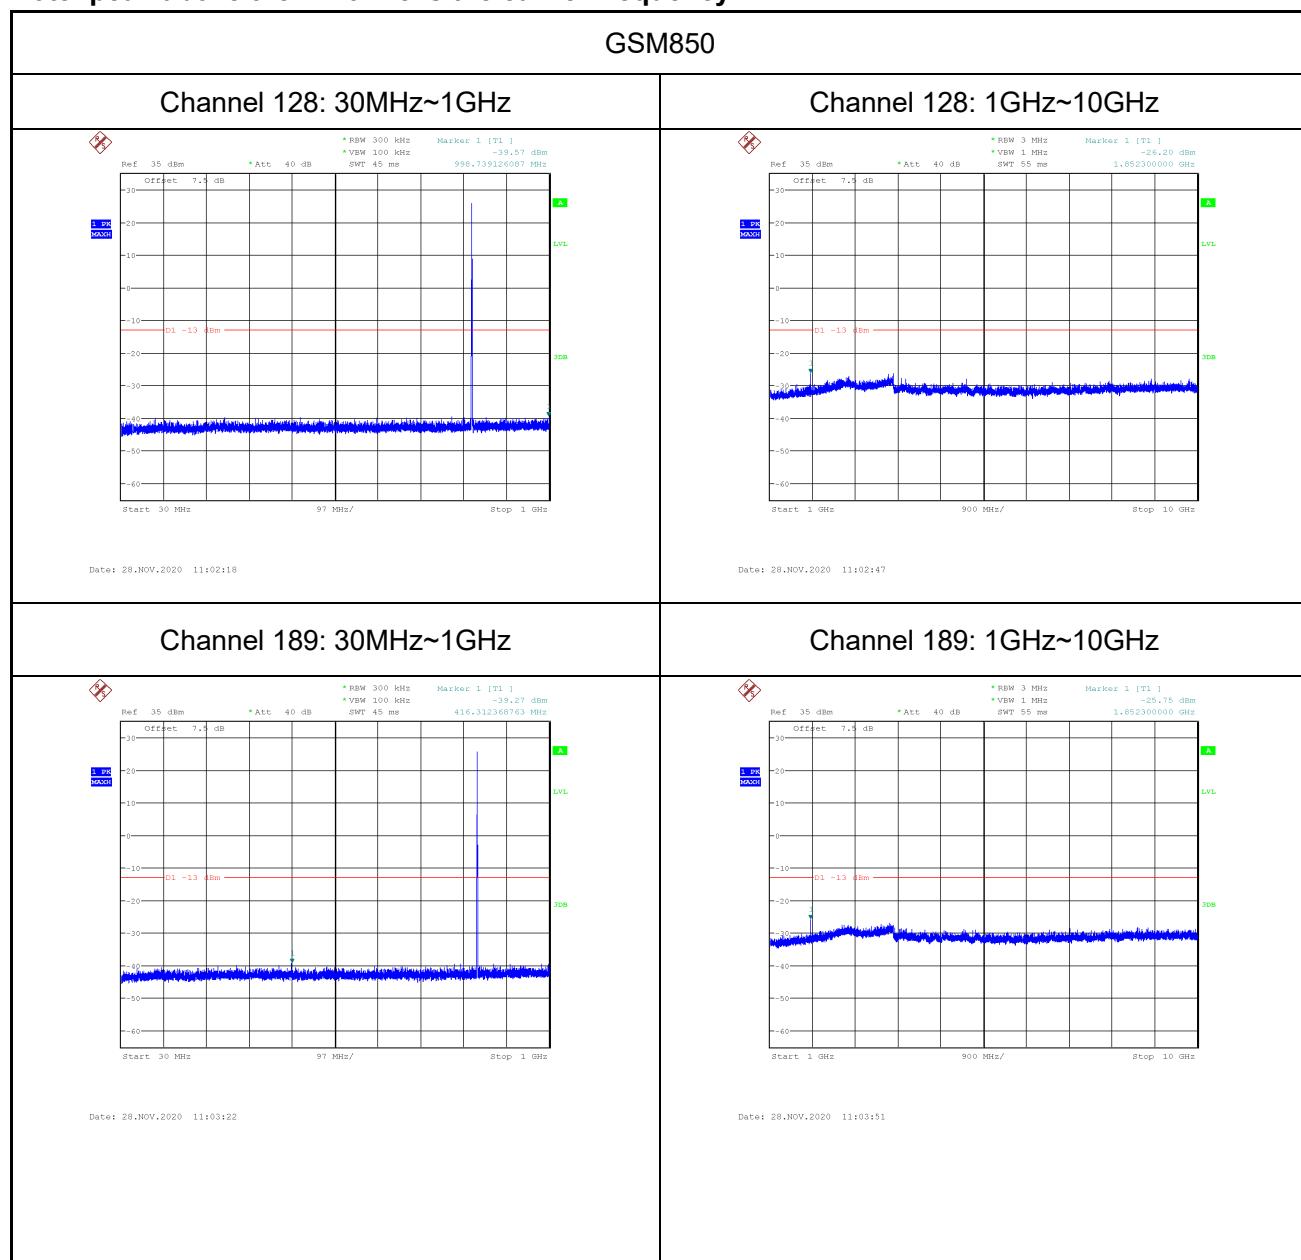

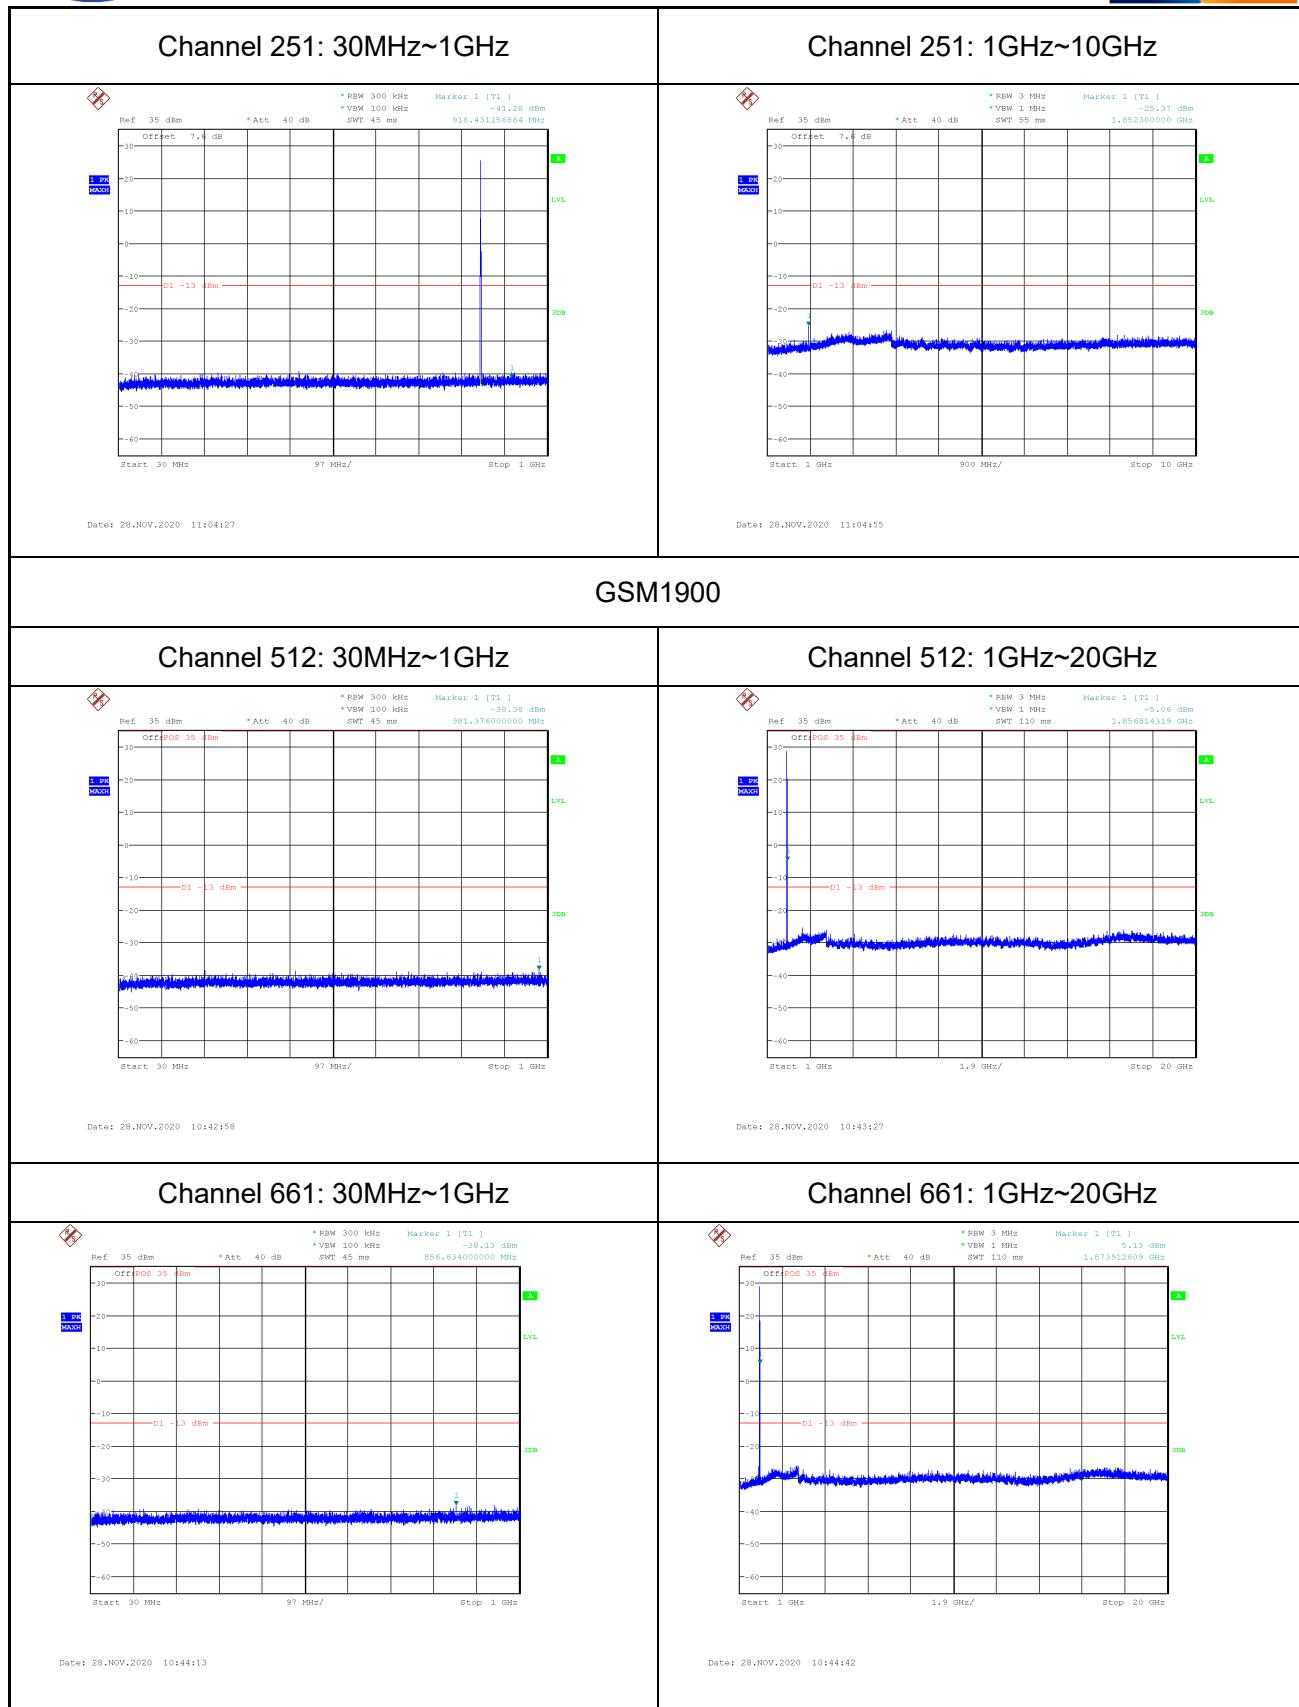

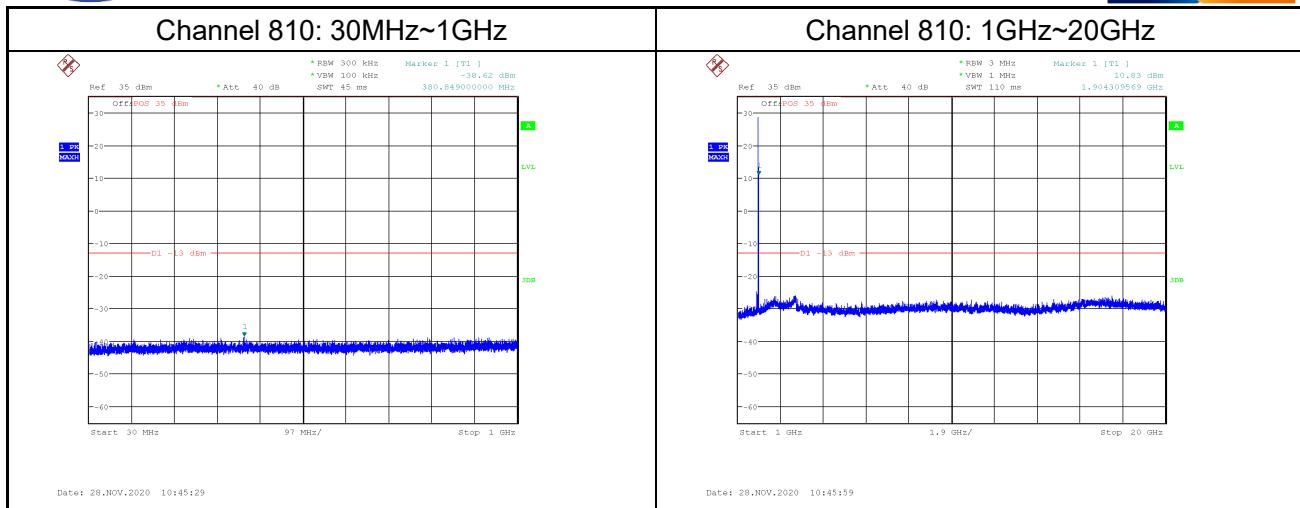

### 6.7.2. WCDMA Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II and WCDMA BANDIV, these equate to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.

2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.

3. The procedure to get the conducted spurious emission is as follows:

The trace mode is set to MaxHold to get the highest signal at each frequency;

Wait 25 seconds;

Get the result.

4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**WCDMA Band II Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 9262    | 1852.40         |
| 9400    | 1880.00         |
| 9538    | 1907.60         |

**WCDMA Band V Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 4132    | 826.40          |
| 4183    | 836.60          |
| 4233    | 846.60          |

**6.7.2.1. Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


**6.7.2.2. Measurement result**

**Spurious emission limit -13dBm.**


**Note: peak above the limit line is the carrier frequency.**

## WCDMA Band II


### Channel 9262: 30MHz~1GHz

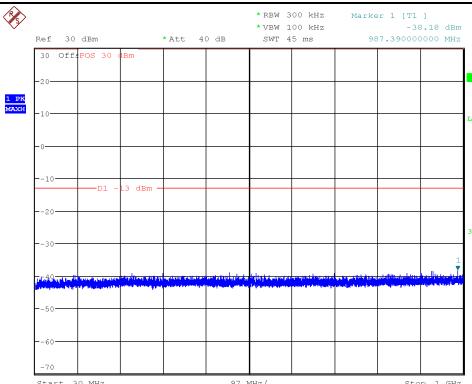


### Channel 9262: 1GHz~20GHz

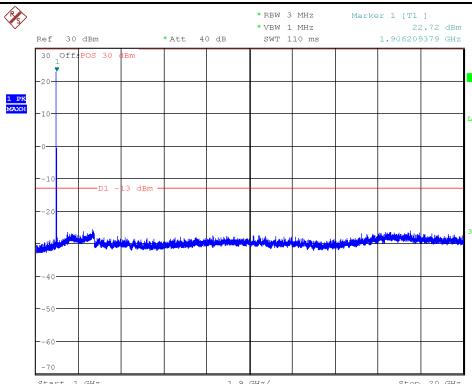


### Channel 9400: 30MHz~1GHz

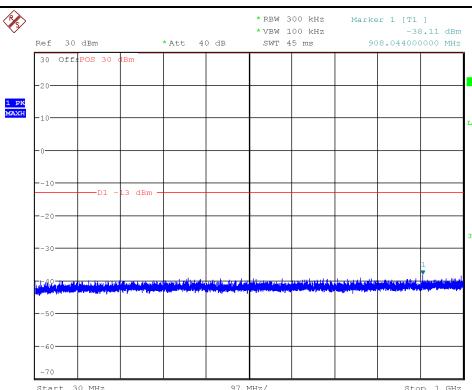


### Channel 9400: 1GHz~20GHz

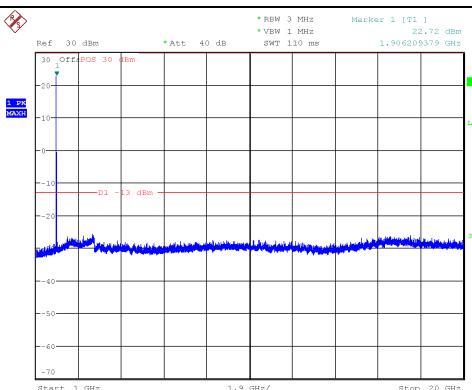

### Channel 9538: 30MHz~1GHz

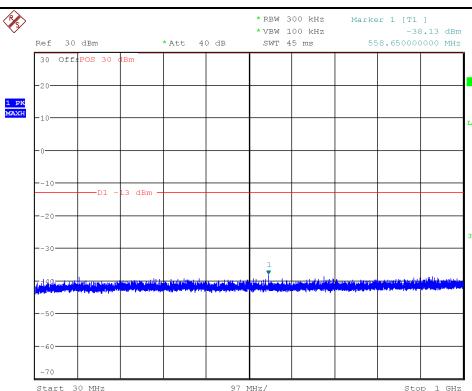


### Channel 9538: 1GHz~20GHz

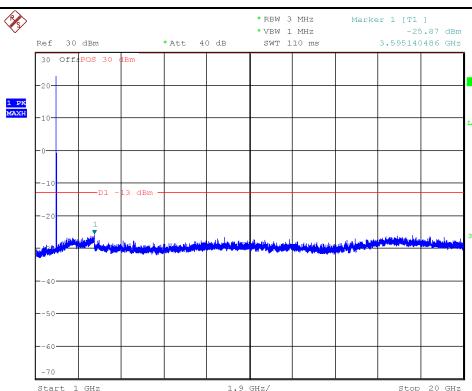


### WCDMA Band V

#### Channel 4133: 30MHz~1GHz

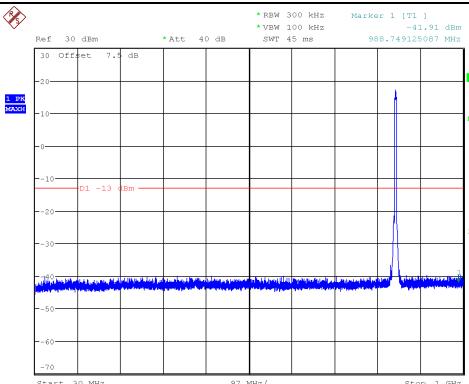


Date: 28.NOV.2020 13:02:21

#### Channel 4133: 1GHz~10GHz

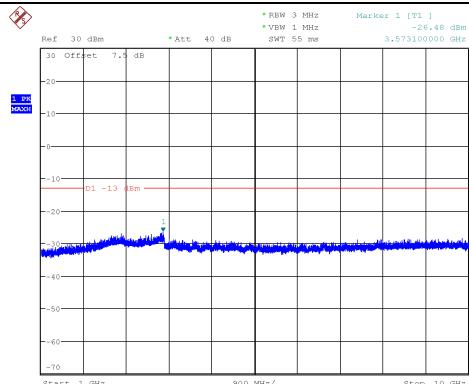


Date: 28.NOV.2020 13:03:09

#### Channel 4175: 30MHz~1GHz

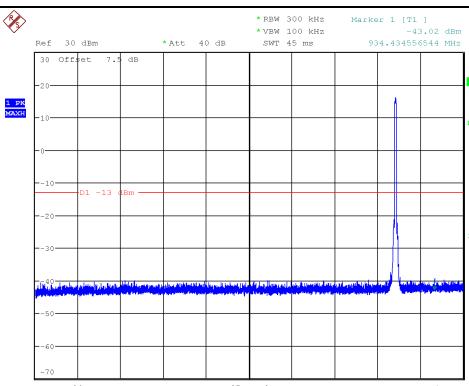


Date: 28.NOV.2020 13:04:06

#### Channel 4175: 1GHz~10GHz

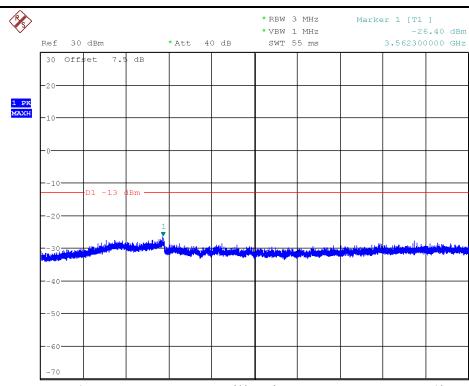


Date: 28.NOV.2020 13:04:54

#### Channel 4232: 30MHz~1GHz

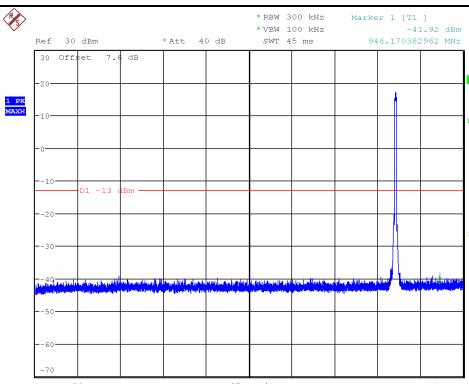

Date: 28.NOV.2020 13:05:50

#### Channel 4232: 1GHz~10GHz

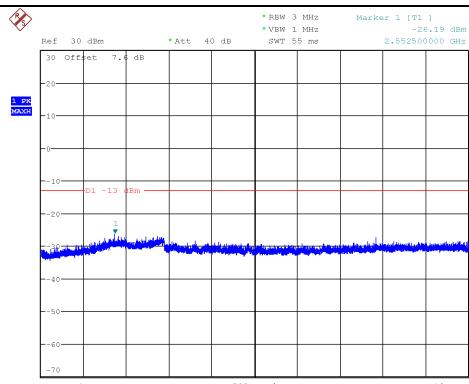

Date: 28.NOV.2020 13:06:39

## 6.8. RADIATED

### 6.8.1. EIRP

#### 6.8.1.1. GSM EIRP

##### 6.8.1.1.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

##### 6.8.1.1.2. Method of Measurement

The measurements procedures in TIA-603E-2016 are used.


1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

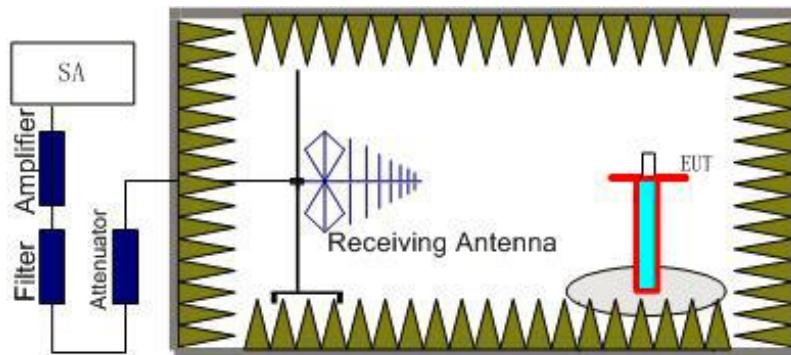

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test.

And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

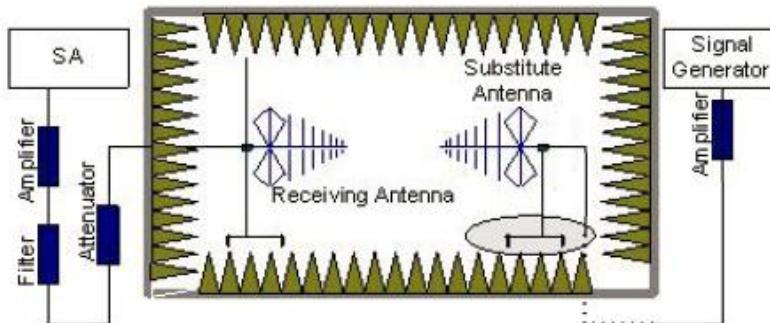

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the

substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connected between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

#### 6.8.1.1.3 GSM 850-ERP 22.913(a)

##### 6.8.1.1.3.1 Limits

|      | Power Step | Burst Peak ERP (dBm)        |
|------|------------|-----------------------------|
| GSM  | 5          | $\leq 38.45\text{dBm}$ (7W) |
| GPRS | 3          | $\leq 38.45\text{dBm}$ (7W) |
| EDGE | 6          | $\leq 38.45\text{dBm}$ (7W) |

##### 6.8.1.1.3.2 Measurement result

###### GSM(GMSK)

| Frequency(MHz) | Peak ERP (dBm) | Polarization |
|----------------|----------------|--------------|
| 824.2          | 28.25          | H            |
| 836.6          | 28.45          | H            |
| 848.8          | 28.45          | H            |

###### GPRS(GMSK)

| Frequency(MHz) | Peak ERP (dBm) | Polarization |
|----------------|----------------|--------------|
| 824.2          | 28.25          | H            |
| 836.6          | 28.45          | H            |
| 848.8          | 28.45          | H            |

| Frequency(MHz) | Peak EIRP<br>(dBm) | Polarization |
|----------------|--------------------|--------------|
| 824.2          | 27.45              | H            |
| 836.6          | 27.7               | H            |
| 848.8          | 27.78              | H            |

**6.8.1.1.4 PCS 1900-EIRP 24.232(c)**
**6.8.1.1.4.1 Limits**

|      | <b>Power Step</b> | <b>Burst Peak EIRP (dBm)</b> |
|------|-------------------|------------------------------|
| GSM  | 5                 | ≤33dBm (2W)                  |
| GPRS | 3                 | ≤33dBm (2W)                  |
| EDGE | 6                 | ≤33dBm (2W)                  |

**6.8.1.1.4.2 Measurement result**
**GSM (GMSK)**

| Frequency(MHz) | Peak EIRP<br>(dBm) | Polarization |
|----------------|--------------------|--------------|
| 1850.2         | 26.2               | V            |
| 1880.0         | 26.5               | H            |
| 1909.8         | 26.8               | V            |

**GPRS (GMSK)**

| Frequency(MHz) | Peak EIRP<br>(dBm) | Polarization |
|----------------|--------------------|--------------|
| 1850.2         | 26.2               | V            |
| 1880.0         | 26.5               | H            |
| 1909.8         | 26.8               | V            |

| Frequency(MHz) | Peak EIRP (dBm) | Polarization |
|----------------|-----------------|--------------|
| 1850.2         | 24.93           | V            |
| 1880.0         | 25.24           | H            |
| 1909.8         | 25.59           | V            |

### 6.8.1.2. WCDMA EIRP

#### 6.8.1.2.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. "Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

#### 6.8.1.2.2. Method of Measurement


The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

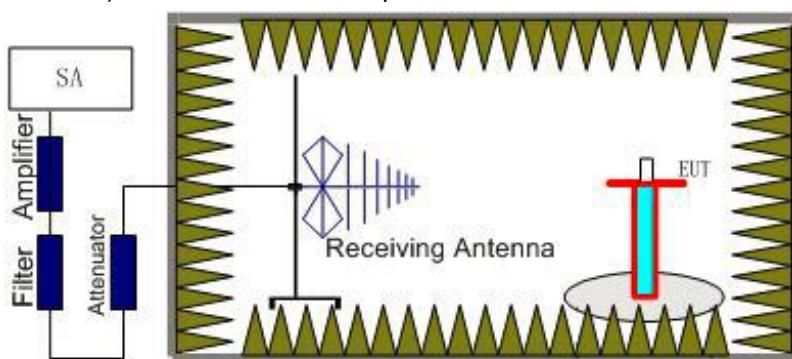

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

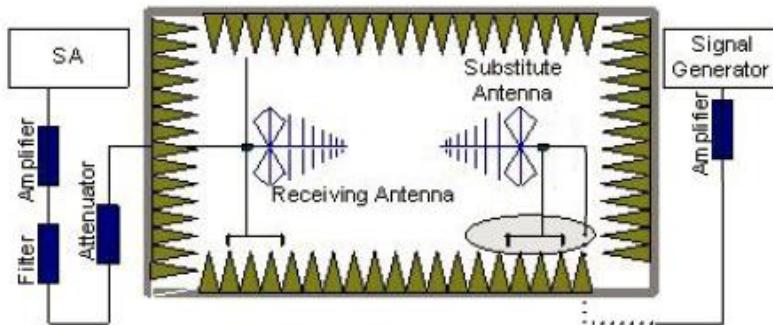

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

#### 6.8.1.2.3 WCDMA Band II-EIRP Limits

|               | Burst Peak EIRP (dBm)    |
|---------------|--------------------------|
| WCDMA Band II | $\leq 33\text{dBm (2W)}$ |

#### 6.8.1.2.3.1 Measurement result

| Frequency (MHz) | Peak EIRP (dBm) | Polarization |
|-----------------|-----------------|--------------|
| 1852.4          | 20.84           | V            |
| 1880.0          | 20.91           | H            |
| 1907.6          | 20.97           | V            |

#### 6.8.1.2.4 WCDMA Band V-ERP Limits

|              | Burst Peak ERP (dBm) |
|--------------|----------------------|
| WCDMA Band V | ≤38.45dBm (7W)       |

##### 6.8.1.2.4.1 Measurement result

| Frequency(MHz) | Peak ERP (dBm) | Polarization |
|----------------|----------------|--------------|
| 826.4          | 19.04          | H            |
| 836.6          | 19.18          | H            |
| 846.6          | 19.02          | H            |

Note: the EUT was displayed in several different direction, the worst cases were shown.

## 6.8.2 EMISSION LIMIT (§2.1051/§22.917§24.238)


### 6.8.2.1 GSM Measurement Method

The measurement procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

### 6.8.2.2 The procedure of radiated spurious emissions is as follows:

1. Below 1 GHz, EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10<sup>th</sup> harmonic were measured with peak detector.

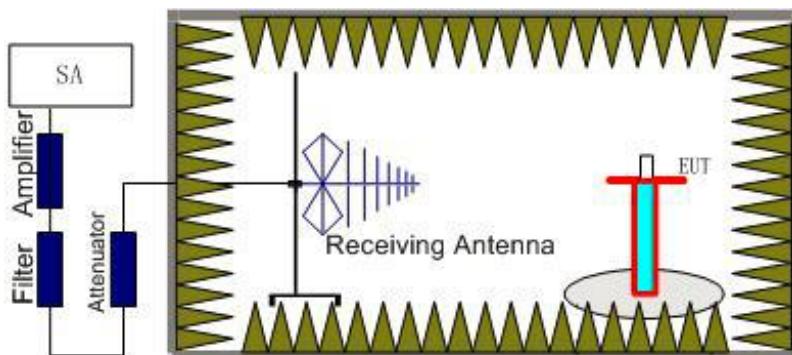

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

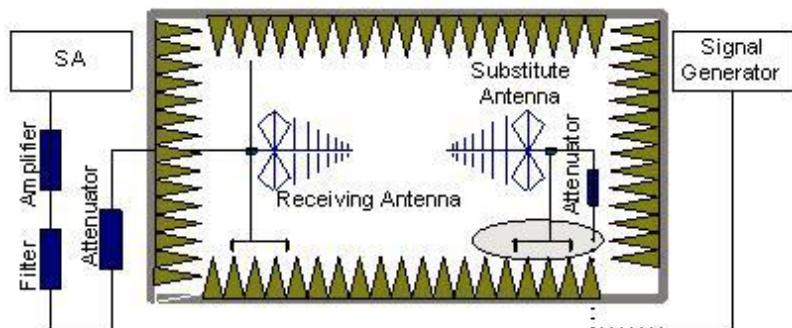

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss .

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$

#### **6.8.2.3 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### **6.8.2.4 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### 6.8.2.5 Measurement Results

#### Measurements results:

| Frequency | Channel | Frequency Range | Result |
|-----------|---------|-----------------|--------|
| GSM850    | Low     | 30MHz~10GHz     | P      |
|           | Middle  | 30MHz~10GHz     | P      |
|           | High    | 30MHz~10GHz     | P      |
| GSM1900   | Low     | 30MHz~20GHz     | P      |
|           | Middle  | 30MHz~20GHz     | P      |
|           | High    | 30MHz~20GHz     | P      |

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1647.9          | -41.78     | 4.3       | 2.9      | -43.18          | -13         | V            |
| 2460.0          | -36.37     | 5.3       | 3.7      | -37.97          | -13         | V            |
| 3295.4          | -48.53     | 6.2       | 4.7      | -50.03          | -13         | V            |
| 4119.2          | -49.59     | 7.0       | 7.7      | -48.89          | -13         | V            |
| 4933.8          | -46.38     | 7.7       | 9.0      | -45.08          | -13         | V            |
| 5769.2          | -50.03     | 8.5       | 10.5     | -48.03          | -13         | H            |

**GSM850 CH 189**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.5          | -38.94     | 4.3       | 2.9      | -40.34          | -13         | H            |
| 2510.4          | -31.35     | 5.4       | 3.7      | -33.05          | -13         | V            |
| 3346.2          | -45.46     | 6.2       | 4.7      | -46.96          | -13         | V            |
| 4182.7          | -43.59     | 7.0       | 7.7      | -42.89          | -13         | H            |
| 5020.4          | -46.18     | 7.8       | 9.0      | -44.98          | -13         | V            |
| 5850.0          | -50.26     | 8.4       | 10.5     | -48.16          | -13         | H            |

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1697.1          | -41.49     | 4.4       | 2.9      | -42.99          | -13         | V            |
| 2547.9          | -35.94     | 5.4       | 3.7      | -37.64          | -13         | V            |
| 3395.8          | -48.13     | 6.3       | 4.7      | -49.73          | -13         | H            |
| 4245.0          | -49.13     | 7.1       | 7.7      | -48.53          | -13         | H            |
| 5093.1          | -44.56     | 7.9       | 9.0      | -43.46          | -13         | V            |
| 5943.5          | -48.11     | 8.5       | 10.4     | -46.21          | -13         | V            |

**GPRS 850 CH128**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1286.9          | -22.6      | 3.9       | 2.0      | -24.5           | -13         | V            |
| 2761.1          | -33.12     | 5.7       | 4.1      | -34.72          | -13         | H            |
| 3574.6          | -43        | 6.4       | 4.7      | -44.7           | -13         | H            |
| 4547.3          | -47        | 7.4       | 7.3      | -47.1           | -13         | H            |
| 5553.5          | -49.43     | 8.2       | 9.5      | -48.13          | -13         | V            |
| 6170.8          | -48.12     | 8.7       | 10.8     | -46.02          | -13         | H            |

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.5          | -42.66     | 4.3       | 2.9      | -44.06          | -13         | V            |
| 2573.6          | -35.95     | 5.4       | 3.7      | -37.65          | -13         | H            |
| 3168.5          | -46.55     | 6.0       | 4.7      | -47.85          | -13         | H            |
| 4074.2          | -50.1      | 6.9       | 7.7      | -49.3           | -13         | V            |
| 4887.7          | -48.24     | 7.7       | 9.0      | -46.94          | -13         | V            |
| 5696.5          | -50.5      | 8.5       | 10.5     | -48.5           | -13         | H            |

**GPRS 850 CH251**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1496.2          | -19.55     | 4.1       | 3.4      | -20.25          | -13         | V            |
| 2584.3          | -36.15     | 5.5       | 3.7      | -37.95          | -13         | H            |
| 3171.9          | -46.21     | 6.0       | 4.7      | -47.51          | -13         | H            |
| 4091.5          | -49.74     | 7.0       | 7.7      | -49.04          | -13         | H            |
| 4750.4          | -47.63     | 7.5       | 7.9      | -47.23          | -13         | V            |
| 5551.2          | -48.84     | 8.2       | 9.5      | -47.54          | -13         | H            |

**EGPRS 850 CH128**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.5          | -42.02     | 4.3       | 2.9      | -43.42          | -13         | V            |
| 2568.2          | -36.09     | 5.4       | 3.7      | -37.79          | -13         | H            |
| 3591.9          | -43.34     | 6.5       | 4.7      | -45.14          | -13         | H            |
| 5019.2          | -45.93     | 7.8       | 9.0      | -44.73          | -13         | V            |
| 5642.3          | -50.03     | 8.3       | 10.5     | -47.83          | -13         | H            |
| 6692.3          | -44.72     | 9.1       | 12.3     | -41.52          | -13         | V            |

**EGPRS 850 CH189**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.5          | -42.06     | 4.3       | 2.9      | -43.46          | -13         | V            |
| 2523.2          | -37.18     | 5.4       | 3.7      | -38.88          | -13         | V            |
| 3589.6          | -43.32     | 6.5       | 4.7      | -45.12          | -13         | V            |
| 4371.9          | -48.26     | 7.2       | 7.7      | -47.76          | -13         | H            |
| 5076.9          | -46.71     | 7.9       | 9.0      | -45.61          | -13         | H            |
| 5908.8          | -48.72     | 8.5       | 10.4     | -46.82          | -13         | V            |

**EGPRS 850 CH251**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1494.4          | -21.78     | 4.1       | 3.4      | -22.48          | -13         | V            |
| 2588.6          | -35.31     | 5.5       | 3.7      | -37.11          | -13         | H            |
| 3595.4          | -42.79     | 6.5       | 4.7      | -44.59          | -13         | V            |
| 4092.7          | -50.07     | 7.0       | 7.7      | -49.37          | -13         | V            |
| 4845.0          | -47.77     | 7.6       | 7.9      | -47.47          | -13         | V            |
| 5539.6          | -49.07     | 8.2       | 9.5      | -47.77          | -13         | V            |

**PCS1900 CH512**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3700.2          | -43.32     | 6.6       | 7.7      | -42.22          | -13         | V            |
| 5550.6          | -38.87     | 8.2       | 9.5      | -37.57          | -13         | V            |
| 7400.4          | -51.3      | 9.7       | 14.6     | -46.4           | -13         | H            |
| 9250.8          | -49.82     | 10.6      | 18.5     | -41.92          | -13         | V            |
| 11101.2         | -44.85     | 12.1      | 18.1     | -38.85          | -13         | H            |
| 12956.4         | -47.5      | 13.2      | 20.2     | -40.5           | -13         | V            |

**PCS1900 CH661**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3759.6          | -46.51     | 6.6       | 7.7      | -45.41          | -13         | H            |
| 5640.6          | -41.93     | 8.3       | 10.5     | -39.73          | -13         | H            |
| 7519.2          | -48.85     | 9.7       | 14.6     | -43.95          | -13         | V            |
| 9399.6          | -49.4      | 10.7      | 18.6     | -41.5           | -13         | H            |
| 11280.0         | -45.47     | 12.1      | 18.5     | -39.07          | -13         | V            |
| 13176.0         | -49.25     | 13.0      | 21.8     | -40.45          | -13         | H            |

**PCS1900 CH 810**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3819.6          | -46.84     | 6.7       | 7.7      | -45.84          | -13         | V            |
| 5729.4          | -39.67     | 8.5       | 10.5     | -37.67          | -13         | V            |
| 7639.2          | -50.49     | 9.7       | 15.3     | -44.89          | -13         | H            |
| 9548.4          | -50.12     | 10.7      | 18.6     | -42.22          | -13         | V            |
| 11457.6         | -39.09     | 12.3      | 18.1     | -33.29          | -13         | H            |
| 13368.0         | -47.35     | 13.7      | 21.8     | -39.25          | -13         | H            |

**PCS1900 GPRS CH 512**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3700.8          | -43.38     | 6.6       | 7.7      | -42.28          | -13         | V            |
| 5550.6          | -38.67     | 8.2       | 9.5      | -37.37          | -13         | V            |
| 7400.4          | -50.23     | 9.7       | 14.6     | -45.33          | -13         | H            |
| 9250.8          | -49.51     | 10.6      | 18.5     | -41.61          | -13         | V            |
| 11100.0         | -39.26     | 12.1      | 18.1     | -33.26          | -13         | H            |
| 14802.0         | -41.33     | 14.3      | 23.3     | -32.33          | -13         | H            |

**PCS1900 GPRS CH 661**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3759.6          | -44.51     | 6.6       | 7.7      | -43.41          | -13         | V            |
| 5640.6          | -40.17     | 8.3       | 10.5     | -37.97          | -13         | V            |
| 7519.2          | -50.92     | 9.7       | 14.6     | -46.02          | -13         | H            |
| 9399.6          | -47.98     | 10.7      | 18.6     | -40.08          | -13         | V            |
| 11278.8         | -39.88     | 12.1      | 18.5     | -33.48          | -13         | H            |
| 13075.2         | -46.13     | 13.0      | 20.2     | -38.93          | -13         | H            |

**PCS1900 GPRS CH 810**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3819.6          | -47.76     | 6.7       | 7.7      | -46.76          | -13         | H            |
| 5730.0          | -38.93     | 8.5       | 10.5     | -36.93          | -13         | V            |
| 7638.0          | -49.43     | 9.7       | 15.3     | -43.83          | -13         | V            |
| 9549.6          | -48.73     | 10.7      | 18.6     | -40.83          | -13         | H            |
| 11457.6         | -40.19     | 12.3      | 18.1     | -34.39          | -13         | H            |
| 15279.6         | -43.21     | 14.4      | 25.1     | -32.51          | -13         | H            |

**PCS1900 EGPRS CH 512**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.5          | -42.02     | 4.3       | 2.9      | -43.42          | -13         | V            |
| 2568.2          | -36.09     | 5.4       | 3.7      | -37.79          | -13         | H            |
| 3591.9          | -43.34     | 6.5       | 4.7      | -45.14          | -13         | H            |
| 5019.2          | -45.93     | 7.8       | 9.0      | -44.73          | -13         | V            |
| 5642.3          | -50.03     | 8.3       | 10.5     | -47.83          | -13         | H            |
| 6692.3          | -44.72     | 9.1       | 12.3     | -41.52          | -13         | V            |

**PCS1900 EGPRS CH 661**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.5          | -42.06     | 4.3       | 2.9      | -43.46          | -13         | V            |
| 2523.2          | -37.18     | 5.4       | 3.7      | -38.88          | -13         | V            |
| 3589.6          | -43.32     | 6.5       | 4.7      | -45.12          | -13         | V            |
| 4371.9          | -48.26     | 7.2       | 7.7      | -47.76          | -13         | H            |
| 5076.9          | -46.71     | 7.9       | 9.0      | -45.61          | -13         | H            |
| 5908.8          | -48.72     | 8.5       | 10.4     | -46.82          | -13         | V            |

**PCS1900 EGPRS CH 810**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1494.4          | -21.78     | 4.1       | 3.4      | -22.48          | -13         | V            |
| 2588.6          | -35.31     | 5.5       | 3.7      | -37.11          | -13         | H            |
| 3595.4          | -42.79     | 6.5       | 4.7      | -44.59          | -13         | V            |
| 4092.7          | -50.07     | 7.0       | 7.7      | -49.37          | -13         | V            |
| 4845.0          | -47.77     | 7.6       | 7.9      | -47.47          | -13         | V            |
| 5539.6          | -49.07     | 8.2       | 9.5      | -47.77          | -13         | V            |

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

### 6.8.3 WCDMA Measurement Method

The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band V.

**The procedure of radiated spurious emissions is the same like GSM.**

#### 6.8.3.1 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### 6.8.3.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### 6.8.3.3 Measurement Results Table

| Frequency     | Channel | Frequency Range | Result |
|---------------|---------|-----------------|--------|
| WCDMA Band II | Low     | 30MHz~20GHz     | P      |
|               | Middle  | 30MHz~20GHz     | P      |
|               | High    | 30MHz~20GHz     | P      |
| WCDMA Band V  | Low     | 30MHz~20GHz     | P      |
|               | Middle  | 30MHz~20GHz     | P      |
|               | High    | 30MHz~20GHz     | P      |

**WCDMA BAND II Mode Channel 9262**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3702.8          | -45.67     | 6.6       | 7.7      | -44.57          | -13         | H            |
| 5547.2          | -56.32     | 8.2       | 9.5      | -55.02          | -13         | V            |
| 7406.8          | -58.98     | 9.7       | 14.6     | -54.08          | -13         | V            |
| 9256.8          | -61.32     | 10.6      | 18.5     | -53.42          | -13         | H            |
| 11101.5         | -54.61     | 12.1      | 18.1     | -48.61          | -13         | V            |
| 12984.2         | -54.82     | 13.2      | 20.2     | -47.82          | -13         | H            |

**WCDMA BAND II Mode Channel 9400**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3758.0          | -47.16     | 6.6       | 7.7      | -46.06          | -13         | H            |
| 5637.2          | -57.34     | 8.3       | 10.5     | -55.14          | -13         | H            |
| 7520.0          | -57.77     | 9.7       | 14.6     | -52.87          | -13         | V            |
| 9377.6          | -60.41     | 10.7      | 18.6     | -52.51          | -13         | H            |
| 11277.9         | -55.11     | 12.1      | 18.5     | -48.71          | -13         | H            |
| 13160.6         | -57.45     | 13.0      | 21.8     | -48.65          | -13         | H            |

**WCDMA BAND II Mode Channel 9538**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 3813.6          | -52.44     | 6.7       | 7.7      | -51.44          | -13         | H            |
| 5726.8          | -56.81     | 8.5       | 10.5     | -54.81          | -13         | H            |
| 7626.0          | -60.81     | 9.7       | 15.3     | -55.21          | -13         | V            |
| 9533.2          | -61.69     | 10.7      | 18.6     | -53.79          | -13         | H            |
| 11450.4         | -52.38     | 12.3      | 18.1     | -46.58          | -13         | V            |
| 13342.2         | -55.2      | 13.6      | 21.8     | -47             | -13         | V            |

**WCDMA BAND V Mode Channel 4132**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1652.1          | -54.94     | 4.3       | 2.9      | -56.34          | -13         | H            |
| 2479.2          | -46.13     | 5.3       | 3.7      | -47.73          | -13         | H            |
| 3304.8          | -56.39     | 6.2       | 4.7      | -57.89          | -13         | V            |
| 4145.6          | -58.34     | 7.0       | 7.7      | -57.64          | -13         | V            |
| 4966.0          | -56.77     | 7.7       | 9.0      | -55.47          | -13         | H            |
| 5787.2          | -60.04     | 8.4       | 10.5     | -57.94          | -13         | H            |

**WCDMA BAND V Mode Channel 4183**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1672.9          | -54.94     | 4.3       | 2.9      | -56.34          | -13         | H            |
| 2504.2          | -45.46     | 5.4       | 3.7      | -47.16          | -13         | V            |
| 3332.8          | -56.71     | 6.2       | 4.7      | -58.21          | -13         | H            |
| 4183.6          | -59.96     | 7.0       | 7.7      | -59.26          | -13         | H            |
| 5019.2          | -56.24     | 7.8       | 9.0      | -55.04          | -13         | V            |
| 5857.2          | -59.9      | 8.4       | 10.5     | -57.8           | -13         | H            |

**WCDMA BAND V Mode Channel 4233**

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| 1689.3          | -52.81     | 4.4       | 2.9      | -54.31          | -13         | V            |
| 2537.7          | -45.12     | 5.4       | 3.7      | -46.82          | -13         | H            |
| 3374.4          | -57.81     | 6.2       | 4.7      | -59.31          | -13         | H            |
| 4235.2          | -60.26     | 7.1       | 7.7      | -59.66          | -13         | V            |
| 5082.0          | -56.22     | 7.9       | 9.0      | -55.12          | -13         | H            |
| 5923.6          | -58.18     | 8.5       | 10.4     | -56.28          | -13         | V            |

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

## 7. Test Equipment List

### Conducted Test System

| Item | Equipment Name                       | Type                           | Serial Number    | Manufacturer | Cal. Date  | Cal. Interval |
|------|--------------------------------------|--------------------------------|------------------|--------------|------------|---------------|
| 1    | Vector Signal Analyzer               | FSQ40                          | 200063           | R&S          | 2020-05-10 | 1 year        |
| 2    | DC Power Supply                      | ZUP60-14                       | LOC-220Z006-0007 | TDL-Lambda   | 2020-05-10 | 1 year        |
| 3    | Universal Radio Communication Tester | CMW500                         | 104178           | R&S          | 2020-05-10 | 1 year        |
| 4    | Eagle Test Software                  | Eagle V3.1<br>FCC GSM<br>WCDMA | NA               | ECIT         | NA         | NA            |

### Radiated Emission Test System

| Item | Equipment Name                       | Type              | Serial Number | Manufacturer | Cal. Date  | Cal. Interval |
|------|--------------------------------------|-------------------|---------------|--------------|------------|---------------|
| 1    | Universal Radio Communication Tester | CMW500            | 104178        | R&S          | 2020-05-10 | 1 year        |
| 2    | Test Receiver                        | ESU40             | 100307        | R&S          | 2020-05-10 | 1 year        |
| 3    | TRILOG Antenna                       | VULB9163          | VULB9163-515  | Schwarzbeck  | 2020-02-28 | 2 years       |
| 4    | Double Ridged Guide Antenna          | ETS-3117          | 135890        | ETS          | 2020-02-28 | 2 years       |
| 5    | 2-Line V-Network                     | ENV216            | 101380        | R&S          | 2020-05-10 | 1 year        |
| 6    | RF Signal Generator                  | SMF100A           | 102314        | R&S          | 2020-05-10 | 1 year        |
| 7    | Amplifier                            | SCU08             | 10146         | R&S          | 2020-05-10 | 1 year        |
| 8    | EMI Test Software                    | EMC32<br>V9.15.00 | NA            | R&S          | NA         | NA            |

### Climate chamber

| Item | Equipment Name  | Type     | Serial Number | Manufacturer | Cal. Date  | Cal. Interval |
|------|-----------------|----------|---------------|--------------|------------|---------------|
| 1    | Climate chamber | UT333 BT | C191995461    | UNI-T        | 2020-05-10 | 1 year        |

### Anechoic chamber

Fully anechoic chamber by ETS

## Annex A: Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents. The detailed measurement uncertainty is defined in 3IN documents.

| Measurement Items                      | Range              | Confidence Level | Calculated Uncertainty |
|--|--------------------|------------------|------------------------|
| Peak Output Power-Conducted            | 2412MHz-2462MHz    | 95%              | 0.544dB                |
| Peak Power Spectral Density            | 2412MHz-2462MHz    | 95%              | 0.502dB                |
| Occupied 6dB Bandwidth                 | 2412MHz-2462MHz    | 95%              | 69.26kHz               |
| Band Edges-Conducted                   | 2412MHz-2462MHz    | 95%              | 0.544dB                |
| Conducted Emission                     | 30MHz-2GHz         | 95%              | 0.90dB                 |
| Conducted Emission                     | 2GHz-3.6GHz        | 95%              | 0.88dB                 |
| Conducted Emission                     | 3.6GHz-8GHz        | 95%              | 0.96dB                 |
| Conducted Emission                     | 8GHz-20GHz         | 95%              | 0.94dB                 |
| Conducted Emission                     | 20GHz-22GHz        | 95%              | 0.88dB                 |
| Conducted Emission                     | 22GHz-26GHz        | 95%              | 0.86dB                 |
| Transmitter Spurious Emission-Radiated | 9KHz-30MHz         | 95%              | 5.66dB                 |
| Transmitter Spurious Emission-Radiated | 30MHz-1000MHz      | 95%              | 4.98dB                 |
| Transmitter Spurious Emission-Radiated | 1000MHz -18000MHz  | 95%              | 5.06dB                 |
| Transmitter Spurious Emission-Radiated | 18000MHz -40000MHz | 95%              | 5.20dB                 |
| AC Power line Conducted Emission       | 0.15MHz-30MHz      | 95%              | 3.66 dB                |

## Annex B: Accreditation Certificate



### Accredited Laboratory

A2LA has accredited

**Industrial Internet Innovation Center (Shanghai) Co., Ltd.**  
Shanghai, People's Republic of China

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the «field» field. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 6th day of May 2019.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3682.01  
Valid to April 30, 2021  
Revised February 17, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical field Scope of Accreditation.

\*\*\*\*\*END OF REPORT\*\*\*\*\*