



# EMC TEST REPORT

**Applicant** Mobiwire SAS  
**FCC ID** QPN-LINIWA  
**Product** 4G Smart Phone  
**Brand** MobiWire, ALTICE  
**Model** MobiWire Liniwa, ALTICE S23  
**Report No.** R1912A0709-E1  
**Issue Date** May 13, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2019)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Performed by: Wei Liu/ Manager

Guangchang Fan

Approved by: Guangchang Fan/ Director

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report .....	4
1.2.	Test facility .....	4
1.3	Testing Location.....	4
2	General Description of Equipment under Test.....	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
2.3	Applied Standards .....	7
2.4	Test Mode.....	8
3	Test Case Results .....	9
3.1	Radiated Emission .....	9
3.2	Conducted Emission .....	14
4	Main Test Instruments .....	17



## Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Test Date: February 15,2020~ March 18,2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



## 1 Test Laboratory

### 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Fan Guangchang

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: [fanguangchang@ta-shanghai.com](mailto:fanguangchang@ta-shanghai.com)



## 2 General Description of Equipment under Test

### 2.1 Applicant and Manufacturer Information

Applicant	Mobiwire SAS
Applicant address	79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France
Manufacturer	Mobiwire SAS
Manufacturer address	79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France

### 2.2 General information

EUT Description			
Device Type:	Portable Device		
Model:	MobiWire Liniwa, ALTICE S23		
IMEI	353633110000503		
HW Version:	V01		
SW Version:	MOBIWIRE_GH5032		
Antenna Type:	Internal Antenna		
Frequency:	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	Bluetooth:	2400 ~ 2483.5	2400 ~ 2483.5
	WIFI 2.4G:	2400 ~ 2483.5	2400 ~ 2483.5
Modulation:	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8-DPSK Bluetooth v4.2 LE: GFSK WLAN 802.11b: DSSS WLAN 802.11a/g/n: OFDM		
EUT Accessory			
Adapter 1	Manufacturer: Dongguan Aohai Power Technology CO.,LTD Model: A31A-050100U-EU1		
Adapter 2	Manufacturer: Dongguan Aohai Power Technology CO.,LTD		



	Model: A31A-050100U-US1
Battery	Manufacturer: GUANGDONG FENGHUA NEW ENERGY CO.,LTD Model: 178172056
Earphone	Manufacturer: Shenzhen Juwei Electronics Co.,Ltd Model: JWEP0957-M01R
USB Cable	Manufacturer: SHENZHEN FKY-QY HARDWARE ELECTRONIC CO.,LTD Model: 2CA0MBWE001
Auxiliary test equipment	
PC	PC Manufacturer: Microsoft Corporation Model: L20170076

Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

**Customer declaration, the two models(MobiWire Liniwa and ALTICE S23) are same as Orange Nola play, except for model name, brand, TP and battery cover. Each one should be applied throughout the compliance test respectively, however, only the worst case (ALTICE S23) will be recorded in this report.**



## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2019)**

**ANSI C63.4 (2014)**



## 2.4 Test Mode

Test Mode	
Mode 1	USB Copy(EUT with PC) + USB cable + earphone + Camera On + MP3 +Idle

### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


- (a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO
- (b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC.

## Test Setup

### Below 1GHz

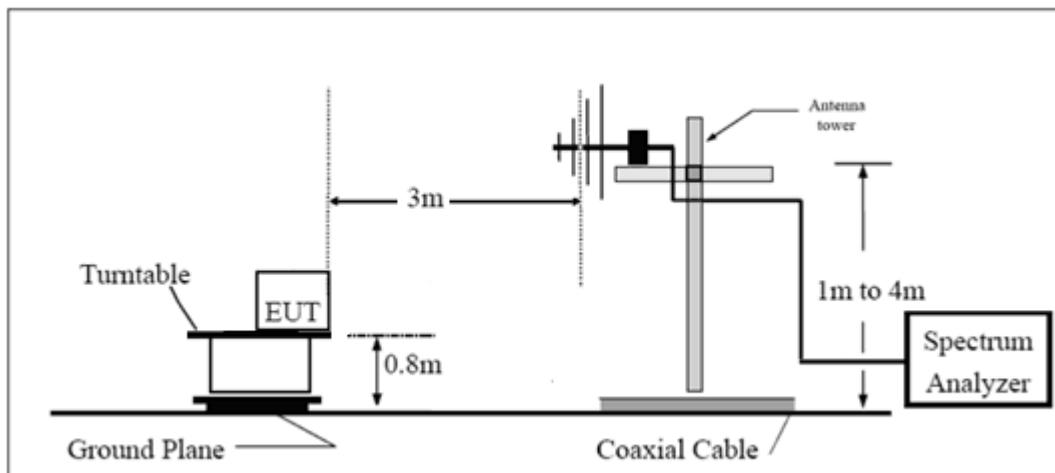

### Above 1GHz

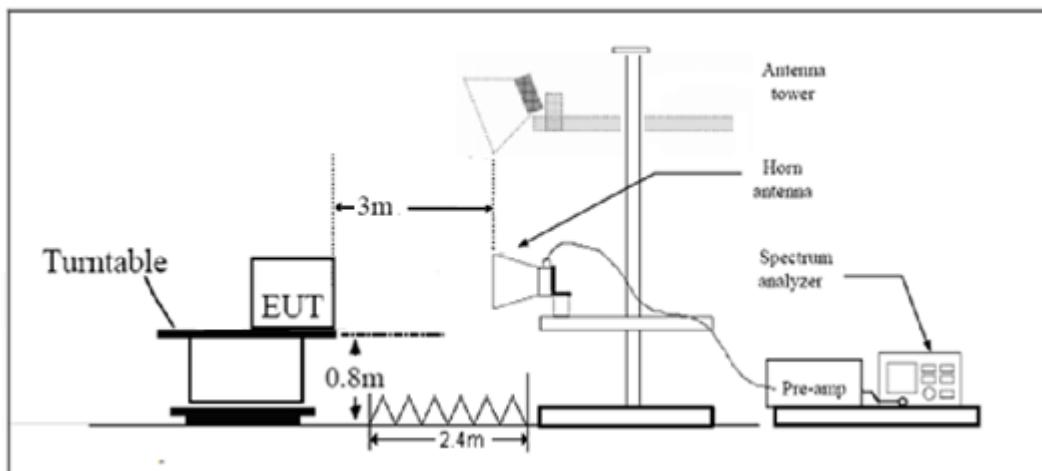

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz,which is lower	54 74	Average Peak

**Measurement Uncertainty**


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
30MHz~200MHz	4.17 dB
200MHz~1000MHz	4.84 dB
1GHz~18GHz	4.35 dB
18GHz~26.5GHz	5.90 dB

## Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz- 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

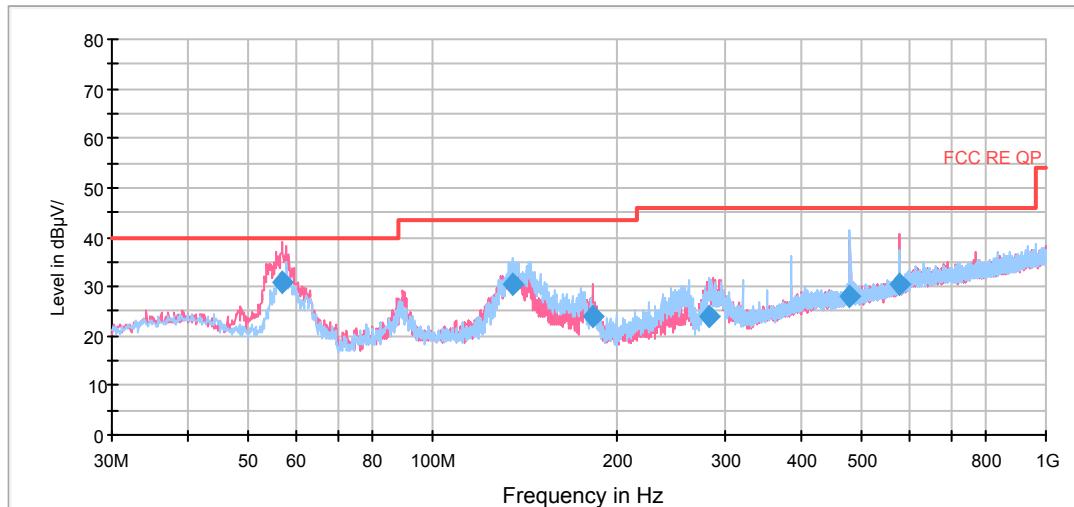


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
56.916250	30.8	225.0	V	248.0	13.9	9.2	40.0
135.402500	30.5	225.0	H	22.0	9.9	13.0	43.5
182.175000	24.0	100.0	V	0.0	11.1	19.5	43.5
282.123750	24.0	125.0	V	219.0	14.8	22.0	46.0
479.960000	28.0	100.0	H	334.0	20.8	18.0	46.0
576.108750	30.4	125.0	V	300.0	22.6	15.6	46.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

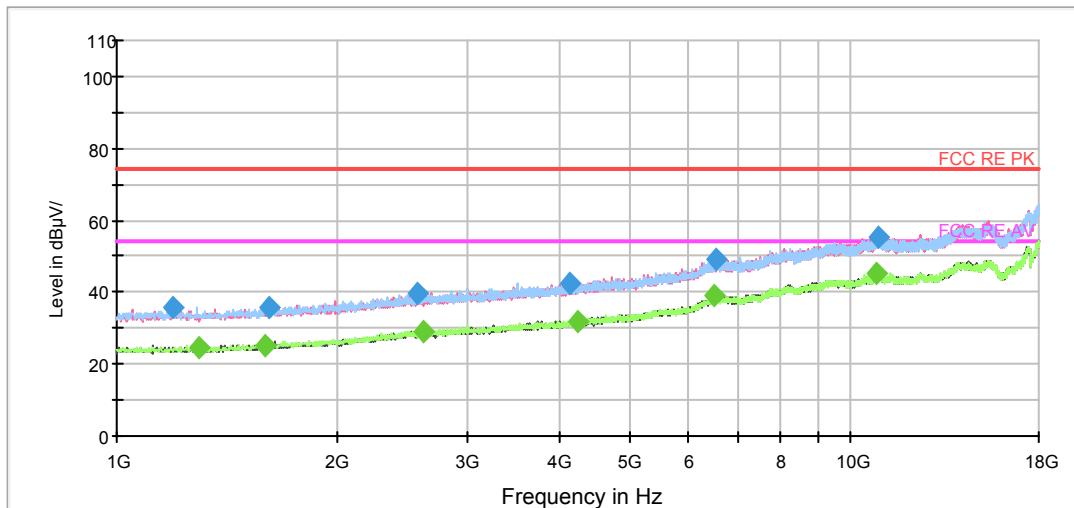

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1191.250000	35.5	100.0	H	49.0	-11.2	38.5	74.0
1616.250000	35.8	100.0	H	0.0	-10.0	38.2	74.0
2572.500000	39.4	100.0	V	352.0	-6.3	34.6	74.0
4147.125000	42.2	200.0	H	326.0	-2.3	31.8	74.0
6535.625000	49.0	200.0	V	74.0	4.9	25.0	74.0
10906.750000	55.1	200.0	V	288.0	13.5	18.9	74.0

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1295.375000	24.6	200.0	H	356.0	-11.0	29.4	54.0
1590.750000	25.4	200.0	H	356.0	-10.1	28.6	54.0
2619.250000	29.0	200.0	H	230.0	-6.2	25.0	54.0
4236.375000	32.0	200.0	V	288.0	-2.0	22.0	54.0
6522.875000	38.8	100.0	V	347.0	4.9	15.2	54.0
10847.250000	45.2	100.0	H	7.0	13.5	8.8	54.0

## 3.2 Conducted Emission

### Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC.

### Test Setup

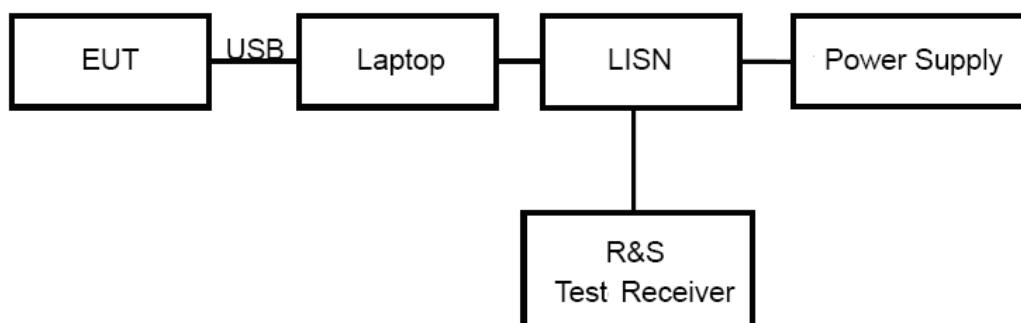

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5 - 5	56	46
5 - 30	60	50


<sup>\*</sup>: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 2.57$  dB.

## Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

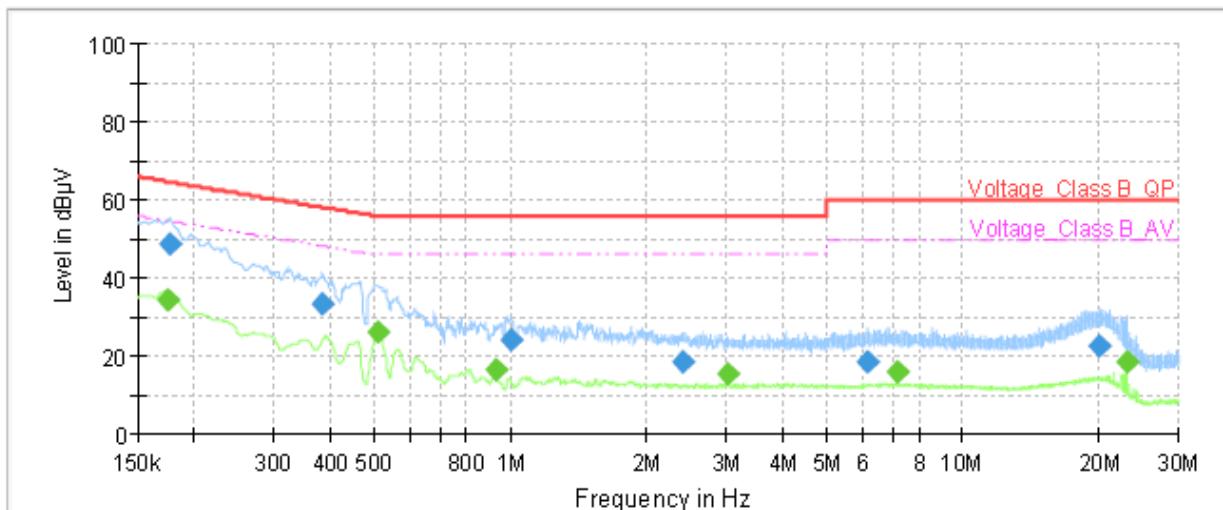


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.17	---	34.22	54.73	20.51	1000.0	9.000	L1	ON	19
0.18	48.57	---	64.63	16.06	1000.0	9.000	L1	ON	19
0.38	33.34	---	58.19	24.85	1000.0	9.000	L1	ON	19
0.51	---	26.05	46.00	19.95	1000.0	9.000	L1	ON	19
0.93	---	16.23	46.00	29.77	1000.0	9.000	L1	ON	19
1.00	24.10	---	56.00	31.90	1000.0	9.000	L1	ON	19
2.40	18.64	---	56.00	37.36	1000.0	9.000	L1	ON	19
3.03	---	15.35	46.00	30.65	1000.0	9.000	L1	ON	19
6.18	18.57	---	60.00	41.43	1000.0	9.000	L1	ON	19
7.14	---	15.98	50.00	34.02	1000.0	9.000	L1	ON	19
20.07	22.33	---	60.00	37.67	1000.0	9.000	L1	ON	20
23.13	---	18.59	50.00	31.41	1000.0	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

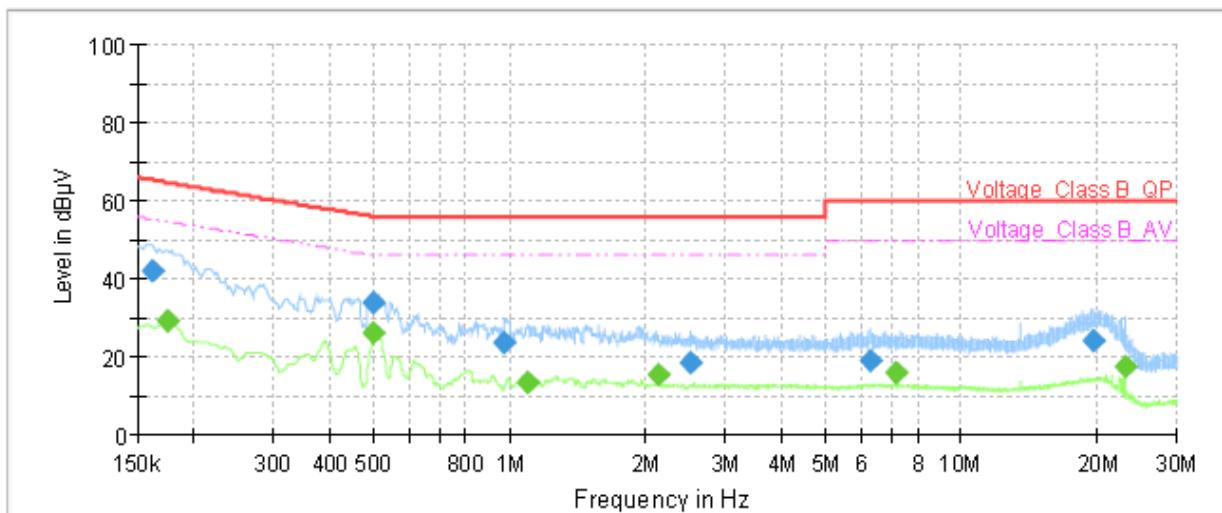

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	42.13	---	65.40	23.27	1000.0	9.000	N	ON	19
0.17	---	29.22	54.73	25.51	1000.0	9.000	N	ON	19
0.50	33.85	---	56.02	22.17	1000.0	9.000	N	ON	19
0.50	---	26.21	46.00	19.79	1000.0	9.000	N	ON	19
0.98	23.79	---	56.00	32.21	1000.0	9.000	N	ON	19
1.10	---	13.43	46.00	32.57	1000.0	9.000	N	ON	19
2.12	---	15.45	46.00	30.55	1000.0	9.000	N	ON	19
2.52	18.60	---	56.00	37.40	1000.0	9.000	N	ON	19
6.28	18.79	---	60.00	41.21	1000.0	9.000	N	ON	19
7.15	---	15.95	50.00	34.05	1000.0	9.000	N	ON	19
19.58	24.05	---	60.00	35.95	1000.0	9.000	N	ON	19
23.13	---	17.67	50.00	32.33	1000.0	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz



## 4 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	R&S	FSV40	15195-01-00	2019-05-19	2020-05-18
EMI Test Receiver	R&S	ESCI	100948	2019-05-19	2020-05-18
Trilog Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
EMI Test Receiver	R&S	ESR	101667	2019-05-19	2020-05-18
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/

\*\*\*\*\*END OF REPORT\*\*\*\*\*