



TEST REPORT

No. I18D00170-SAR01

For

Client: Mobiwire SAS

Production: Connected Mobile with Printer

Model Name: MP3 Plus

FCC ID: QPN-MP3PLUS

Brand Name: MobiloT

Hardware Version: V02

Software Version: V01

Issued date: 2018-9-27

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I18D00170-SAR01	00	2018-9-27	Initial creation of test report

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA	6
1.4. SIGNATURE	6
2. STATEMENT OF COMPLIANCE	7
3. CLIENT INFORMATION	9
3.1. APPLICANT INFORMATION	9
3.2. MANUFACTURER INFORMATION	9
4. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
4.1. ABOUT EUT	10
4.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	11
4.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	11
5. TEST METHODOLOGY	12
5.1. APPLICABLE LIMIT REGULATIONS	12
5.2. APPLICABLE MEASUREMENT STANDARDS	12
6. SPECIFIC ABSORPTION RATE (SAR)	13
6.1. INTRODUCTION	13
6.2. SAR DEFINITION	13
7. TISSUE SIMULATING LIQUIDS	14
7.1. TARGETS FOR TISSUE SIMULATING LIQUID	14
7.2. DIELECTRIC PERFORMANCE	15
8. SYSTEM VERIFICATION	16
8.1. SYSTEM SETUP	16
8.2. SYSTEM VERIFICATION	17

9. MEASUREMENT PROCEDURES	18
9.1. TESTS TO BE PERFORMED.....	18
9.2. GENERAL MEASUREMENT PROCEDURE	19
9.3. WCDMA MEASUREMENT PROCEDURES FOR SAR.....	21
9.4. BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	22
9.5. POWER DRIFT	22
10. CONDUCTED OUTPUT POWER.....	23
10.1. GSM MEASUREMENT RESULT	27
10.2. WCDMA MEASUREMENT RESULT.....	29
10.3. WI-FI AND BT MEASUREMENT RESULT	30
11. SIMULTANEOUS TX SAR CONSIDERATIONS.....	33
11.1. INTRODUCTION.....	33
11.2. TRANSMIT ANTENNA SEPARATION DISTANCES	33
11.3. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	34
11.4. SAR MEASUREMENT POSITIONS.....	34
12. SAR TEST RESULT	35
13. EVALUATION OF SIMULTANEOUS.....	45
14. SAR MEASUREMENT VARIABILITY	46
15. MEASUREMENT UNCERTAINTY	47
16. MAIN TEST INSTRUMENT	49
ANNEX A. GRAPH RESULTS	50
ANNEX B. SYSTEM VALIDATION RESULTS.....	70
ANNEX C. SAR MEASUREMENT SETUP.....	74
ANNEX D. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	83
ANNEX E. EQUIVALENT MEDIA RECIPES	86
ANNEX F. SYSTEM VALIDATION	87

ANNEX G. PROBE AND DAE CALIBRATION CERTIFICATE	88
ANNEX H. ACCREDITATION CERTIFICATE.....	159

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301

1.2. Testing Environment

Normal Temperature:	18-25°C
Relative Humidity:	25-75%
Ambient noise & Reflection:	< 0.012 W/kg

1.3. Project Data

Project Leader:	Liu Zeguang
Testing Start Date:	2018-8-21
Testing End Date:	2018-9-19


1.4. Signature



Yan Hang
(Prepared this test report)



Fu Erlang
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **MP3 Plus** are as follows .

Table 2.1: Max. Reported SAR (1g)

Band	Position/Distance	SAR 1g (W/Kg)
GSM 850	Body (5mm)	1.013
	Hotspot(5mm)	1.013
GSM 1900	Body (5mm)	0.713
	Hotspot(5mm)	0.713
WCDMA Band2	Body (5mm)	0.942
	Hotspot(5mm)	0.942
WCDMA Band5	Body (5mm)	0.921
	Hotspot(5mm)	0.921
2.4G Wi-Fi	Body (5mm)	0.541
	Hotspot(5mm)	0.541

Table 2.2: Max. Reported SAR Second Supply (10g)

Band	Position/Distance	SAR 10g (W/Kg)
GSM 850	Limb	1.029
GSM 1900	Limb	0.881
WCDMA Band2	Limb	1.040
WCDMA Band5	Limb	0.861
2.4G Wi-Fi	Limb	0.554

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue, 4.0 W/Kg as averaged over any 10g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Table 2.3: Simultaneous SAR

Transmission SAR(W/Kg)						
Test Position		2G	3G	2.4G WIFI	BT	SUM
Hotspot &Body 5mm	Phantom Side	0.271	0.359	0.053	0.102	0.461
	Cheek Toward Ground	0.410	0.385	0.18	0.102	0.590
	Tilt Toward Ground	1.013	0.942	--	0.102	1.115
Hotspot 5 mm	Left Side	0.483	0.482	--	0.102	0.585
	Right Side	0.523	0.257	0.541	0.102	1.064
	Bottom Side	0.625	0.384	--	0.102	0.727
	Top Side	--	--	--	0.102	0.102
Hotspot &Body 0mm	Phantom Side	0.272	0.303	0.042	0.052	0.355
	Cheek Toward Ground	0.458	0.486	0.163	0.052	0.649
	Tilt Toward Ground	1.029	1.04	--	0.052	1.092
Hotspot 5 mm	Left Side	0.714	0.802	--	0.052	0.854
	Right Side	0.491	0.277	0.554	0.052	1.045
	Bottom Side	0.755	0.514	--	0.052	0.807
	Top Side	--	--	--	0.052	0.052

According to the above table, the maximum sum of reported SAR values for
GSM/WCDMA and BT is **1.115kg** (1g). GSM/WCDMA and BT is **1.092kg** (10g)

3. Client Information

3.1. Applicant Information

Company Name: Mobiwire SAS
Address: 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France.
Email: lizhen.cao@mobiwire.com.cn

3.2. Manufacturer Information

Company Name: Mobiwire SAS
Address: 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France.
Email: lizhen.cao@mobiwire.com.cn

4. Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1. About EUT

Description:	Connected Mobile with Printer
Model name:	MP3 Plus
Operation Model(s):	GSM850/1900,WCDMA Band II/V WIFI2.4G,BT
Tx Frequency:	824.2-848.8MHz(GSM850) 1850.2-1909.8MHz (GSM1900) 1852.4-1907.6 MHz (WCDMA Band II) 826.4-846.6MHz (WCDMA Band V) 2412- 2462 MHz (Wi-Fi) 2400-2483.5 MHz (BT)
Test device Production information:	Production unit
GPRS/EGPRS Class Mode:	B
GPRS/ EGPRS Multislot Class:	12
Device type:	Portable device
UE category:	3
Antenna type:	Inner antenna
Accessories/Body-worn configurations:	Battery
Dimensions:	18cm×7.2 cm×6.5 cm
Hotspot Mode:	support
FCC ID:	QPN-MP3PLUS

4.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Receive Date
N02	IMEI1:359457090004028 IMIE2:359457090004036	V02	V01	2018-8-14
N13	IMEI1:359457090004465 IMIE2:359457090004473	V02	V01	2018-8-14

*EUT ID: is used to identify the test sample in the lab internally.

4.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
BA05	Battery	N/A	N/A	N/A

*AE ID: is used to identify the test sample in the lab internally.

5. TEST METHODOLOGY

5.1. Applicable Limit Regulations

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue and **4.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices:

Experimental Techniques.

KDB248227 D01 802 11 Wi-Fi SAR v02r02: SAR measurement procedures for 802.112abg transmitters.

KDB447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB865664 D02 RF Exposure Reporting v01r02: provides general reporting requirements as well as certain specific information required to support MPE and SAR compliance.

KDB941225 D01 3G SAR Procedures v03r01: 3G SAR Measurement Procedures.

NOTE: KDB is not in A2LA Scope List.

6. Specific Absorption Rate (SAR)

6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7. Tissue Simulating Liquids

7.1. Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency(MHz)	Liquid Type	Conductivity(σ)	\pm 5% Range	Permittivity(ϵ)	\pm 5% Range
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3

7.2. Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Value						
Liquid Temperature: 22.5 °C						
Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ	Drift (%)	Test Date
Body	835 MHz	54.23	-1.76%	0.981	1.13%	2018-8-21
Body	835 MHz-1	54.21	-1.79%	0.983	1.34%	2018-9-19
Body	1900 MHz	52.36	-1.76%	1.520	0	2018-9-10
Body	2450 MHz	53.14	0.83%	1.952	0.10%	2018-8-21


8. System verification

8.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

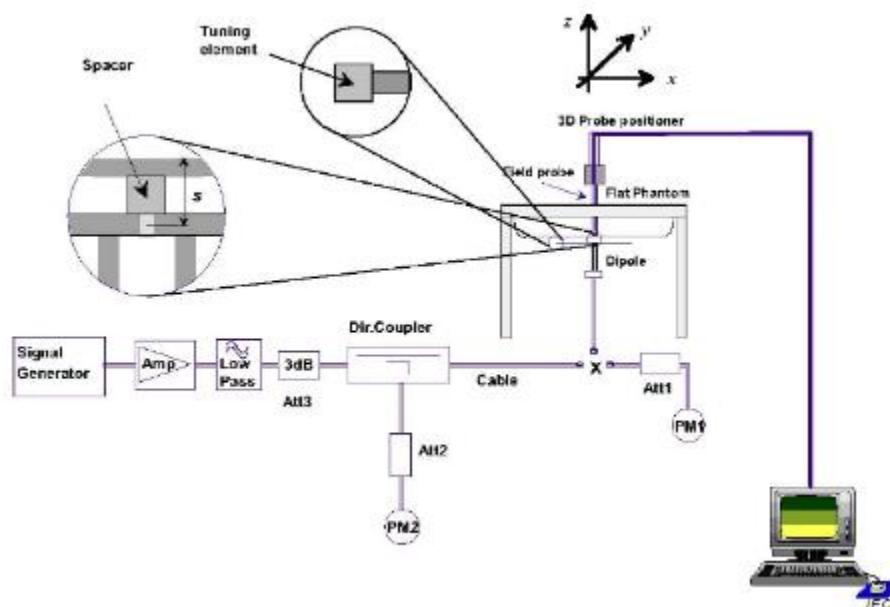

Picture 8.1 System Setup for System Evaluation

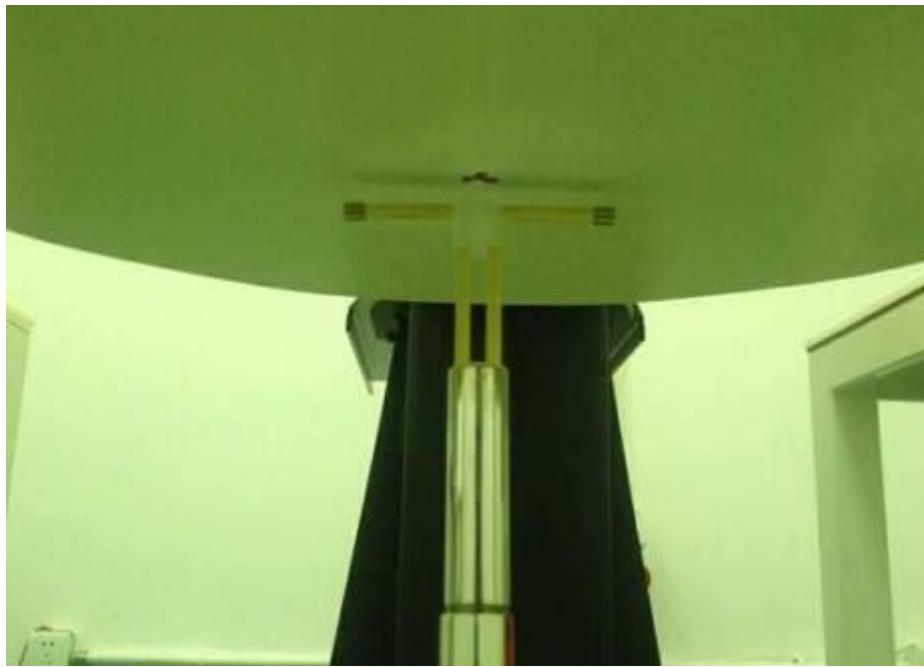**Picture 8.2 Photo of Dipole Setup**

8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 8.1: System Verification of Body

Verification Results							
Input power level: 1W							
Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation		Test date
	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	
835 MHz	6.29	9.57	6.16	9.32	-2.07%	-2.61%	2018-8-21
835 MHz-1	6.29	9.57	6.16	9.36	-2.07%	-2.19%	2018-9-19
1900 MHz	21.2	40.4	19.56	37.16	-7.74%	-8.02%	2018-9-10
2450 MHz	24.7	53.1	23.56	50.0	-4.62%	-5.84%	2018-8-21

9. Measurement Procedures

9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


Step 1: The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

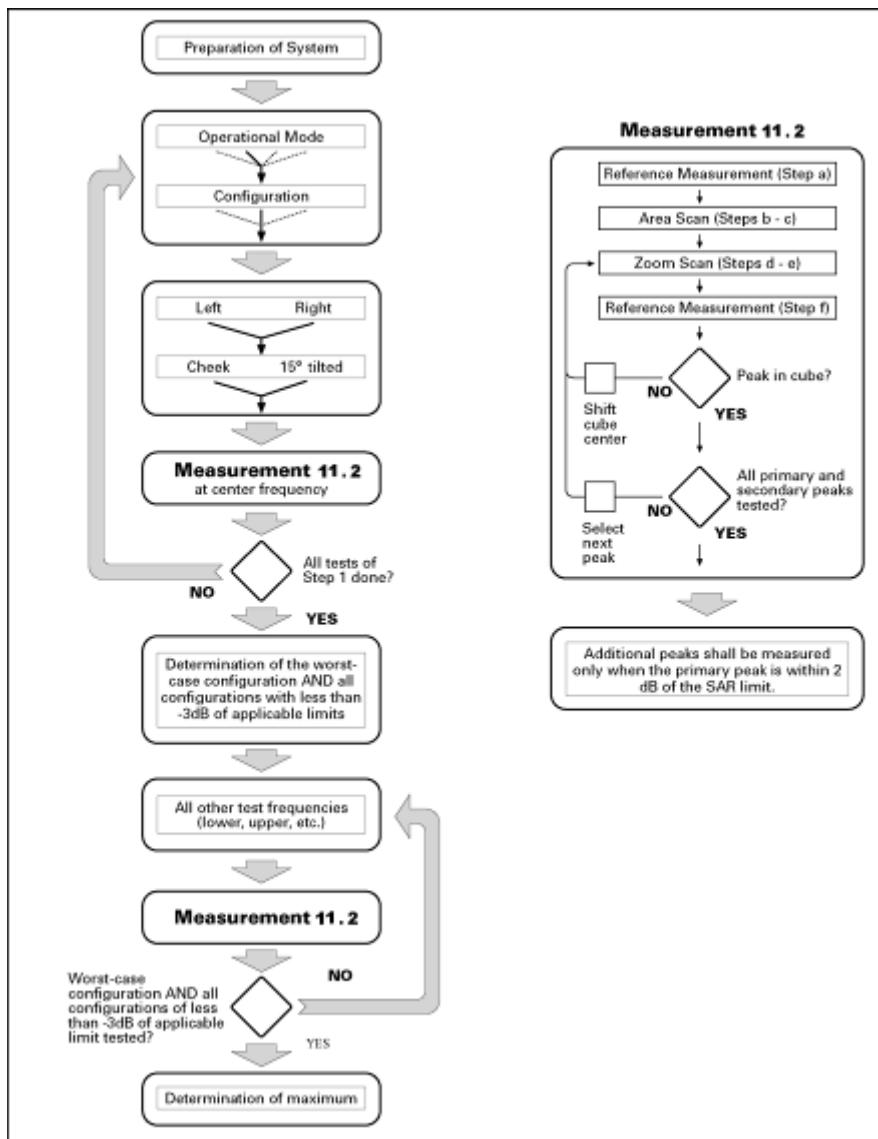

Picture 9.1Block diagram of the tests to be performed

9.2. General Measurement Procedure

The following procedure shall be performed for each of the test conditions (see Picture 11.1) described in 11.1:

- Measure the local SAR at a test point within 8 mm or less in the normal direction from the inner surface of the phantom.
- Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grip spacing of 20 mm

for frequencies below 3 GHz and $(60/f \text{ [GHz]}) \text{ mm}$ for frequencies of 3GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2 \text{ mm}$ for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. The maximum variation of the sensor-phantom surface shall be $\pm 1 \text{ mm}$ for frequencies below 3 GHz and $\pm 0.5 \text{ mm}$ for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than 5° . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.

c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;

d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c). The horizontal grid step shall be $(24/f[\text{GHz}]) \text{ mm}$ or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grip step in the vertical direction shall be $(8-f[\text{GHz}]) \text{ mm}$ or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be $(12 / f[\text{GHz}]) \text{ mm}$ or less but not more than 4 mm, and the spacing between father points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2 \text{ mm}$ for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved is the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the

probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than 5° . If this cannot be achieved an additional uncertainty evaluation is needed.

e) Use post processing(e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH &DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	CM/dB	MPR (dB)
1	2/15	15/15	64	2/15	4/15	1.5	0
2	12/15	15/15	64	12/15	24/25	2.0	0
3	15/15	8/15	64	15/8	30/15	2.0	0
4	15/15	4/15	64	15/4	30/15	2.0	0

For Release 6 HSUPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	2.0	0	20

2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}^{47/15}$	4	2	3.0	0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	2.0	0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	2.0	0	21	81

9.4. Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5. Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 13 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10. Conducted Output Power

Manufacturing tolerance

Table 10.1: GPRS/EGPRS (GMSK Modulation)

GSM 850 GPRS				
Channel		128	190	251
1 Txslots	Maximum Target Value (dBm)	33.5	33.5	33.5
2 Txslots	Maximum Target Value (dBm)	32.0	32.0	32.0
3 Txslots	Maximum Target Value (dBm)	30.0	30.0	30.0
4 Txslots	Maximum Target Value (dBm)	29.5	29.5	29.5
GSM 1900 GPRS				
Channel		512	661	810
1 Txslots	Maximum Target Value (dBm)	30.5	30.5	30.5
2 Txslots	Maximum Target Value (dBm)	29.5	29.5	29.5
3 Txslots	Maximum Target Value (dBm)	27.5	27.5	27.5
4 Txslots	Maximum Target Value (dBm)	26.0	26.0	26.0

Table 10.2: EGPRS (8-PSK Modulation)

GSM 850 EGPRS				
Channel		975	38	124
1 Txslots	Maximum Target Value (dBm)	28.0	28.0	28.0
2 Txslots	Maximum Target Value (dBm)	27.0	27.0	27.0
3 Txslots	Maximum Target Value (dBm)	25.0	25.0	25.0
4 Txslots	Maximum Target Value (dBm)	23.0	23.0	23.0
GSM 1900 EGPRS				
Channel		512	661	810
1 Txslots	Maximum Target Value (dBm)	27.0	27.0	27.0
2 Txslots	Maximum Target Value (dBm)	25.0	25.0	25.0
3 Txslots	Maximum Target Value (dBm)	23.5	23.5	23.5
4 Txslots	Maximum Target Value (dBm)	22.0	22.0	22.0

Table 10.3: WCDMA

WCDMA Band II			
Channel	Channel 9262	Channel 9400	Channel 9538
Maximum Target Value (dBm)	23.0	23.0	23.0

WCDMA Band II HSDPA				
Channel		9262	9400	9538
1	Maximum Target Value (dBm)	22.0	22.0	22.0
2	Maximum Target Value (dBm)	22.0	22.0	22.0
3	Maximum Target Value (dBm)	22.0	22.0	22.0
4	Maximum Target Value (dBm)	22.0	22.0	22.0

WCDMA Band II HSUPA				
Channel		9262	9400	9538
1	Maximum Target Value (dBm)	22.0	22.0	22.0
2	Maximum Target Value (dBm)	22.0	22.0	22.0
3	Maximum Target Value (dBm)	22.0	22.0	22.0
4	Maximum Target Value (dBm)	22.0	22.0	22.0
5	Maximum Target Value (dBm)	22.0	22.0	22.0

Table 10.4 WCDMA

WCDMA Band V			
Channel	4233	4182	4132
Maximum Target Value (dBm)	23.5	23.5	23.5

WCDMA Band V HSDPA				
Channel	4233	4182	4132	
1 Maximum Target Value (dBm)	22.0	22.0	22.0	
2 Maximum Target Value (dBm)	22.0	22.0	22.0	
3 Maximum Target Value (dBm)	22.0	22.0	22.0	
4 Maximum Target Value (dBm)	22.0	22.0	22.0	
WCDMA Band V HSUPA				
Channel	4233	4182	4132	
1 Maximum Target Value (dBm)	22.0	22.0	22.0	
2 Maximum Target Value (dBm)	22.0	22.0	22.0	
3 Maximum Target Value (dBm)	22.0	22.0	22.0	
4 Maximum Target Value (dBm)	22.0	22.0	22.0	
5 Maximum Target Value (dBm)	22.0	22.0	22.0	

Table 10.5 WiFi

WiFi 802.11b 2.4G			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	22.5	22.5	22.5
WiFi 802.11g 2.4G			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	22.5	22.5	22.5
WiFi 802.11n 20M 2.4G			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	22.0	22.0	22.0
WiFi 802.11n 40M 2.4G			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	20.0	20.0	20.0

Table 10.6 Bluetooth

Bluetooth			
Channel	Channel 0	Channel 39	Channel 78
Maximum Target Value (dBm)	4.0	4.0	4.0

Table 10.7 Bluetooth 4.0

Bluetooth			
Channel	Channel 0	Channel 19	Channel 39
Maximum Target Value (dBm)	4.0	4.0	4.0

10.1. GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 10.8 The conducted power measurement results for GPRS

GSM 850	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	GMSK	128	190		251	128	190
1 Txslot	32.8	32.7	32.7	-9.03dB	23.77	23.67	23.67
2 Txslots	31.1	31.0	31.1	-6.02dB	24.84	24.74	24.84

3 Txslots	29.2	29.1	29.1	-4.26dB	25.17	25.07	25.07
4 Txslots	28.2	28.1	28.2	-3.01dB	25.17	25.07	25.17
GSM 1900 GMSK	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	512	661	810		512	661	810
1 Txslot	29.8	29.8	29.9	-9.03dB	20.77	20.77	20.87
2 Txslots	28.2	28.1	28.2	-6.02dB	21.94	21.84	21.94
3 Txslots	26.2	26.1	26.1	-4.26dB	22.17	22.07	22.07
4 Txslots	25.3	25.2	25.2	-3.01dB	22.27	22.17	22.17

Table 10.9 The conducted power measurement results for E-GPRS

GSM 850 8-PSK	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	128	190	251		128	190	251
1 Txslot	27.2	27.0	26.9	-9.03dB	18.17	17.97	17.87
2 Txslots	26.0	25.4	25.3	-6.02dB	19.74	19.14	19.04
3 Txslots	23.4	23.0	22.8	-4.26dB	19.37	18.97	18.77
4 Txslots	22.0	21.7	21.7	-3.01dB	18.97	18.67	18.67
GSM 1900 8-PSK	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	512	661	810		512	661	810
1 Txslot	26.4	25.5	25.7	-9.03dB	17.37	16.47	16.67
2 Txslots	24.1	24.3	24.7	-6.02dB	17.84	18.04	18.44
3 Txslots	22.1	22.4	22.9	-4.26dB	18.07	18.37	18.87
4 Txslots	20.8	21.0	21.3	-3.01dB	17.77	17.97	18.27

NOTES:**1) Division Factors**

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for 850MHz ; 4Txslots for 1900MHz;

10.2. WCDMA Measurement result**Table 10.10 The conducted Power for WCDMA**

Item	band	WCDMA BAND II result(dBm)		
	ARFCN	9662 (1852.4MHz)	9800 (1880.0MHz)	9938 (1907.6MHz)
WCDMA	\	22.11	21.94	21.93
HSDPA	1	20.34	20.36	20.16
	2	20.34	20.40	20.10
	3	21.30	21.19	20.99
	4	19.73	19.64	19.49
HSUPA	1	21.78	21.71	21.44
	2	21.25	21.14	20.92
	3	21.17	21.06	20.84
	4	20.70	20.61	20.42
	5	20.70	20.57	20.36
Item	band	WCDMA BAND V result(dBm)		
	ARFCN	Channel 4132 (826.4MHz)	Channel 4183 (836.6MHz)	Channel 4233 (846.6MHz)
WCDMA	\	22.76	22.89	22.76
HSDPA	1	21.74	21.86	21.73
	2	21.72	21.84	21.67
	3	21.27	21.35	21.23
	4	21.25	21.32	21.2
HSUPA	1	19.81	19.87	19.75
	2	19.76	19.87	19.82
	3	20.78	20.85	20.75
	4	19.27	19.39	19.27
	5	21.73	21.91	21.79

10.3. Wi-Fi and BT Measurement result

Table 10.11 The conducted power for Bluetooth

GFSK			
Channel	Ch0 (2402 MHz)	Ch39 (2441MHz)	CH78 (2480MHz)
Conducted Output Power (dBm)	3.954	3.618	3.519
$\pi/4$ DQPSK			
Channel	Ch0 (2402 MHz)	Ch39 (2441MHz)	CH78 (2480MHz)
Conducted Output Power (dBm)	3.061	2.68	2.497
8DPSK			
Channel	Ch0 (2402 MHz)	Ch39 (2441MHz)	CH78 (2480MHz)
Conducted Output Power (dBm)	3.069	2.672	2.497

Table 10.16: The conducted power for Bluetooth4.0

GFSK			
Channel	Ch0 (2402 MHz)	Ch19 (2440MHz)	CH39 (2480MHz)
Conducted Output Power (dBm)	3.845	3.517	3.349

NOTE: According to KDB447498 D01 BT standalone SAR are not required, because maximum average output power is less than 10mW.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [$\sqrt{f(\text{GHz})/x}$ W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

SAR head value of BT is 0.104 W/Kg. SAR body value of BT is 0.052 W/Kg.

The default power measurement procedures are:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting, the duty cycle is 100%.

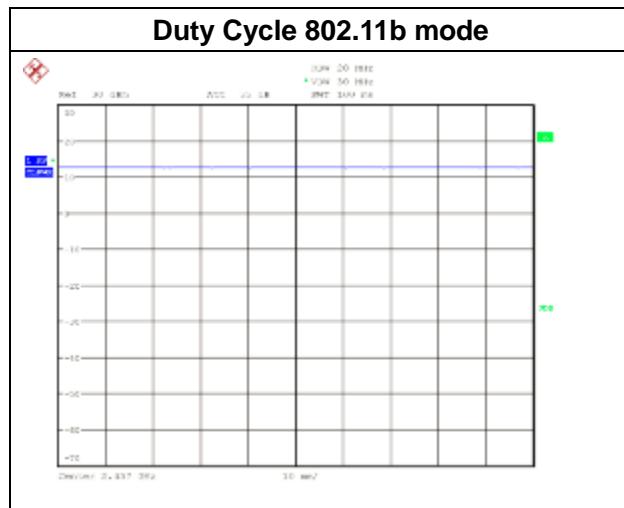


Table 10.17: The average conducted power for WiFi

Mode	Channel	Frequency	Average power(dBm)
802.11 b	1	2412 MHZ	21.84
	6	2437 MHZ	21.95
	11	2462 MHZ	22.10
802.11 g	1	2412 MHZ	21.13
	6	2437 MHZ	21.34
	11	2462 MHZ	21.61
802.11 n 20M	1	2412 MHZ	21.05
	6	2437 MHZ	21.23
	11	2462 MHZ	21.62

802.11 n 40M	3	2422 MHZ	19.12
	6	2437 MHZ	19.35
	9	2452 MHZ	19.69

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
- b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.


11. Simultaneous TX SAR Considerations

11.1. Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

11.2. Transmit Antenna Separation Distances

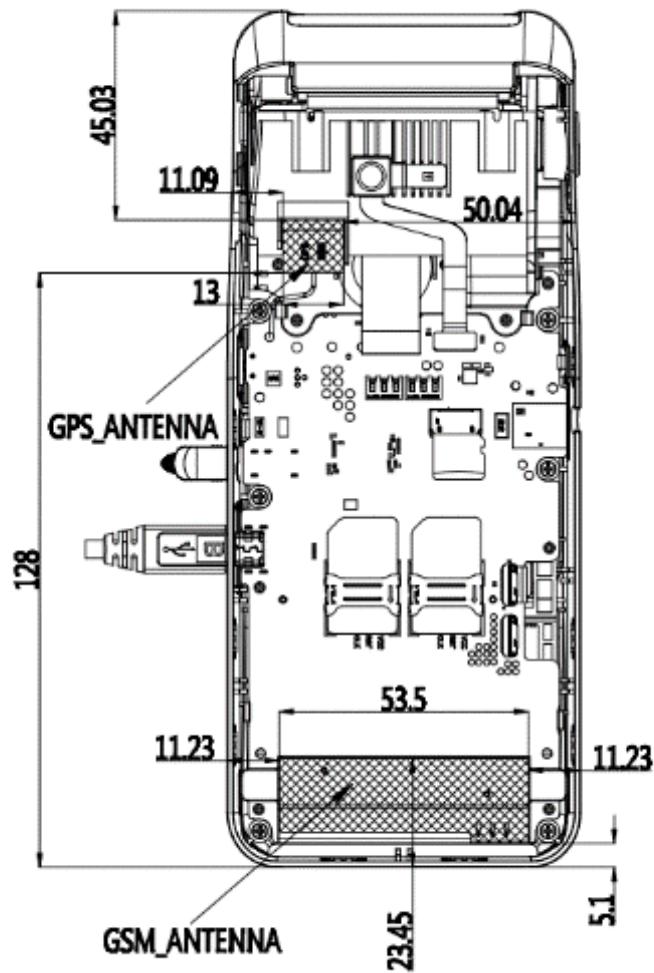

11.3. Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW.

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \cdot \sqrt{f(\text{GHz})} \leq 3.0$$

Based on the above equation, Bluetooth SAR was not required:

Evaluation=0.782 <3.0

Based on the above equation, WiFi SAR was required:

Evaluation=55.72 >3.0

11.4. SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR Measurement Positions						
Antenna Mode	Phantom	Ground	Left	Right	Top	Bottom
WWAN	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	No	No

12. SAR Test Result

Table 12.1: SAR Values (GSM 850 MHz Band-Body)

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
836.8	190	GPRS 4TS	Class12	Toward Phantom	0	/	28.1	29.5	1.380	0.127	0.175	0.08
836.8	190	GPRS 4TS	Class12	Cheek Toward Ground	0	/	28.1	29.5	1.380	0.332	0.458	-0.15
836.8	190	GPRS 4TS	Class12	Tilt Toward Ground	0	/	28.1	29.5	1.380	0.668	0.922	-0.18
N02 Hotspot												
836.8	190	GPRS 4TS	Class12	Toward Left	0	/	28.1	29.5	1.380	0.168	0.232	0.14
836.8	190	GPRS 4TS	Class12	Toward Right	0	/	28.1	29.5	1.380	0.356	0.491	-0.09
836.8	190	GPRS 4TS	Class12	Toward Bottom	0	/	28.1	29.5	1.380	0.547	0.755	-0.11
848.6	251	GPRS 4TS	Class12	Tilt Toward Ground	0	1	28.2	29.5	1.349	0.728	0.982	-0.05
824.2	128	GPRS 4TS	Class12	Tilt Toward Ground	0	/	28.2	29.5	1.349	0.670	0.904	-0.03
Worse Case of N13												
848.6	251	GPRS 4TS	Class12	Tilt Toward Ground	0	2	28.2	29.5	1.349	0.763	1.029	-0.05

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
836.8	190	GPRS 4TS	Class12	Toward Phantom	5	/	28.1	29.5	1.380	0.124	0.171	0.08
836.8	190	GPRS 4TS	Class12	Cheek Toward Ground	5	/	28.1	29.5	1.380	0.264	0.364	0.12
836.8	190	GPRS 4TS	Class12	Tilt Toward Ground	5	/	28.1	29.5	1.380	0.706	0.975	0.03
N02 Hotspot												
836.8	190	GPRS 4TS	Class12	Toward Left	5	/	28.1	29.5	1.380	0.149	0.206	0.10
836.8	190	GPRS 4TS	Class12	Toward Right	5	/	28.1	29.5	1.380	0.379	0.523	0.08
836.8	190	GPRS 4TS	Class12	Toward Bottom	5	/	28.1	29.5	1.380	0.453	0.625	-0.08
848.6	251	GPRS 4TS	Class12	Tilt Toward Ground	5	/	28.2	29.5	1.349	0.738	0.996	0.17
824.2	128	GPRS 4TS	Class12	Tilt Toward Ground	5	3	28.2	29.5	1.349	0.751	1.013	-0.04
Worse Case of SIM2												
824.2	128	GPRS 4TS	Class12	Tilt Toward Ground	5	/	28.2	29.5	1.349	0.710	0.958	-0.02
Worse Case of N13												
824.2	128	GPRS 4TS	Class12	Tilt Toward Ground	5	4	28.2	29.5	1.349	0.731	0.986	0.19

Table 12.2: SAR Values (GSM 1900 MHz Band-Body)

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
1880	661	GPRS 4TS	Class12	Toward Phantom	0	/	25.2	26.0	1.202	0.226	0.272	0.13
1880	661	GPRS 4TS	Class12	Cheek Toward Ground	0	/	25.2	26.0	1.202	0.366	0.440	0.05
1880	661	GPRS 4TS	Class12	Tilt Toward Ground	0	5	25.2	26.0	1.202	0.633	0.761	0.12
N02 Hotspot												
1880	661	GPRS 4TS	Class12	Toward Left	0	/	25.2	26.0	1.202	0.594	0.714	-0.11
1880	661	GPRS 4TS	Class12	Toward Right	0	/	25.2	26.0	1.202	0.102	0.123	0.13
1880	661	GPRS 4TS	Class12	Toward Bottom	0	/	25.2	26.0	1.202	0.381	0.458	-0.06
1909.8	810	GPRS 4TS	Class12	Tilt Toward Ground	0	/	25.2	26.0	1.202	0.599	0.720	0.15
1850.2	512	GPRS 4TS	Class12	Tilt Toward Ground	0	/	25.3	26.0	1.175	0.565	0.664	0.18
Worse Case of N13												
1880	661	GPRS 4TS	Class12	Tilt Toward Ground	0	6	25.2	26.0	1.202	0.733	0.881	0.08

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
1880	661	GPRS 4TS	Class12	Toward Phantom	5	/	25.2	26.0	1.202	0.225	0.271	0.10
1880	661	GPRS 4TS	Class12	Cheek Toward Ground	5	/	25.2	26.0	1.202	0.341	0.410	0.11
1880	661	GPRS 4TS	Class12	Tilt Toward Ground	5	/	25.2	26.0	1.202	0.479	0.576	-0.04
N02 Hotspot												
1880	661	GPRS 4TS	Class12	Toward Left	5	/	25.2	26.0	1.202	0.402	0.483	-0.01
1880	661	GPRS 4TS	Class12	Toward Right	5	/	25.2	26.0	1.202	0.128	0.154	0.13
1880	661	GPRS 4TS	Class12	Toward Bottom	5	/	25.2	26.0	1.202	0.295	0.355	0.08
1909.8	810	GPRS 4TS	Class12	Tilt Toward Ground	5	7	25.2	26.0	1.202	0.549	0.660	0.07
1850.2	512	GPRS 4TS	Class12	Tilt Toward Ground	5	/	25.3	26.0	1.175	0.510	0.599	0.10
Worse Case of N13												
1909.8	810	GPRS 4TS	Class12	Tilt Toward Ground	5	8	25.2	26.0	1.202	0.593	0.713	0.10

Table 12.3: SAR Values (WCDMA Band II-Body)

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
1880	9400	Band2	12.2kbps RMC	Toward Phantom	0	/	21.94	23.0	1.276	0.237	0.303	-0.02
1880	9400	Band2	12.2kbps RMC	Cheek Toward Ground	0	/	21.94	23.0	1.276	0.381	0.486	0.05
1880	9400	Band2	12.2kbps RMC	Tilt Toward Ground	0	/	21.94	23.0	1.276	0.720	0.919	-0.02
N02 Hotspot												
1880	9400	Band2	12.2kbps RMC	Toward Left	0	/	21.94	23.0	1.276	0.628	0.802	0.04
1880	9400	Band2	12.2kbps RMC	Toward Right	0	/	21.94	23.0	1.276	0.096	0.123	0.11
1880	9400	Band2	12.2kbps RMC	Toward Bottom	0	/	21.94	23.0	1.276	0.403	0.514	-0.05
1907.6	9538	Band2	12.2kbps RMC	Tilt Toward Ground	0	/	21.93	23.0	1.279	0.774	0.990	0.13
1852.4	9262	Band2	12.2kbps RMC	Tilt Toward Ground	0	/	22.11	23.0	1.227	0.782	0.960	-0.02
1880	9800	Band II	12.2kbps RMC	Toward Bottom	0	/	21.31	21.5	1.045	0.757	0.791	0.11
Worse Case of SIM2												
1907.6	9538	Band2	12.2kbps RMC	Tilt Toward Ground	9	/	21.93	23.0	1.279	0.811	1.038	0.03
Worse Case of N13												
1907.6	9538	Band2	12.2kbps RMC	Tilt Toward Ground	10	/	21.93	23.0	1.279	0.813	1.040	0.18

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
1880	9400	Band2	12.2kbps RMC	Toward Phantom	5	/	21.94	23.0	1.276	0.281	0.359	-0.15
1880	9400	Band2	12.2kbps RMC	Cheek Toward Ground	5	/	21.94	23.0	1.276	0.302	0.385	-0.04
1880	9400	Band2	12.2kbps RMC	Tilt Toward Ground	5	/	21.94	23.0	1.276	0.497	0.634	-0.12
N02 Hotspot												
1880	9400	Band2	12.2kbps RMC	Toward Left	5	/	21.94	23.0	1.276	0.378	0.482	0.02
1880	9400	Band2	12.2kbps RMC	Toward Right	5	/	21.94	23.0	1.276	0.0654	0.083	0.10
1880	9400	Band2	12.2kbps RMC	Toward Bottom	5	/	21.94	23.0	1.276	0.301	0.384	0.17
1907.6	9538	Band2	12.2kbps RMC	Tilt Toward Ground	5	11	21.93	23.0	1.279	0.588	0.752	0.11
1852.4	9262	Band2	12.2kbps RMC	Tilt Toward Ground	5	/	22.11	23.0	1.227	0.604	0.741	0.17
Worse Case of N13												
1907.6	9538	Band2	12.2kbps RMC	Tilt Toward Ground	5	12	21.93	23.0	1.279	0.736	0.942	-0.03

Table 12.4: SAR Values (WCDMA Band V-Body)

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
837	4185	Band5	12.2kbps RMC	Toward Phantom	0	/	22.89	23.5	1.151	0.0681	0.078	-0.12
837	4185	Band5	12.2kbps RMC	Cheek Toward Ground	0	/	22.89	23.5	1.151	0.321	0.369	0.08
837	4185	Band5	12.2kbps RMC	Tilt Toward Ground	0	/	22.89	23.5	1.151	0.693	0.798	-0.08
N02 Hotspot												
837	4185	Band5	12.2kbps RMC	Toward Left	0	/	22.89	23.5	1.151	0.0827	0.095	-0.06
837	4185	Band5	12.2kbps RMC	Toward Right	0	/	22.89	23.5	1.151	0.241	0.277	0.01
837	4185	Band5	12.2kbps RMC	Toward Bottom	0	/	22.89	23.5	1.151	0.332	0.382	-0.07
846.6	4233	Band5	12.2kbps RMC	Tilt Toward Ground	0	/	22.76	23.5	1.186	0.698	0.828	0.03
826.4	4132	Band5	12.2kbps RMC	Tilt Toward Ground	0	13	22.76	23.5	1.186	0.726	0.861	0.10
Worse Case of N13												
826.4	4132	Band5	12.2kbps RMC	Tilt Toward Ground	0	14	22.76	23.5	1.186	0.681	0.808	-0.15

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
837	4185	Band5	12.2kbps RMC	Toward Phantom	5	/	22.89	23.5	1.151	0.0803	0.092	0.07
837	4185	Band5	12.2kbps RMC	Cheek Toward Ground	5	/	22.89	23.5	1.151	0.284	0.327	-0.07
837	4185	Band5	12.2kbps RMC	Tilt Toward Ground	5	/	22.89	23.5	1.151	0.695	0.800	-0.15
N02 Hotspot												
837	4185	Band5	12.2kbps RMC	Toward Left	5	/	22.89	23.5	1.151	0.0662	0.076	0.10
837	4185	Band5	12.2kbps RMC	Toward Right	5	/	22.89	23.5	1.151	0.223	0.257	0.12
837	4185	Band5	12.2kbps RMC	Toward Bottom	5	/	22.89	23.5	1.151	0.276	0.318	-0.24
846.6	4233	Band5	12.2kbps RMC	Tilt Toward Ground	5	15	22.76	23.5	1.186	0.777	0.921	0.03
826.4	4132	Band5	12.2kbps RMC	Tilt Toward Ground	5	/	22.76	23.5	1.186	0.614	0.728	0.13
Worse Case of N13												
846.6	4233	Band5	12.2kbps RMC	Tilt Toward Ground	5	16	22.76	23.5	1.186	0.672	0.799	0.17

Table 12.5 SAR Values (Wi-Fi 802.11b - Body)

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
2437	6	Wi-Fi 2450	802.11b	Toward Phantom	0	/	21.95	22.5	1.135	0.0373	0.042	0.11
2437	6	Wi-Fi 2450	802.11b	Cheek Toward Ground	0	/	21.95	22.5	1.135	0.144	0.163	0.08
N02 Hotspot												
2437	6	Wi-Fi 2450	802.11b	Toward Right	0	17	21.95	22.5	1.135	0.488	0.554	0.04
2462	11	Wi-Fi 2450	802.11b	Toward Right	0	/	22.10	22.5	1.096	0.398	0.436	0.12
2412	1	Wi-Fi 2450	802.11b	Toward Right	0	/	21.84	22.5	1.164	0.366	0.426	0.15
Worse Case of N13												
2437	6	Wi-Fi 2450	802.11b	Toward Right	0	18	21.95	22.5	1.135	0.448	0.508	0.11

Frequency		Mode /Band	Service /Headset	Test Position	Spacing (mm)	Figure No.	Measured average power (dBm)	Maximum allowed Power (dBm)	Scaling factor	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
MHz	Ch.											
N02 Hotspot & Body worn												
2437	6	Wi-Fi 2450	802.11b	Toward Phantom	5	/	21.95	22.5	1.135	0.0468	0.053	1.20
2437	6	Wi-Fi 2450	802.11b	Cheek Toward Ground	5	/	21.95	22.5	1.135	0.159	0.180	0.12
N02 Hotspot												
2437	6	Wi-Fi 2450	802.11b	Toward Right	5	19	21.95	22.5	1.135	0.453	0.514	0.07
2462	11	Wi-Fi 2450	802.11b	Toward Right	5	/	22.10	22.5	1.096	0.339	0.372	0.48
2412	1	Wi-Fi 2450	802.11b	Toward Right	5	/	21.84	22.5	1.164	0.414	0.482	0.19
Worse Case of N13												
2437	6	Wi-Fi 2450	802.11b	Toward Right	5	20	21.95	22.5	1.135	0.477	0.541	0.16

13. Evaluation of Simultaneous

Table13.1 Simultaneous transmission SAR

Transmission SAR(W/Kg)								
Test Position		GSM 850	GSM 1900	WCDMA Band2	WCDMA Band5	2.4G WIFI	BT	SUM
Body 5mm	Phantom Side	0.171	0.271	0.359	0.092	0.053	0.102	0.461
	Cheek Ground Side	0.364	0.41	0.385	0.327	0.18	0.102	0.590
	Tilt Ground Side	1.013	0.713	0.942	0.921	--	0.102	1.115
	Left Side	0.206	0.483	0.482	0.076	--	0.102	0.585
	Right Side	0.523	0.154	0.083	0.257	0.541	0.102	1.064
	Bottom Side	0.625	0.355	0.384	0.318	--	0.102	0.727
	Top Side	--	--	--	--	--	0.102	0.102
Body 0mm	Phantom Side	0.175	0.272	0.303	0.078	0.042	0.052	0.355
	Cheek Ground Side	0.458	0.44	0.486	0.369	0.163	0.052	0.649
	Tilt Ground Side	1.029	0.881	1.04	0.861	--	0.052	1.092
	Left Side	0.232	0.714	0.802	0.095	--	0.052	0.854
	Right Side	0.491	0.123	0.123	0.277	0.554	0.052	1.045
	Bottom Side	0.755	0.458	0.514	0.382	--	0.052	0.807
	Top Side	--	--	--	--	--	0.052	0.052

According to the conducted power measurement result, we can draw the conclusion that: stand-alone SAR for WiFi should be performed. Then, simultaneous transmission SAR for WiFi/BT is considered with measurement results of GSM/WCDMA and WiFi/BT.

According to the above table, the sum of reported SAR values for GSM/WCDMA and BT<1.6W/kg. So the simultaneous transmission SAR is not required for WiFi/BT transmitter.

14. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: According to the KDB 865664 D01 repeated measurement is not required when the original highest measured SAR is $< 0.8 \text{ W/kg}$.

15. Measurement Uncertainty

Measurement uncertainty for 750 MHz to 3 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	$c_{i(1g)}$	Std. Unc. (1-g)	v_i or v_{eff}
Measurement System						
Probe Calibration ($k=1$)	5.4	Normal	2	1	5.40	∞
Probe Isotropy	4.70	Rectangular	$\sqrt{3}$	0.7	1.90	∞
Modulation Response	2.40	Rectangular	$\sqrt{3}$	1	1.39	∞
Hemispherical Isotropy	2.60	Rectangular	$\sqrt{3}$	0.7	1.05	∞
Boundary Effect	1.00	Rectangular	$\sqrt{3}$	1	0.58	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	2.71	∞
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.58	∞
Readout Electronics	0.30	Normal	1	1	0.30	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	0.46	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1.50	∞
RF Ambient Noise	0.00	Rectangular	$\sqrt{3}$	1	0.00	∞
RF Ambient Reflections	0.00	Rectangular	$\sqrt{3}$	1	0.00	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	0.23	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1.67	∞
Post-processing	1.00	Rectangular	$\sqrt{3}$	1	0.58	∞
Test sample Related						
Test sample Positioning	1.2	Normal	1	1	1.2	5
Device Holder Uncertainty	3.2	Normal	1	1	3.2	71
Power drift	5	Rectangular	$\sqrt{3}$	1	2.89	∞
Power Scaling	0	Rectangular	$\sqrt{3}$	1	0.00	∞
Phantom and Tissue Parameters						
Phantom Uncertainty	4	Rectangular	$\sqrt{3}$	1	2.31	∞
SAR correction	1.9	Rectangular	$\sqrt{3}$	1	1.10	∞
Liquid Conductivity (meas)	4.19	Rectangular	1	0.78	3.27	∞
Liquid Permittivity (meas)	4.4	Rectangular	1	0.26	1.14	∞
Temp. unc. - Conductivity	0.18	Rectangular	$\sqrt{3}$	0.78	0.08	∞
Temp. unc. - Permittivity	0.54	Rectangular	$\sqrt{3}$	0.23	0.07	∞
Combined Std. Uncertainty		RSS			9.39	
Expanded STD Uncertainty		$k=2$			18.77%	

System check uncertainty for 750 MHz to 3 GHz averaged over 1 gram						
Uncertainty Component	Uncertainty	Prob.	Div.	$c_{i(1g)}$	Std. Unc. (1-g)	V_i or V_{eff}
Measurement System						
Probe Calibration ($k=1$)	5.40	Normal	1	1	5.40	∞
Probe Isotropy	4.70	Rectangular	$\sqrt{3}$	0.7	1.90	∞
Modulation Response	2.40	Rectangular	$\sqrt{3}$	1	1.39	∞
Hemispherical Isotropy	2.60	Rectangular	$\sqrt{3}$	0.7	1.05	∞
Boundary Effect	1.00	Rectangular	$\sqrt{3}$	1	0.58	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	2.71	∞
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.58	∞
Readout Electronics	0.30	Normal	1	1	0.30	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	0.46	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1.50	∞
RF Ambient Noise	0.00	Rectangular	$\sqrt{3}$	1	0.00	∞
RF Ambient Reflections	0.00	Rectangular	$\sqrt{3}$	1	0.00	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	0.23	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1.67	∞
Post-processing	1.00	Rectangular	$\sqrt{3}$	1	0.58	∞
Field source						
Deviation of the experimental source from numerical source	5.5	Normal	1	1	5.5	∞
Source to liquid distance	2	Rectangular	$\sqrt{3}$	1	1.15	∞
Power drift	5	Rectangular	$\sqrt{3}$	1	2.89	∞
Phantom and Tissue Parameters						
Phantom Uncertainty	4	Rectangular	$\sqrt{3}$	1	2.31	∞
SAR correction	1.9	Rectangular	$\sqrt{3}$	1	1.10	∞
Liquid Conductivity (meas)	4.19	Normal	1	0.78	3.27	∞
Liquid Permittivity (meas)	4.4	Normal	1	0.26	1.14	∞
Temp. unc. - Conductivity	0.18	Rectangular	$\sqrt{3}$	0.78	0.08	∞
Temp. unc. - Permittivity	0.54	Rectangular	$\sqrt{3}$	0.23	0.07	∞
Combined Std. Uncertainty		RSS			10.39	
Expanded STD Uncertainty		$k=2$			20.79%	

16. Main Test Instrument

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	N5242A	MY51221755	Dec 25, 2017	1 year
02	Power meter	NRVD	102257		
03	Power sensor	NRV-Z5	100241	May 11, 2018	1 year
			100644		
04	Signal Generator	E4438C	MY49072044	May 11, 2018	1 Year
05	Amplifier	NTWPA-0086010F	12023024	No Calibration Requested	
06	Coupler	778D	MY4825551	May 11, 2018	1 year
07	BTS	E5515C	MY50266468	Dec 25, 2017	1 year
08	BTS	MT8820C	6201240338	May 11, 2018	1 year
09	E-field Probe	ES3DV3	3252	Aug 31, 2017	1 year
	E-field Probe	ES3DV3	3252	Sep 04, 2018	1 year
10	DAE	SPEAG DAE4	1244	Dec 4,2017	1 year
	Dipole Validation Kit	SPEAG D835V2	4d112	Oct 22, 2015	3 year
		SPEAG D1900V2	5d151	Dec 6,2017	1 year
		SPEAG D2450V2	858	Oct 30,2015	3 year

ANNEX A. GRAPH RESULTS

GPRS 850MHz 4TS Body Toward Ground Tilt High With 0mm

Date/Time: 2018/9/19

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.996$ S/m; $\epsilon_r = 54.101$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GPRS 850MHz 4TS; Frequency: 848.6 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34)

High Tilt Toward Ground GPRS 850MHz 4TS With 0mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.47 W/kg

High Tilt Toward Ground GPRS 850MHz 4TS With 0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 39.38 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.728 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

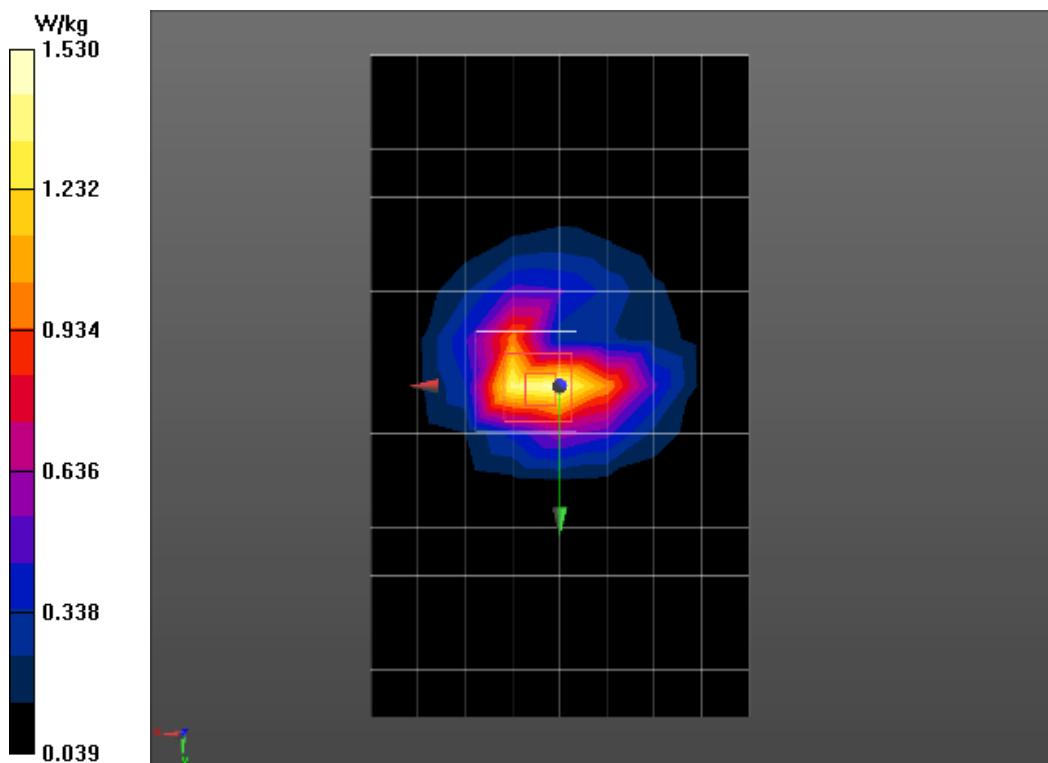


Fig.1

GPRS 850MHz 4TS Body Toward Ground Tilt High With 0mm

Date/Time: 2018/9/19

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.996$ S/m; $\epsilon_r = 54.101$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GRPS 850MHz 4TS; Frequency: 848.6 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34)

High Tilt Toward Ground GPRS 850MHz 4TS With 0mm/Area Scan (9x15x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.69 W/kg

High Tilt Toward Ground GPRS 850MHz 4TS With 0m/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.177 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 1.48 W/kg; SAR(10 g) = 0.763 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

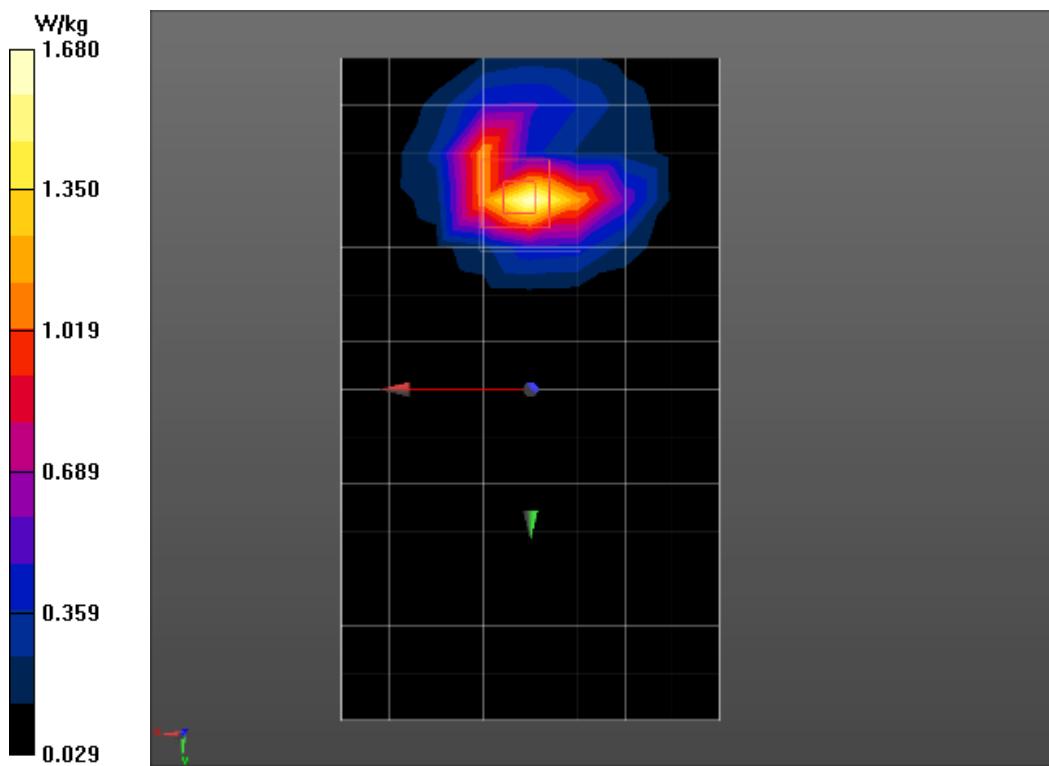


Fig.2

GPRS 850MHz 4TS Body Toward Ground Tilt Low With 5mm

Date/Time: 2018/9/19

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.282$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GPRS 850MHz 4TS; Frequency: 824.2 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34)

Low Tilt Toward Ground GPRS 850MHz 4TS With 5mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.779 W/kg

Low Tilt Toward Ground GPRS 850MHz 4TS With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.641 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.407 W/kg

Maximum value of SAR (measured) = 0.843 W/kg

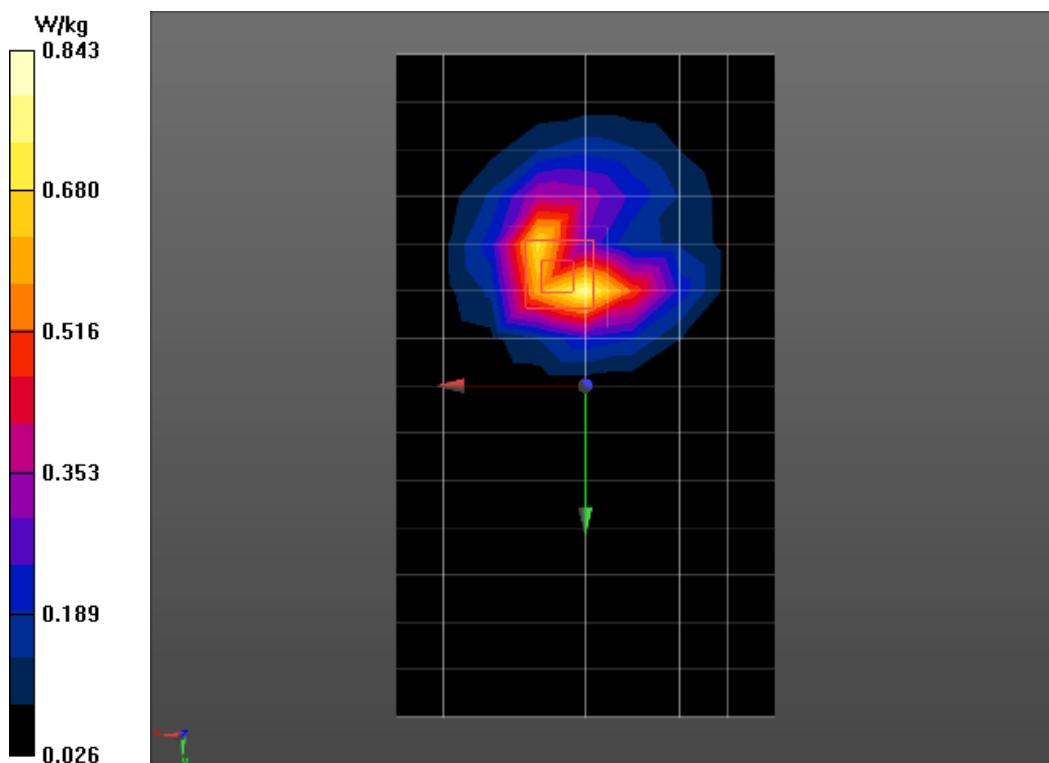


Fig.3

GPRS 850MHz 4TS Body Toward Ground Tilt Low With 5mm

Date/Time: 2018/9/19

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.282$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GPRS 850MHz 4TS; Frequency: 824.2 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34)

Low Tilt Toward Ground GPRS 850MHz 4TS With 5mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.720 W/kg

Low Tilt Toward Ground GPRS 850MHz 4TS With 5mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.994 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

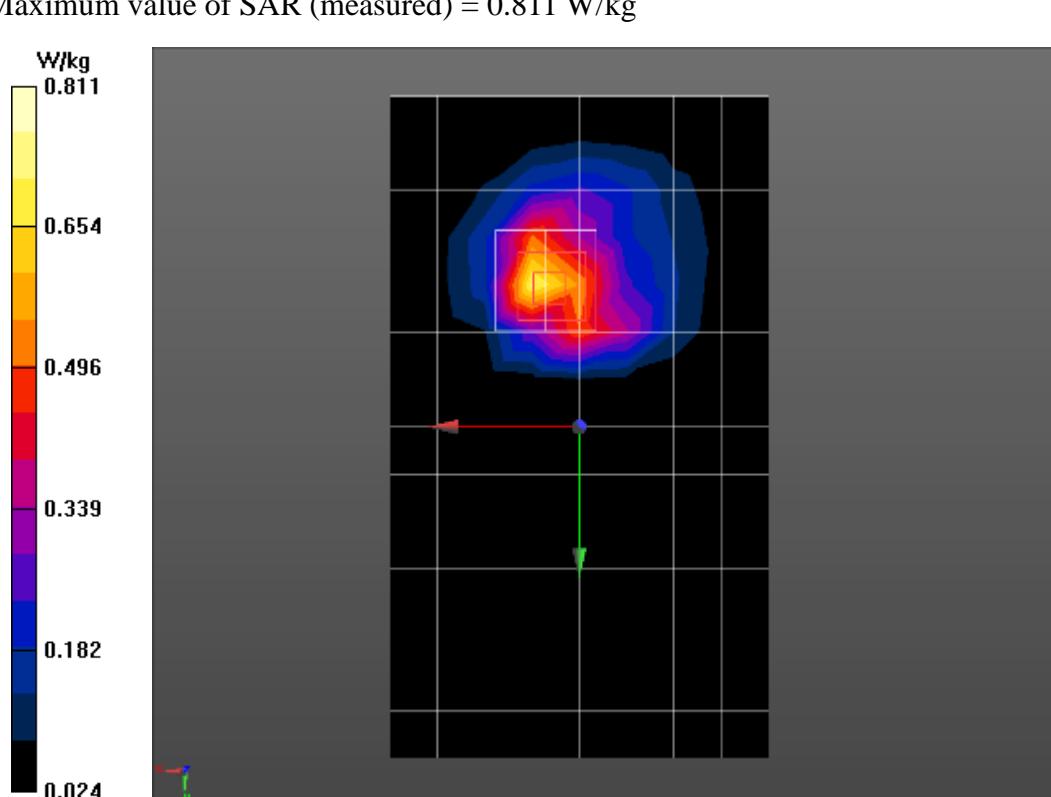


Fig.4

GPRS 1900MHz 4TS Body Toward Ground Tilt Middle With 0mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 52.411$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GRPS 1900MHz 4TS; Frequency: 1880 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

Middle Tilt Toward Ground GPRS 1900MHz 4TS With 0mm/Area Scan

(9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.34 W/kg

Middle Tilt Toward Ground GPRS 1900MHz 4TS With 0mm/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.913 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.34 W/kg; SAR(10 g) = 0.633 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

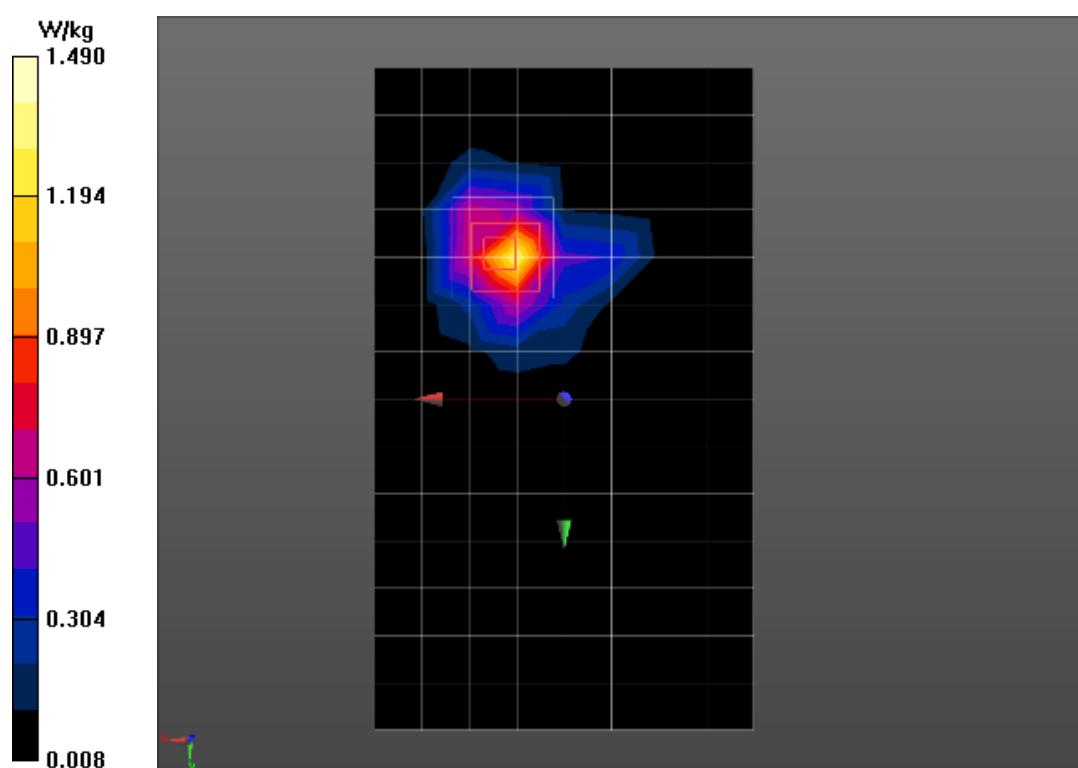


Fig.5

GPRS 1900MHz 4TS Body Toward Ground Tilt Middle With 0mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 52.411$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GRPS 1900MHz 4TS; Frequency: 1880 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

Middle Tilt Toward Ground GPRS 1900MHz 4TS With 0mm/Area Scan

(9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.43 W/kg

Middle Tilt Toward Ground GPRS 1900MHz 4TS With 0mm/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.581 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 1.49 W/kg; SAR(10 g) = 0.733 W/kg

Maximum value of SAR (measured) = 1.73 W/kg

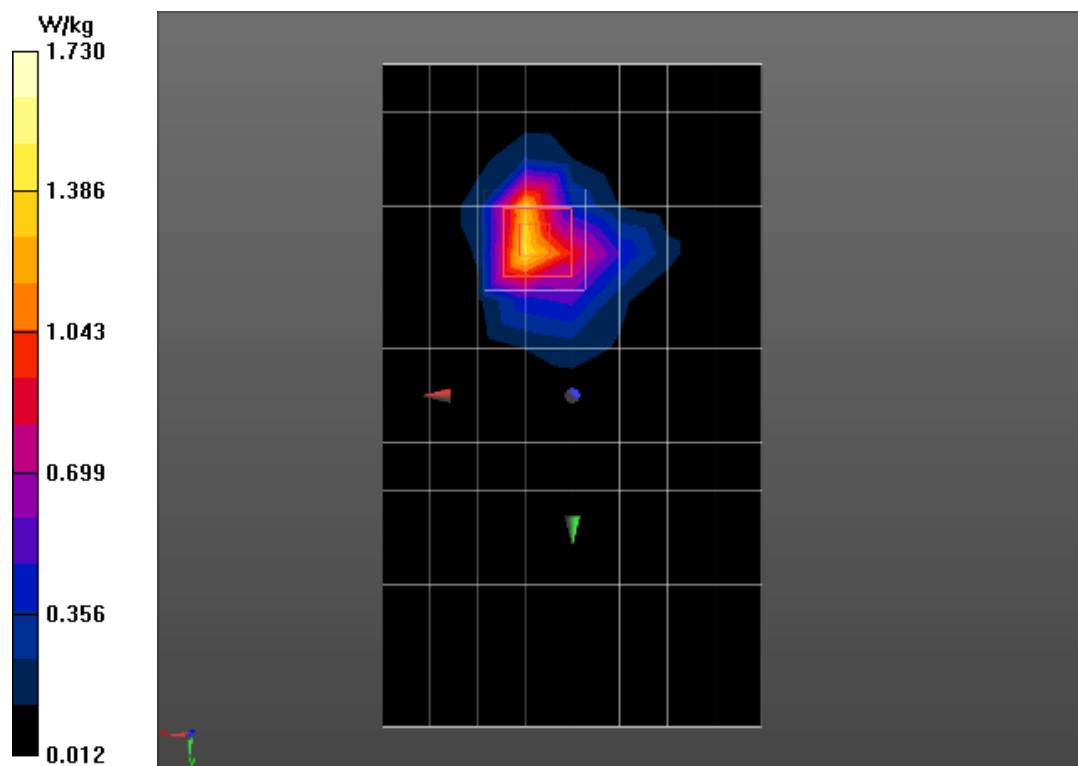


Fig.6

GPRS 1900MHz 4TS Body Toward Ground Tilt High With 5mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.327$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GRPS 1900MHz 4TS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

High Tilt Toward Ground GPRS 1900MHz 4TS With 5mm/Area Scan (9x15x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.578 W/kg

High Tilt Toward Ground GPRS 1900MHz 4TS With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.358 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.947 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 0.598 W/kg

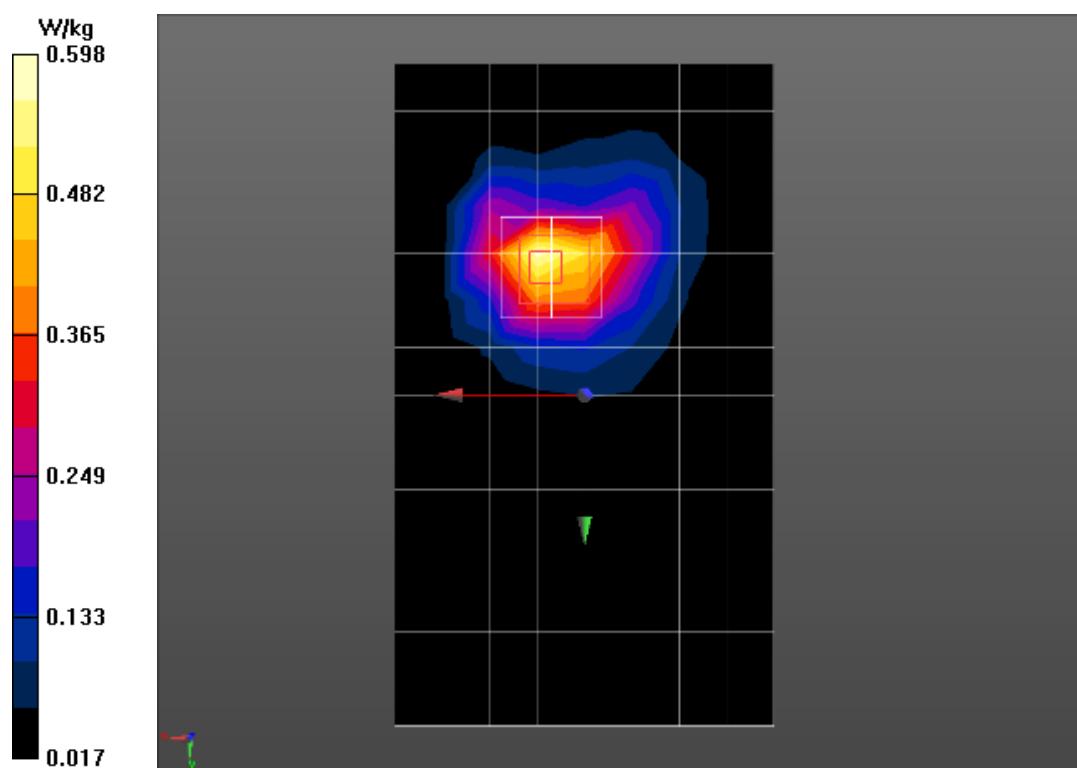


Fig.7

GPRS 1900MHz 4TS Body Toward Ground Tilt High With 5mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.327$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GRPS 1900MHz 4TS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

High Tilt Toward Ground GPRS 1900MHz 4TS With 5mm/Area Scan (9x15x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.585 W/kg

High Tilt Toward Ground GPRS 1900MHz 4TS With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.537 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.323 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

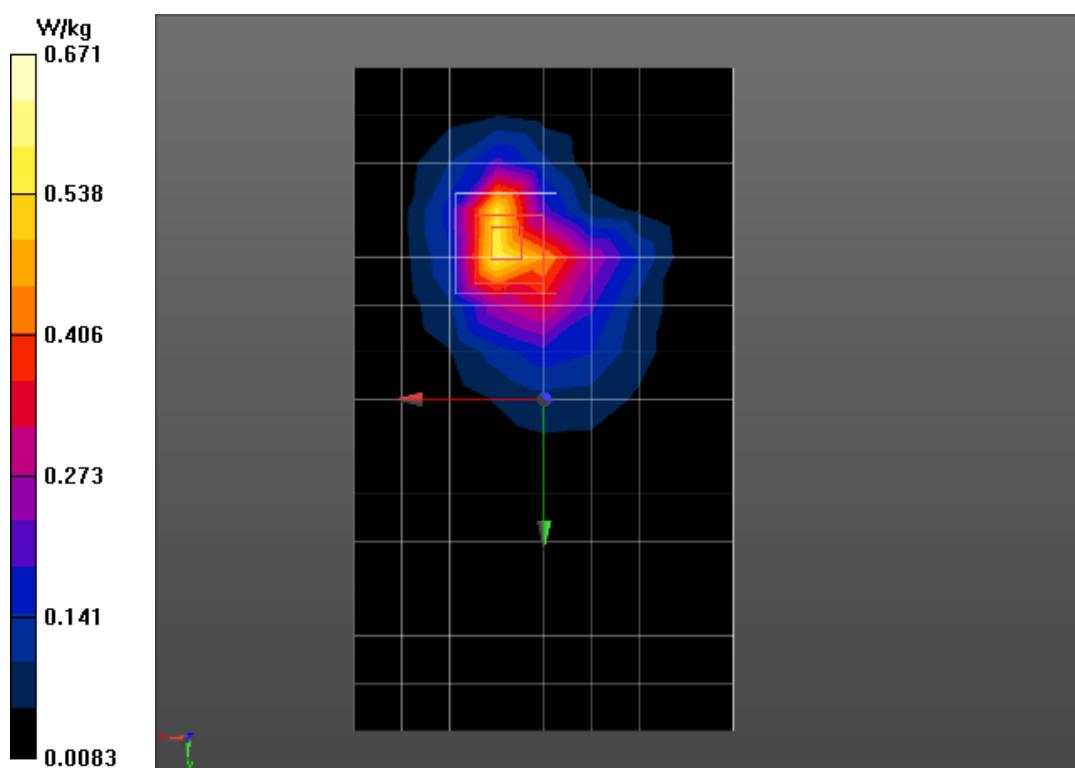


Fig.8

WCDMA Band2 Body Toward Ground Tilt High With 0mm SIM2

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.335$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

High Tilt Toward Ground WCDMA Band 2 With 0mm SIM2/Area Scan

(9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.67 W/kg

High Tilt Toward Ground WCDMA Band 2 With 0mm SIM2/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 1.63 W/kg; SAR(10 g) = 0.811 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

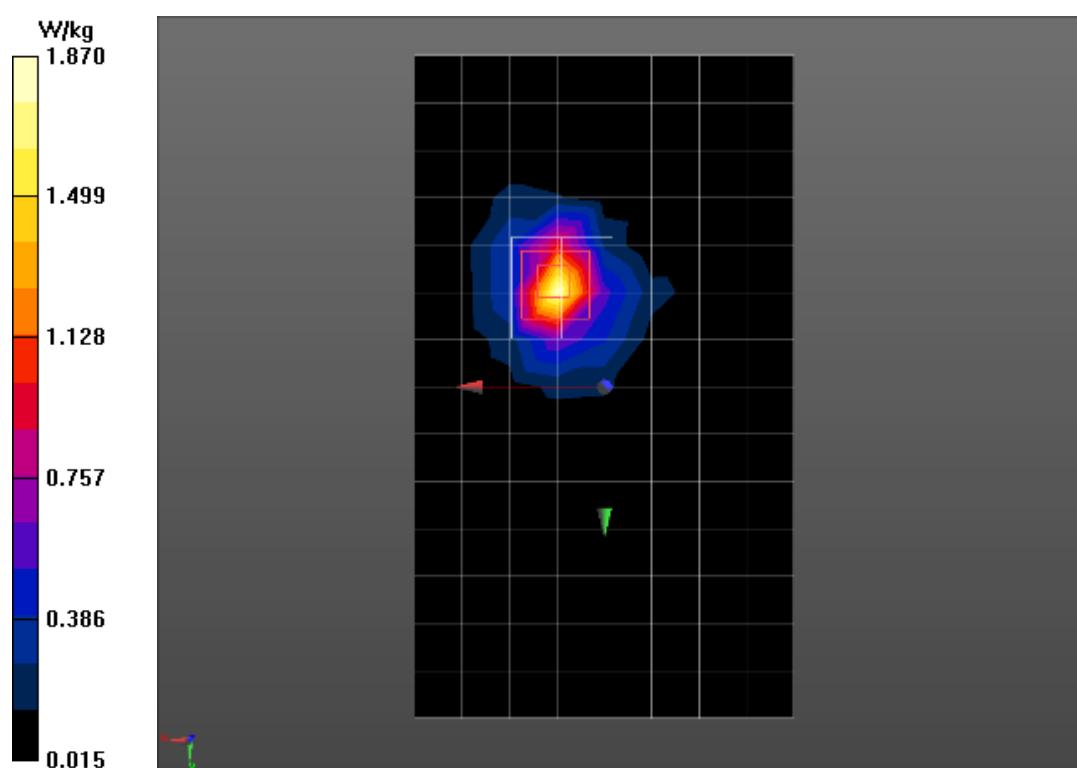


Fig.9

WCDMA Band2 Body Toward Ground Tilt High With 0mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.335$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

High Tilt Toward Ground WCDMA Band 2 With 0mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.59 W/kg

High Tilt Toward Ground WCDMA Band 2 With 0mm/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.84 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 1.64 W/kg; SAR(10 g) = 0.813 W/kg

Maximum value of SAR (measured) = 1.88 W/kg

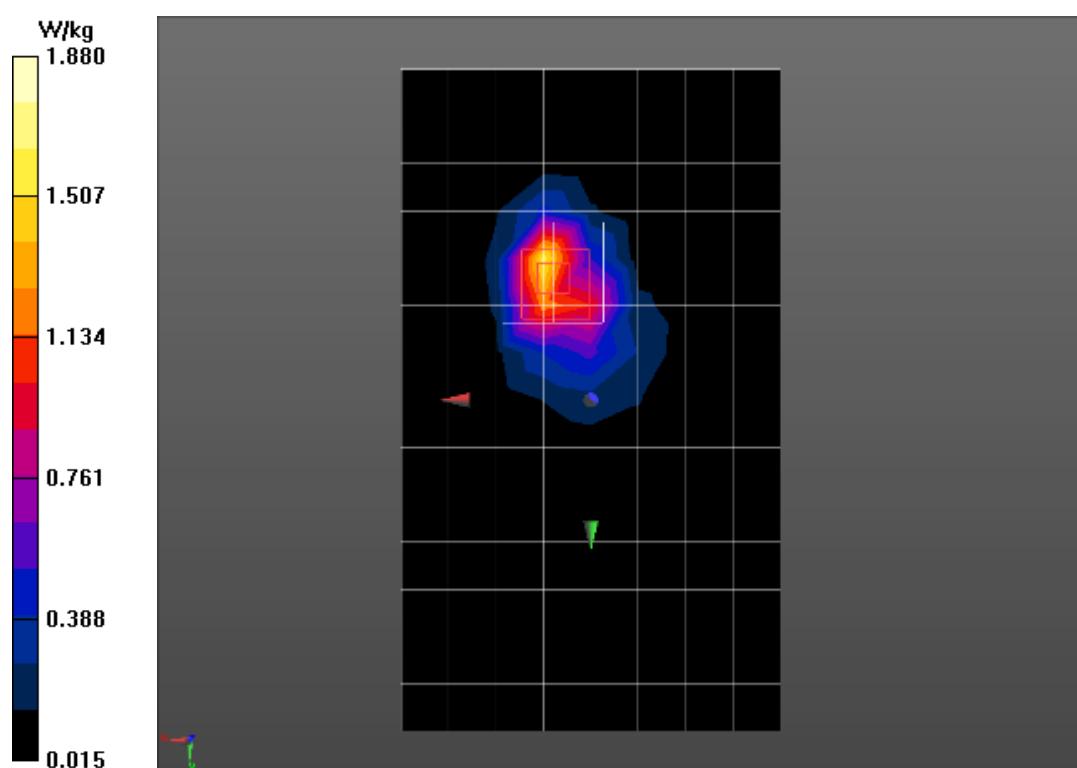


Fig.10

WCDMA Band2 Body Toward Ground Tilt High With 5mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.335$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

High Tilt Toward Ground WCDMA Band 2 With 5mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.578 W/kg

High Tilt Toward Ground WCDMA Band 2 With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.802 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

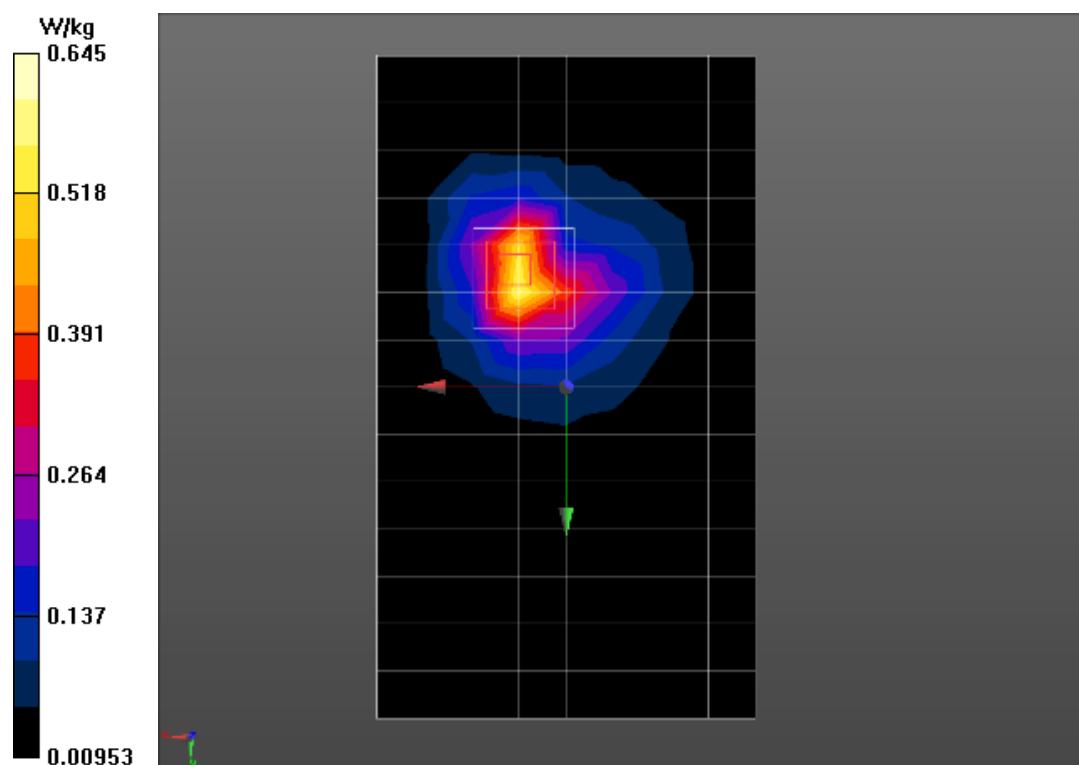


Fig.11

WCDMA Band2 Body Toward Ground Tilt High With 5mm

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 52.335$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

High Tilt Toward Ground WCDMA Band 2 With 5mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.760 W/kg

High Tilt Toward Ground WCDMA Band 2 With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.63 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

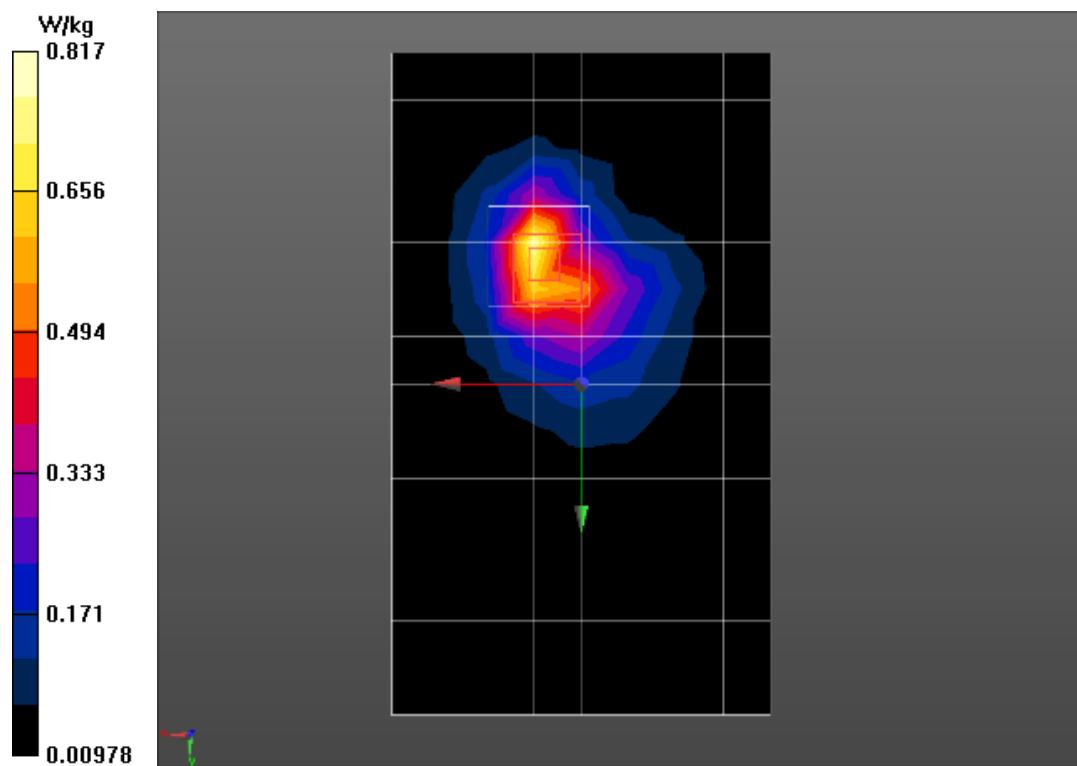


Fig.12

WCDMA Band5 Body Toward Ground Tilt Low With 0mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 54.315$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14)

Low Tilt Toward Ground WCDMA Band 5 With 0mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.62 W/kg

Low Tilt Toward Ground WCDMA Band 5 With 0mm/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.38 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.726 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

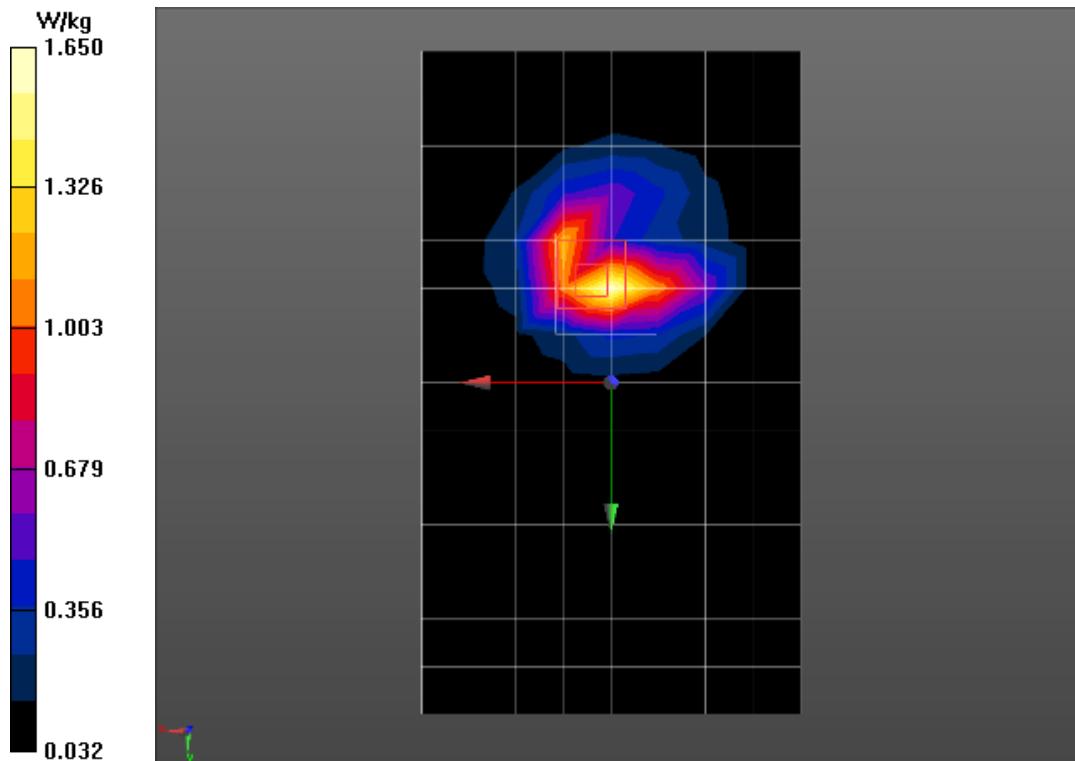


Fig.13

WCDMA Band5 Body Toward Ground Tilt Low With 0mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 54.315$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14)

Low Tilt Toward Ground WCDMA Band 5 With 0mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.48 W/kg

Low Tilt Toward Ground WCDMA Band 5 With 0mm/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.904 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 1.42 W/kg; SAR(10 g) = 0.681 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

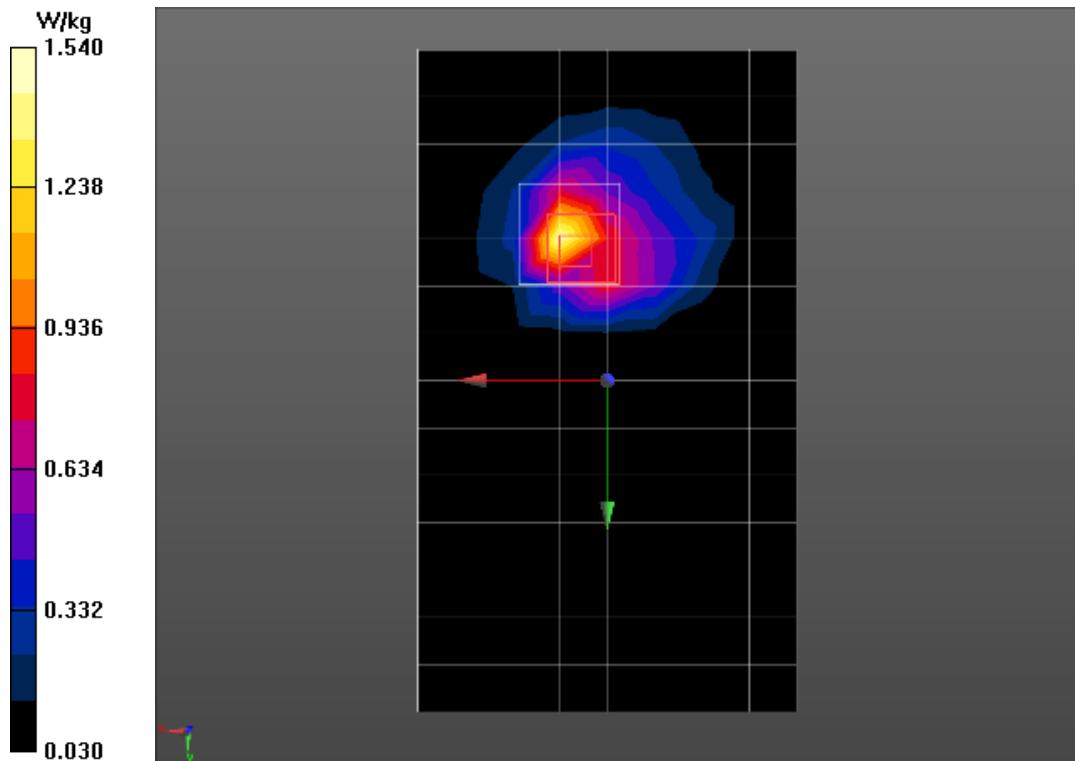


Fig.14

WCDMA Band5 Body Toward Ground Tilt High With 5mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used: $f = 847$ MHz; $\sigma = 0.992$ S/m; $\epsilon_r = 54.109$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14)

High Tilt Toward Ground WCDMA Band 5 With 5mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.800 W/kg

High Tilt Toward Ground WCDMA Band 5 With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.050 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 0.873 W/kg

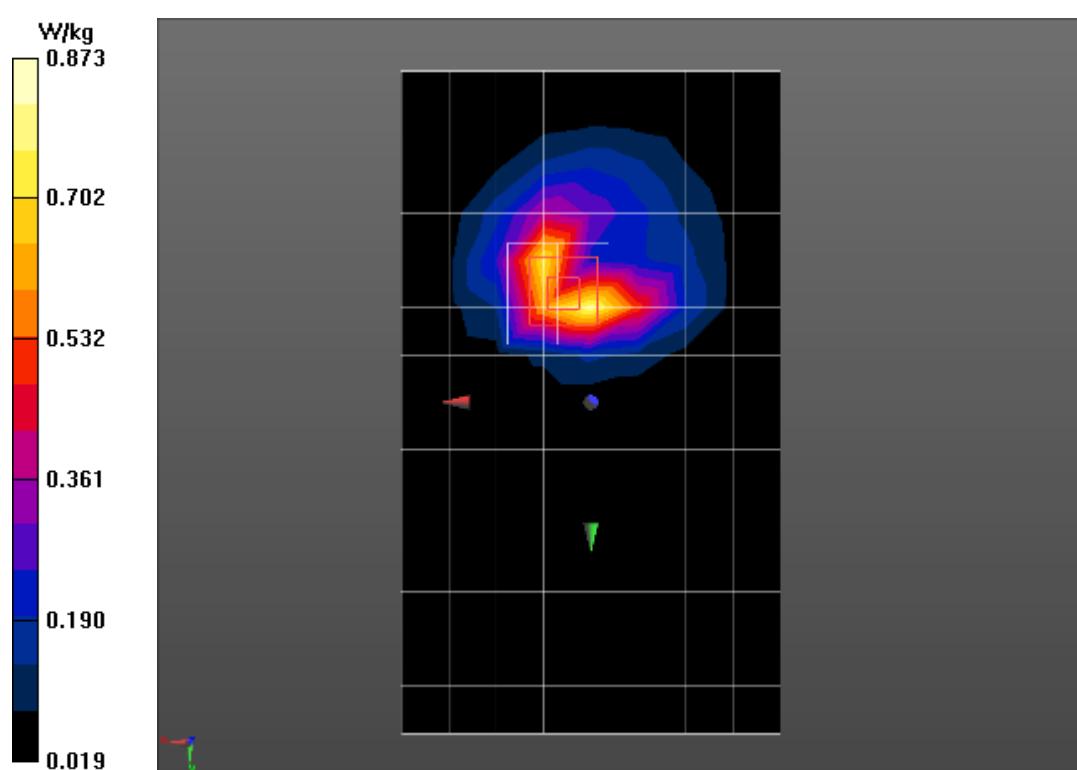


Fig.15

WCDMA Band5 Body Toward Ground Tilt High With 5mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used: $f = 847$ MHz; $\sigma = 0.992$ S/m; $\epsilon_r = 54.109$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Band5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14)

High Tilt Toward Ground WCDMA Band 5 With 5mm/Area Scan (9x15x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.676 W/kg

High Tilt Toward Ground WCDMA Band 5 With 5mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.809 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.758 W/kg

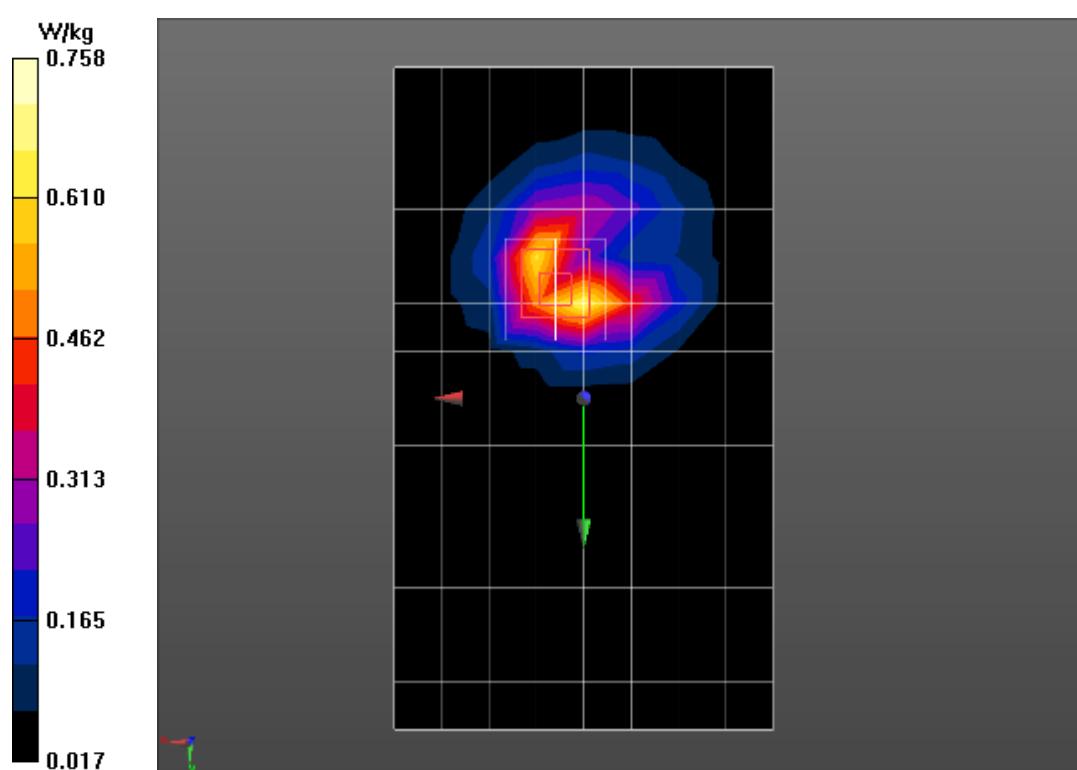


Fig.16

WIFI 802.11b Body Right Middle With 0mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 53.18$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: Wi-Fi; Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.42, 4.42, 4.42)

Middle Right WIFI 802.11b With 0mm/Area Scan (7x18x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.33 W/kg

Middle Right WIFI 802.11b With 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.27 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.488 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

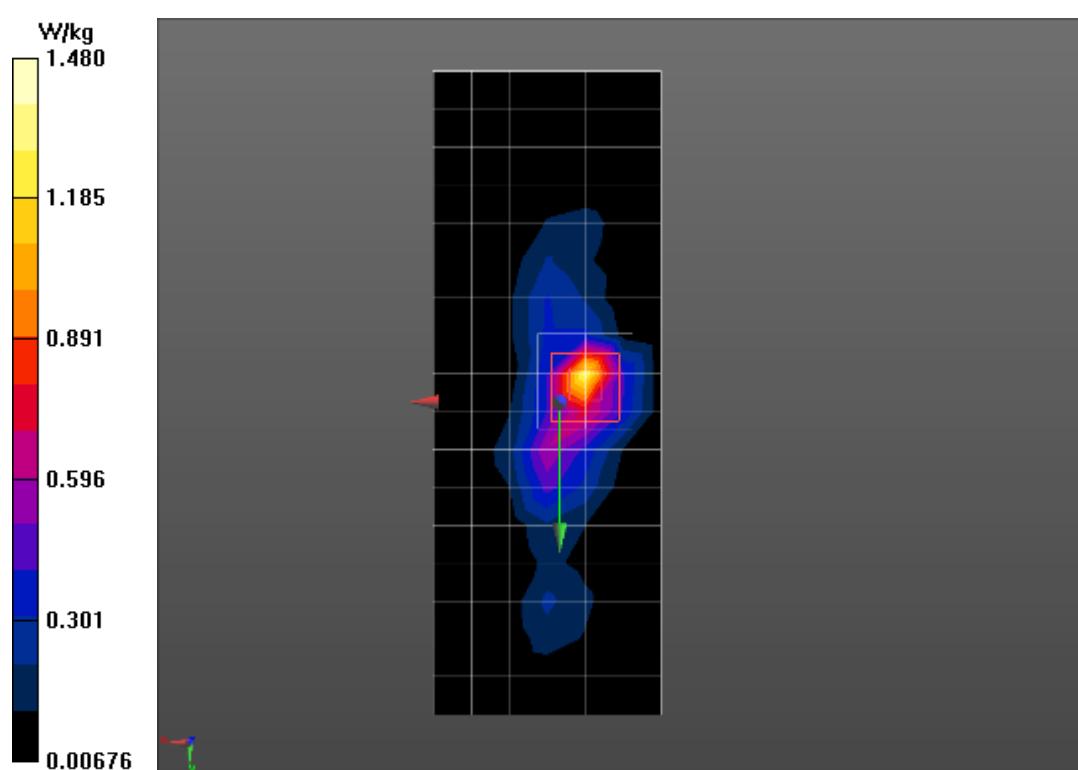


Fig.17

WIFI 802.11b Body Right Middle With 0mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 53.18$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: Wi-Fi; Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.42, 4.42, 4.42)

Middle Right WIFI 802.11b With 0mm/Area Scan (7x18x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.925 W/kg

Middle Right WIFI 802.11b With 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.689 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.448 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

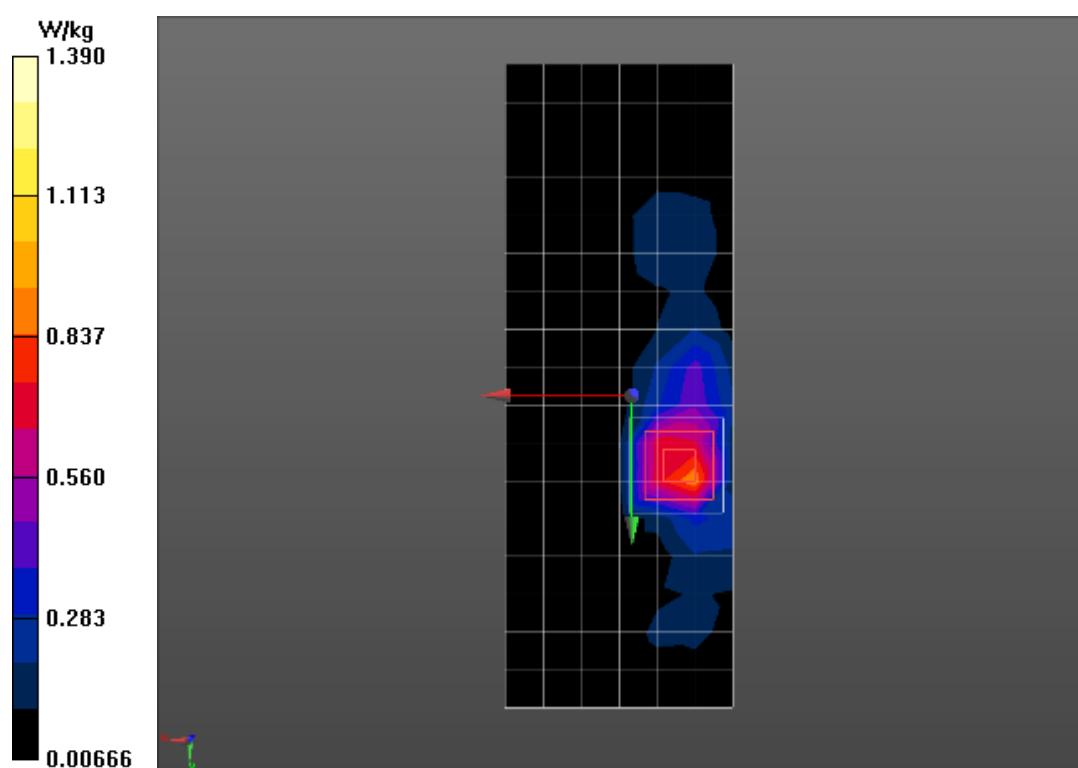


Fig.18

WIFI 802.11b Body Right Middle With 5mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 53.18$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: Wi-Fi; Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.42, 4.42, 4.42)

Middle Right WIFI 802.11b With 5mm/Area Scan (7x18x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.480 W/kg

Middle Right WIFI 802.11b With 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.958 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

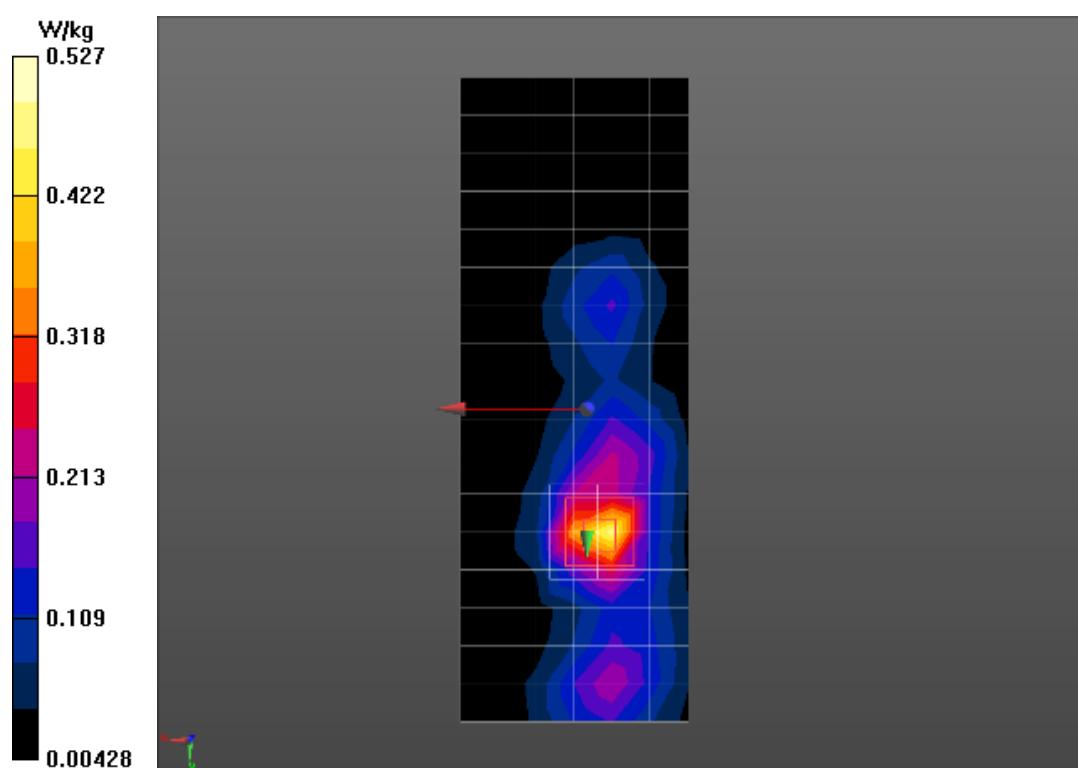


Fig.19

WIFI 802.11b Body Right Middle With 5mm

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 53.18$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: Wi-Fi; Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.42, 4.42, 4.42)

Middle Right WIFI 802.11b With 5mm/Area Scan (7x18x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.424 W/kg

Middle Right WIFI 802.11b With 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.092 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

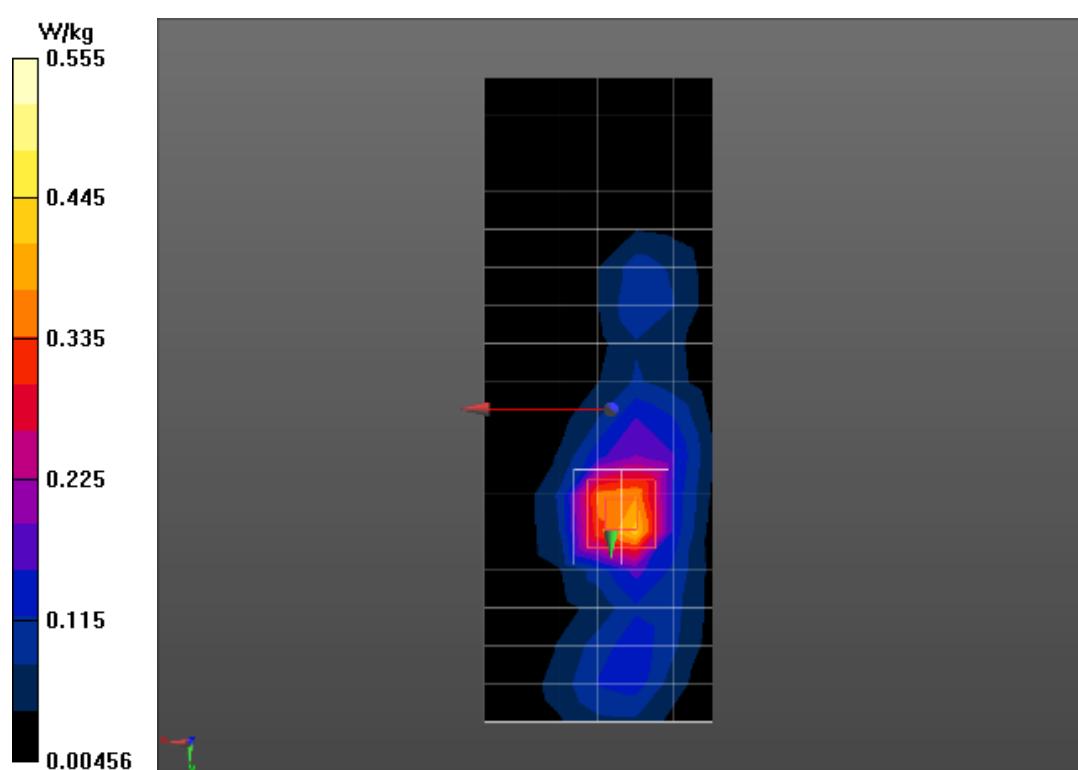


Fig.20

ANNEX B. SYSTEM VALIDATION RESULTS

Body 835MHz

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.981$ S/m; $\epsilon_r = 54.229$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14)

System Check Dipole 835 MHz/Area Scan (5x18x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.51 W/kg

System Check Dipole 835 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 51.58 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

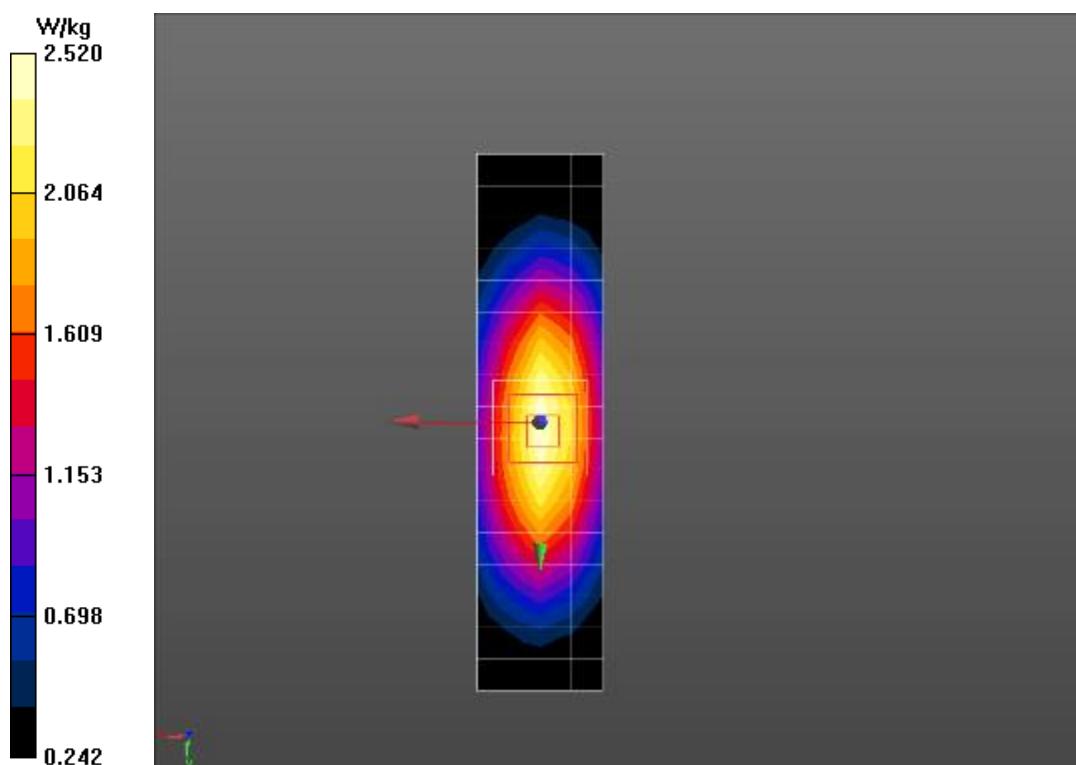

Body 835MHz-1

Date/Time: 2018/9/19

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.983$ S/m; $\epsilon_r = 54.213$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34)

System Check Dipole 835 MHz/Area Scan (5x18x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.40 W/kg

System Check Dipole 835 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 50.69 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

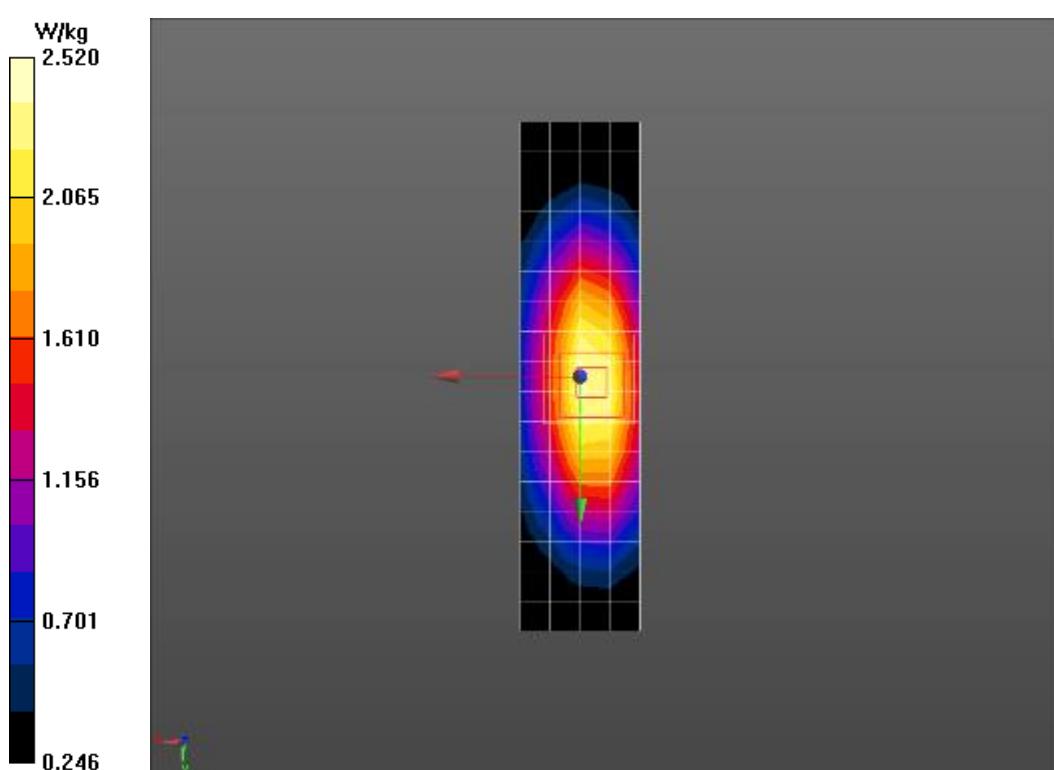

Body 1900MHz

Date/Time: 2018/9/10

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.36$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77)

System Body 1900MHz/Area Scan (7x13x1): Measurement grid: dx=10mm,

dy=10mm

Maximum value of SAR (measured) = 10.1 W/kg


System Body 1900MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.51 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.29 W/kg; SAR(10 g) = 4.89 W/kg

Maximum value of SAR (measured) = 10.4 W/kg

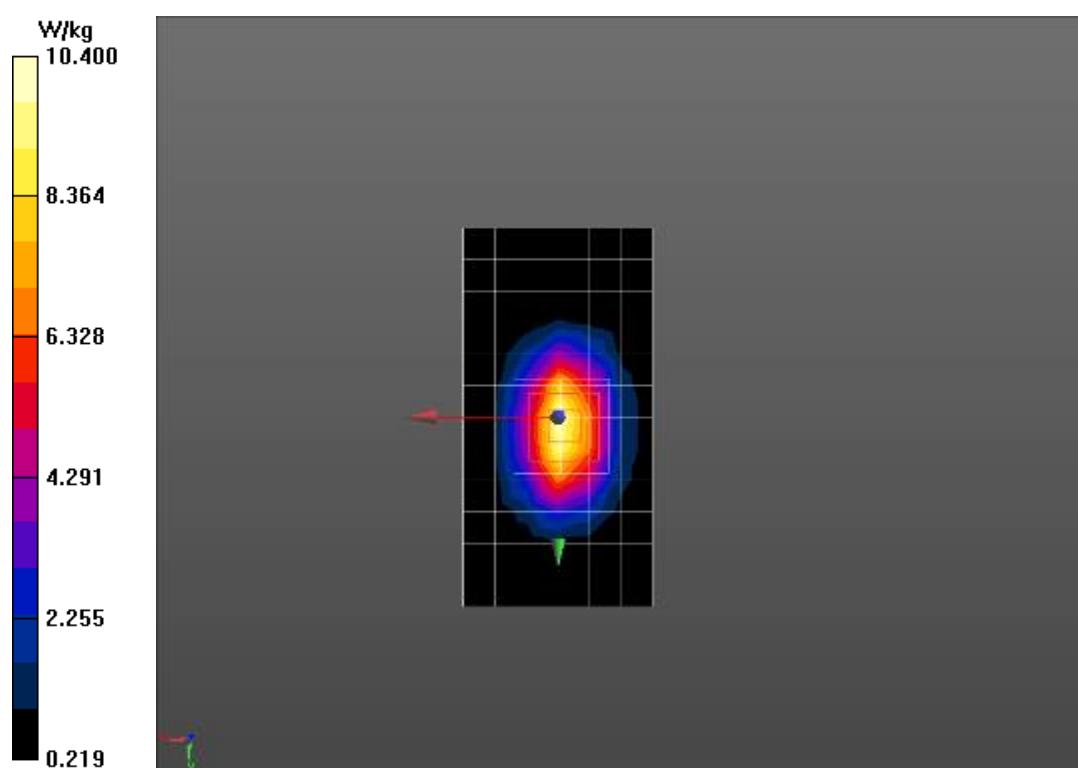

Body 2450MHz

Date/Time: 2018/8/21

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 53.135$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.42, 4.42, 4.42)

System Check Dipole 2450 MHz/Area Scan (6x9x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 11.3 W/kg

System Check Dipole 2450 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 84.32 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 25.4 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.89 W/kg


Maximum value of SAR (measured) = 14.3 W/kg

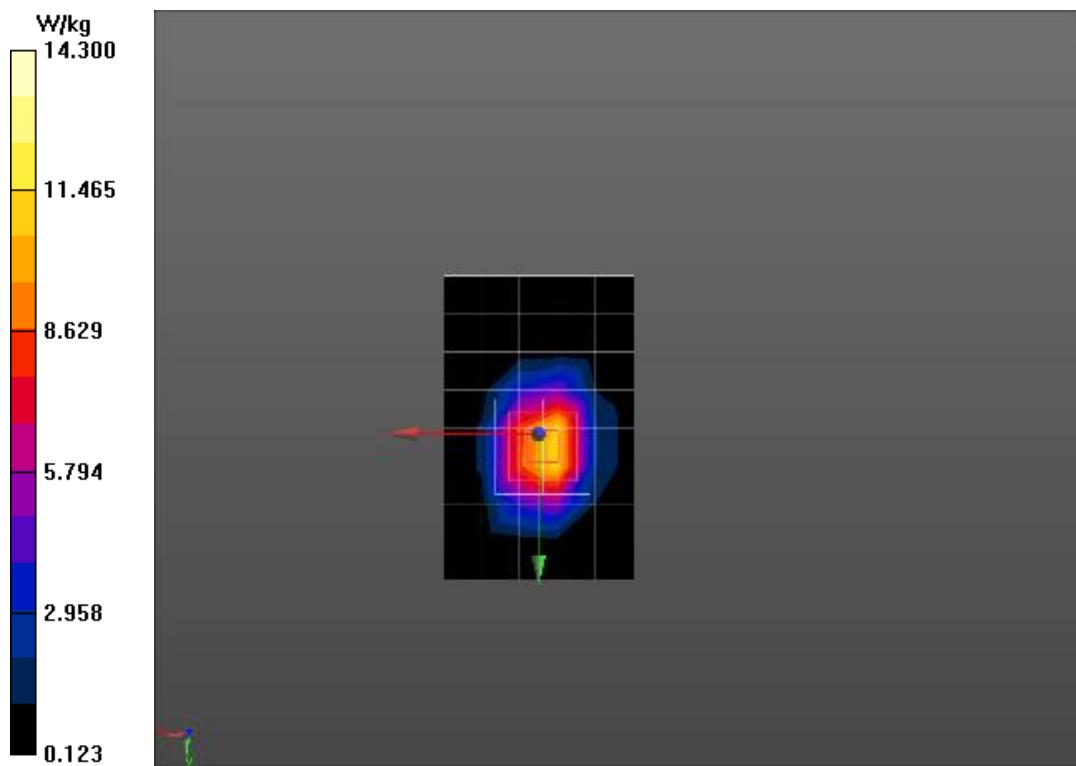

ANNEX C. SAR Measurement Setup

C.1. Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

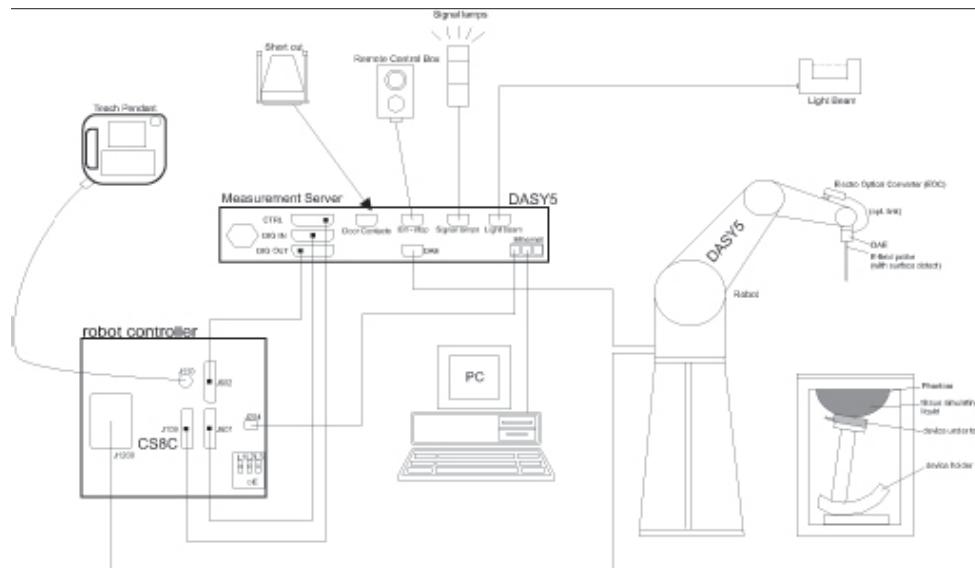

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.

- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model:	ES3DV3,EX3DV4
Frequency	10MHz — 6GHz(EX3DV4)
Range:	10MHz — 4GHz(ES3DV3)
Calibration:	In head and body simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB(30 MHz to 4 GHz) for ES3DV3 ± 0.2 dB(30 MHz to 6 GHz) for EX3DV4
Dynamic Range:	10 mW/kg — 100W/kg
Probe Length:	330 mm
Probe Tip	
Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9 mm for ES3DV3)
Tip-Center:	1 mm (2.0mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields



Picture 7-2 Near-field Probe



Picture 7-3 E-field Probe

C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter

in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density reading equates to 1 mW/cm². E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4. Other Test Equipment

C.4.1. Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 M Ω ; the inputs are symmetrical and floating.

Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX90L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU broad with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O broad, which

is directly connected to the PC/104 bus of the CPU broad.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

C.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could


thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.7: Device Holder

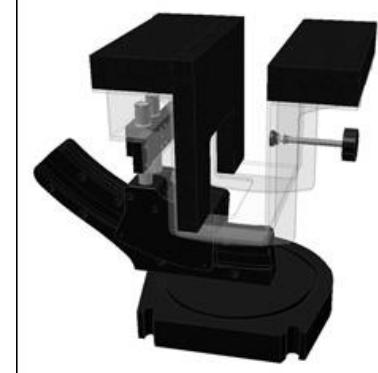

Picture C.8: Laptop Extension Kit

C.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.9: SAM Twin Phantom

ANNEX D. Position of the wireless device in relation to the phantom

D.1. Body-worn device


A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

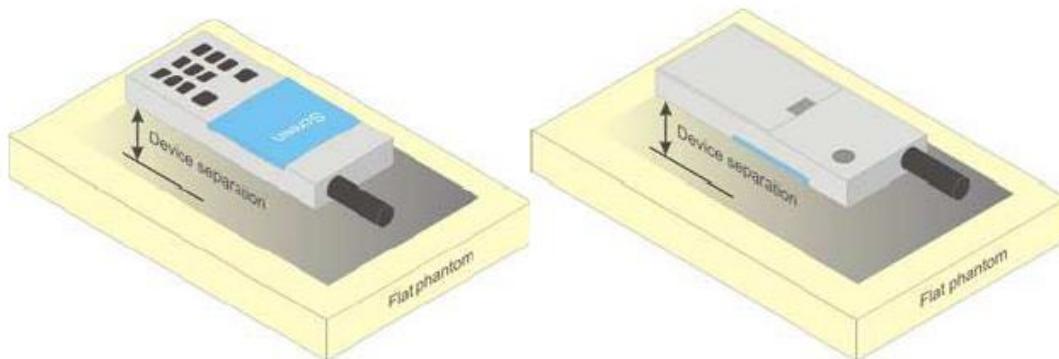

Picture D.1 Test positions for body-worn devices

D.2. Generic device

The SAR evaluation shall be performed for all surfaces of the DUT that are accessible during intended use, as indicated in D2. The separation distance in testing shall correspond to the intended use distance as specified in the user instructions provided by the manufacturer.

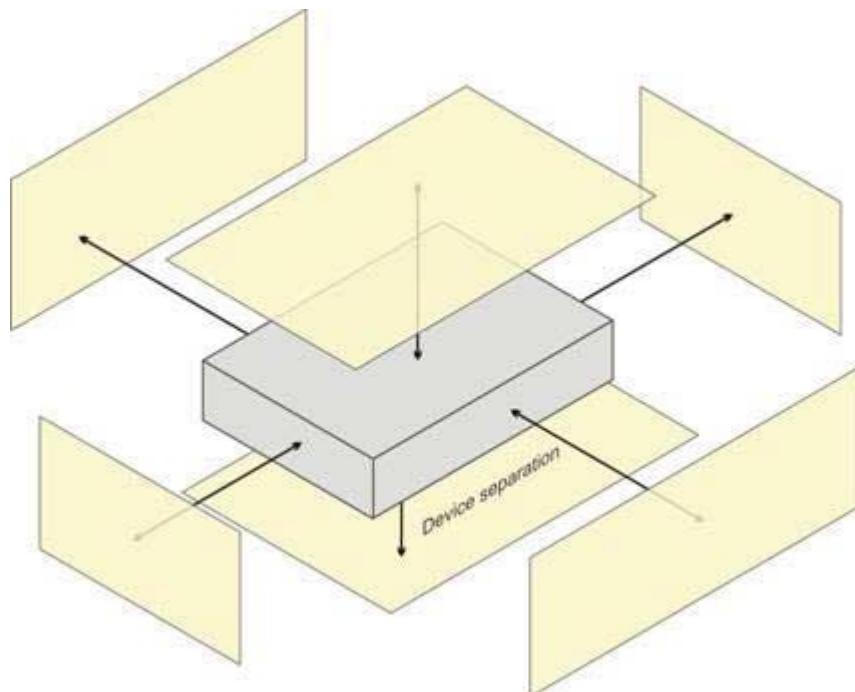

Picture D.2 Test positions for desktop devices

D.3. DUT Setup Photos**Picture D.3 DSY5 system Set-up****Note:**

The photos of test sample and test positions show in additional document.

ANNEX E. Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

Frequency (MHz)	835 Head	835 Body	1900 Head	1900 Body	2450 Head	2450 Body
Ingredients (% by weight)						
Water	41.45	52.5	55.242	69.91	58.79	72.60
Sugar	56.0	45.0	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18
Preventol	0.1	0.1	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$

ANNEX F. System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation Part 1

System No.	Probe SN.	Liquid name	Validation date	Frequency point	Permittivity ϵ	Conductivity σ (S/m)
1	3252	Body 835MHz	2018-8-21	835 MHz	54.23	0.981
2	3252	Body 835MHz-1	2018-9-19	835 MHz	54.21	0.983
3	3252	Body 1900MHz	2018-9-10	1900 MHz	52.36	1.520
4	3252	Body 2450MHz	2018-8-21	2450 MHz	53.14	1.952

Table F.2: System Validation Part 2

CW Validation	Sensitivity	PASS	PASS
	Probe linearity	PASS	PASS
	Probe Isotropy	PASS	PASS
Mod Validation	MOD.type	GMSK	GMSK
	MOD.type	OFDM	OFDM
	Duty factor	PASS	PASS
	PAR	PASS	PASS

ANNEX G. Probe and DAE Calibration Certificate

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctcl@chinatl.com [Http://www.chinatl.cn](http://www.chinatl.cn)



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client : **ECIT**

Certificate No: Z17-97266

CALIBRATION CERTIFICATEObject **DAE4 - SN: 1244**Calibration Procedure(s) **FF-Z11-002-01**
Calibration Procedure for the Data Acquisition Electronics
(DAEx)Calibration date: **December 04, 2017**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	27-Jun-17 (CTTL, No.J17X05859)	June-18

Calibrated by:	Name Yu Zongying	Function SAR Test Engineer	Signature
Reviewed by:	Name Lin Hao	Function SAR Test Engineer	Signature
Approved by:	Name Qi Dianyuan	Function SAR Project Leader	Signature

Issued: December 05, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Address: No.51 Xucyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: crtl@chinatll.com <http://www.chinatll.com>

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Addr: No.51 Xucyuan Road, Hailian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctll@chinatll.com Http://www.chinatll.cn

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu V$, full range = $-100...+300 mV$

Low Range: 1LSB = $81nV$, full range = $-1.....+3mV$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$403.862 \pm 0.15\% (k=2)$	$403.803 \pm 0.15\% (k=2)$	$404.516 \pm 0.15\% (k=2)$
Low Range	$3.95366 \pm 0.7\% (k=2)$	$3.96972 \pm 0.7\% (k=2)$	$3.97929 \pm 0.7\% (k=2)$

Connector Angle

Connector Angle to be used in DASY system	$22.5^\circ \pm 1^\circ$
---	--------------------------



In Collaboration with
S P E A G
CALIBRATION LABORATORY

Add: No.51 Xueyuan Rnd, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctli@china.com [Http://www.ctlitest.com](http://www.ctlitest.com)



中国认可
国际互认
校准
CALIBRATION
CMAS L0570

Client

ECIT

Certificate No: Z17-97112

CALIBRATION CERTIFICATE

Object ES3DV3 - SN:3252

Calibration Procedure(s) FF-Z11-004-01
Calibration Procedures for Dosimetric E-field Probes

Calibration date August 31, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101819	27-Jun-17 (CTTL, No.J17X05857)	Jun-18
Power sensor NRP-Z91	101547	27-Jun-17 (CTTL, No.J17X05857)	Jun-18
Power sensor NRP-Z91	101548	27-Jun-17 (CTTL, No.J17X05857)	Jun-18
Reference10dBAttenuator	18N50W-10dB	13-Mar-16(CTTL No.J16X01547)	Mar-18
Reference20dBAttenuator	18N50W-20dB	13-Mar-16(CTTL No.J16X01548)	Mar-18
Reference Probe EX3DV4	SN 7433	26-Sep-16(SPEAG No.EX3-7433_Sep16)	Sep-17
DAE4	SN 549	13-Dec-16(SPEAG No.DAE4-549_Dec16)	Dec-17
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	27-Jun-17 (CTTL, No.J17X05858)	Jun-18
Network Analyzer E5071C	MY46110673	13-Jan-17 (CTTL, No.J17X00286)	Jan-18

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 01, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2219
E-mail: ctrl@chinanet.com <http://www.chinanet.com>

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis

Connector Angle: information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\theta=0$ (fs900MHz in TEM-cell; $f>1800$ MHz: waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM_{(x,y,z)} = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $A_{x,y,z}$; $B_{x,y,z}$; $C_{x,y,z}$; $VR_{x,y,z}$; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for fs800MHz) and inside waveguide using analytical field distributions based on power measurements for $f>800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the $NORM_{x,y,z}$ (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2219
E-mail: ctrl@chinanet.com <http://www.chinanet.com>

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ (fs900MHz in TEM-cell; f>1800MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- **NORM_(x,y,z) = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCPx,y,z:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for fs800MHz) and inside waveguide using analytical field distributions based on power measurements for f >800MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z}* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: e01@chinatll.com <http://www.chinatll.com>

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm(μ V(V/m) 2) ^A	1.32	1.40	1.37	$\pm 10.0\%$
DCP(mV) ^B	101.5	101.9	101.5	

Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB· μ V	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X 0.0	0.0	1.0	0.00	278.4	$\pm 2.5\%$
		Y 0.0	0.0	1.0		287.4	
		Z 0.0	0.0	1.0		284.8	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctu@chinattl.com <http://www.chinattl.com>

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^c	Relative Permittivity ^r	Conductivity (S/m) ^r	ConvF X	ConvF Y	ConvF Z	Alpha ^d	Depth ^d (mm)	Unct. (k=2)
750	41.9	0.89	6.25	6.25	6.25	0.50	1.25	±12.1%
835	41.5	0.90	6.19	6.19	6.19	0.32	1.66	±12.1%
900	41.5	0.97	6.16	6.16	6.16	0.36	1.62	±12.1%
1750	40.1	1.37	5.30	5.30	5.30	0.42	1.62	±12.1%
1900	40.0	1.40	5.11	5.11	5.11	0.73	1.18	±12.1%
2000	40.0	1.40	4.97	4.97	4.97	0.76	1.19	±12.1%
2300	39.5	1.67	4.90	4.90	4.90	0.90	1.10	±12.1%
2450	39.2	1.80	4.75	4.75	4.75	0.90	1.10	±12.1%
2600	39.0	1.96	4.44	4.44	4.44	0.90	1.15	±12.1%

^c Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^r At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^d Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xuyuan Road, Haidian District, Beijing, 100091, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: em12@chinattl.com [Http://www.chinattl.com](http://www.chinattl.com)

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252**Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz] ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc. (k=2)
750	55.5	0.96	6.34	6.34	6.34	0.60	1.20	± 12.1%
850	55.2	0.99	6.14	6.14	6.14	0.38	1.63	± 12.1%
900	55.0	1.05	6.06	6.06	6.06	0.46	1.49	± 12.1%
1750	53.4	1.49	4.95	4.95	4.95	0.49	1.52	± 12.1%
1900	53.3	1.52	4.69	4.69	4.69	0.67	1.33	± 12.1%
2000	53.3	1.52	4.89	4.89	4.89	0.69	1.25	± 12.1%
2300	52.9	1.81	4.58	4.58	4.58	0.57	1.65	± 12.1%
2450	52.7	1.95	4.42	4.42	4.42	0.68	1.42	± 12.1%
2600	52.5	2.16	4.22	4.22	4.22	0.56	1.66	± 12.1%

^c Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^f At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ecit@chinatcl.com <http://www.chinatcl.com>

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

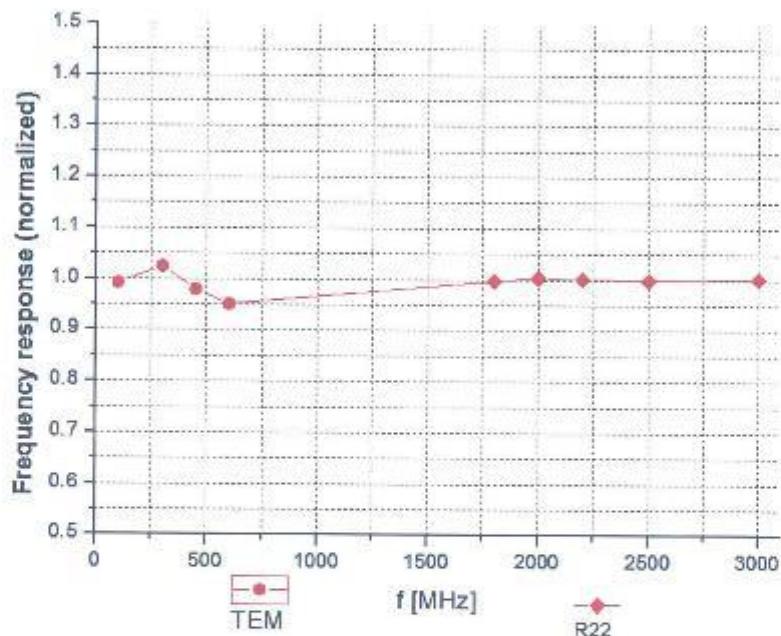


Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com <http://www.chinattl.com>

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

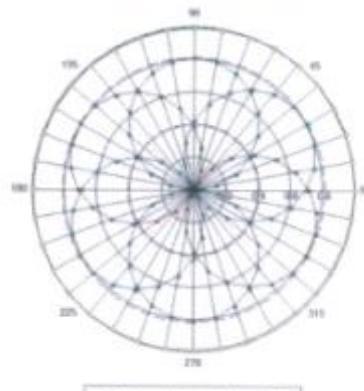



f=1800 MHz, R22

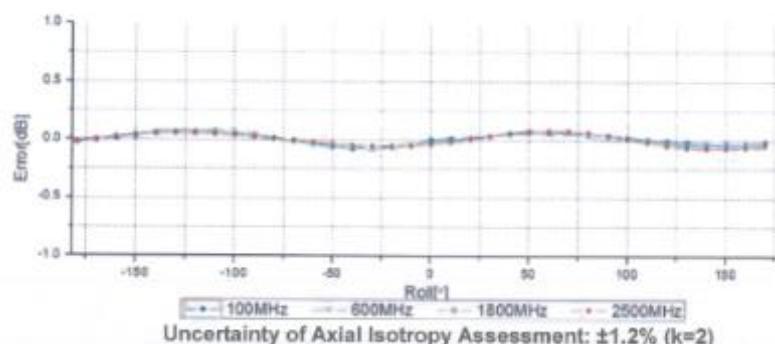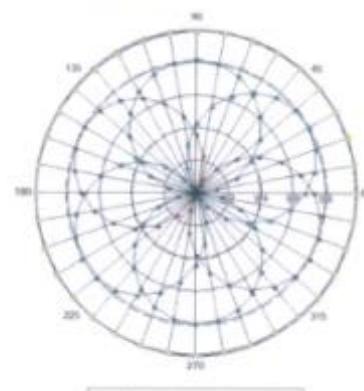



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ct@china-ttl.com [Http://www.china-ttl.com](http://www.china-ttl.com)

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

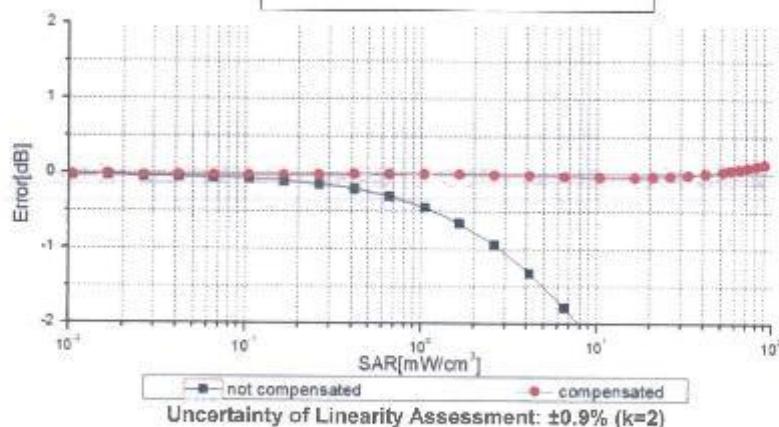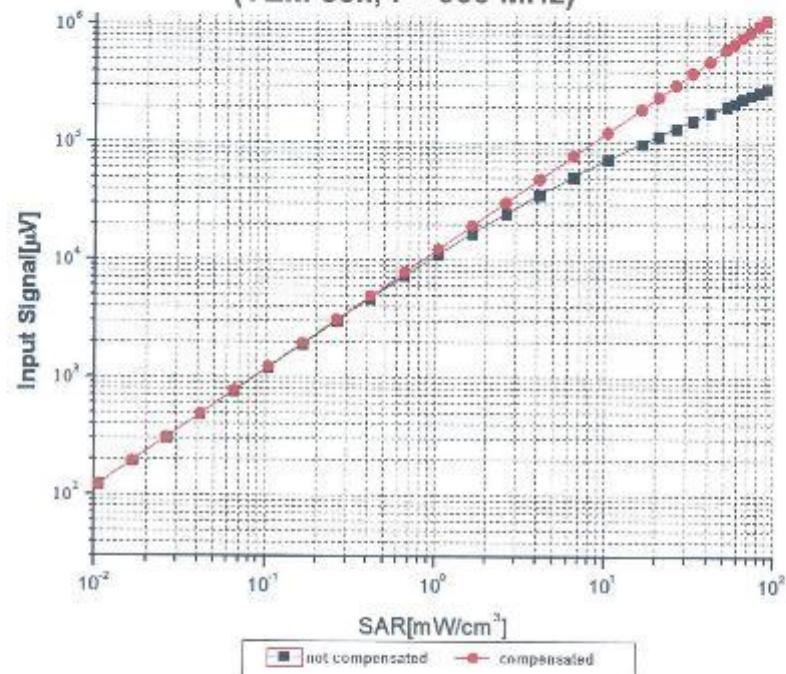


Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.com](http://www.chinattl.com)

Conversion Factor Assessment


f=835 MHz, WGLS R9(H_convF)

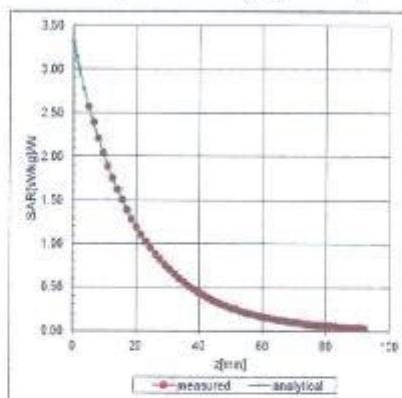

f=1750 MHz, WGLS R22(H_convF)

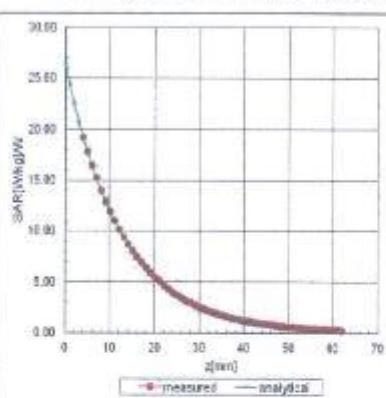

Deviation from Isotropy in Liquid

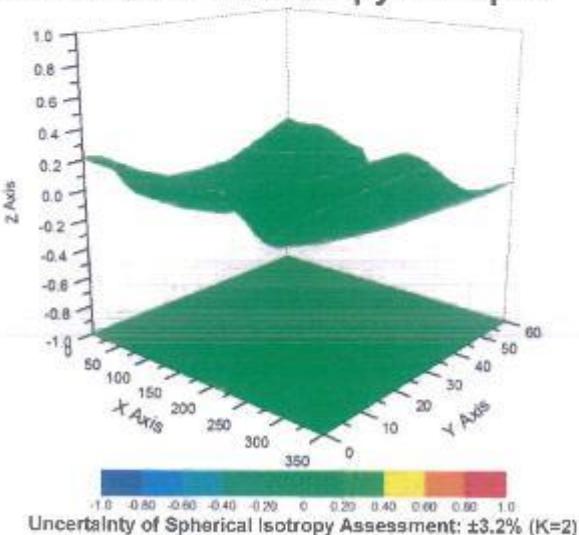



Add: No.51 Xueyuan Rond, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.com](http://www.chinattl.com)

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	130.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	4mm
Probe Tip to Sensor X Calibration Point	2mm
Probe Tip to Sensor Y Calibration Point	2mm
Probe Tip to Sensor Z Calibration Point	2mm
Recommended Measurement Distance from Surface	3mm



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctll@chinatll.com [Http://www.chinatll.cn](http://www.chinatll.cn)



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client

ECIT

Certificate No: Z18-60343

CALIBRATION CERTIFICATE

Object ES3DV3 - SN.3252

Calibration Procedure(s) FF-Z11-004-01
Calibration Procedures for Dosimetric E-field Probes

Calibration date: September 04, 2018

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	20-Jun-18 (CTTL, No.J18X05032)	Jun-19
Power sensor NRP-Z91	101547	20-Jun-18 (CTTL, No.J18X05032)	Jun-19
Power sensor NRP-Z91	101548	20-Jun-18 (CTTL, No.J18X05032)	Jun-19
Reference10dBAttenuator	18N50W-10dB	09-Feb-18(CTTL, No.J18X01133)	Feb-20
Reference20dBAttenuator	18N50W-20dB	09-Feb-18(CTTL, No.J18X01132)	Feb-20
Reference Probe EX3DV4	SN 3846	25-Jan-18(SPEAG, No.EX3-3846_Jan18)	Jan-19
DAE4	SN 777	15-Dec-17(SPEAG, No.DAE4-777_Dec17)	Dec -18
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	21-Jun-18 (CTTL, No.J18X05033)	Jun-19
Network Analyzer E5071C	MY48110673	14-Jan-18 (CTTL, No.J18X00561)	Jan -19

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 06, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $A_{x,y,z}$; $B_{x,y,z}$; $C_{x,y,z}$; $VR_{x,y,z}$; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the $NORM_x$ (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Probe ES3DV3

SN: 3252

Calibrated: September 04, 2018

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm(μ V/(V/m) ²) ^A	1.29	1.35	1.33	±10.0%
DCP(mV) ^B	102.7	105.4	103.6	

Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB/ μ V	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	1.0	0.00	268.8	±2.5%
		Y	0.0	1.0		276.1	
		Z	0.0	1.0		278.3	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252**Calibration Parameter Determined in Head Tissue Simulating Media**

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	6.51	6.51	6.51	0.40	1.42	± 12.1%
835	41.5	0.90	6.36	6.36	6.36	0.40	1.56	± 12.1%
900	41.5	0.97	6.31	6.31	6.31	0.45	1.48	± 12.1%
1750	40.1	1.37	5.39	5.39	5.39	0.61	1.28	± 12.1%
1900	40.0	1.40	5.18	5.18	5.18	0.67	1.26	± 12.1%
2000	40.0	1.40	5.17	5.17	5.17	0.71	1.20	± 12.1%
2300	39.5	1.67	4.92	4.92	4.92	0.90	1.14	± 12.1%
2450	39.2	1.80	4.74	4.74	4.74	0.90	1.15	± 12.1%
2600	39.0	1.96	4.46	4.46	4.46	0.72	1.37	± 12.1%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252**Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	6.53	6.53	6.53	0.40	1.50	±12.1%
835	55.2	0.97	6.34	6.34	6.34	0.42	1.58	±12.1%
900	55.0	1.05	6.29	6.29	6.29	0.47	1.51	±12.1%
1750	53.4	1.49	4.99	4.99	4.99	0.65	1.28	±12.1%
1900	53.3	1.52	4.77	4.77	4.77	0.75	1.23	±12.1%
2000	53.3	1.52	4.95	4.95	4.95	0.67	1.28	±12.1%
2300	52.9	1.81	4.63	4.63	4.63	0.90	1.15	±12.1%
2450	52.7	1.95	4.41	4.41	4.41	0.90	1.17	±12.1%
2600	52.5	2.16	4.19	4.19	4.19	0.90	1.15	±12.1%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

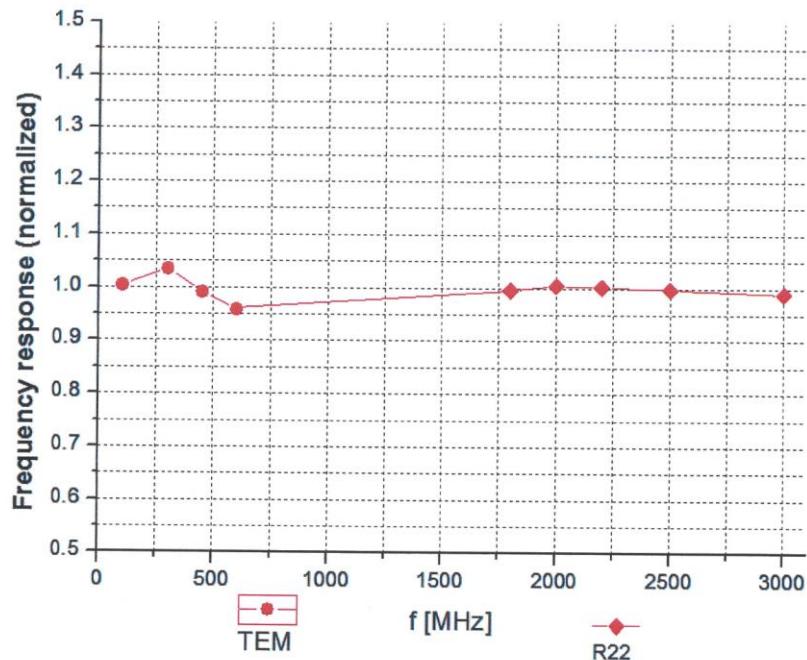


Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

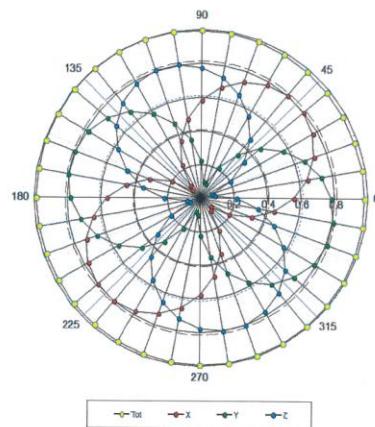



f=1800 MHz, R22

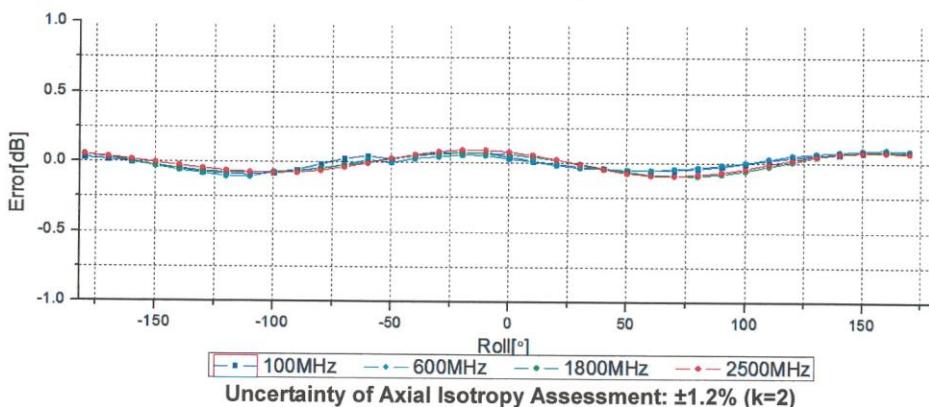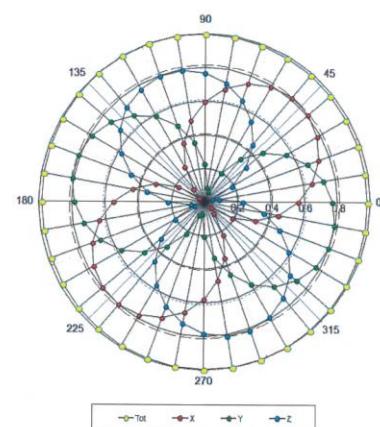



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

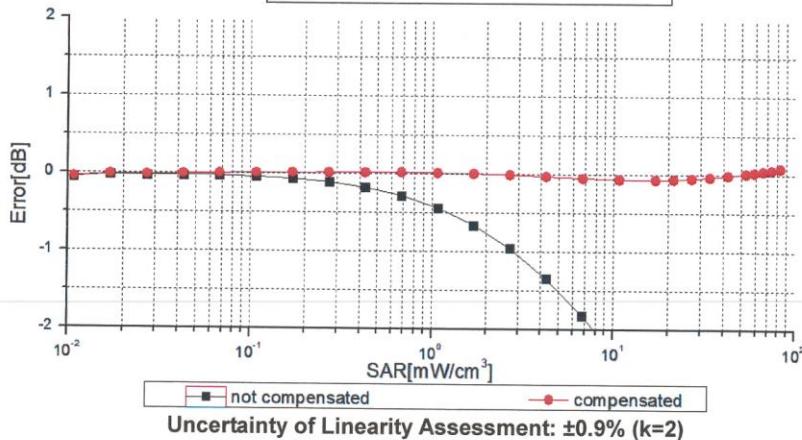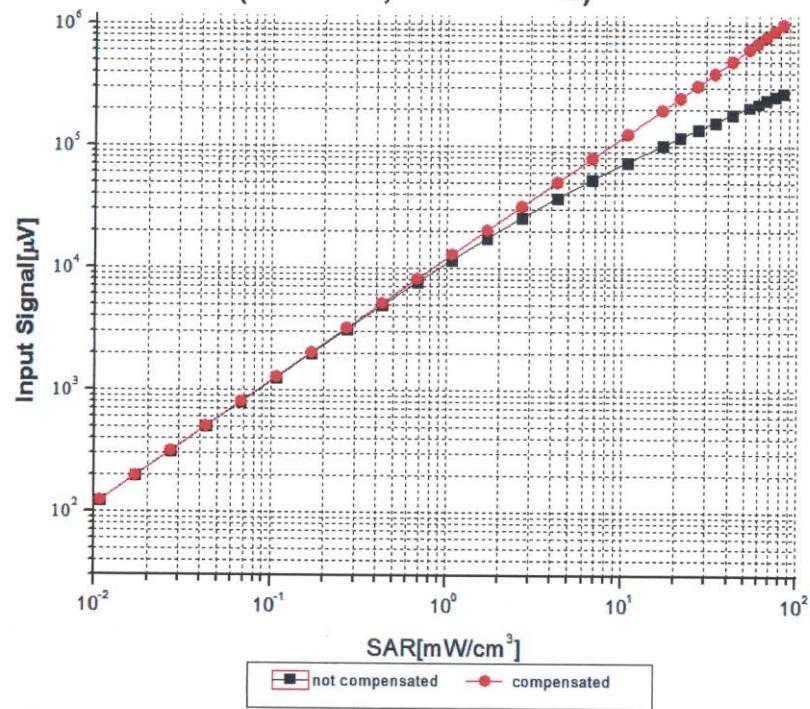


Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

Conversion Factor Assessment


f=750 MHz, WGLS R9(H_convF)

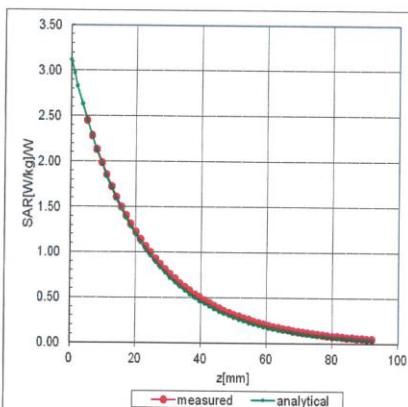

f=1750 MHz, WGLS R22(H_convF)

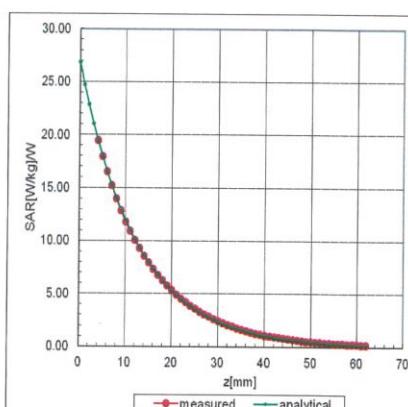

Deviation from Isotropy in Liquid

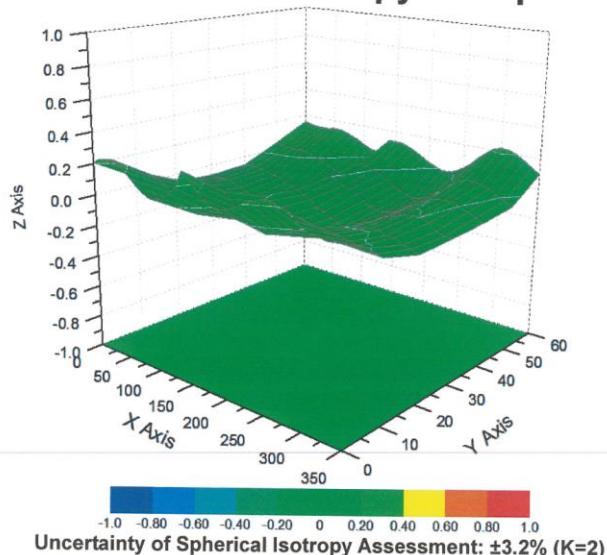



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3252**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	131.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	4mm
Probe Tip to Sensor X Calibration Point	2mm
Probe Tip to Sensor Y Calibration Point	2mm
Probe Tip to Sensor Z Calibration Point	2mm
Recommended Measurement Distance from Surface	3mm



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ecit@chinattl.com [Http://www.chinattl.com](http://www.chinattl.com)



Client

ECIT

Certificate No: Z15-97165

CALIBRATION CERTIFICATE

Object:

D835V2 - SN: 4d112

Calibration Procedure(s)

FD-Z11-2-003-01

Calibration Procedures for dipole validation kits

Calibration date:

October 22, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference Probe EX3DV4	SN 3617	28-Aug-15(SPEAG, No.EX3-3617_Aug15)	Aug -16
DAE4	SN 777	28-Aug-15(SPEAG, No.DAE4-777_Aug15)	Aug -16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	02-Feb-15 (CTTL, No.J15X00729)	Feb-16
Network Analyzer E5071C	MY48110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16

Calibrated by:	Name Zhao Jing	Function SAR Test Engineer	Signature 
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: October 26, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97165

Page 1 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cnl@chinattl.com <http://www.chinattl.cn>

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	42.2 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.31 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.22 mW / g \pm 20.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.51 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.03 mW / g \pm 20.4 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.1 \pm 6 %	0.96 mho/m \pm 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.37 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.57 mW / g \pm 20.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.56 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.29 mW / g \pm 20.4 % (k=2)

Certificate No: Z15-97165

Page 3 of 8



Add: No.51 Xueyuan Roud, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctli@chinattl.com Http://www.chinattl.cn

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.1Ω- 4.20jΩ
Return Loss	-27.3dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.2Ω- 4.79jΩ
Return Loss	-23.9dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.502 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctll@chinatll.com Http://www.chinatll.cn

DASY5 Validation Report for Head TSL

Date: 10.22.2015

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d112

Communication System: UID 0, CW, Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.15$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(9.56, 9.56, 9.56); Calibrated: 8/26/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 8/26/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 58.15 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.46 W/kg


SAR(1 g) = 2.31 W/kg; SAR(10 g) = 1.51 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

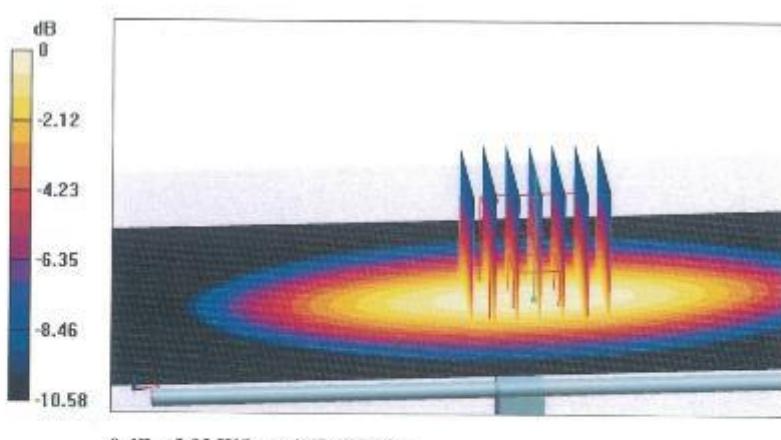



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

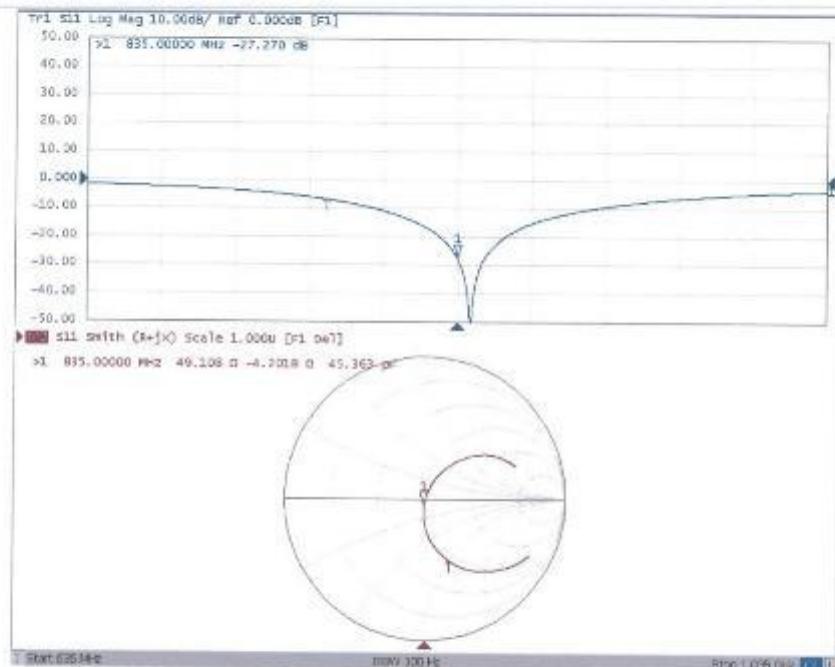Impedance Measurement Plot for Head TSL

Certificate No: Z15-97165

Page 6 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctll@chinattl.com Http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 10.22.2015

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d112

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 55.11$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(9.71,9.71, 9.71); Calibrated: 8/26/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 8/26/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.68 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.51 W/kg


SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 2.99 W/kg

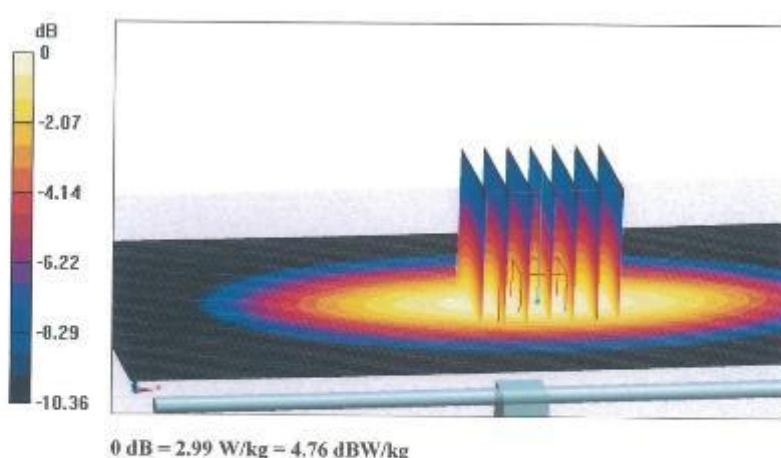



Address: No 51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctt@chinattl.com Http://www.chinattl.cn

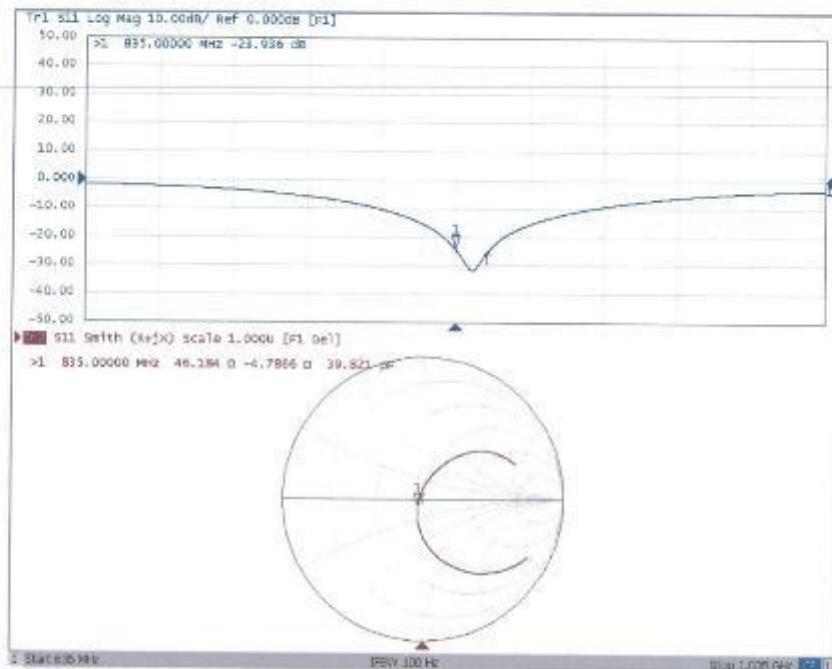Impedance Measurement Plot for Body TSL

Certificate No: Z15-97165

Page 8 of 8

D835V2, Serial No.4d112 Extended Dipole Calibrations

Per IEEE Std 1528-2013, the dipole should have a return loss better than -20dB at the test frequency to reduce uncertainty in the power measurement.

Per KDB 865664 D01, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


Justification of the extended calibration

D835V2 Serial No.4d112						
835 Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2015	-27.27	--	49.108	--	-4.2018	--
10.21.2016	-29.019	6.41	50.108	1	-2.1757	2.0261


D835V2 Serial No.4d112						
835 Body						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2015	-23.036	--	46.184	--	-4.7866	--
10.21.2016	-23.131	0.56	47.003	0.819	-2.9072	1.8794

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data D835V2 Serial No.4d112
835MHz-Head

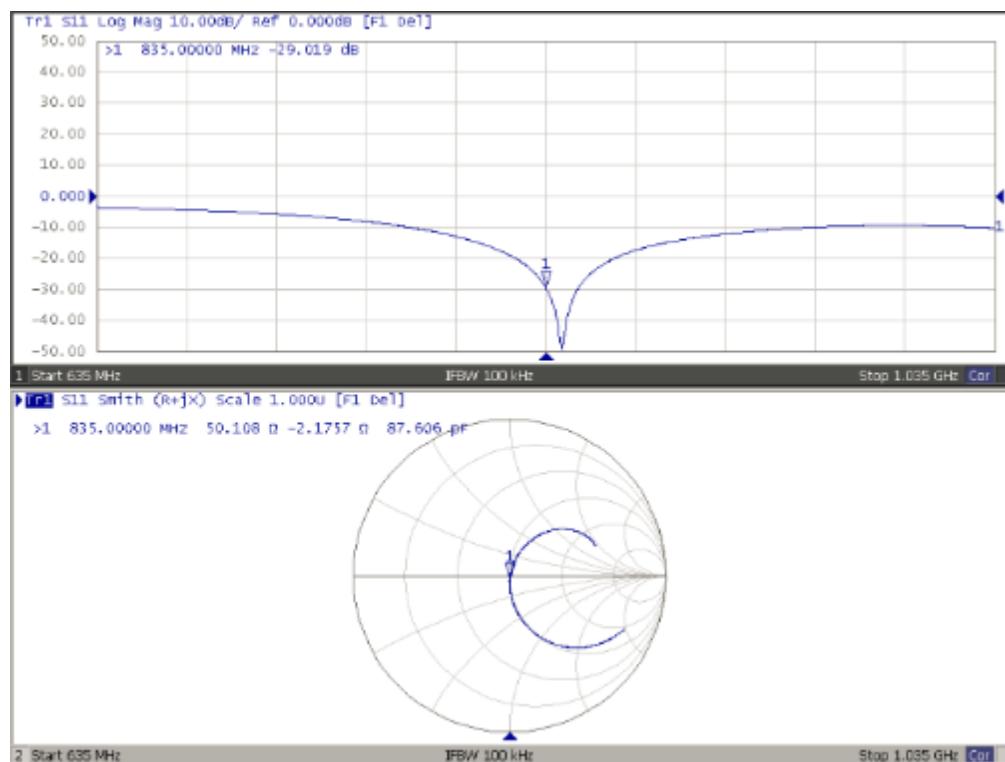

835MHz - Body

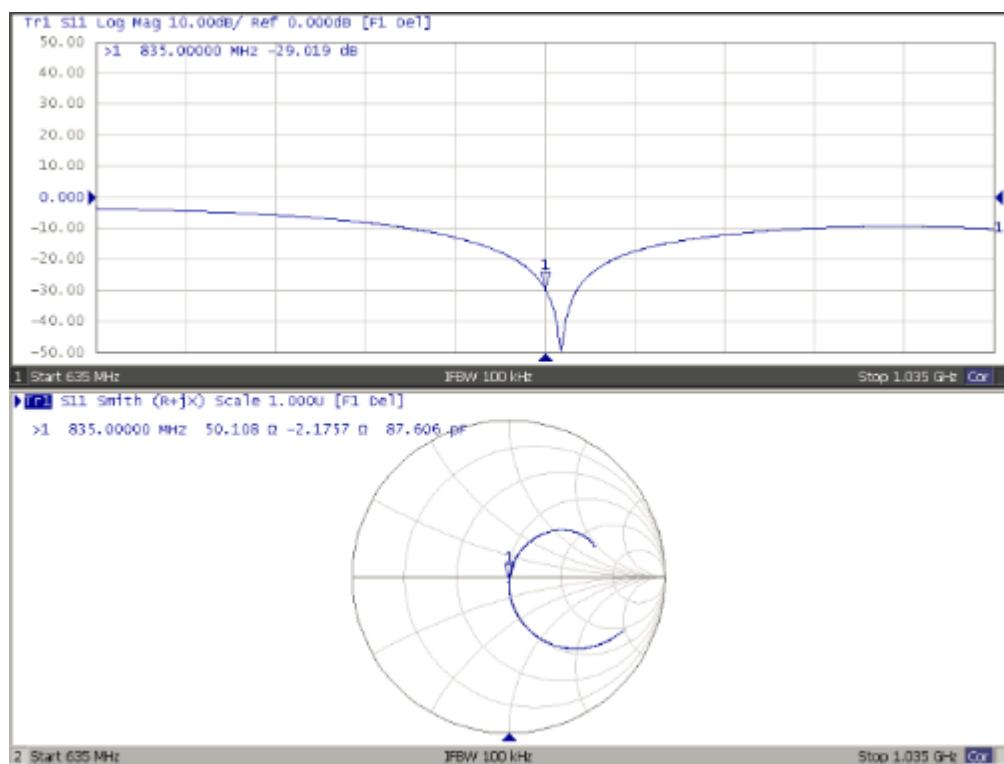


Justification of the extended calibration

D835V2 Serial No.4d112						
835 Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2015	-27.27	--	49.108	--	-4.2018	--
10.21.2016	-29.019	6.41	50.108	1	-2.1757	2.0261
10.20.2017	-28.040	3.37	49.98	0.128	-3.965	1.789


D835V2 Serial No.4d112						
835 Body						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
10.22.2015	-23.036	--	46.184	--	-4.7866	--
10.21.2016	-23.131	0.56	47.003	0.819	-2.9072	1.8794
10.20.2017	-24.962	7.92	47.613	0.61	-4.977	2.07

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data D835V2 Serial No.4d112
835MHz-Head

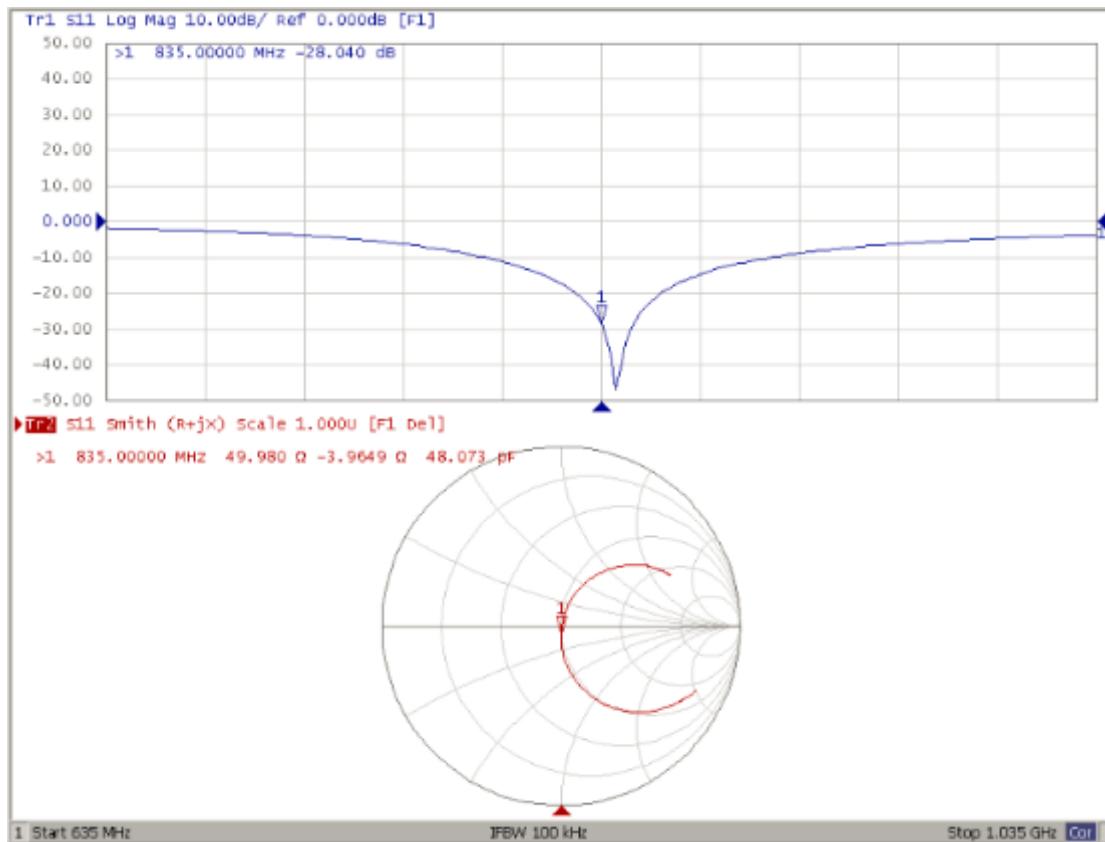

835MHz - Body

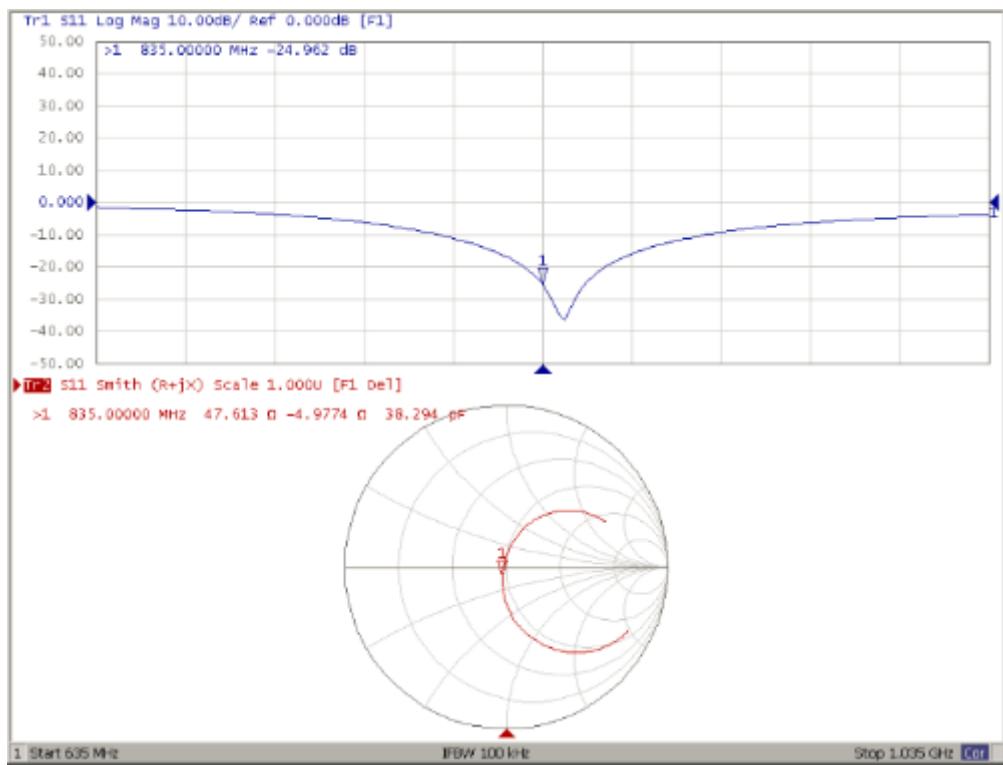



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctll@chinatll.com [Http://www.chinatll.cn](http://www.chinatll.cn)


Client **ECIT**Certificate No: **Z15-97167****CALIBRATION CERTIFICATE**Object **D1750V2 - SN: 1044**Calibration Procedure(s) **FD-Z11-2-003-01**
Calibration Procedures for dipole validation kitsCalibration date: **November 3, 2015**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration):

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference Probe EX3DV4	SN 3617	28-Aug-15(SPEAG, No.EX3-3617_Aug15)	Aug-16
DAE4	SN 777	28-Aug-15(SPEAG, No.DAE4-777_Aug15)	Aug-16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	02-Feb-15 (CTTL, No.J15X00729)	Feb-16
Network Analyzer E5071C	MY46110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16

Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: November 6, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctt@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- **SAR measured:** SAR measured at the stated antenna input power.
- **SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctfl@chinattl.com Http://www.chinattl.com

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1222
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz = 5 \text{ mm}$	
Frequency	$1750 \text{ MHz} \pm 1 \text{ MHz}$	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.7 \pm 6 %	1.40 mho/m \pm 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.48 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	37.3 mW / g \pm 20.8 % (k=2)
SAR averaged over 10 cm^3 (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.09 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.1 mW / g \pm 20.4 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.4 \pm 6 %	1.47 mho/m \pm 6 %
Body TSL temperature change during test	<1.0 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.30 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	37.6 mW / g \pm 20.8 % (k=2)
SAR averaged over 10 cm^3 (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.02 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.2 mW / g \pm 20.4 % (k=2)

Certificate No: Z15-97167

Page 3 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctf@chinattl.com Http://www.chinattl.com

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.9Ω+1.17jΩ
Return Loss	-35.8dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.5Ω+0.58jΩ
Return Loss	-26.5dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.319 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctll@chinattl.com Http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 11.03.2015

Test Laboratory: CTIL, Beijing, China

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1044

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.72$; $\rho = 1000$ kg/m³

Phantom-section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvFi(8.34, 8.34, 8.34); Calibrated: 8/26/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 8/26/2015
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.40V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 17.0W/kg

SAR(1 g) = 9.48 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 13.3 W/kg

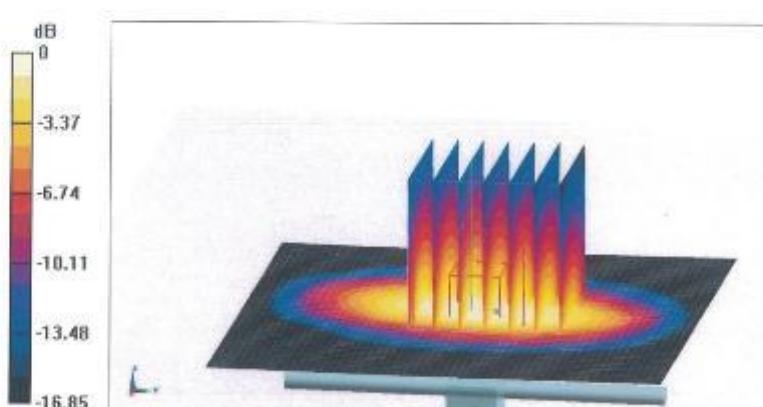


0 dB = 13.3 W/kg = 11.24 dBW/kg

Certificate No: Z15-97167

Page 5 of 8



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.com](http://www.chinattl.com)

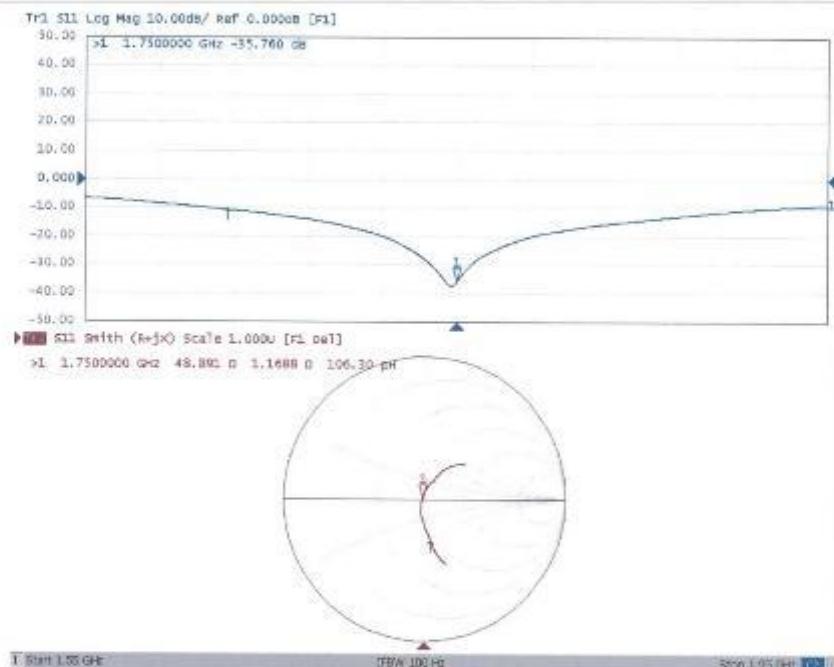Impedance Measurement Plot for Head TSL

Certificate No: Z15-97167

Page 6 of 8