



Full

TEST REPORT

No. I18D00170-SRD04

For

Client : Mobiwire SAS

Production : Connected Mobile with Printer

Model Name : MP3 Plus

Brand Name : MobiloT

FCC ID : QPN-MP3PLUS

Hardware Version: V02

Software Version: V01

Issued date: 2018-11-29

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I18D00170-SRD04	00	2018-11-29	Initial creation of test report

CONTENTS

1. TEST LABORATORY.....	5
1.1. TESTING LOCATION.....	5
1.2. TESTING ENVIRONMENT.....	5
1.3. PROJECT DATA.....	5
1.4. SIGNATURE.....	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. THE DIFFERENCE BETWEEN TWO MODELS.....	7
3.5. STATEMENTS.....	8
4. REFERENCE DOCUMENTS.....	9
4.1. REFERENCE DOCUMENTS FOR TESTING.....	9
5. SUMMARY OF TEST RESULTS.....	10
6. TEST EQUIPMENT UTILIZED.....	11
7. TEST ENVIRONMENT.....	13
ANNEX A. MEASUREMENT RESULTS.....	14
ANNEX A.1. OUTPUT POWER.....	14
ANNEX A.2. PEAK-TO-AVERAGE POWER RATIO.....	16
ANNEX A.3. OCCUPIED BANDWIDTH.....	18
ANNEX A.4. -26DB EMISSION BANDWIDTH.....	31
ANNEX A.5. BAND EDGE AT ANTENNA TERMINALS.....	43

ANNEX A.6. FREQUENCY STABILITY.....	50
ANNEX A.7. CONDUCTED SPURIOUS EMISSION.....	55
ANNEX A.8. RADIATED.....	70
ANNEX B. DEVIATIONS FROM PRESCRIBED TEST METHODS.....	92

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
FCC registration No	958356

1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-30/+50°C
Relative Humidity:	20-75%


1.3. Project data

Project Leader:	Liu Zeguang
Testing Start Date:	2018-08-24
Testing End Date:	2018-08-29


1.4. Signature



Yang Dejun
(Prepared this test report)



Shi Hongqi
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Mobiwire SAS
Address: 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France.
Postcode: France 92017
Telephone: +86 574 57555707

2.2. Manufacturer Information

Company Name: Mobiwire SAS
Address: 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France.
Postcode: France 92017
Telephone: +86 574 57555707

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Connected Mobile with Printer
Model name	MP3 Plus
FCC ID	QPN-MP3PLUS
Frequency	GSM850/900/1800/1900; WCDMA Band I/II/V/VIII
Extreme Temperature	-30/+50°C
Nominal Voltage	8V
Extreme High Voltage	8.4V
Extreme Low Voltage	6.6V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	Model Name	SN or IMEI	HW Version	SW Version	Date of receipt
N08(Main supply)	MP3 Plus	359457090003525/ 359457090003533	V02	V01	2018-08-15
N06(Main supply)	MP3 Plus	359457090004341/ 359457090004358	V02	V01	2018-08-15
N11(Secondary supply)	MP3 Plus	359457090004945/ 359457090004952	V02	V01	2018-08-15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	Dummy Battery	---

*AE ID: is used to identify the test sample in the lab internally.

3.4. The difference between two models

Main supply is same as Secondary supply, except main supply has 10pin smart card connector and some components that work for connectors, support 10 pin SAM card function. Secondary supply without this function.

3.5. Statements

The MP3 Plus, supporting GPRS/EDGE/WCDMA/CDMA/LTE/BT/BLE/WLAN/NFC, manufactured by Mobiwire SAS, which is a new product for testing.

Note: The product has two prototypes, the main supply is same as Secondary supply, except main supply has 10pin smart card connector and some components that work for connectors, support 10 pin SAM card function. Secondary supply without this function. In this report, we test all cases about main supply, and we only test worse case about secondary supply.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2014
FCC Part 22	PUBLIC MOBILE SERVICES	2014
ANSI-TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. SUMMARY OF TEST RESULTS

Item	Test items	FCC rules	result
1	Output Power	2.1046/22.913(a)/24.232(c)	Pass
2	Peak-to-Average Ratio	24.232(d)	Pass
3	99%Occupied Bandwidth	2.1049(h)(i)/ 22.917(b)	Pass
4	-26dB Emission Bandwidth	22.917(b)/§24.238(b)	Pass
5	Band Edge at antenna terminals	22.917(a)/24.238(a)	Pass
6	Frequency stability	2.1055/24.235	Pass
7	Conducted Spurious mission	2.1053/22.917(a)/24.238(a)	Pass
8	Emission Limit	2.1051/22.917/24.238/22.913/24.232	Pass

6. Test Equipment Utilized

Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Climate chamber	SH-641	92012011	ESPEC	2017-12-25	2 Year

Radiated emission test system

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2018-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2018-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163-163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2018-05-11	1 Year
6	Substitution Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
7	RF Signal Generator	SMF100A	102314	R&S	2018-05-11	1 Year
8	Substitution Antenna	VUBA9117	9117-266	Schwarzbeck	2017-11-18	3 Year
9	Amplifier	SCU08	10146	R&S	2018-05-11	1 Year

Conducted test system

No.	Name	Type	SN	Manufacture	Calibration date	Cal.interval
1	Spectrum Analyzer	FSQ26	101096	R&S	2018-05-11	1 Year
2	Universal Radio Communicat	CMU200	123124	R&S	2018-05-11	1 Year
3	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2018-05-11	1 Year

7. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. MEASUREMENT RESULTS

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio. Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2. Conducted

A.1.2.1. Method of Measurements

Method of measurements please refer to KDB971168 D01 v03 clause 5.

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSQ(peak).

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

A.1.2.2 Test procedures:

1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

A.1.2.3 Limit:

22.913(a) Mobile stations are limited to 7watts.

24.232(c) Mobile and portable stations are limited to 2 watts.

A.1.2.4 Test Procedure:

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the signal analyzer reading.

A.1.2.5 GSM Test Condition:

RBW	VBW	Sweep time	Span
-----	-----	------------	------

1MHz	1MHz	300ms	10MHz
------	------	-------	-------

A.1.2.6 WCDMA Test Condition:

RBW	VBW	Sweep time	Span
10MHz	10MHz	800ms	50MHz

A.1.2.7 Measurement results:

GPRS 850 (GMSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Mid 189/836.4	32.90	32.72
Low 128/824.2	32.90	32.81
High 251/848.8	33.01	32.84
EDGE 850 (8PSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Mid 189/836.4	29.83	27.03
Low 128/824.2	29.73	26.92
High 251/848.8	29.80	27.01

GPRS 1900 (GMSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Mid 661/1880	29.92	29.71
Low 512/1850.2	29.84	29.70
High 810/1909.8	29.94	29.73
EDGE 1900 (8PSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Mid 661/1880	28.64	26.04
Low 512/1850.2	28.55	25.98
High 810/1909.8	28.62	26.02

WCDMA II		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Mid 9400 /1880	25.24	22.13
Low 9262/1852.4	25.36	22.31
High 9538/1907.6	25.06	21.95

WCDMA BAND V		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Mid 4183/836.6	25.98	22.76
Low 4132/826.4	26.07	22.84
High 4233/846.6	25.82	22.70

Conclusion: PASS

ANNEX A.2. Peak-to-Average Power Ratio

Method of test measurements please refer to KDB971168 D01 v03 clause 5.7.

A.2.1 PAPR Limit

The peak-to-average power ratio (PAPR) of the transmission may not exceed 13dB

A.2.2 Test procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2.
 - 1) Select the spectrum analyzer CCDF function.
 - 2) Set RBW \geq signal's occupied bandwidth.
 - 3) Set the number of counts to a value that stabilizes the measured CCDF curve;
 - 4) Sweep time \geq 1s.
3. Record the maximum PAPR level associated with a probability of 0.1%.

A.2.3 Test results:

GPRS850			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.45	8.39	8.56
EDGE850			

Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.47	8.43	8.54

GPRS1900			
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	8.48	8.41	8.38
EDGE1900			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.65	8.44	8.31

WCDMA Band II			
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
PAPR(dB)	8.43	8.37	8.43
WCDMA Band V			
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
PAPR(dB)	8.43	8.43	8.43

Conclusion: PASS

ANNEX A.3. Occupied Bandwidth

Method of test please refer to KDB971168 D01 v03 clause 4.0.

A.3.1. Occupied Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

A.3.2 Test Procedure:


1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW \geq 3 times RBW.,
3. 99% bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

A.3.3 Test result:


GPRS850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	245.192
Low 128	824.2	248.397
High 251	848.8	250

EDGE850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	250
Low 128	824.2	250
High 251	848.8	246.795


Conclusion: PASS**GPRS 850**

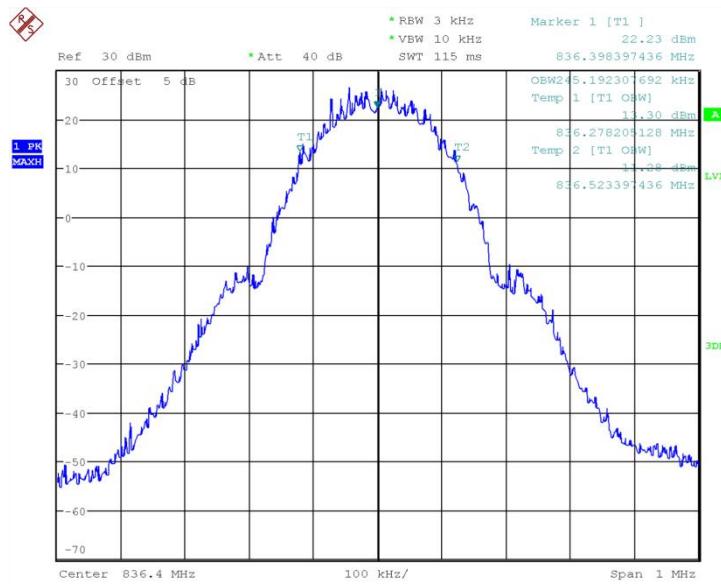

Channel 189-Occupied Bandwidth (99%)

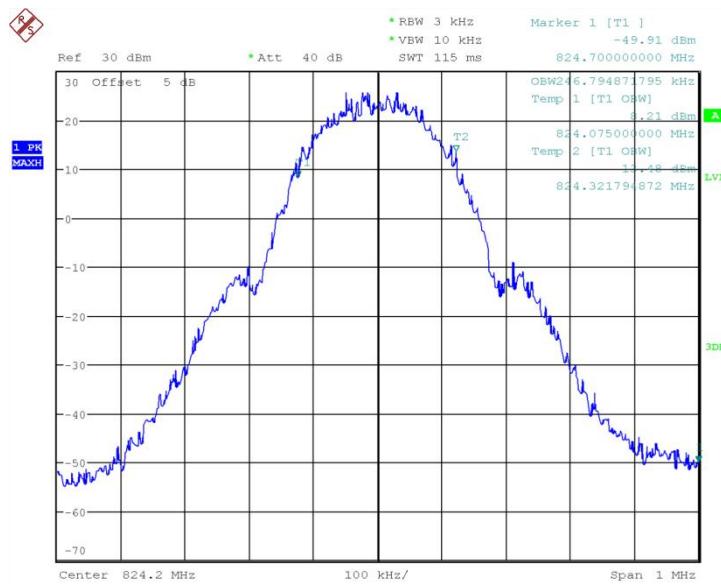


Channel 128-Occupied Bandwidth (99%)

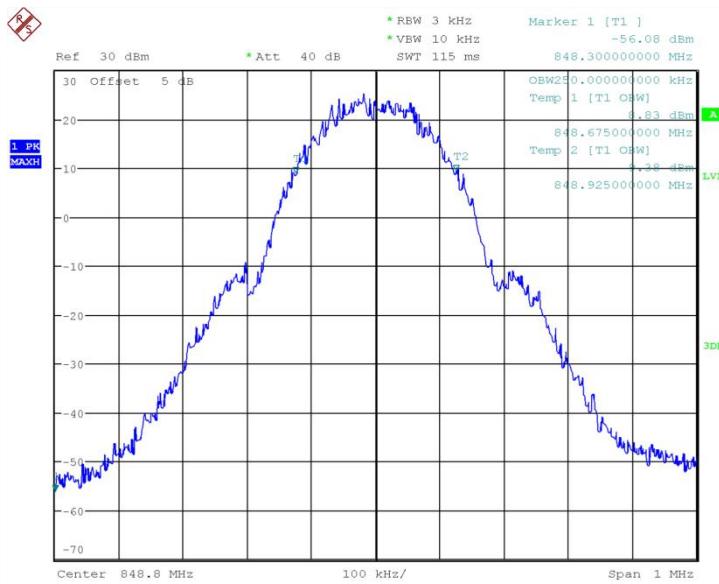

Date: 29.AUG.2018 10:43:51


Channel 251-Occupied Bandwidth (99%)

EDGE 850

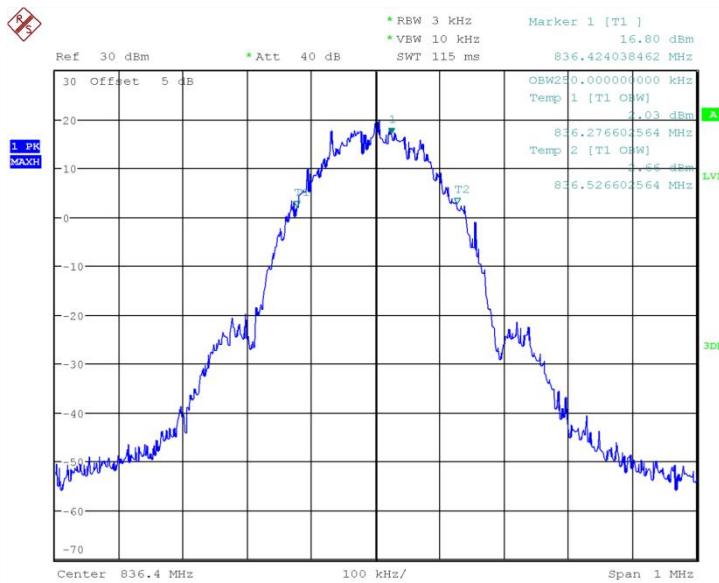


Date: 29.AUG.2018 10:46:27

Channel 189-Occupied Bandwidth (99%)

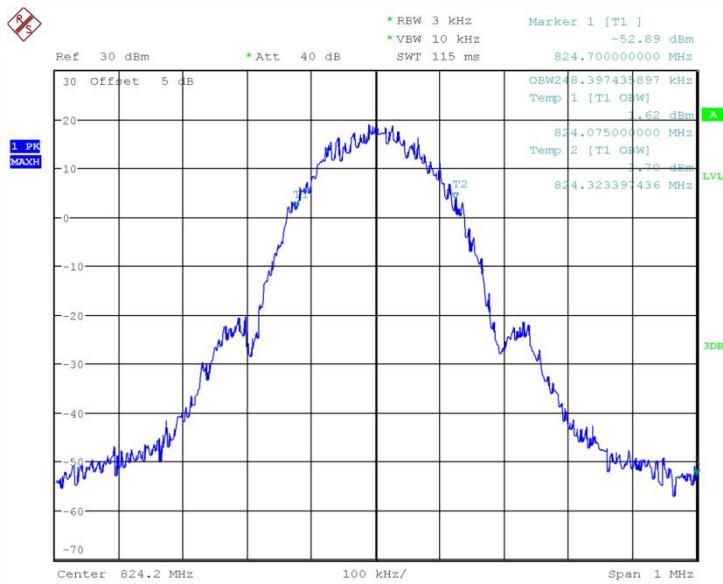

Date: 29.AUG.2018 10:47:14

Channel 128-Occupied Bandwidth (99%)

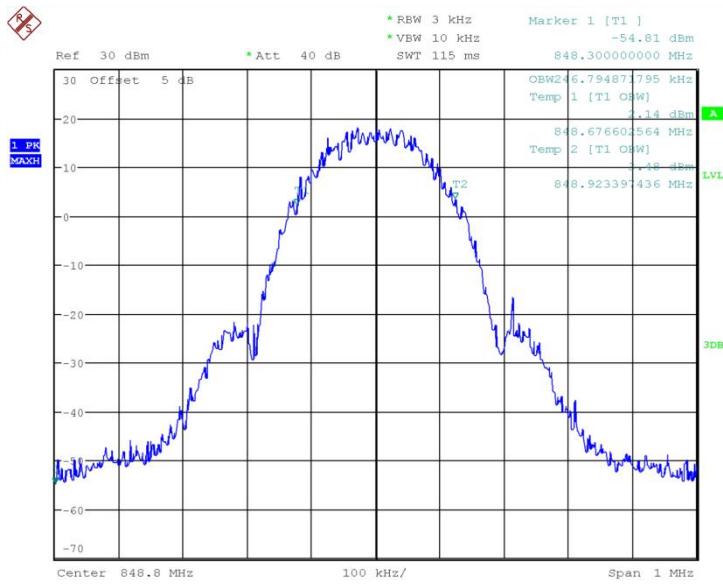


Date: 29.AUG.2018 10:48:02

Channel 251-Occupied Bandwidth (99%)


GPRS1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	245.192
Low 512	1850.2	245.192
High 810	1909.8	245.192

EDGE1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	253.205
Low 512	1850.2	251.603
High 810	1909.8	256.410

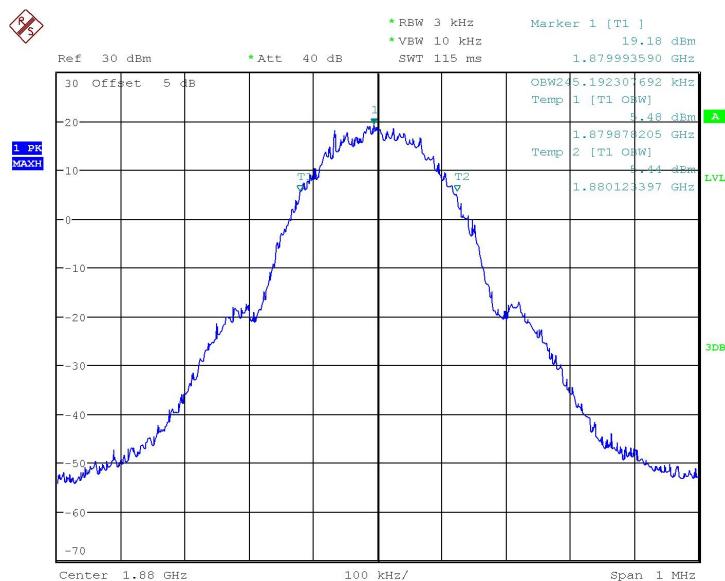Conclusion: PASS
GPRS 1900


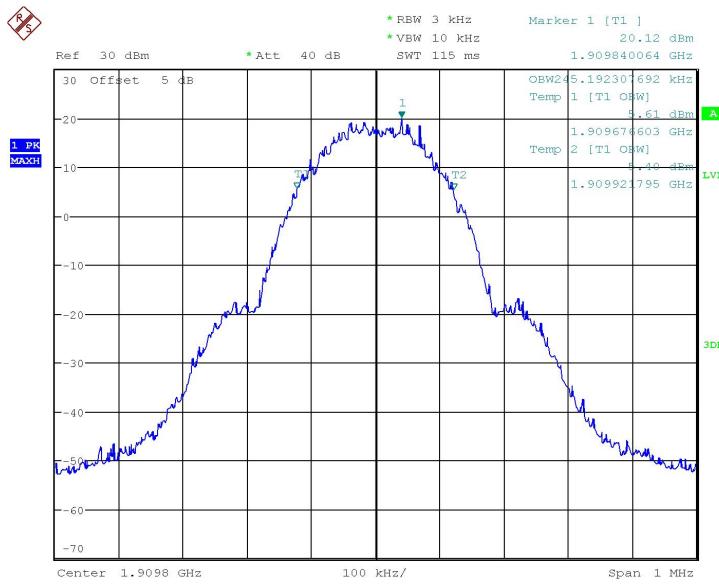
Date: 30.AUG.2018 04:09:10

Channel 661-Occupied Bandwidth

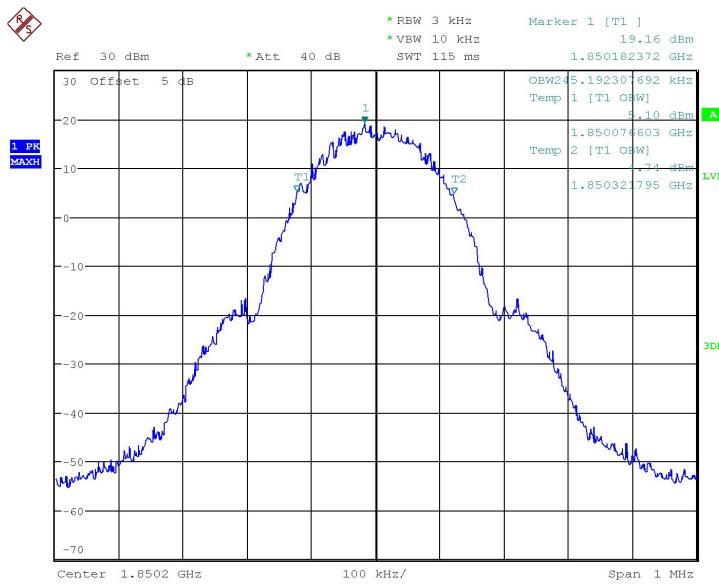

Date: 30.AUG.2018 04:12:13


Channel 512-Occupied Bandwidth



Date: 30.AUG.2018 04:14:59


Channel 810-Occupied Bandwidth

EDGE 1900

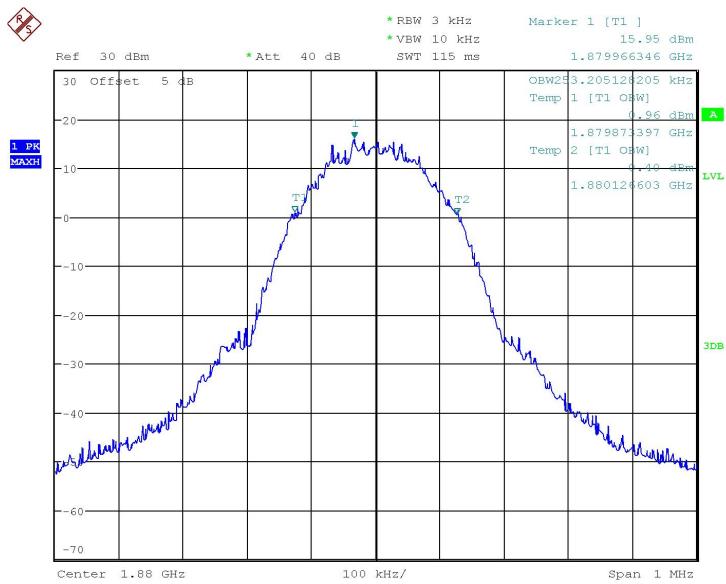


Date: 30.AUG.2018 04:23:06

Channel 661-Occupied Bandwidth

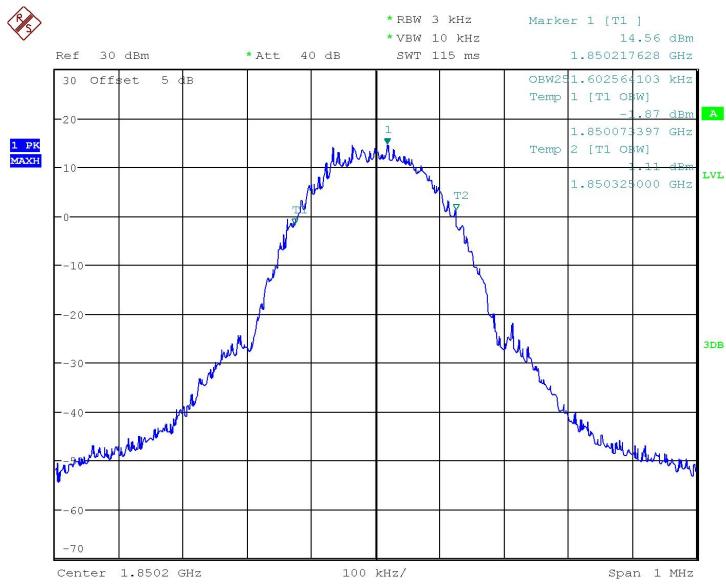

Date: 30.AUG.2018 04:26:48

Channel 512-Occupied Bandwidth

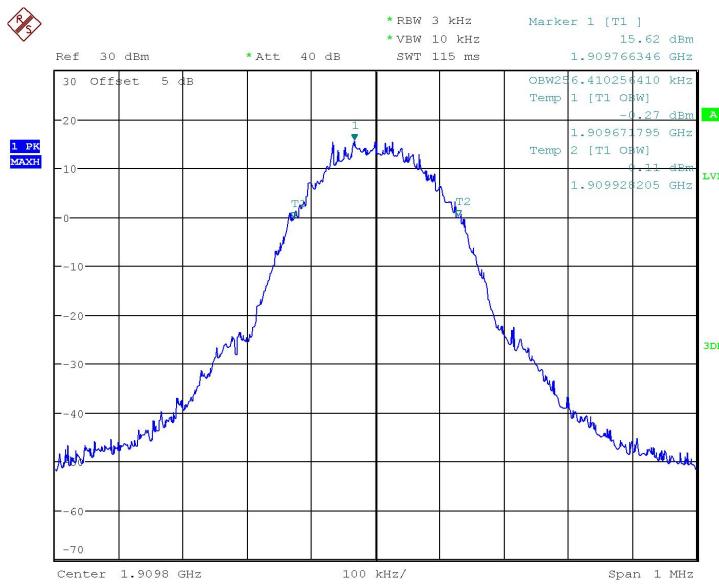


Date: 30.AUG.2018 04:30:35

Channel 810-Occupied Bandwidth

WCDMA BAND II		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 9400	1880	4.183
Low 9262	1852.4	4.167
High 9538	1907.6	4.167


Conclusion: PASS

WCDMA BAND II

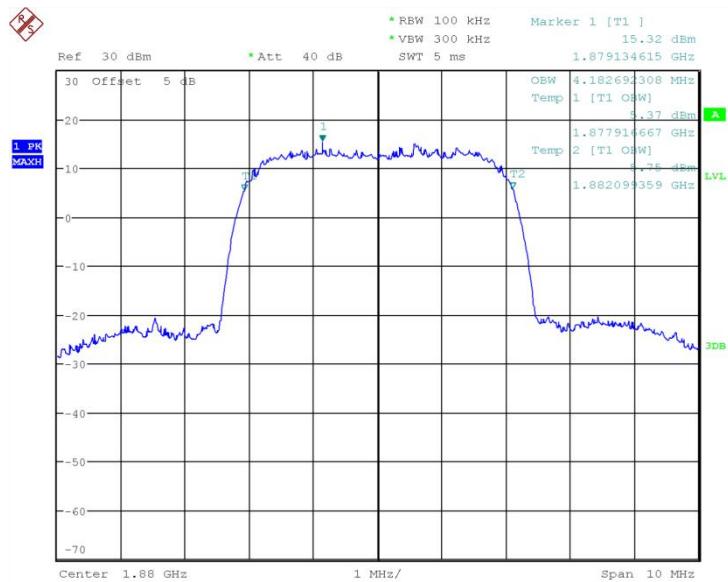


Date: 29.AUG.2018 11:39:16

Channel 9400-Occupied Bandwidth

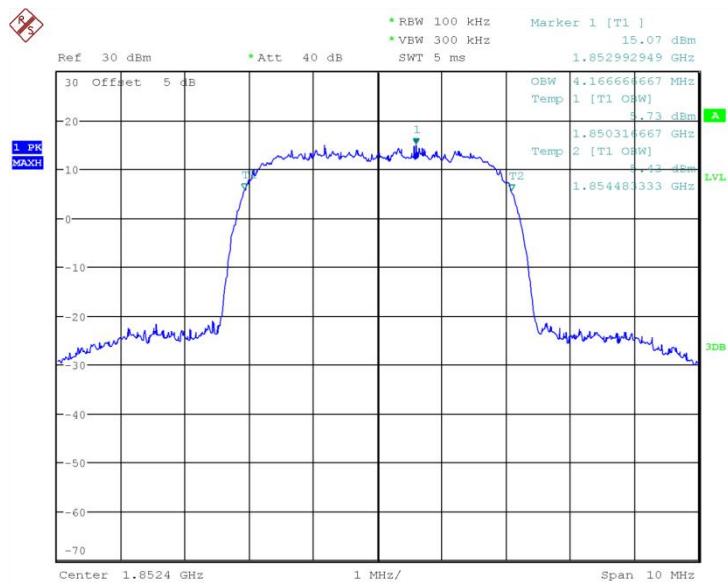

Date: 29.AUG.2018 11:40:18

Channel 9262-Occupied Bandwidth

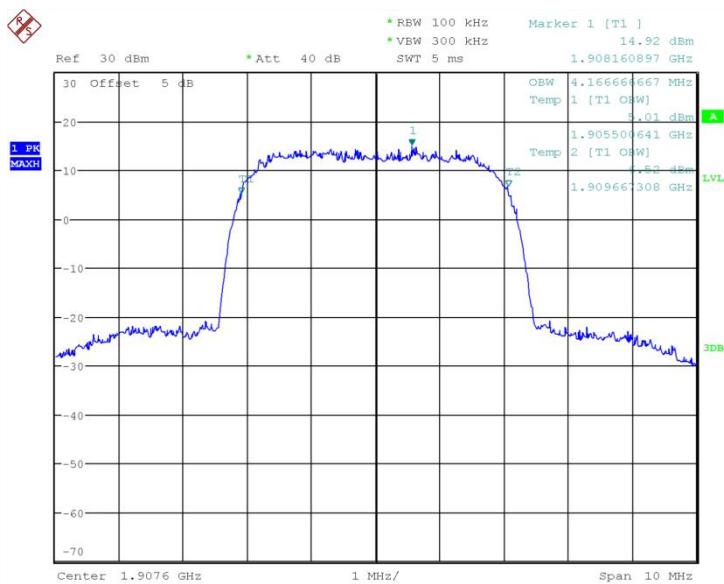


Date: 29.AUG.2018 11:41:20


Channel 9538-Occupied Bandwidth**Conclusion: PASS**

WCDMA BAND V		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 4183	836.6	4.167
Low 4132	826.4	4.151
High 4233	846.6	4.151

Conclusion: PASS

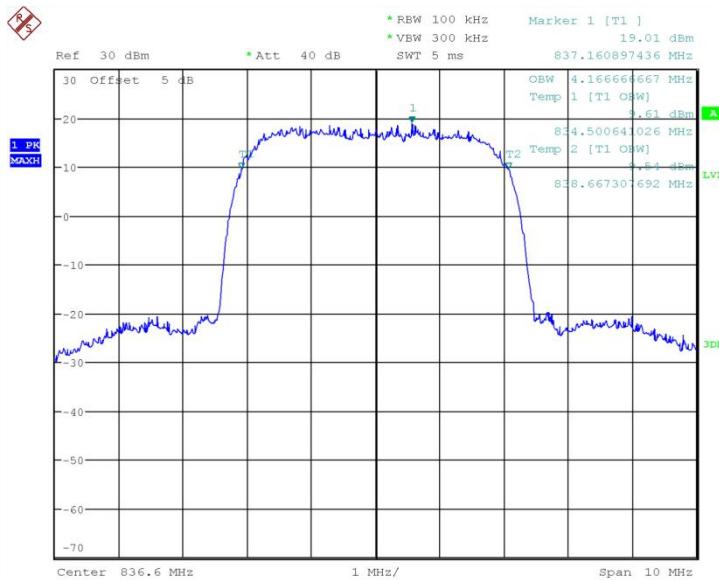
WCDMA BAND V


Date: 29.AUG.2018 11:42:33

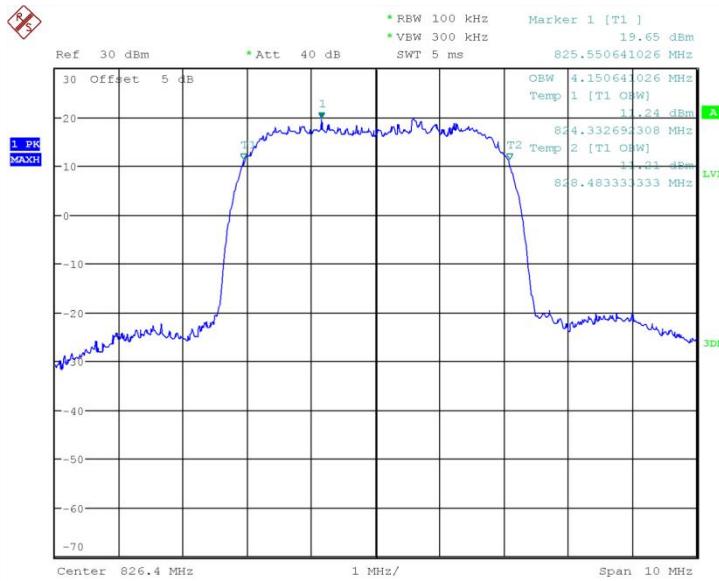Channel 4183-Occupied Bandwidth


Date: 29.AUG.2018 11:43:37

Channel 4132-Occupied Bandwidth

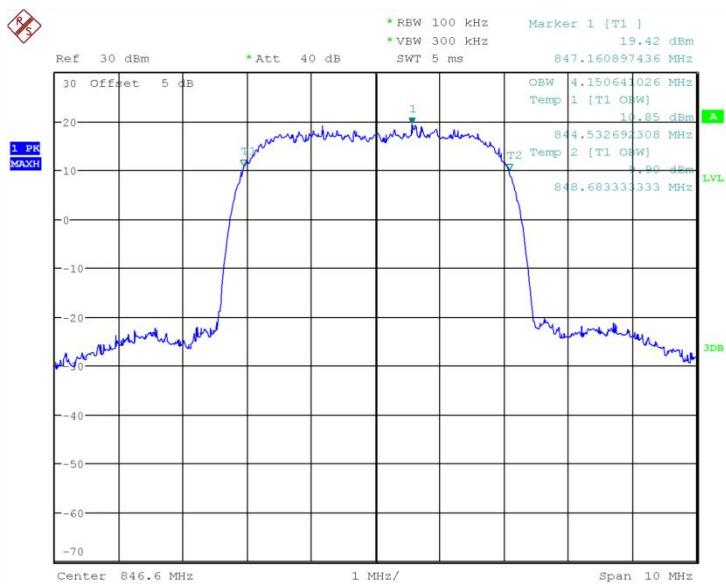

Date: 29.AUG.2018 11:44:41

Channel 4233-Occupied Bandwidth

ANNEX A.4. -26dB Emission Bandwidth

Method of test please refer to KDB971168 D01 v03 clause 4.0.

A.4.1. -26dB Emission Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

A.4.2 Test Procedure:

1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW \geq 3 times RBW.,
3. 26dB bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

A.4.3 Measurement methods:

For GSM: signal analyzer setting as: RBW=3KHz;VBW=10KHz;Span=1MHz.


For WCDMA: signal analyzer setting as: RBW=50KHz;VBW=200KHz;Span=10MHz.

A.4.4 Test results:

GPRS 850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(MHz)
Mid 189	836.4	314.103
Low 128	824.2	312.5
High 251	848.8	314.103


EDGE 850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(MHz)
Mid 189	836.4	312.5
Low 128	824.2	317.308
High 251	848.8	312.5

Conclusion: PASS**GPRS 850**

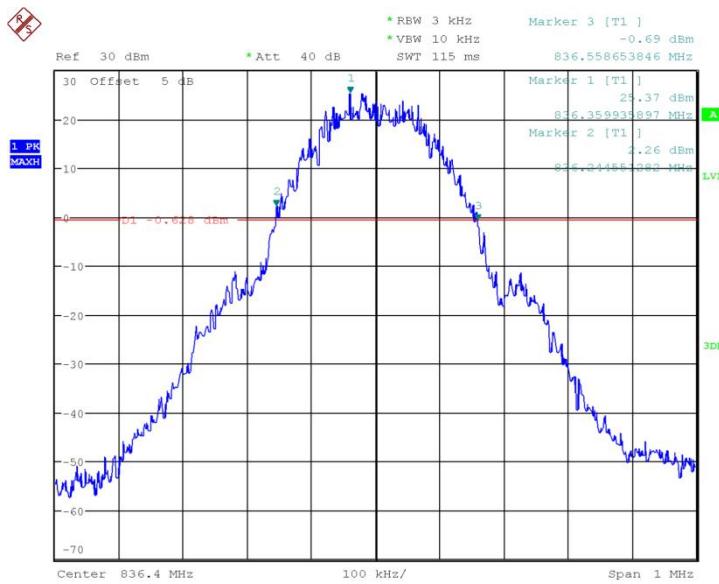


Date: 29.AUG.2018 10:54:42

Channel 189- Emission Bandwidth (-26dBc BW)

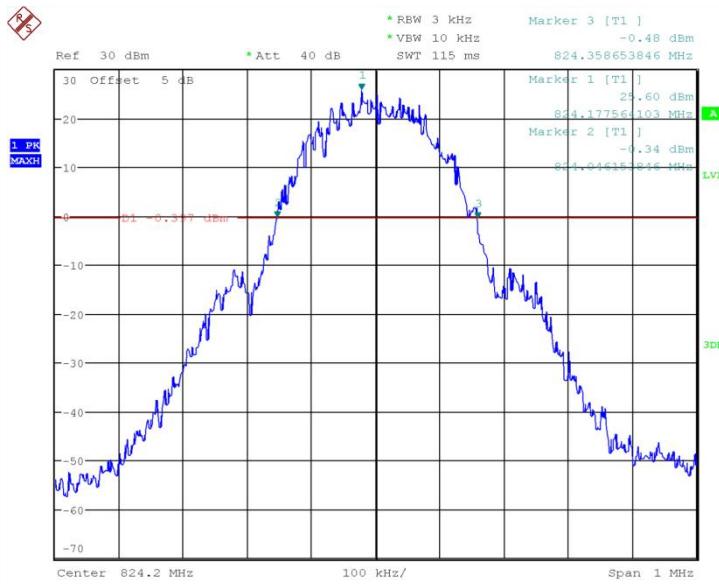

Date: 29.AUG.2018 10:55:12


Channel 128- Emission Bandwidth (-26dBc BW)

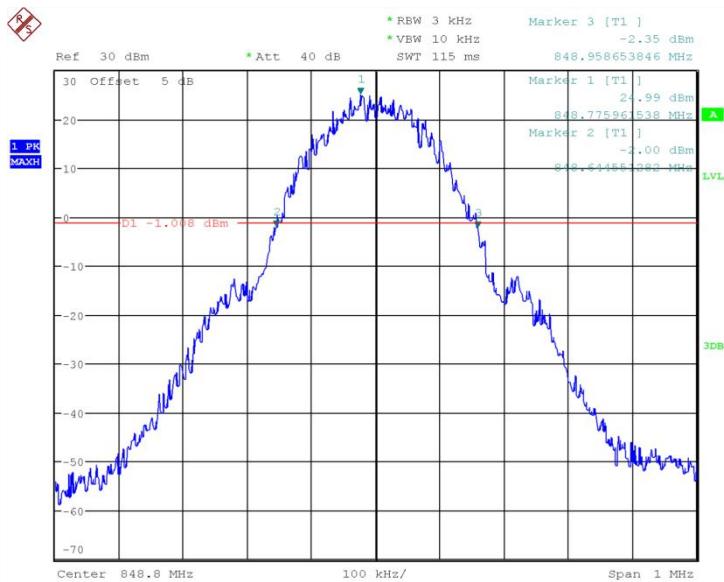

Date: 29.AUG.2018 10:55:41


Channel 251- Emission Bandwidth (-26dBc BW)

EDGE 850

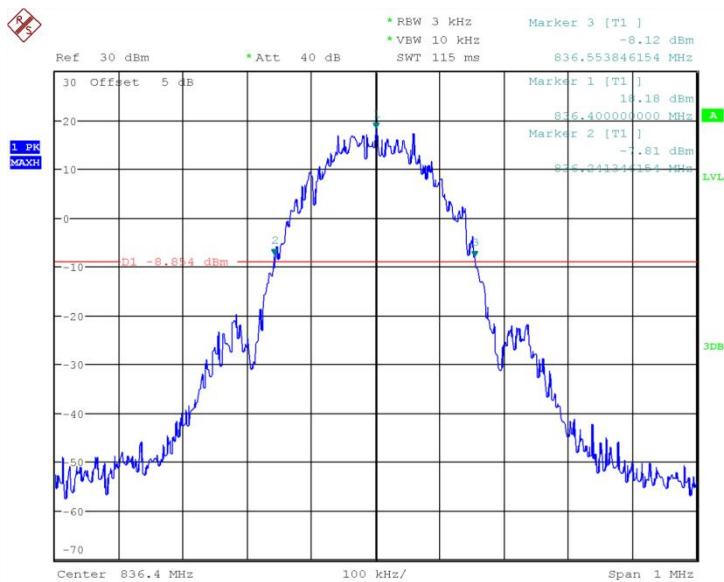


Date: 29.AUG.2018 10:57:36

Channel 189- Emission Bandwidth (-26dBc BW)

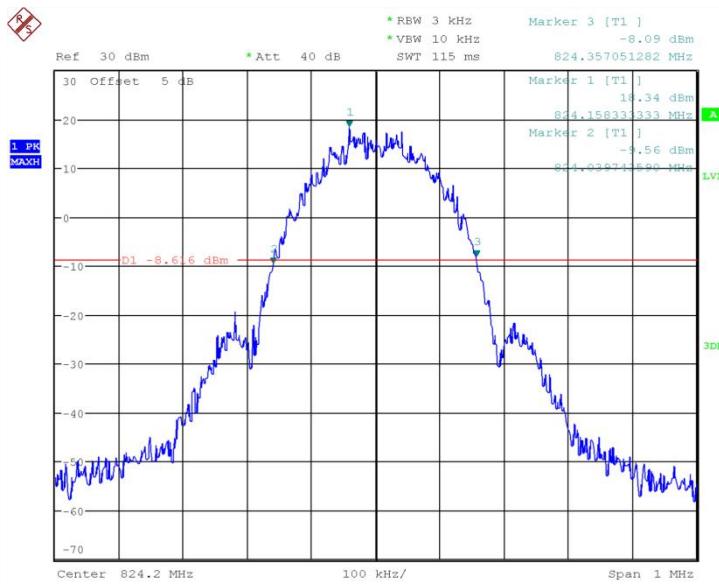

Date: 29.AUG.2018 10:58:05


Channel 128- Emission Bandwidth (-26dBc BW)

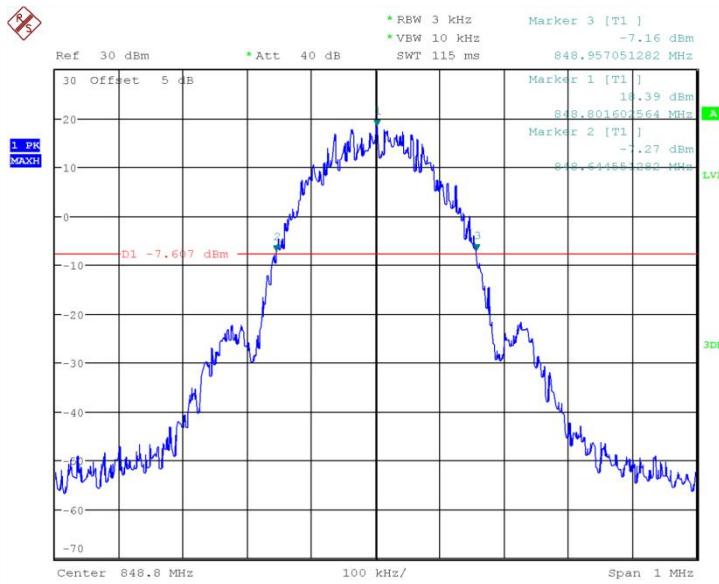

Date: 29.AUG.2018 10:58:34


Channel 251- Emission Bandwidth (-26dBc BW)

GPRS1900		
Test channel	Frequency (MHz)	–26dBc Emission Bandwidth(MHz)
Mid 661	1880	318.91
Low 512	1850.2	317.308
High 810	1909.8	318.91
EDGE1900		
Test channel	Frequency (MHz)	–26dBc Emission Bandwidth(MHz)
Mid 661	1880	331.731
Low 512	1850.2	318.91
High 810	1909.8	322.115

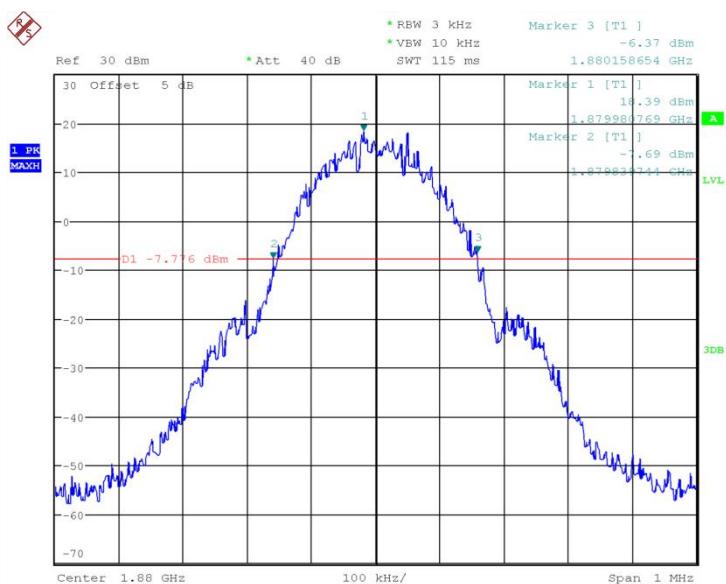Conclusion: PASS
GPRS 1900


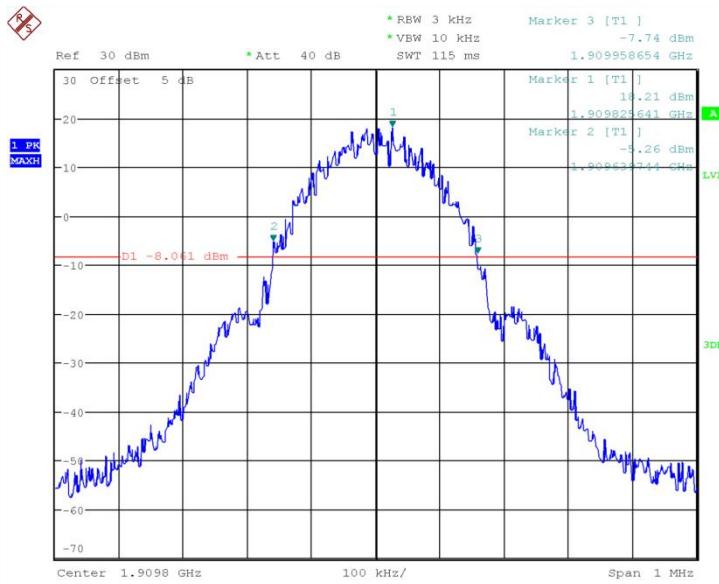
Date: 29.AUG.2018 11:00:23

Channel 661- Emission Bandwidth (-26dBc BW)

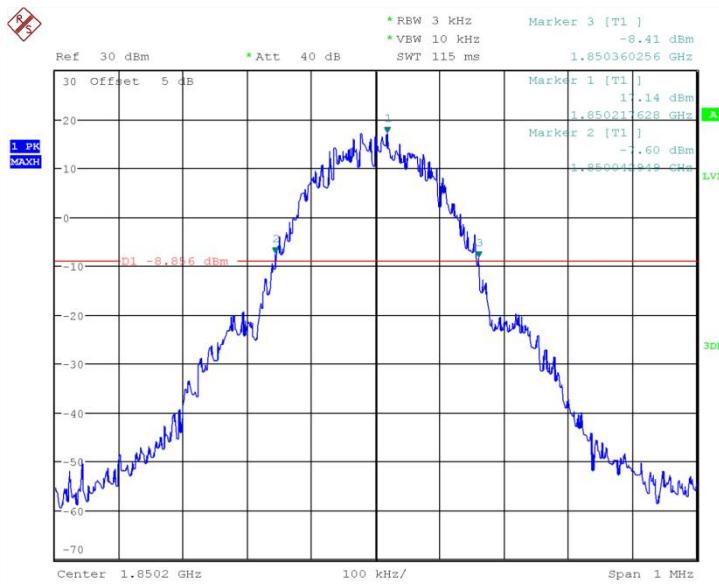


Date: 29.AUG.2018 11:00:52

Channel 512- Emission Bandwidth (-26dBc BW)




Date: 29.AUG.2018 11:01:20

Channel 810- Emission Bandwidth (-26dBc BW)

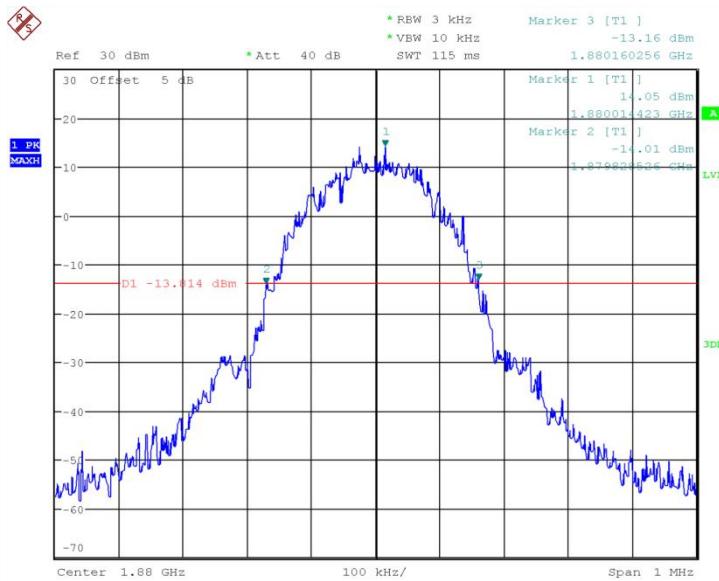
EDGE 1900


Date: 29.AUG.2018 11:03:29

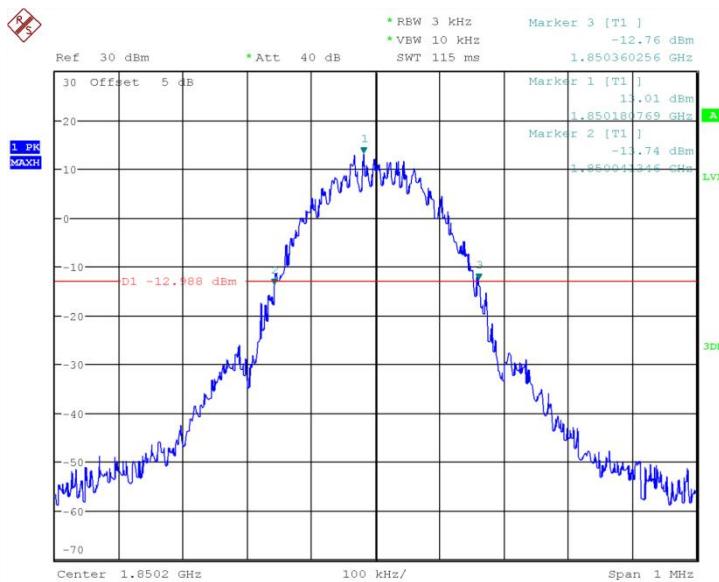Channel 661- Emission Bandwidth (-26dBc BW)


Date: 29.AUG.2018 11:03:57

Channel512- Emission Bandwidth (-26dBc BW)

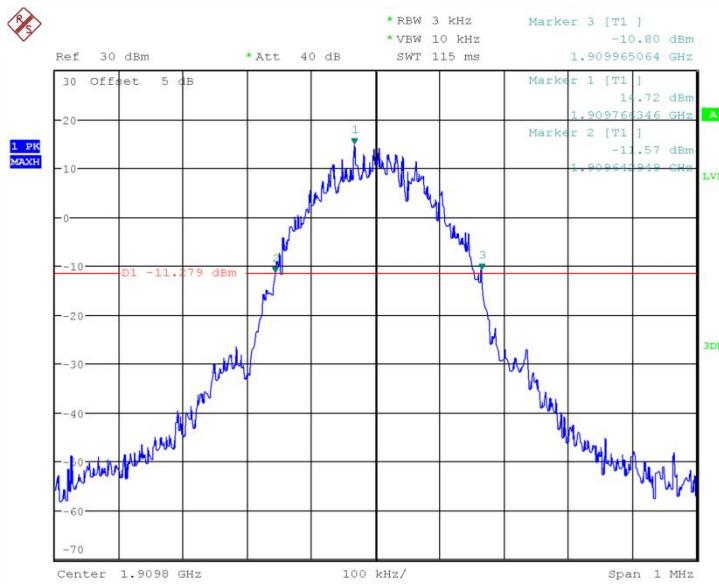


Date: 29.AUG.2018 11:04:25

Channel 810- Emission Bandwidth (-26dBc BW)

WCDMA BAND II		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(MHz)
Mid 9400	1880	4.728
Low 9262	1852.4	4.712
High 9538	1907.6	4.712


Conclusion: PASS

WCDMA BAND II

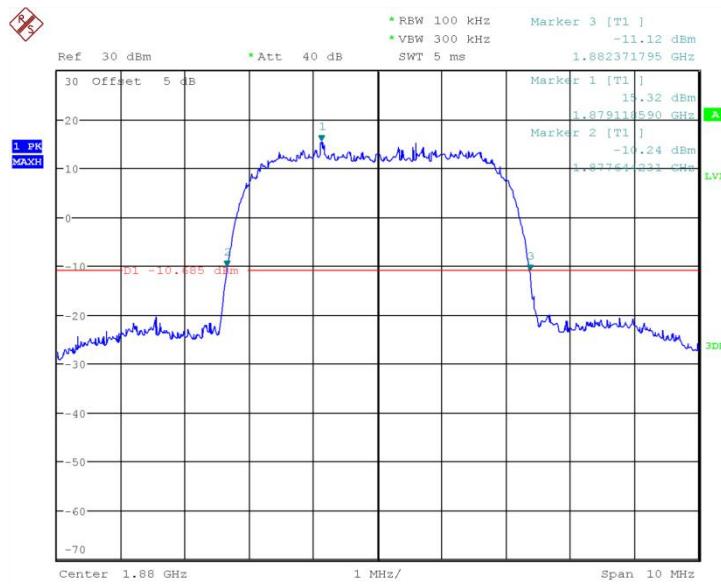


Date: 29.AUG.2018 11:49:55

Channel 9400- Emission Bandwidth (-26dBc BW)

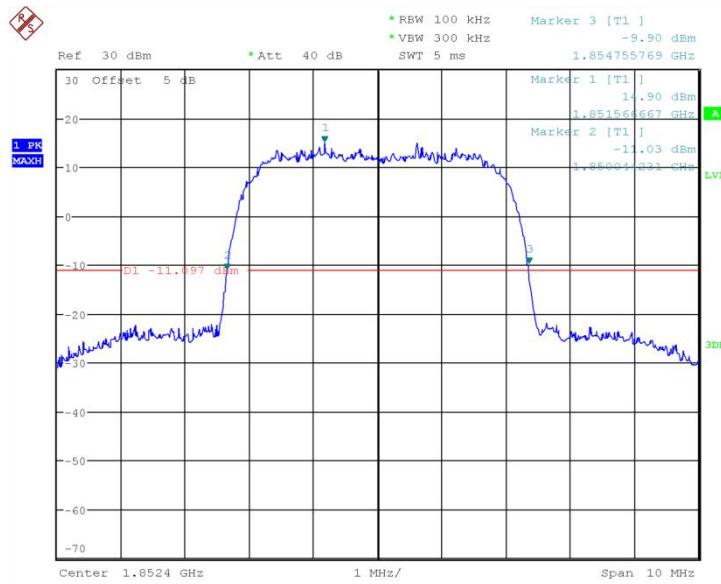

Date: 29.AUG.2018 11:50:26

Channel 9262- Emission Bandwidth (-26dBc BW)

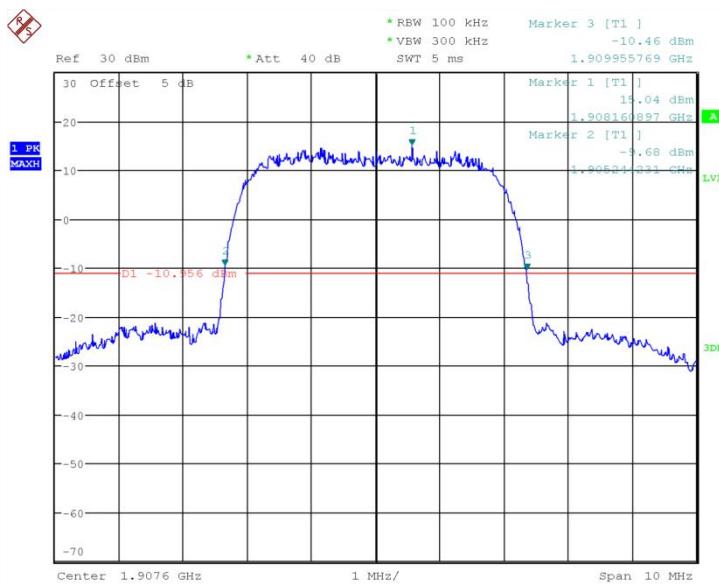


Date: 29.AUG.2018 11:50:57

Channel 9538- Emission Bandwidth (-26dBc BW)


WCDMA BAND V		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(MHz)
Mid 4183	836.6	4.696
Low 4132	826.4	4.712
High 4233	846.6	4.679

Conclusion: PASS**WCDMA BAND V**

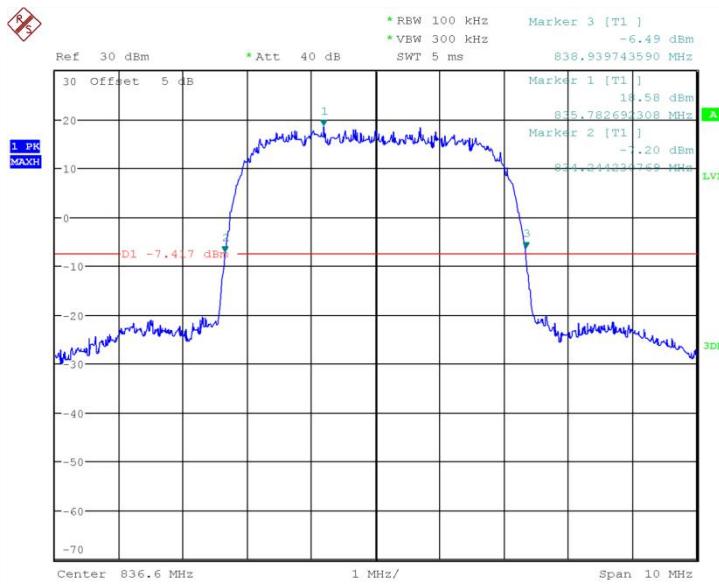


Date: 29.AUG.2018 11:51:37

Channel 4183- Emission Bandwidth (-26dBc BW)

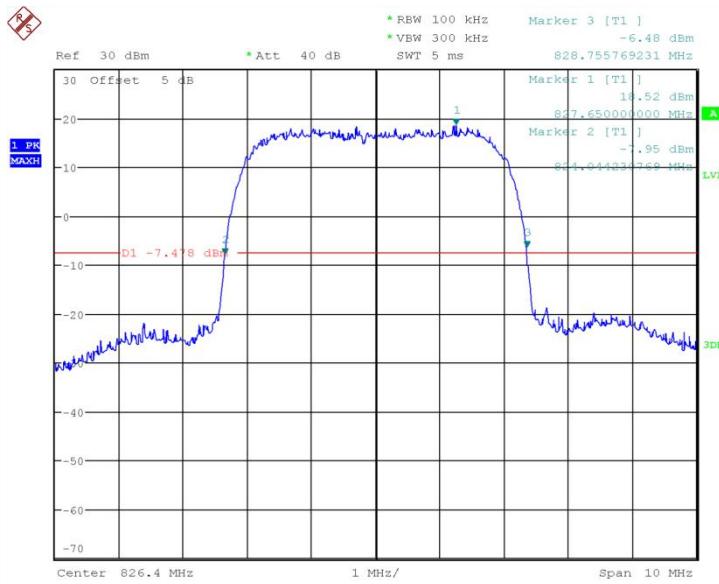

Date: 29.AUG.2018 11:52:09

Channel4132- Emission Bandwidth (-26dBc BW)

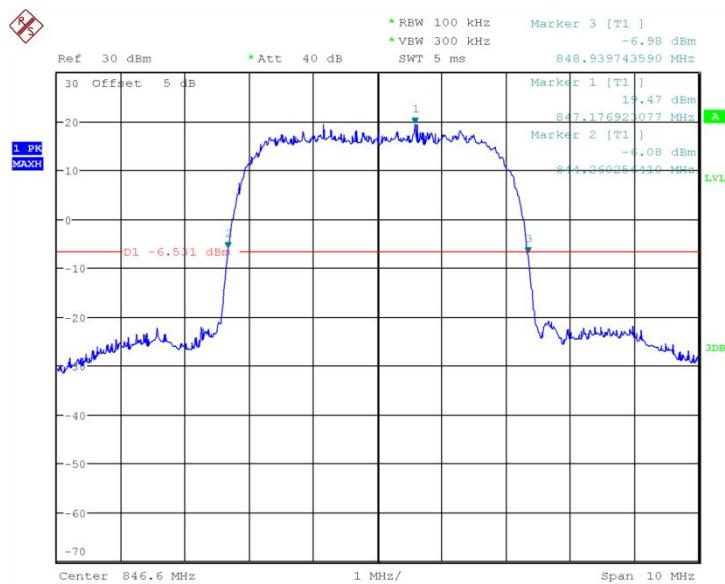

Date: 29.AUG.2018 11:52:41

Channel 4233- Emission Bandwidth (-26dBc BW)

ANNEX A.5. Band Edge at antenna terminals


Method of test measurements please refer to KDB971168 D01 v03 clause 6

A.5.1 Limit:


The magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specification in the instruction manual and/or alignment procedure, shall not be less than $43+10\log$ (Mean power in watts) dBc below the mean power output outside a license's frequency block(-13dBm).

A.5.2 Test procedure:

1. The RF output of the transceiver was connected to a signal analyzer through appropriate attenuation.
2. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band
4. The limit line is derived from $43+10\log(P)$ Db below the transmitter power P(Watts)
 $=P(W)-[43+10\log(P)](Db)$
 $=[30+10\log(P)](dBm)-[43+10\log(P)](Db)$
 $=-13dBm$

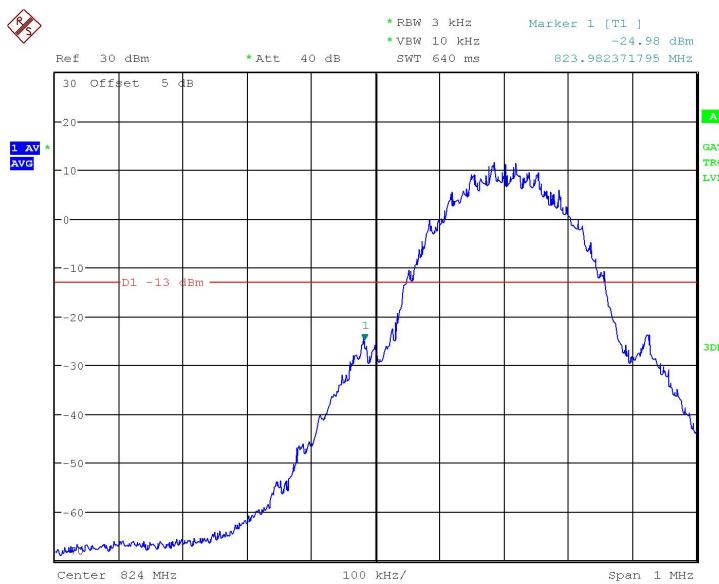
GPRS 850

Date: 20.SEP.2018 04:00:16

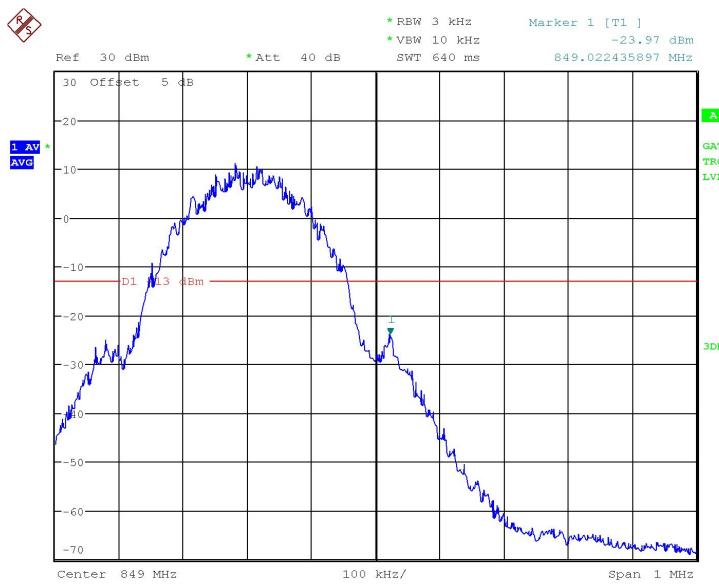
Channel 128- LOW BAND EDGE BLOCK

Date: 20.SEP.2018 04:01:32

Channel 251- HIGH BAND EDGE BLOCK

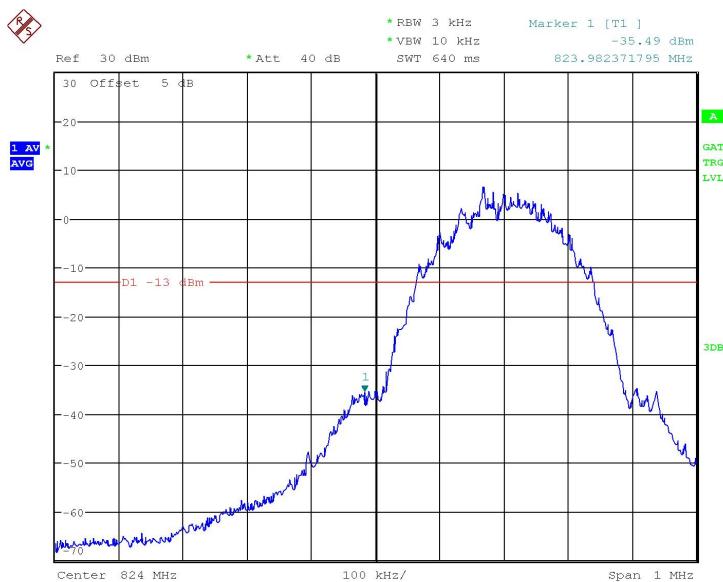
EDGE 850


Date: 20.SEP.2018 04:04:33

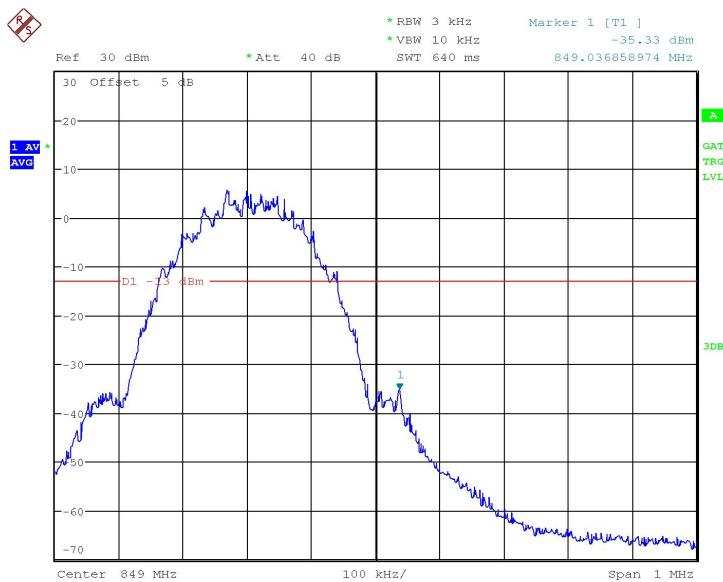
Channel 128- LOW BAND EDGE BLOCK


Date: 20.SEP.2018 04:07:26

Channel 251- HIGH BAND EDGE BLOCK

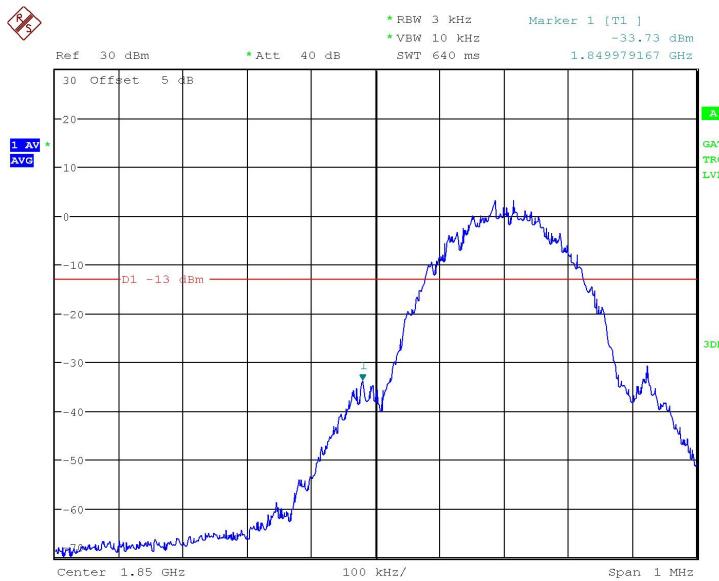
GPRS 1900


Date: 20.SEP.2018 04:11:39

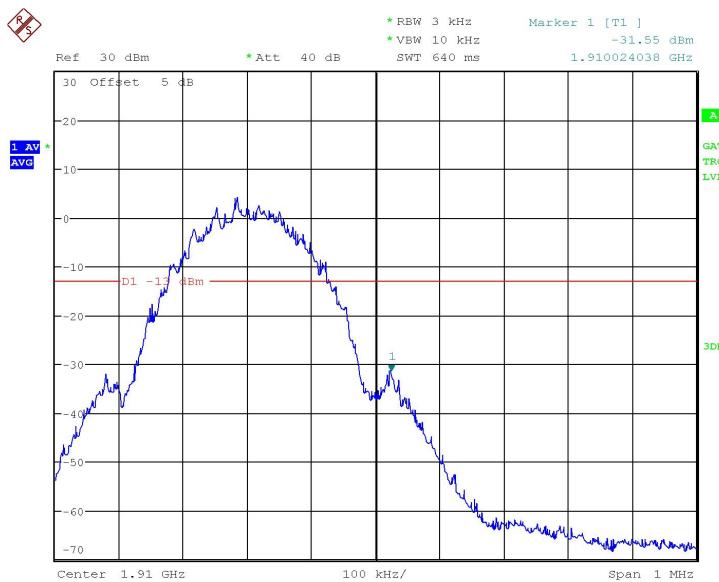
Channel 512- LOW BAND EDGE BLOCK


Date: 20.SEP.2018 04:12:51

Channel 810- HIGH BAND EDGE BLOCK

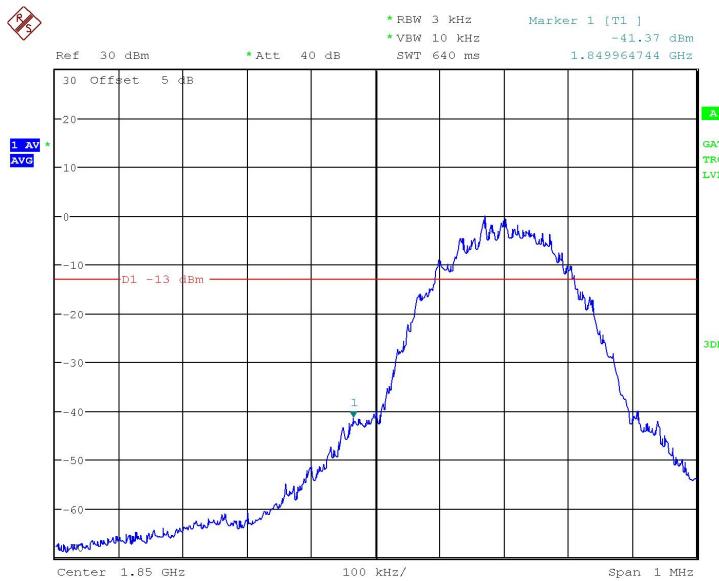
EDGE 1900

Date: 20.SEP.2018 04:15:14

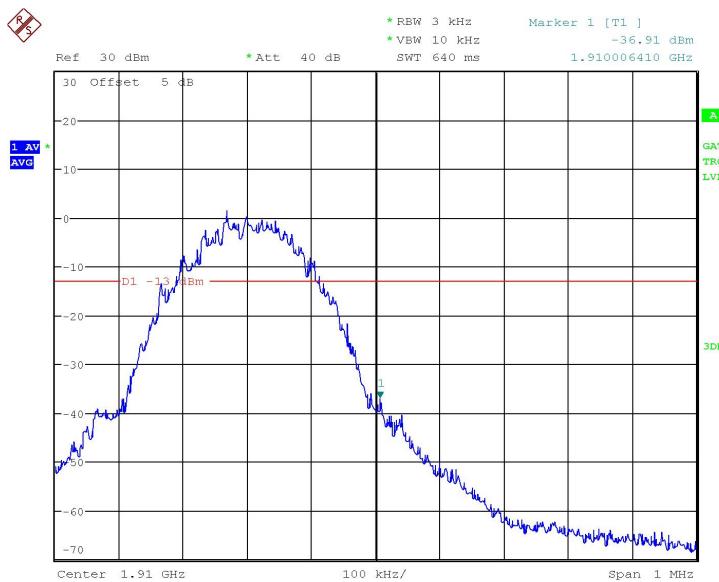
Channel 512- LOW BAND EDGE BLOCK

Date: 20.SEP.2018 04:16:18

Channel 810- HIGH BAND EDGE BLOCK

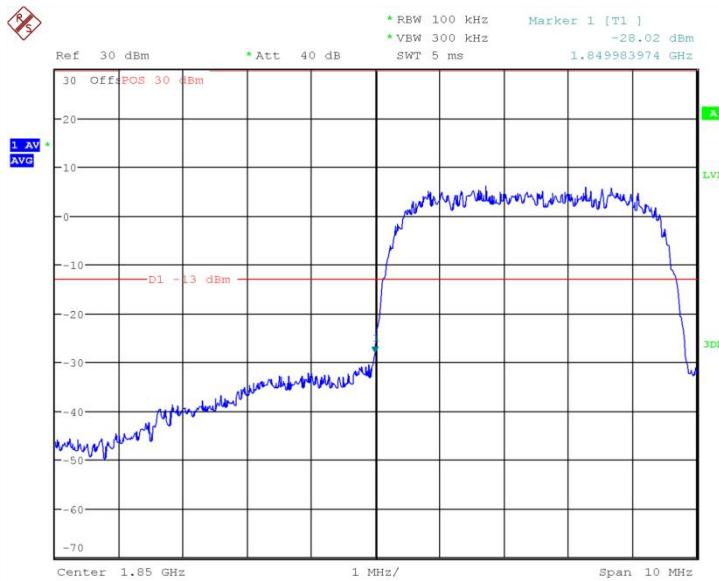
WCDMA BAND II

Date: 29.AUG.2018 11:59:16

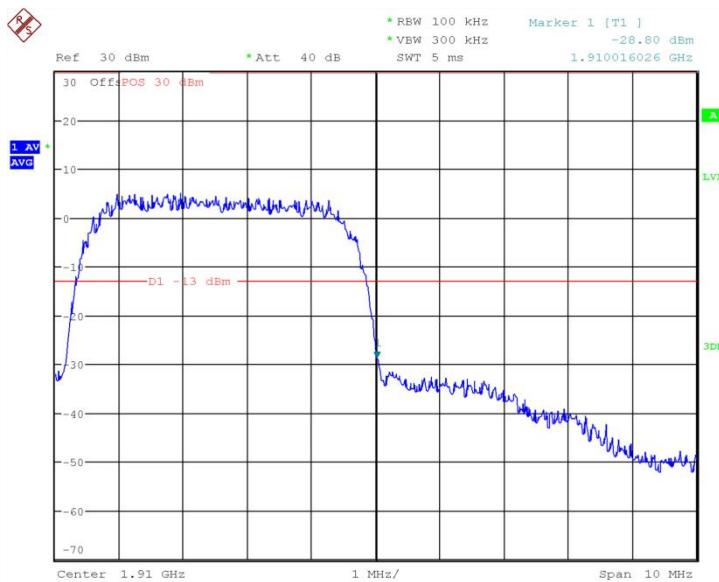
Channel 9262- LOW BAND EDGE BLOCK

Date: 29.AUG.2018 12:00:10

Channel 9538- HIGH BAND EDGE BLOCK**Conclusion: PASS**

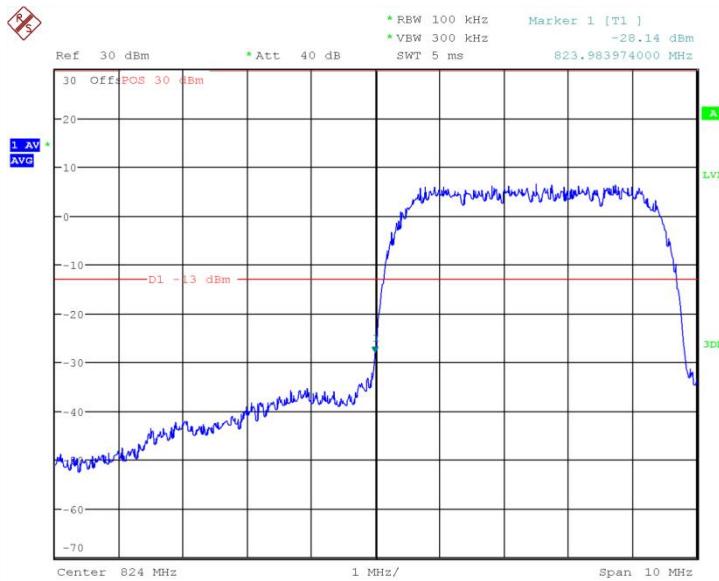WCDMA BAND V

Date: 29.AUG.2018 12:01:13

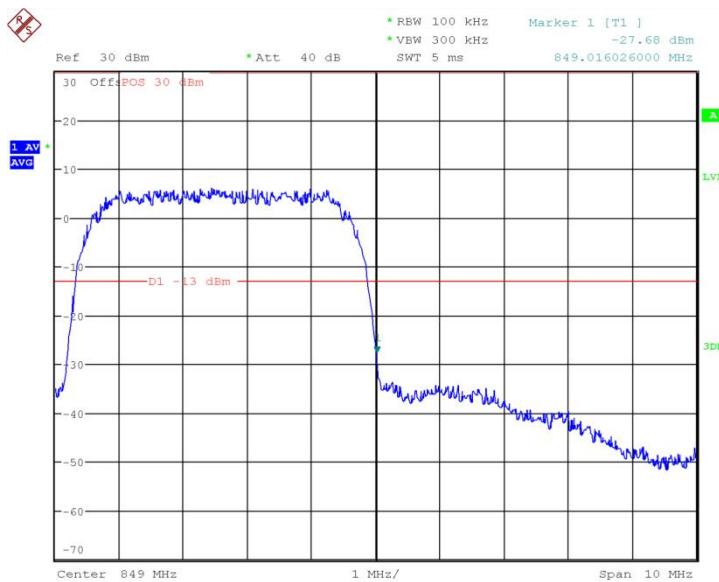Channel 4132- LOW BAND EDGE BLOCK

Date: 29.AUG.2018 12:02:07

Channel 4233- HIGH BAND EDGE BLOCK**Conclusion: PASS**

ANNEX A.6. FREQUENCY STABILITY

Method of test measurements please refer to KDB971168 D01 v03 clause 9

A.5.1. Method of Measurement and test procedures

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.5.2. Measurement Limit

A.5.2.1. For Hand carried battery powered equipment

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 6.6VDC and 8.4VDC, with a nominal voltage of 8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages was varied from 85% to 115%.