



Model: PowerLine Guardian™ 1000

Serial No: 26014-001-10-02A-0D

Mfg Location: Wilmington, NC USA

Approximate Weight: 211 lbs

Winding Material: Copper

Core Material: Steel

Basic Insulation Level: 550 kV

Mfg Date: September 17, 2014

Max Continuous Current: 1000 A RMS

Max Operating Voltage: 123 kV RMS

Inductance @ 1000 A: 42 μ H $\pm$ 5%

Max Fault Current: 63 kA RMS

Max Continuous Conductor Temp: 100° C

Frequency: 60 Hz


U.S Patent No. 7,835,128

and patents pending

PowerLine Guardian™

Connection Diagram:

Power Line

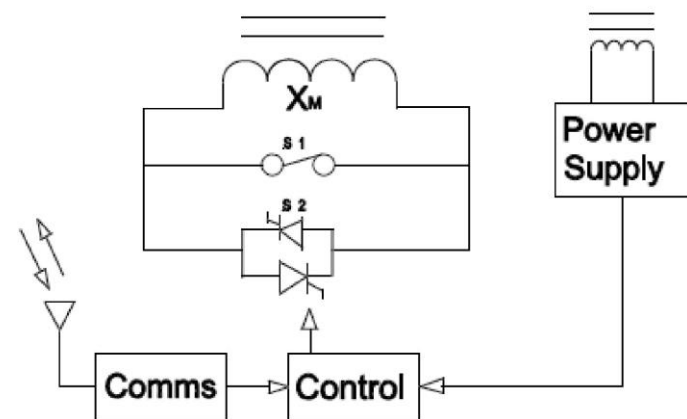

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES, OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

FCC ID: QPS01002

Contains FCC ID: RI7HE910NAV2



Smart Wire Grid, Inc. 1300 Clay Street, Suite 840 Oakland, CA 94612 USA