

**FCC 47 CFR PART 15 SUBPART C**  
**CERTIFICATION TEST REPORT**

*For*

FaceSentry6

MODEL No.: FS6-AN, FS6-Mini

FCC ID: QQ4FS6

Trademark: N/A

REPORT NO.: ES180525056W

ISSUE DATE: October 17, 2018

*Prepared for*

IWT Limited.

Level 7, The Wave, 4 Hing Yip Street, Kwun Tong Hong Kong

*Prepared by*

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

## Table of Contents

<b>1</b>	<b>EUT TECHNICAL DESCRIPTION .....</b>	<b>4</b>
<b>2</b>	<b>SUMMARY OF TEST RESULT .....</b>	<b>5</b>
<b>3</b>	<b>TEST METHODOLOGY.....</b>	<b>6</b>
3.1	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
3.2	MEASUREMENT EQUIPMENT USED.....	6
3.3	DESCRIPTION OF TEST MODES .....	7
<b>4</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
4.1	FACILITIES.....	8
4.2	LABORATORY ACCREDITATIONS AND LISTINGS .....	8
<b>5</b>	<b>TEST SYSTEM UNCERTAINTY .....</b>	<b>9</b>
<b>6</b>	<b>SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
6.1	RADIO FREQUENCY TEST SETUP 1 .....	10
6.2	RADIO FREQUENCY TEST SETUP 2.....	10
6.3	CONDUCTED EMISSION TEST SETUP.....	11
6.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM .....	12
6.5	SUPPORT EQUIPMENT .....	12
<b>7</b>	<b>TEST REQUIREMENTS .....</b>	<b>13</b>
7.1	OCCUPIED BANDWIDTH.....	13
7.2	FREQUENCY STABILITY .....	15
7.3	RADIATED SPURIOUS EMISSION .....	17
7.4	CONDUCTED EMISSION TEST .....	30
<b>8</b>	<b>ANTENNA APPLICATION .....</b>	<b>35</b>

## TEST RESULT CERTIFICATION

Applicant:	IWT Limited. Level 7, The Wave, 4 Hing Yip Street, Kwun Tong Hong Kong
Manufacturer:	IWT Limited. Level 7, The Wave, 4 Hing Yip Street, Kwun Tong Hong Kong
Product Description:	FaceSentry6
Model Number:	FS6-AN, FS6-Mini
Trade Mark:	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J	
FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.225

The test results of this report relate only to the tested sample identified in this report

Date of Test : May 25, 2018 to October 16, 2018

Prepared by : Sevin Li  
Sevin Li/Editor

Reviewer : Joe Xia  
Joe Xia/Supervisor

Approve & Authorized Signer : Lisa Wang  
Lisa Wang/Manager



## 1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>Product Description:</b>	FaceSentry6
<b>Model Number:</b>	FS6-AN, FS6-Mini (Two models are identical in circuitry and electrical, mechanical and physical construction; the differences are the LED screen size and the camera.)
<b>Modulation:</b>	RFID: ASK
<b>Operating Frequency Range(s):</b>	13.56MHz
<b>Number of Channels:</b>	1 channel
<b>Antenna Type:</b>	Induction coil Antenna
<b>Power supply:</b>	<input checked="" type="checkbox"/> AC 100-240V, 50-60Hz

**Note:** for more details, please refer to the User's manual of the EUT.

## 2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
2.1049	Occupied Bandwidth	PASS	
15.225(e)	Frequency stability	PASS	
15.225(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	
NOTE1: N/A (Not Applicable)			

### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: QQ4FS6 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

### 3 TEST METHODOLOGY

#### 3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:  
 FCC 47 CFR Part 2, Subpart J  
 FCC 47 CFR Part 15, Subpart C

#### 3.2 MEASUREMENT EQUIPMENT USED

##### 3.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 19, 2018	May 18, 2019
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 19, 2018	May 18, 2019
50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 20, 2018	May 19, 2019
Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 20, 2018	May 19, 2019
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 19, 2018	May 18, 2019
I.S.N	Teseq GmbH	ISN T800	30327	May 20, 2018	May 19, 2019

##### 3.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 20, 2018	May 19, 2019
Pre-Amplifier	HP	8447F	2944A07999	May 19, 2018	May 18, 2019
Bilog Antenna	Schwarzbeck	VULB9163	142	May 19, 2018	May 18, 2019
Loop Antenna	ARA	PLA-1030/B	1029	May 19, 2018	May 18, 2019
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 20, 2018	May 19, 2019
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 19, 2018	May 18, 2019
Cable	Schwarzbeck	AK9513	ACRX1	May 20, 2018	May 19, 2019
Cable	Rosenberger	N/A	FP2RX2	May 20, 2018	May 19, 2019
Cable	Schwarzbeck	AK9513	CRPX1	May 20, 2018	May 19, 2019
Cable	Schwarzbeck	AK9513	CRRX2	May 20, 2018	May 19, 2019

##### 3.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 20, 2018	May 19, 2019
Signal Analyzer	Agilent	N9010A	My53470879	May 20, 2018	May 19, 2019
Power meter	Anritsu	ML2495A	0824006	May 20, 2018	May 19, 2019
Power sensor	Anritsu	MA2411B	0738172	May 20, 2018	May 19, 2019

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### **3.3 DESCRIPTION OF TEST MODES**

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 4 FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2016.10.24

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)

The Certificate Registration Number is L229

Accredited by TUV Rheinland Shenzhen, 2016.05.19

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, August 06, 2018

The certificate is valid until August 07, 2020

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by Industry Canada, November 24, 2015

The Certificate Registration Number is 4480A

## 5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.


Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

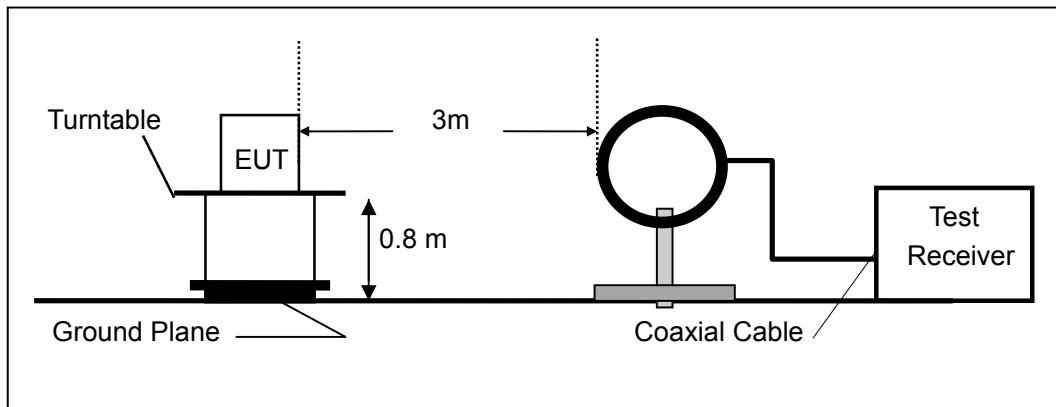

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

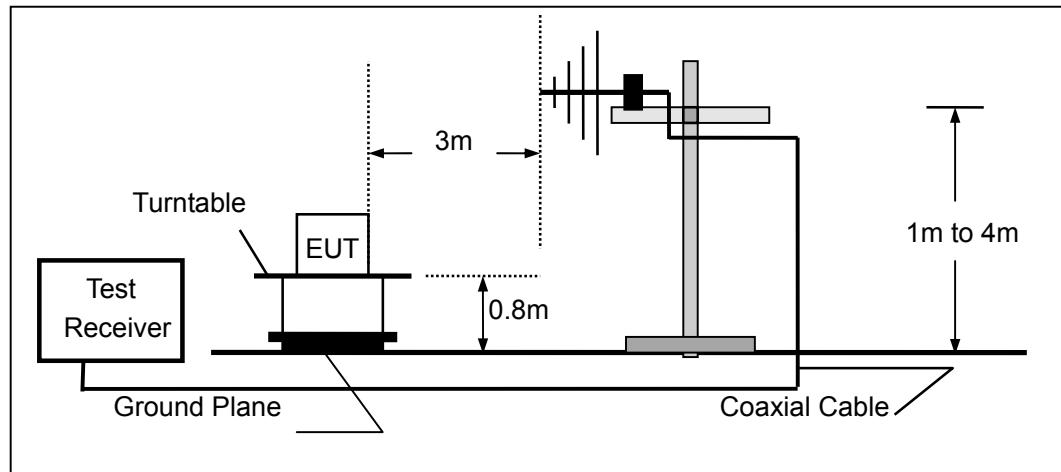


### 6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

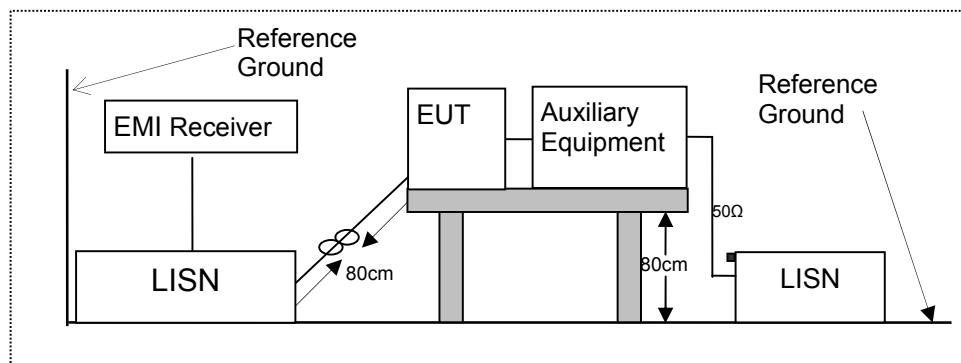

#### 6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

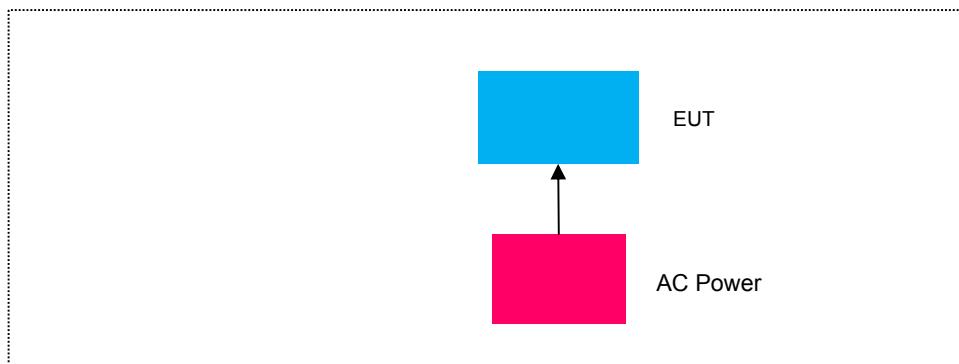

#### 6.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Note
N/A	N/A	N/A	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 7 TEST REQUIREMENTS

### 7.1 OCCUPIED BANDWIDTH

#### 7.1.1 Applicable Standard

According to FCC Part 2.1049

#### 7.1.2 Conformance Limit

No limit requirement.

#### 7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

#### 7.1.4 Test Procedure

The EUT was operating in transmit mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1kHz

Set the video bandwidth (VBW) =3 kHz

Set Span= approximately 2 to 4 times the occupied bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 99% down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 99% bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

#### 7.1.5 Test Results

Temperature :	28°C	Test By:	Kingkong		
Humidity :	65 %				
Modulation Mode	Channel Number	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Verdict
ASK	0	13.56MHz	1.518	N/A	PASS
Note: N/A (Not Applicable)					

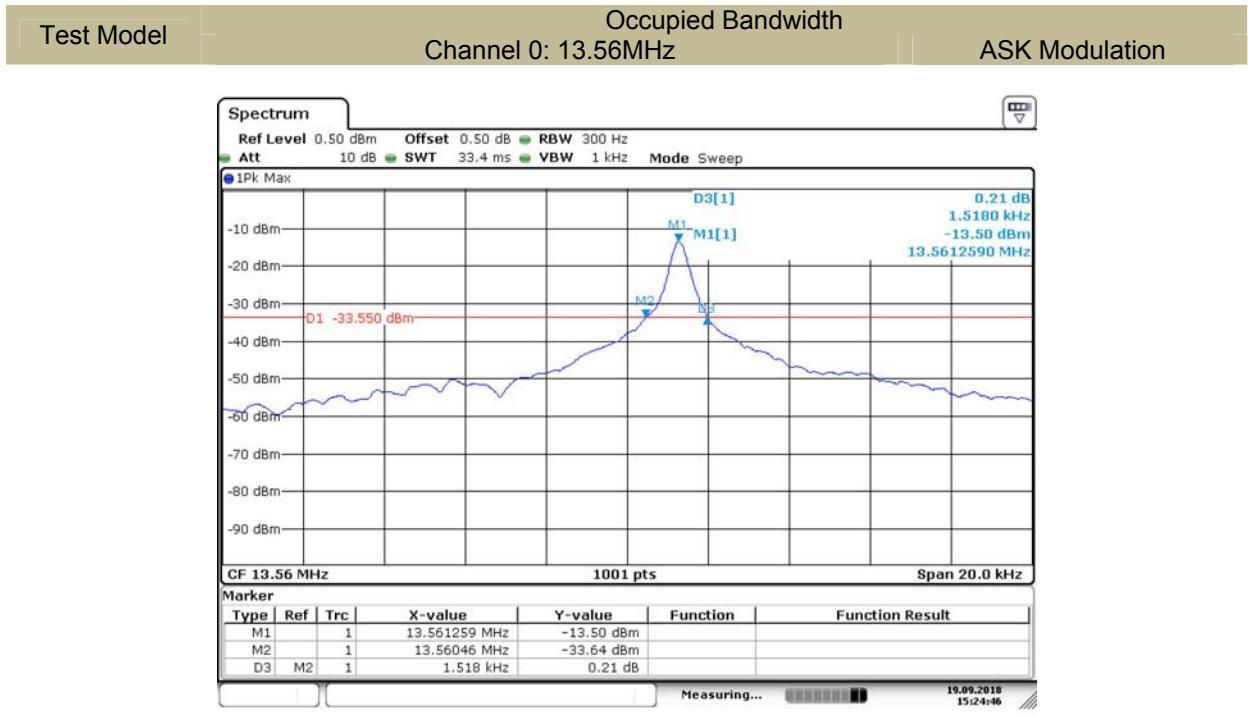

## 7.2 FREQUENCY STABILITY

### 7.2.1 Applicable Standard

According to FCC Part 2.1055

### 7.2.2 Conformance Limit

According to part 15.225(e), The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 7.2.4 Test Procedures

Connect the EUT to frequency analyzer via the antenna connector.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

### 7.2.5 Test Results

Operation Mode	Channel Number	Test Condition		Channel Frequency (MHz)	Freq.Dev. (Hz)	Deviation (ppm)	Limit (ppm)
		Voltage (V)	Temp (°C)				
ASK	CH0	Vnom	-20	13.56	125	9.22	10
			-10	13.56	125	9.22	10
			0	13.56	122	9.00	10
			10	13.56	125	9.22	10
			20	13.56	122	9.00	10
			30	13.56	122	9.00	10
			40	13.56	125	9.22	10
			50	13.56	122	9.00	10
		85% Vnom	20	13.56	125	9.22	10
		115% Vnom	20	13.56	125	9.22	10
VERDICT				PASS			

### 7.3 RADIATED SPURIOUS EMISSION

#### 7.3.1 Applicable Standard

According to FCC Part 15.225 and 15.209

#### 7.3.2 Conformance Limit

Field Strength of Fundamental Emissions and Spectrum Mask					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
<b>Fundamental</b>	15848	84.0	103.1	<b>124.0</b>	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	<b>69.5</b>	88.6
13.110~13.410	106	40.5	59.6	<b>80.5</b>	99.6
13.410~13.553	334	50.5	69.6	<b>90.5</b>	109.6
13.553~13.567	15848	84.0	103.1	<b>124.0</b>	143.1
13.567~13.710	334	50.5	69.6	<b>90.5</b>	109.6
13.710~14.010	106	40.5	59.6	<b>80.5</b>	99.6
14.010~30.000	30	29.5	48.6	<b>69.5</b>	88.6

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	48.5 - 13.8	300
0.490-1.705	24000/F(KHz)	33.8 – 23.0	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### **7.3.3 Test Configuration**

Test according to clause 6.2 radio frequency test setup 2

### **7.3.4 Test Procedure**

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for  $f < 1$  GHz(30MHz to 1GHz), 200Hz for  $f < 150$  KHz(9KHz to 150KHz), 9KHz for  $f < 30$  MHz(150KHz to 30KHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold


Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### **7.3.5 Test Results**

■ Field Strength of Fundamental Emissions and Spectrum Mask

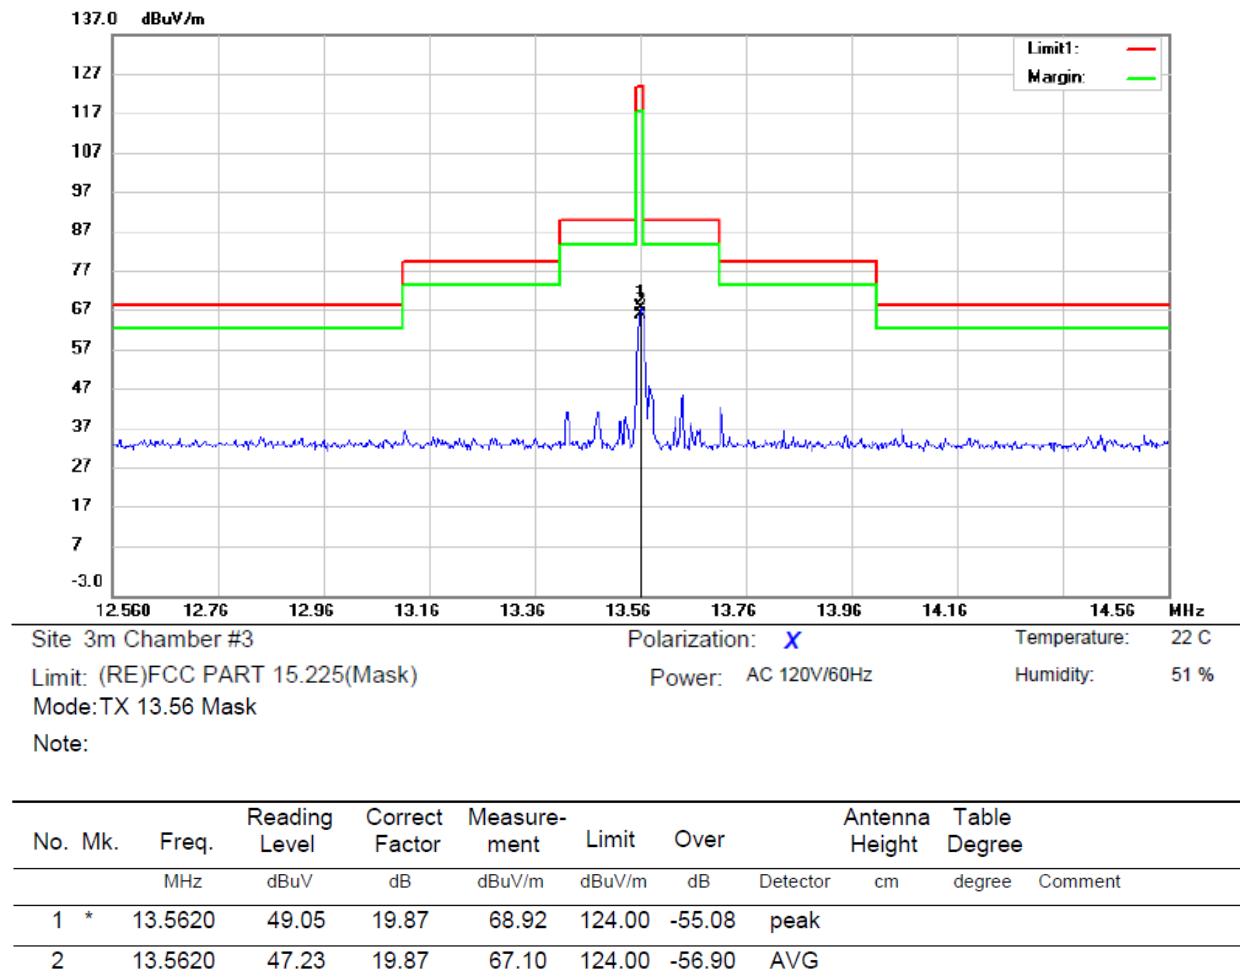

\*:Maximum data    x:Over limit    !:over margin


Operator: CSL



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	13.5620	46.40	19.87	66.27	124.00	-57.73	peak		
2		13.5620	44.73	19.87	64.60	124.00	-59.40	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

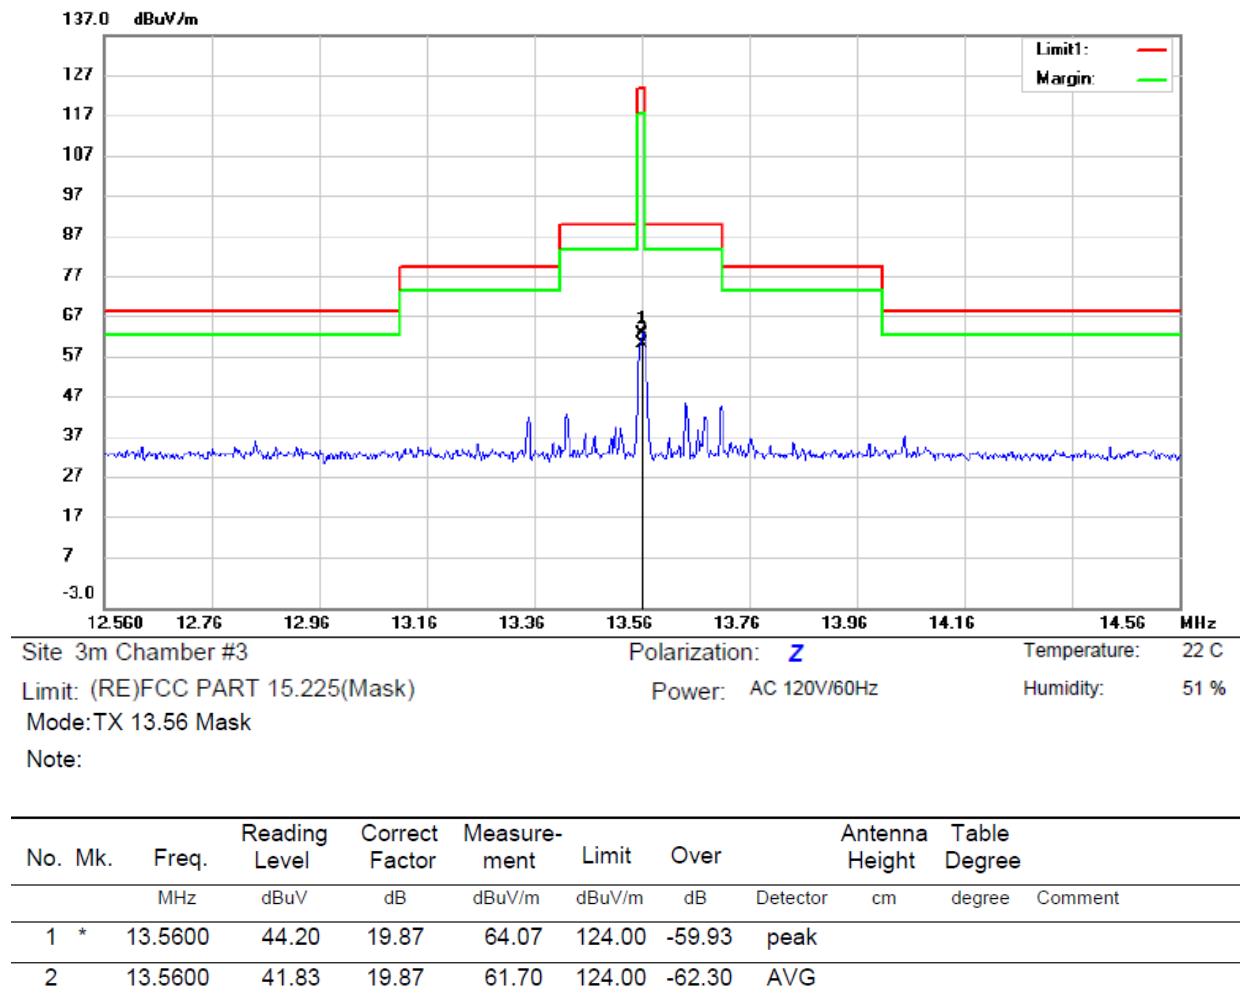

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

■ Spurious Emission below 150kHz (9KHz to 150kHz)

Temperature:	24°C	Test By:	KK
Humidity:	53 %	Test mode:	TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission below 30MHz (150KHz to 30MHz)


All mode have been tested, and the worst result was report as below:

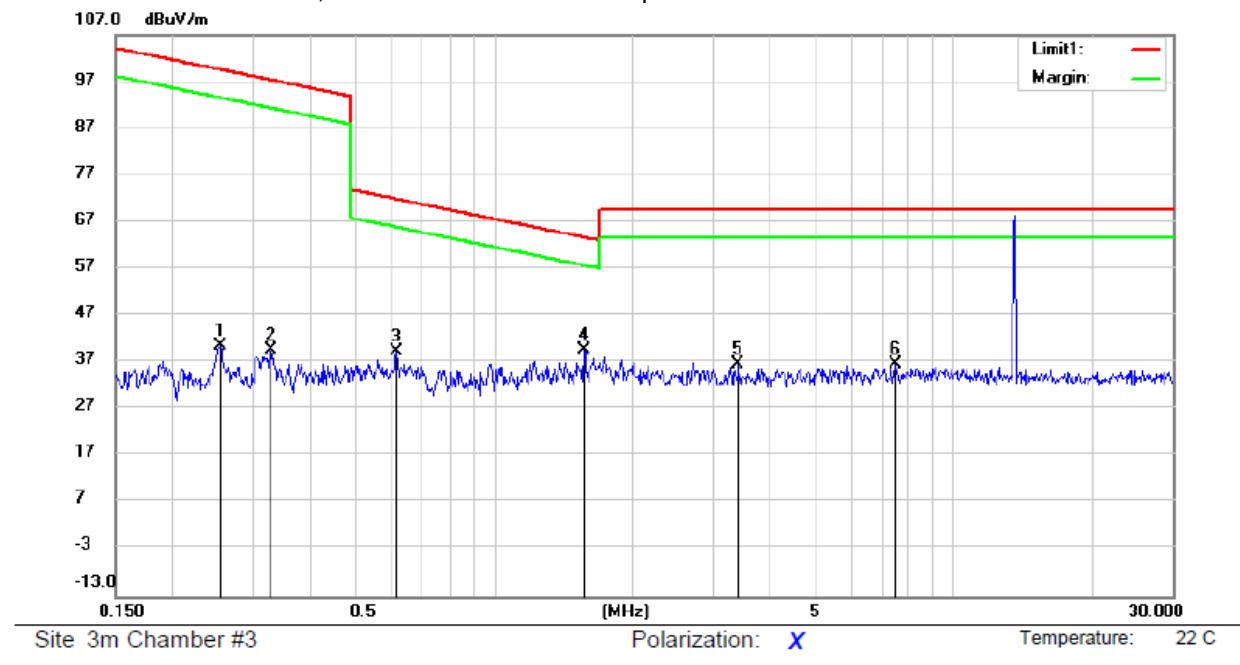

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		0.2534	19.40	21.14	40.54	99.52	-58.98	QP			
2		0.3268	18.38	21.13	39.51	97.32	-57.81	QP			
3		0.6140	18.12	21.11	39.23	71.85	-32.62	QP			
4	*	1.5683	18.93	20.77	39.70	63.72	-24.02	QP			
5		3.3993	16.42	20.22	36.64	69.50	-32.86	QP			
6		7.4860	16.37	20.29	36.66	69.50	-32.84	QP			


\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

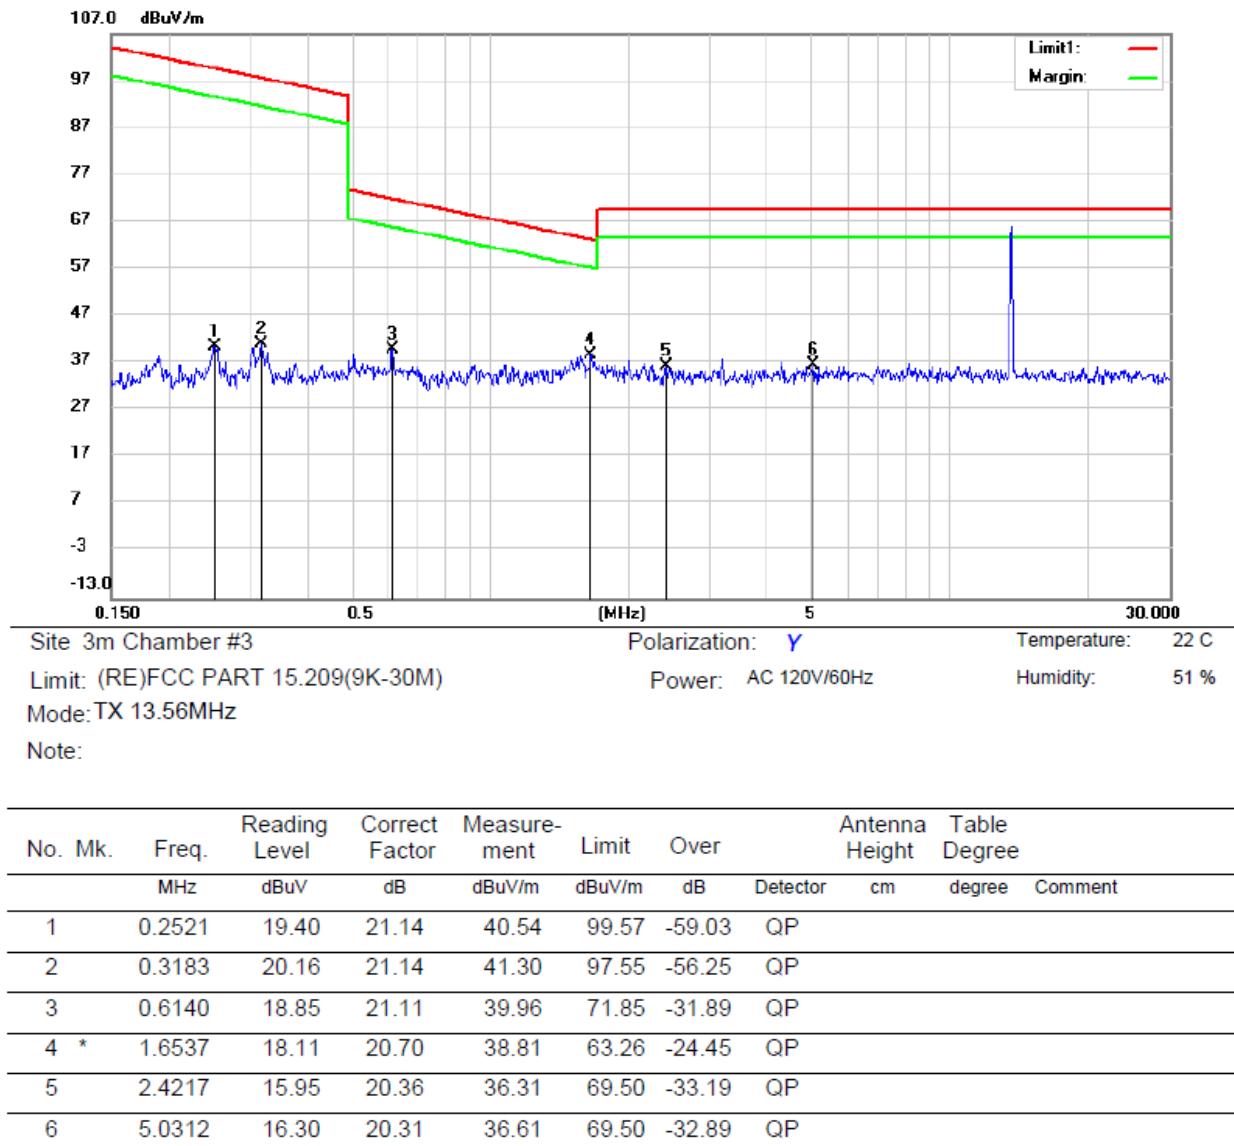

\*:Maximum data   x:Over limit   !:over margin

Operator: CSL

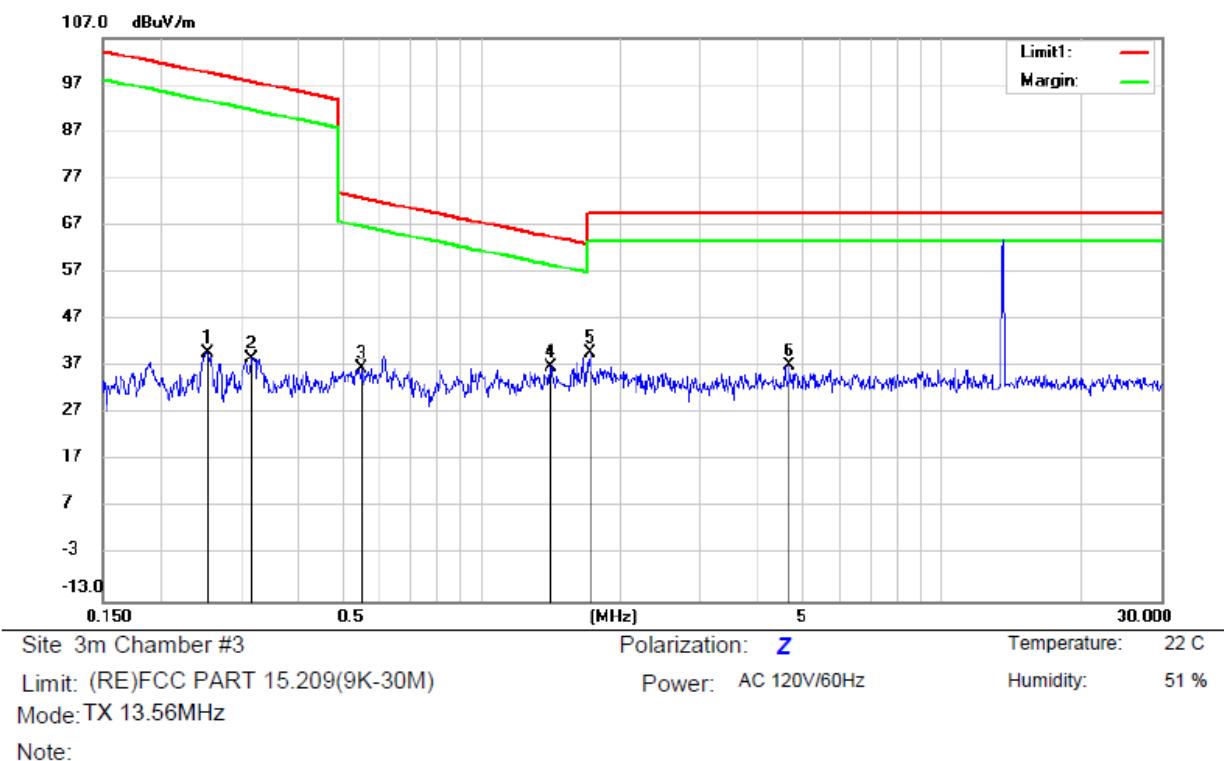


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height cm	Table Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	degree	
1		0.2521	18.95	21.14	40.09	99.57	-59.48	QP		
2		0.3150	17.49	21.14	38.63	97.64	-59.01	QP		
3		0.5493	15.52	21.12	36.64	72.81	-36.17	QP		
4	*	1.4107	16.14	20.87	37.01	64.64	-27.63	QP		
5		1.7162	19.28	20.67	39.95	69.50	-29.55	QP		
6		4.6715	16.91	20.29	37.20	69.50	-32.30	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

■ Spurious Emission Above 30MHz (30MHz to 1GHz)

For Model:FS6-AN

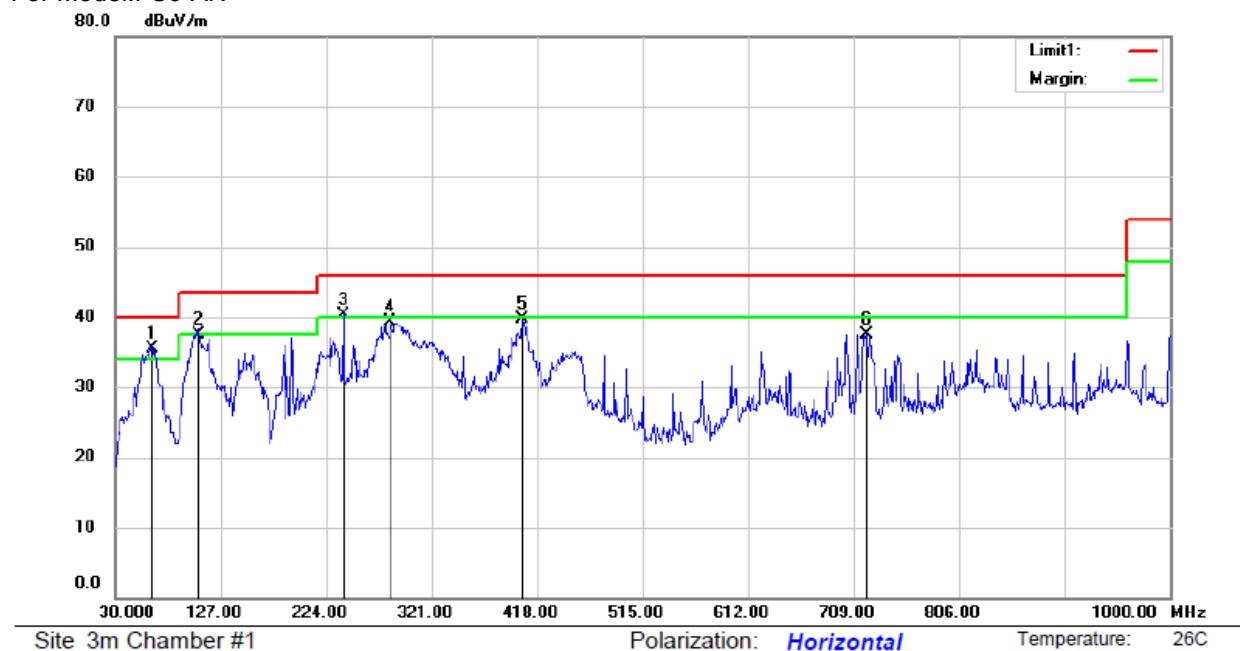

Site 3m Chamber #1

Polarization: *Horizontal*

Temperature: 26C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 54%


Mode: 13.56MHz TX

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	63.9500	52.02	-16.52	35.50	40.00	-4.50	QP			
2	!	106.6300	53.69	-16.09	37.60	43.50	-5.90	QP			
3	!	239.5200	54.83	-14.53	40.30	46.00	-5.70	QP			
4		283.1700	52.93	-13.53	39.40	46.00	-6.60	QP			
5		404.4200	50.23	-10.59	39.64	46.00	-6.36	QP			
6		720.6400	42.25	-4.65	37.60	46.00	-8.40	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator:KK

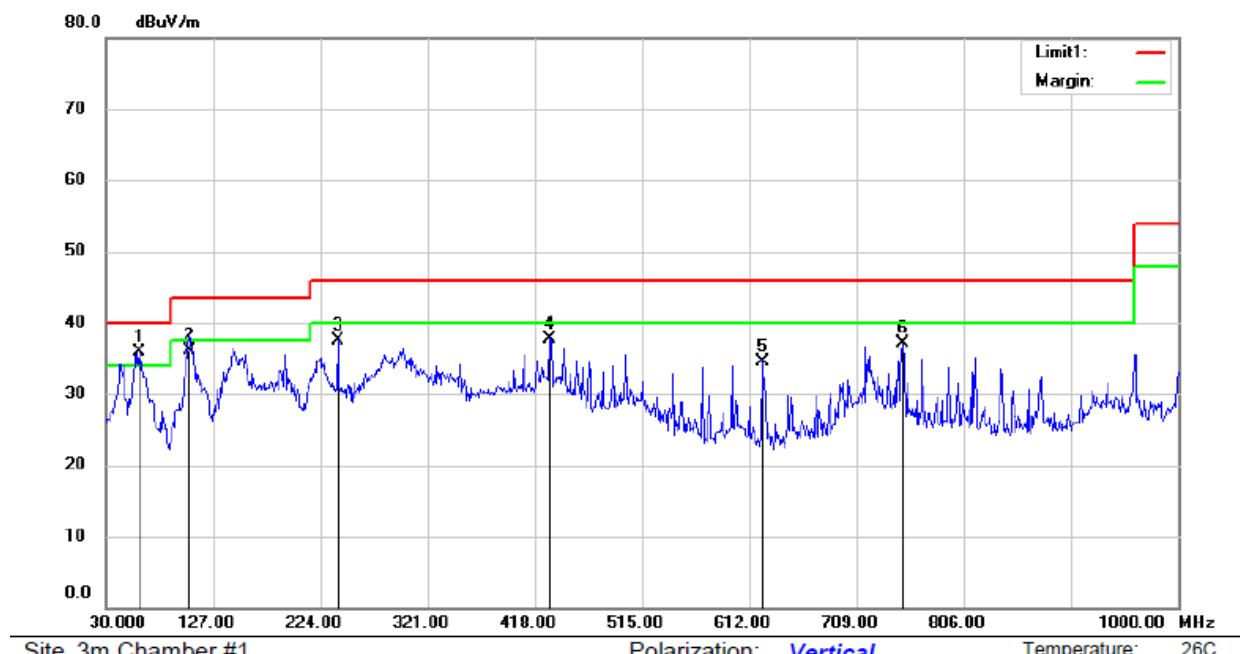

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 26C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 54%

Mode: 13.56MHz TX


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	60.0700	52.00	-16.10	35.90	40.00	-4.10	QP		
2		105.6600	52.17	-16.07	36.10	43.50	-7.40	QP		
3		239.5200	52.13	-14.53	37.60	46.00	-8.40	QP		
4		431.5800	47.60	-9.90	37.70	46.00	-8.30	QP		
5		623.6400	40.62	-6.02	34.60	46.00	-11.40	QP		
6		750.7100	41.08	-3.98	37.10	46.00	-8.90	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator:KK

For Model:FS6-Mini

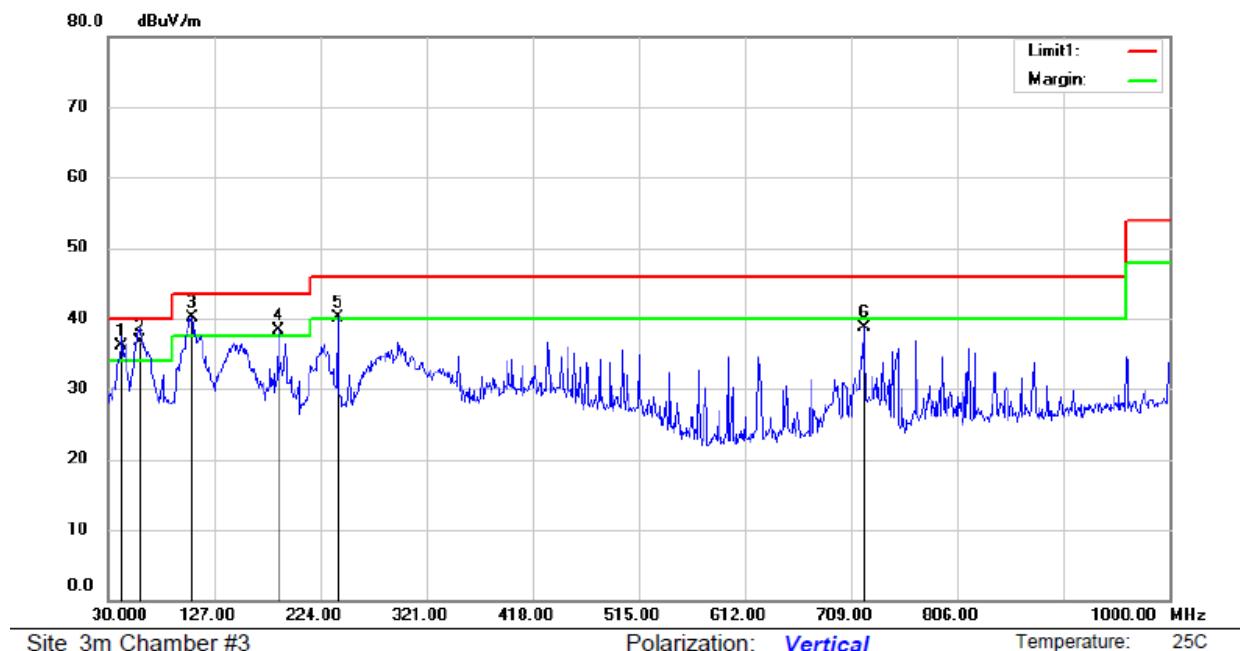

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 25C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53%


Mode:13.56MHz TX

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	!	42.6100	50.82	-14.62	36.20	40.00	-3.80	QP		
2	*	59.1000	52.66	-15.96	36.70	40.00	-3.30	QP		
3	!	106.6300	56.12	-16.09	40.03	43.50	-3.47	QP		
4	!	185.2000	55.45	-17.21	38.24	43.50	-5.26	QP		
5	!	239.5200	54.64	-14.53	40.11	46.00	-5.89	QP		
6		720.6400	43.28	-4.65	38.63	46.00	-7.37	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator:KK

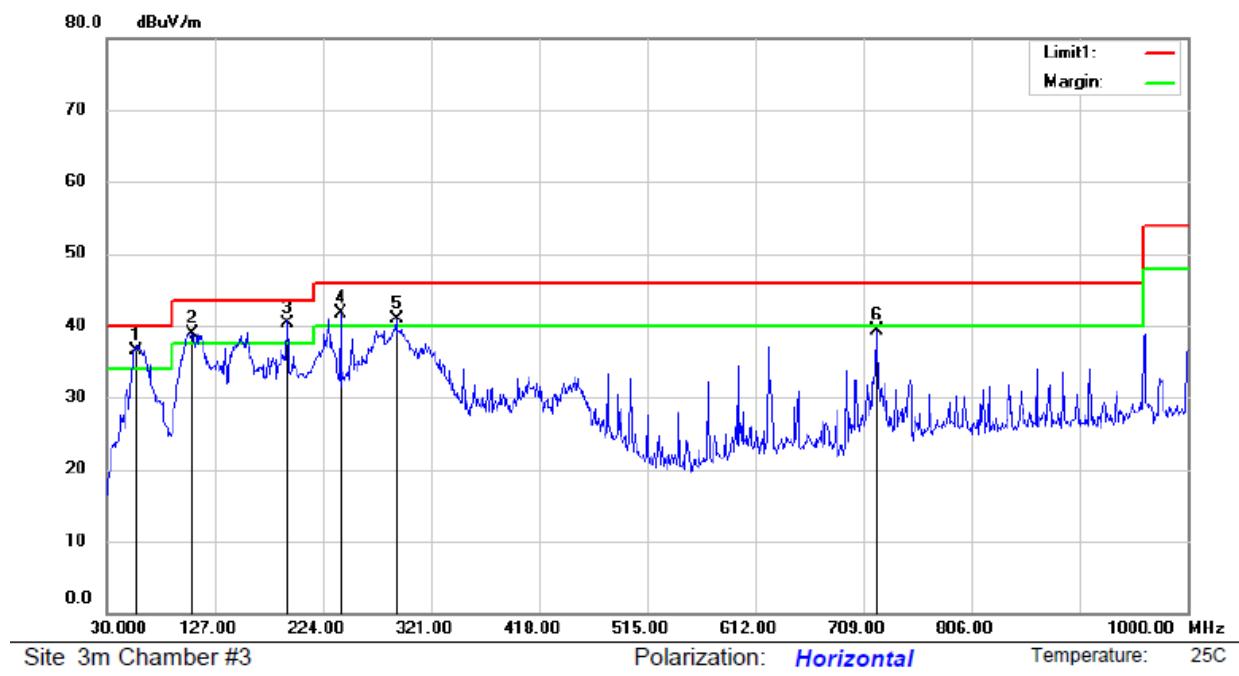

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 25C

Limit: (RE)FCC PART 15 CLASS B  
Mode:13.56MHz TX

Power: AC 120V/60Hz

Humidity: 53%

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	!	56.1900	51.68	-15.18	36.50	40.00	-3.50	QP		
2	!	106.6300	54.95	-16.09	38.86	43.50	-4.64	QP		
3	*	191.9900	57.04	-16.64	40.40	43.50	-3.10	QP		
4	!	239.5200	56.26	-14.53	41.73	46.00	-4.27	QP		
5	!	289.9600	54.23	-13.35	40.88	46.00	-5.12	QP		
6		720.6400	43.96	-4.65	39.31	46.00	-6.69	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator:KK

## 7.4 CONDUCTED EMISSION TEST

### 7.4.1 Applicable Standard

According to FCC Part 15.207(a)

### 7.4.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 7.4.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

### 7.4.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.


### 7.4.5 Test Results

Pass

AC 120V &240V voltage have been tested, and the worst result recorded was report as below:

For Model:FS6-AN

100.0 dBuV

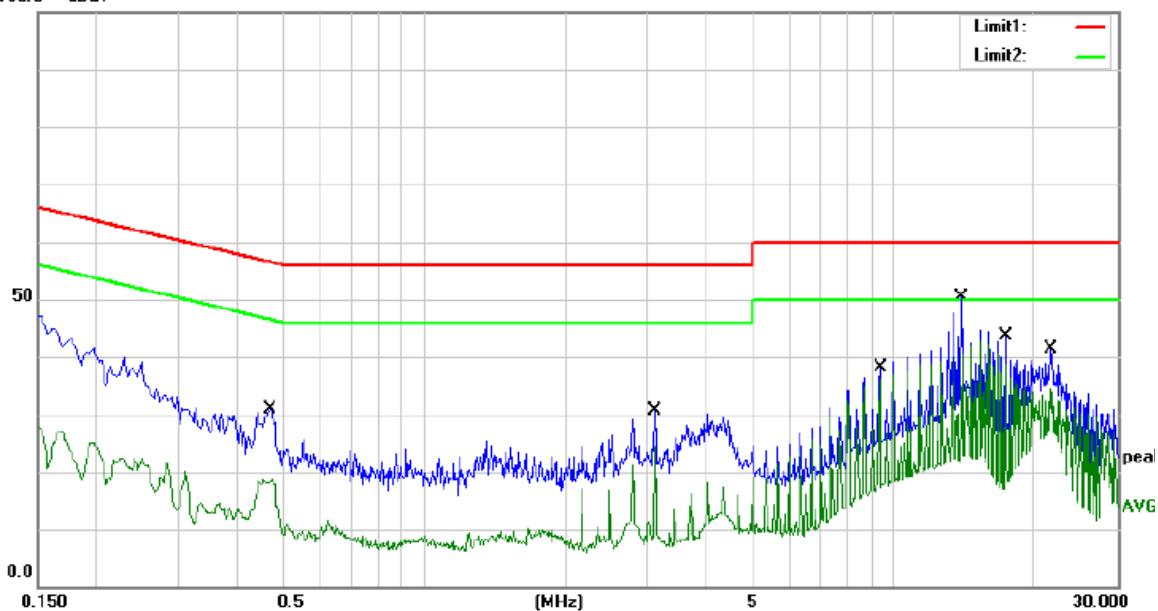

Site Conduction #2

Phase: **N**

Temperature: 24.9

Limit: (CE)FCC Part15 class B QP

Power: AC 120V/60Hz

Humidity: 54 %

Mode: 13.56MHz TX

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4700	20.88	9.92	30.80	56.51	-25.71	QP	
2		0.4700	8.79	9.92	18.71	46.51	-27.80	AVG	
3		3.1020	20.57	9.94	30.51	56.00	-25.49	QP	
4		3.1020	14.54	9.94	24.48	46.00	-21.52	AVG	
5		9.3540	28.19	10.01	38.20	60.00	-21.80	QP	
6		9.3540	26.83	10.01	36.84	50.00	-13.16	AVG	
7		13.9620	40.33	10.04	50.37	60.00	-9.63	QP	
8	*	13.9620	32.64	10.04	42.68	50.00	-7.32	AVG	
9		17.3740	33.64	10.06	43.70	60.00	-16.30	QP	
10		17.3740	28.54	10.06	38.60	50.00	-11.40	AVG	
11		21.7140	31.25	10.15	41.40	60.00	-18.60	QP	
12		21.7140	24.14	10.15	34.29	50.00	-15.71	AVG	


:Maximum data

x:Over limit

!:over margin

Comment: Factor build in receiver.

Operator: Neo

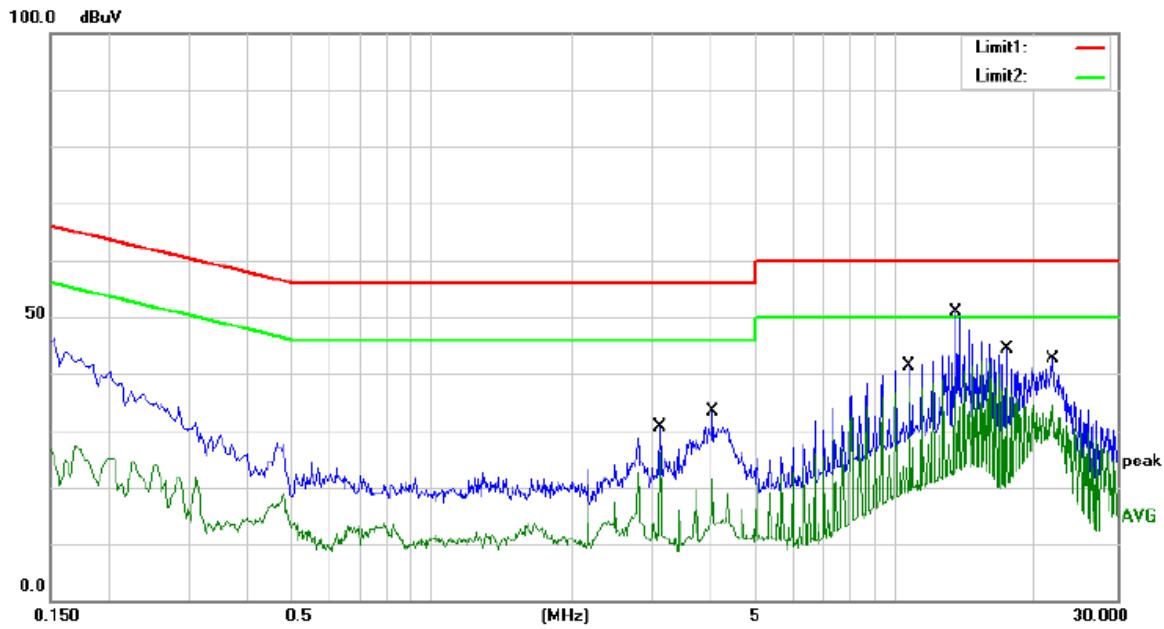

Site Conduction #2

Phase: *L1*

Temperature: 24.9

Limit: (CE)FCC Part15 class B\_QP

Power: AC 120V/60Hz

Humidity: 54 %

Mode: 13.56MHz TX


Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		3.1060	20.79	9.94	30.73	56.00	-25.27	QP	
2		3.1060	16.30	9.94	26.24	46.00	-19.76	AVG	
3		4.0340	23.45	9.95	33.40	56.00	-22.60	QP	
4		4.0340	11.53	9.95	21.48	46.00	-24.52	AVG	
5		10.6940	31.29	10.02	41.31	60.00	-18.69	QP	
6		10.6940	27.53	10.02	37.55	50.00	-12.45	AVG	
7		13.4860	40.85	10.04	50.89	60.00	-9.11	QP	
8		13.4860	31.35	10.04	41.39	50.00	-8.61	AVG	
9		17.3740	34.37	10.06	44.43	60.00	-15.57	QP	
10	*	17.3740	31.82	10.06	41.88	50.00	-8.12	AVG	
11		21.7180	32.45	10.15	42.60	60.00	-17.40	QP	
12		21.7180	24.25	10.15	34.40	50.00	-15.60	AVG	

:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: Neo

For Model:FS6-Mini

100.0 dBuV

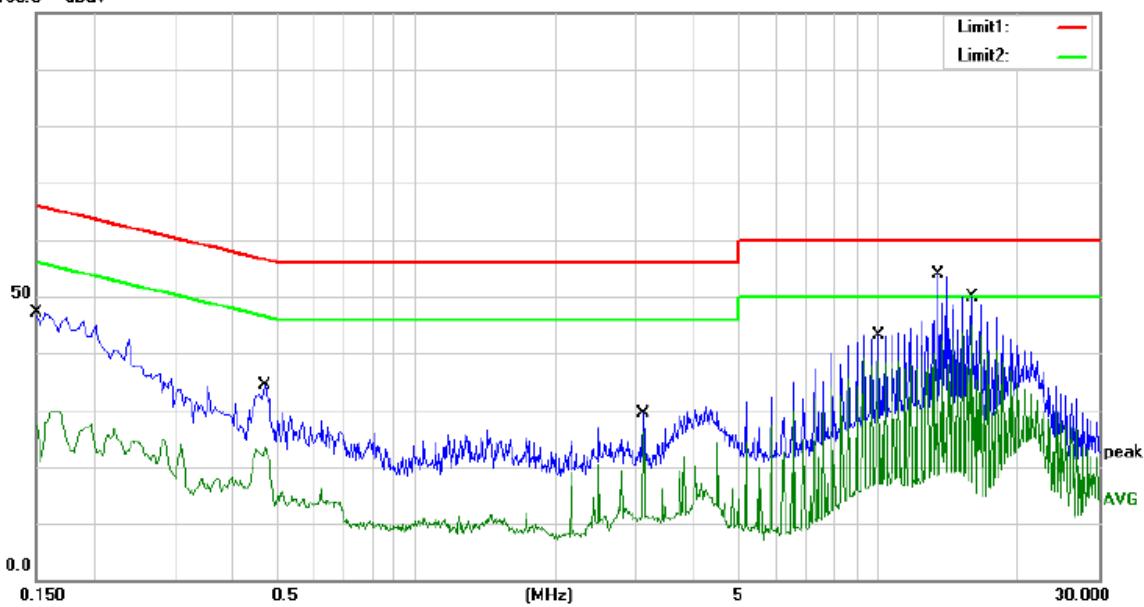

Site Conduction #2

Phase: **N**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz


Humidity: 54 %

Mode: 13.56MHz TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Comment
							MHz	dBuV	dB
1		0.1500	37.24	9.89	47.13	66.00	-18.87		QP
2		0.1500	19.82	9.89	29.71	56.00	-26.29		AVG
3		0.4700	24.33	9.92	34.25	56.51	-22.26		QP
4		0.4700	13.35	9.92	23.27	46.51	-23.24		AVG
5		3.0980	19.55	9.94	29.49	56.00	-26.51		QP
6		3.0980	16.17	9.94	26.11	46.00	-19.89		AVG
7		10.0220	33.18	10.01	43.19	60.00	-16.81		QP
8		10.0220	29.20	10.01	39.21	50.00	-10.79		AVG
9		13.4820	43.90	10.04	53.94	60.00	-6.06		QP
10		13.4820	32.16	10.04	42.20	50.00	-7.80		AVG
11		15.8940	39.82	10.06	49.88	60.00	-10.12		QP
12	*	15.8940	34.89	10.06	44.95	50.00	-5.05		AVG

:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Neo

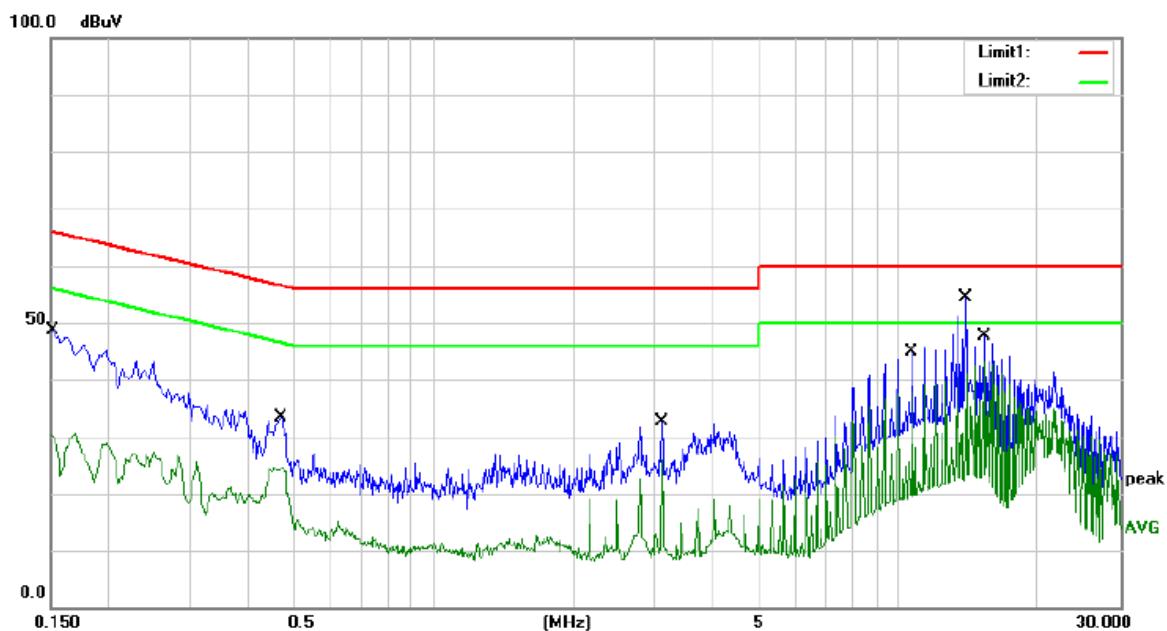

Site Conduction #2

Phase: *N*

Temperature: 24.9

Limit: (CE)FCC PART 15 class B\_QP  
Mode: 13.56MHz TX

Power: AC 120V/60Hz

Humidity: 54 %

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1540	38.08	9.90	47.98	65.78	-17.80	QP	
2		0.1540	20.51	9.90	30.41	55.78	-25.37	AVG	
3		0.4700	23.38	9.92	33.30	56.51	-23.21	QP	
4		0.4700	14.79	9.92	24.71	46.51	-21.80	AVG	
5		3.1020	22.57	9.94	32.51	56.00	-23.49	QP	
6		3.1020	16.04	9.94	25.98	46.00	-20.02	AVG	
7		10.6900	34.87	10.02	44.89	60.00	-15.11	QP	
8		10.6900	27.95	10.02	37.97	50.00	-12.03	AVG	
9	*	13.9620	44.33	10.04	54.37	60.00	-5.63	QP	
10		13.9620	31.01	10.04	41.05	50.00	-8.95	AVG	
11		15.3700	37.58	10.05	47.63	60.00	-12.37	QP	
12		15.3700	33.13	10.05	43.18	50.00	-6.82	AVG	

\*:Maximum data   x:Over limit   l:over margin      Comment: Factor build in receiver.      Operator: Neo

## 8 ANTENNA APPLICATION

### 8.1.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.1.2 Result

PASS.

Note:

- Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.