

Nemko-CCL, Inc.
1940 West Alexander Street
Salt Lake City, UT 84119
801-972-6146

Test Report

Certification

Test Of: CRA-A104_02 and CRA-A126_01

FCC ID: QQ6-BTC02

Test Specifications:

FCC PART 15, Subpart C

Test Report Serial No: 240847-3.3

Applicant:
Code Corporation
14870 South Pony Express Rd., Suite 200
Bluffdale, UT 84065
U.S.A

Dates of Test: July 10 – 11 and 15 – 16, 2013

Report Issue Date: August 12, 2013

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

CERTIFICATION OF ENGINEERING REPORT

This report has been prepared by Nemko-CCL, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Code Corporation
- Manufacturer: Technocom Systems Sdn. Bhd.
- Brand Name: Code
- Model Number: CRA-A104_02 and CRA-A126_01
- FCC ID: QQ6-BTC02


On this 12th day of August 2013, I, individually and for Nemko-CCL, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has recognized that the Nemko-CCL, Inc. EMC testing facilities are in good standing, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Nemko-CCL, Inc.



Tested by: Norman P. Hansen
Test Technician



Reviewed by: Thomas C. Jackson
General Manager

TABLE OF CONTENTS

	PAGE
<u>SECTION 1.0 CLIENT INFORMATION</u>	4
<u>SECTION 2.0 EQUIPMENT UNDER TEST (EUT)</u>	5
<u>SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES</u>	9
<u>SECTION 4.0 OPERATION OF EUT DURING TESTING</u>	15
<u>SECTION 5.0 SUMMARY OF TEST RESULTS</u>	16
<u>SECTION 6.0 MEASUREMENTS AND RESULTS</u>	17
<u>APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT</u>	37
<u>APPENDIX 2 PHOTOGRAPHS</u>	42

SECTION 1.0 CLIENT INFORMATION

1.1 Applicant:

Company Name: Code Corporation
14870 South Pony Express Rd., Suite 200
Bluffdale, UT 84065
U.S.A

Contact Name: Ryan Hoobler
Title: Director of Engineering

1.2 Manufacturer:

Company Name: Technocom Systems Sdn. Bhd.
Plo 117 Jalan Firma 1, Kawasan Perindustrian Tebrau
Johor Bahru, Johor, Malaysia

Contact Name: TS Wong
Title: Program Manager

SECTION 2.0 EQUIPMENT UNDER TEST (EUT)


2.1 Identification of EUT:

Brand Name:	Code
Model Number:	CRA-A104_02 and CRA-A126_01
Serial Number:	Engineering Units
Dimensions:	10 cm x 7.6 cm x 7.5 cm
Country of Manufacture:	Malaysia

2.2 Description of EUT:


The CRA-A104_02 and CRA-A126_01 are charging bases for Code handheld scanners. The units may be powered by a Group West 6UA-05-1200 external 5 VDC adapter or from a device with a USB port. The models use the same PCB. The CRA-A104_02 and CRA-A126_01 have a Bluetooth transceiver. The CRA-A104_02 is designed to charge the 2600 Series of handheld scanners and the CRA-A126_01 is designed for the 3600 Series of handheld scanners. The difference is in the plastic housing where the scanner is inserted for charging.

The Bluetooth transceiver uses 79 channels in the 2400 to 2483.5 MHz frequency band. The transceiver uses a Tyco 1513349-1, 0.0 dBi, embedded antenna that is soldered to the PCB. Plots of the channels are shown below.

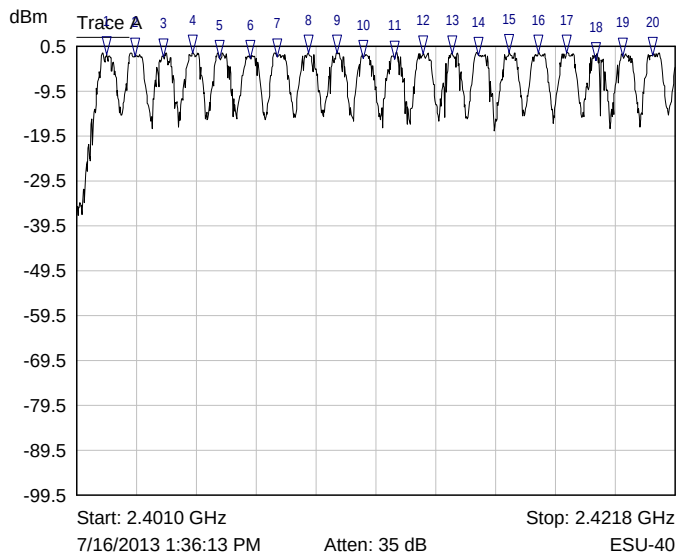


Trace A lower 20 channels

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	2.4020 GHz	-1.33 dBm
2 ▽	Trace A	2.4030 GHz	-1.72 dBm
3 ▽	Trace A	2.4040 GHz	-1.78 dBm
4 ▽	Trace A	2.4050 GHz	-0.98 dBm
5 ▽	Trace A	2.4060 GHz	-2.11 dBm
6 ▽	Trace A	2.4070 GHz	-2.14 dBm
7 ▽	Trace A	2.4080 GHz	-1.77 dBm
8 ▽	Trace A	2.4090 GHz	-0.98 dBm
9 ▽	Trace A	2.4100 GHz	-0.95 dBm
10 ▽	Trace A	2.4110 GHz	-2.12 dBm
11 ▽	Trace A	2.4120 GHz	-2.26 dBm
12 ▽	Trace A	2.4130 GHz	-1.24 dBm
13 ▽	Trace A	2.4140 GHz	-1.12 dBm
14 ▽	Trace A	2.4150 GHz	-1.55 dBm
15 ▽	Trace A	2.4160 GHz	-0.91 dBm
16 ▽	Trace A	2.4170 GHz	-1.03 dBm
17 ▽	Trace A	2.4180 GHz	-1.01 dBm
18 ▽	Trace A	2.4190 GHz	-2.62 dBm
19 ▽	Trace A	2.4200 GHz	-1.66 dBm
20 ▽	Trace A	2.4210 GHz	-1.57 dBm

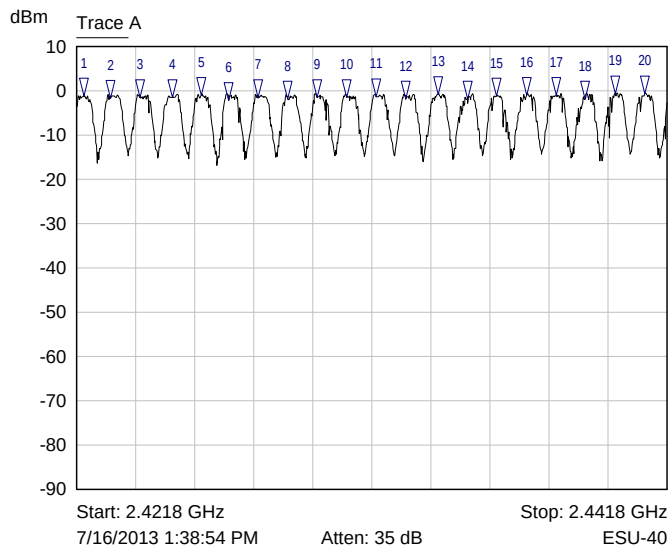


Trace A middle lower 20 channels

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	2.4220 GHz	-1.16 dBm
2 ▽	Trace A	2.4230 GHz	-1.61 dBm
3 ▽	Trace A	2.4240 GHz	-1.57 dBm
4 ▽	Trace A	2.4250 GHz	-1.42 dBm
5 ▽	Trace A	2.4260 GHz	-0.94 dBm
6 ▽	Trace A	2.4270 GHz	-2.19 dBm
7 ▽	Trace A	2.4280 GHz	-1.47 dBm
8 ▽	Trace A	2.4290 GHz	-1.83 dBm
9 ▽	Trace A	2.4300 GHz	-1.53 dBm
10 ▽	Trace A	2.4310 GHz	-1.46 dBm
11 ▽	Trace A	2.4320 GHz	-1.31 dBm
12 ▽	Trace A	2.4330 GHz	-1.76 dBm
13 ▽	Trace A	2.4340 GHz	-0.78 dBm
14 ▽	Trace A	2.4350 GHz	-1.77 dBm
15 ▽	Trace A	2.4360 GHz	-1.18 dBm
16 ▽	Trace A	2.4370 GHz	-0.97 dBm
17 ▽	Trace A	2.4380 GHz	-1.01 dBm
18 ▽	Trace A	2.4390 GHz	-1.77 dBm
19 ▽	Trace A	2.4400 GHz	-0.61 dBm
20 ▽	Trace A	2.4410 GHz	-0.64 dBm

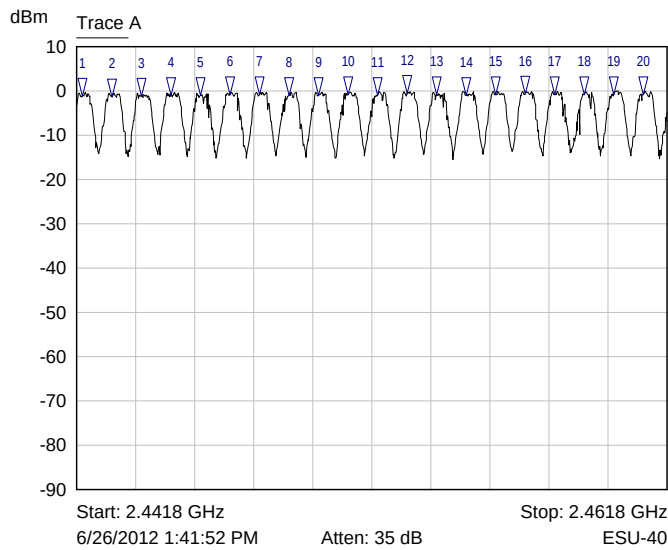

Trace A middle upper 20 channels

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	2.4420 GHz	-1.11 dBm
2 ▽	Trace A	2.4430 GHz	-1.28 dBm
3 ▽	Trace A	2.4440 GHz	-1.17 dBm
4 ▽	Trace A	2.4450 GHz	-1.01 dBm
5 ▽	Trace A	2.4460 GHz	-1.05 dBm
6 ▽	Trace A	2.4470 GHz	-0.82 dBm
7 ▽	Trace A	2.4480 GHz	-0.83 dBm
8 ▽	Trace A	2.4490 GHz	-0.98 dBm
9 ▽	Trace A	2.4500 GHz	-0.94 dBm
10 ▽	Trace A	2.4510 GHz	-0.91 dBm
11 ▽	Trace A	2.4520 GHz	-0.99 dBm
12 ▽	Trace A	2.4530 GHz	-0.49 dBm
13 ▽	Trace A	2.4540 GHz	-0.80 dBm
14 ▽	Trace A	2.4550 GHz	-0.97 dBm
15 ▽	Trace A	2.4560 GHz	-0.79 dBm
16 ▽	Trace A	2.4570 GHz	-0.73 dBm
17 ▽	Trace A	2.4580 GHz	-0.88 dBm
18 ▽	Trace A	2.4590 GHz	-0.85 dBm
19 ▽	Trace A	2.4600 GHz	-0.83 dBm
20 ▽	Trace A	2.4610 GHz	-0.90 dBm

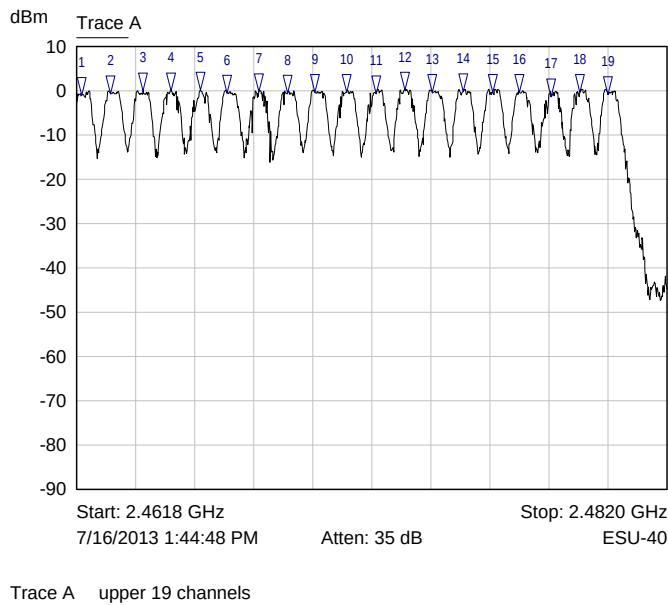

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	2.4620 GHz	-1.06 dBm
2 ▽	Trace A	2.4630 GHz	-0.66 dBm
3 ▽	Trace A	2.4641 GHz	-0.01 dBm
4 ▽	Trace A	2.4650 GHz	-0.02 dBm
5 ▽	Trace A	2.4660 GHz	0.10 dBm
6 ▽	Trace A	2.4670 GHz	-0.46 dBm
7 ▽	Trace A	2.4680 GHz	-0.19 dBm
8 ▽	Trace A	2.4690 GHz	-0.44 dBm
9 ▽	Trace A	2.4700 GHz	-0.34 dBm
10 ▽	Trace A	2.4710 GHz	-0.26 dBm
11 ▽	Trace A	2.4720 GHz	-0.66 dBm
12 ▽	Trace A	2.4730 GHz	0.18 dBm
13 ▽	Trace A	2.4740 GHz	-0.37 dBm
14 ▽	Trace A	2.4750 GHz	-0.22 dBm
15 ▽	Trace A	2.4760 GHz	-0.33 dBm
16 ▽	Trace A	2.4770 GHz	-0.26 dBm
17 ▽	Trace A	2.4780 GHz	-1.39 dBm
18 ▽	Trace A	2.4790 GHz	-0.37 dBm
19 ▽	Trace A	2.4800 GHz	-0.77 dBm

This report covers the circuitry of the devices subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Subpart B was found to be compliant and is covered in Nemko-CCL, Inc. report 240847-2.

2.3 EUT and Support Equipment:

The FCC ID numbers for all the EUT and support equipment used during the test are listed below:

Brand Name Model Number Serial Number	FCC ID Number or Compliance	Description	Name of Interface Ports / Interface Cables
BN: Code MN: CRA-A104_02, (Note 1) SN: Engineering Unit	QQ6-BTC02	Charging Base	See Section 2.4
BN: Samsung MN: N130 SN: ZLCM93HS900480X	DoC	Netbook computer	USB/USB cable (Note 2) USB/USB mouse cable Ethernet/Cat 5e cable

Brand Name Model Number Serial Number	FCC ID Number or Compliance	Description	Name of Interface Ports / Interface Cables
BN: TRENDnet MN: TE100-S8P SN: 0243C3A16540	DoC	5 port Ethernet switch	Ethernet/Cat 5e

Note: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT:

Name of Ports	No. of Ports Fitted to EUT	Cable Descriptions/Length
USB	1	USB cable/1.5 meters
Scanner Charge/Interface	1	Direct connection to scanner via pins

2.5 Modification Incorporated/Special Accessories on EUT:

The following modifications were made to the EUT by the Client during testing to comply with the specification. This report is not complete without an accompanying signed attestation, that the product will have all of the documented modifications incorporated into the product when manufactured and placed on the market.

1. The power settings in firmware for the transceiver and internal amplifier were set to 0 and 63. These settings will be incorporated in production firmware and the user will not be able to adjust them.

SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES**3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15)
15.203, 15.207, and 15.247

Limits and methods of measurement of radio interference
characteristics of radio frequency devices.

Purpose of Test: The tests were performed to demonstrate initial compliance.

3.2 Methods & Procedures:**3.2.1 §15.203 Antenna Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.207 Conducted Limits

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5*	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	60	50

*Decreases with the logarithm of the frequency.

3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

(2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many

of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

3.2.3 Test Procedure

The testing was performed according to the procedures in ANSI C63.4: 2003 and 47 CFR Part 15. Testing was performed at the Nemko-CCL, Inc. Wanship open area test site #2, located at 29145 Old Lincoln Highway, Wanship, UT. This site has been registered with the FCC, and was renewed February 15, 2012 (90504). This registration is valid for three years.

Nemko-CCL, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2013.

SECTION 4.0 OPERATION OF EUT DURING TESTING

4.1 Operating Environment:

Power Supply: 120 VAC/60 Hz to AC adapter, or, when powered by the USB port of the host system, 5 VDC

4.2 Operating Modes:

The transceiver was tested while hopping between all channels for timing, operating band, and channel separation tests or while in a constantly transmitting at the upper, middle, or lower channel for the other tests. The EUT use either a Standard Data Rate (SDR) or an Enhanced Data Rate (EDR) 1021 bytes or 679 bytes. The EDR 1021 and EDR 679 exhibited the same transmitter characteristics except that the EDR 679 spurious emissions were lower than the EDR 1021 spurious emissions when using Average Detection. The AC mains voltage was varied as required by 15.31(e) with no change seen in transmitter characteristics.

4.3 EUT Exercise Software:

Code Corporation and BlueCore test software was used to exercise the transmitter.

SECTION 5.0 SUMMARY OF TEST RESULTS**5.1 FCC Part 15, Subpart C**

The EUT transceiver was subjected to each of the tests shown in the summary table below.

5.1.1 Summary of Tests:

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Complied
15.247(a)	Channel Separation	2400 to 2483.5	Complied
15.247(a)	20 dB Bandwidth	2400 to 2483.5	Complied
15.247(a)	Time of Occupancy	2400 to 2483.5	Complied
15.247(b)	Peak Output Power	2400 to 2483.5	Complied
15.247(c)	Operation with Antennas with Directional Gains >6 dBi	N/A	Not Applicable
15.247(d)	Spurious Emissions	2.4 to 24835	Complied
15.247(e)	Peak Power Spectral Density	2400 to 2483.5	Not Applicable
15.247(f)	Hybrid System Requirements	N/A	Not Applicable
15.247(g)	Channel Usage	2400 to 2483.5	Complied (Note 1)
15.247(h)	Channel Intelligence/Avoidance	2400 to 2483.5	Complied (Note 1)
15.247(i)	RF Safety	2400 to 2483.5	Complied (Note 1)
Note 1: Compliance with these requirements is shown in documents filed with the FCC at the time of Certification.			

5.2 Result

In the configuration tested, the transceiver(s) complied with the requirements of the specification.

SECTION 6.0 MEASUREMENTS AND RESULTS**6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

6.2 Test Results:**6.2.1 §15.203 Antenna Requirements**

The EUT uses a Tyco 1513349-1 embedded antenna that is soldered to the PCB.

RESULT

The EUT complied with the specification.

6.2.2 §15.207 Conducted Disturbance at the AC Mains Ports

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dBμV)	Limit (dBμV)	Margin (dB)
0.16	Hot Lead	Quasi-Peak (Note 1)	51.3	55.7	-4.4
0.19	Hot Lead	Quasi-Peak (Note 2)	55.2	63.9	-8.7
0.19	Hot Lead	Average (Note 2)	46.3	53.9	-7.6
0.26	Hot Lead	Quasi-Peak (Note 1)	47.6	51.4	-3.8
0.33	Hot Lead	Peak (Note 1)	44.2	49.6	-5.4
1.37	Hot Lead	Quasi-Peak (Note 1)	40.8	46.0	-5.2
2.02	Hot Lead	Quasi-Peak (Note 1)	41.9	46.0	-4.1
2.54	Hot Lead	Peak (Note 1)	40.9	46.0	-5.1
3.44	Hot Lead	Peak (Note 1)	41.6	46.0	-4.4
0.19	Neutral Lead	Quasi-Peak (Note 2)	54.3	63.9	-9.6
0.19	Neutral Lead	Average (Note 2)	45.8	53.9	-8.1
0.26	Neutral Lead	Quasi-Peak (Note 1)	47.1	51.4	-4.3
0.33	Neutral Lead	Peak (Note 1)	45.0	49.6	-4.6
1.50	Neutral Lead	Peak (Note 1)	42.4	46.0	-3.6
2.02	Neutral Lead	Quasi-Peak (Note 1)	42.0	46.0	-4.0
2.54	Neutral Lead	Peak (Note 1)	41.8	46.0	-4.2


Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dBμV)	Limit (dBμV)	Margin (dB)
3.52	Neutral Lead	Peak (Note 1)	41.7	46.0	-4.3
3.78	Neutral Lead	Peak (Note 1)	40.2	46.0	-5.8
Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.					
Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.					

RESULT

In the configuration tested, the EUT complied with the specification by 3.6 dB.

6.2.3 §15.247(a)(2) Emission Bandwidth

The EUT must have the hopping channel carrier frequencies separated by 25 kHz or the 20 dB bandwidth, whichever is greater. Alternately, FHSS systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. A plot showing a 1.00 MHz channel separation is shown below. The 20 dB bandwidth is 1137 kHz using EDR and is 731 kHz using SDR and is shown in section 6.2.4.

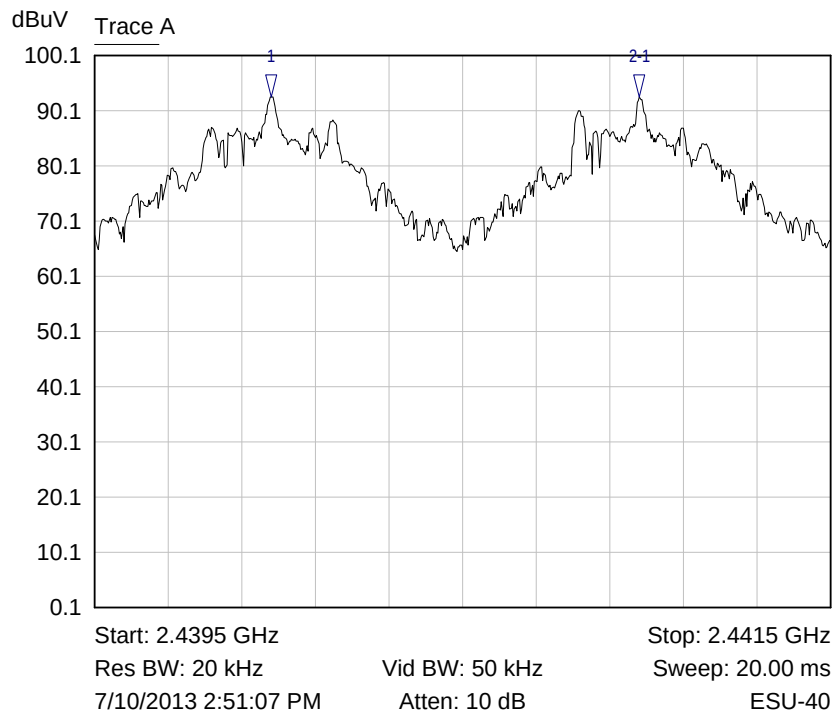

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4400 GHz	92.65 dBuV	
2.1 ▽	Trace A	1.0000 MHz	-0.05 dB	

RESULT


The channel carrier frequency separation is 1.00 MHz, which is greater than two-thirds of 20 dB bandwidth; therefore, the EUT complies with the specification.

6.2.4 §15.247(a)(1)(i) Channel Bandwidth

The 20 dB bandwidth of the hopping channels is shown in the table and plots below.


Frequency (MHz)	Emission 20 dB bandwidth (kHz)	
	SDR	EDR
2402.00	726.0	1137.0
2441.00	726.0	1119.0
2480.00	730.8	1131.0

Lowest Channel 20 dB Bandwidth in SDR Mode

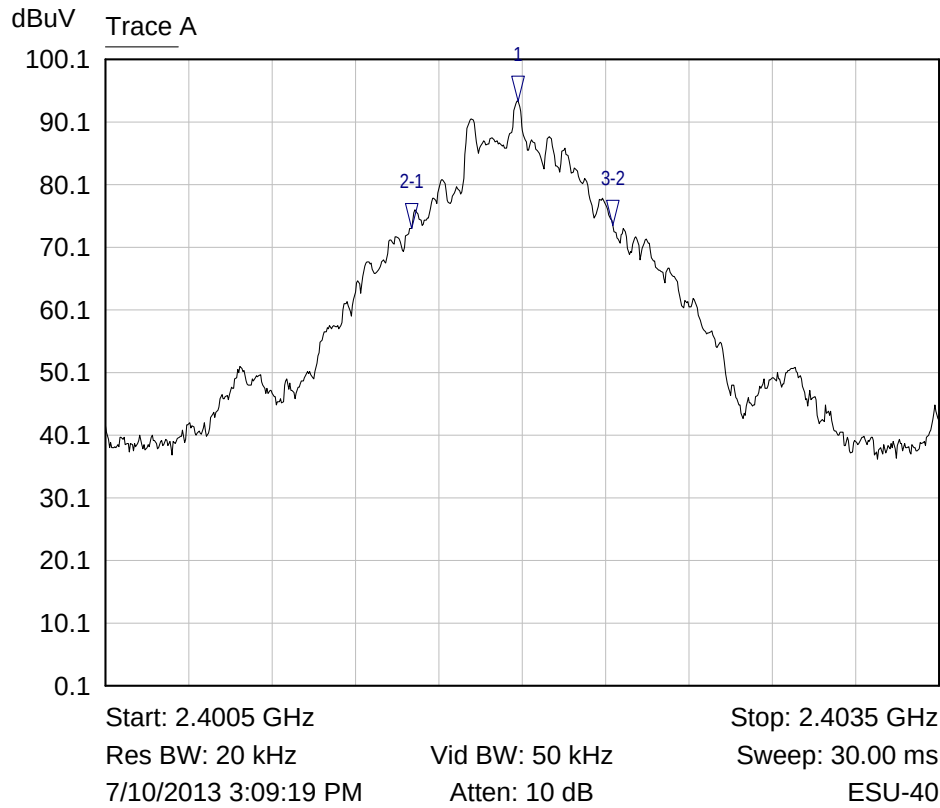


Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4020 GHz	93.50 dBuV	
2-1 ▽	Trace A	-384.6154 kHz	-20.34 dB	
3-2 ▽	Trace A	725.9615 kHz	0.38 dB	

Middle Channel 20 dB Bandwidth in SDR Mode

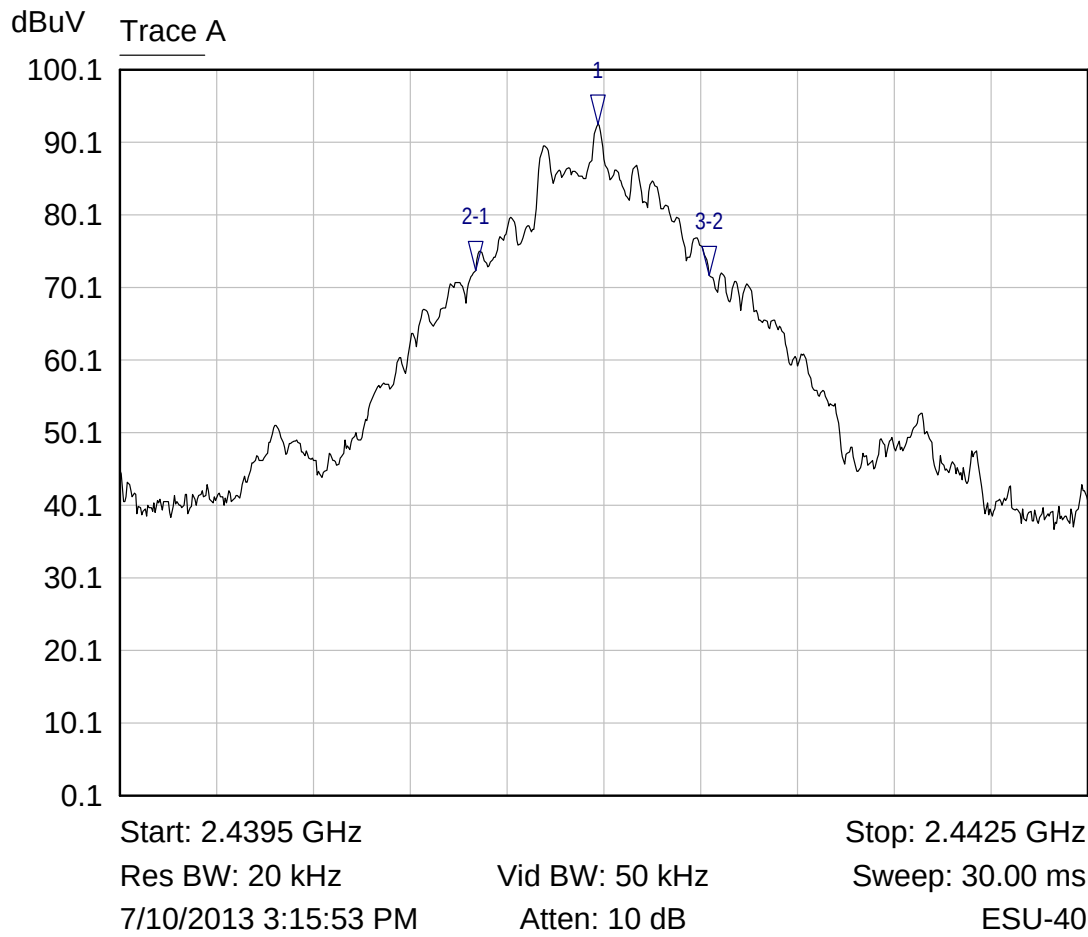

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4410 GHz	92.52 dBuV	
2-1 ▽	Trace A	-379.8077 kHz	-20.17 dB	
3-2 ▽	Trace A	725.9615 kHz	-0.59 dB	


Highest Channel 20 dB Bandwidth in SDR Mode

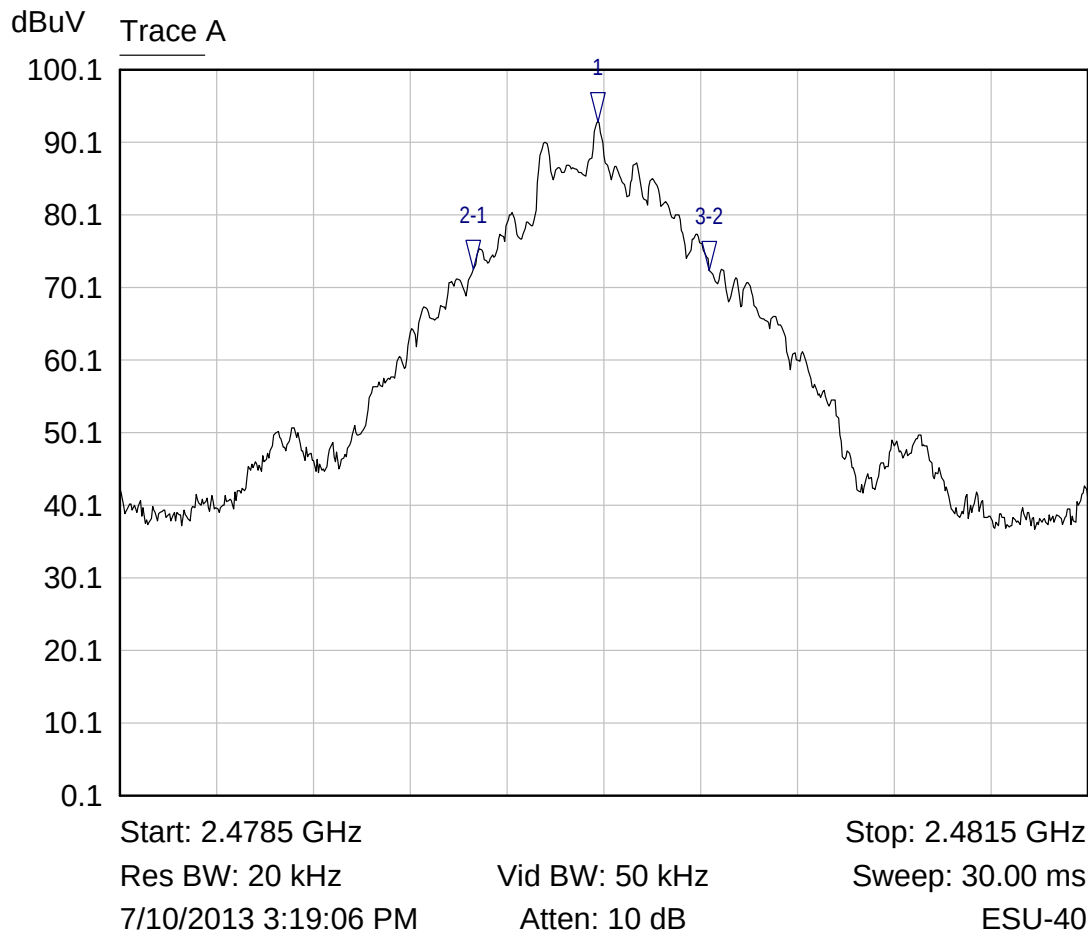

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4800 GHz	92.91 dBuV	
2-1 ▽	Trace A	-384.6154 kHz	-20.35 dB	
3-2 ▽	Trace A	730.7692 kHz	-0.10 dB	

Lowest Channel 20 dB Bandwidth in EDR Mode

dBuV Trace A

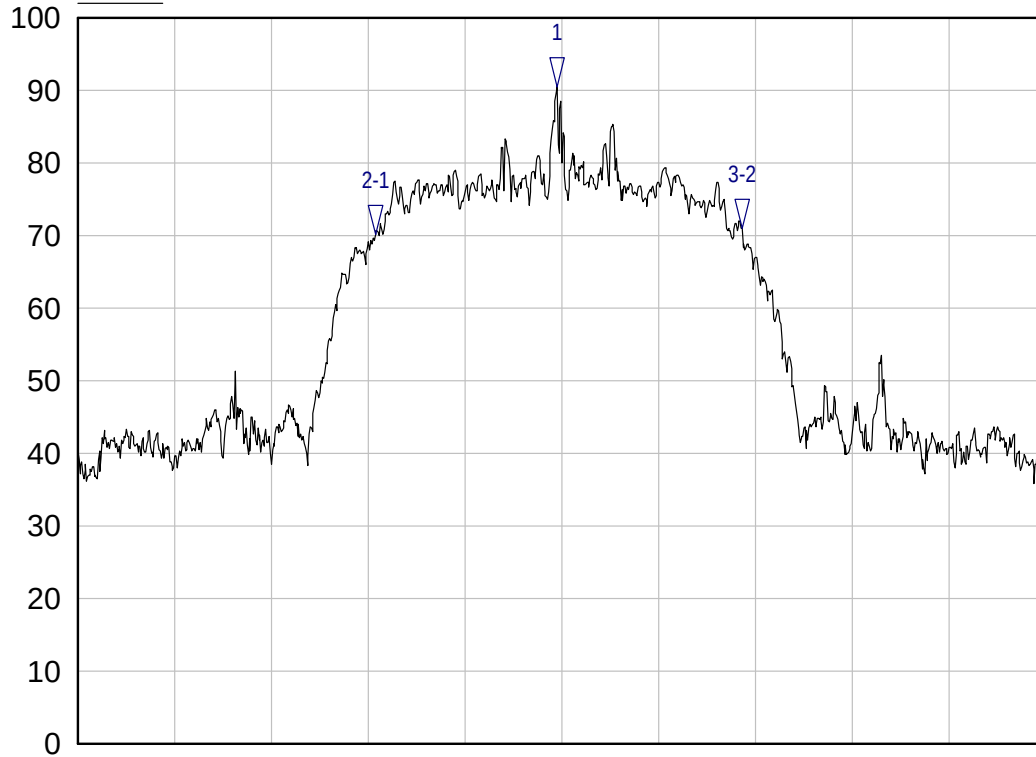

Start: 2.4005 GHz

Stop: 2.4035 GHz

Res BW: 10 kHz

Vid BW: 50 kHz

Sweep: 80.00 ms

7/11/2013 10:08:59 AM


Atten: 10 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4020 GHz	90.45 dBuV	
2-1 ▽	Trace A	-564.0000 kHz	-20.27 dB	
3-2 ▽	Trace A	1.1370 MHz	0.76 dB	

Middle Channel 20 dB Bandwidth in EDR Mode

dBuV Trace A

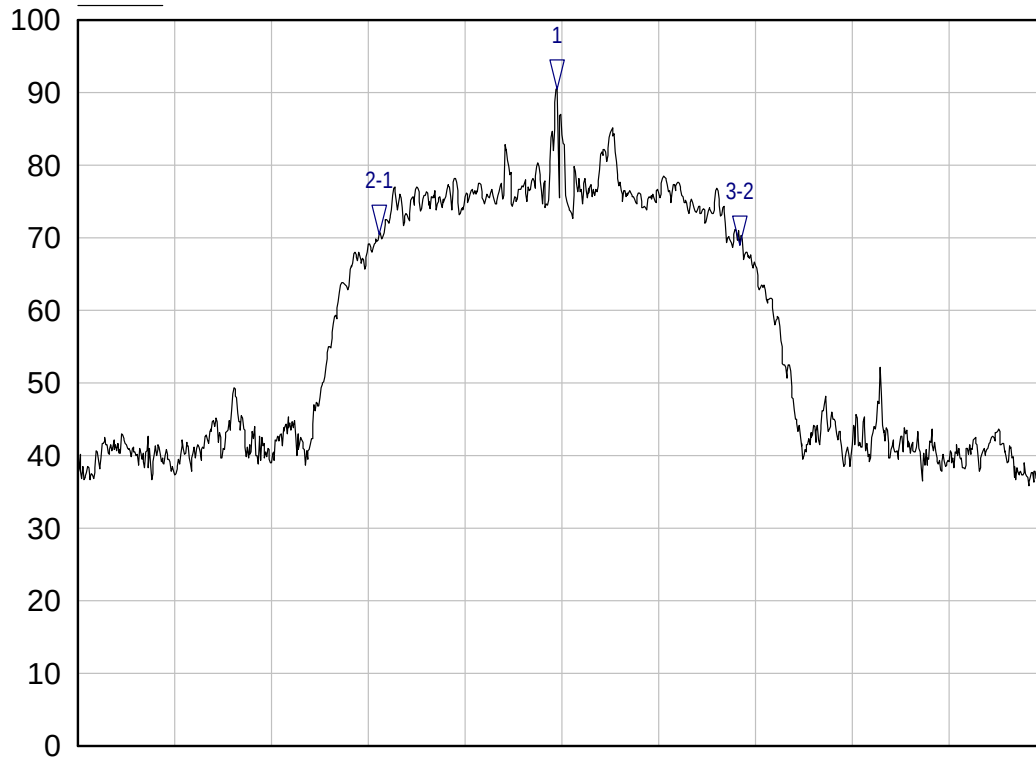

Start: 2.4395 GHz

Stop: 2.4425 GHz

Res BW: 10 kHz

Vid BW: 50 kHz

Sweep: 80.00 ms

7/11/2013 10:53:06 AM


Atten: 10 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4410 GHz	90.57 dBuV	
2-1 ▽	Trace A	-552.0000 kHz	-20.01 dB	
3-2 ▽	Trace A	1.1190 MHz	-1.57 dB	

Highest Channel 20 dB Bandwidth in EDR Mode

dBuV Trace A

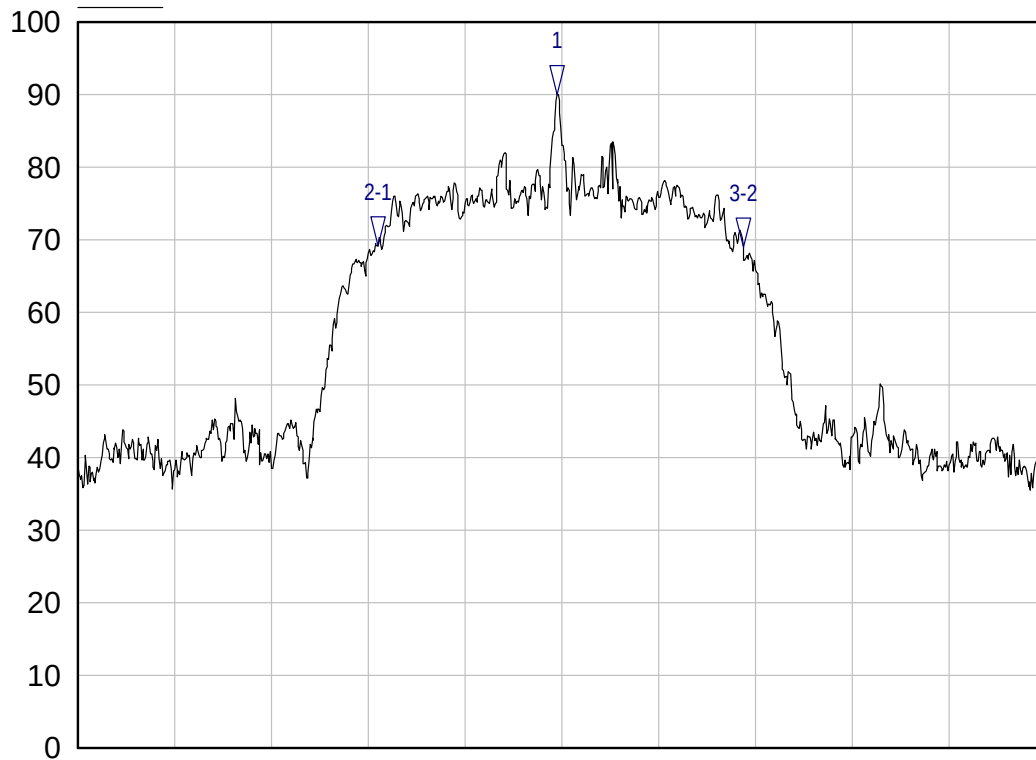

Start: 2.4785 GHz

Stop: 2.4815 GHz

Res BW: 10 kHz

Vid BW: 50 kHz

Sweep: 80.00 ms

7/11/2013 10:43:30 AM

Atten: 10 dB

ESU-40


Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4800 GHz	89.96 dBuV	
2-1 ▽	Trace A	-555.0000 kHz	-20.82 dB	
3-2 ▽	Trace A	1.1310 MHz	-0.20 dB	

RESULT


In the configuration tested, the channel bandwidth allows the channel separation of 1 MHz to be compliant; therefore, the EUT complied with the requirements of the specification.

6.2.5 §15.247(a)(1)(i) Channel Occupancy

The EUT uses 79 channels that have a bandwidth greater than 250 kHz; therefore, the EUT must have an average time of occupancy on any frequency that is no greater than 0.4 seconds in a period of 31.6 seconds (0.4 seconds x 79 channels). See the plots and calculations below.

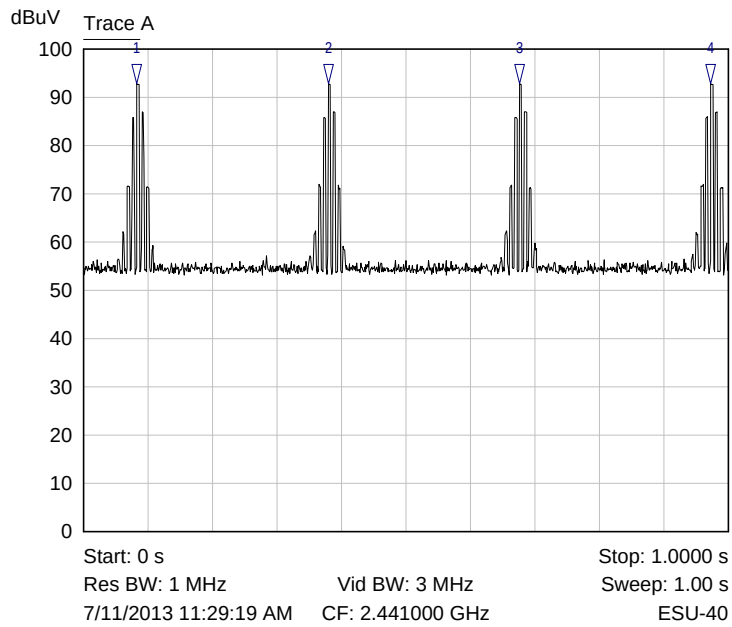EDR Mode

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	83.0000 ms	92.80 dBuV	
2 ▽	Trace A	380.0000 ms	92.83 dBuV	
3 ▽	Trace A	676.0000 ms	92.81 dBuV	
4 ▽	Trace A	973.0000 ms	92.82 dBuV	

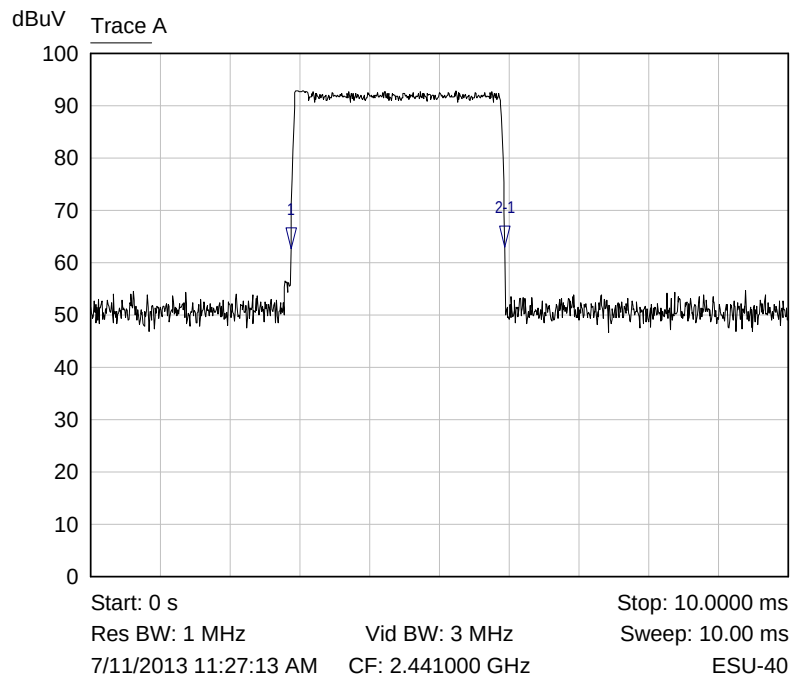


Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.8700 ms	62.66 dBuV	
2-1 ▽	Trace A	3.0700 ms	0.30 dB	


From the plot, the EUT transmits up to 4 times per second for 3.07 ms at each transmission.

$$\text{Dwell time} = 31.6 \text{ seconds} \times 4 \text{ hits/second} \times 3.07 \text{ ms} = 388.05 \text{ ms}$$

SDR Mode

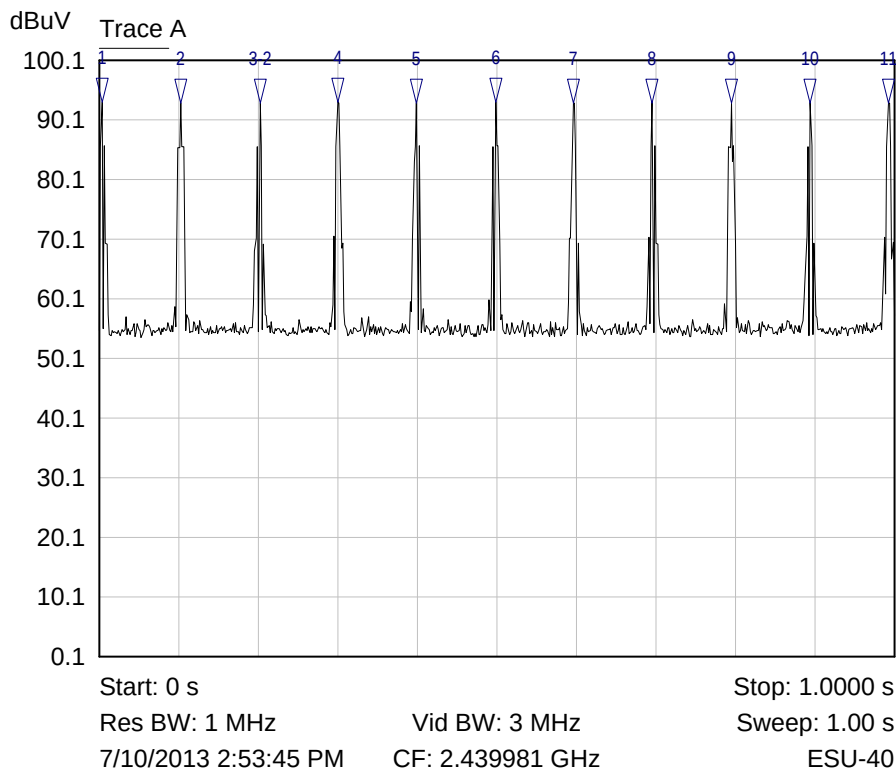

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	3.2051 ms	93.02 dBuV	
2 ▽	Trace A	102.5641 ms	92.98 dBuV	
3-2 ▽	Trace A	99.3590 ms	0.01 dB	
4 ▽	Trace A	299.6795 ms	93.02 dBuV	
5 ▽	Trace A	399.0385 ms	92.99 dBuV	
6 ▽	Trace A	498.3974 ms	93.06 dBuV	
7 ▽	Trace A	596.1538 ms	93.00 dBuV	
8 ▽	Trace A	695.5128 ms	93.01 dBuV	
9 ▽	Trace A	794.8718 ms	93.01 dBuV	
10 ▽	Trace A	894.2308 ms	93.02 dBuV	
11 ▽	Trace A	991.9872 ms	92.99 dBuV	

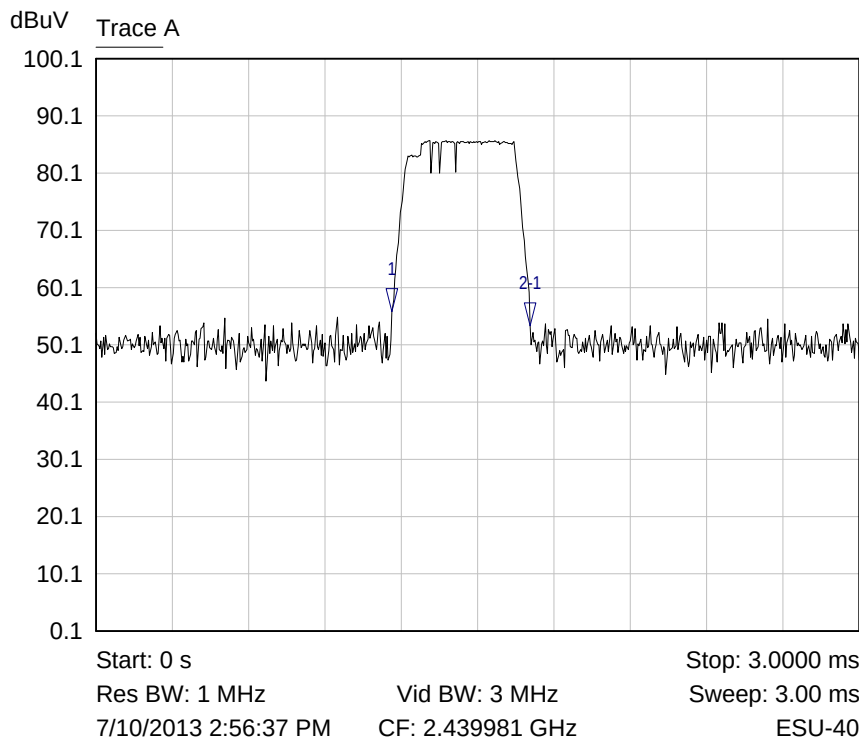

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	1.1635 ms	55.90 dBuV	
2-1 ▽	Trace A	543.2692 us	-2.55 dB	

From the plot, the EUT transmits up to 11 times per second for 543.3 μ s at each transmission.

$$\text{Dwell time} = 31.6 \text{ seconds} \times 11 \text{ hits/second} \times 543.3 \mu\text{s} = 188.9 \text{ ms}$$

RESULT


The EUT complies with the specification as the EUT transmits on an individual channel for a maximum of 388.1 milliseconds in 31.6 seconds, less than the 0.4 seconds allowed by the specification.

6.2.6 §15.247(b)(2) Peak Output Power

The antenna used with the EUT has a gain of 0 dBi. The EUT uses 79 hopping channels using channels that are separated by at least two-thirds of the channel bandwidth. The limit for this device is 21 dBm or 0.125 Watt. Radiated measurements were taken as the EUT has an integral antenna. The radiated field strengths were converted to conducted power using the alternate test procedure and equation found in DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. Plots are shown below and the results of this testing are summarized in the table.

Frequency (MHz)	Measurement (dB μ V/m at 3 m)	Calculated Output Power (mW)
2402.0	93.73	0.708
2441.0	93.10	0.612
2480.0	92.57	0.542

dBuV Trace A

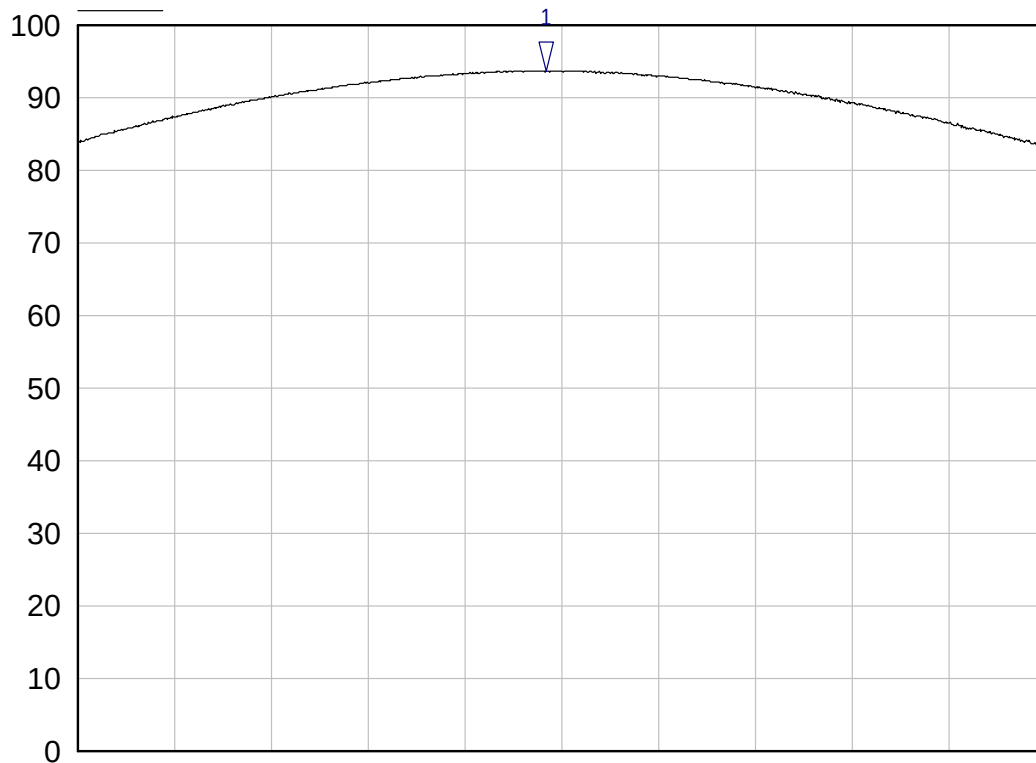

Start: 2.3990 GHz

Stop: 2.4050 GHz

Res BW: 3 MHz

Vid BW: 10 MHz


Sweep: 100.00 ms

7/11/2013 10:12:49 AM


Atten: 10 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4019 GHz	93.73 dBuV	

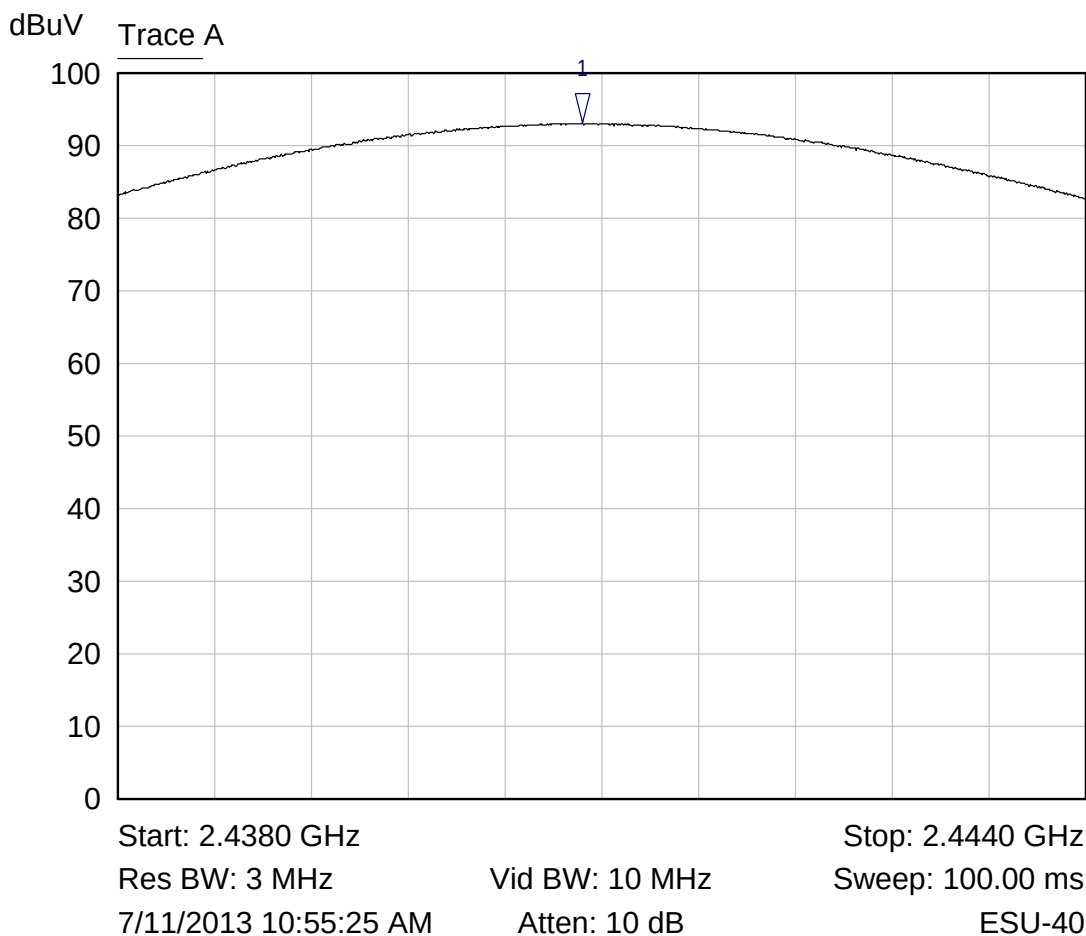

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4409 GHz	93.10 dBuV	

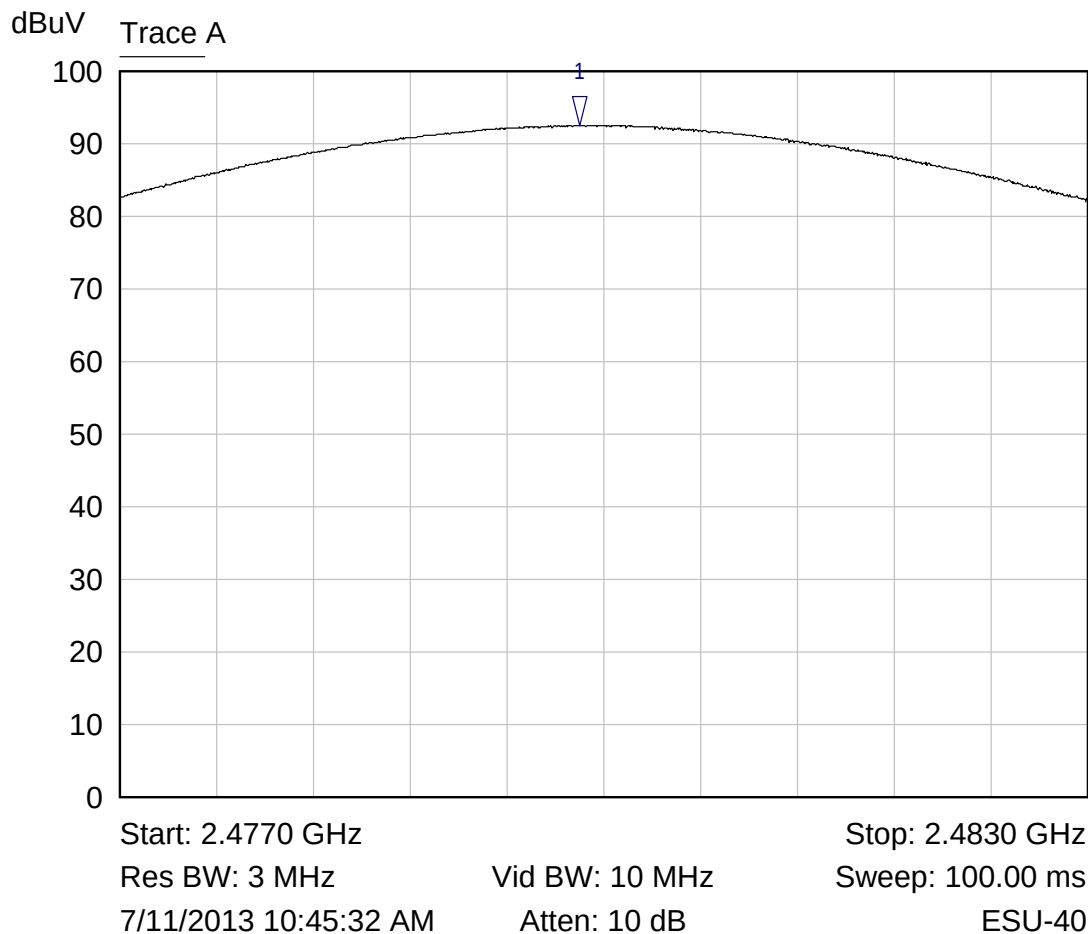

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4799 GHz	92.57 dBuV	

RESULT

In the configuration tested, the RF peak output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification.

6.2.7 §15.247(d) Spurious Emissions

The frequency range from lowest frequency generated or used in the device to the 10th harmonic of the fundamental frequency was investigated to measure any radiated emissions. Any emissions in the restricted bands must meet the limits specified in §15.209. Emissions outside the restricted bands must be attenuated 20 db from the fundamental. No averaging factor was applied. The spurious emission when operating in EDR 1021 mode exhibited the worst-case emissions and are shown in the tables below. The tables below show the emission measurements for any emission seen and the plots show the band edges of the lower and upper channel fundamental emission.

Transmitting at the Lowest Frequency (2402 MHz)

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804.0	Peak	Vertical	16.0	37.6	0.0	53.6	74.0	-20.4
4804.0	Average	Vertical	5.4	37.6	0.0	43.0	54.0	-11.0
4804.0	Peak	Horizontal	6.5	37.6	0.0	44.1	74.0	-29.9
4804.0	Average	Horizontal	-7.4	37.6	0.0	30.2	54.0	-23.8
7206.0	Peak	Vertical	2.9	41.7	0.0	44.6	74.0	-29.4
7206.0	Average	Vertical	-9.4	41.7	0.0	32.3	54.0	-21.7
7206.0	Peak	Horizontal	2.5	41.7	0.0	44.2	74.0	-29.8
7206.0	Average	Horizontal	-9.3	41.7	0.0	32.4	54.0	-21.6
9608.0	Peak	Vertical	1.9	44.6	0.0	46.5	74.0	-27.5
9608.0	Average	Vertical	-10.3	44.6	0.0	34.3	54.0	-19.7
9608.0	Peak	Horizontal	1.2	44.6	0.0	45.8	74.0	-28.2
9608.0	Average	Horizontal	-10.4	44.6	0.0	34.2	54.0	-19.8
12010.0	Peak	Vertical	0.8	46.8	0.0	47.6	74.0	-26.4
12010.0	Average	Vertical	-10.8	46.8	0.0	36.0	54.0	-18.0
12010.0	Peak	Horizontal	0.8	46.8	0.0	47.6	74.0	-26.4
12010.0	Average	Horizontal	-11.0	46.8	0.0	35.8	54.0	-18.2
14412.0	Peak	Vertical	0.8	50.2	0.0	51.0	74.0	-23.0
14412.0	Average	Vertical	-11.0	50.2	0.0	39.2	54.0	-14.8
14412.0	Peak	Horizontal	1.0	50.2	0.0	51.2	74.0	-22.8
14412.0	Average	Horizontal	-11.2	50.2	0.0	39.0	54.0	-15.0
16814.0	Peak	Vertical	-0.4	49.6	0.0	49.2	74.0	-24.8
16814.0	Average	Vertical	-11.7	49.6	0.0	37.9	54.0	-16.1
16814.0	Peak	Horizontal	-0.2	49.6	0.0	49.4	74.0	-24.6
16814.0	Average	Horizontal	-12.1	49.6	0.0	37.5	54.0	-16.5

Transmitting at the Middle Frequency (2441 MHz)

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882.0	Peak	Vertical	12.0	37.8	0.0	49.8	74.0	-24.2
4882.0	Average	Vertical	1.1	37.8	0.0	38.9	54.0	-15.1
4882.0	Peak	Horizontal	8.7	37.8	0.0	46.5	74.0	-27.5
4882.0	Average	Horizontal	-2.2	37.8	0.0	35.6	54.0	-18.4
7323.0	Peak	Vertical	2.6	42.1	0.0	44.7	74.0	-29.3

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
7323.0	Average	Vertical	-9.7	42.1	0.0	32.4	54.0	-21.6
7323.0	Peak	Horizontal	2.3	42.1	0.0	44.4	74.0	-29.6
7323.0	Average	Horizontal	-9.8	42.1	0.0	32.3	54.0	-21.7
9764.0	Peak	Vertical	1.9	44.8	0.0	46.7	74.0	-27.3
9764.0	Average	Vertical	-10.8	44.8	0.0	34.0	54.0	-20.0
9764.0	Peak	Horizontal	1.2	44.8	0.0	46.0	74.0	-28.0
9764.0	Average	Horizontal	-10.8	44.8	0.0	34.0	54.0	-20.0
12205.0	Peak	Vertical	0.8	46.8	0.0	47.6	74.0	-26.4
12205.0	Average	Vertical	-11.7	46.8	0.0	35.1	54.0	-18.9
12205.0	Peak	Horizontal	1.4	46.8	0.0	48.2	74.0	-25.8
12205.0	Average	Horizontal	-11.7	46.8	0.0	35.1	54.0	-18.9
14646.0	Peak	Vertical	0.4	49.8	0.0	50.2	74.0	-23.8
14646.0	Average	Vertical	-12.0	49.8	0.0	37.8	54.0	-16.2
14646.0	Peak	Horizontal	0.6	49.8	0.0	50.4	74.0	-23.6
14646.0	Average	Horizontal	-12.0	49.8	0.0	37.8	54.0	-16.2
17087.0	Peak	Vertical	-1.3	50.7	0.0	49.4	74.0	-24.6
17087.0	Average	Vertical	-13.4	50.7	0.0	37.3	54.0	-16.7
17087.0	Peak	Horizontal	-1.2	50.7	0.0	49.5	74.0	-24.5
17087.0	Average	Horizontal	-13.2	50.7	0.0	37.5	54.0	-16.5


Transmitting at the Highest Frequency (2480 MHz)

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960.0	Peak	Vertical	11.0	37.9	0.0	48.9	74.0	-25.1
4960.0	Average	Vertical	0.3	37.9	0.0	38.2	54.0	-15.8
4960.0	Peak	Horizontal	5.8	37.9	0.0	43.7	74.0	-30.3
4960.0	Average	Horizontal	-7.0	37.9	0.0	30.9	54.0	-23.1
7440.0	Peak	Vertical	2.1	42.4	0.0	44.5	74.0	-29.5
7440.0	Average	Vertical	-9.8	42.4	0.0	32.6	54.0	-21.4
7440.0	Peak	Horizontal	2.2	42.4	0.0	44.6	74.0	-29.4
7440.0	Average	Horizontal	-9.8	42.4	0.0	32.6	54.0	-21.4
9920.0	Peak	Vertical	0.8	44.9	0.0	45.7	74.0	-28.3
9920.0	Average	Vertical	-10.5	44.9	0.0	34.4	54.0	-19.6
9920.0	Peak	Horizontal	0.7	44.9	0.0	45.6	74.0	-28.4
9920.0	Average	Horizontal	-10.6	44.9	0.0	34.3	54.0	-19.7

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
12400.0	Peak	Vertical	0.6	46.7	0.0	47.3	74.0	-26.7
12400.0	Average	Vertical	-11.3	46.7	0.0	35.4	54.0	-18.6
12400.0	Peak	Horizontal	0.8	46.7	0.0	47.5	74.0	-26.5
12400.0	Average	Horizontal	-11.2	46.7	0.0	35.5	54.0	-18.5
14880.0	Peak	Vertical	0.1	49.1	0.0	49.2	74.0	-24.8
14880.0	Average	Vertical	-11.8	49.1	0.0	37.3	54.0	-16.7
14880.0	Peak	Horizontal	-0.6	49.1	0.0	48.5	74.0	-25.5
14880.0	Average	Horizontal	-11.7	49.1	0.0	37.4	54.0	-16.6
17360.0	Peak	Vertical	-0.4	51.9	0.0	51.5	74.0	-22.5
17360.0	Average	Vertical	-12.4	51.9	0.0	39.5	54.0	-14.5
17360.0	Peak	Horizontal	-0.9	51.9	0.0	51.0	74.0	-23.0
17360.0	Average	Horizontal	-12.4	51.9	0.0	39.5	54.0	-14.5


No other emissions were seen in the restricted bands. Noise floor was greater than 6 dB below the limit. At frequencies above 12.5 GHz, a 1 meter measurement distance was used.

Lower Band Edge

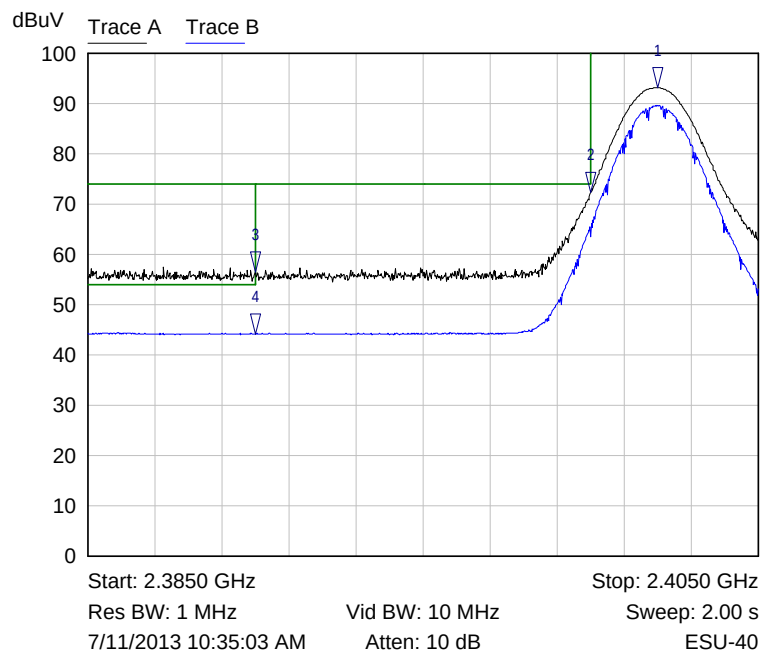


Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4020 GHz	93.22 dBuV	
2 ▽	Trace A	2.4000 GHz	72.30 dBuV	
3 ▽	Trace A	2.3900 GHz	56.56 dBuV	
4 ▽	Trace B	2.3900 GHz	44.21 dBuV	

Upper Band Edge

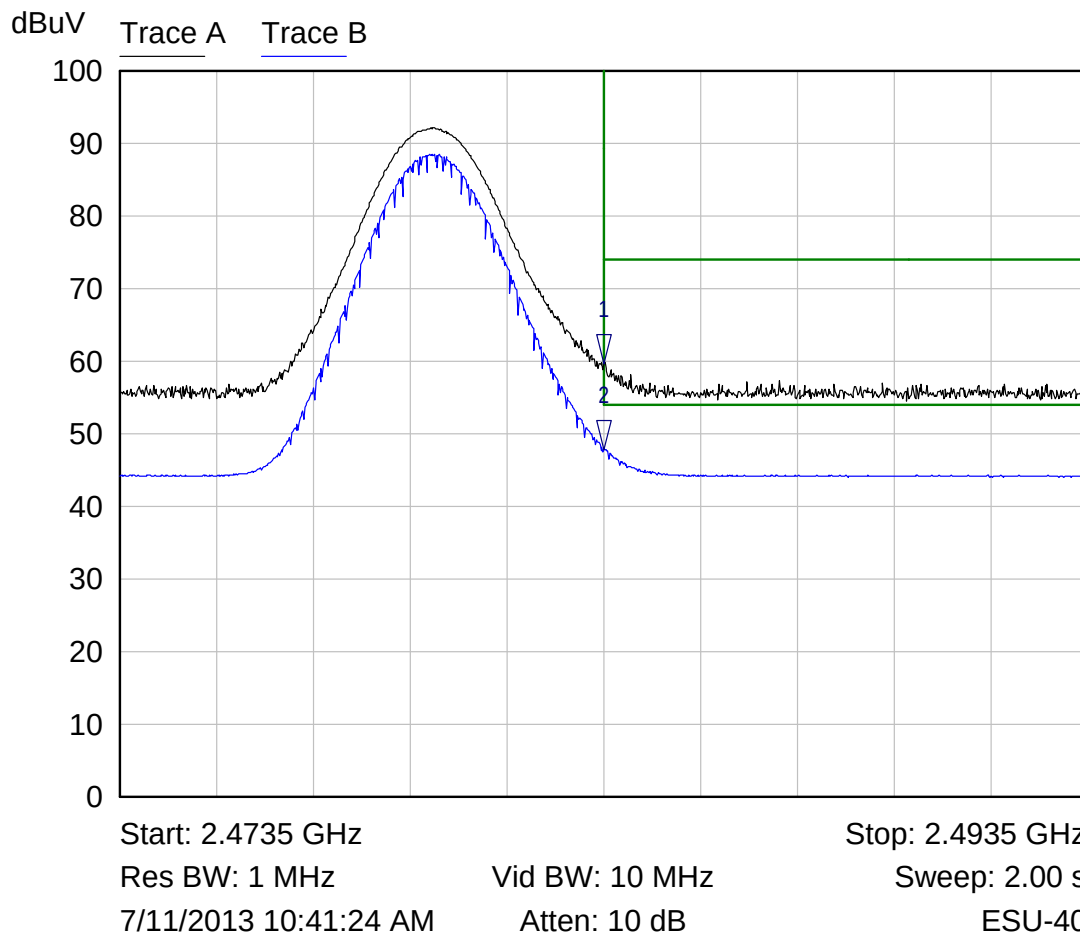

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4835 GHz	59.64 dBuV	
2 ▽	Trace B	2.4835 GHz	47.80 dBuV	

Plot of the Emission in the 2400 – 2483.5 MHz Band While Hopping

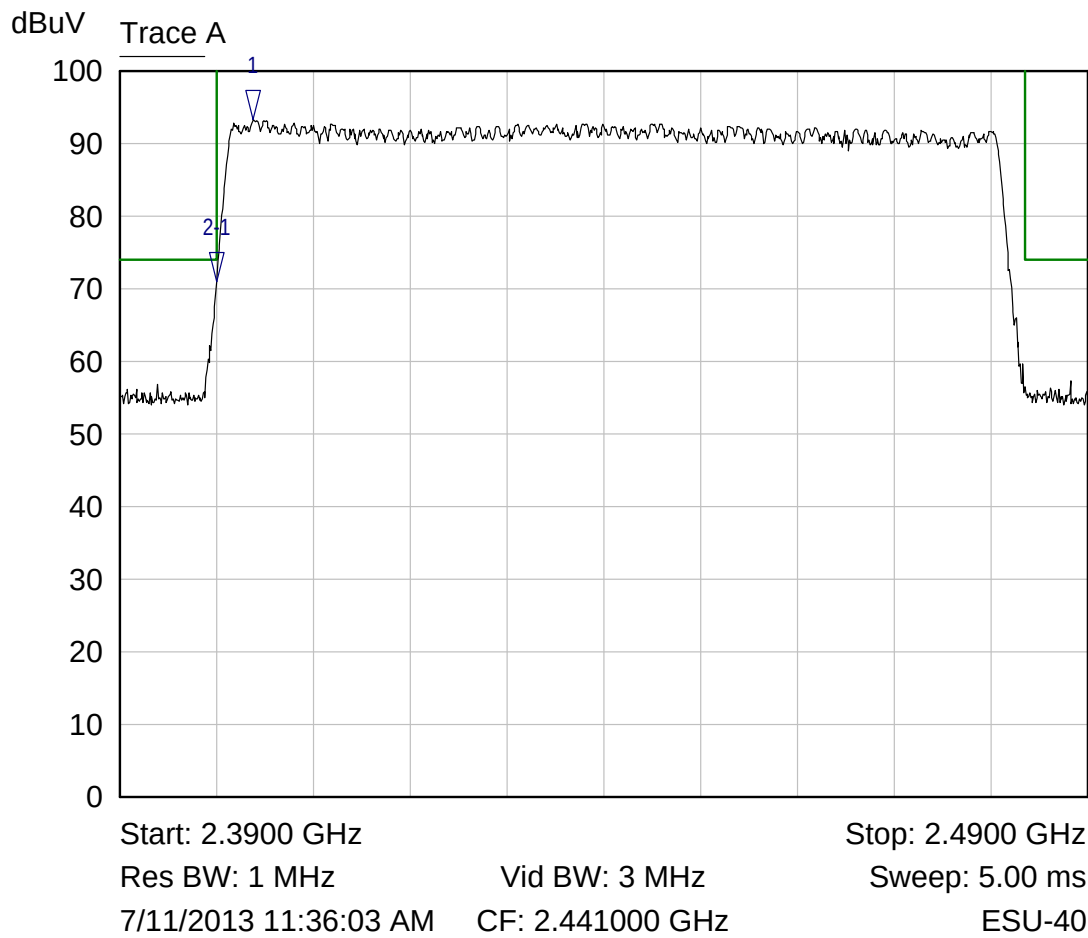

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4038 GHz	93.28 dBuV	
2-1 ▽	Trace A	-3.8000 MHz	-22.24 dB	

RESULT

The spurious emissions, even those not in the restricted bands, met the limits specified in §15.209; therefore, the EUT complies with the specification

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT

A1.1 Conducted Disturbance at the AC Mains

The conducted disturbance at mains ports from the EUT was measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted disturbance at mains ports measurements are performed in a screen room using a (50 Ω /50 μ H) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of equipment with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- (a) Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- (b) Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- (c) Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- (d) Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- (e) When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.


For AC mains port testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Wanship Open Area Test Site #2	Nemko-CCL, Inc.	N/A	N/A	12/07/2012	12/07/2013
Test Software	Nemko-CCL, Inc.	Conducted Emissions	Revision 1.2	N/A	N/A
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711	02/06/2013	02/06/2014
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137	02/06/2013	02/06/2014
LISN	EMCO	3825/2	9305-2099	03/12/2013	03/12/2014

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Conductance Cable Wanship Site #2	Nemko-CCL, Inc.	Cable J	N/A	12/21/2012	12/21/2013
Transient Limiter	Hewlett Packard	11947A	3107A02266	12/21/2012	12/21/2013

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Conducted Emissions Test Setup

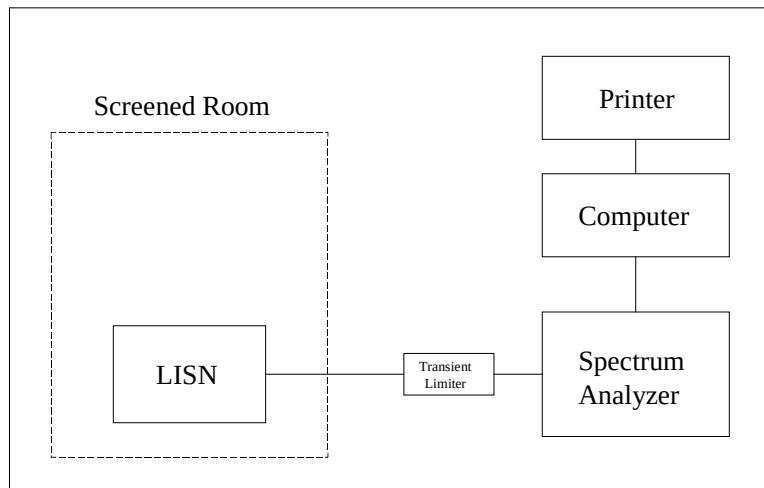

A1.2 Radiated Emissions

The radiated emissions from the intentional radiator were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A loop antenna was used to measure emissions below 30 MHz. Emission readings more than 20 dB below the limit at any frequency may not be listed in the reported data. For frequencies between 9 kHz and 30 MHz, or the lowest frequency generated or used in the device greater than 9 kHz, and less than 30 MHz, the spectrum analyzer resolution bandwidth was set to 9 kHz and the video bandwidth was set to 30 kHz. For average measurements, the spectrum analyzer average detector was used.

For frequencies above 30 MHz, an amplifier and preamplifier were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz. For average measurements above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the average detector of the analyzer was used.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range of 1 GHz to 18 GHz, and a Pyramidal Horn antenna was used to measure the frequency range of 18 GHz to 25 GHz, at a distance of 3 meters and/or 1 meter from the EUT. The readings obtained by the antenna are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated disturbance. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emission testing at 30 MHz or above that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Wanship Open Area Test Site #2	Nemko-CCL, Inc.	N/A	N/A	12/07/2012	12/07/2013
Test Software	Nemko-CCL, Inc.	Radiated Emissions	Revision 1.3	N/A	N/A
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	100064	07/24/2013	07/24/2014
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711	02/06/2013	02/06/2014
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137	02/06/2013	02/06/2014
Loop Antenna	EMCO	6502	9111-2675	03/04/2013	03/04/2015
Biconilog Antenna	EMCO	3142	9601-1008	10/10/2012	10/10/2014
Double Ridged Guide Antenna	EMCO	3115	9409-4355	06/06/2012	06/06/2014
2.4 GHz Filter	Microtronics	HPM50111-03	001	05/17/2013	05/17/2014
Pyramidal Standard Gain Horn	EMC Test System	3160-09	0003-1197	04/10/2009	ICO
High Frequency Amplifier	Miteq	AFS4-01001800-43-10P-4	1096455	05/06/2013	05/06/2014
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	1297	05/02/2013	05/02/2014
3 Meter Radiated Emissions Cable Wanship Site #2	Microcoax	UFB205A-0-4700-000000	1295	05/02/2013	05/02/2014
Pre/Power-Amplifier	Hewlett Packard	8447F	3113A05161	08/27/2012	08/27/2013
6 dB Attenuator	Hewlett Packard	8491A	32835	12/21/2012	12/21/2013

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Radiated Emissions Test Setup

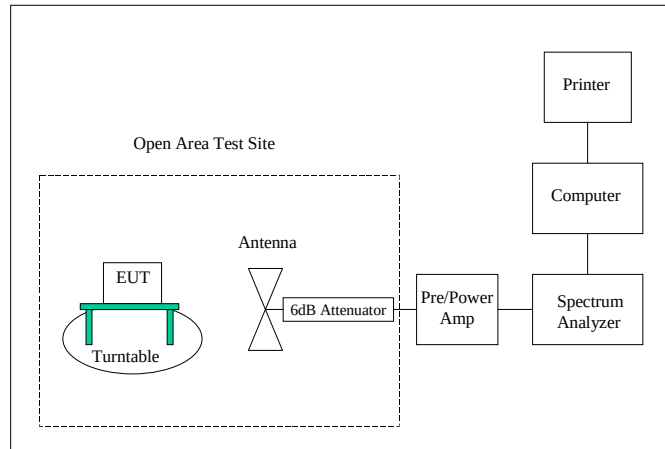


APPENDIX 2 PHOTOGRAPHS

Photograph 1 – Front View Radiated Disturbance Worst Case Configuration



Photograph 2 – Back View Radiated Disturbance Worst Case Configuration

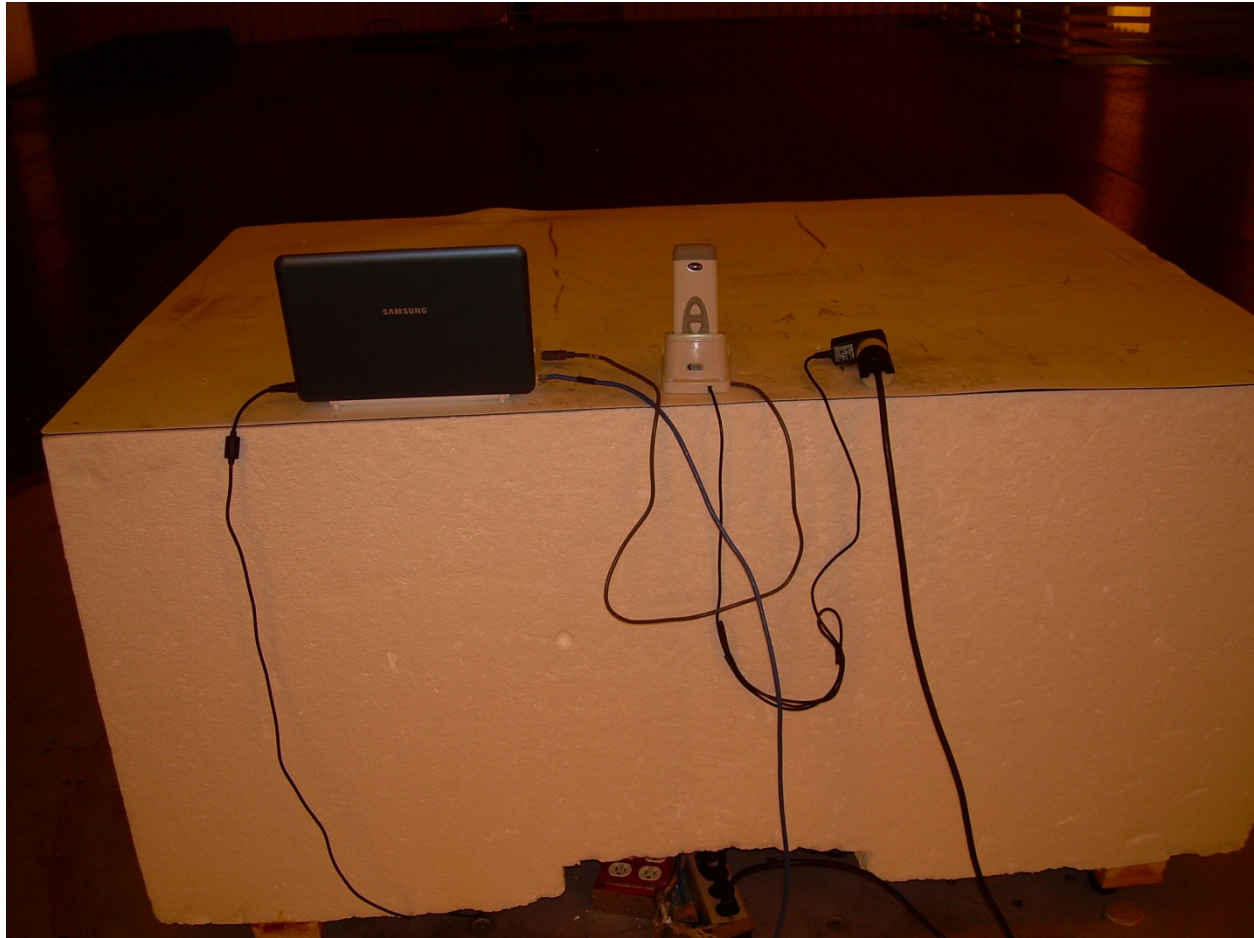

Photograph 3 – Front View Conducted Disturbance Worst Case Configuration



[illegible]

Photograph 5 – Front View of the EUT




Photograph 6 – Back View of the EUT



Photograph 7 – Top View of the EUT



Photograph 8 – View of the Top Side of the PCB

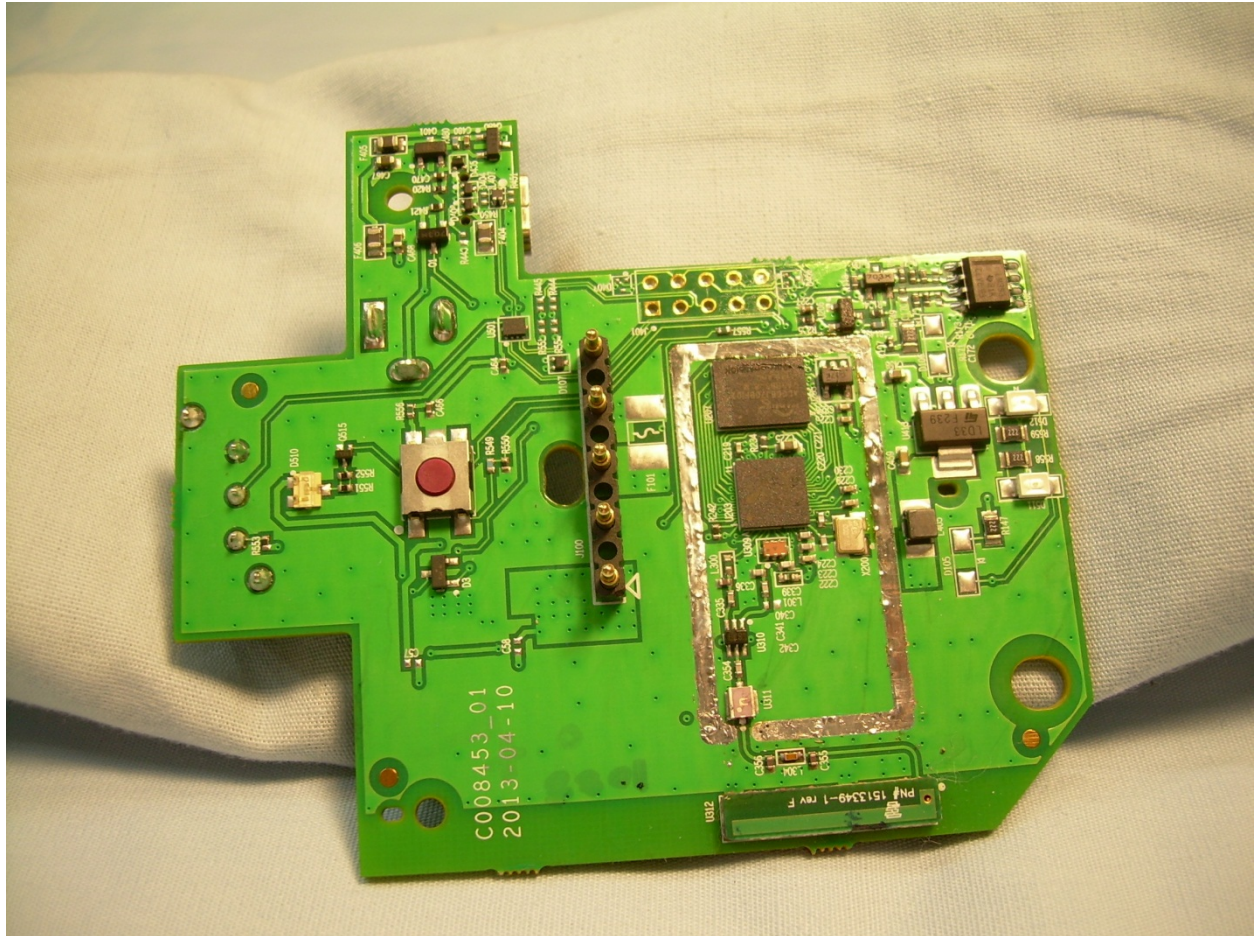

Photograph 9 – View of the Bottom Side of the PCB

