

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

## INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT Class II Permissive Change

OF

Product Name:	Bluetooth Headset
Brand Name:	(1) Windigo (for model: PBTFABF2C2-X (X=A~Z), PBHFABH2C2-X (X=A~Z)); (2) ezTalker Mini (for model: ET2000, ET2000R); (3) V3 (for model: BTH3, BTH4, BTH3R, BTH4R)
Model Name:	PBTFABF2C2-X (X=A~Z), PBHFABH2C2-X (X=A~Z); ET2000, ET2000R; BTH3, BTH4, BTH3R, BTH4R
Model Differences:	These models are different in exterior looks and PCB layout. The variant model names depend on different trader in the market
FCC ID:	QQFPBTFABX2C2X
Report No.:	EF/2004/90002-02
Issue Date:	Mar. 10, 2005
FCC Rule Part:	§15.247
Prepared for	Windigo SYSTEMS 2210 O'Toole Ave. #200, San Jose, CA 95131, U.S.A.
Prepared by	SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.

**Note:** This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. | 台北縣五股工業區五工路134號  
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | [www.sgs.com.tw](http://www.sgs.com.tw)

## VERIFICATION OF COMPLIANCE

**Applicant:** Windigo SYSTEMS  
2210 O'Toole Ave. #200, San Jose, CA 95131, U.S.A.

**Equipment Under Test:** Bluetooth Headset

**Brand Name:** (1) Windigo (for model: PBTFABF2C2-X (X=A~Z), PBHFABH2C2-X (X=A~Z)); (2) ezTalker Mini (for model: ET2000, ET2000R); (3) V3 (for model: BTH3, BTH4, BTH3R, BTH4R)

**FCC ID Number:** QQFPBTFABX2C2X

**Model No.:** PBTFABF2C2-X (X=A~Z), PBHFABH2C2-X (X=A~Z); ET2000, ET2000R; BTH3, BTH4, BTH3R, BTH4R

**Model Difference:** These models are different in exterior looks and PCB layout. The variant model names depend on different trader in the market

**File Number:** EF/2004/90002-02

**Date of test:** Feb. 23, 2005 ~ Mar. 09, 2005


**Date of EUT Received:** Feb. 22, 2005

### We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247

The test results of this report relate only to the tested sample identified in this report.

**Test By:**



**Date**

Mar. 10, 2005



**Approved By**



**Date**

Mar. 10, 2005



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Product Description .....	5
1.2. Related Submittal(s) / Grant (s) .....	5
1.3. Test Methodology .....	5
1.4. Test Facility.....	5
1.5. Special Accessories.....	5
1.6. Equipment Modifications.....	5
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1. EUT Configuration .....	6
2.2. EUT Exercise .....	6
2.3. Test Procedure.....	6
2.4. Configuration of Tested System.....	7
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>8</b>
<b>5. CONDUCTED EMISSION TEST.....</b>	<b>9</b>
5.1. Standard Applicable .....	9
5.2. EUT Setup.....	9
5.3. Measurement Procedure.....	9
5.4. Measurement Equipment Used: .....	10
5.5. Measurement Result.....	10
<b>6. PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>13</b>
6.1. Standard Applicable .....	13
6.2. Measurement Procedure.....	13
6.3. Measurement Result.....	13
6.4. Measurement Equipment Used: .....	13
<b>7. SPURIOUS RADIATED EMISSION TEST .....</b>	<b>16</b>
7.1. Standard Applicable .....	16
7.2. EUT Setup.....	16
7.3. Measurement Procedure.....	16
7.4. Test SET-UP (Block Diagram of Configuration) .....	17
7.5. Measurement Equipment Used: .....	18
7.6. Field Strength Calculation .....	18
7.7. Measurement Result.....	18

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

<b>8. ANTENNA REQUIREMENT .....</b>	<b>31</b>
8.1. Standard Applicable .....	31
8.2. Antenna Connected Construction .....	31
<b>9. RF EXPOSURE .....</b>	<b>32</b>
9.1. Standard Applicable .....	32
9.2. Measurement Result: .....	32

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 1. GENERAL INFORMATION

### 1.1. Product Description

The Windigo SYSTEMS, Model: PBTFABF2C2-X (X=A~Z), PBHFABH2C2-X (X=A~Z); ET2000, ET2000R; BTH3, BTH4, BTH3R, BTH4R (referred to as the EUT in this report) is Bluetooth Headset.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402 – 2480Hz, 79 channels
- B). Rated output power: 5 dBm
- C). Modulation type: Frequency Hopping Spread Spectrum (FHSS)
- D). Antenna Designation: Chip Antenna, 2 dBi, Non-User Replaceable (Fixed)
- E). Power Supply: Input: 110V/ 60Hz; Output: 9Vdc

### 1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **QQFPBTFABX2C2X** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a Doc procedure.

### 1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 1.4. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 & 10 meters) Registration Number: 94644, Anechoic chamber (3 meters) Registration Number: 573967

### 1.5. Special Accessories

Not available for this EUT intended for grant.

### 1.6. Equipment Modifications

Not available for this EUT intended for grant.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 2. SYSTEM TEST CONFIGURATION

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 2.3. Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.


#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 2.4. Configuration of Tested System

**Fig. 2-1 Configuration of Tested System (Fixed channel)**

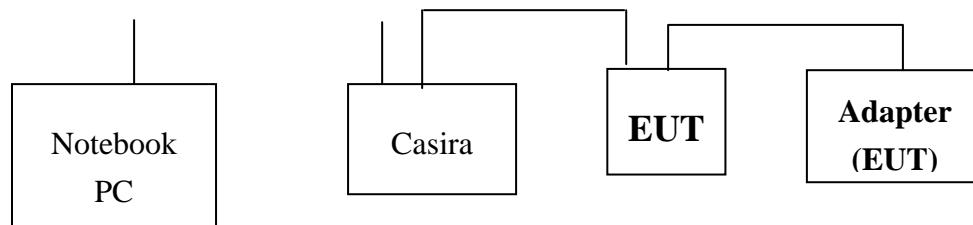

**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/ Type No.	FCC ID	Series No.	Data Cable	Power Cord
1.	Notebook	TOSHIBA	PSA10L-3V1JDP	FCC DoC	Z3062680P	N/A	N/A
2.	CASIRA	CSR	BCES301199/1	N/A	7383 07 04 03	N/A	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.209(a) (f)	Spurious Emission	Compliant
§15.203, §15.247(b)(4)(i)	Antenna Requirement	Compliant
§1.1310	RF Exposure	Compliant

### 4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz)、mid (2441MHz) and high (2480MHz) with 741k highest data rate are chosen for Peak output power, Conducted/Radiated spurious emission testing.

Another new AC/DC power adaptor (model: KSAFB0600045W1EU) is provided. Therefore AC power line conducted Emission is reported.

Two type of PCB layout of EUT were pre-test; Model PBTFABF2C2-X/ET2000/BTH3/BTH4 is the worst case and reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 5. CONDUCTED EMISSION TEST

### 5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

**Note**

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 5.2. EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The spacing between the peripherals was 10 centimeters.
4. External I/O cables were draped along the edge of the test table and bundle when necessary.
5. The host system was connected with 110Vac/60Hz power source.

### 5.3. Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

#### 5.4. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMC Analyzer	HP	8594EM	3624A00203	12/31/2004	12/30/2005
EMI Test Receiver	R&S	ESCS30	828985/004	01/15/2005	01/14/2006
LISN	Rolf-Heine	NNB-2/16Z	99012	12/30/2004	12/29/2005
LISN	Rolf-Heine	NNB-2/16Z	99013	11/06/2004	11/05/2005

#### 5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Normal Operating Adaptor model: KSAFB0600045W1EU			Test Date :	Feb. 23, 2005	
Temperature:	22	Humidity:	60%	Test By:	Sky	


FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.162	31.06	--	65.39	--	-34.33	--	L1
0.181	29.28	--	64.46	--	-35.18	--	L1
0.228	27.68	--	62.52	--	-34.84	--	L1
0.391	35.30	--	58.03	--	-22.73	--	L1
1.262	22.36	--	56.00	--	-33.64	--	L1
2.066	34.84	--	56.00	--	-21.16	--	L1
<hr/>							
0.162	29.44	--	65.39	--	-35.95	--	L2
0.204	25.75	--	63.45	--	-37.70	--	L2
0.302	25.23	--	60.19	--	-34.96	--	L2
0.396	36.46	--	57.95	--	-21.49	--	L2
1.111	24.25	--	56.00	--	-31.75	--	L2
2.261	23.84	--	56.00	--	-32.16	--	L2

### Remark :


- (1) Measuring frequencies from 0.15 MHz to 30MHz.
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “--” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;  
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Conducted Emission Test Plot

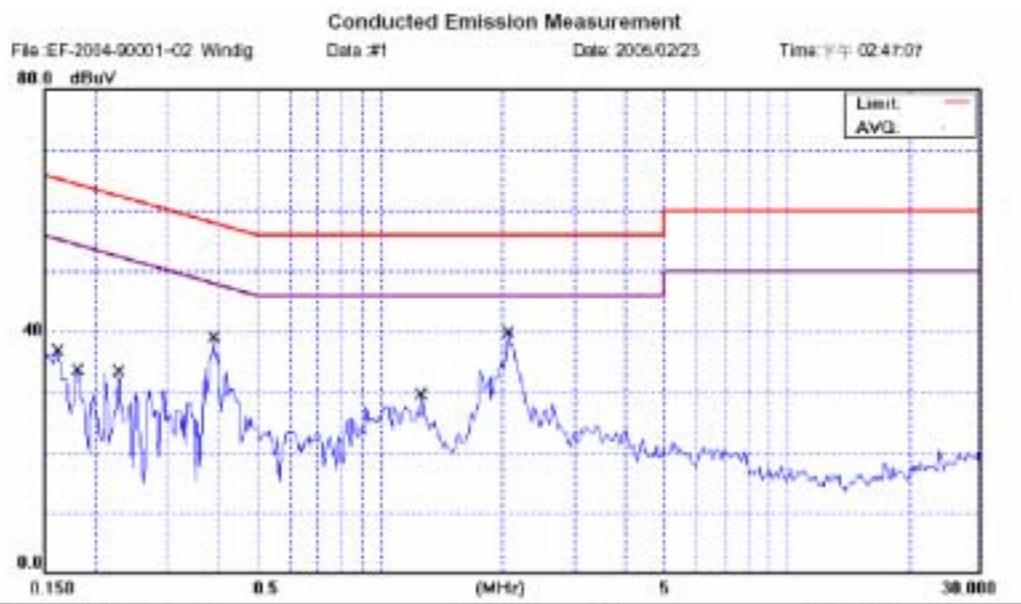

Site: SGS CONDUCTED #1 Phase: **L1** Temperature: 22 °C  
 Limit: EN55022 Class B Conduction(OP) Power: AC 120V60Hz Humidity: 60 %  
 EUT: BLUETOOTH HEADSET Distance: Air Pressure: hPa  
 M/N: follow product information  
 Note: charge

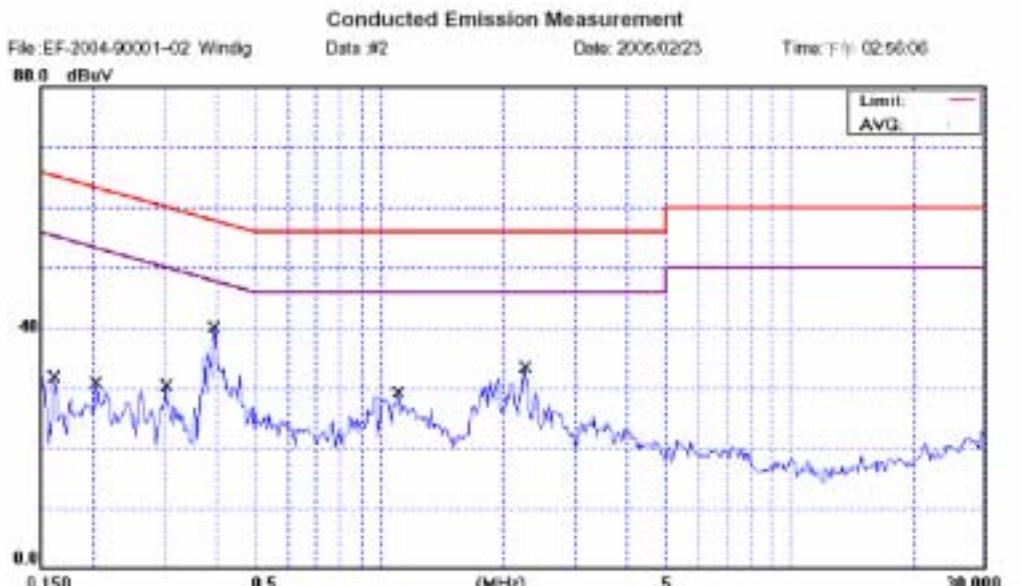

Site: SGS CONDUCTED #1 Phase: **N** Temperature: 22 °C  
 Limit: EN55022 Class B Conduction(OP) Power: AC 120V60Hz Humidity: 60 %  
 EUT: BLUETOOTH HEADSET Distance: Air Pressure: hPa  
 M/N: follow product information  
 Note: charge

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 6. PEAK OUTPUT POWER MEASUREMENT

### 6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

### 6.2. Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

### 6.3. Measurement Result


CH	Frequency (MHz)	Reading Power dBm	Cable Loss	Output Power dBm	Output Power W	Limit (W)
LOW	2402.00	4.41	0.20	4.61	0.00289	1
MID	2441.00	4.18	0.20	4.38	0.00274	1
HIGH	2480.00	3.48	0.20	3.68	0.00233	1

### 6.4. Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2004	08/27/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2004	10/06/2005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

### Peak Power Output Data Plot (CH Low)

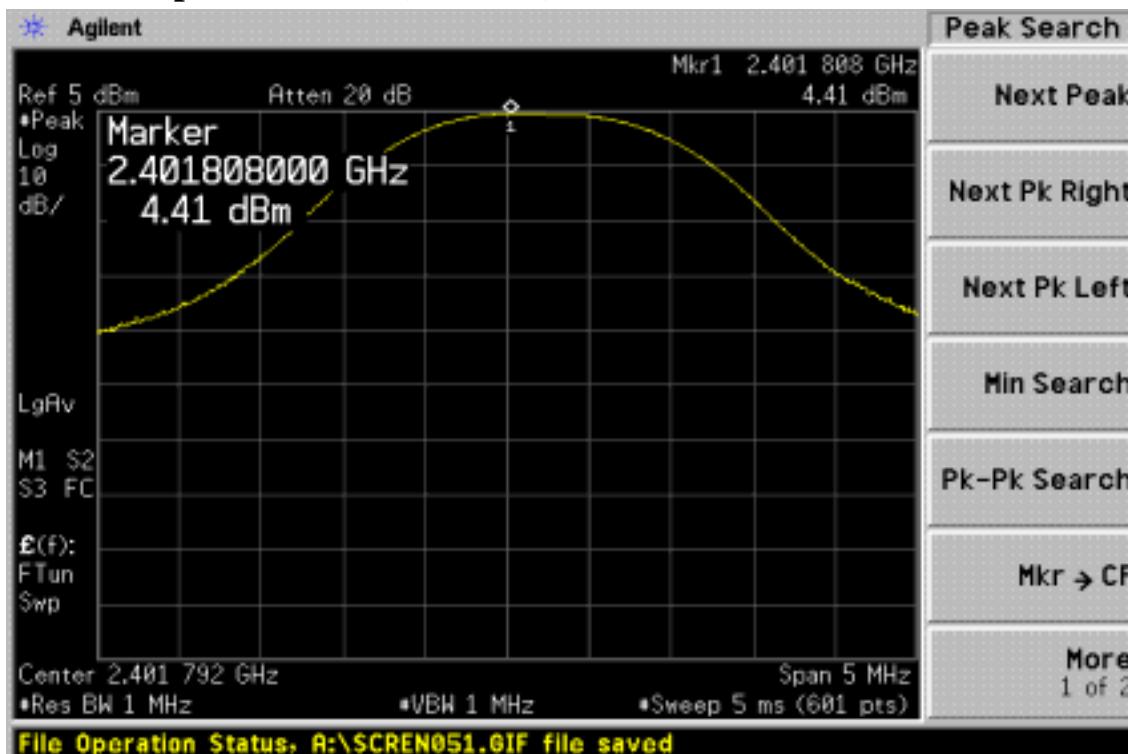


### Peak Power Output Data Plot (CH Mid)

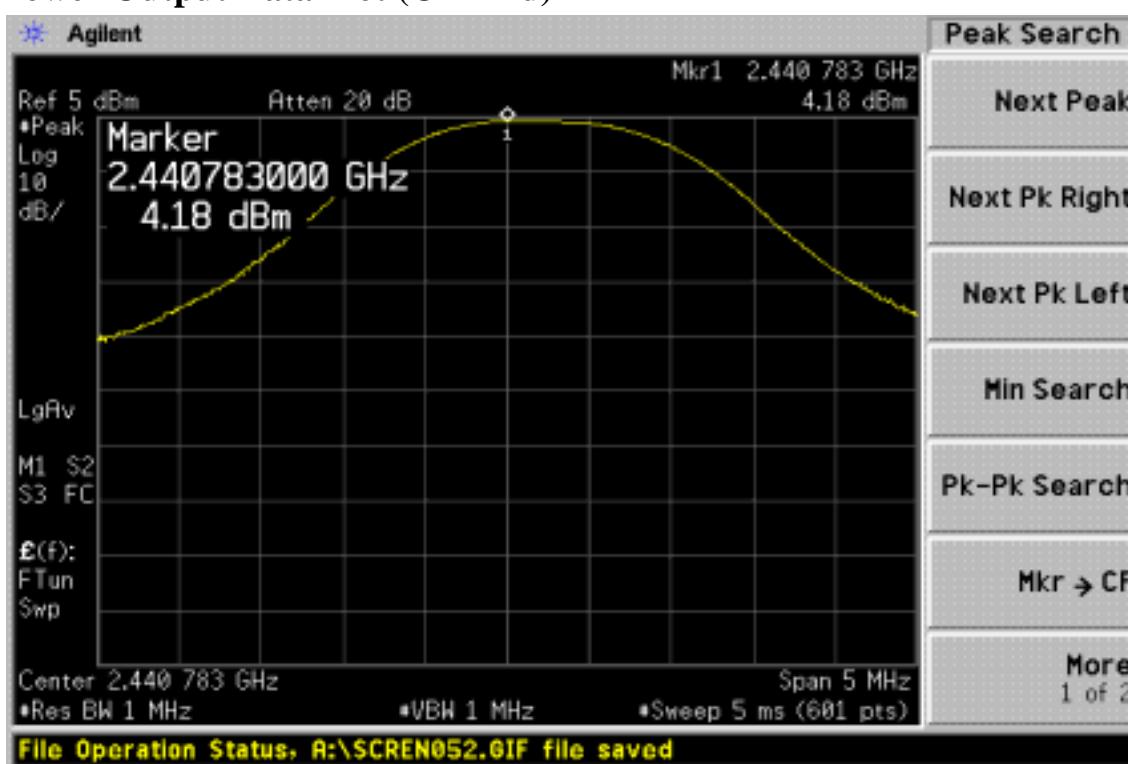

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Peak Power Output Data Plot (CH High)

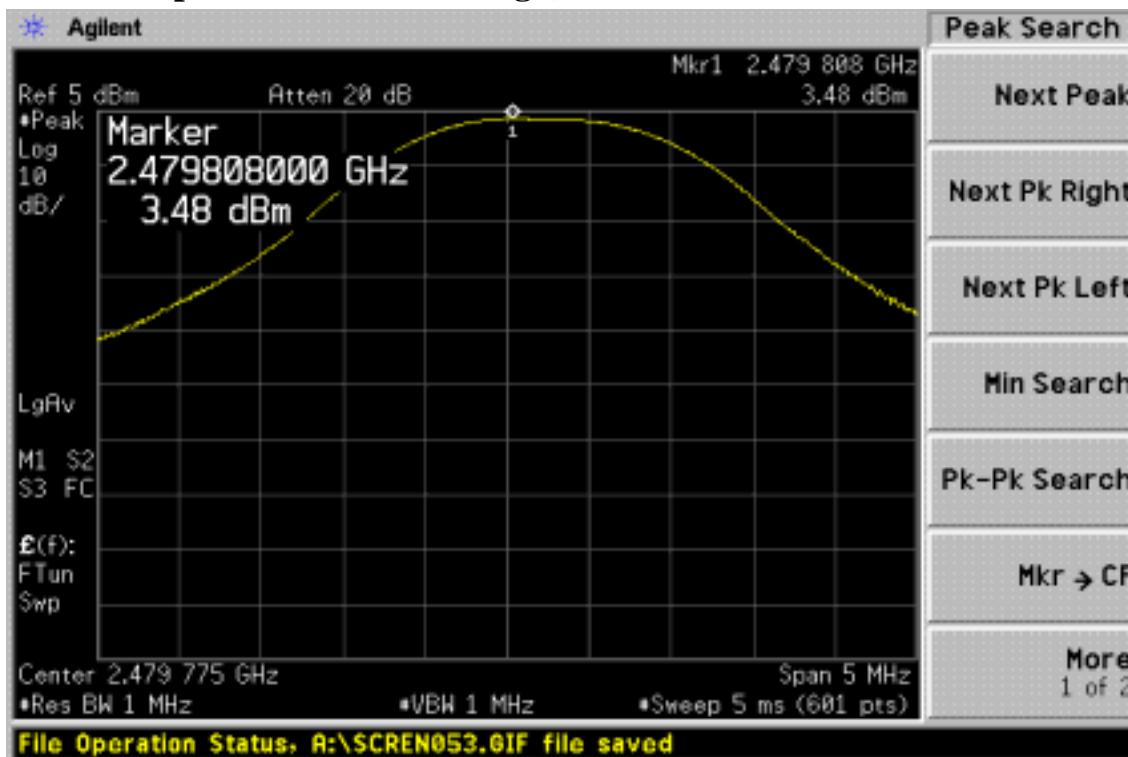

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 7. SPURIOUS RADIATED EMISSION TEST

### 7.1. Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

### 7.2. EUT Setup

1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
2. The EUT was put in the front of the test table. The peripherals was placed on the side of the host system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The spacing between the peripherals was 10 centimeters.
4. External I/O cables were draped along the edge of the test table and bundle when necessary.
5. The host PC system was connected with 110Vac/60Hz power source.


### 7.3. Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 7.4. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

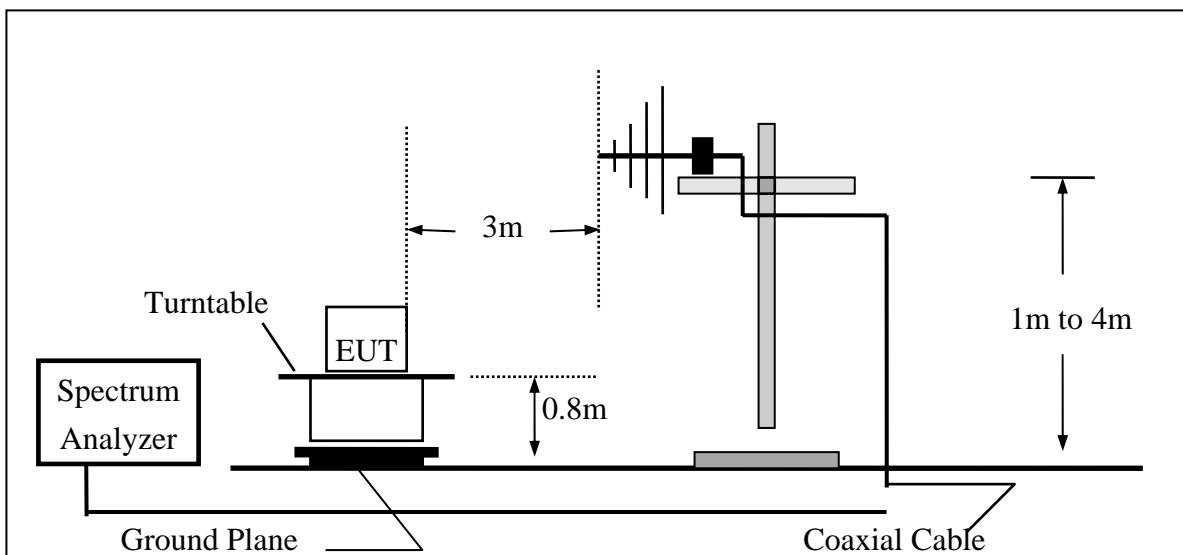

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

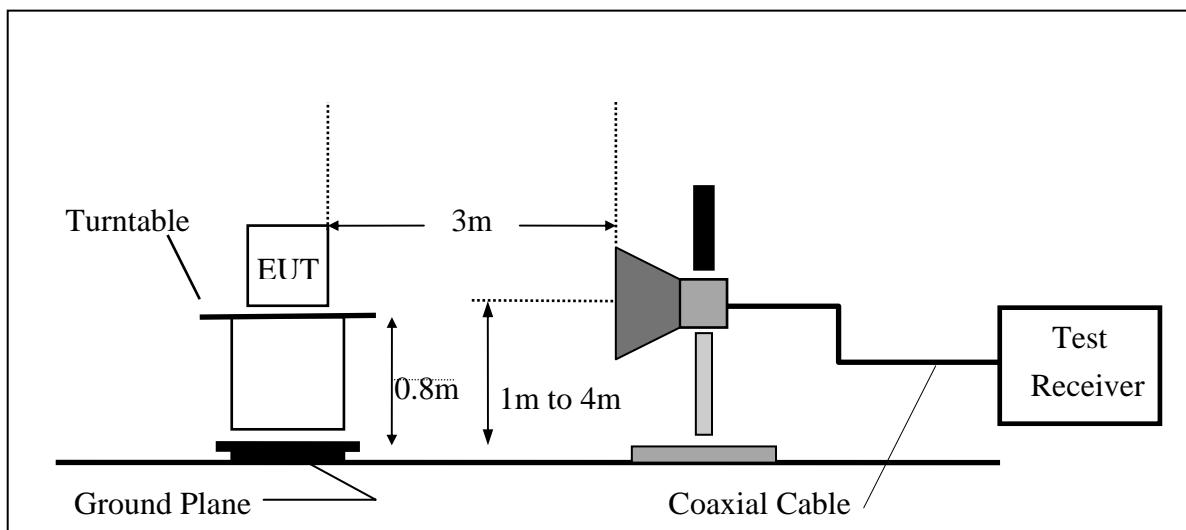

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 7.5. Measurement Equipment Used:

966 Chamber					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2004	08/26/2005
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2004	06/02/2005
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2004	08/15/2005
Horn antenna	Schwarzbeck	BBHA 9170	184/185	07/04/2004	07/03/2005
Pre-Amplifier	HP	8447D	2944A09469	07/19/2004	07/18/2005
Pre-Amplifier	HP	8494B	3008A00578	02/26/2005	02/25/2006
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2004	10/08/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2004	10/08/2005
Site NSA	SGS	966 chamber	N/A	11/17/2004	11/16/2005

## 7.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


## 7.7. Measurement Result

Refer to attach tabular data sheets.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Conducted Spurious Emission Measurement Result

### Ch Low 30MHz – 3GHz

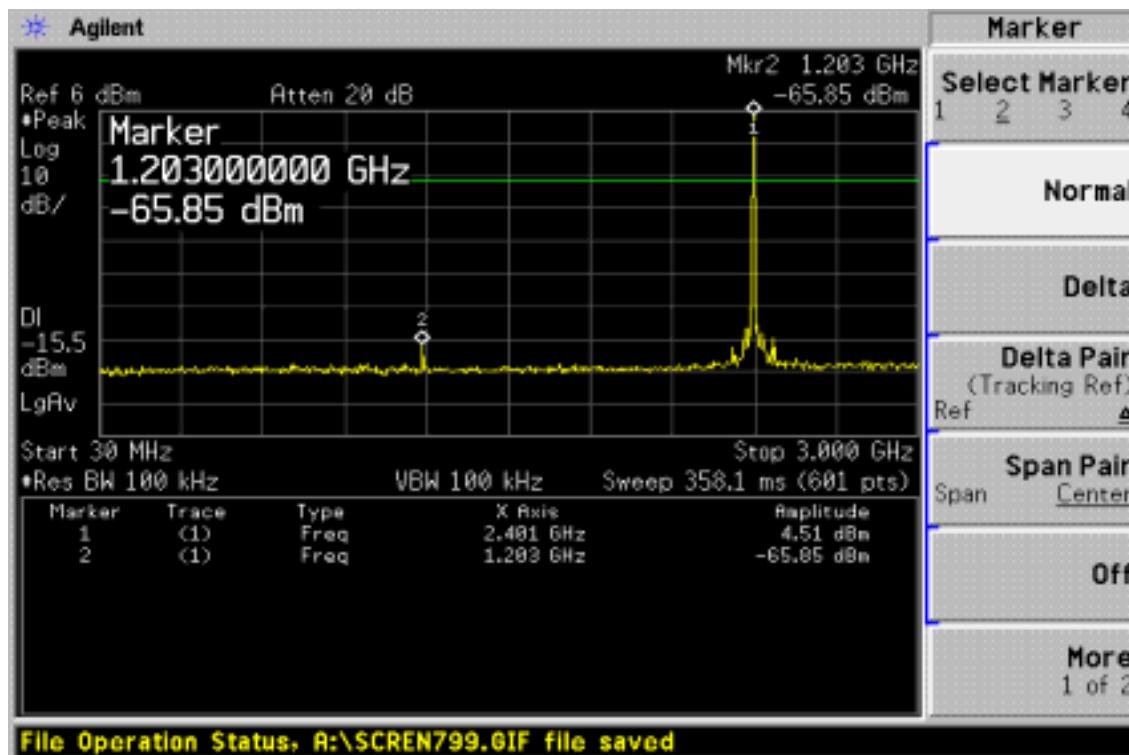


### Ch Low 3GHz – 26.5GHz

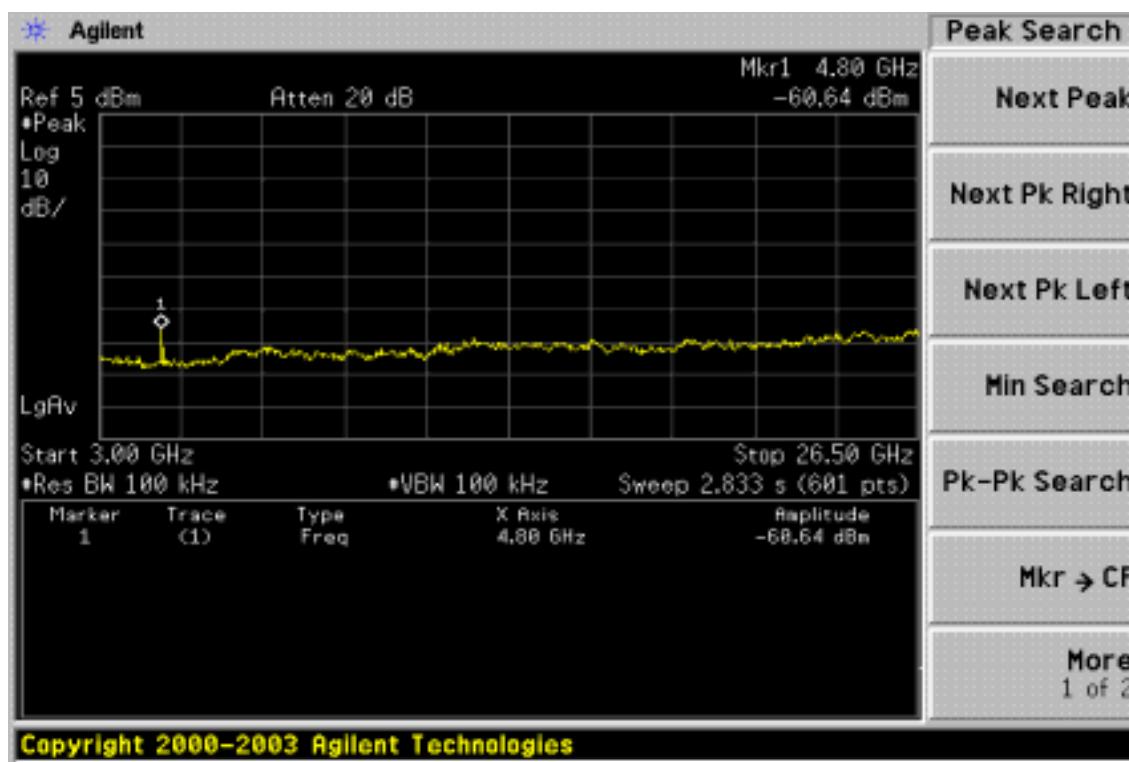


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Ch Mid 30MHz – 3GHz

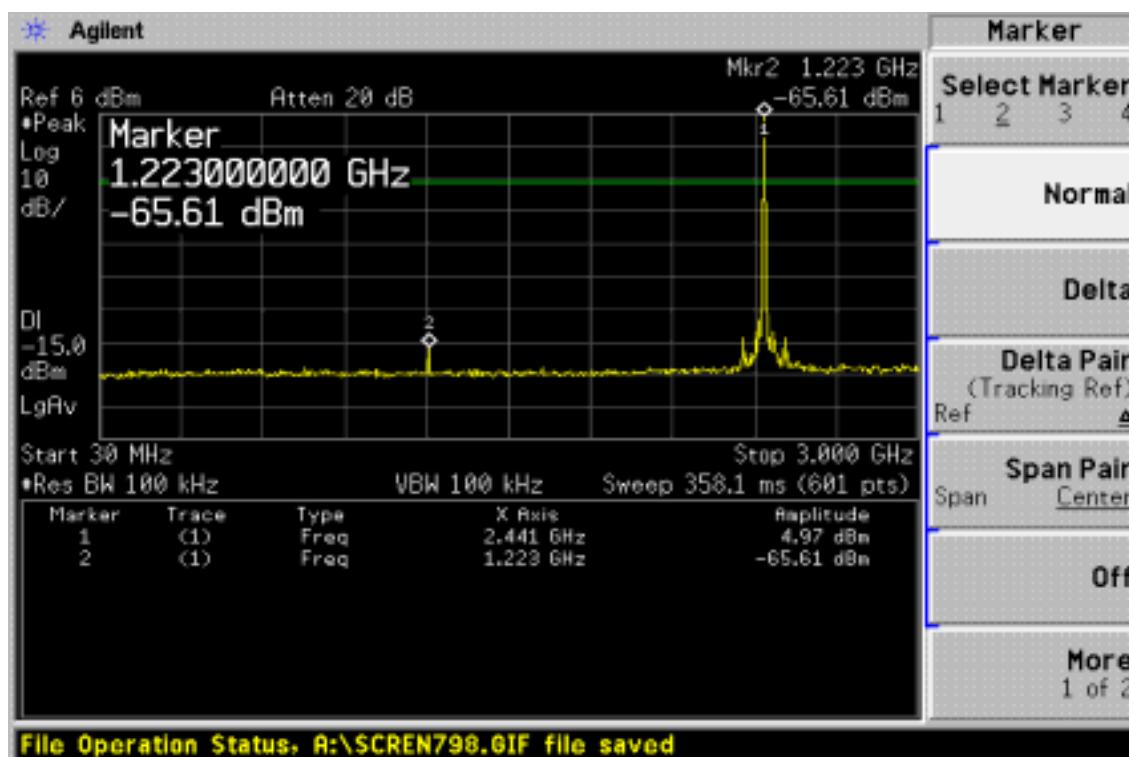


## Ch Mid 3GHz – 26.5GHz

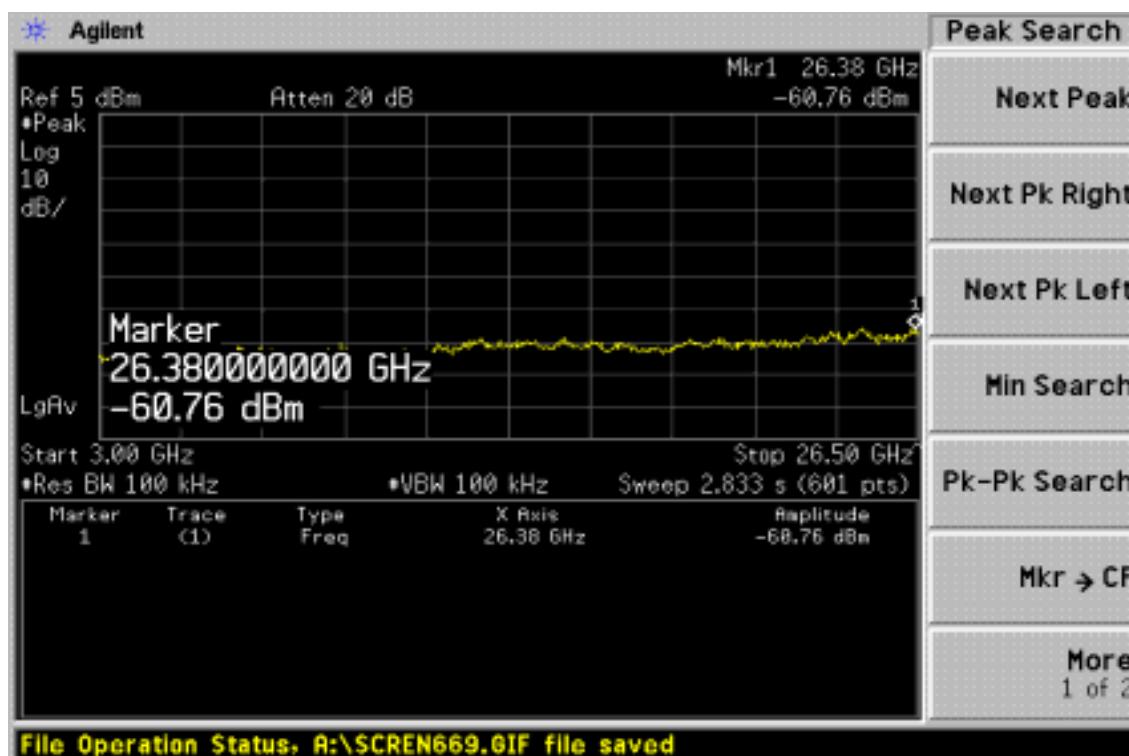


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Ch High 30MHz – 3GHz

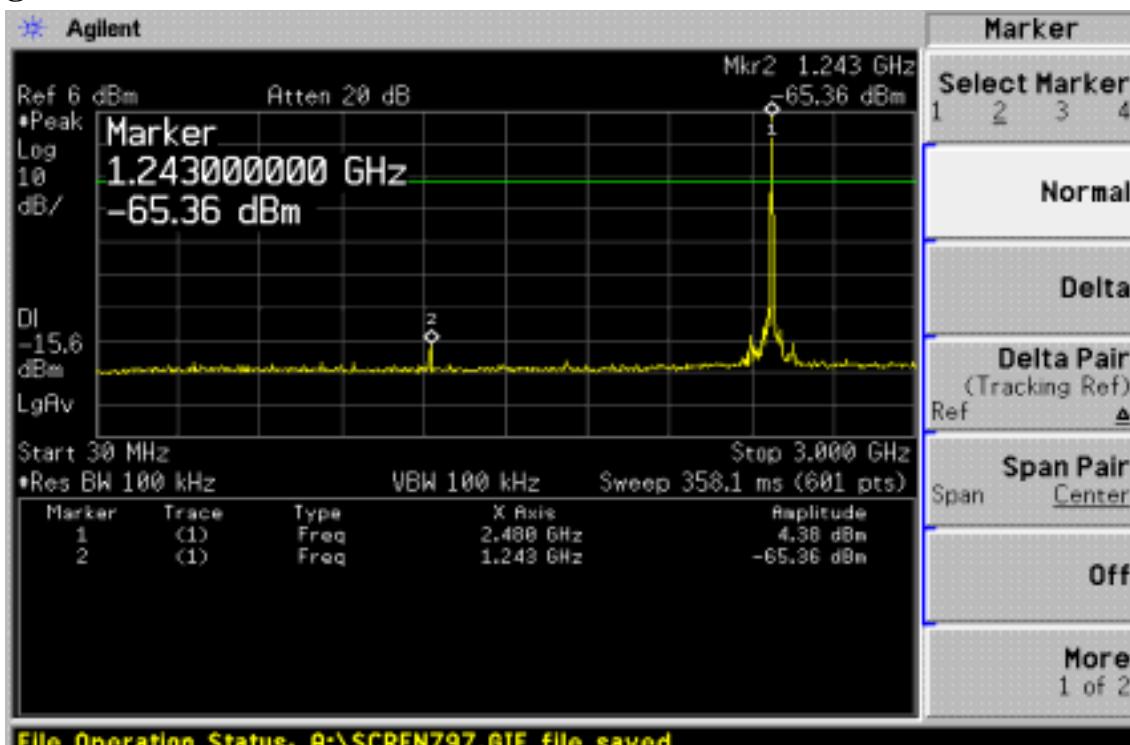

### Ch High 3GHz – 26.5GHz

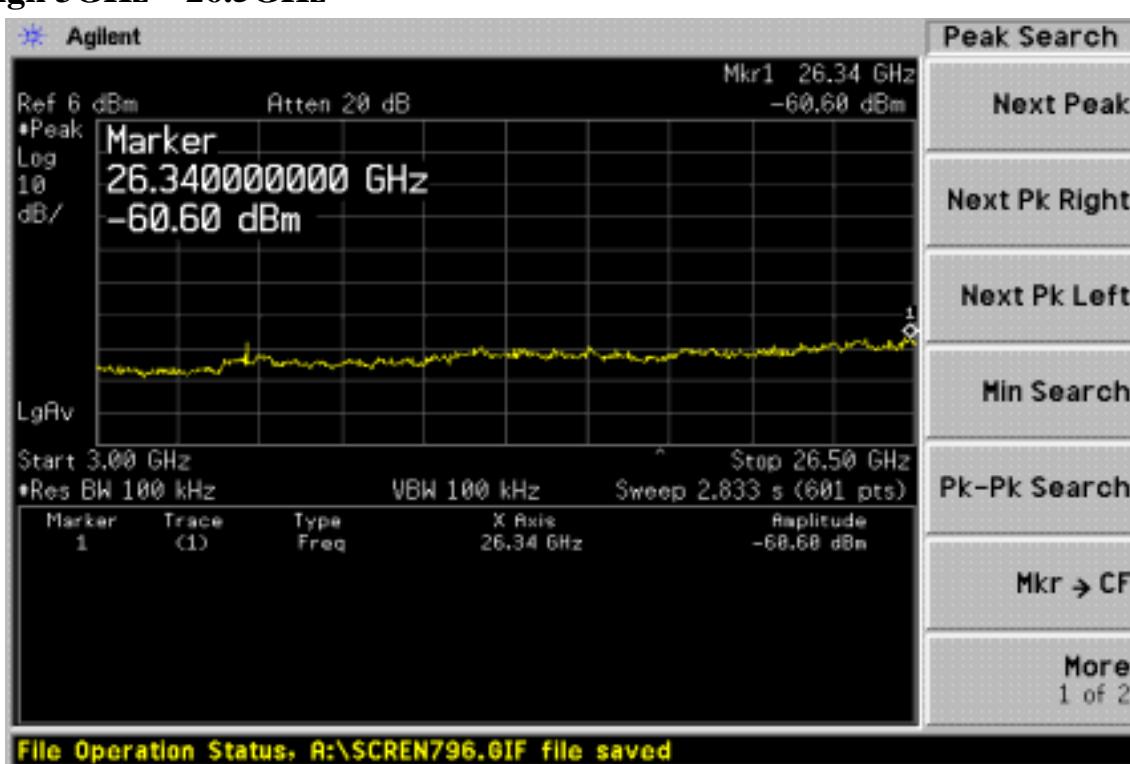

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	TX CH Low	Test Date	Mar. 02, 2005
Fundamental Frequency	2402MHz	Test By	Sky
Temperature	25	Pol	Ver./Hor
Humidity	65 %		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
167.74	V	Peak	48.19	-14.63	33.56	43.50	-9.94
213.33	V	Peak	49.45	-16.31	33.14	43.50	-10.36
533.43	V	Peak	42.77	-8.75	34.02	46.00	-11.98
640.13	V	Peak	39.69	-6.73	32.96	46.00	-13.04
701.24	V	Peak	38.02	-5.36	32.66	46.00	-13.34
766.23	V	Peak	36.57	-4.14	32.43	46.00	-13.57
167.74	H	Peak	48.02	-14.63	33.39	43.50	-10.11
300.63	H	Peak	46.82	-13.37	33.45	46.00	-12.55
499.480	H	Peak	42.72	-9.30	33.42	46.00	-12.58
599.390	H	Peak	42.83	-7.64	35.19	46.00	-10.81
641.100	H	Peak	40.55	-6.70	33.85	46.00	-12.15
900.090	H	Peak	36.24	-2.16	34.08	46.00	-11.92

**Remark :**

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

### Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	Mar. 02, 2005
Fundamental Frequency	2441MHz	Test By	Sky
Temperature	25	Pol	Ver./Hor
Humidity	65 %		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
65.89	V	Peak	46.43	-15.35	31.08	40.00	-8.92
167.74	V	Peak	47.52	-14.63	32.89	43.50	-10.61
300.63	V	Peak	44.98	-13.37	31.61	46.00	-14.39
533.43	V	Peak	42.52	-8.75	33.77	46.00	-12.23
640.13	V	Peak	40.96	-6.73	34.23	46.00	-11.77
701.24	V	Peak	37.36	-5.36	32.00	46.00	-14.00
167.74	H	Peak	47.69	-14.63	33.06	43.50	-10.44
232.73	H	Peak	48.51	-15.76	32.75	46.00	-13.25
301.60	H	Peak	47.20	-13.35	33.85	46.00	-12.15
499.48	H	Peak	43.02	-9.30	33.72	46.00	-12.28
599.39	H	Peak	42.02	-7.64	34.38	46.00	-11.62
766.23	H	Peak	38.03	-4.14	33.89	46.00	-12.11

#### Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	TX CH High	Test Date	Mar. 02, 2005
Fundamental Frequency	2480MHz	Test By	Sky
Temperature	25	Pol	Ver./Hor
Humidity	65 %		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
65.89	V	Peak	46.51	-15.35	31.16	40.00	-8.84
167.74	V	Peak	46.96	-14.63	32.33	43.50	-11.17
499.48	V	Peak	42.87	-9.30	33.57	46.00	-12.43
533.43	V	Peak	42.80	-8.75	34.05	46.00	-11.95
640.13	V	Peak	39.37	-6.73	32.64	46.00	-13.36
701.24	V	Peak	37.75	-5.36	32.39	46.00	-13.61
62.98	H	Peak	48.40	-14.95	33.45	40.00	-6.55
167.74	H	Peak	47.04	-14.63	32.41	43.50	-11.09
300.63	H	Peak	46.42	-13.37	33.05	46.00	-12.95
499.48	H	Peak	43.31	-9.30	34.01	46.00	-11.99
567.38	H	Peak	42.45	-8.18	34.27	46.00	-11.73
641.10	H	Peak	41.76	-6.70	35.06	46.00	-10.94

**Remark :**

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	TX CH Low	Test Date	Mar. 02, 2005
Fundamental Frequency	2402 MHz	Test By	Sky
Temperature	25	Pol	Ver.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV		
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1598.0	--	46.41	-6.81	--	39.60	74.00	54.00	-14.40
2390.0	----							
4804.0	----							
7206.0	----							
9608.0	----							
12010.0	----							
14412.0	----							
16814.0	----							
19216.0	----							
21618.0	----							
24020.0	----							

**Remark :**

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	TX CH Low	Test Date	Mar. 02, 2005
Fundamental Frequency	2402 MHz	Test By	Sky
Temperature	25	Pol	Hor
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin (dB)	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)		
1598.0	--	48.42	-6.81	--	41.61	74.00	54.00	-12.39
2605.5	--	45.60	-2.76	--	42.84	74.00	54.00	-11.16
2390.0	----							
4804.0	----							
7206.0	----							
9608.0	----							
12010.0	----							
14412.0	----							
16814.0	----							
19216.0	----							
21618.0	----							
24020.0	----							

**Remark :**

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	TX CH Mid	Test Date	Mar. 02, 2005
Fundamental Frequency	2441 MHz	Test By	Sky
Temperature	25	Pol	Ver
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	AV	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)
--	--	--	--	--	--	--	--	--
4882.0	---							
7323.0	---							
9764.0	---							
12205.0	---							
14646.0	---							
17087.0	---							
19528.0	---							
21969.0	---							
24410.0	---							

**Remark :**

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	TX CH Mid	Test Date	Mar. 02, 2005
Fundamental Frequency	2441 MHz	Test By	Sky
Temperature	25	Pol	Hor
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin (dB)
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	
1598.0	--	47.81	-6.81	--	41.00	74.00	54.00 -13.00
4882.0	----						
7323.0	----						
9764.0	----						
12205.0	----						
14646.0	----						
17087.0	----						
19528.0	----						
21969.0	----						
24410.0	----						

**Remark :**

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	TX CH High	Test Date	Mar. 02, 2005
Fundamental Frequency	2480 MHz	Test By	Sky
Temperature	25	Pol	Ver
Humidity	65 %		

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	
--	--	--	--	--	--	--	--	--
2483.5	----							
4960.0	----							
7440.0	----							
9920.0	----							
12400.0	----							
14880.0	----							
17360.0	----							
19840.0	----							
22320.0	----							
24800.0	----							

**Remark :**

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	TX CH High	Test Date	Mar. 02, 2005
Fundamental Frequency	2480 MHz	Test By	Sky
Temperature	25	Pol	Hor
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	AV	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2598.0	--	47.39	-6.81	--	40.58	74.00	54.00	-13.42
2483.5	----							
4958.5	--	40.04	3.40	--	43.44	74.00	54.00	-10.56
4960.0	----							
7440.0	----							
9920.0	----							
12400.0	----							
14880.0	----							
17360.0	----							
19840.0	----							
22320.0	----							
24800.0	----							

**Remark :**

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 8. ANTENNA REQUIREMENT

### 8.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 8.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 9. RF EXPOSURE

### 9.1. Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Portable device.

### 9.2. Measurement Result:

This is a portable device and the Max peak output power is 4.61dBm (0.00289W) lower than low threshold 60/fGHz mW (24.48mW), d<2.5cm in general population category ;

The SAR measurement is not necessary.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.