



FCC TEST REPORT

for

47 CFR Part 24E and IC RSS-133 Issue 3

Equipment : PDA Phone
Trade Name : Fujitsu Siemens Computers GmbH
Model No. : Pocket LOOX T830 / Pocket LOOX T810
FCC ID : QQXUPX001
IC ID : 4626A-UPX001
Tx Frequency Range : PCS 1900: 1850.2~1909.8MHz
Max. EIRP Power : PCS 1900: 0.61W
Emission Designator : 300 KGXW
Applicant : **COMPAL COMMUNICATIONS, INC.**
7F, No. 319, Sec. 4, Pa-Te Rd., Taipei, Taiwan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsed by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Apr. 30, 2006 at **Sporton International Inc. LAB.**
- Report No.: FG650602-A, Report Version: Rev. 01

Dr. Daniel Lee
EMC/SAR Director

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Report Version: Rev. 01



Table of Contents

History of this test report.....	ii
1. General Information	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test	1
1.2 Feature of Equipment under Test	2
1.3 Report Date	2
2 Test Configuration of Equipment under Test	3
2.1 Test Manner	3
2.2 Test Mode	3
2.3 Connection Diagram of Test System	3
2.4 Ancillary Equipment List	4
3. General Information of Test Site	5
3.1 Test Voltage	5
3.2 Test in Compliance with	5
3.3 Frequency Range Investigated	5
3.4 Test Distance	5
4. Test Data and Test Result.....	6
4.1 List of Measurements and Examinations	6
4.2 RF Output Power	7
4.3 ERP / EIRP Measurement	8
4.4 Occupied Bandwidth and Band Edge Measurement	10
4.5 Conducted Emission	15
4.6 Field Strength of Spurious Radiation	21
4.7 Frequency Stability (Temperature Variation)	64
4.8 Frequency Stability (Voltage Variation)	65
5 List of Measurement Equipments	66
6 Uncertainty Evaluation.....	67
Appendix A. Photographs of EUT External	
Appendix B. Photographs of EUT Internal	
Appendix C. Photographs of Setup	



History of this test report

Report Issue Date: May 18, 2006

Report No.	Description



1. General Information

1.1. Applicant

COMPAL COMMUNICATIONS, INC.

7F, No. 319, Sec. 4, Pa-Te Rd., Taipei, Taiwan

1.2. Manufacturer

COMPAL COMMUNICATIONS, INC.

7F, No. 319, Sec. 4, Pa-Te Rd., Taipei, Taiwan

1.3. Basic Description of Equipment under Test

Equipment	: PDA Phone
Trade Name	: Fujitsu Siemens Computers GmbH
Model No.	: Pocket LOOX T830 / Pocket LOOX T810
Power Supply Type	: Switching
AC Power Cord	: AC 120V, Non-shielded, Wall-mount, 1.8 meter, 2 pin
Desk Docking (Cradle)	: Power Mobile, PLT800CS
Main Battery	: Welldone, PLT800MB
Sync Cable USB client	: D-net, USB Client interface 1.2m, shielding
Sync Cable USB host	: D-net, USB Host interface 0.22m, shielding
Adapter 1	: PHIHONG, PSC05R-050CP PH
Adapter 2	: SUNFONE, ACE005A-05
Stereo Headset	: OBOPro.2, OBO-PT-HB01D

**1.2 Feature of Equipment under Test**

DUT Type :	PDA Phone
Trade Name :	Fujitsu Siemens Computers GmbH
Model Name :	Pocket LOOX T830 / Pocket LOOX T810
FCC ID :	QQXUPX001
IC ID :	4626A-UPX001
Tx Frequency :	PCS : 1850.2-1909.8 MHz. WLAN/BT : 2400 MHz ~ 2483.5 MHz
Rx Frequency :	PCS : 1930.2-1989.8 MHz WLAN/BT : 2400 MHz ~ 2483.5 MHz
Antenna Type :	PIFA
Maximum Output Power to Antenna :	PCS : 29.51 dBm 802.11b : 17.84 dBm / 802.11g : 16.77 dBm BT : 1.85 dBm
Maximum EIRP :	0.61 W (27.87 dBm)
Power Rating (DC/AC Voltage) :	PCS : 4.2V / 2A WLAN : 3.3V / 450mA BT : 3.3V / 200mA
Digital Modulation Emission :	PCS : GMSK WLAN : DSSS / OFDM BT : GFSK
Type of Emission :	300 KGXW
DUT Stage :	Identical Prototype

1.3 Report Date

EUT Received : Apr. 27, 2006

Report Date : May 18, 2006

2 Test Configuration of Equipment under Test

2.1 Test Manner

- The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
- During all testings, EUT is in link mode with base station emulator at maximum power level. (PCL=0 for PCS 1900)
- Frequency range investigated: radiated emission 30MHz to 18000 MHz for PCS 1900.


2.2 Test Mode

Application	PCS 1900
Radiated Emission	☒ Mode 1: PCS 1900 Link Mode + Earphone + Cradle + Adapter 1
	☒ Mode 2: PCS 1900 Link Mode + BT Link + Earphone + Cradle + Adapter 1
	☒ Mode 3: PCS 1900 Link Mode + Earphone + Cradle + Adapter 2
	☒ Mode 4: PCS 1900 Link Mode + BT Link + Earphone + Cradle + Adapter 2
Conducted Measurement	☒ Mode 1: PCS 1900 Link Mode_CH 661


Remark: Software ensures that GSM and WLAN can not transmit simultaneously.

2.3 Connection Diagram of Test System

<Mode 1, 3>

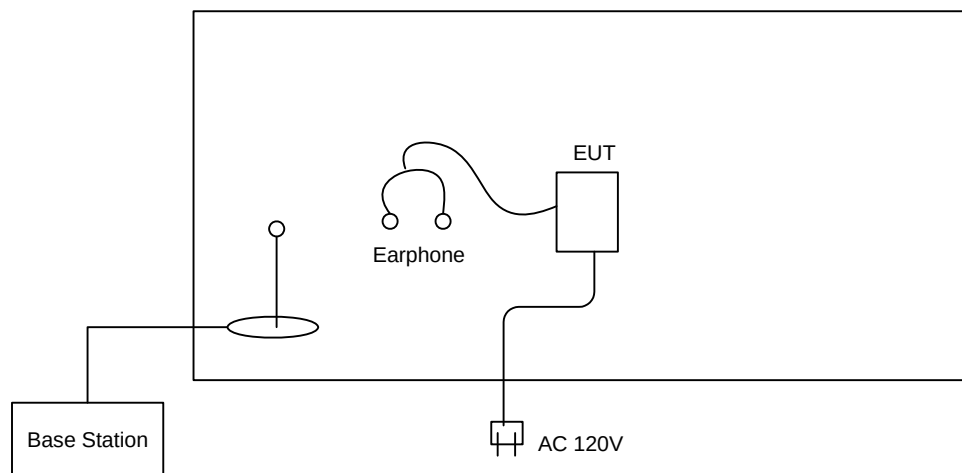

<Mode 2, 4>

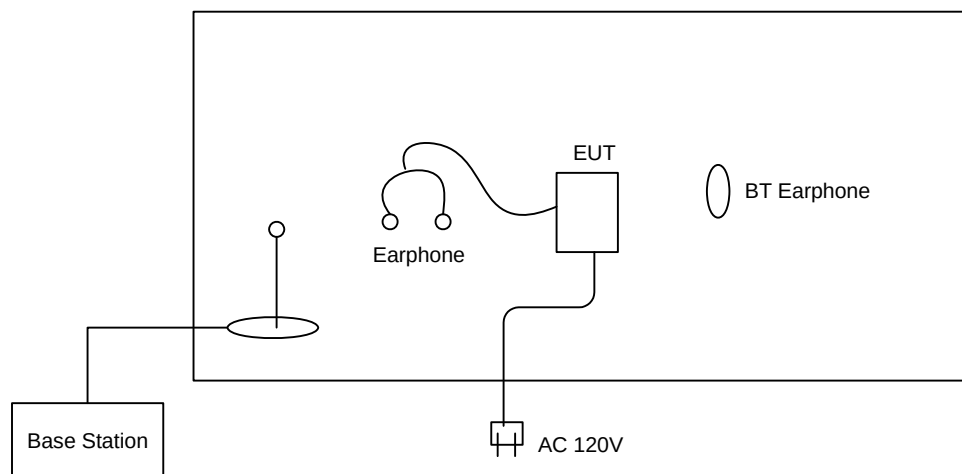

2.4 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	Power Cord
1.	Base Station	R & S	CMU200	AC 100-240V
2.	Earphone	N/A	2C.43037.111	N/A
3.	BT Earphone	Free Style	JD-100	N/A



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : 03CH06-HY

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC. The Industry Canada file number for this site is IC 4088.

3.1 Test Voltage

120V / 60Hz

3.2 Test in Compliance with

47 CFR Part 24E and IC RSS-133 Issued 3

3.3 Frequency Range Investigated

a. Radiation: from 30 MHz to 19000 MHz for PCS 1900.

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



4. Test Data and Test Result

4.1 List of Measurements and Examinations

FCC Rule	IC Rule	DESCRIPTION OF TEST	Result	Section
§2.1046	RSS-128 § 7.1 RSS-133 § 6.2	RF Output Power	Passed	4.2
§24.232	RSS-128 § 7.1 RSS-133 § 6.2	ERP / EIRP	Passed	4.3
§2.1049, § 24.238(b)	RSS-128 § 7.4 RSS-133 § 6.3	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	RSS-128 § 7.4 RSS-133 § 6.3	Conducted Emission	Passed	4.5
§2.1053	RSS-128 § 7.4 RSS-133 § 6.3	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, §24.235	RSS-128 § 9 RSS-133 § 7	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §24.235	RSS-128 § 9 RSS-133 § 7	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments :

As described in chapter 5 of this test report.

4.2.2 Test Procedure :

1. The transmitter output was connected to power meter and base station through power divider.
2. Set EUT at PCL=0 for PCS 1900 through base station.
3. Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout :

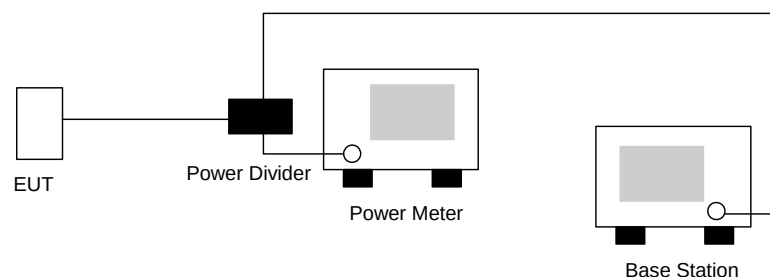

4.2.4 Test Result :

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
PCS 1900	512	1850.2 (Low)	29.38	0.867
	661	1880.0 (Mid)	29.41	0.873
	810	1909.8 (High)	29.51	0.893



4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-A.

4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

1. The EUT was placed on a rotatable table with 1.0 meter height in an fully anechoic chamber.
2. The EUT was set 1.2 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is also kept at 1.0M height.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s + R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in Spectrum Analyzer for EUT

R_s : The highest received signal in Spectrum Analyzer for substitution antenna.

4.3.3 Test Setup Layout of ERP/EIRP

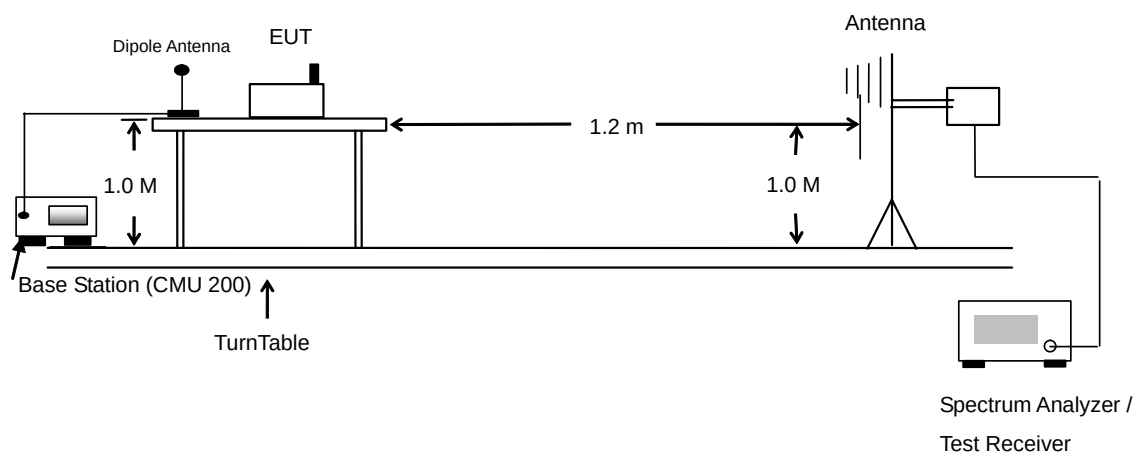

4.3.4 Test Result

PCS1900 Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.2	-37.36	-51.88	0	1.96	16.48	0.04
1880.0	-34.29	-52.99	0	2.00	20.70	0.12
1909.8	-34.89	-54.28	0	1.98	21.37	0.14
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.2	-26.22	-52.13	0	1.96	27.87	0.61
1880.0	-29.19	-53.17	0	2.00	25.98	0.40
1909.8	-29.90	-54.13	0	1.98	26.21	0.42

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
3. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.


4.4.3 Test Setup Layout

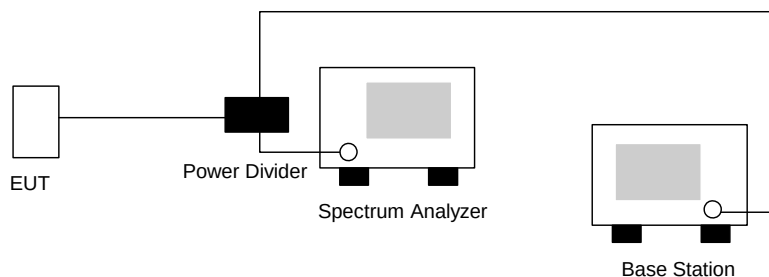



4.4.4 Test Result

- Test Mode : PCS 1900 CH512 Lower Band Edge
- Power State : High

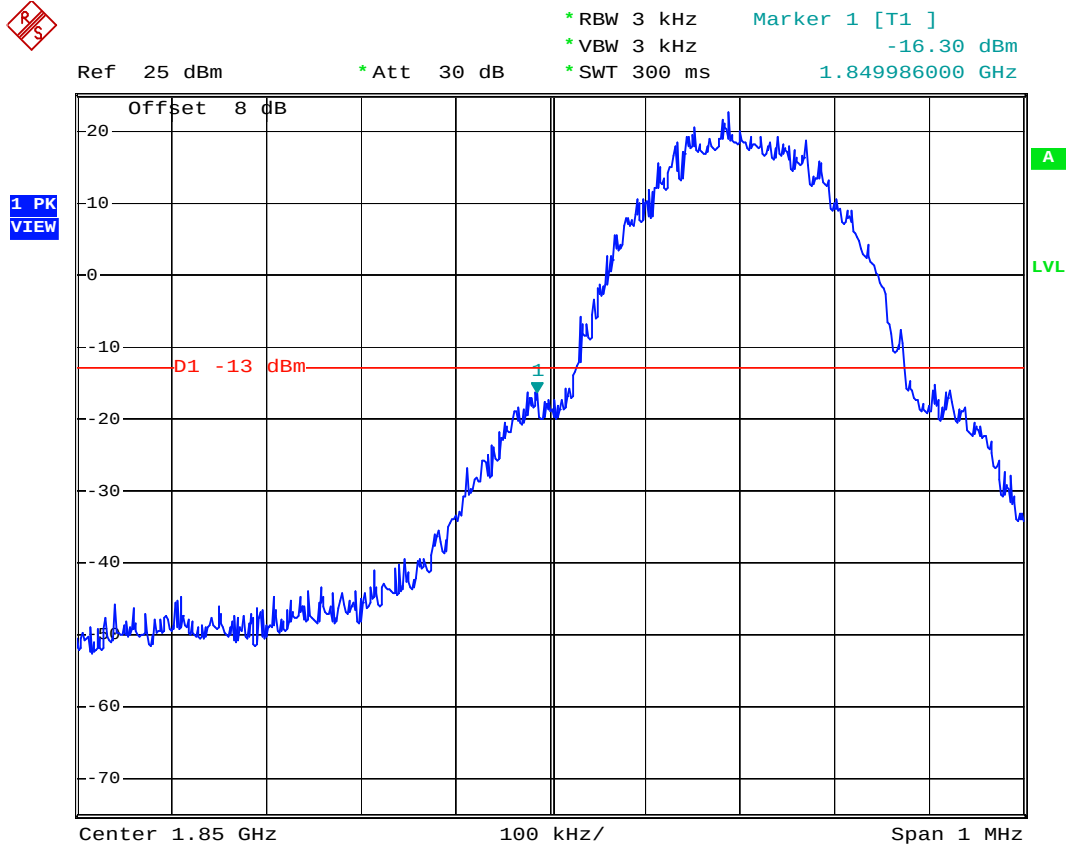


Date: 27.APR.2006 21:26:38



FCC/IC TEST REPORT

Report No. : FG650602-A


- Test Mode : PCS 1900 CH661 99% Occupied Bandwidth
- Power State : Low

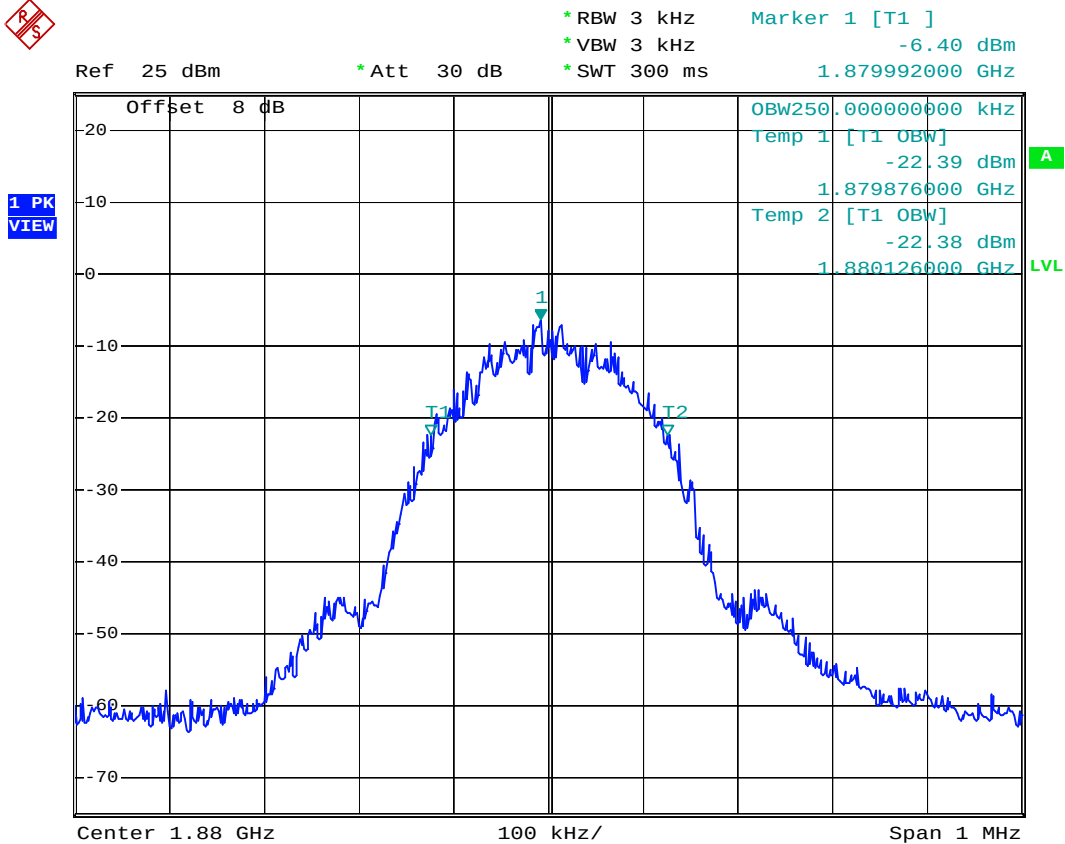

Date: 27.APR.2006 21:19:23



- Test Mode : PCS 1900 CH661 99% Occupied Bandwidth
- Power State : High

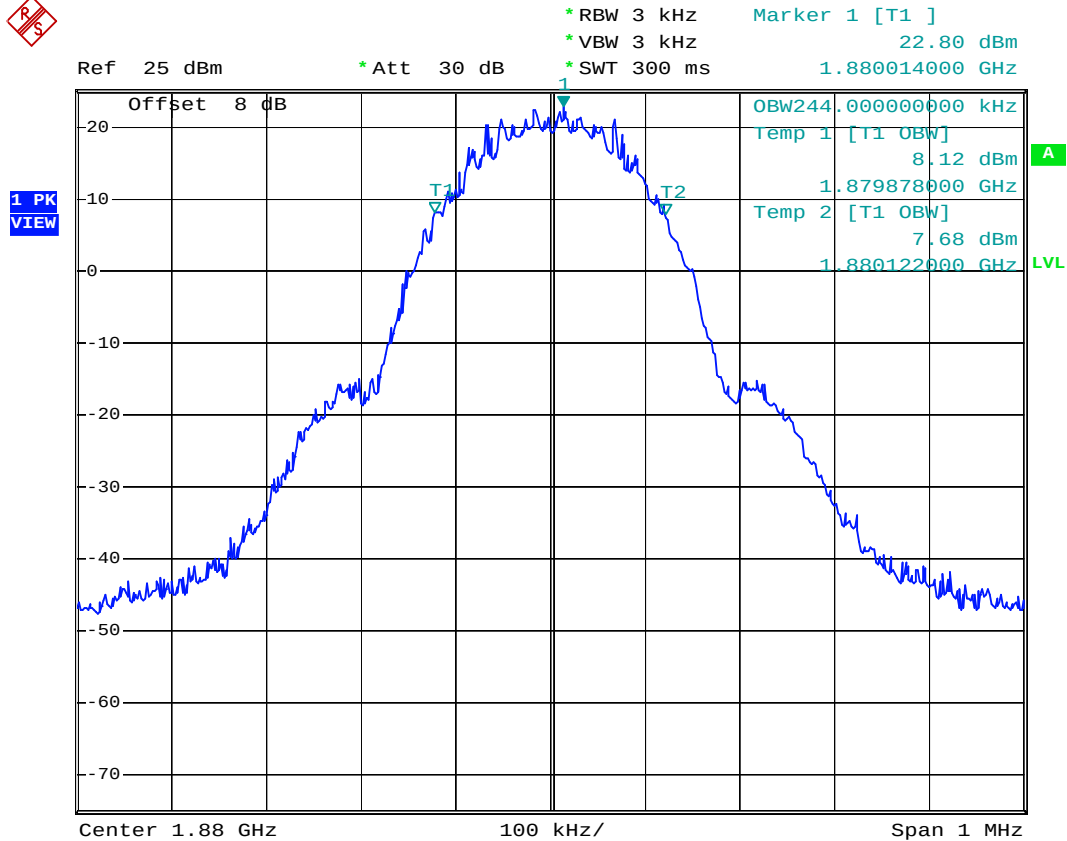


Date: 27.APR.2006 21:18:15



- Test Mode : PCS 1900 CH810 Higher Band Edge
- Power State : High



Ref 25 dBm * Att 30 dB * RBW 3 kHz Marker 1 [T1]
* VBW 3 kHz -15.39 dBm
* SWT 300 ms 1.910024000 GHz

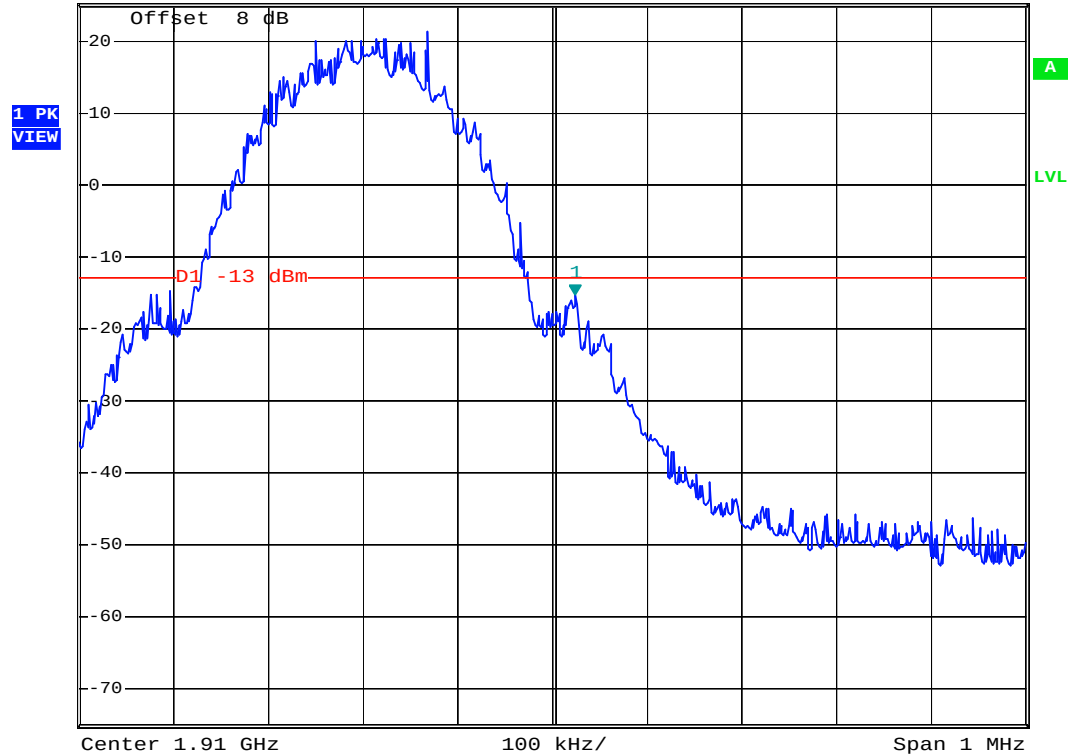

Date: 27.APR.2006 21:25:28

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

4.5.3 Test Setup Layout

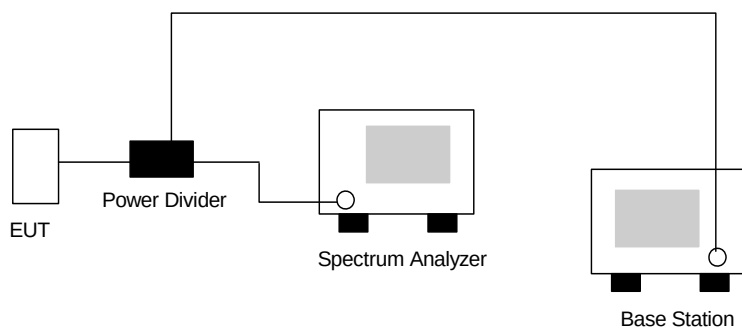

**4.5.4 Test Result**


- Test Mode : PCS 1900 CH661
- Frequency Range : 0.3G-1G

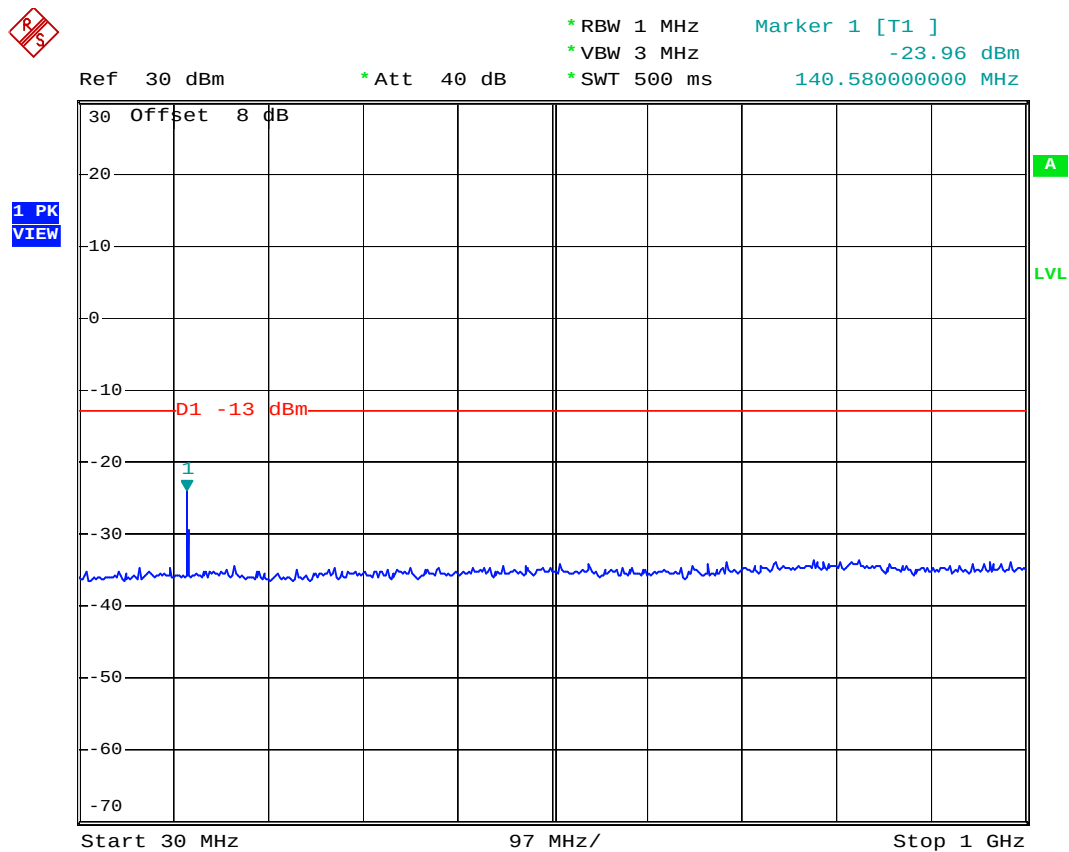

Date: 27.APR.2006 12:36:38




- Test Mode : PCS 1900 CH661
- Frequency Range : 1G-3G

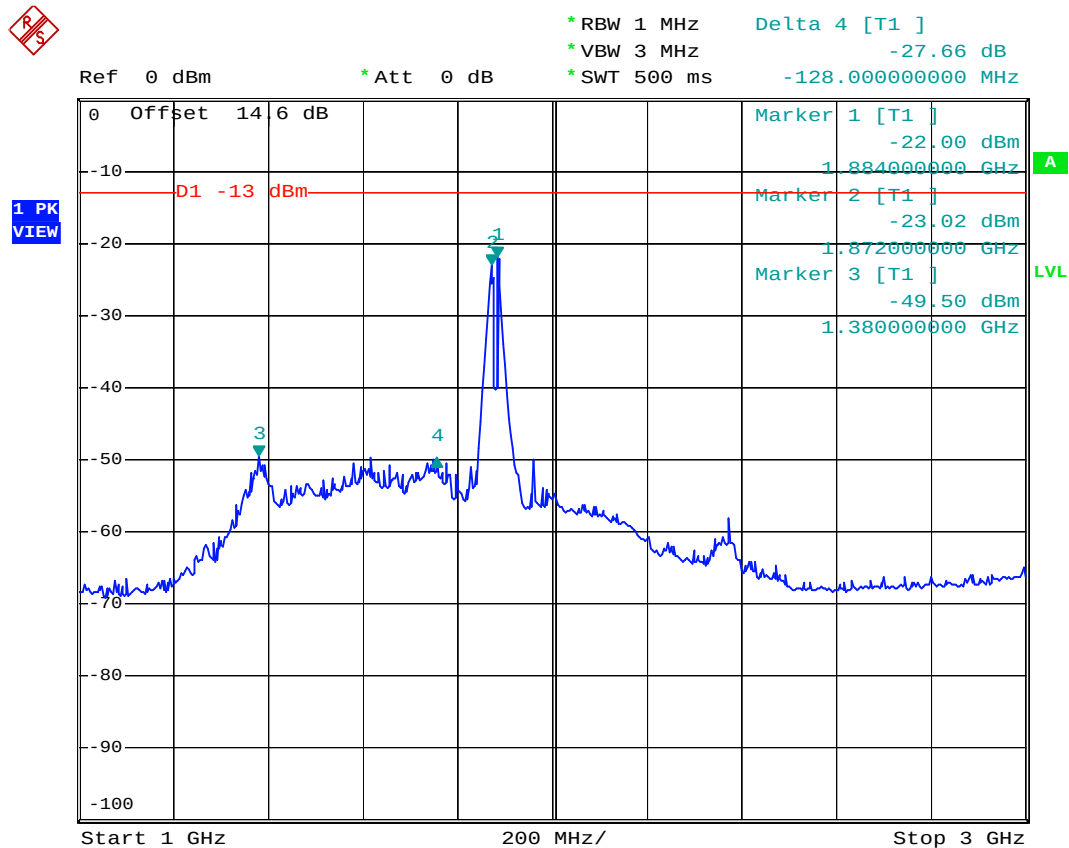

Date: 27.APR.2006 12:29:41




- Test Mode : PCS 1900 CH661
- Frequency Range : 3G-7G

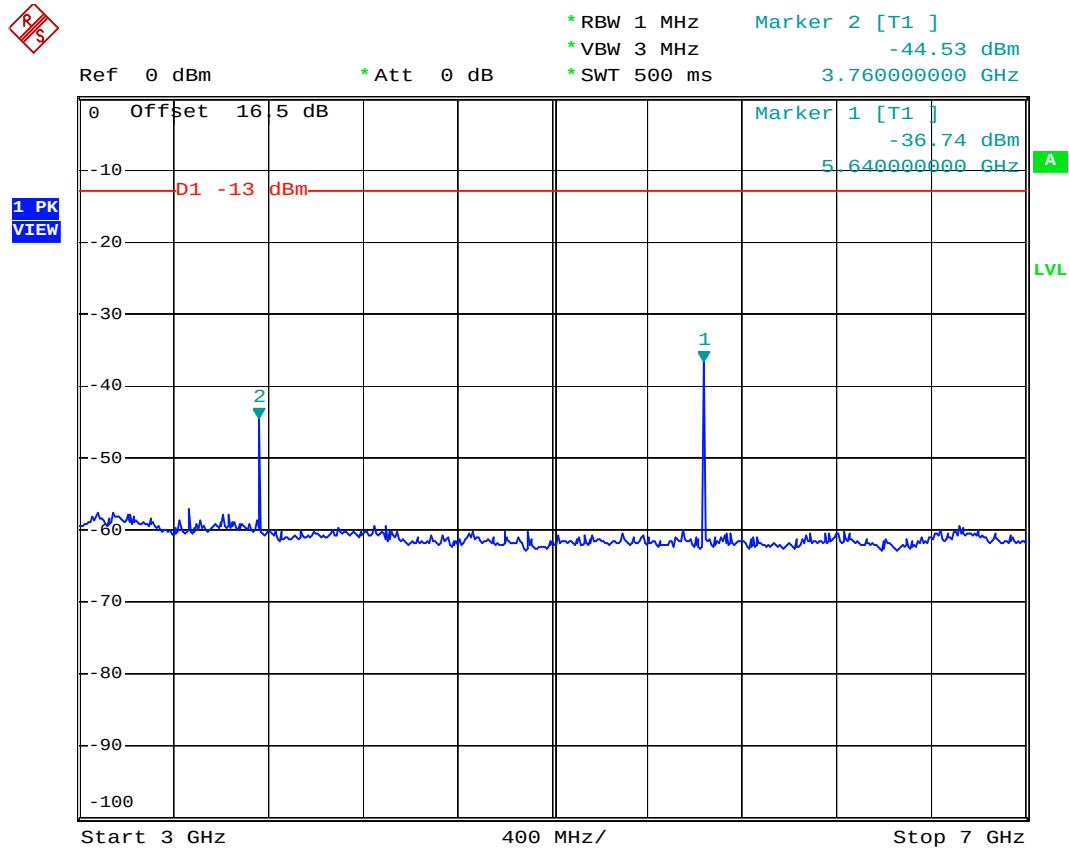

Date: 27.APR.2006 12:24:41



- Test Mode : PCS 1900 CH661
- Frequency Range : 7G-13.6G

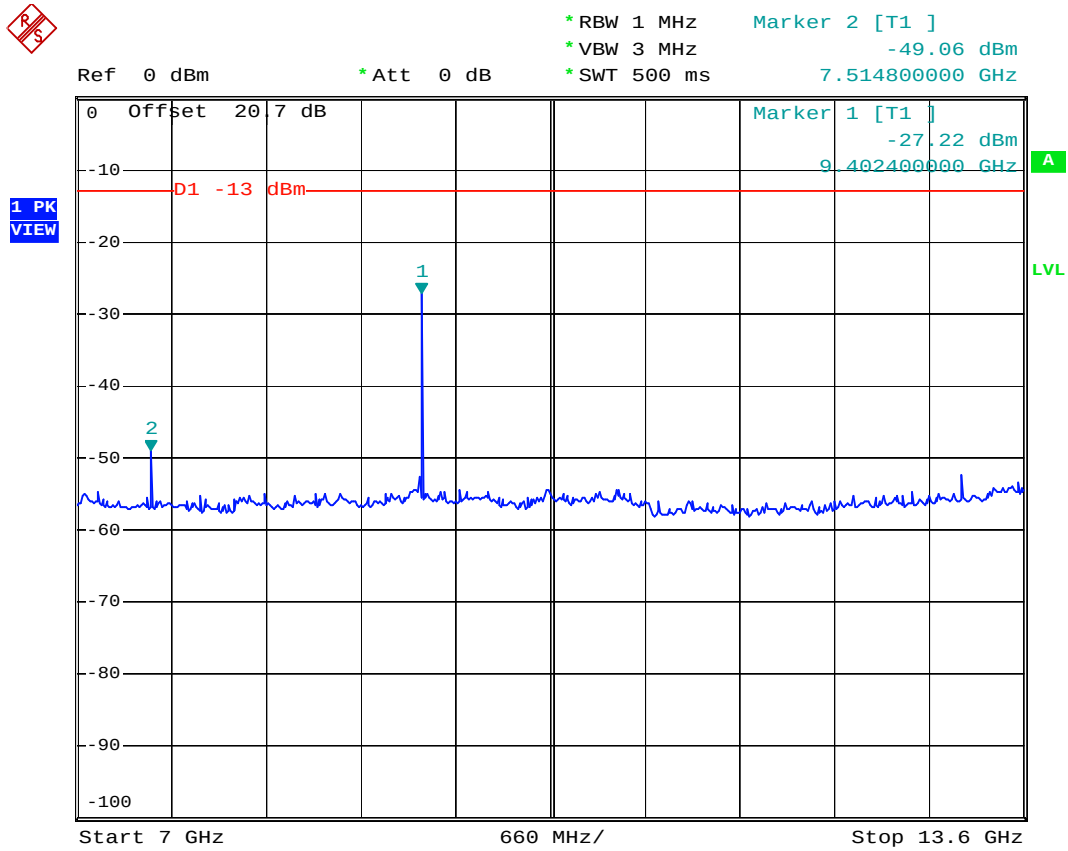


Date: 27.APR.2006 12:22:54



FCC/IC TEST REPORT

Report No. : FG650602-A

- Test Mode : PCS 1900 CH661
- Frequency Range : 13.6G-19.1G

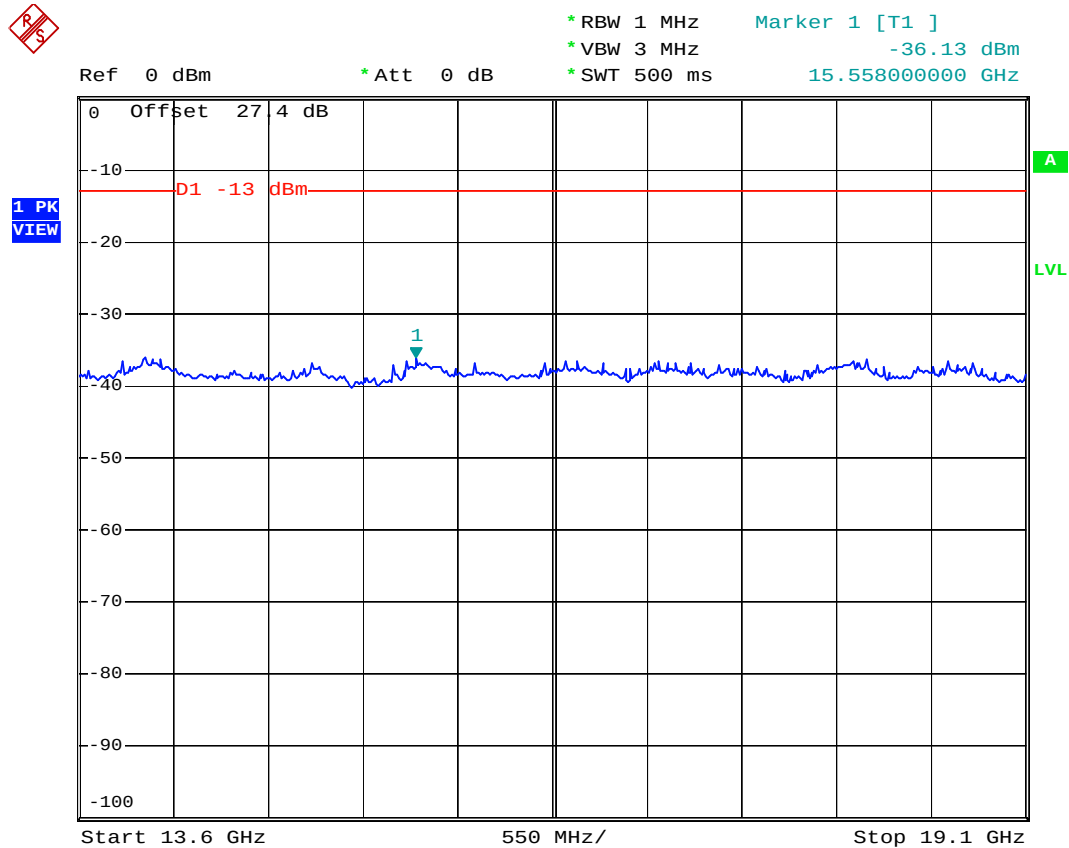

Date: 27.APR.2006 12:21:38

4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-A.


4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Emission level (dBm) = output power + substitution Gain.

4.6.3 Test Setup Layout

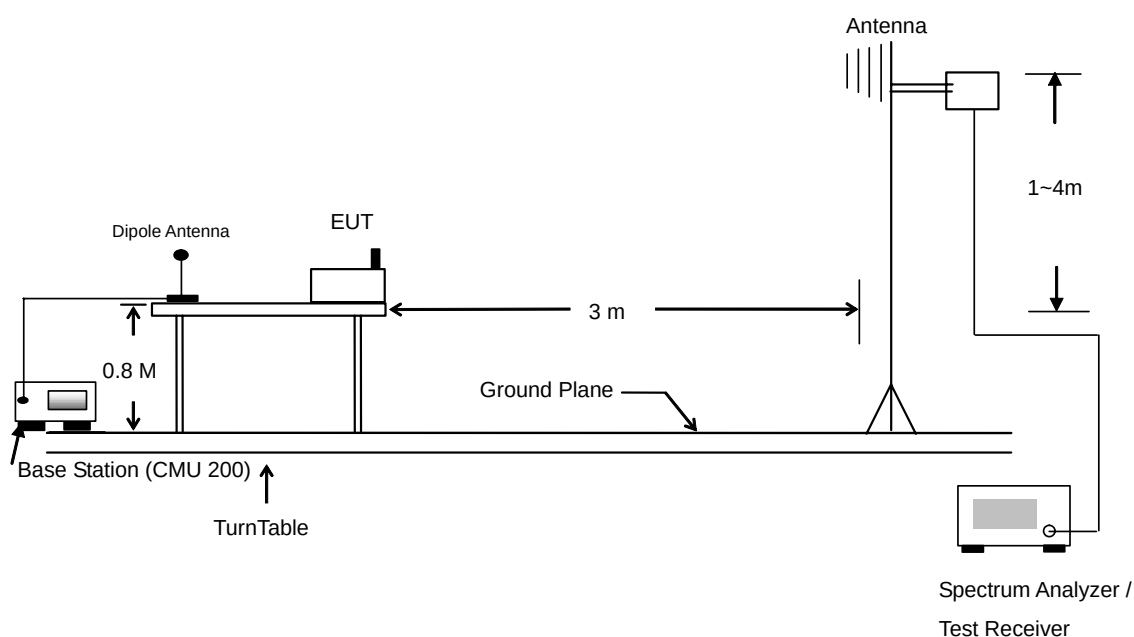

4.6.4 Test Result

- Test Mode : Mode 1

PCS1900 Radiated Spurious EIRP for Adapter 1							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
30.54	-58.54	-13.00	-45.54	92.64	-53.79	-13.00	-40.79
90.48	-59.89	-13.00	-46.89	195.24	-50.76	-13.00	-37.76
137.19	-62.09	-13.00	-49.09	299.73	-59.36	-13.00	-46.36
304.90	-62.91	-13.00	-49.91	304.90	-60.01	-13.00	-47.01
329.40	-64.49	-13.00	-51.49	472.90	-63.66	-13.00	-50.66
978.30	-63.58	-13.00	-50.58	1000.00	-60.93	-13.00	-47.93
3758.00	-47.38	-13.00	-34.38	3758.00	-50.59	-13.00	-37.59
5638.00	-39.47	-13.00	-26.47	5638.00	-43.74	-13.00	-30.74
9398.00	-36.08	-13.00	-23.08	9398.00	-41.23	-13.00	-28.23

- Test Mode : Mode 2

PCS1900 with Bluetooth Co-location Radiated Spurious EIRP for Adapter 1							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
31.08	-58.87	-13.00	-45.87	49.44	-55.55	-13.00	-42.55
91.29	-60.25	-13.00	-47.25	71.04	-57.20	-13.00	-44.20
130.98	-61.36	-13.00	-48.36	90.48	-56.34	-13.00	-43.34
304.90	-66.11	-13.00	-53.11	315.40	-64.03	-13.00	-51.03
392.40	-63.52	-13.00	-50.52	416.90	-64.80	-13.00	-51.80
995.80	-63.39	-13.00	-50.39	967.80	-61.27	-13.00	-48.27
3758.00	-45.79	-13.00	-32.79	3758.00	-48.24	-13.00	-35.24
5638.00	-35.82	-13.00	-22.82	5638.00	-37.55	-13.00	-24.55
9398.00	-41.00	-13.00	-28.00	9398.00	-36.26	-13.00	-23.26



▪ Test Mode : Mode 3

PCS1900 Radiated Spurious EIRP for Adapter 2							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
31.08	-58.72	-13.00	-45.72	40.53	-54.20	-13.00	-41.20
122.34	-63.36	-13.00	-50.36	49.44	-57.86	-13.00	-44.86
170.13	-69.97	-13.00	-56.97	74.28	-58.82	-13.00	-45.82
392.40	-65.27	-13.00	-52.27	404.30	-58.37	-13.00	-45.37
864.90	-64.56	-13.00	-51.56	467.30	-62.89	-13.00	-49.89
943.30	-63.89	-13.00	-50.89	889.40	-61.86	-13.00	-48.86
3758.00	-48.13	-13.00	-35.13	3758.00	-50.48	-13.00	-37.48
5638.00	-42.59	-13.00	-29.59	5638.00	-44.39	-13.00	-31.39
9398.00	-36.13	-13.00	-23.13	9398.00	-39.48	-13.00	-26.48

▪ Test Mode : Mode 4


PCS1900 with Bluetooth Co-location Radiated Spurious EIRP for Adapter 2							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
34.59	-56.63	-13.00	-43.63	34.59	-53.69	-13.00	-40.69
65.64	-61.94	-13.00	-48.94	72.39	-50.26	-13.00	-37.26
90.48	-61.99	-13.00	-48.99	91.29	-59.53	-13.00	-46.53
322.40	-65.57	-13.00	-52.57	300.00	-58.37	-13.00	-45.37
392.40	-63.78	-13.00	-50.78	495.30	-62.82	-13.00	-49.82
981.80	-63.90	-13.00	-50.90	789.30	-62.73	-13.00	-49.73
3758.00	-50.87	-13.00	-37.87	3758.00	-46.80	-13.00	-33.80
5638.00	-36.72	-13.00	-23.72	5638.00	-36.32	-13.00	-23.32
9398.00	-39.18	-13.00	-26.18				



4.6.5 Test Data


Mode 1

Horizontal Polarization

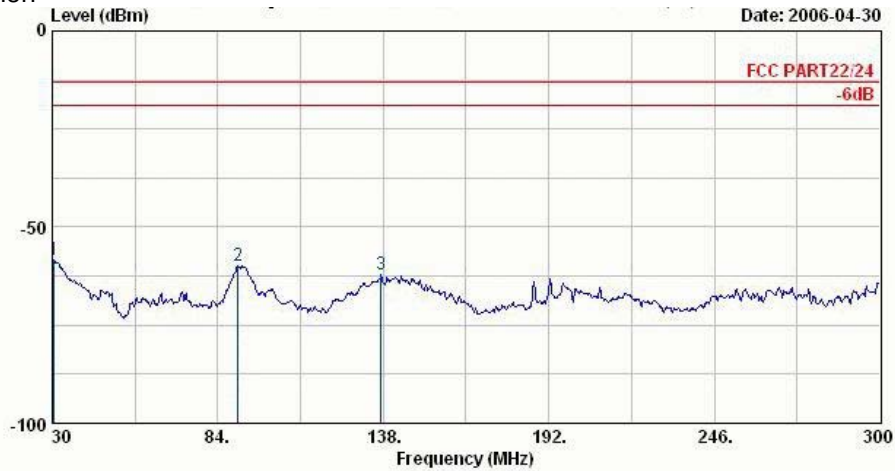


Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	30.54	-58.54	-45.54	-13.00	-58.29	Peak	-0.25
2 @	90.48	-59.89	-46.89	-13.00	-47.62	Peak	-12.28
3 @	137.19	-62.09	-49.09	-13.00	-49.41	Peak	-12.68

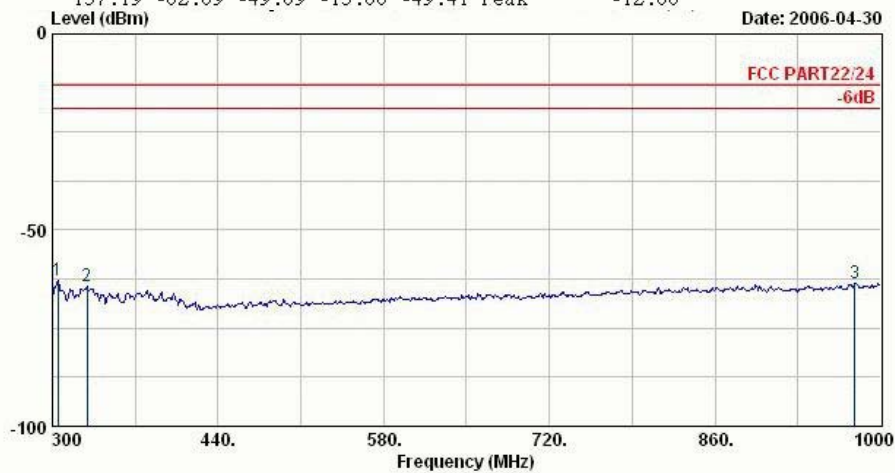

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	304.90	-62.91	-49.91	-13.00	-53.13	Peak	-9.78
2 @	329.40	-64.49	-51.49	-13.00	-55.59	Peak	-8.91
3 @	978.30	-63.58	-50.58	-13.00	-63.61	Peak	0.03

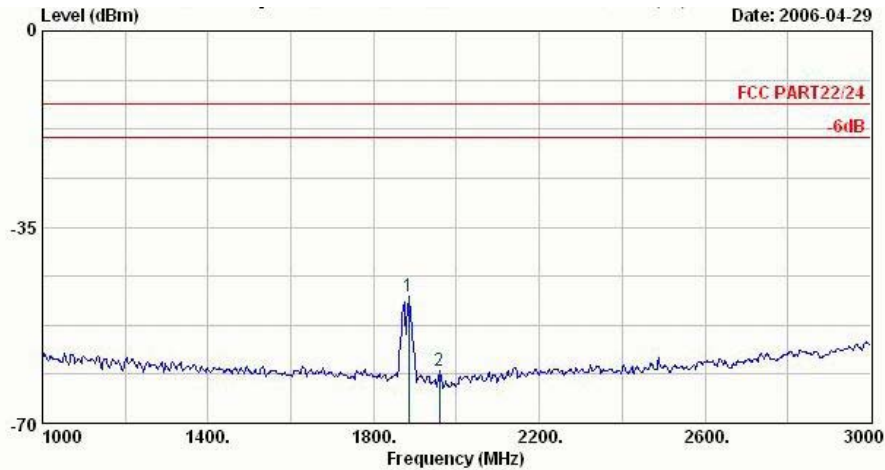


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	1884.00	-47.48			-46.81	Peak	-0.68
2 @	1958.00	-60.56			-59.45	Peak	-1.11


Remark:

- #1: MS TCH Signal
- #2: BS TCH Signal

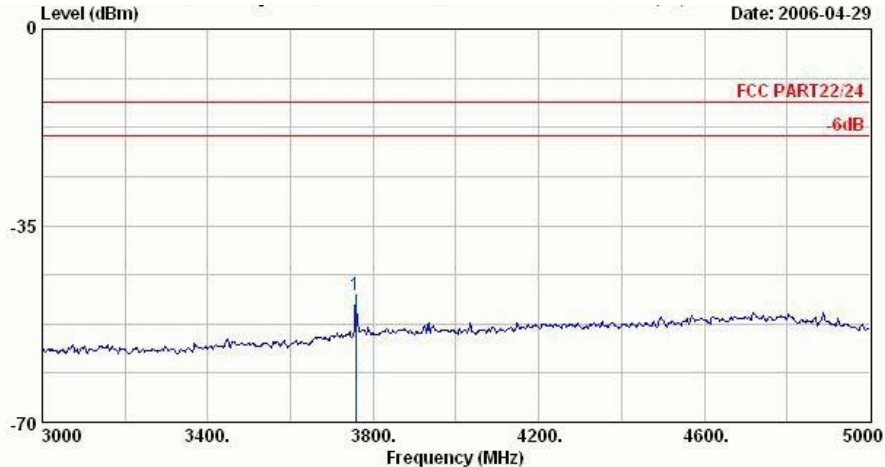


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	3758.00	-47.38	-34.38	-13.00	-55.30	Peak	7.92

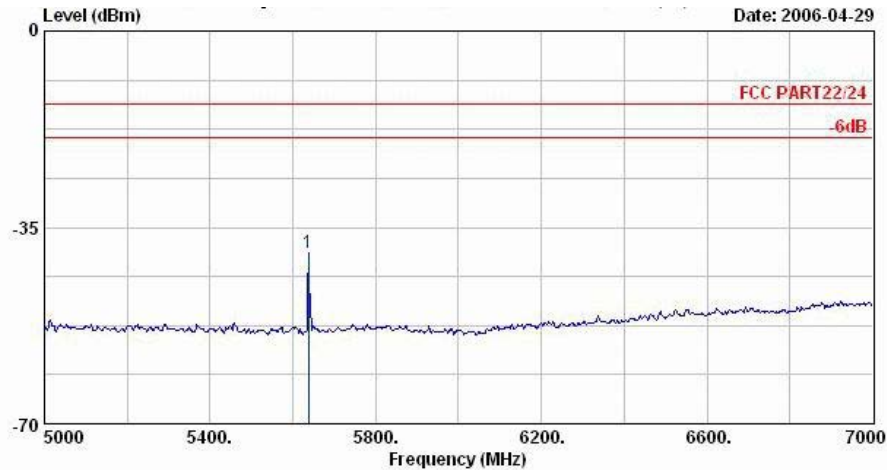


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	5638.00	-39.47	-26.47	-13.00	-49.44	Peak	9.97

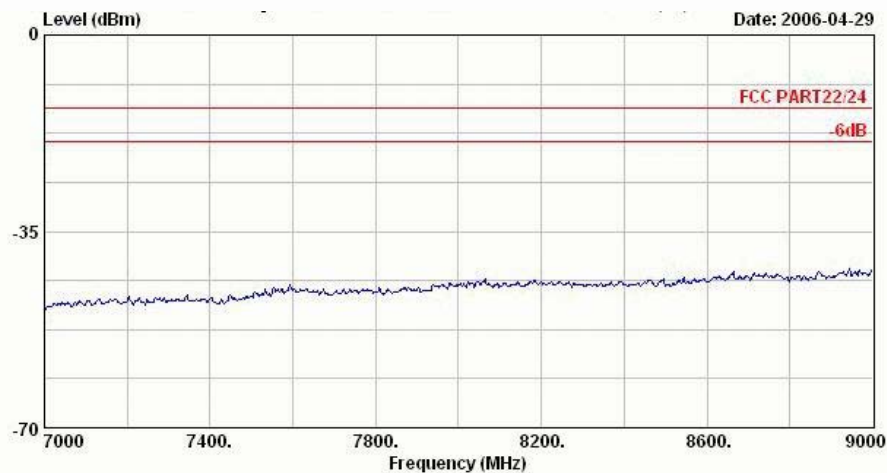


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

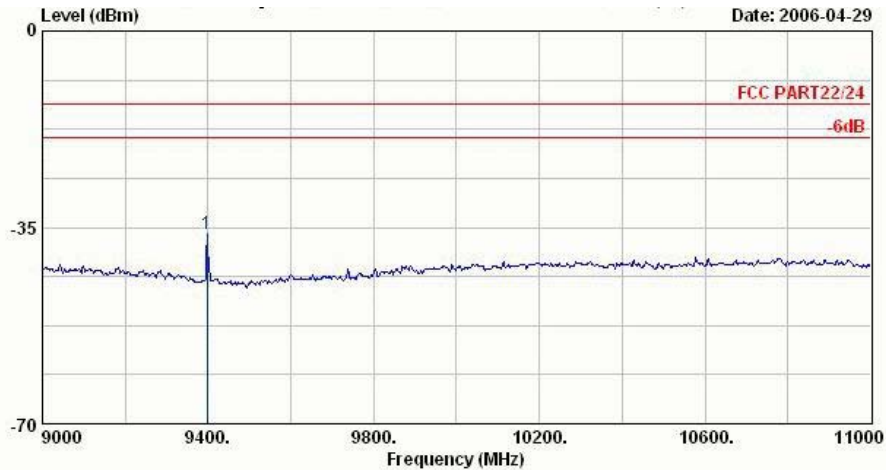


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	9398.00	-36.08	-23.08	-13.00	-54.31	Peak	18.22

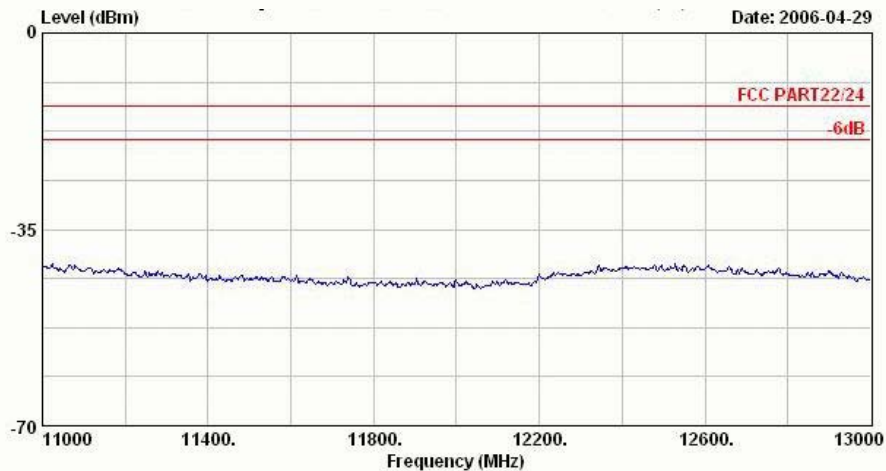

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

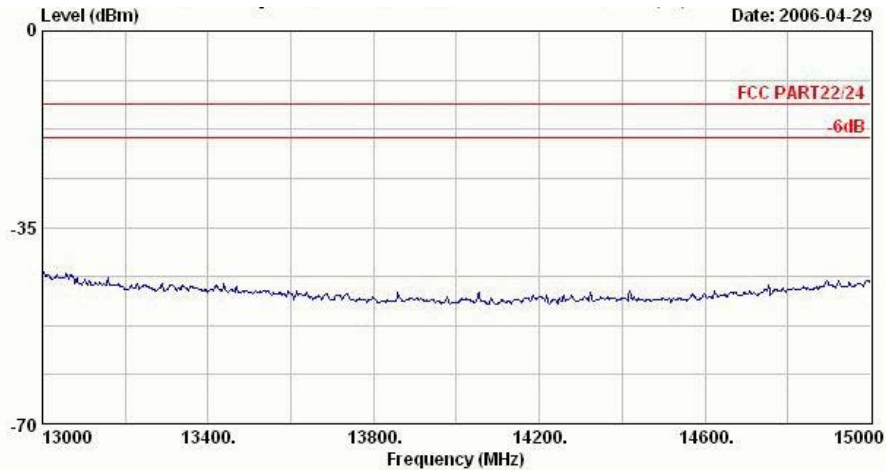


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

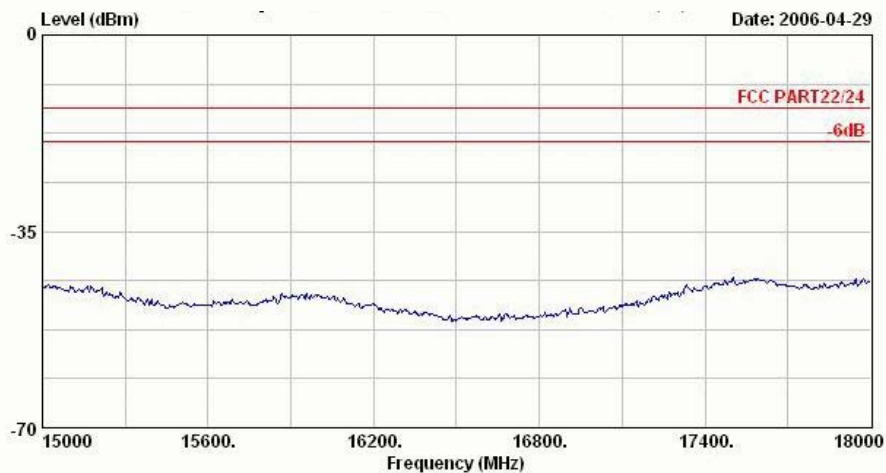

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H




Vertical Polarization

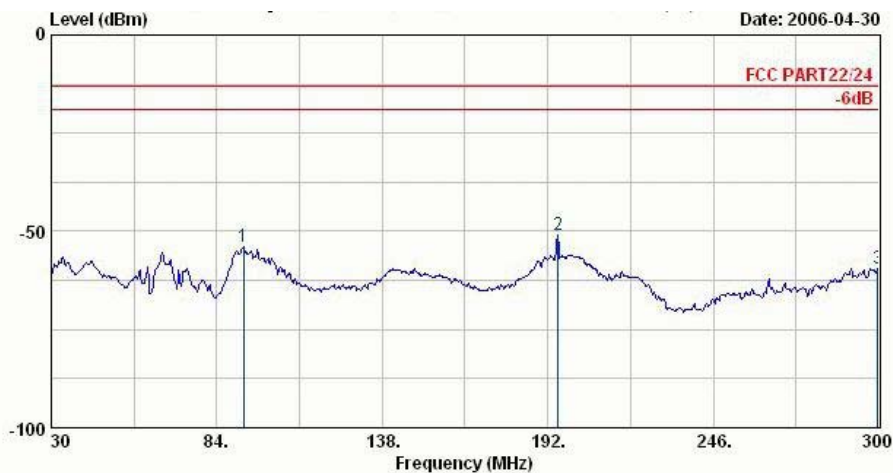


Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	92.64	-53.79	-40.79	-13.00	-45.12	Peak	-8.67
2 @	195.24	-50.76	-37.76	-13.00	-42.21	Peak	-8.55
3 @	299.73	-59.36	-46.36	-13.00	-52.90	Peak	-6.46

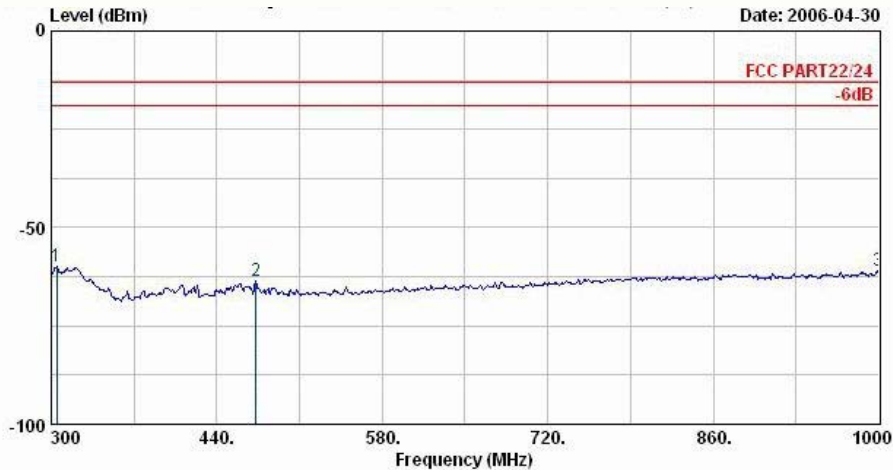

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	304.90	-60.01	-47.01	-13.00	-53.65	Peak	-6.36
2 @	472.90	-63.66	-50.66	-13.00	-60.21	Peak	-3.45
3 @	1000.00	-60.93	-47.93	-13.00	-63.59	Peak	2.66

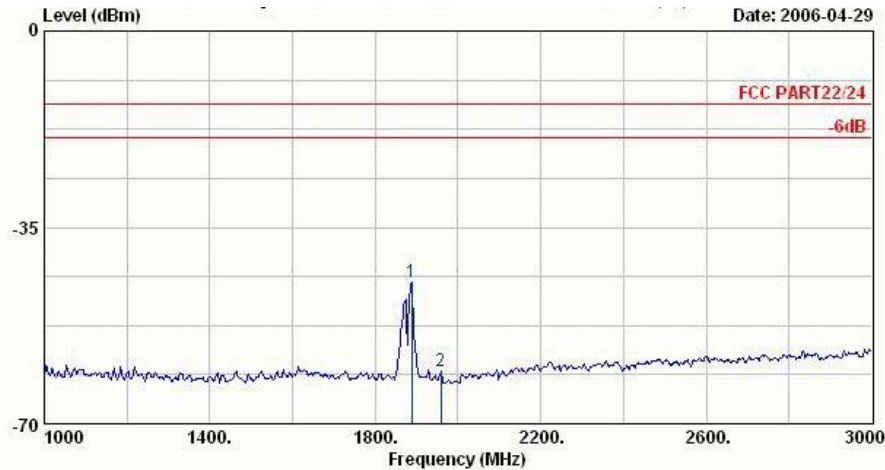


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	1888.00	-44.72	-31.72	-13.00	-44.22	Peak	-0.50
2 @	1958.00	-60.58	-47.58	-13.00	-59.99	Peak	-0.60

Remark:

1. #1: MS TCH Signal
2. #2: BS TCH Signal

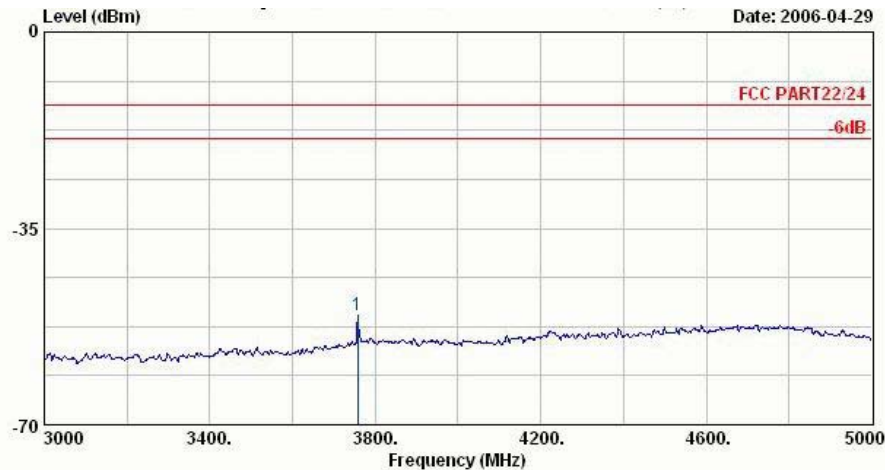


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	3758.00	-50.59	-37.59	-13.00	-57.23	Peak	6.64




FCC/IC TEST REPORT

Report No. : FG650602-A

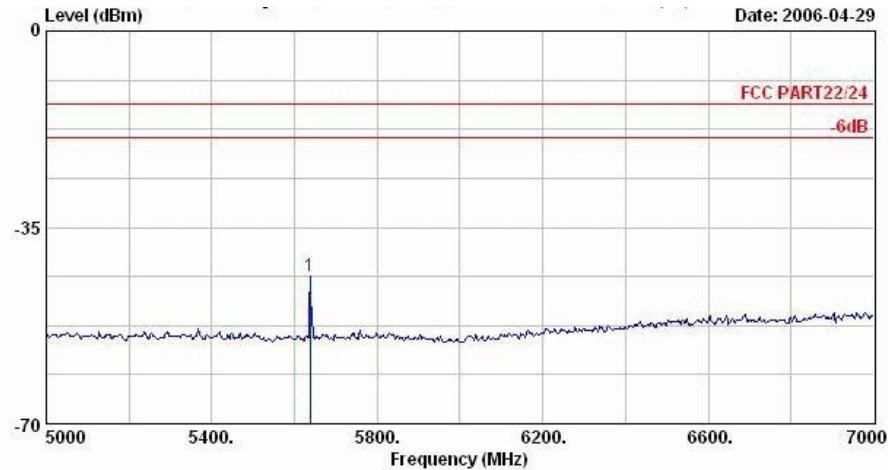


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	5638.00	-43.74	-30.74	-13.00	-52.40	Peak	8.65

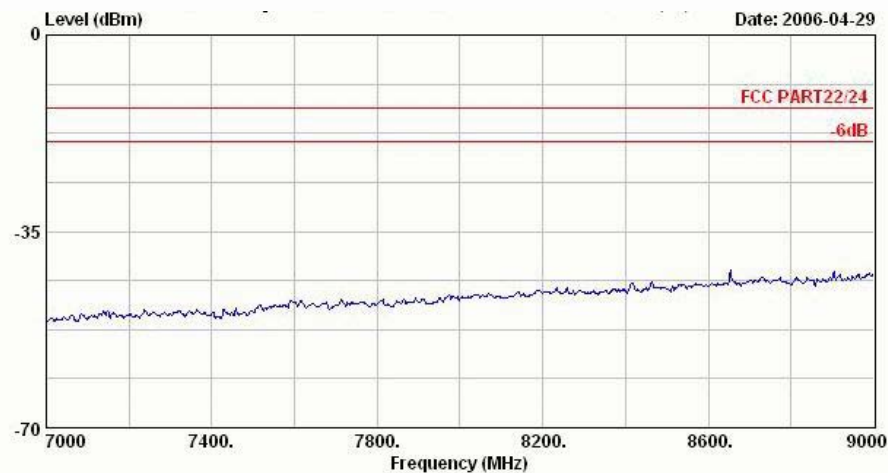


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

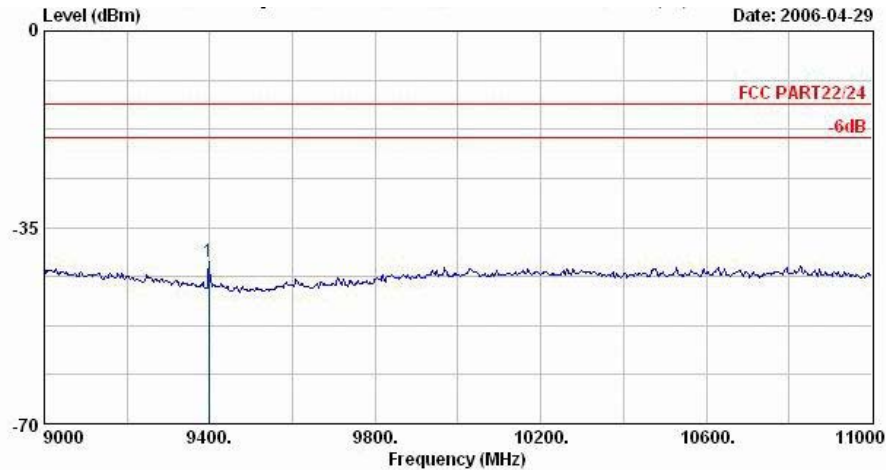

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	9398.00	-41.23	-28.23	-13.00	-58.43	Peak	17.20

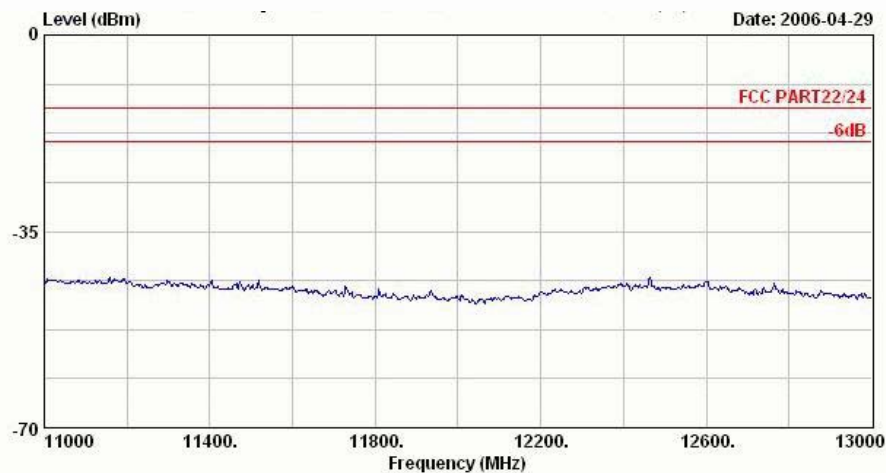


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

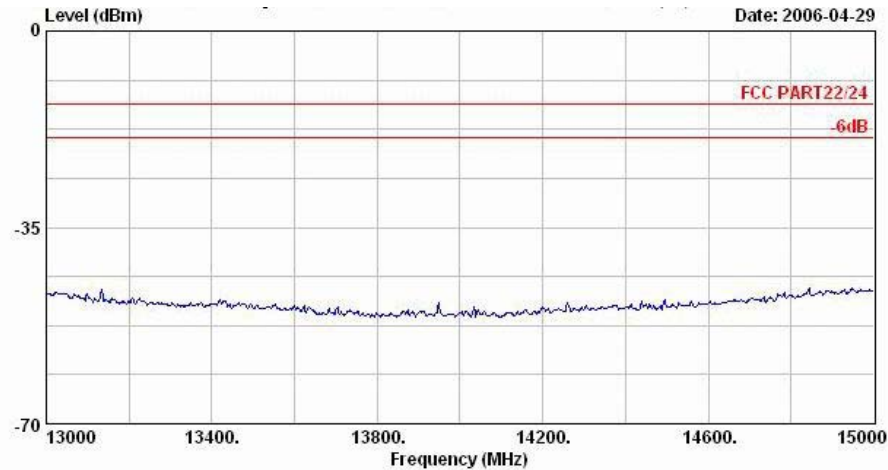


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H

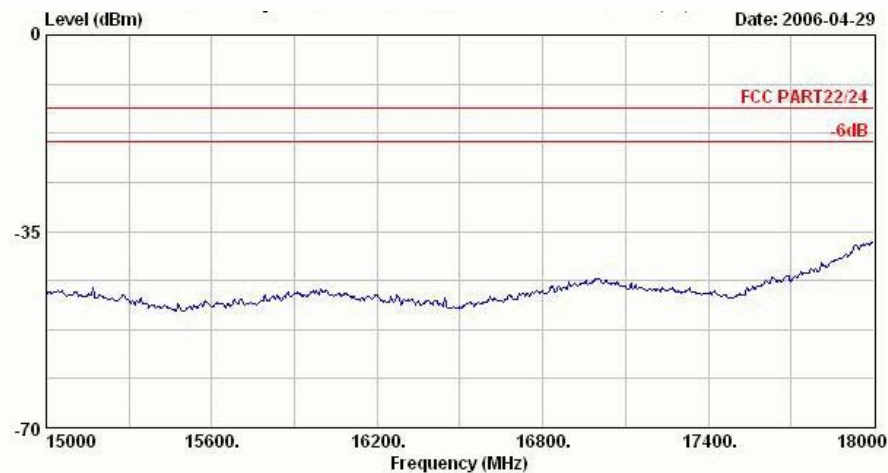

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
Adapter
Plane : H




Mode 2
Horizontal Polarization

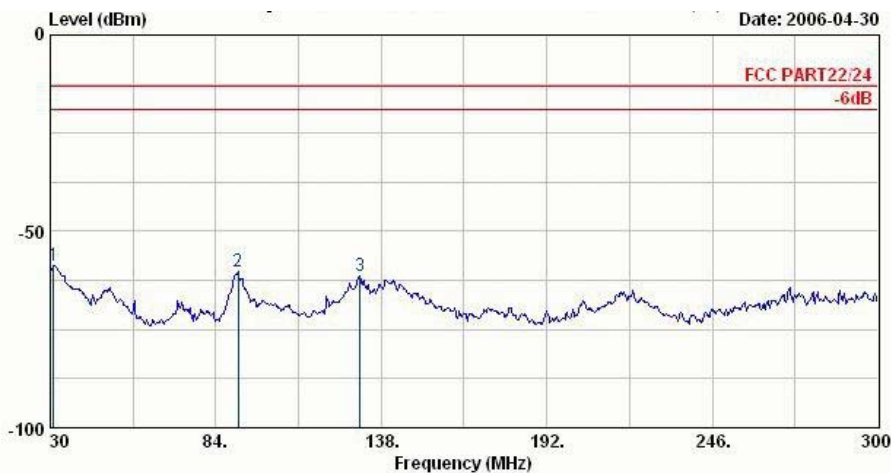


Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	31.08	-58.87	-45.87	-13.00	-58.62	Peak	-0.25
2 @	91.29	-60.25	-47.25	-13.00	-47.98	Peak	-12.27
3 @	130.98	-61.36	-48.36	-13.00	-48.76	Peak	-12.60

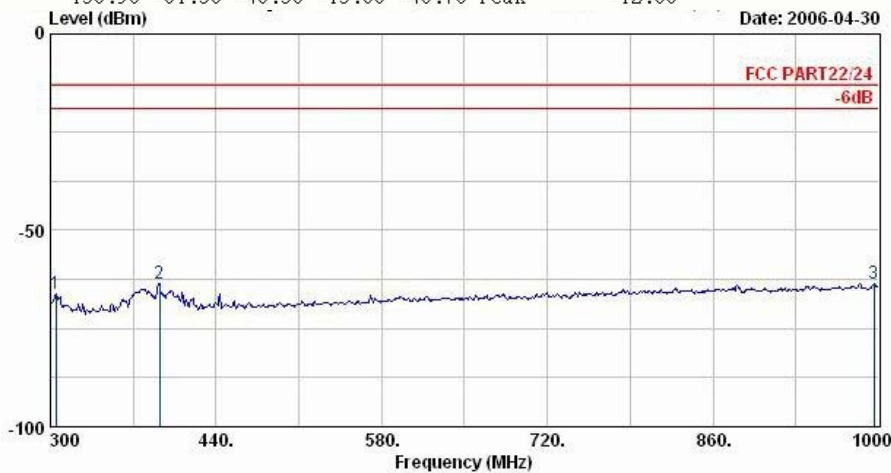

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	304.90	-66.11	-53.11	-13.00	-56.33	Peak	-9.78
2 @	392.40	-63.52	-50.52	-13.00	-56.79	Peak	-6.73
3 @	995.80	-63.39	-50.39	-13.00	-63.59	Peak	0.20

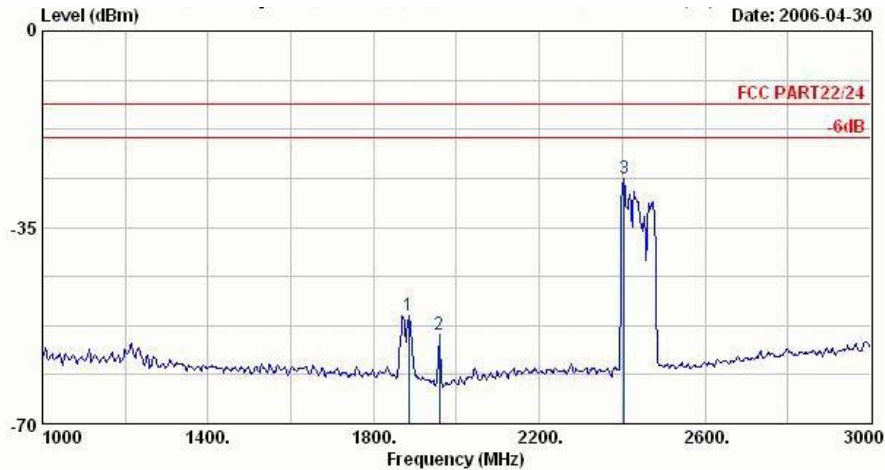


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	1884.00	-50.62			-49.94	Peak	-0.68
2 @	1958.00	-54.20			-53.09	Peak	-1.11
3 @	2404.00	-26.17			-27.06	Peak	0.89


Remark:

1. #1: MS TCH Signal
2. #2: BS TCH Signal
3. #3: BT Signal

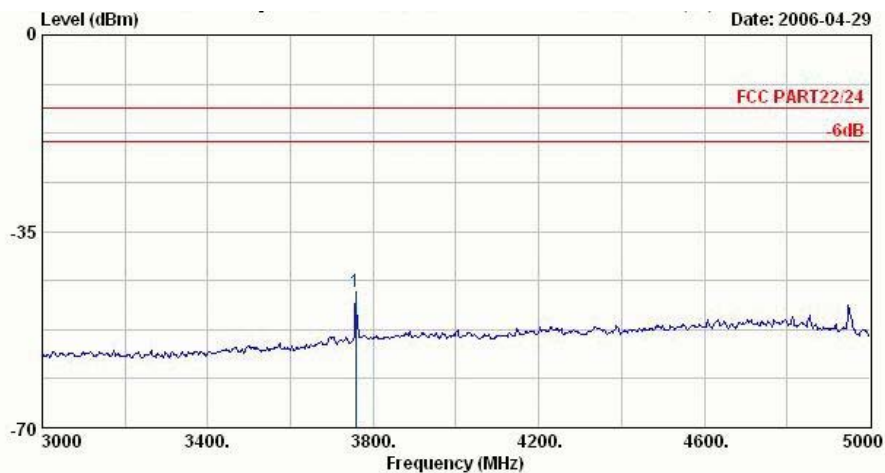


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	3758.00	-45.79	-32.79	-13.00	-53.71	Peak	7.92

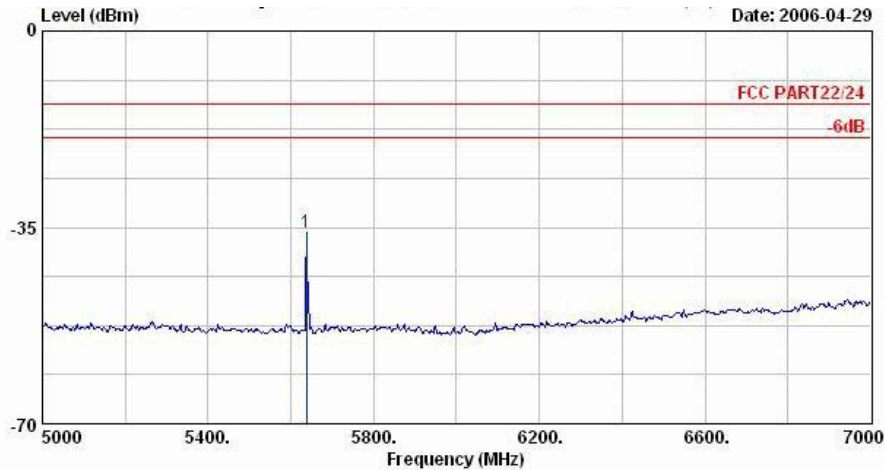


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	5638.00	-35.82	-22.82	-13.00	-45.79	Peak	9.97

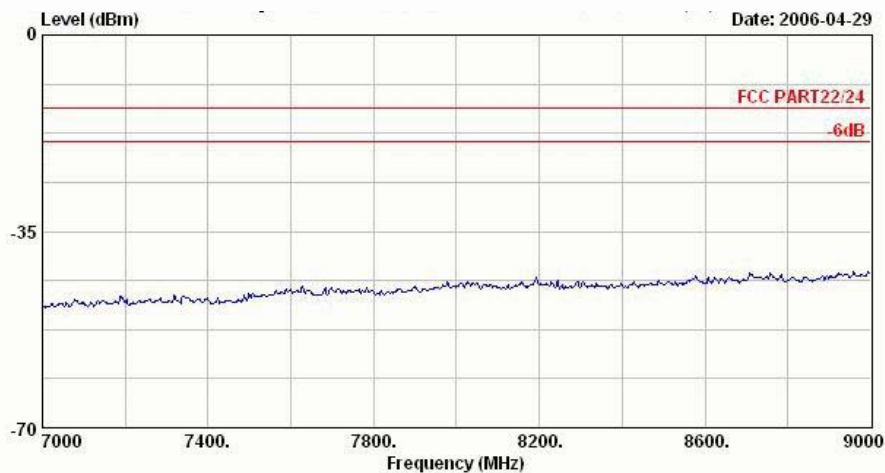


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

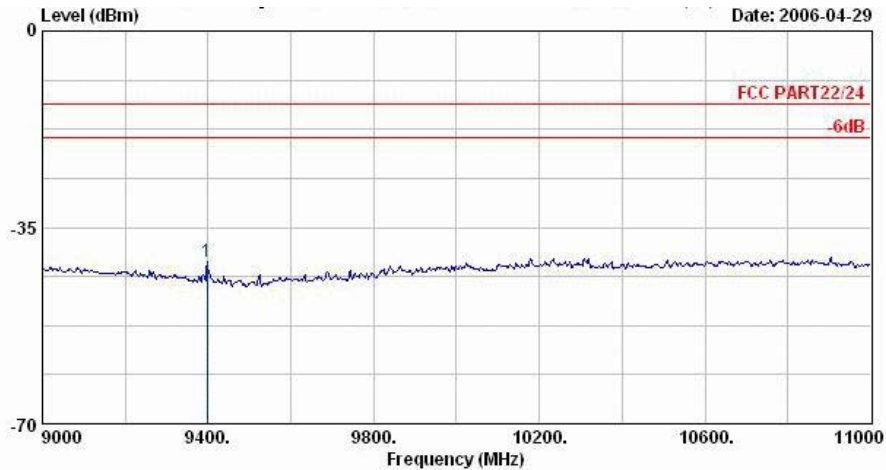

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	9398.00	-41.00	-28.00	-13.00	-59.23	Peak	18.22

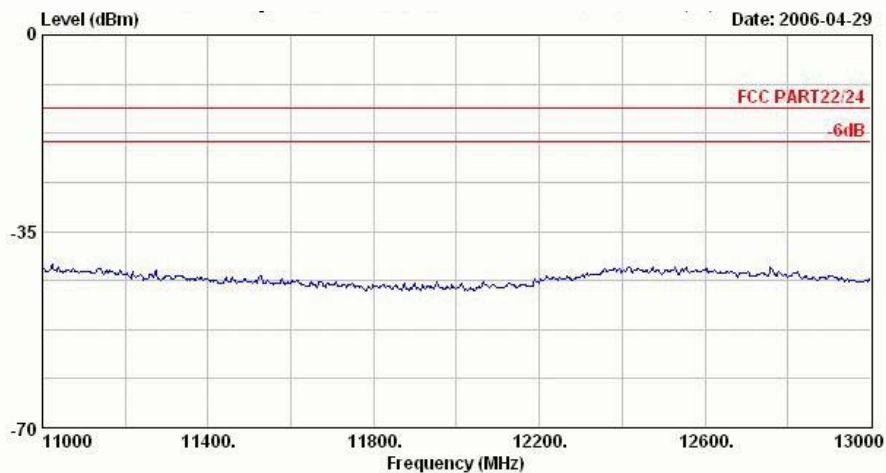


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

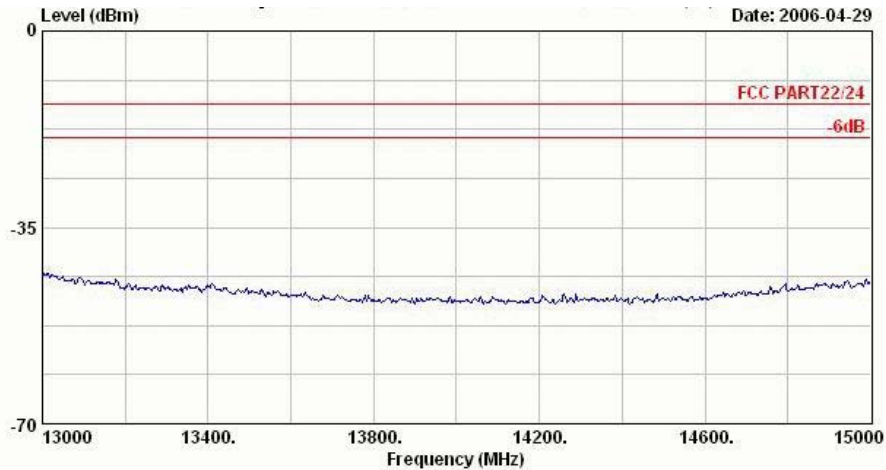


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

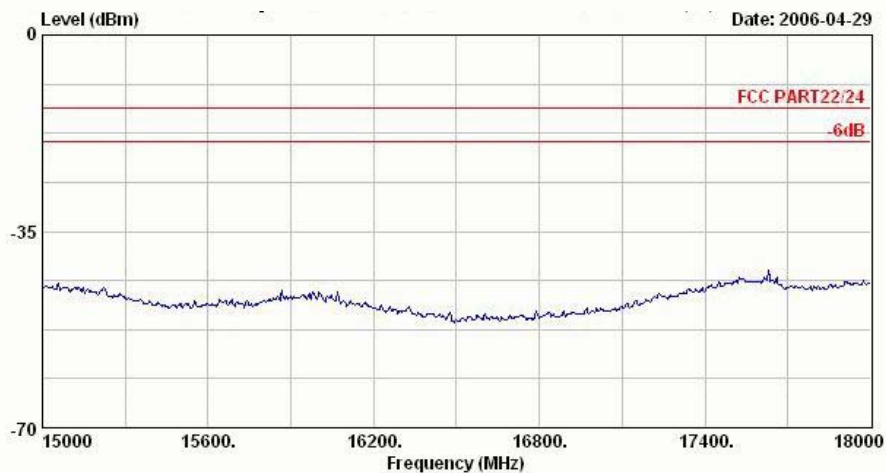

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H




Vertical Polarization

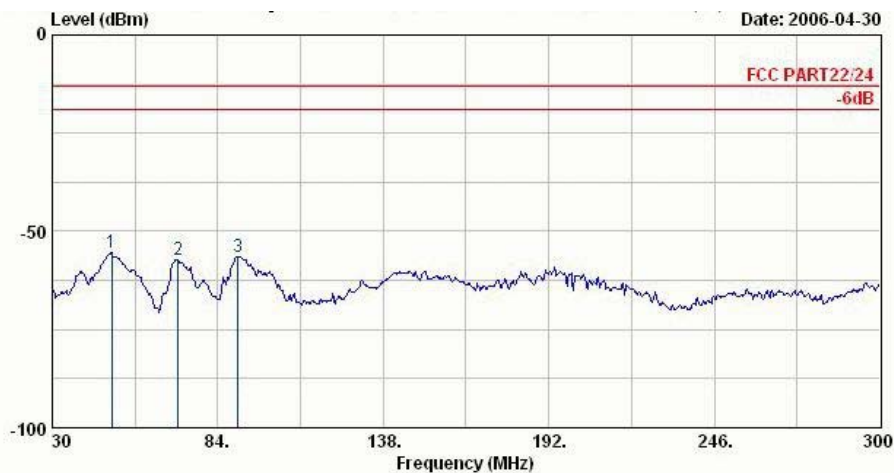


Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	49.44	-55.55	-42.55	-13.00	-41.00	Peak	-14.55
2 @	71.04	-57.20	-44.20	-13.00	-45.32	Peak	-11.88
3 @	90.48	-56.34	-43.34	-13.00	-47.25	Peak	-9.09

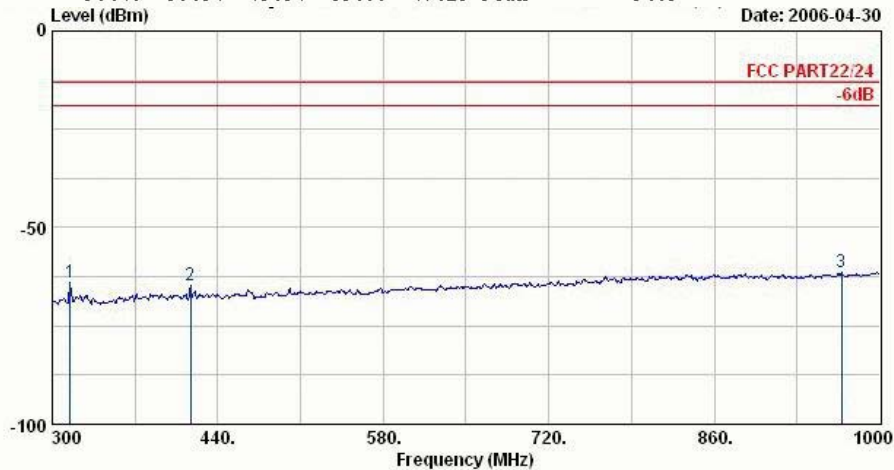

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	315.40	-64.03	-51.03	-13.00	-57.90	Peak	-6.13
2 @	416.90	-64.80	-51.80	-13.00	-60.68	Peak	-4.12
3 @	967.80	-61.27	-48.27	-13.00	-63.68	Peak	2.41

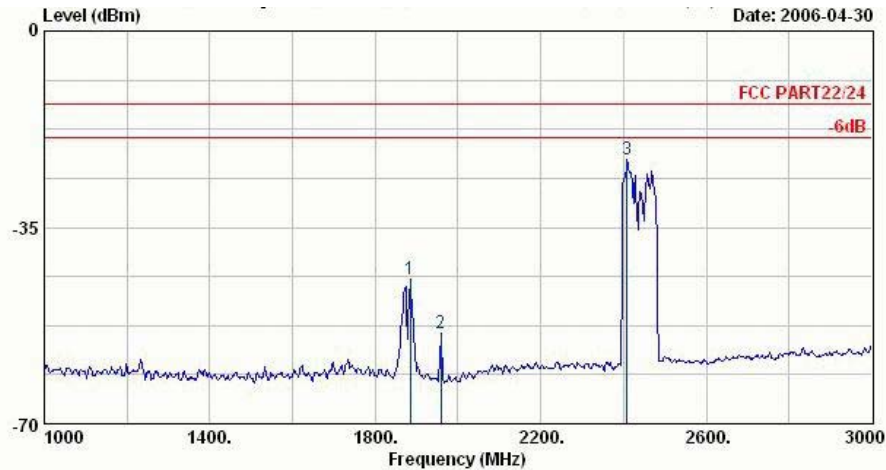


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	1884.00	-44.25			-43.75	Peak	-0.50
2 @	1958.00	-53.87			-53.28	Peak	-0.60
3 @	2408.00	-22.84			-24.71	Peak	1.87


Remark:

1. #1: MS TCH Signal
2. #2: BS TCH Signal
3. #3: BT Signal

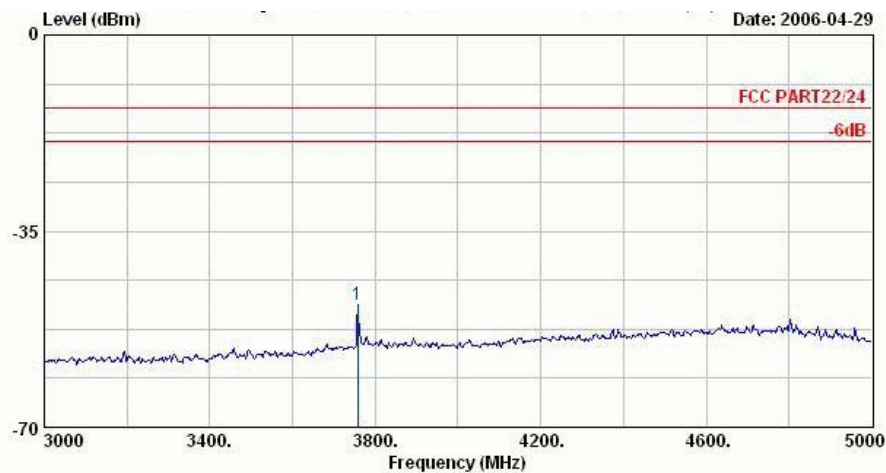


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	3758.00	-48.24	-35.24	-13.00	-54.88	Peak	6.64

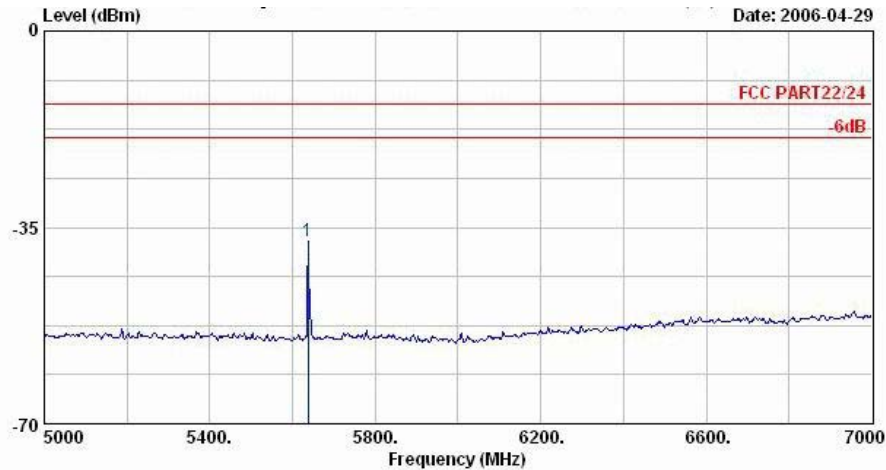


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	5638.00	-37.55	-24.55	-13.00	-46.21	Peak	8.65

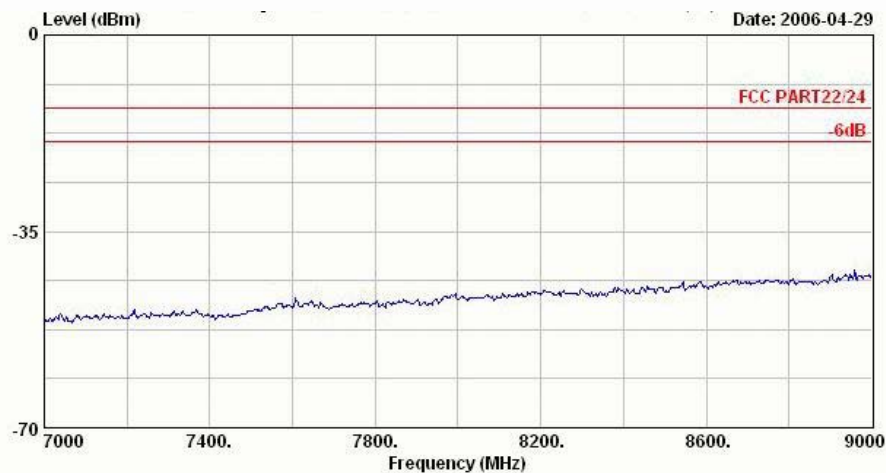


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

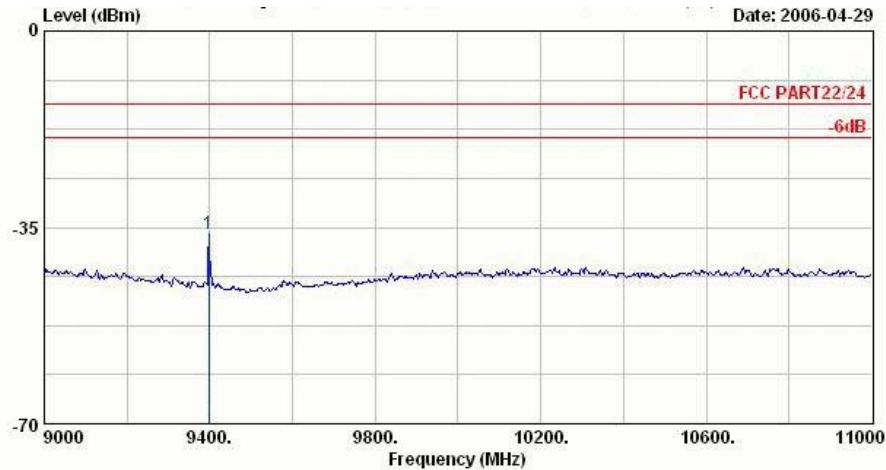

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	9398.00	-36.26	-23.26	-13.00	-53.46	Peak	17.20

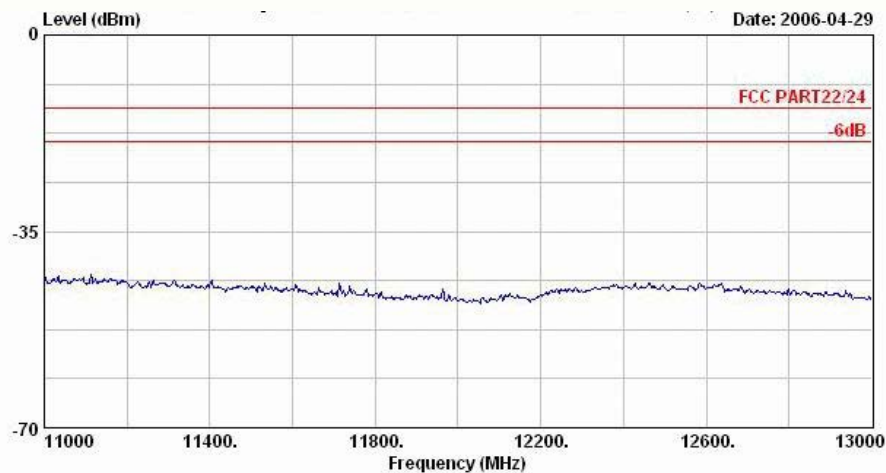


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

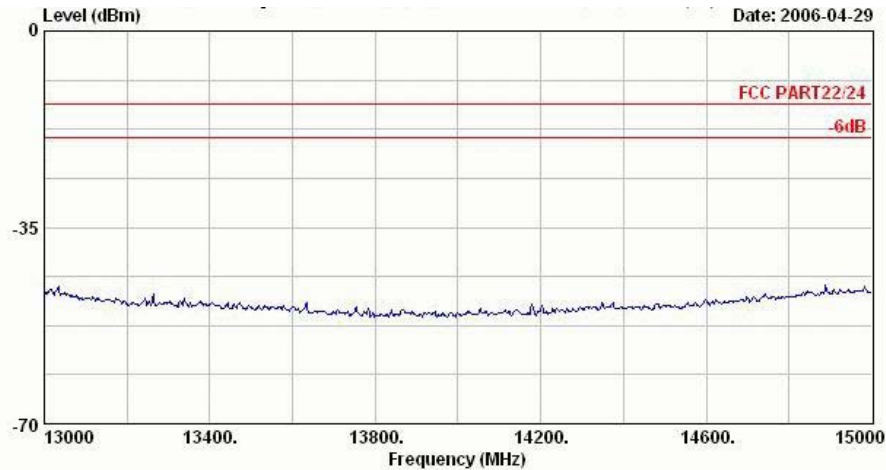

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H

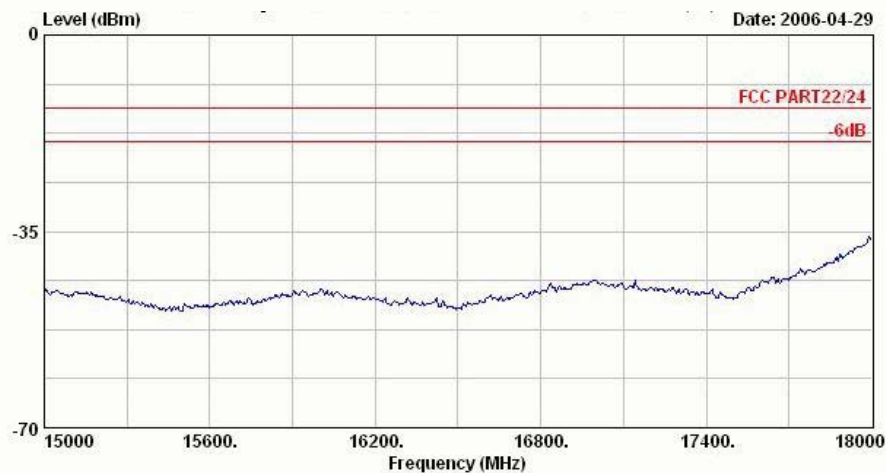


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: BT Link + Adapter
Plane : H




Mode 3

Horizontal Polarization

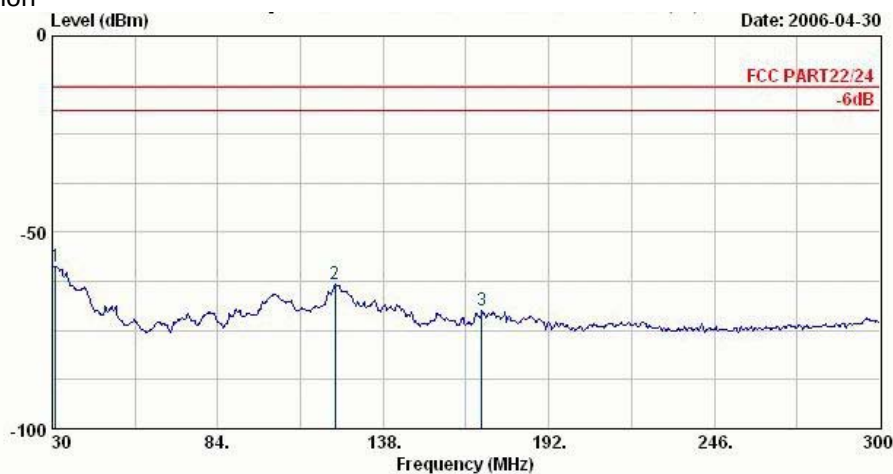


Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	31.08	-58.72	-45.72	-13.00	-58.47	Peak	-0.25
2 @	122.34	-63.36	-50.36	-13.00	-50.86	Peak	-12.50
3 @	170.13	-69.97	-56.97	-13.00	-56.93	Peak	-13.04

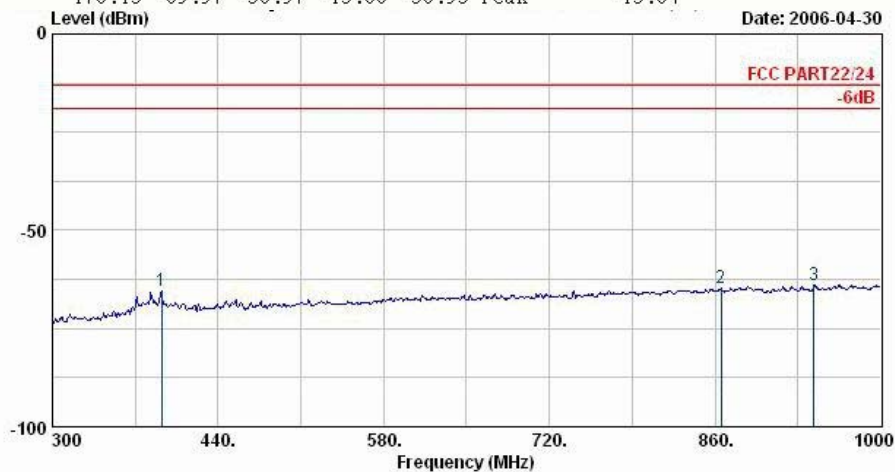

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	392.40	-65.27	-52.27	-13.00	-58.54	Peak	-6.73
2 @	864.90	-64.56	-51.56	-13.00	-63.50	Peak	-1.06
3 @	943.30	-63.89	-50.89	-13.00	-63.59	Peak	-0.30

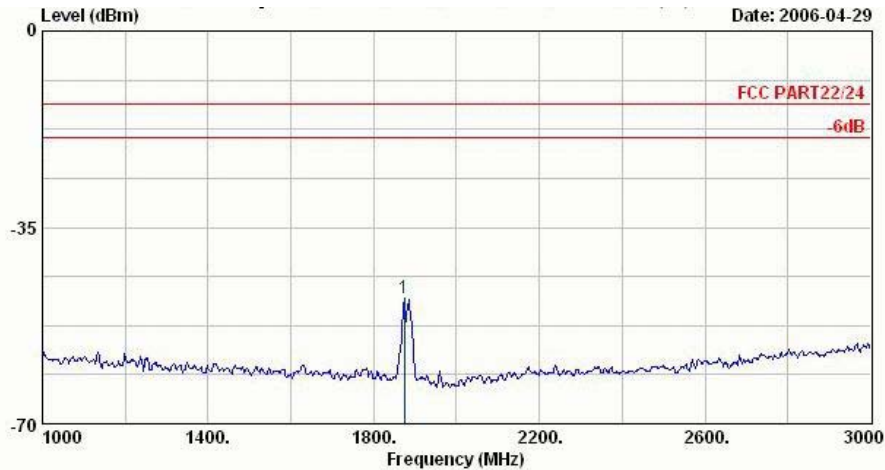


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	1874.00	-47.72			-47.21	Peak	-0.51


Remark:

1. #1: MS TCH Singal

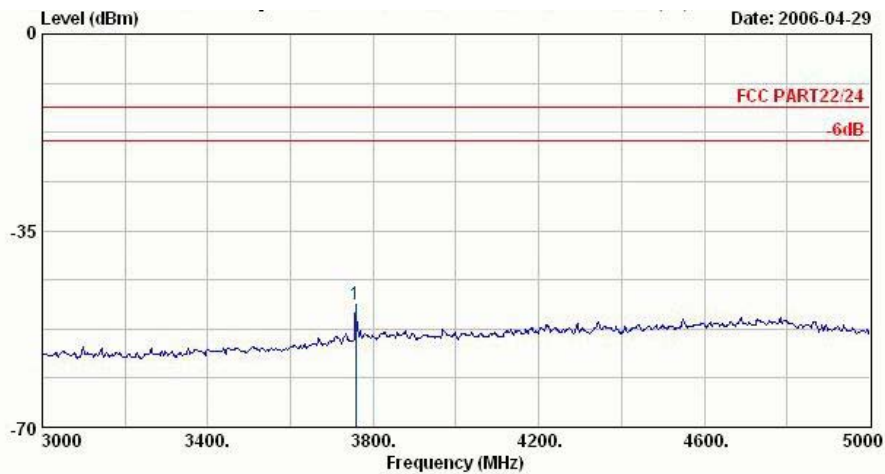


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	3758.00	-48.13	-35.13	-13.00	-56.05	Peak	7.92

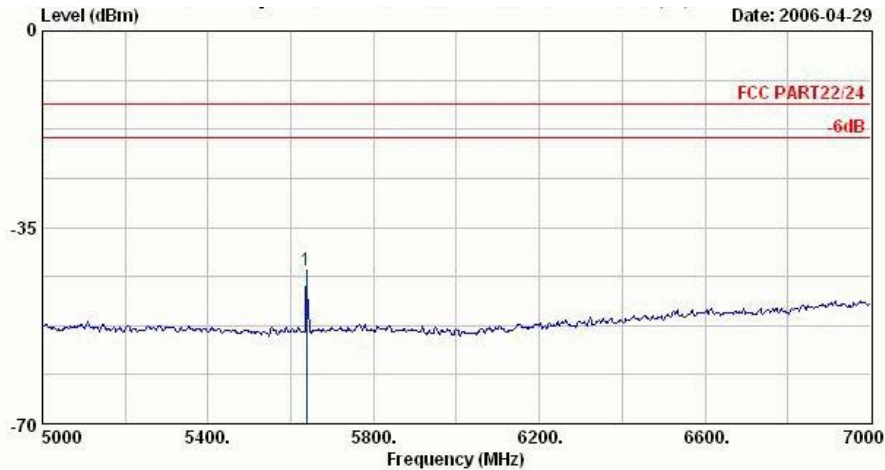


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	5638.00	-42.59	-29.59	-13.00	-52.56	Peak	9.97

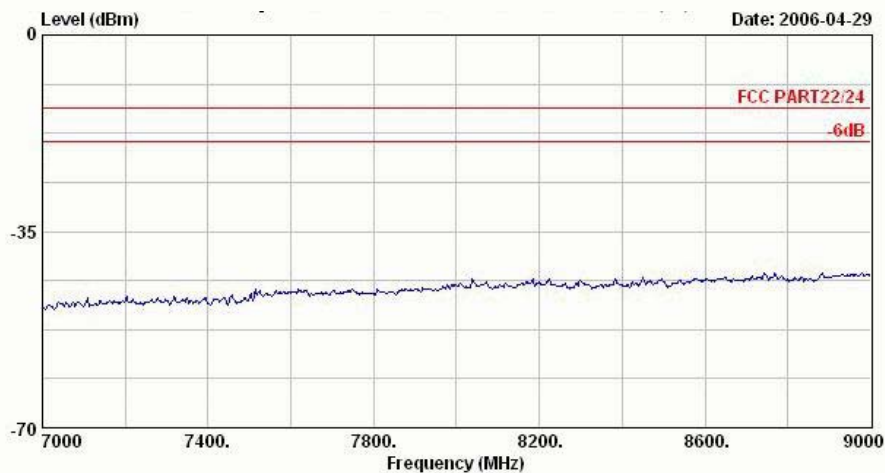


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

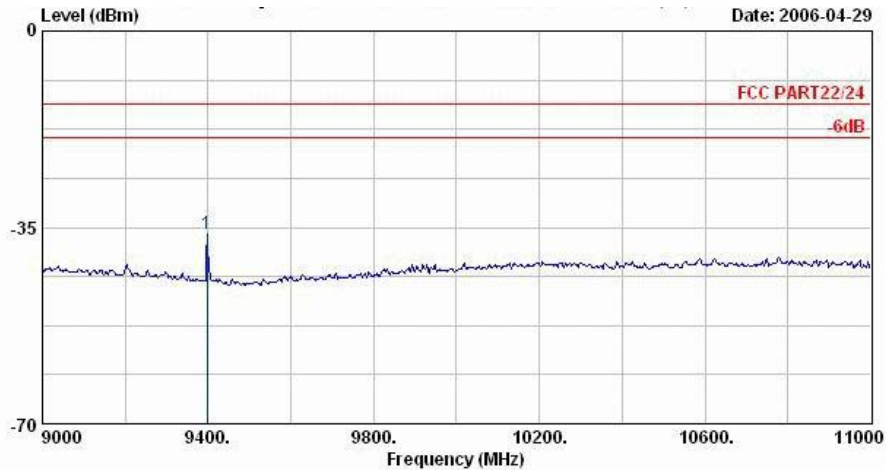

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	9398.00	-36.13	-23.13	-13.00	-54.35	Peak	18.22

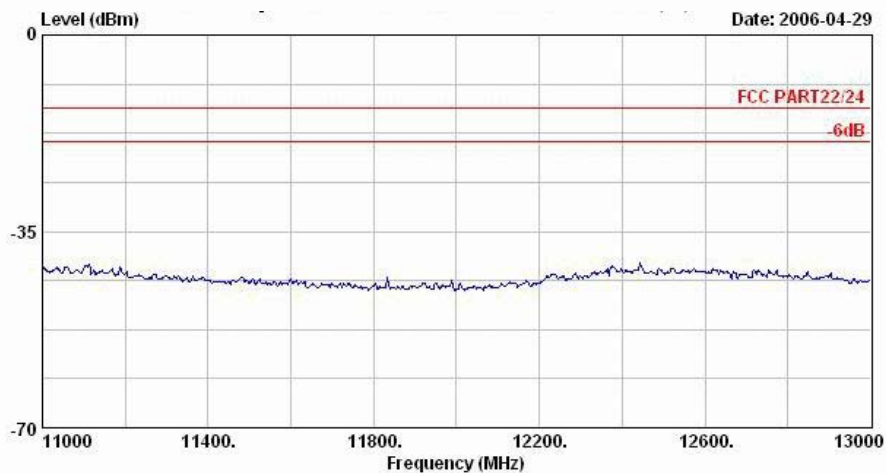


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

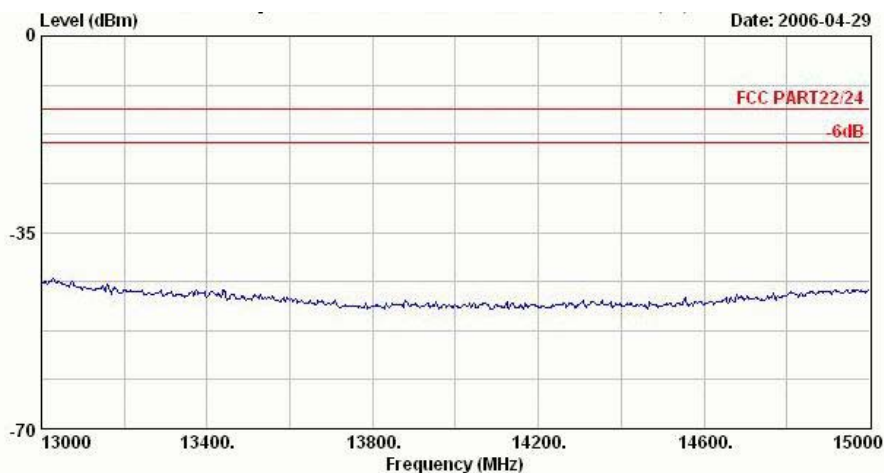


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

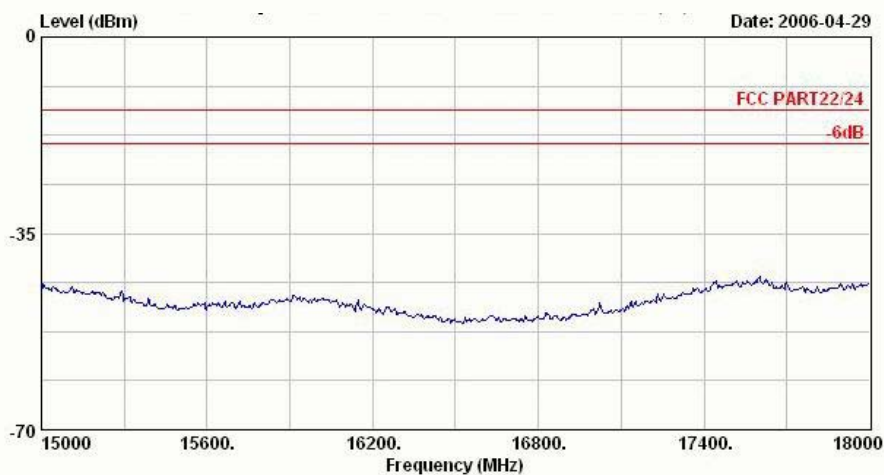

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/BSV1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




Vertical Polarization

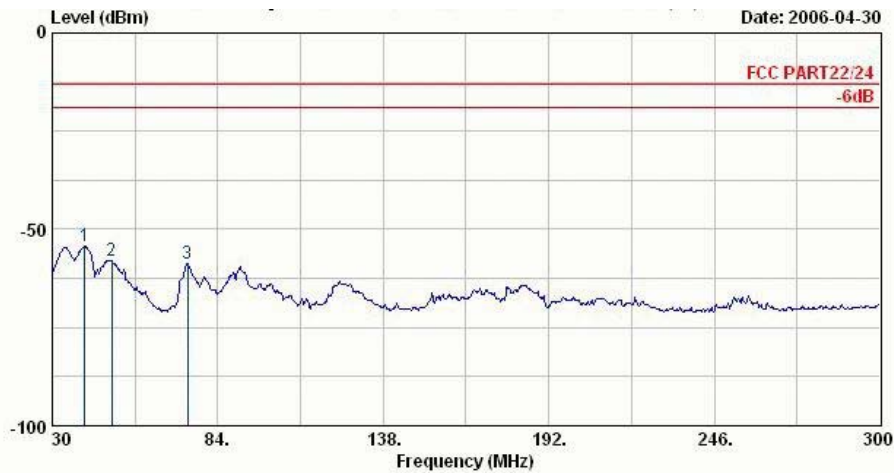


Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5W1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	40.53	-54.20	-41.20	-13.00	-42.12	Peak	-12.08
2 @	49.44	-57.86	-44.86	-13.00	-43.31	Peak	-14.55
3 @	74.28	-58.82	-45.82	-13.00	-47.50	Peak	-11.32

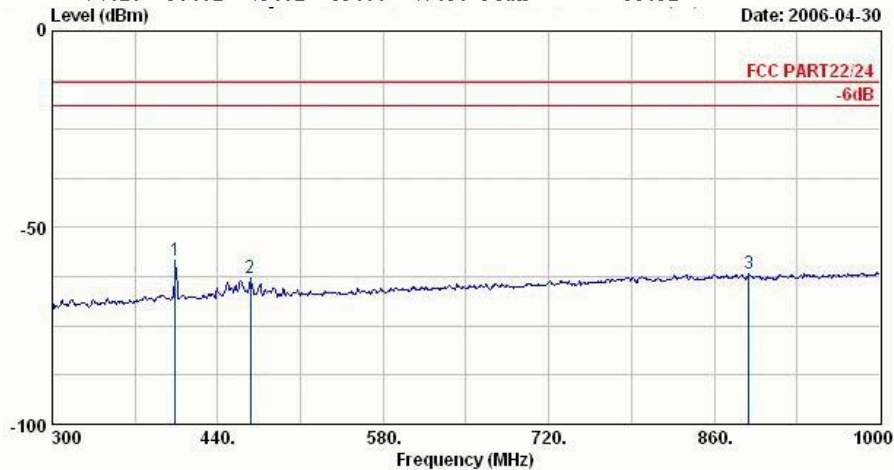

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5W1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	404.30	-58.37	-45.37	-13.00	-54.10	Peak	-4.27
2 @	467.30	-62.89	-49.89	-13.00	-59.37	Peak	-3.52
3 @	889.40	-61.86	-48.86	-13.00	-63.64	Peak	1.78

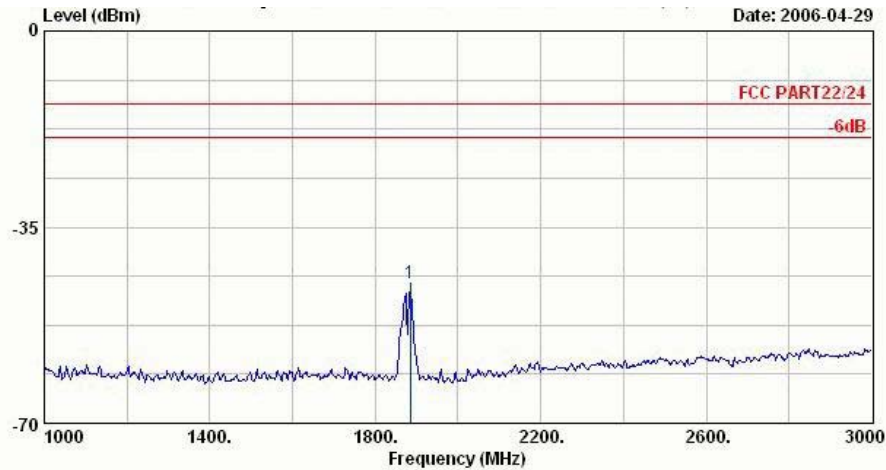


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	1884.00	-44.95			-44.45	Peak	-0.50


Remark:

1. #1: MS TCH Signal

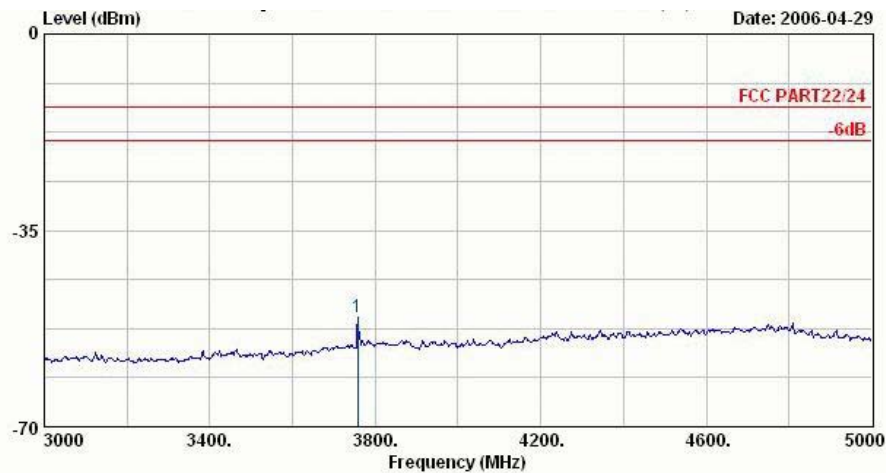


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	3758.00	-50.48	-37.48	-13.00	-57.12	Peak	6.64

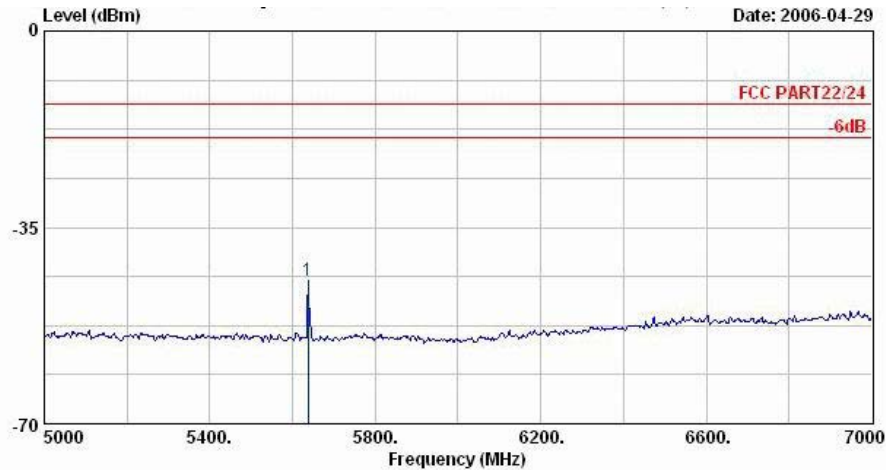

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V/1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	5638.00	-44.39	-31.39	-13.00	-53.04	Peak	8.65

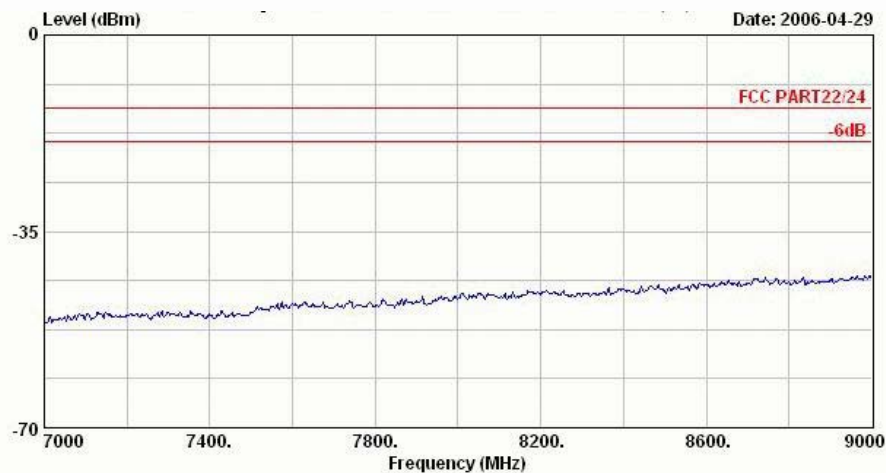


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V/1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

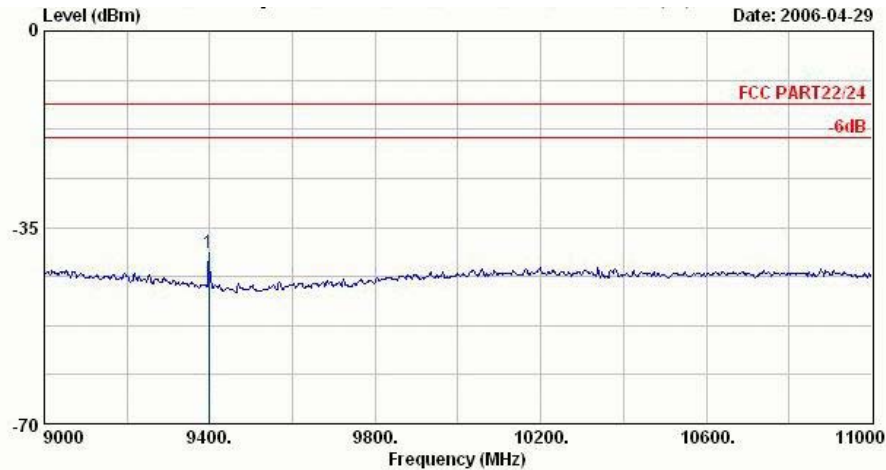

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	9398.00	-39.48	-26.48	-13.00	-56.68	Peak	17.20

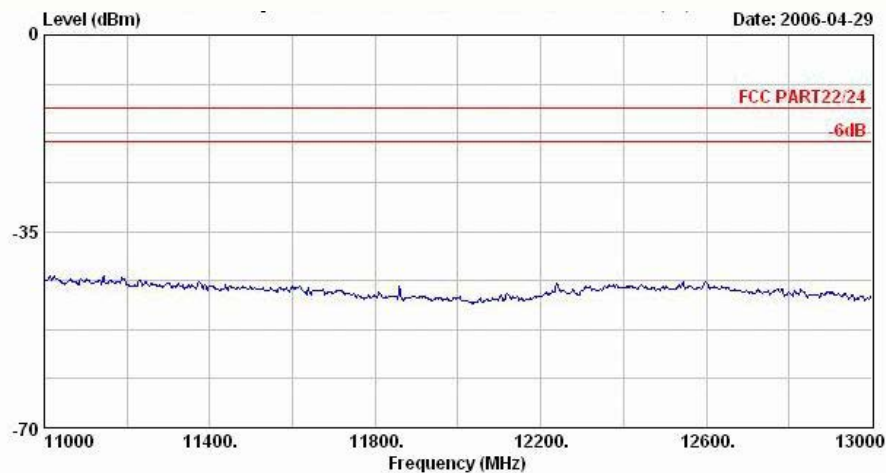


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

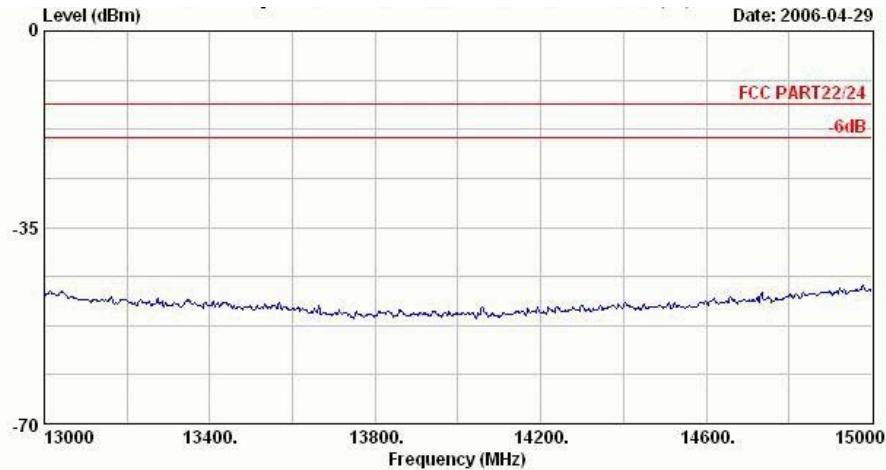

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

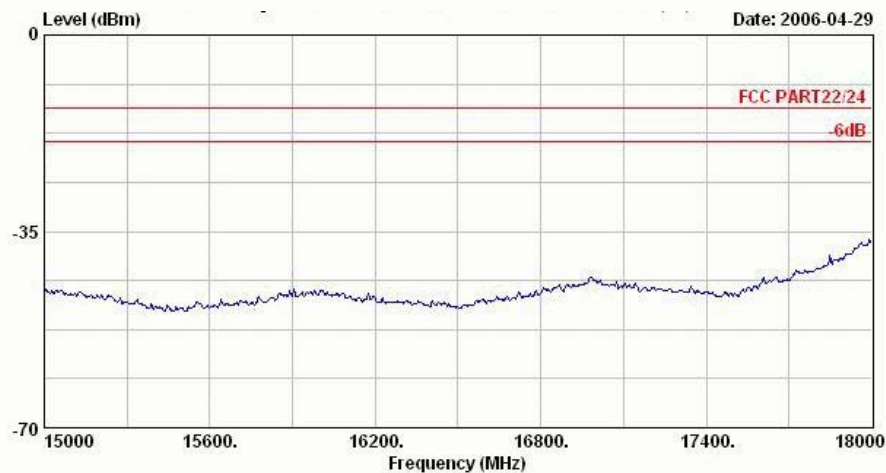


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




Mode 4

Horizontal Polarization

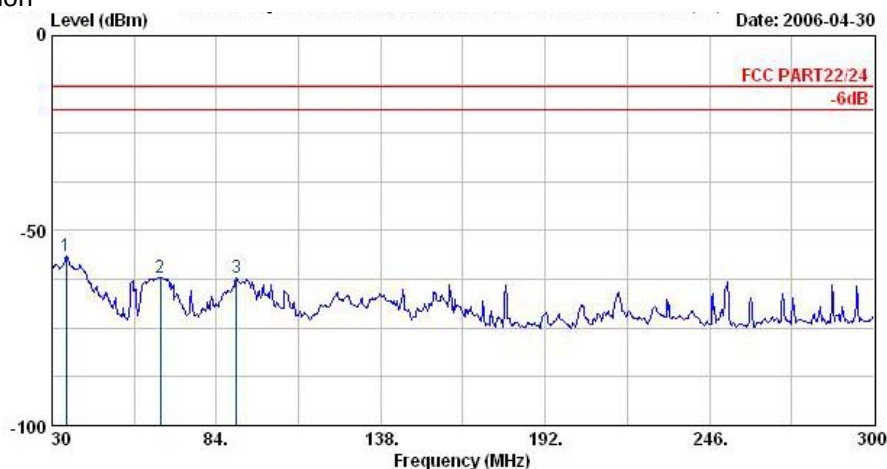

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	34.59	-56.63	-43.63	-13.00	-53.94	Peak	-2.69
2 @	65.64	-61.94	-48.94	-13.00	-49.57	Peak	-12.37
3 @	90.48	-61.99	-48.99	-13.00	-49.72	Peak	-12.28

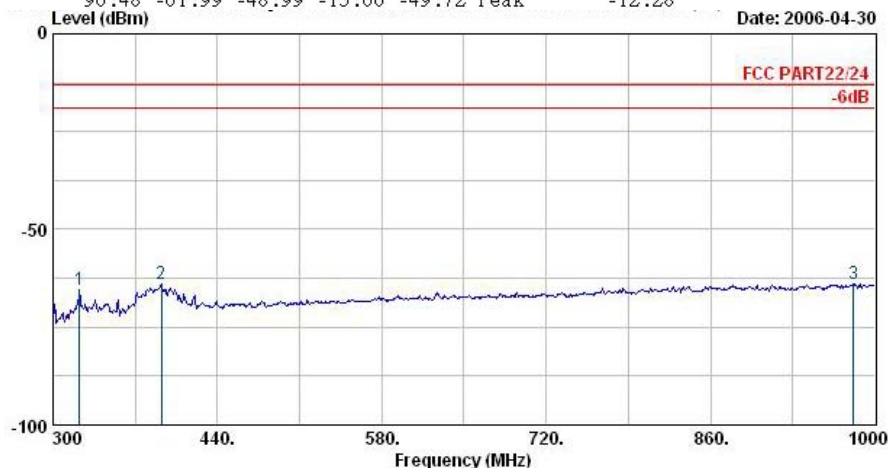


Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	322.40	-65.57	-52.57	-13.00	-56.40	Peak	-9.18
2 @	392.40	-63.78	-50.78	-13.00	-57.04	Peak	-6.73
3 @	981.80	-63.90	-50.90	-13.00	-63.96	Peak	0.06



FCC/IC TEST REPORT

Report No. : FG650602-A

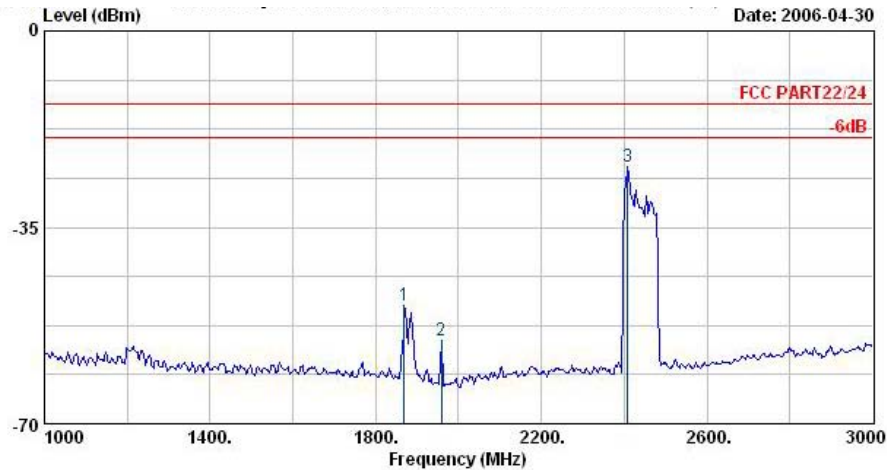


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSW1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	1868.00	-48.89			-48.38	Peak	-0.51
2 @	1958.00	-55.16			-54.05	Peak	-1.11
3 @	2408.00	-24.28			-25.17	Peak	0.89

Remark:

1. #1: MS TCH Signal
2. #2: BS TCH Signal
3. #3: BT Signal

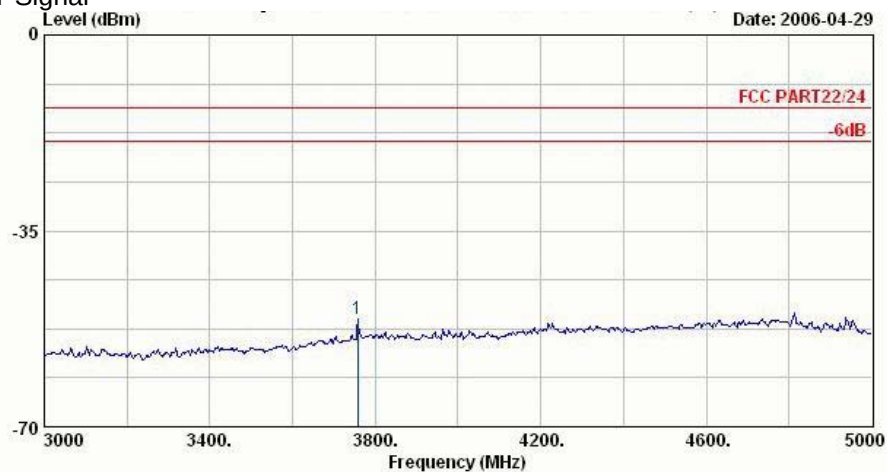

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSW1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	3758.00	-50.87	-37.87	-13.00	-58.80	Peak	7.92

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID : QXXUPX001

IC ID : 4626A-UPX001

Page No. : 55 of 67


Report Issued Date : May 18, 2006

Report Version : Rev. 01

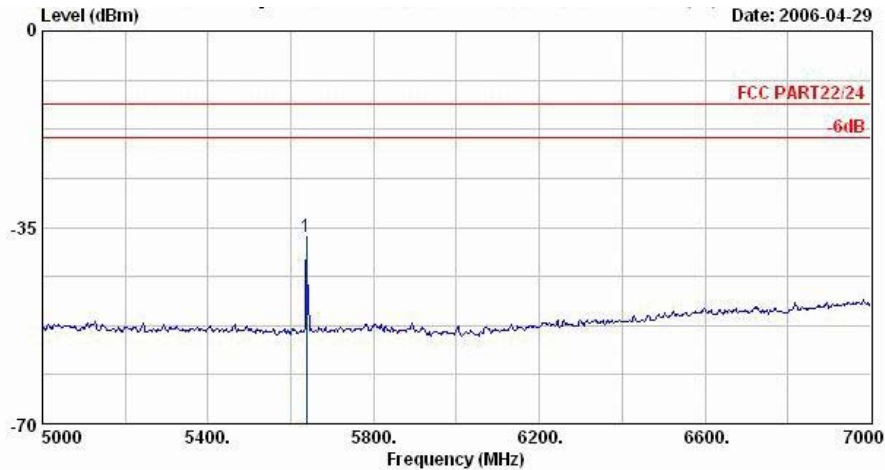


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	5638.00	-36.72	-23.72	-13.00	-46.69	Peak	9.97

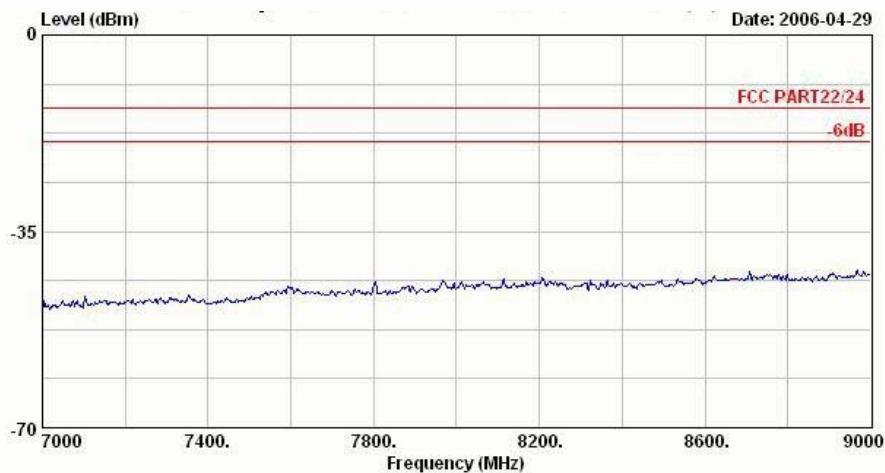


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

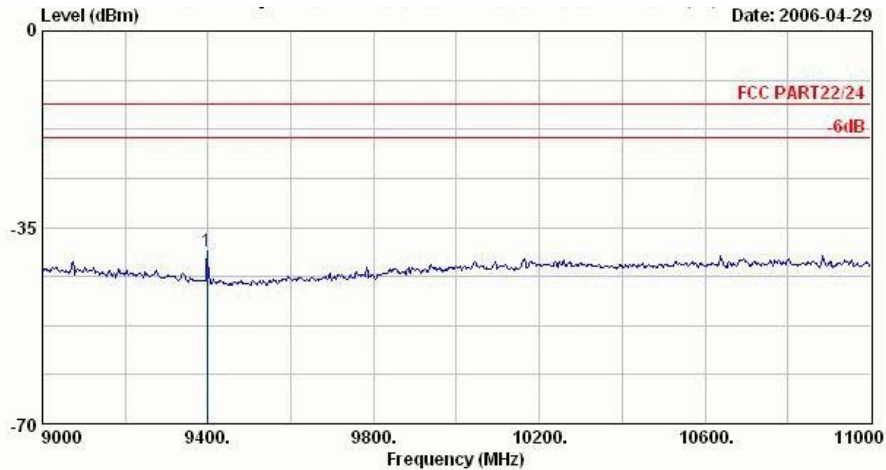

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/BSV1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	9398.00	-39.18	-26.18	-13.00	-57.40	Peak	18.22

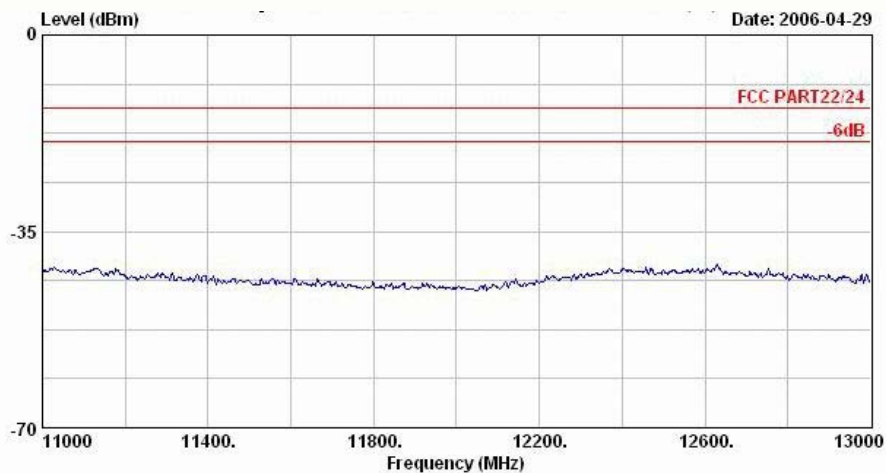


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05)
: U/T/BSV1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

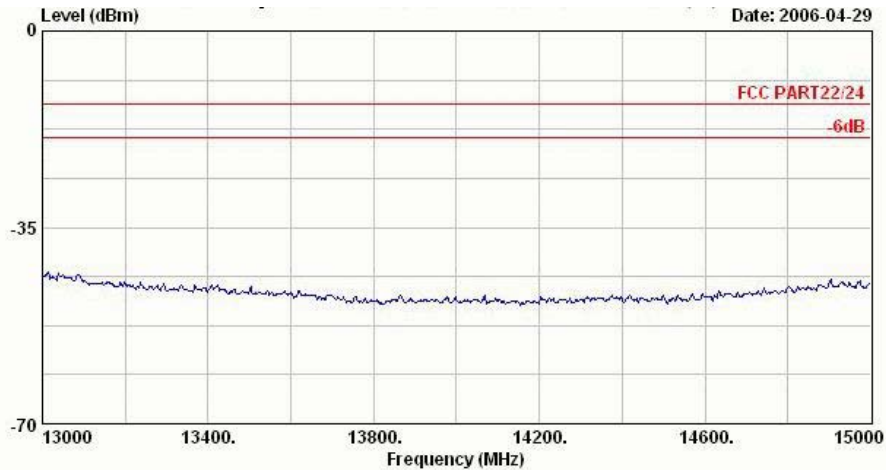


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

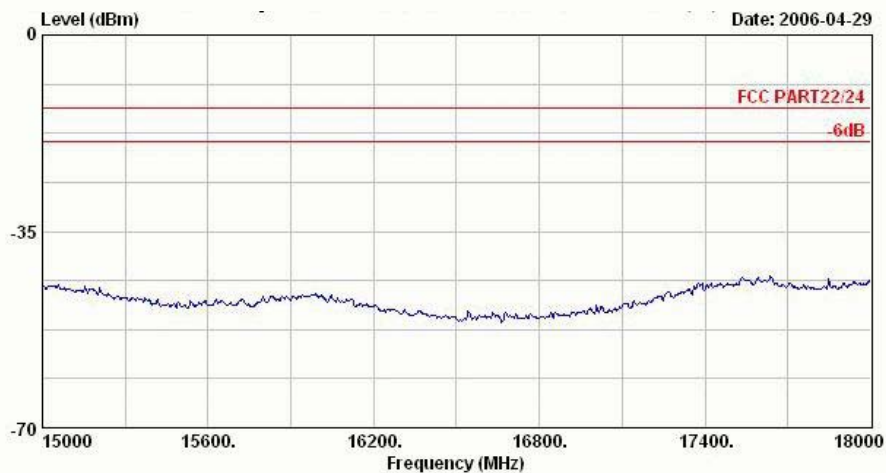

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/BSV1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




Vertical Polarization

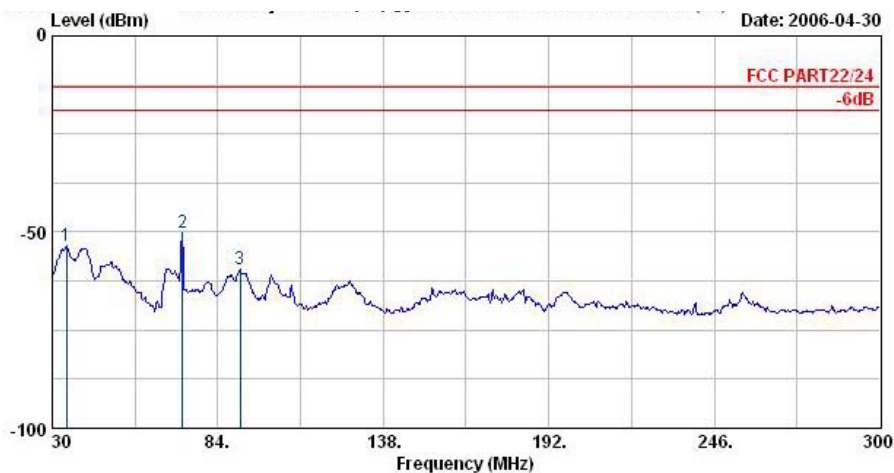

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	34.59	-53.69	-40.69	-13.00	-43.25	Peak	-10.44
2 @	72.39	-50.26	-37.26	-13.00	-38.66	Peak	-11.60
3 @	91.29	-59.53	-46.53	-13.00	-50.58	Peak	-8.95

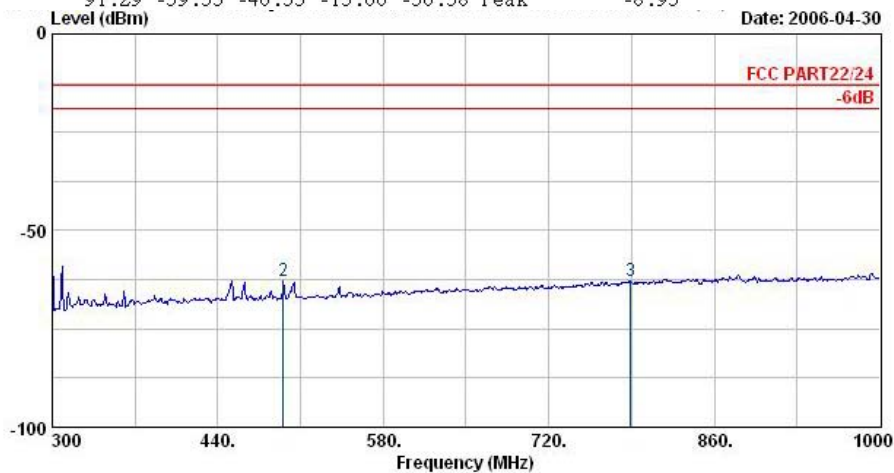


Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	300.00	-58.37	-45.37	-13.00	-51.91	Peak	-6.46
2 @	495.30	-62.82	-49.82	-13.00	-59.64	Peak	-3.18
3 @	789.30	-62.73	-49.73	-13.00	-63.64	Peak	0.91



FCC/IC TEST REPORT

Report No. : FG650602-A

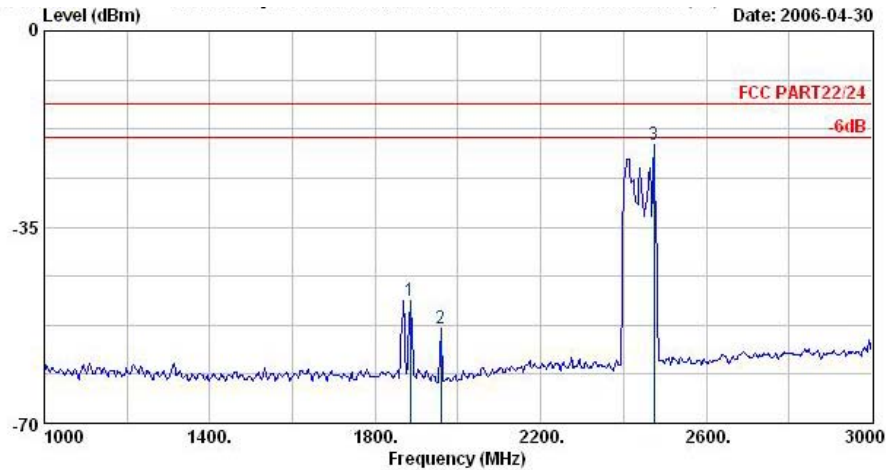


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	1884.00	-48.10			-47.60	Peak	-0.50
2 @	1958.00	-53.02			-52.42	Peak	-0.60
3 @	2474.00	-20.41			-22.63	Peak	2.21

Remark:

1. #1: MS TCH Signal
2. #2: BS TCH Signal
3. #3: BT Signal

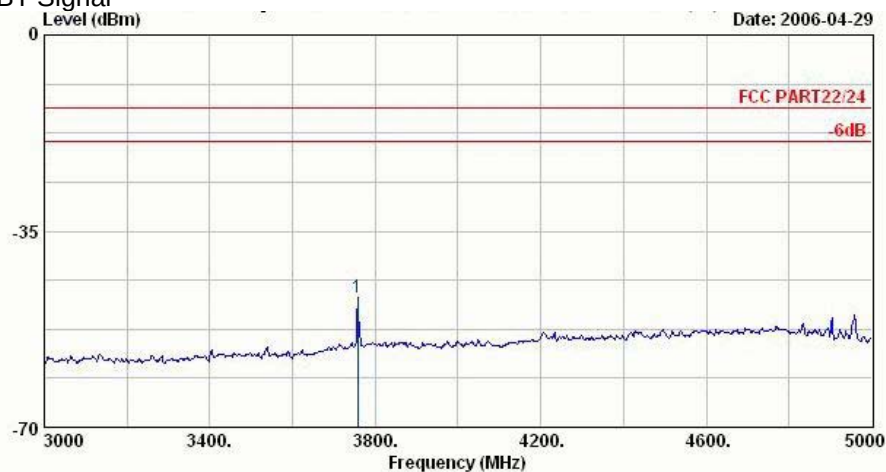

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	Limit	Line	Level		dB
1 @	3758.00	-46.80	-33.80	-13.00	-53.44	Peak	6.64

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID : QQXUPX001

IC ID : 4626A-UPX001

Page No. : 60 of 67


Report Issued Date : May 18, 2006

Report Version : Rev. 01

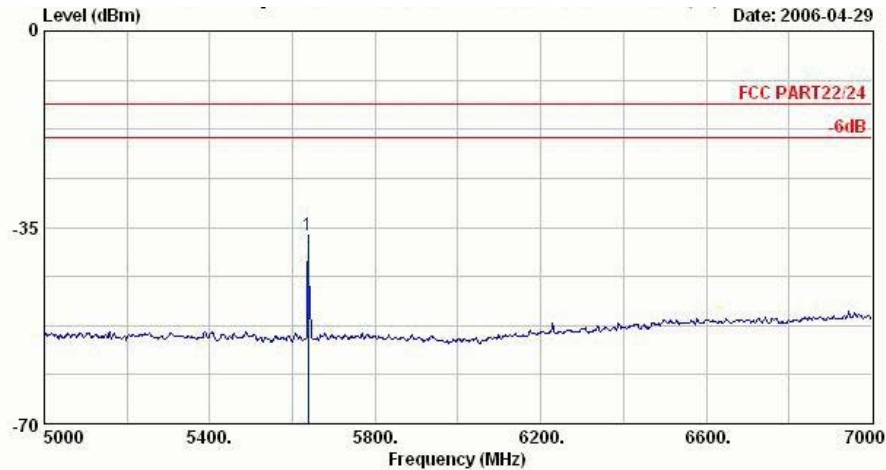

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBm	dB	dBm	dBm		dB
1 @	5638.00	-36.32	-23.32	-13.00	-44.97	Peak	8.65

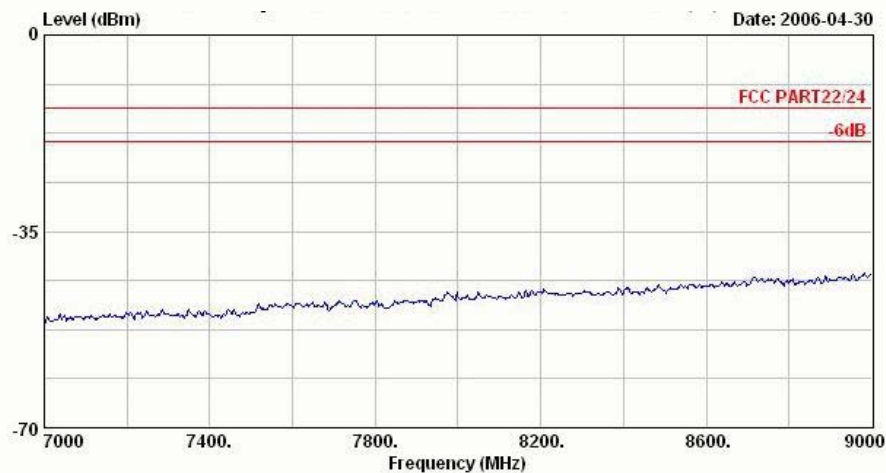


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

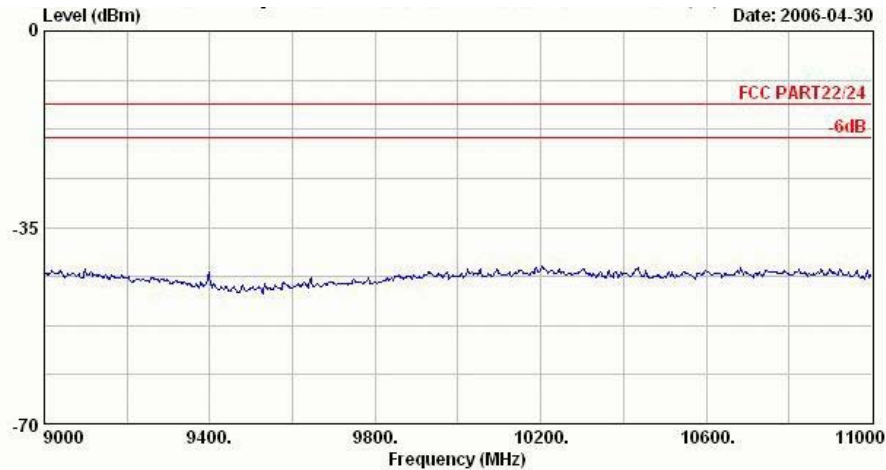

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

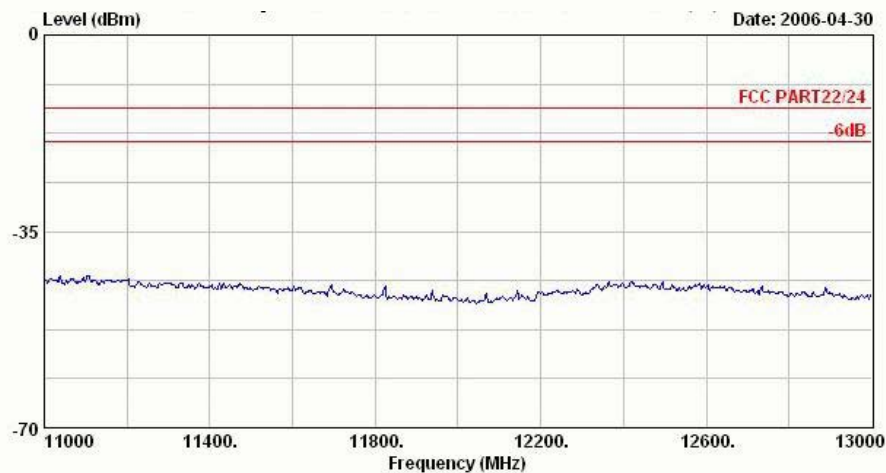


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H




FCC/IC TEST REPORT

Report No. : FG650602-A

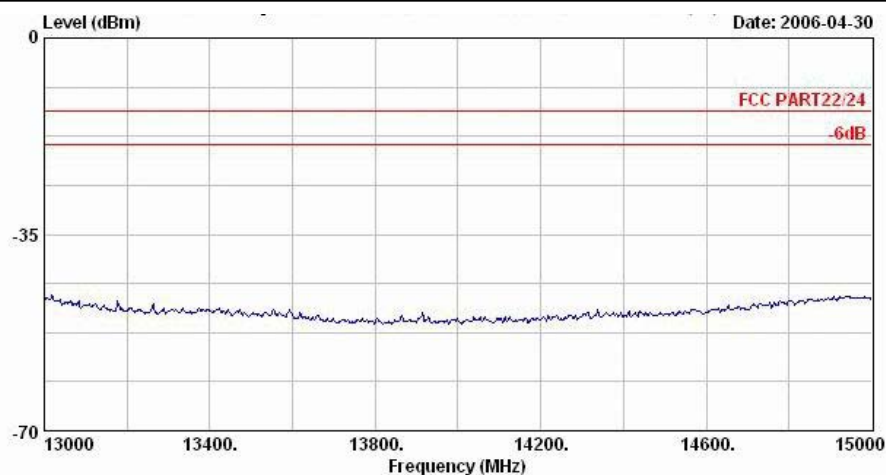

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

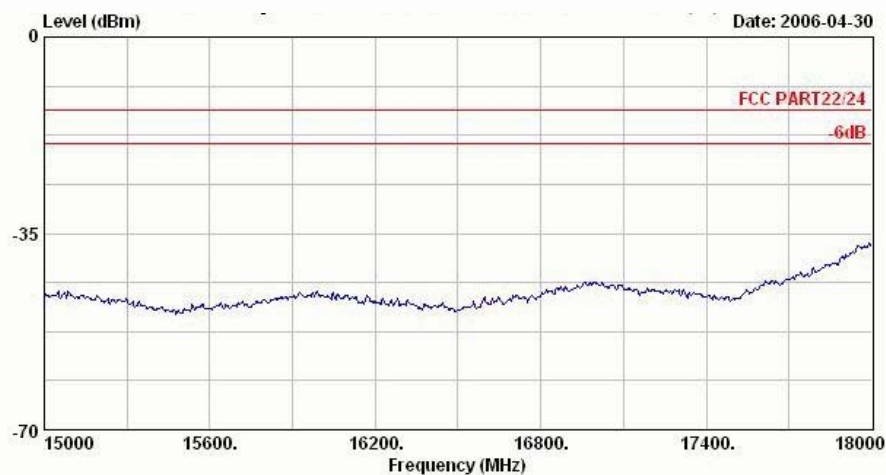

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz,SUNFONE(MODEL:ACE005A-05
: U/T/B5V1A)
Model : UPA2
Memo : Co-location
: PCS1900 Link + Earphone + Cradle +
: Adapter
Plane : H

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

4.7.3 Test Setup Layout

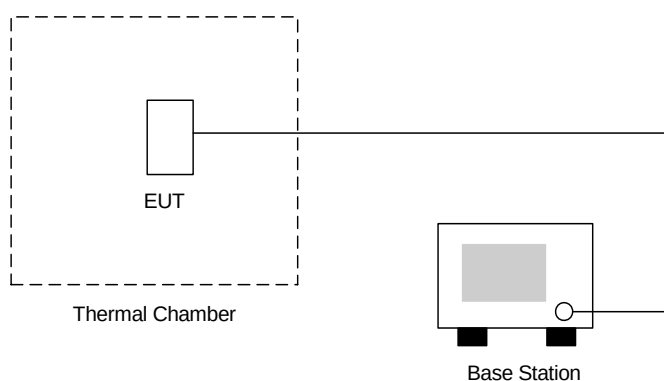

4.7.4 Test Result

▪ Test Mode : PCS 1900 CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	X	X		
-10	-82	-0.04		
0	-87	-0.05		
10	-66	-0.03		
20	-83	-0.04		
30	-88	-0.05		
40	-96	-0.05		
50	-106	-0.06		

Remark : The EUT can not turn on at temperature -20°C to -30°C.

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

1. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

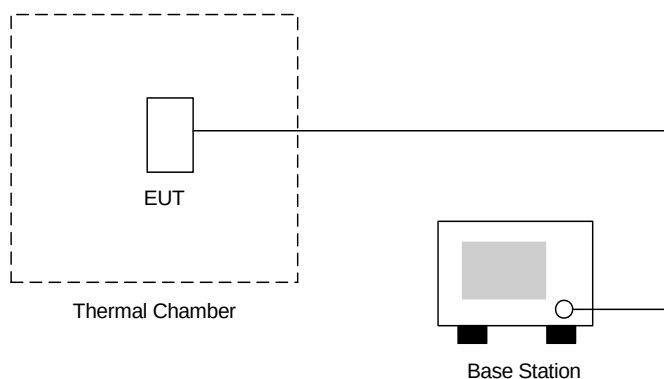

4.8.4 Test Result

- Test Mode : PCS 1900 CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-106.0	-0.06	2.5	Passed
BEP	-82.0	-0.04		
4.3	-110.0	-0.06		

Remark:

1. Normal Voltage=3.7V
2. Battery End Point (BEP)=3.4 V



5 List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 25, 2005	Jul. 24, 2006	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jun. 28, 2005	Jun. 27, 2006	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 22, 2004	Nov. 22, 2006	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 22, 2006	Feb. 22, 2007	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Dec. 17, 2004	Dec. 17, 2005	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)

6 Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1^2 * \Gamma_2^2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	4.72				

END OF TEST REPORT