

# **TIMCO** ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)



## Test Report

Product Name: UHF TRANSCEIVER

FCC ID: QREHL-10U1

Applicant:

**HEADLINE INFORMATION & COMMUNICATION LTD.  
MISUNG BLDG., GURO-DONG 612-6  
GURO-GU, SEOUL, 152-865  
KOREA**

**Date Receipt: NOVEMBER 30, 2004**

**Date Tested: DECEMBER 17, 2004**

**APPLICANT:** HEADLINE INFORMATIONS & COMMUNICATION  
**FCC ID:** QREHL-10U1  
**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

**COVER PAGE**

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION LTD.

**FCC ID:** QREHL-10U1

## TABLE OF CONTENTS LIST

### TEST REPORT:

|                 |                                                 |
|-----------------|-------------------------------------------------|
| PAGE 1.....     | GENERAL INFORMATION & TECHNICAL DESCRIPTION     |
| PAGE 2.....     | TECHNICAL DESCRIPTION CONTINUED                 |
|                 | RF POWER OUTPUT                                 |
| PAGE 3.....     | MODULATION CHARACTERISTICS                      |
|                 | AUDIO FREQUENCY RESPONSE                        |
| PAGE 4.....     | AUDIO LOW PASS FILTER                           |
| PAGE 5-6.....   | MODULATION LIMITING                             |
| PAGE 7-8.....   | OCCUPIED BANDWIDTH                              |
| PAGE 9-10.....  | OCCUPIED BANDWIDTH PLOTS                        |
| PAGE 11-14..... | SPURIOUS EMISSIONS AT ANTENNA TERMINALS         |
| PAGE 15.....    | METHOD OF MEASURING SPURIOUS EMISSIONS AT       |
|                 | ANTENNA TERMINALS                               |
| PAGE 16-18..... | FIELD STRENGTH OF SPURIOUS EMISSIONS            |
| PAGE 19.....    | METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS |
| PAGE 20.....    | FREQUENCY STABILITY                             |
| PAGE 21-22..... | TRANSIENT FREQUENCY STABILITY                   |
| PAGE 23-24..... | TRANSIENT FREQUENCY RESPONSE PLOTS              |
| PAGE 25-30..... | EQUIPMENT LIST                                  |

### EXHIBITS CONTAINING:

CONFIDENTIALITY LETTER  
BLOCK DIAGRAM  
SCHEMATIC  
PARTS LIST  
USERS MANUAL  
LABEL SAMPLE  
LABEL LOCATION  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
TUNING PROCEDURE  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPH

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

**TABLE OF CONTENTS**

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## GENERAL INFORMATION REQUIRED FOR CERTIFICATION OF A LICENSED TRANSMITTER

**2.1033(c)(1)(2)** HEADLINE INFORMATION & COMMUNICATION LTD. will manufacture the FCCID: QREHL-10U1 UHF TRANSCEIVER in quantity, for use under FCC RULES PART 90.

HEADLINE INFORMATION & COMMUNICATION LTD.  
MISUNG BLDG., GURO-DONG 612-6  
GURO-GU, SEOUL, 152-865  
KOREA

### **2.1033(c)** TECHNICAL DESCRIPTION

**2.1033(c)(3)** Instruction book. A draft copy of the instruction manual is included.

**2.1033(c)(4)** Type of Emission: 9K4F3E  
**90.209**  
**90.207**  
Bn = 2M + 2DK  
M = 3000  
D = 1700  
Bn = 2(3000) + 2(1700) = 9.4k

**2.1033(c)(5)** Frequency Range: 406 - 470 MHz  
**90.209 (b)(5)**

**2.1033(c)(6)(7)** Power Output shall not exceed 59 Watts into a 50 ohm resistive load. There are no user power controls.  
**90.205**

**2.1033(c)(8)** DC Voltages and Current into Final Amplifier:

POWER INPUT  
FINAL AMPLIFIER ONLY  
High Low  
Vce = 7.4 Volts Vce = 7.4 VDC  
Ice = 1.7 A. Ice = 0.7  
Pin = 12.58 Watts Pin = 5.18 Watts

**2.1033(c)(9)** **Tune-up procedure.** The tune-up procedure is included.

**2.1033(c)(10)** **Complete Circuit Diagrams:** The circuit diagram is included. The block diagram is included.

**2.1033(c)(11)** Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description.

**APPLICANT:** HEADLINE INFORMATIONS & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)


- 2.1033(c)(12)** A photograph or drawing of the equipment identification label is included.
- 2.1033(c)(13)** Photographs of the equipment of sufficient clarity to reveal equipment construction and layout and label location are included.
- 2.1033(c)(14)** Digital Modulation is not allowed
- 2.1033(c)(15)** The data required for 2.1046 through 2.1057 is submitted below.

## **2.1046(a)**

### **RF POWER OUTPUT**

RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

**OUTPUT POWER:**      **HIGH - 3.78 Watts**  
                             **LOW - 1 Watts**



**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do


# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1047(a)(b) Modulation characteristics:

### AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 - 5000Hz shall be submitted. The audio frequency response curve is shown below.

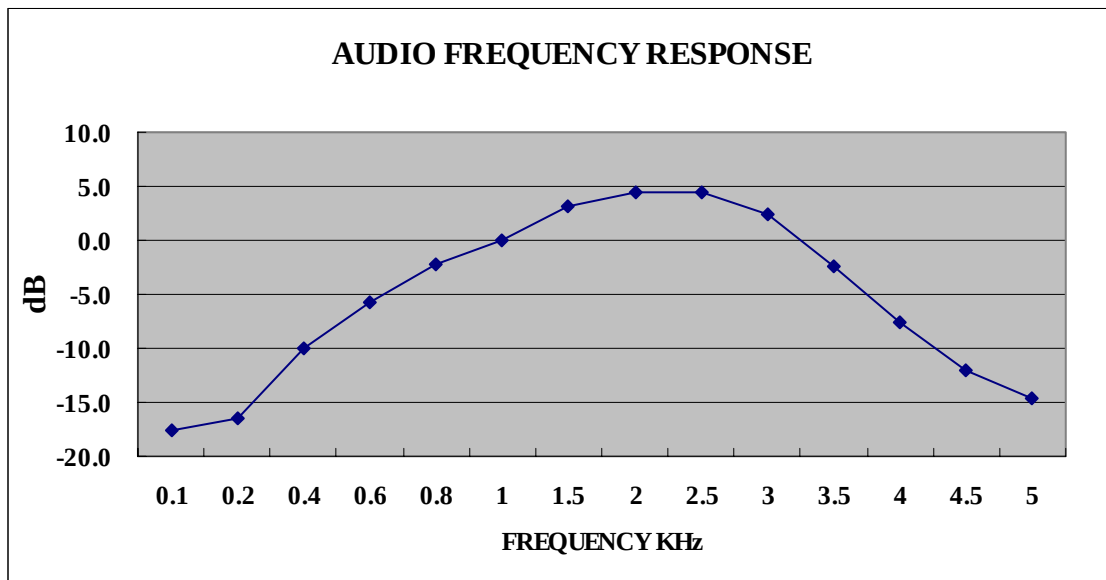

**APPLICANT:** HEADLINE INFORMATIONS & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do


# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1047(a)

### Voice modulated communication equipment

For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

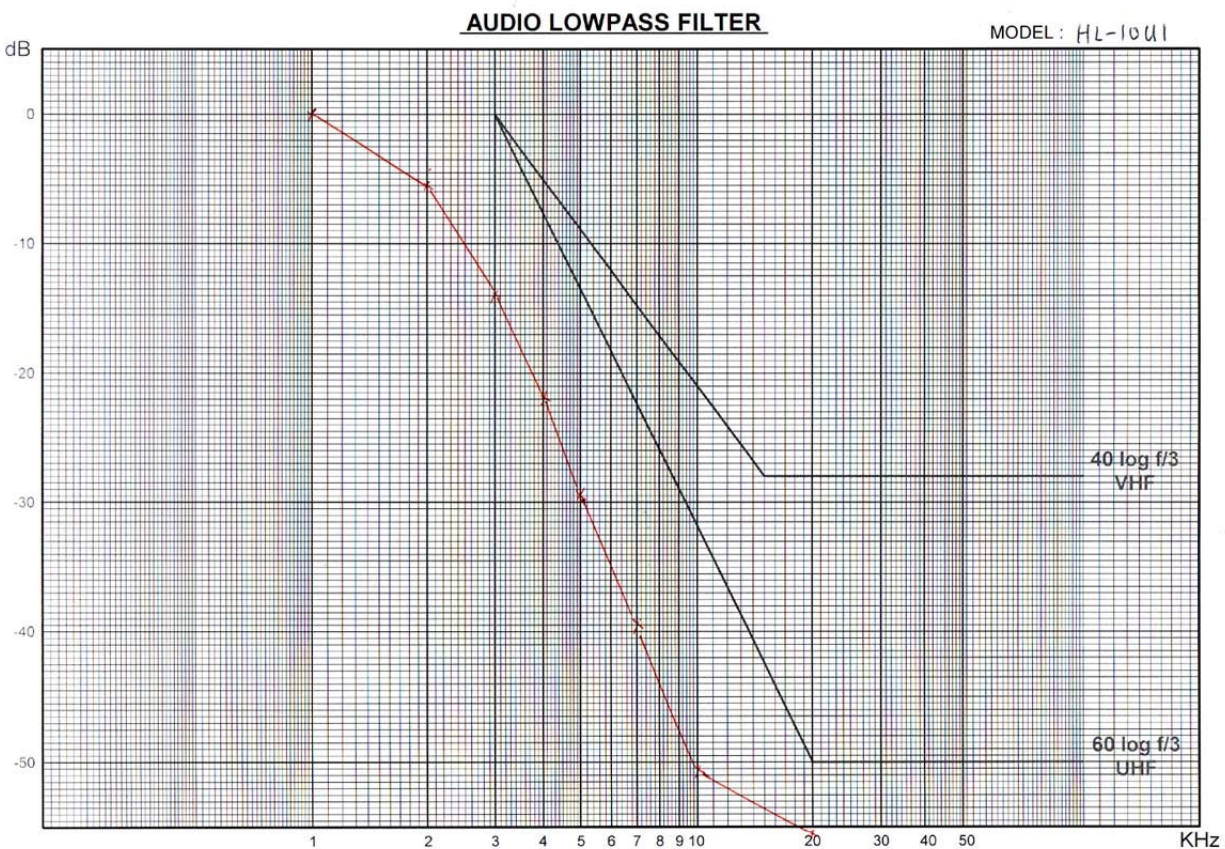

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669



<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1047(b)

### Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, 2500, and 3000 Hz.

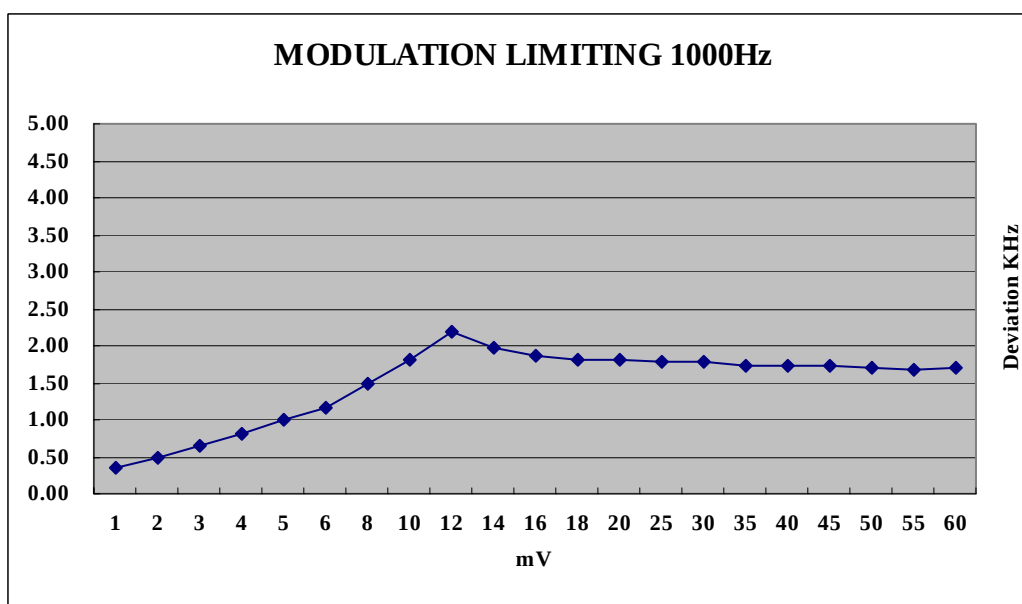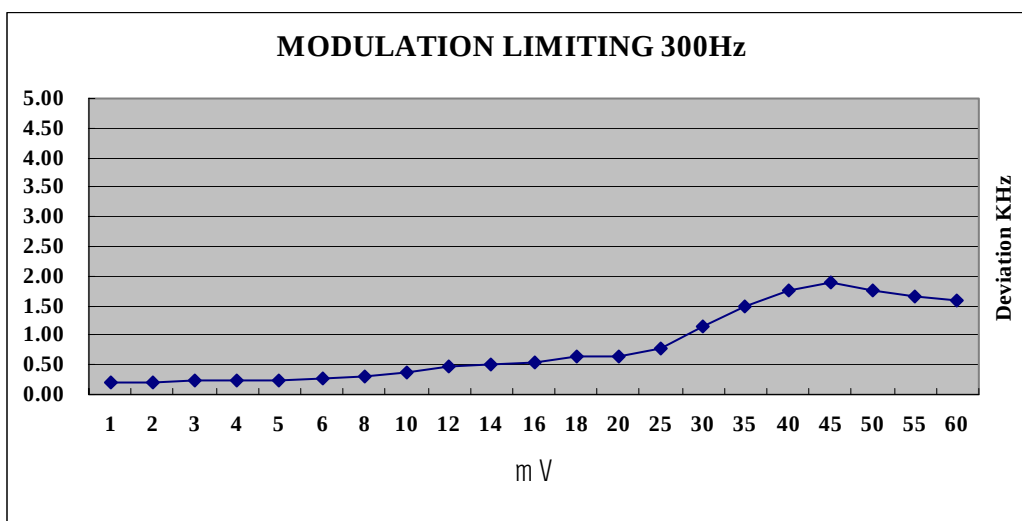

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do



# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1047(b)

### Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, 2500, and 3000 Hz.

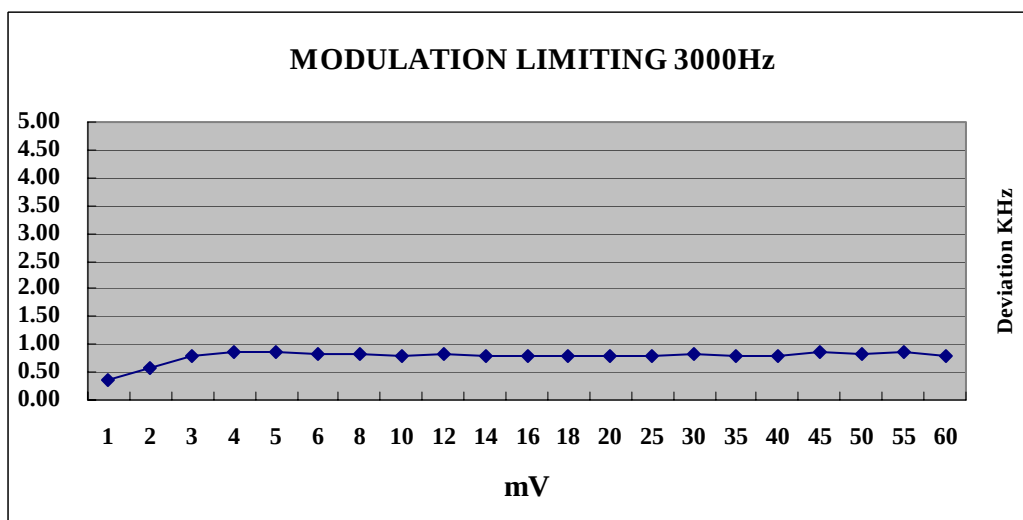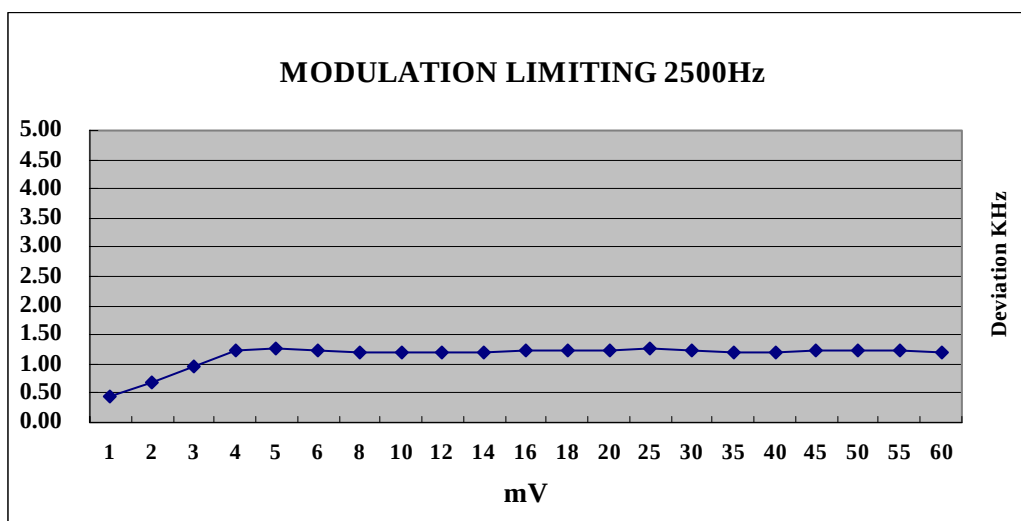

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do



# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## **2.1049      Occupied bandwidth:**

## **2.1049(c)   EMISSION BANDWIDTH:**

### **90.210 (b)   25kHz Channel Spacing**

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least  $43 + 10\log(P)$ dB.

### **90.210 (c)   12.5kHz Channel Spacing Not Equipped with a Low Pass Filter**

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows;

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5 kHz but not more than 10 kHz: At least  $83 \log(f_d/5)$  dB;
- (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least  $29 \log(f_d^2/11)$ dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least  $43 + 10 \log(P_o)$ dB.

### **90.210 (d)   Emission Mask D - 12.5 kHz channel BW equipment**

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27 (f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10\log(P)$  dB or 70 dB, whichever is the lesser attenuation.

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 90.210 (e) Emission Mask E – 6.25 kHz channel BW equipment

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d - 3.0 \text{ kHz})$  or  $55 + 10 \text{ Log}(P)$  or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \text{ log}(P)$  dB or 65 dB, whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter:

Test procedure diagram

### OCCUPIED BANDWIDTH MEASUREMENT

Occupied BW Test Equipment Setup

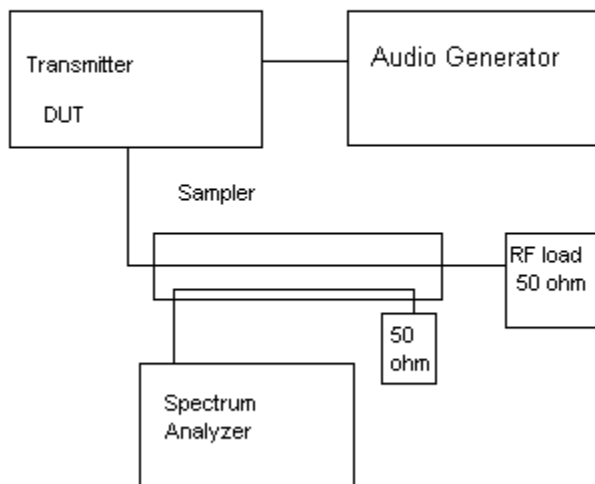

**APPLICANT:** HEADLINE INFORMATIONS & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.




849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## OCCUPIED BANDWIDTH 3.78 WATTS

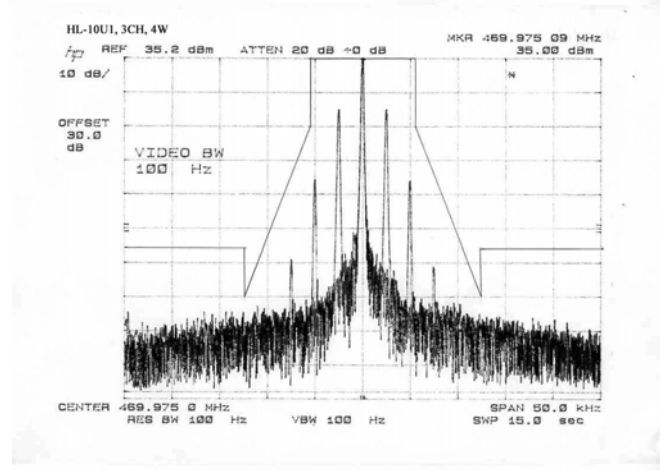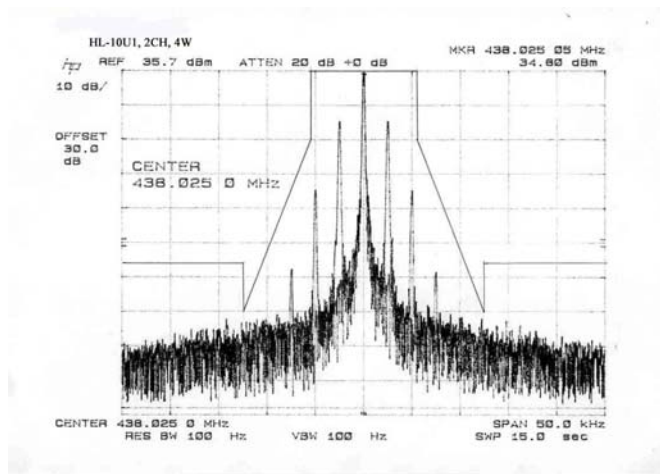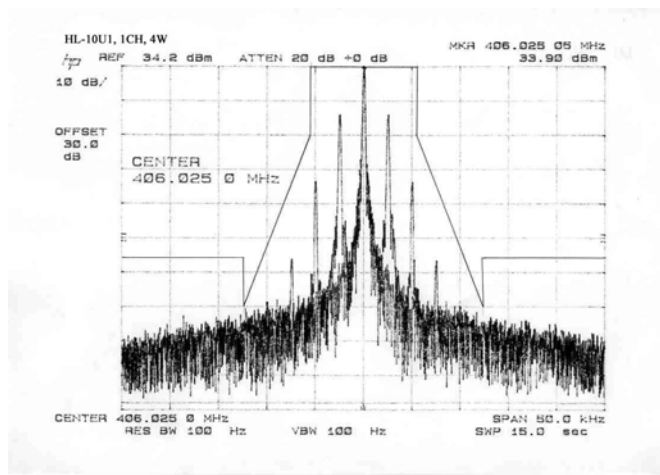

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## OCCUPIED BANDWIDTH 1 WATT

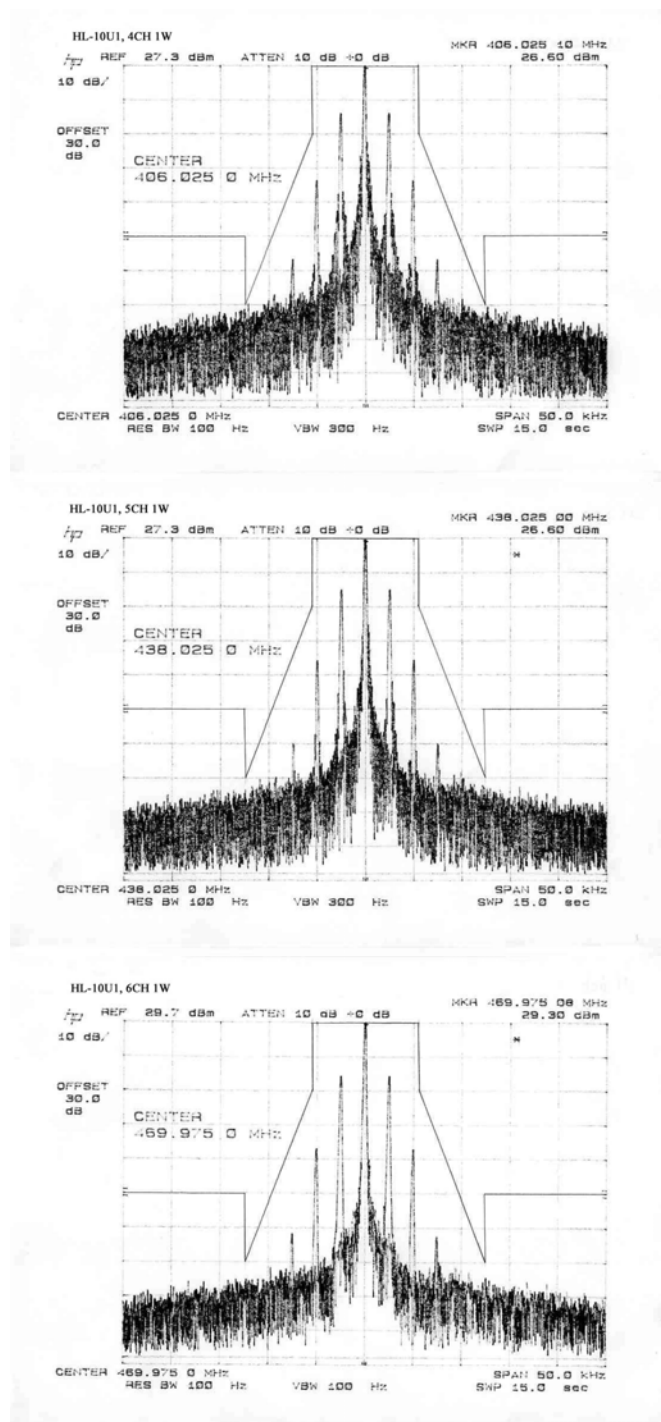

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)



## 2.1051(a)

### Spurious emissions at antenna terminals (conducted)(1 W):

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

#### FCC Limit for:

12.5kHz Spacing = H: 55.77 dB & L: 50 dB

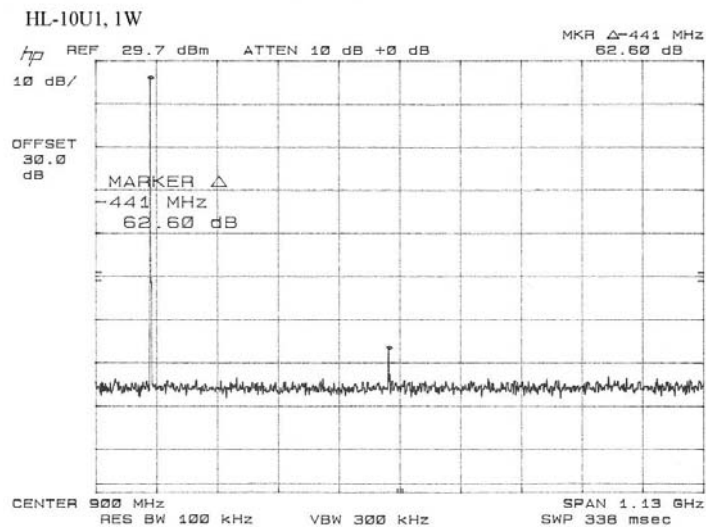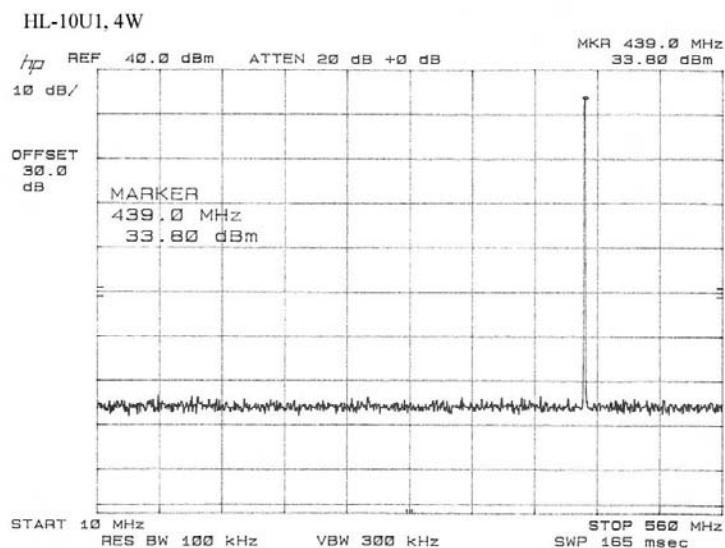

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669



<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1051(a)

### Spurious emissions at antenna terminals (conducted)(1 W):

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

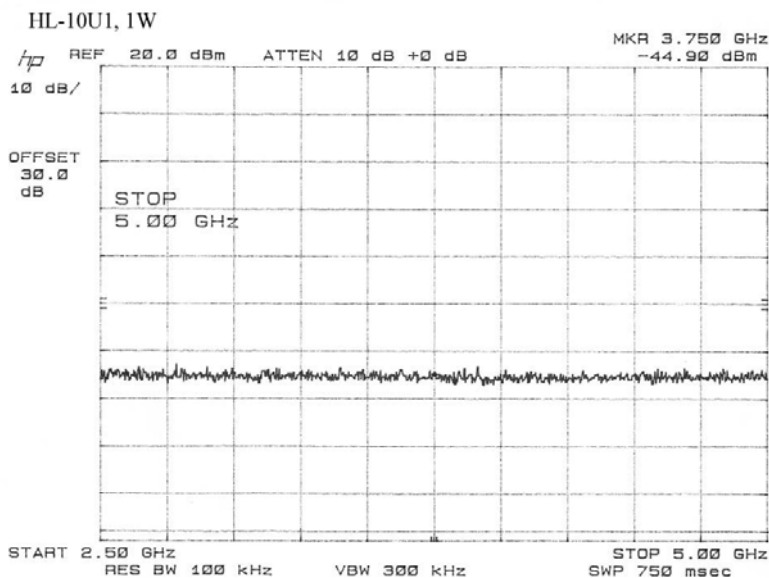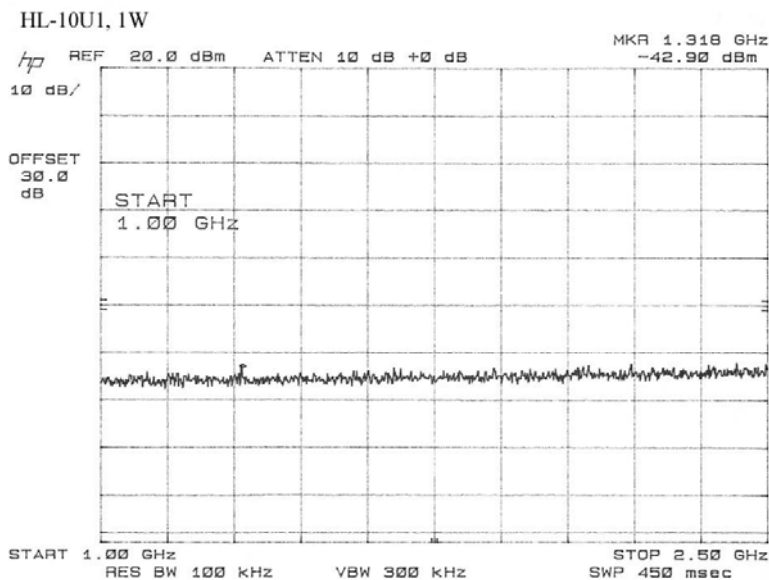

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do



# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1051(a)

### Spurious emissions at antenna terminals (conducted)(3.78W)

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

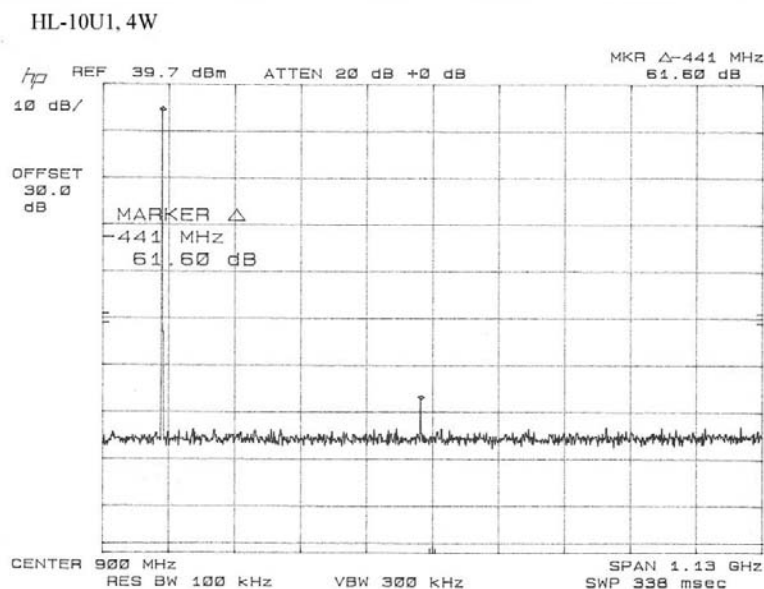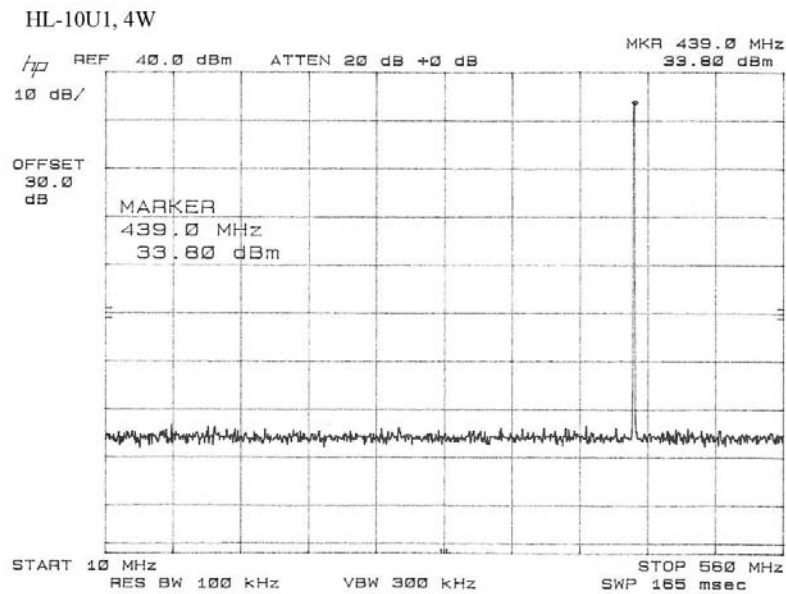

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do



# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669



<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 2.1051(a)

### Spurious emissions at antenna terminals (conducted)(3.78W)

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

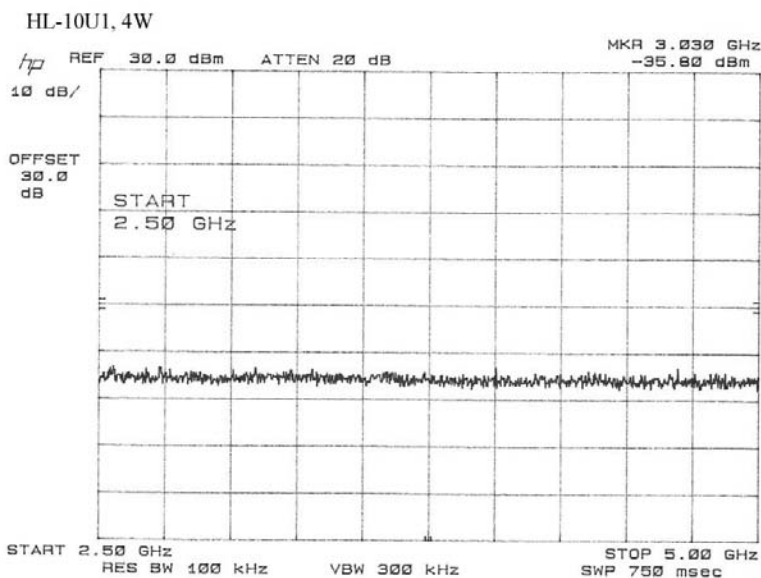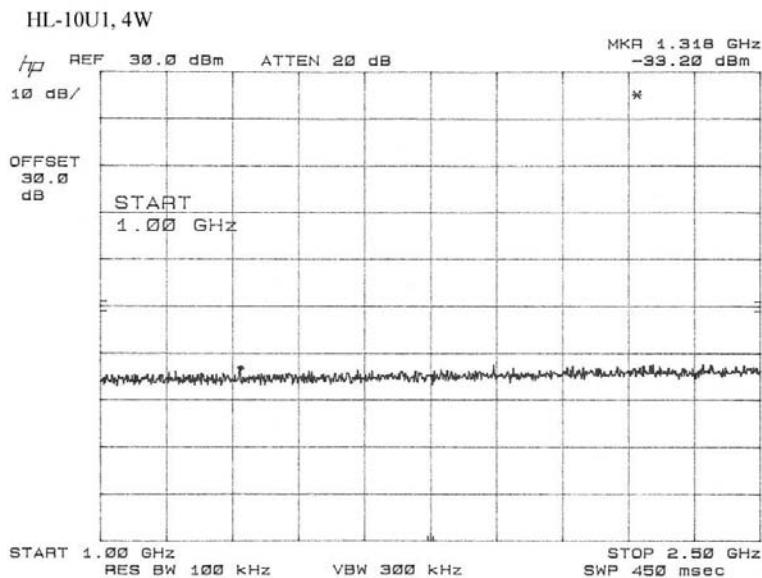

APPLICANT: HEADLINE INFORMATION & COMMUNICATION

FCC ID: QREHL-10U1


REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do



# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## Method of Measuring Conducted Spurious Emissions

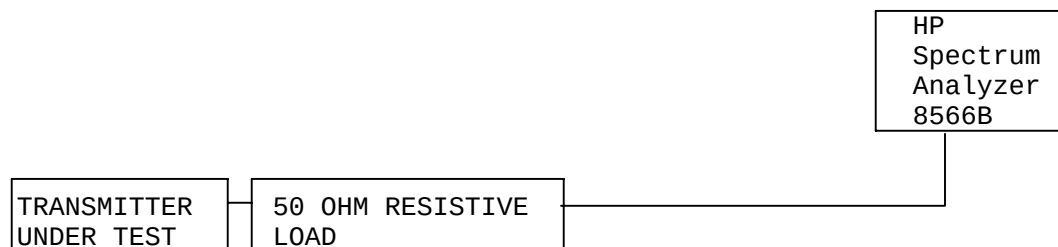

**METHOD OF MEASUREMENT:** The procedure used was TIA/EIA-603 STANDARD without any exceptions. The measurements were made at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

2.1053

## Field strength of spurious emissions:

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (406 MHz)

**REQUIREMENTS:** The FCC Limits for radiated emissions are the same as previously stated for the conducted emissions.

### TEST DATA (HIGH):

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 406.00                 | 0             | 35.77                        | 0              | 0                          | 0                      |
| 812.00                 | V             | -23.70                       | 0              | -1.25                      | 60.72                  |
| 1218.00                | V             | -26.40                       | 1.04           | 3.82                       | 59.39                  |
| 1624.00                | H             | -38.50                       | 1.12           | 5.02                       | 70.37                  |
| 2030.00                | V             | -40.80                       | 1.21           | 5.35                       | 72.43                  |
| 2436.00                | V             | -35.60                       | 1.29           | 6.65                       | 66.01                  |
| 2842.00                | H             | -46.80                       | 1.33           | 7.12                       | 76.78                  |
| 3248.00                | H             | -51.30                       | 1.37           | 7.4                        | 81.04                  |
| 3654.00                | H             | -52.10                       | 1.42           | 7.55                       | 81.74                  |
| 4060.00                | H             | -46.00                       | 1.46           | 7.65                       | 75.58                  |

### TEST DATA (LOW):

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 406.00                 | 0             | 30.00                        | 0              | 0                          | 0                      |
| 812.00                 | V             | -20.90                       | 0              | -1.25                      | 52.15                  |
| 1218.00                | H             | -34.30                       | 1.04           | 3.82                       | 61.52                  |
| 1624.00                | H             | -40.60                       | 1.12           | 5.02                       | 66.7                   |
| 2030.00                | H             | -43.30                       | 1.21           | 5.35                       | 69.16                  |
| 2436.00                | H             | -41.80                       | 1.29           | 6.65                       | 66.44                  |
| 2842.00                | H             | -48.00                       | 1.33           | 7.12                       | 72.21                  |
| 3248.00                | H             | -49.50                       | 1.37           | 7.4                        | 73.47                  |
| 3654.00                | H             | -49.30                       | 1.42           | 7.55                       | 73.17                  |
| 4060.00                | H             | -50.10                       | 1.46           | 7.65                       | 73.91                  |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

2.1053

## Field strength of spurious emissions:

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (438 MHz)

**REQUIREMENTS:** The FCC Limits for radiated emissions are the same as previously stated for the conducted emissions.

### TEST DATA (HIGH):

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 438.00                 | 0             | 35.77                        | 0              | 0                          | 0                      |
| 876.00                 | V             | -25.90                       | 0              | -0.74                      | 62.41                  |
| 1314.00                | V             | -27.30                       | 1.06           | 4.21                       | 59.92                  |
| 1752.00                | H             | -49.60                       | 1.15           | 5.1                        | 81.42                  |
| 2190.00                | H             | -44.20                       | 1.24           | 5.86                       | 75.35                  |
| 2628.00                | V             | -33.30                       | 1.31           | 6.95                       | 63.43                  |
| 3066.00                | H             | -48.20                       | 1.36           | 7.29                       | 78.04                  |
| 3504.00                | H             | -45.10                       | 1.4            | 7.55                       | 74.72                  |
| 3942.00                | V             | -36.90                       | 1.44           | 7.55                       | 66.56                  |
| 4380.00                | V             | -42.30                       | 1.49           | 8.16                       | 71.4                   |

### TEST DATA (LOW):

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 438.00                 | 0             | 30.00                        | 0              | 0                          | 0                      |
| 876.00                 | V             | -26.60                       | 0              | -0.74                      | 57.34                  |
| 1314.00                | V             | -26.30                       | 1.06           | 4.21                       | 53.15                  |
| 1752.00                | H             | -50.40                       | 1.15           | 5.1                        | 76.45                  |
| 2190.00                | H             | -47.20                       | 1.24           | 5.86                       | 72.58                  |
| 2628.00                | V             | -34.30                       | 1.31           | 6.95                       | 58.66                  |
| 3066.00                | H             | -50.60                       | 1.36           | 7.29                       | 74.67                  |
| 3504.00                | H             | -45.90                       | 1.4            | 7.55                       | 69.75                  |
| 3942.00                | H             | -45.90                       | 1.44           | 7.55                       | 69.79                  |
| 4380.00                | V             | -46.30                       | 1.49           | 8.16                       | 69.63                  |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

2.1053

## Field strength of spurious emissions:

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (470 MHz)

**REQUIREMENTS:** The FCC Limits for radiated emissions are the same as previously stated for the conducted emissions.

### TEST DATA (HIGH):

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 470.00                 | 0             | 35.77                        | 0              | 0                          | 0                      |
| 940.00                 | V             | -23.90                       | 0              | -1.03                      | 60.7                   |
| 1410.00                | V             | -24.40                       | 1.08           | 4.59                       | 56.66                  |
| 1880.00                | H             | -37.90                       | 1.18           | 5.18                       | 69.67                  |
| 2350.00                | V             | -32.40                       | 1.27           | 6.37                       | 63.07                  |
| 2820.00                | H             | -36.00                       | 1.33           | 7.11                       | 65.99                  |
| 3290.00                | H             | -44.10                       | 1.38           | 7.42                       | 73.83                  |
| 3760.00                | H             | -39.90                       | 1.43           | 7.55                       | 69.55                  |
| 4230.00                | V             | -42.70                       | 1.47           | 7.92                       | 72.02                  |
| 4700.00                | V             | -38.00                       | 1.54           | 8.11                       | 67.2                   |

### TEST DATA (LOW):

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 470.00                 | 0             | 30.00                        | 0              | 0                          | 0                      |
| 940.00                 | V             | -32.30                       | 0              | -1.03                      | 63.33                  |
| 1410.00                | H             | -29.70                       | 1.08           | 4.59                       | 56.19                  |
| 1880.00                | H             | -35.70                       | 1.18           | 5.18                       | 61.7                   |
| 2350.00                | V             | -35.60                       | 1.27           | 6.37                       | 60.5                   |
| 2820.00                | V             | -41.50                       | 1.33           | 7.11                       | 65.72                  |
| 3290.00                | H             | -45.90                       | 1.38           | 7.42                       | 69.86                  |
| 3760.00                | H             | -43.00                       | 1.43           | 7.55                       | 66.88                  |
| 4230.00                | V             | -44.20                       | 1.47           | 7.92                       | 67.75                  |
| 4700.00                | V             | -37.30                       | 1.54           | 8.11                       | 60.73                  |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION


**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## Method of Measuring Radiated Spurious Emissions

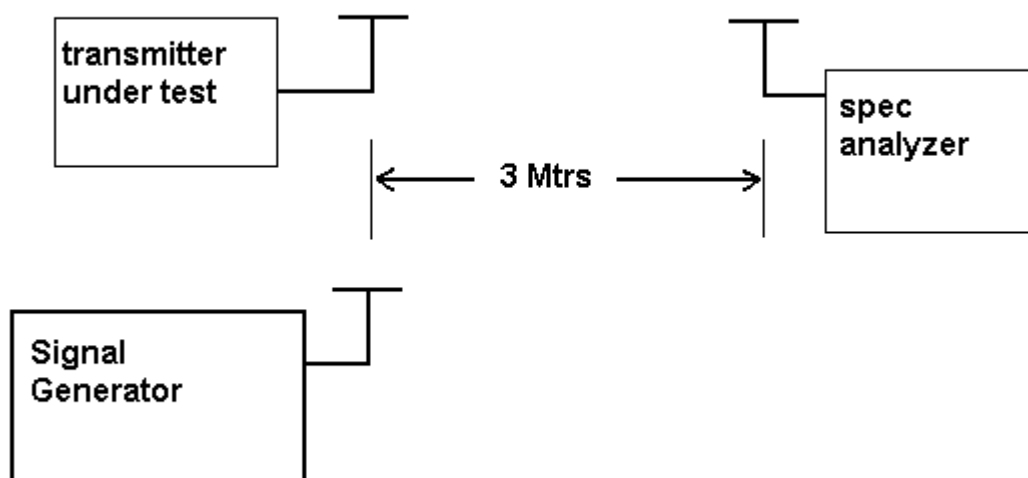

**METHOD OF MEASUREMENTS:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

**2.1055**  
**90.213(a)(1)**  
**90.266(b)(3)**

**Frequency stability:**

Frequency Stability Requirement: 2.5

Temperature range requirements: -30 to +50° C.

Voltage Variation +, - 15%.

Measurement procedure per TIA/EIA 603.

## MEASUREMENT DATA:

| TEMPERATURE                       | FREQUENCY(MHz) | ppm   | LIMIT(ppm) |
|-----------------------------------|----------------|-------|------------|
| REFERENCE                         | 406.025        | 0     |            |
| -30                               | 406.02484      | -0.39 | 2.5        |
| -20                               | 406.02487      | -0.32 | 2.5        |
| -10                               | 406.02487      | -0.32 | 2.5        |
| 0                                 | 406.02488      | -0.30 | 2.5        |
| 10                                | 406.02495      | -0.12 | 2.5        |
| 20                                | 406.02502      | 0.05  | 2.5        |
| 30                                | 406.02507      | 0.17  | 2.5        |
| 40                                | 406.02505      | 0.12  | 2.5        |
| 50                                | 406.02503      | 0.07  | 2.5        |
| BATTERY voltage variation<br>+15% | 406.02506      | 0.15  | 2.5        |
| BATTERY voltage variation<br>-15% | 406.02506      | 0.15  | 2.5        |

**RESULTS OF MEASUREMENTS:** The test results indicates that the EUT meets the requirements.

**APPLICANT:** HEADLINE INFORMATIONS & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

**2.1055(a)(1)**  
**90.214**

## **Frequency stability: Transient Frequency Behavior**

**REQUIREMENTS:** Transmitters designed to operate in the 150 - 174 MHz and 421 - 512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals | Maximum frequency difference | All Equipment |             |
|----------------|------------------------------|---------------|-------------|
|                |                              | 150-174 MHz   | 421-512 MHz |

### Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

|         |           |         |         |
|---------|-----------|---------|---------|
| $t_1^4$ | ±25.0 kHz | 5.0 mS  | 10.0 mS |
| $t_2$   | ±12.5 kHz | 20.0 mS | 25.0 mS |
| $t_3^4$ | ±25.0 kHz | 5.0 mS  | 10.0 mS |

### Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

|         |           |         |         |
|---------|-----------|---------|---------|
| $t_1^4$ | ±12.5 kHz | 5.0 mS  | 10.0 mS |
| $t_2$   | ±6.25 kHz | 20.0 mS | 25.0 mS |
| $t_3^4$ | ±12.5 kHz | 5.0 mS  | 10.0 mS |

### Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

|         |            |         |         |
|---------|------------|---------|---------|
| $t_1^4$ | ±6.25 kHz  | 5.0 mS  | 10.0 mS |
| $t_2$   | ±3.125 kHz | 20.0 mS | 25.0 mS |
| $t_3^4$ | ±6.25 kHz  | 5.0 mS  | 10.0 mS |


**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

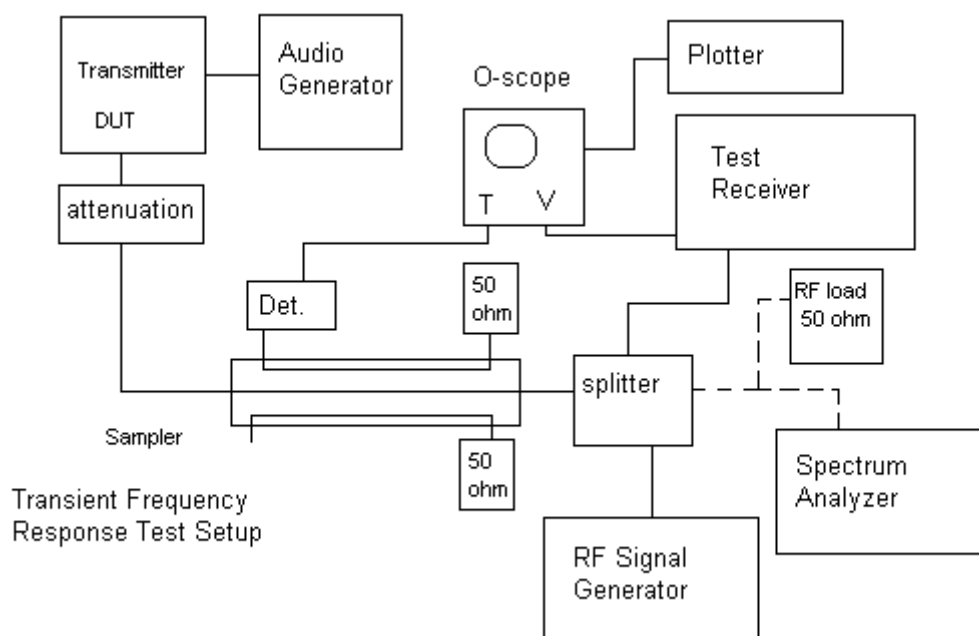

Page 22 of 30



# TIMCO ENGINEERING INC.



849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## TRANSIENT FREQUENCY RESPONSE LOW POWER

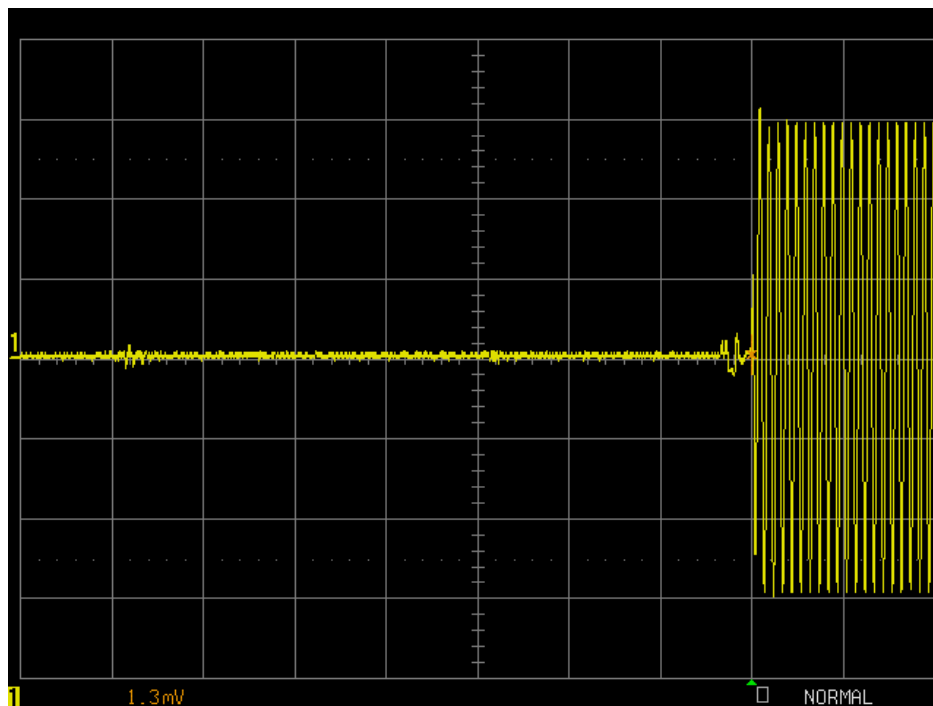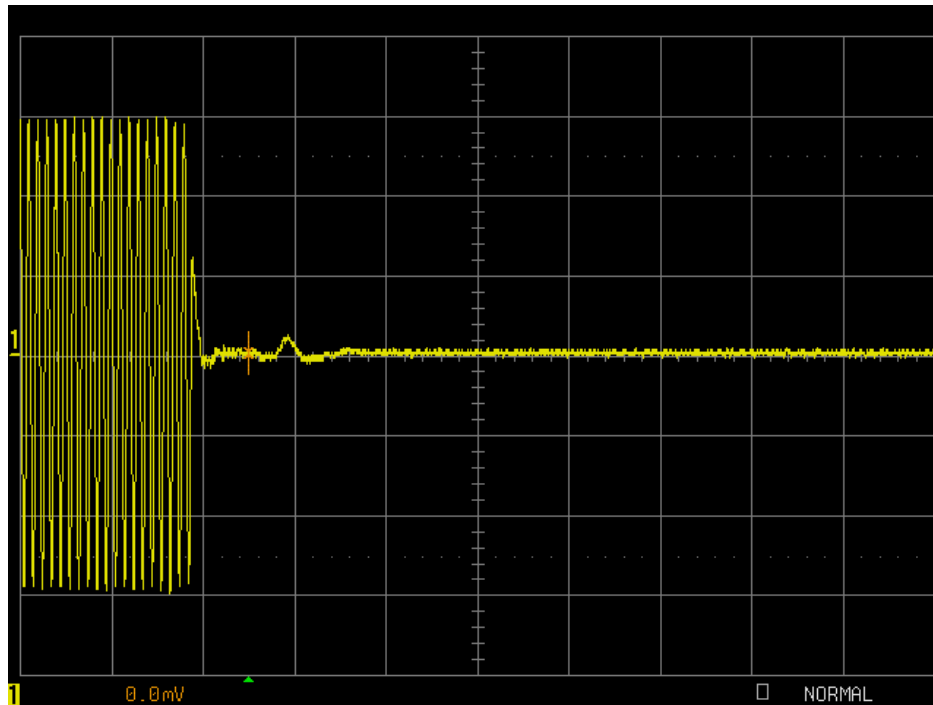

APPLICANT: HEADLINE INFORMATIONS & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.



849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## TRANSIENT FREQUENCY RESPONSE HIGH POWER

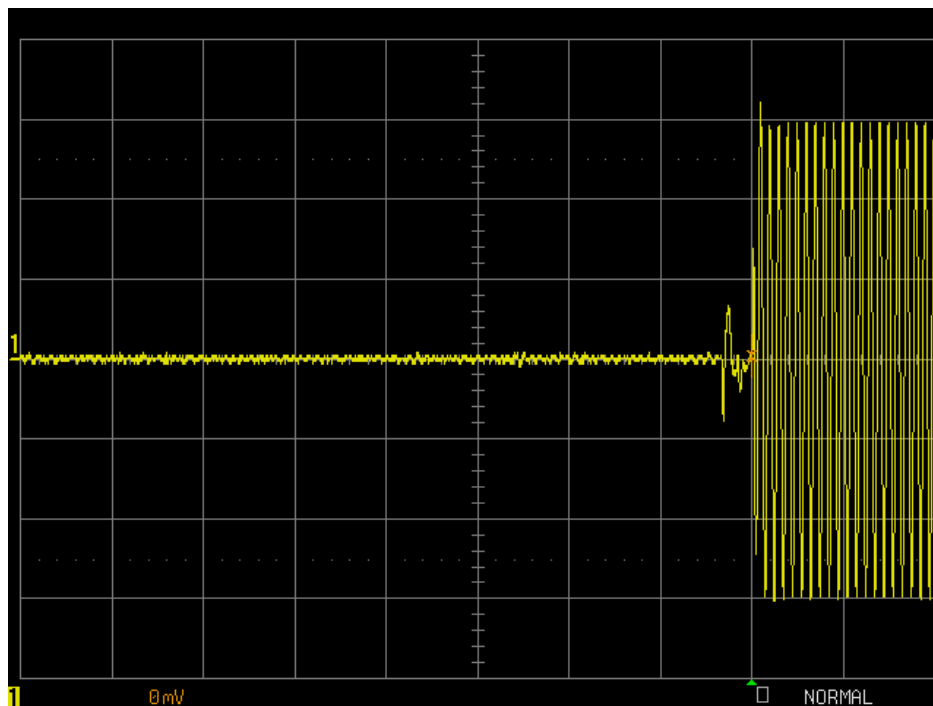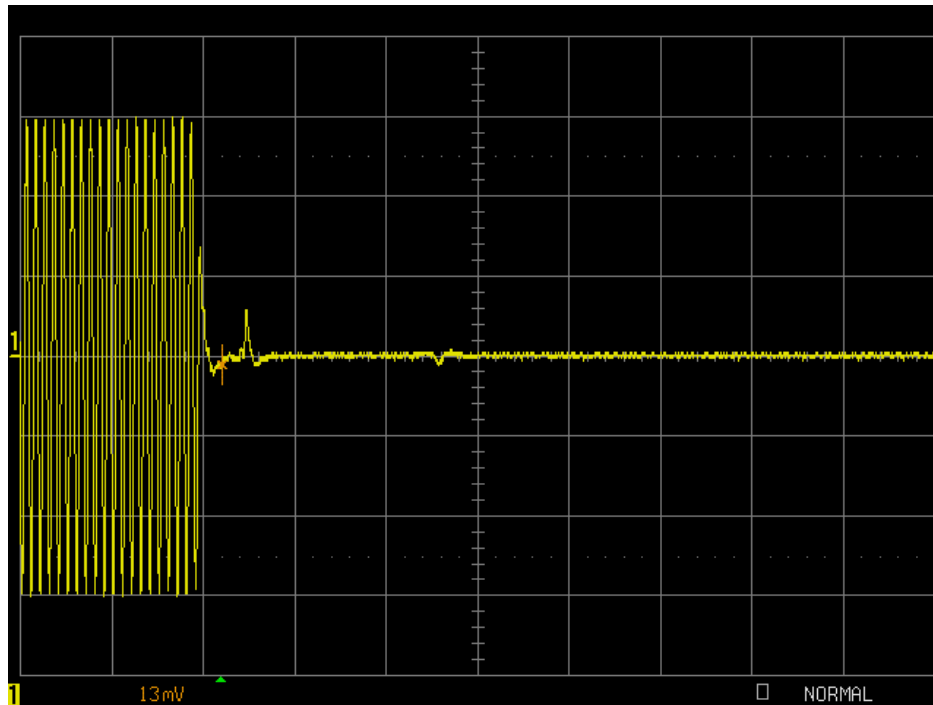

APPLICANT: HEADLINE INFORMATIONS & COMMUNICATION

FCC ID: QREHL-10U1

REPORT #: H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## EMC Equipment List

| Device                          | Manufacturer    | Model         | Serial Number         | Cal/Char Date   | Due Date or Status |
|---------------------------------|-----------------|---------------|-----------------------|-----------------|--------------------|
| 3-Meter OATS                    | TEI             | N/A           | N/A                   | Listed 1/13/03  | 1/12/06            |
| 3/10-Meter OATS                 | TEI             | N/A           | N/A                   | Listed 3/27/04  | 3/26/07            |
| Tan Tower Spectrum Analyzer     | HP              | 8566B Opt 462 | 3138A07786 3144A20661 | CAL 9/23/03     | 9/23/05            |
| Tan Tower RF Preselector        | HP              | 85685A        | 3221A01400            | CAL 9/23/03     | 9/23/05            |
| Tan Tower Quasi-Peak Adapter    | HP              | 85650A        | 3303A01690            | CAL 9/23/03     | 9/23/05            |
| Tan Tower Preamplifier          | HP              | 8449B-H02     | 3008A00372            | CAL 9/23/03     | 9/23/05            |
| Blue Tower Spectrum Analyzer    | HP              | 8568B         | 2928A04729 2848A18049 | CAL 4/15/03     | 4/15/05            |
| Blue Tower RF Preselector       | HP              | 85685A        | 2620A00294            | CAL 4/27/04     | 4/27/06            |
| Blue Tower Quasi-Peak Adapter   | HP              | 85650A        | 2811A01279            | CAL 4/15/03     | 4/15/05            |
| Silver Tower Spectrum Analyzer  | HP              | 8566B Opt 462 | 3552A22064 3638A08608 | CAL 3/22/04     | 3/22/06            |
| Silver Tower RF Preselector     | HP              | 85685A        | 2926A00983            | CAL 3/22/04     | 3/22/06            |
| Silver Tower Quasi-Peak Adapter | HP              | 85650A        | 3303A01844            | CAL 3/22/04     | 3/22/06            |
| Silver Tower Preamplifier       | HP              | 8449B         | 3008A01075            | CAL 3/22/04     | 3/22/06            |
| Biconnical Antenna              | Electro-Metrics | BIA-25        | 1171                  | CAL 4/26/01     | 4/26/03            |
| Biconnical Antenna              | Eaton           | 94455-1       | 1096                  | CAL 8/17/04     | 8/17/06            |
| Biconnical Antenna              | Eaton           | 94455-1       | 1057                  | CAL 3/18/03     | 3/18/05            |
| BiconiLog Antenna               | EMCO            | 3143          | 9409-1043             | No Cal Required |                    |
| Log-Periodic Antenna            | Electro-Metrics | LPA-25        | 1122                  | CAL 8/26/04     | 8/26/06            |
| Log-Periodic Antenna            | Electro-Metrics | LPA-30        | 409                   | CAL 3/4/03      | 3/4/05             |
| Log-Periodic                    | Eaton           | 96005         | 1243                  | CAL             | 5/8/05             |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

| Device                           | Manufacturer                | Model      | Serial Number | Cal/Char Date | Due Date or Status |
|----------------------------------|-----------------------------|------------|---------------|---------------|--------------------|
| Antenna                          |                             |            |               | 5/8/03        |                    |
| Dipole Antenna Kit               | Electro-Metrics             | TDA-30/1-4 | 152           | CAL 3/21/01   | 3/21/04            |
| Dipole Antenna Kit               | Electro-Metrics             | TDA-30/1-4 | 153           | CAL 9/26/02   | 9/26/05            |
| Double-Ridged Horn Antenna       | Electro-Metrics             | RGA-180    | 2319          | CAL 2/17/03   | 2/17/05            |
| Horn Antenna *(at 3 meters)      | Electro-Metrics             | EM-6961    | 6246          | CAL 3/31/03   | 3/31/05            |
| Horn Antenna *(at 10 meters)     | Electro-Metrics             | EM-6961    | 6246          | CAL 6/4/03    | 6/4/05             |
| Passive Loop Antenna             | EMC Test Systems            | EMCO 6512  | 9706-1211     | CHAR 7/10/01  | 7/10/03            |
| Harmonic Mixer with Horn Antenna | Oleson Microwave Labs       | M08HW/A    | F30425-1      | CHAR 4/25/03  | 4/25/05            |
| Harmonic Mixer with Horn Antenna | Oleson Microwave Labs       | M12HW/A    | E30425-1      | CHAR 4/25/03  | 4/25/05            |
| LISN                             | Electro-Metrics             | ANS-25/2   | 2604          | CAL 8/27/04   | 8/27/06            |
| LISN                             | Electro-Metrics             | EM-7820    | 2682          | CAL 3/12/03   | 3/12/05            |
| Termaline Wattmeter              | Bird Electronic Corporation | 611        | 16405         | CAL 7/16/04   | 7/16/06            |
| Termaline Wattmeter              | Bird Electronic Corporation | 6104       | 1926          | CAL 7/16/04   | 7/16/06            |
| Oscilloscope                     | Tektronix                   | 2230       | 300572        | CAL 7/3/03    | 7/3/05             |
| System One                       | Audio Precision             | System One | SYS1-45868    | CHAR 4/25/02  | 4/25/04            |
| Temperature Chamber              | Tenney Engineering          | TTRC       | 11717-7       | CHAR 1/22/02  | 1/22/04            |
| AC Voltmeter                     | HP                          | 400FL      | 2213A14499    | CAL 7/19/04   | 7/19/06            |
| AC Voltmeter                     | HP                          | 400FL      | 2213A14261    | CHAR 10/15/01 | 10/15/03           |
| AC Voltmeter                     | HP                          | 400FL      | 2213A14728    | CHAR 10/15/01 | 10/15/03           |
| Digital Multimeter               | Fluke                       | 77         | 35053830      | CHAR 1/8/02   | 1/8/04             |
| Digital Multimeter               | Fluke                       | 77         | 43850817      | CHAR 1/8/02   | 1/8/04             |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

| Device                 | Manufacturer         | Model           | Serial Number | Cal/Char Date | Due Date or Status |
|------------------------|----------------------|-----------------|---------------|---------------|--------------------|
| Digital Multimeter     | HP                   | E2377A          | 2927J05849    | CHAR 1/8/02   | 1/8/04             |
| Multimeter             | Fluke                | FLUKE-77-3      | 79510405      | CHAR 9/26/01  | 9/26/03            |
| Peak Power Meter       | HP                   | 8900C           | 2131A00545    | CAL 7/2/03    | 7/2/05             |
| Power Sensor           | Agilent Technologies | 84811A          | 2551A02705    | CAL 7/2/03    | 7/2/05             |
| Power Meter            | HP                   | 432A            | 1141A07655    | CAL 4/15/03   | 4/15/05            |
| Power Sensor           | HP                   | 478A            | 72129         | CAL 4/15/03   | 4/15/05            |
| Power Meter And Sensor | Bird                 | 4421-107 & 4022 | 0166 & 0218   | CAL 4/16/03   | 4/16/05            |
| Digital Thermometer    | Fluke                | 2166A           | 42032         | CAL 7/19/04   | 7/19/06            |
| Thermometer            | Traulsen             | SK-128          |               | CHAR 1/22/02  | 1/22/04            |
| Thermometer            | Extech               | 4028            | 14871-2       | CAL 3/7/03    | 3/7/05             |
| Hygro-Thermometer      | Extech               | 445703          | 0602          | CAL 10/4/02   | 10/4/04            |
| Frequency Counter      | HP                   | 5352B           | 2632A00165    | CAL 8/3/04    | 8/3/06             |
| Frequency Counter      | HP                   | 5385A           | 2730A03025    | CAL 3/7/03    | 3/7/05             |
| Service Monitor        | IFR                  | FM/AM 500A      | 5182          | CAL 11/22/00  | Out of Service     |
| Comm. Serv. Monitor    | IFR                  | FM/AM 1200S     | 6593          | CAL 5/12/02   | 5/12/04            |
| Signal Generator       | HP                   | 8640B           | 2308A21464    | CAL 8/26/04   | 8/26/06            |
| Sweep Generator        | Wiltron              | 6648            | 101009        | CAL 4/15/03   | 4/15/05            |
| Sweep Generator        | Wiltron              | 6669M           | 007005        | CAL 3/3/03    | 3/3/05             |
| Modulation Analyzer    | HP                   | 8901A           | 3435A06868    | CAL 9/5/01    | 9/5/03             |
| Modulation Meter       | Boonton              | 8220            | 10901AB       | CAL 4/15/03   | 4/15/05            |
| Near Field Probe       | HP                   | HP11940A        | 2650A02748    | CHAR 2/1/01   | Out of Service     |
| BandReject Filter      | Lorch                | 5BR4-           | Z1            | CHAR          | 4/17/05            |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

| Device                                 | Manufacturer                  | Model            | Serial Number | Cal/Char Date   | Due Date or Status |
|----------------------------------------|-------------------------------|------------------|---------------|-----------------|--------------------|
|                                        | Microwave                     | 2400/60-N        |               | 4/17/03         |                    |
| BandReject Filter                      | Lorch Microwave               | 6BR6-2442/300-N  | Z1            | CHAR 4/17/03    | 4/17/05            |
| BandReject Filter                      | Lorch Microwave               | 5BR4-10525/900-S | Z1            | CHAR 4/12/03    | 4/12/05            |
| Notch Filter                           | Lorch Microwave               | 5BRX-850/X100-N  | AD-1          | CHAR 4/17/03    | 4/17/05            |
| High Pass Filter                       | Unk                           | 3768(5)-400      | 041           | CHAR 12/17/02   | 12/17/04           |
| High Pass Filter                       | Microlab                      | HA-10N           |               | CHAR 11/17/02   | 11/17/04           |
| High Pass Filter                       | Microlab                      | HA-20N           |               | CHAR 12/17/02   | 12/17/04           |
| Audio Oscillator                       | HP                            | 653A             | 832-00260     | CHAR 12/1/02    | 12/1/04            |
| Audio Generator                        | B&K Precision                 | 3010             | 8739686       | CHAR 12/1/02    | 12/1/04            |
| Frequency Counter                      | HP                            | 5382A            | 1620A03535    | CHAR 3/2/01     | Out of Service     |
| Frequency Counter                      | HP                            | 5385A            | 3242A07460    | CAL 3/7/03      | 3/7/05             |
| Amplifier                              | HP                            | 11975A           | 2738A01969    | No Cal Required |                    |
| Egg Timer                              | Unk                           |                  |               | CHAR 2/1/02     | 2/1/04             |
| Measuring Tape-20M                     | Kraftixx                      | 0631-20          |               | CHAR 2/1/02     | 2/1/04             |
| Measuring Tape-7.5M                    | Kraftixx                      | 7.5M PROFI       |               | CHAR 2/1/02     | 2/1/04             |
| Coaxial Cable #51                      | Insulated Wire Inc.           | NPS 2251-2880    | Timco #51     | CHAR 1/23/02    | 1/23/04            |
| Coaxial Cable #64                      | Semflex Inc.                  | 60637            | Timco #64     | CHAR 1/24/02    | 1/24/04            |
| Coaxial Cable #65                      | General Cable Co.             | E9917 RG233/U    | Timco #65     | CHAR 1/23/02    | 1/23/04            |
| Coaxial Cable #106                     | Unknown                       | Unknown          | Timco #106    | CHAR 1/23/02    | 1/23/04            |
| Injection Probe                        | Fischer Custom Communications | F-120-9A         | 270           | CAL 6/1/01      | 6/1/03             |
| Power Line Coupling/Decoupling Network | Fischer Custom Communications | FCC-801-M2-16A   | 01048         | CAL 8/29/01     | 8/29/03            |
| Power Line                             | Fischer Custom                | FCC-801-M3-      | 01060         | CAL             | 8/29/03            |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

| Device                                   | Manufacturer                  | Model                | Serial Number  | Cal/Char Date   | Due Date or Status |
|------------------------------------------|-------------------------------|----------------------|----------------|-----------------|--------------------|
| Coupling/Decoupling Network              | Communications                | 16A                  |                | 8/29/01         |                    |
| VHF/UHF Current Probe                    | Fischer Custom Communications | F-52                 | 130            | CAL 8/30/01     | 8/30/03            |
| Passive Impedance Adapter                | Fischer Custom Communications | FCC-801-150-50-CDN   | 01117 & 01118  | CAL 8/29/01     | 8/29/03            |
| Radiating Field Coil                     | Fischer Custom Communications | F-1000-4-8/9/10-L-1M | 9859           | CAL 10/15/98    | 10/15/00           |
| EMC Immunity Test System                 | Keytek                        | CEMASTER             | 9810210        | CAL 2/1/02      | 2/1/04             |
| Compliance Test System - AC Power Source | California Instruments        | 1251RP               | L05865         | CAL 2/25/04     | 2/25/06            |
| Compliance Test System - PACS-1 Module   | California Instruments        | PACS-1               | X71484         | CAL 2/25/04     | 2/25/06            |
| Isotropic Field Probe                    | Amplifier Research            | FP5000               | 22839          |                 |                    |
| Isotropic Field Probe                    | Amplifier Research            | FP5000               | 300103         |                 |                    |
| Capacitor Clamp                          | Keytek                        | CM-CCL               | 9811359        | No Cal Required |                    |
| Amplifier                                | Amplifier Research            | 10W1000B             | 23117          | No Cal Required |                    |
| Field Monitor                            | Amplifier Research            | FM5004               | 22288          | No Cal Required |                    |
| ELF Meter                                | F. W. Bell                    | 4060                 | Not Serialized |                 | Out of Service     |
| Standard Gain Horn 1.0-2.4 GHz           | Polarad                       | CA-L                 | 235            | No Cal Required |                    |
| Standard Gain Horn 2.14-4.34 GHz         | Polarad                       | CA-S                 | 203            | No Cal Required |                    |
| Standard Gain Horn 3.95-5.85 GHz         | Scientific-Atlanta Inc.       | 11A-3.9              | 8448CG         | No Cal Required |                    |
| Standard Gain Horn 8.2-12.5 GHz          | Systron Donner                | DBG-520-20           | Not Serialized | No Cal Required |                    |
| Standard Gain Horn 18.0-26.3 GHz         | Systron Donner                | DBE-520-20           | Not Serialized | No Cal Required |                    |
| Standard Gain Horn 26.5-40.2 GHz         | Systron Donner                | DBD-520-20           | Not Serialized | No Cal Required |                    |
| Standard Gain Horn 40.0-60.0 GHz         | ATM                           | 19-443-6R            | Not Serialized | No Cal Required |                    |
| Double-Ridged Horn                       | EMCO                          | 3116                 | 9011-2145      |                 | Out of             |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

| Device                                 | Manufacturer             | Model        | Serial Number         | Cal/Char Date      | Due Date or Status |
|----------------------------------------|--------------------------|--------------|-----------------------|--------------------|--------------------|
| Antenna                                |                          |              |                       |                    | Service            |
| Standard Gain Horn<br>12.4-18.0 GHz    | ATM                      | 62-442-6     | D262108-01            | No Cal<br>Required |                    |
| Standard Gain Horn<br>5.85-8.2 GHz     | ATM                      | 137-442-2    | D261908-01            | No Cal<br>Required |                    |
| AC Voltmeter                           | HP                       | 400F         | 0950A05433            | CAL<br>8/13/03     | 8/13/05            |
| RF Power Amplifier                     | Ophir RF                 | 5150F        | 1041 'X1'             | No Cal<br>Required |                    |
| Electric Field<br>Sensor               | Amplifier<br>Research    | FP6001       | 302504                |                    |                    |
| Electric Field<br>Sensor               | Amplifier<br>Research    | FP6001       | 302510                | CAL<br>6/1/04      | 6/1/06             |
| Surge Generator                        | Com-Power<br>Corporation | SG-168       | 25802                 | CAL<br>2/27/04     | 2/27/06            |
| RF Power Amplifier                     | Ophir RF, Inc.           | 5150F        | 1041                  | CHAR<br>10/31/03   | 10/31/05           |
| 3-Meter Anechoic<br>Chamber            | Panashield               | N/A          | N/A                   | Listed<br>5/12/04  | 5/11/07            |
| Digital Multimeter                     | Fluke                    | 77III        | 79510408              | CAL<br>7/19/04     | 7/19/06            |
| Open-Frame Tower<br>Spectrum Analyzer  | HP                       | 8566B/85662A | 2627A03154/2648A14276 | CAL<br>7/9/04      | 7/9/06             |
| Open-Frame Tower RF<br>Preselector     | HP                       | 85685A       | 3107A01282            | CAL<br>7/9/04      | 7/9/06             |
| Open-Frame Tower<br>Quasi-Peak Adapter | HP                       | 85650A       | 2046A00305            | CAL<br>7/9/04      | 7/9/06             |
| Signal Generator                       | HP                       | 8648C        | 3847A04696            | CAL<br>9/27/04     | 9/27/06            |

**APPLICANT:** HEADLINE INFORMATION & COMMUNICATION

**FCC ID:** QREHL-10U1

**REPORT #:** H\HEADLINE\_QRE\1989KT4\1989KT4TestReport.do