

EMC Test Report

FCCID: QRF-RAKT3KN2

Wireless Mesh Router

Tranzeo Wireless Technologies Inc.


Date: 27 April, 2007

Report No.: 270407.2

Labs: 19473 Fraser Way, Pitt Meadows, BC, Canada V3Y 2V4



Cam Finnigan
EMC Engineer



Sam Zahed
EMC Coordinator

Revision History

1. The power setting section of the corresponding manual and the power measurements of section 3 have been updated according to Timco's request.

Table of Contents

1.0	GENERAL INFORMATION	5
1.1	EUT Description.....	5
1.2	Operational Description.....	6
1.3	EUT Testing Configuration	6
1.4	EUT Antennas.....	7
1.5	EUT Modifications	7
1.6	Test Facilities	7
1.7	Test Equipment	7
1.8	Test System Details	8
1.9	Test Results	8
2.0	CONDUCTED EMISSIONS.....	9
2.1	Test Standard.....	9
2.2	Test Limits	9
2.3	Test Setup.....	9
2.3.1	Test Setup Block Diagram	9
2.4	Test Results	10
2.4.1	Test Data Peak Detector.....	10
2.4.2	Test Data Average Detector	11
3.0	PEAK POWER OUTPUT	12
3.1	Test Standard.....	12
3.2	Test Limits	12
3.3	Test Setup.....	13
3.3.1	Test Setup Block Diagram	13
3.4	Test Results	13
3.4.1	2.4 GHz frequency band	13
3.4.2	5.8 GHz frequency band	13
4.0	RADIATED EMISSIONS, GENERAL REQUIREMENTS	14
4.1	Test Standard.....	14
4.2	Test Limits	15
4.3	Test Setup.....	15
4.3.1	Test Setup Block Diagram	15
4.4	Test Results	16
5.0	HARMONIC AND SPURIOUS EMISSIONS.....	17
5.1	Test Standard.....	17
5.2	Test Limits	17
5.3	Test Setup – Spurious Emissions	17
5.3.1	Test Setup Block Diagram – Conducted Measurements (Harmonics).....	18
5.3.2	Test Setup Block Diagram – Radiated Measurements (Spurious).....	18
5.4	Test Results	19
5.4.1	Test Results 15.247–Harmonics -30 dBc.....	19
5.4.2	Test Results 15.247– Restricted Bands (Spurious Emissions)	21
6.0	BAND EDGE	22
6.1	Test Standard.....	22
6.2	Test Limits	22
6.3	Test Setup.....	22
6.3.1	Test Setup Block Diagram – Conducted Measurements	23
6.3.2	Test Setup Block Diagram – Radiated Measurements.....	23

6.4	Test Results	24
6.4.1	5725-5850 MHz, Conducted Measurements	24
6.4.2	2400-2483.5 MHz, Radiated Measurements	25
7.0	OCCUPIED BANDWIDTH	26
7.1	Test Standard	26
7.2	Test Limits	26
7.3	Test Setup	26
7.3.1	Test Setup Block Diagram	26
7.4	Test Results, 6 dB Occupied Bandwidth at 2.4 GHz Frequency band	27
7.4.1	DSSS Mode	27
7.4.2	OFDM Mode	28
7.4.3	Data Table – Occupied Bandwidth	29
7.5	Test Results, 6 dB Occupied Bandwidth at 5.8 GHz Frequency band	30
7.5.1	Data Table – Occupied Bandwidth	31
8.0	POWER SPECTRAL DENSITY	32
8.1	Test Standard	32
8.2	Test Limits	32
8.3	Test Setup	32
8.3.1	Test Setup Block Diagram	32
8.4	Test Results 15.247	33
8.4.1	2.4 GHz frequency band– DSSS Mode	33
8.4.2	2.4 GHz frequency band– OFDM Mode	35
8.4.3	5.8 GHz frequency band– Power Spectral Density	37
9.0	RF EXPOSURE EVALUATION	39
9.1	EUT Operating Condition	39
9.2	RF exposure evaluation distance calculation	39
10.0	TEST PHOTOS	40
10.1	Radiated emissions setup	40
10.2	Conducted emissions setup	41

1.0 General Information

1.1 EUT Description

Product Name	Wireless Mesh Router
Company Name	Tranzeo Wireless Technologies Inc
FCC ID	QRF-RAKT3KN2
Model No.	TR-EN400;
Frequency Range	2400-2483.5 MHz; 5725-5850 MHz
Number of Channels	11 at 2.4GHz, 5 at 5.8GHz
Transmit Rate	54 Mbps maximum bit rate specification
Type of Modulation	2.4 GHz: DSSS, OFDM; 5.8 GHz: OFDM
Antenna Type	External
Antenna Gain	2400-2483.5: 7.5 dBi MAX; 5725-5850 10.5 dBi MAX
Product Software Revision	ENROUTE500_20061030_02_01_0172
Test Software	Bandwidth test software
Operator Channel Selection	By software
Power Adapter	Tranzeo Wireless Supplied SP48-181000
	Input: AC 120V 60Hz, 25.9 W
	Output: DC 18 V, 1000 mA
	Serial: 0504

Product samples tested:

Manufacturer	Model No.	Serial No.
Tranzeo Wireless	TR-EN400	AG623-ENGR3

Frequency of each channel:

2.4 GHz Frequency Band					
Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1	2412	Channel 5	2432	Channel 9	2452
Channel 2	2417	Channel 6	2437	Channel 10	2457
Channel 3	2422	Channel 7	2442	Channel 11	2462
Channel 4	2427	Channel 8	2447		

5.8 GHz Frequency Band	
Channel	Frequency
Channel 149	5745
Channel 153	5765
Channel 157	5785
Channel 161	5805
Channel 165	5825

The model mentioned above is fitted with two standard Type N connectors for use with an external antenna for each radio.

As an IEEE 802.11a/b/g compliant wireless bridge, this device includes a 2.4 and 5.8 GHz receive function as well as a 2.4 and 5.8 GHz digital modulation transmit function. There are no user serviceable parts inside the unit. It is factory sealed in a one-time use manner and inaccessible to the end user.

The tests were performed on production sample models to demonstrate compliance with FCC Part 15, Subpart B, and Subpart C, as well as Industry Canada RSS-210 Issue 6 for digitally modulated devices.

1.2 Operational Description

The device is a wireless mesh router designed specifically for wireless mesh networks. The device has two radios, an 802.11a mesh backhaul radio and an access point radio for 802.11b/g client devices. It uses two external antennas, one for each radio. The transceivers operate in the frequency bands 2400-2483.5 and 5725-5850 MHz. The device transmits digital network data. The unit is mounted in fixed point-to-multi point installations. The device can be used to create either a stand alone or an internet extension network.

The type of RF modulation is DSSS and OFDM. Both DSSS and OFDM are used at 2.4 GHz while at 5.8 GHz only OFDM is used. The device can transmit data at a bit rate of 11 Mbps in DSSS mode and 54 Mbps in OFDM mode or a real-world data rate of approximately 4 and 27 Mbps respectively. A 128 bits Wired Equivalent Privacy (WEP) algorithm is used for secure communications. The device's standard compliance ensures that it can communicate with any 802.11a/b/g network.

The firmware used with the device prevents the use of channels outside the specified frequency bands.

The product is used exclusively in a professionally installed, fixed point-to-point environment.

1.3 EUT Testing Configuration

The device fitted with two standard Type N connectors was tested with the highest gain antenna of each type. Data is presented for the worst case configuration in each frequency band.

The EUT was mounted to a custom non-metallic stand to best represent a typical user installation. The EUT was connected to the host PC so that it could be cycled through the various test modes and channels.

The EUT was tested in the following modes:

- **Standby/Receive mode:** In this mode the EUT beacons at the lowest possible rate while searching for a client with which to establish communication.

- **Data transfer mode:** In this mode the EUT is exercised with commercially available bandwidth test software. A link is established between two PCs through the unit and an access point and data is transmitted at the highest possible rate.
- **Beaconing Mode:** In this mode the EUT is set to transmit network configuration beacons at the highest possible rate.

1.4 EUT Antennas

The EUT was tested with the following external antennas:

2.4 GHz Antennas	
TR-OD-24-7	7.5 dBi Vertical Omni Antenna
5.8 GHz Antennas	
TR-HTQ-5.8-10	10.5 dBi Vertical Omni Antenna

1.5 EUT Modifications

No modifications were necessary for this unit to comply with FCC Part 15 and Industry Canada RSS-210 Issue 6.

1.6 Test Facilities

Tranzeo EMC Labs
19473 Fraser Way
Pitt Meadows, BC V3Y 2V4
Canada

Phone: (604) 460-6002
Fax: (604) 460-6005

FCC registration number: 960532
Industry Canada Number: 5238A

1.7 Test Equipment

Manufacturer	Model	Description	Serial No.	Cal Due Date
Sunol Sciences	SM46C	Turntable	051204-2	N/R
Sunol Sciences	Custom	Mast Motor	TREML0001	N/R
Sunol Sciences	JB3	Antenna	A042004	02-Jun-2007
Sunol Sciences	DRH-118	Antenna	A052804	02-Jun-2007
Com-Power	LI-115	LISN	241037	30-Jan-2008
Rohde & Schwarz	FSP40	Spectrum Analyzer	100184	24-Aug-2007
Rohde & Schwarz	NRP	Power Meter	100055	02-Aug-2007
Rohde & Schwarz	ESCI	EMI Receiver	100123	02-Jun-2007

1.8 Test System Details

The following auxiliary equipment and cables were used for performing the tests:

Manufacturer	Model	Description	Serial No.
Soyo	PW-930S	Laptop PC	6188
Pheenet	SW-05P	5 port switch	C0104260954
Tranzeo	POE-1	DC injection unit	n/a

Signal Cable Type	Signal Cable Description	Length
Cat 5 LAN	EUT to DC injection unit	50 m
Cat 5 LAN	DC injection unit to Ethernet switch	2 m
Cat 5 LAN	Populate 2 nd Ethernet port	1 m

1.9 Test Results

The EUT complies with FCC Part 15, Subparts B and C, as well as Industry Canada RSS-210 Issue 6.

2.0 Conducted Emissions

2.1 Test Standard

FCC Part 15, Subpart C, Section 15.207a.

1 a) Except as shown in Paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges. 1

2.2 Test Limits

Frequency (MHz)	Maximum Level (dBuV) Quasi-Peak	Maximum Level (dBuV) Average
0.15-0.50	66-56 (Log Delta)	56-46 (Log Delta)
0.50-5.00	56	46
5.00-30.0	60	50


2.3 Test Setup

Both 2.4 and 5.8 GHz radios were exercised simultaneously using beaconing mode at the highest possible transmit rate. Testing was performed on low, middle and high channels in 2.4 and 5.8 GHz frequency bands. All modulation types were tested at each frequency band. Only worst case data is shown below.

Note: For testing purposes only, to ensure worst case performance in all testing configurations, the radio is configured to transmit at the maximum possible RF power.


2.3.1

Test Setup Block Diagram

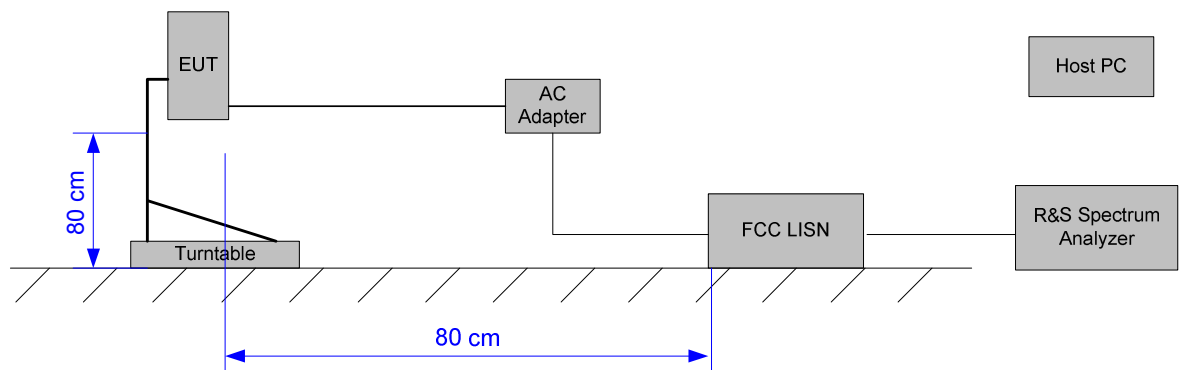

Note: The unused LISN terminal is terminated with a 50 ohms terminator.

2.4 Test Results

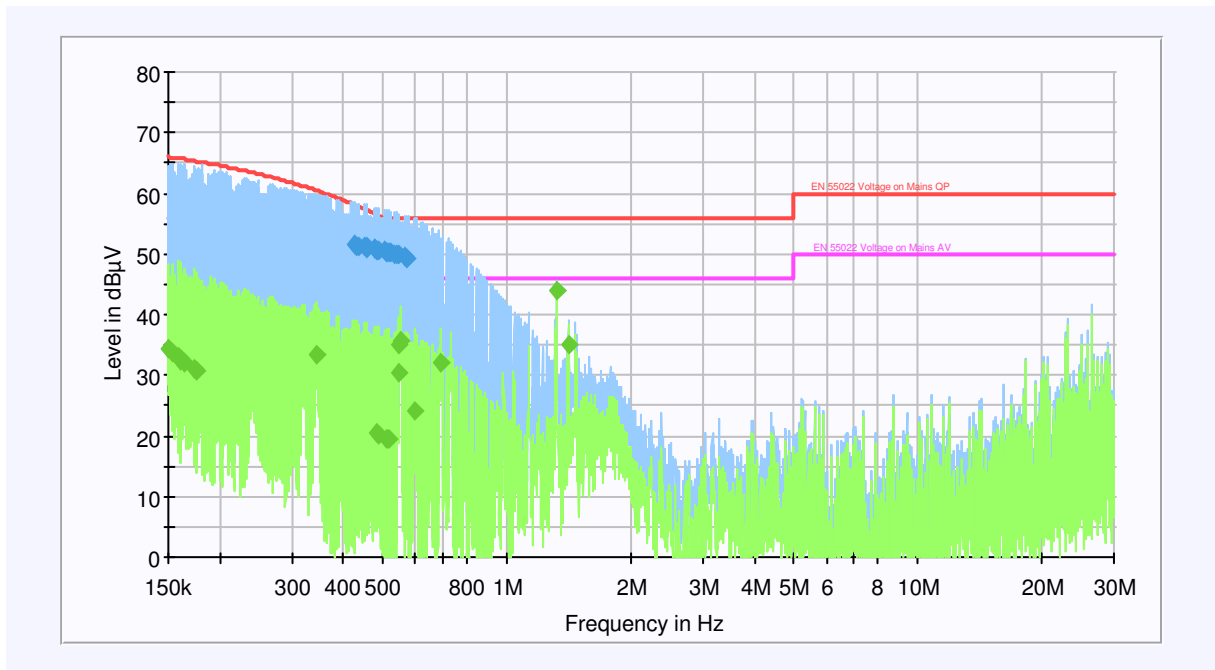

2.4.1 Test Data Peak Detector

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)
0.427995	51.4	9.000	On	L1	-0.1	6.7
0.431862	51.4	9.000	On	L1	-0.1	6.5
0.435765	51.3	9.000	On	L1	-0.1	6.5
0.449927	51.1	9.000	On	L1	-0.1	6.3
0.453993	51.1	9.000	On	L1	-0.1	6.2
0.458095	51.0	9.000	On	L1	-0.1	6.2
0.474404	50.8	9.000	On	L1	-0.1	5.9
0.478691	50.8	9.000	On	L1	-0.1	5.8
0.483016	50.7	9.000	On	L1	-0.1	5.8
0.487381	50.7	9.000	On	L1	-0.1	5.7
0.504733	50.4	9.000	On	L1	-0.1	5.6
0.507769	50.4	9.000	On	L1	-0.1	5.6
0.512357	50.3	9.000	On	L1	-0.1	5.7
0.516986	50.3	9.000	On	L1	-0.1	5.7
0.521658	50.2	9.000	On	L1	-0.1	5.8
0.535392	50.0	9.000	On	L1	-0.1	6.0
0.540230	49.9	9.000	On	L1	-0.1	6.1
0.545111	49.8	9.000	On	L1	-0.1	6.2
0.564518	49.6	9.000	On	L1	-0.1	6.4
0.573046	49.4	9.000	On	L1	-0.1	6.6

Note: All data points are corrected for insertion loss.

2.4.2 Test Data Average Detector

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)
0.150601	34.5	9.000	On	N	-0.1	21.5
0.153182	33.9	9.000	On	N	-0.1	22.0
0.158160	33.0	9.000	On	N	-0.1	22.8
0.160549	32.9	9.000	On	N	-0.1	22.8
0.161031	32.5	9.000	On	N	-0.1	23.2
0.163464	32.2	9.000	On	N	-0.1	23.4
0.173220	31.2	9.000	On	N	-0.1	24.1
0.174785	30.9	9.000	On	N	-0.1	24.4
0.343168	33.5	9.000	On	N	0.0	17.0
0.483016	20.3	9.000	On	L1	-0.1	26.2
0.487381	20.2	9.000	On	L1	-0.1	26.2
0.512357	19.5	9.000	On	L1	-0.1	26.5
0.516986	19.4	9.000	On	L1	-0.1	26.6
0.545111	30.5	9.000	On	N	0.0	15.5
0.547295	35.0	9.000	On	N	0.0	11.0
0.552241	35.6	9.000	On	N	0.0	10.4
0.598809	24.2	9.000	On	N	0.0	21.8
0.689435	32.1	9.000	On	N	0.0	13.9
1.320213	43.9	9.000	On	N	0.0	2.1
1.413062	35.1	9.000	On	N	0.0	10.9

Note: All data points are corrected for insertion loss.

3.0 Peak Power Output

3.1 Test Standard

FCC CFR47, Part 15, Subpart B 15.247b.

1 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the 1 watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in Paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in Paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in Paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(iii) Fixed, point-to-point operation, as used in Paragraphs (c)(4)(i) and (c)(4)(ii) of this section, excludes the use of point-to-multipoint systems, Omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility. 1

3.2 Test Limits

The maximum conducted output power shall not exceed 30 dBm.

3.3 Test Setup

This test is performed conducted. The measurement equipment is connected directly to the antenna port of the EUT.

The test is performed at low, middle and high channels using both OFDM and DSSS modulations where applicable and in 20 MHz bandwidths for both 2.4 and 5.8 GHz frequency bands. Power is measured using the channel power measurement feature of the spectrum analyzer.

3.3.1 Test Setup Block Diagram



3.4 Test Results

3.4.1 2.4 GHz frequency band

Mode DSSS/ Channel BW = 20MHz			
Frequency(MHz)	Measurement(dBm)	Limit	Result
2412	19.13	30	PASS
2437	18.59	30	PASS
2462	18.84	30	PASS

Mode OFDM/ Channel BW = 20MHz			
Frequency(MHz)	Measurement(dBm)	Limit	Result
2412	19.34	30	PASS
2437	19.19	30	PASS
2462	19.23	30	PASS

3.4.2 5.8 GHz frequency band

Channel	Frequency (MHz)	Measurement (dBm)	Limit (dBm)	Result
149	5745	22.94	30	PASS
157	5785	22.68	30	PASS
165	5825	21.78	30	PASS

4.0 Radiated Emissions, General Requirements

4.1 Test Standard

FCC Part 15, Subpart C, Section 15.209, Radiated Emission Limits, General Requirements.

|(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in Paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. |

4.2 Test Limits


Frequency (MHz)	Maximum Field Strength ($\mu\text{V/m}$ @ 3m)	Maximum Field Strength (dB $\mu\text{V/m}$ @ 3m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-1000	500	54.0

4.3 Test Setup

The EUT was tested when both 2.4 and 5.8 GHz radios were exercised simultaneously using beaconing mode at the highest possible transmit rate. The test is performed at low, middle and high channels using both OFDM and DSSS modulations where applicable and in 20 MHz bandwidths for both 2.4 and 5.8 GHz frequency bands. Only worst case data is shown below.

Note: For testing purposes only, to ensure worst case performance in all testing configurations, the radio is configured to transmit at the maximum possible RF power.

4.3.1 Test Setup Block Diagram

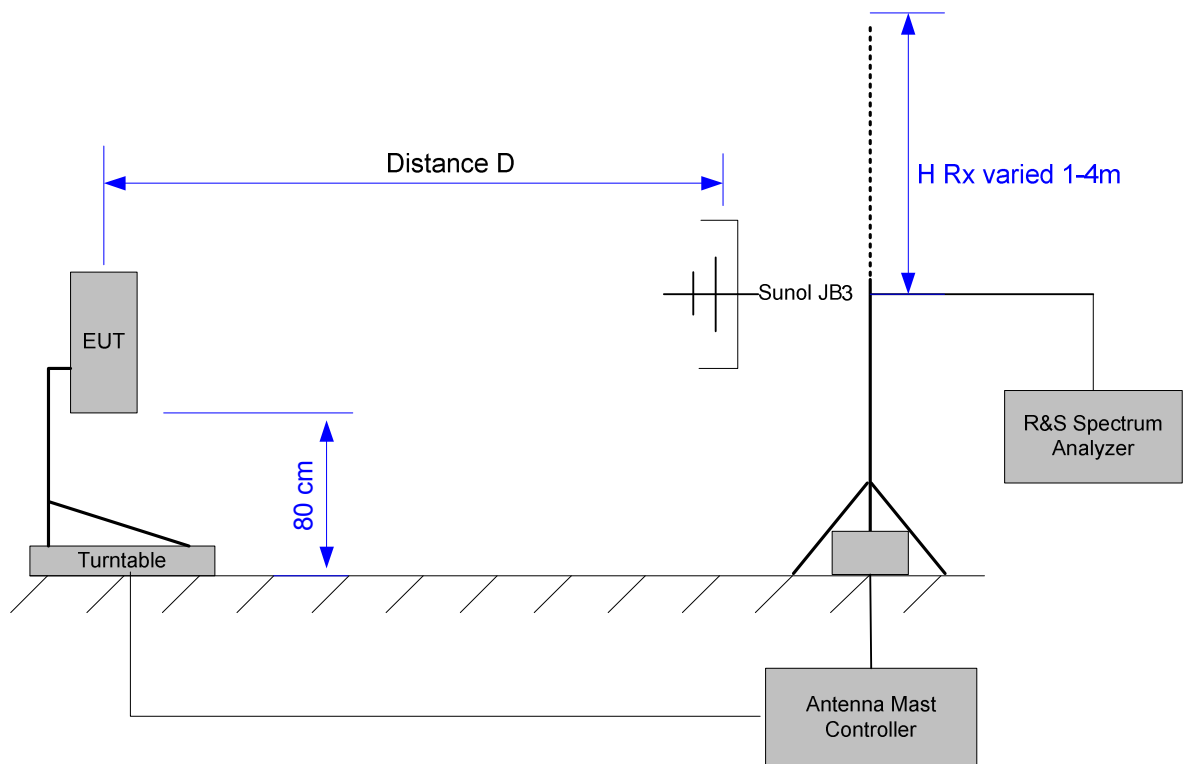

Note: Measurements below 1 GHz were performed with the Sunol JB3 antenna with a measurement distance of 3 m. Compliance above 1 GHz is covered in Section 5.0.

4.4 Test Results

Frequency (MHz)	QuasiPeak (dBμV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
503.160000	45.3	262.0	H	185.0	20.2	0.70	46.00
50.000000	38.5	103.0	V	175.0	8.8	1.50	40.00
47.360000	38.4	144.0	V	0.0	9.8	1.60	40.00
133.680000	41.6	213.0	V	258.0	15.3	1.90	43.50
41.600000	37.5	102.0	V	253.0	13.1	2.50	40.00
43.800000	37.2	113.0	V	0.0	11.5	2.80	40.00
51.000000	36.9	103.0	V	73.0	8.5	3.10	40.00
39.520000	36.8	113.0	V	0.0	14.6	3.20	40.00
39.960000	36.5	100.0	V	0.0	14.2	3.50	40.00
51.920000	35.7	113.0	V	182.0	8.4	4.30	40.00
42.760000	35.5	101.0	V	285.0	12.3	4.50	40.00
299.960000	40.8	100.0	V	75.0	15.2	5.20	46.00
208.520000	38.0	214.0	H	183.0	13.0	5.50	43.50
48.040000	33.6	113.0	V	195.0	9.5	6.40	40.00
359.240000	36.4	143.0	V	167.0	17.2	9.60	46.00
180.560000	32.5	285.0	H	92.0	12.8	11.00	43.50
626.160000	34.3	102.0	V	189.0	22.1	11.70	46.00
162.360000	29.3	113.0	V	105.0	13.8	14.20	43.50
173.000000	17.1	112.0	V	-6.0	13.3	26.40	43.50
418.280000	15.8	243.0	V	186.0	18.3	30.20	46.00
456.520000	15.7	285.0	V	105.0	19.0	30.30	46.00

Note: All data points are corrected for insertion loss.

The data above is for the worst case configuration.

5.0 Harmonic and Spurious Emissions

5.1 Test Standard

FCC CFR 47, Part 15, Subpart B 15.247d.

1 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). 1

5.2 Test Limits

2400-2483.5 MHz limits:

- Fundamental Limit = 30 dBm
- Harmonics and Spurious Emissions = 30 dBc
- Restricted Band Emissions = AVG 54 dBuV, PK 74dBuV

5.3 Test Setup – Spurious Emissions


Both radiated and conducted measurements are made on the EUT to ensure compliance with the required emission levels. Conducted scans are used to determine compliance with the 30 dBc limit for emissions outside of the operational frequency band.

In addition to conducted measurements, extensive radiated testing above 1 GHz is performed. The measurement antenna is scanned around all sides of the EUT to identify signals of interest. Additional measurements at an appropriate measurement distance are performed to ensure that emissions were at maximum.


The EUT was tested with both antennas. Each radio was exercised using beaconing mode at the highest possible transmit rate. Testing was performed on low, middle and high channels in both 2.4 and 5.8 GHz frequency bands. All combinations of the modulation schemes were tested. Only worst case data is shown below.

Note: For testing purposes only, to ensure worst case performance in all configurations, the radio is configured to transmit at the maximum possible RF power.

5.3.1 Test Setup Block Diagram – Conducted Measurements (Harmonics)

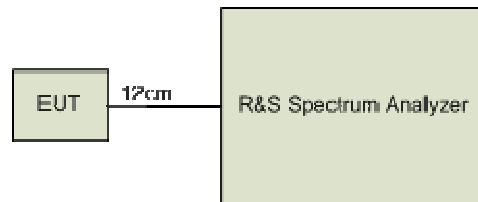


5.3.2 Test Setup Block Diagram – Radiated Measurements (Spurious)

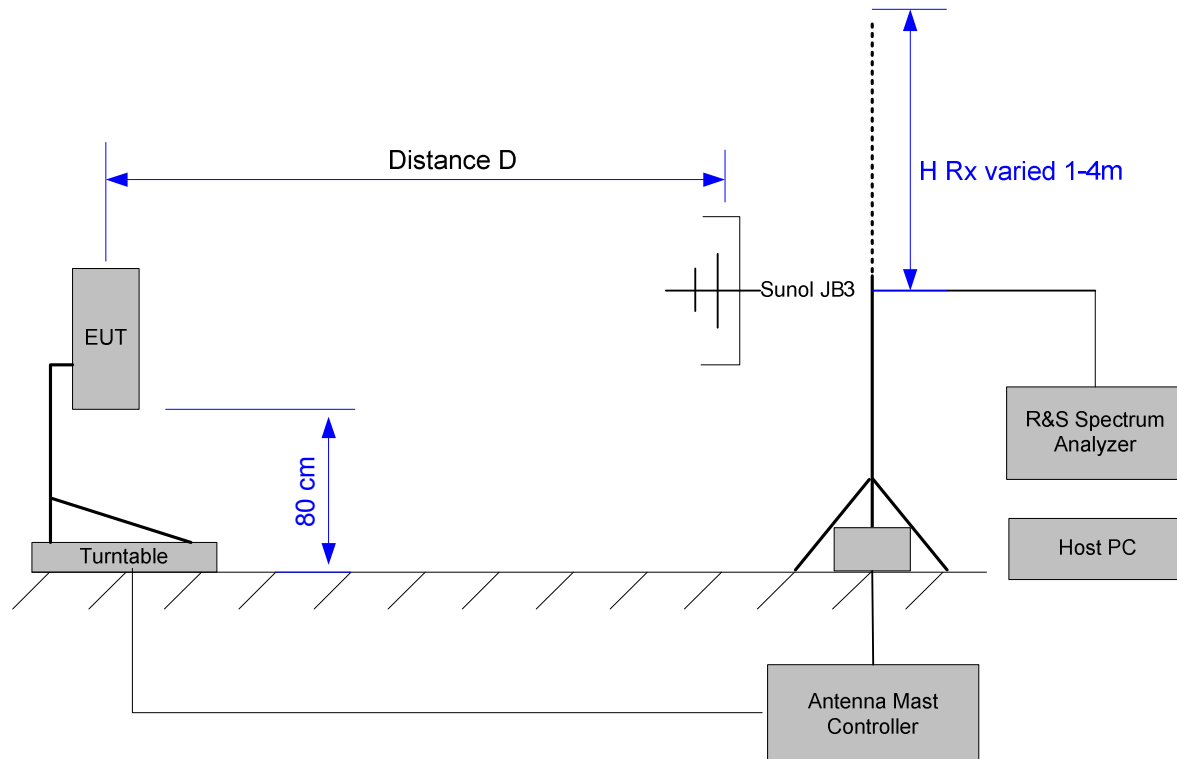


5.4 Test Results

5.4.1 Test Results 15.247–Harmonics -30 dBc

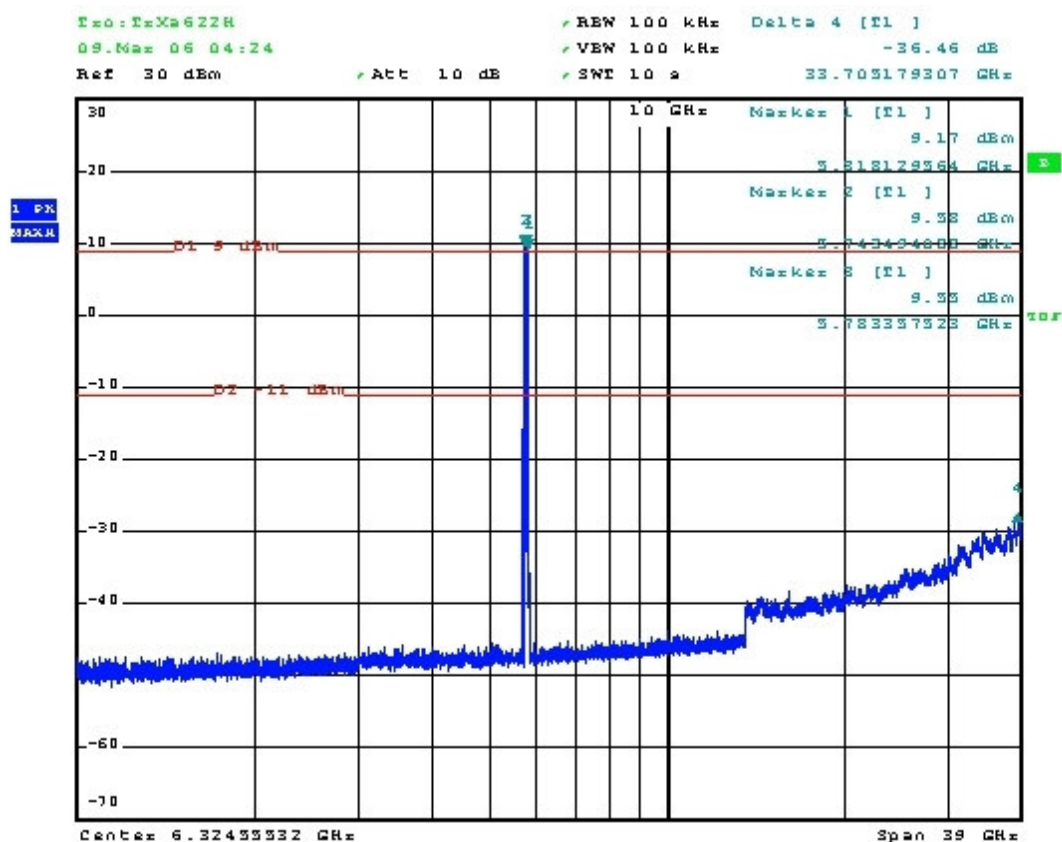

The above plot shows the worst case conducted output of the 5.8 GHz transmitter. It should be noted that the EUT is not transmitting on two channels simultaneously. However, the unit is cycled through low, mid and high channels. All conducted harmonics are at least 30 dBc.

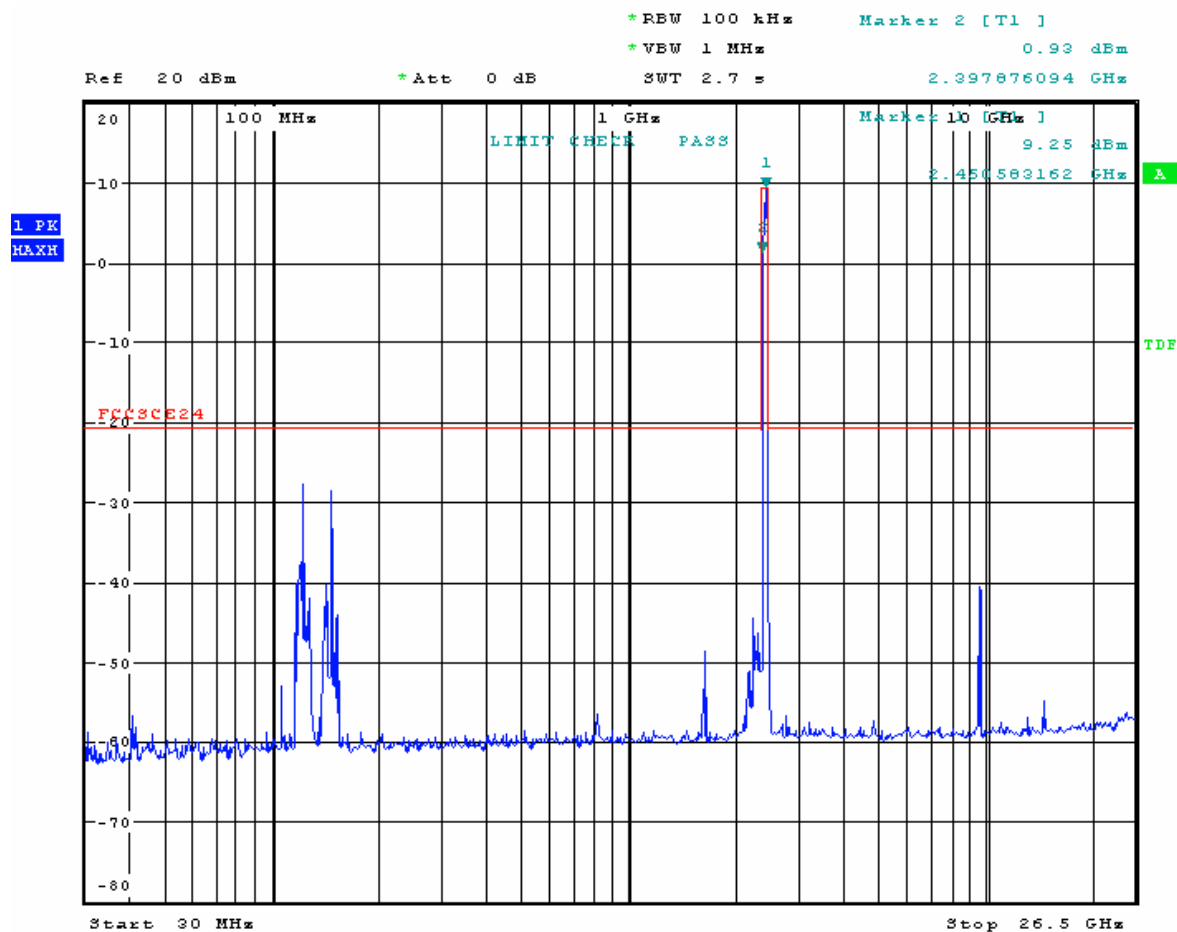

The above plot shows the worst case conducted output of the 2.4 GHz transmitter. It should be noted that the EUT is not transmitting on two channels simultaneously. However, the unit is cycled through low, mid and high channels. All conducted harmonics are at least 30 dBc.

5.4.2 Test Results 15.247– Restricted Bands (Spurious Emissions)

The following data is taken from frequencies identified during radiated pre-testing at 1 m. Data presented below was taken at a measurement distance of 3 m. Data is presented for the worst case configuration in each frequency band.

2.4 GHz Antenna					
Frequency (MHz)	Reading Type	Reading dBuV/m@3m	Limit (dBuV/m)	Margin (dB)	Result
4923.6	Peak	66.9	74.0	7.1	Pass
4923.6	Average	45.0	54.0	9.0	Pass
7402.0	Peak	50.4	74.0	23.6	Pass
7402.0	Average	28.5	54.0	25.5	Pass
9857.6	Peak	52.5	74.0	21.5	Pass
9857.6	Average	30.6	54.0	23.4	Pass

5.8 GHz Antenna					
Frequency (MHz)	Reading Type	Reading dBuV/m@3m	Limit (dBuV/m)	Margin (dB)	Result
11482.8	Peak	55.0	74.0	19.0	Pass
11482.8	Average	8.4	54.0	45.6	Pass

No other emissions were detected within 20 dB of the limit.

6.0 Band Edge

6.1 Test Standard

FCC CFR 47, Part 15, Subpart B 15.247d.

1 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). 1

6.2 Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). (See Section 15.205(c).)

6.3 Test Setup


Both radiated and conducted measurements are made on the EUT to ensure compliance with the required emission levels.

The test is performed at low and high channels. Compliance in the 5725-5850 MHz band is established through conducted measurements. Compliance with the 15.209 restricted band requirements of the 2400-2483.5 MHz band is established through radiated measurements. Data is presented for the worst case configuration.

6.3.1 Test Setup Block Diagram – Conducted Measurements


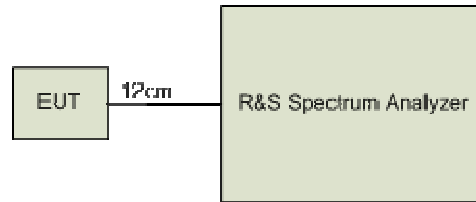


6.3.2 Test Setup Block Diagram – Radiated Measurements

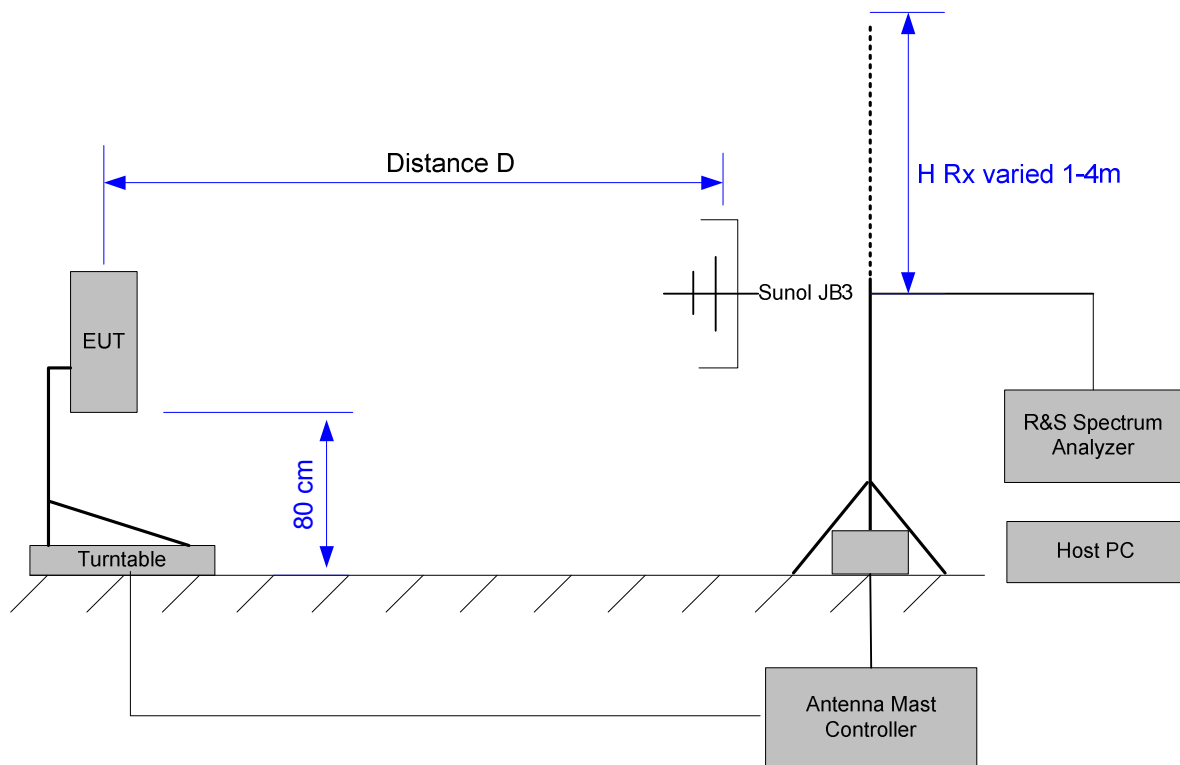

6.4 Test Results

6.4.1 5725-5850 MHz, Conducted Measurements

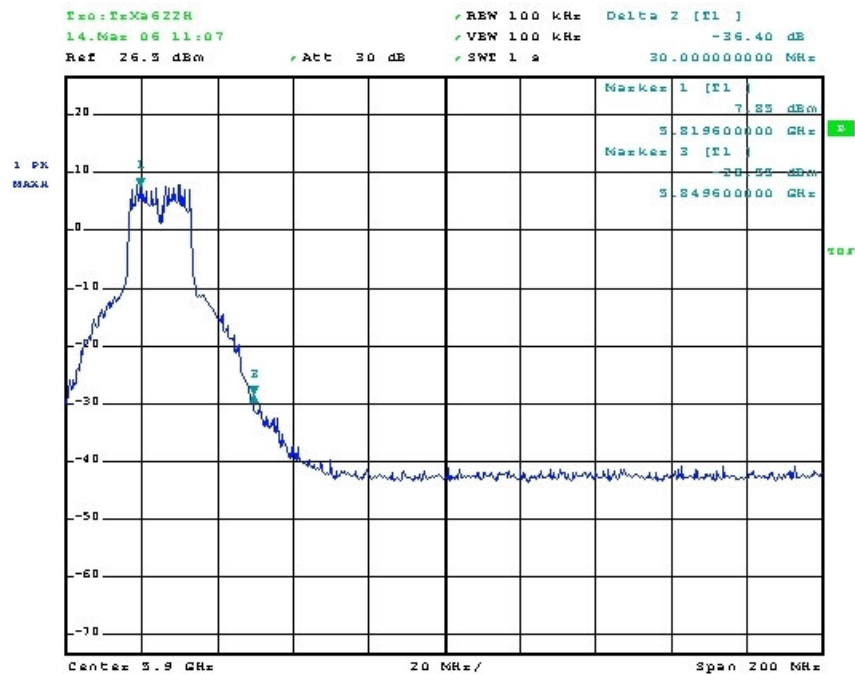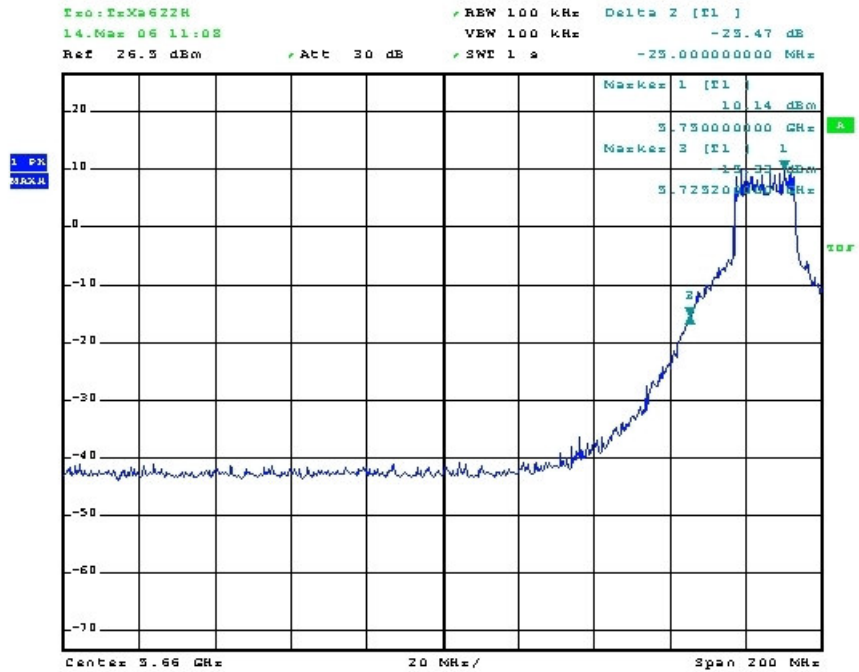

Chan	Hi Reading (dBm)	Low Reading (dBm)	Delta	Limit (dBc)	Margin (dB)	Result
149	10.14	-15.33	-25.47	-20	5.47	PASS
165	7.85	-28.55	-36.40	-20	16.40	PASS


All emissions outside of the 5725-5850 MHz frequency band are attenuated by at least 20 dB.

6.4.2 2400-2483.5 MHz, Radiated Measurements

This measurement is performed using the peak-delta method. The delta is measured using bandwidth settings of RBW, VBW = 100 KHz. This delta is then subtracted from the peak radiated power which is measured using settings of RBW, VBW = 1 MHz.

Freq (MHz)	Mode	Peak 1M/1M (dBuV/m@3m)	Delta 100k/100k (dB)	BE Reading (dBuV/m@3m)	Limit (dBuV/m@3m)	Margin
2412	b Mode	110	51.47	58.53	74	15.47
	g Mode	112.5	48.01	64.49	74	9.51
2462	b Mode	109.6	51.41	58.19	74	15.81
	g Mode	112.1	48.38	63.72	74	10.28

Note: The peak to average correction factor is 21.88 dB as shown in the figure below. Therefore, considering that the average limit is 20 dB less than the peak limit, we conclude conformance with the average limit.

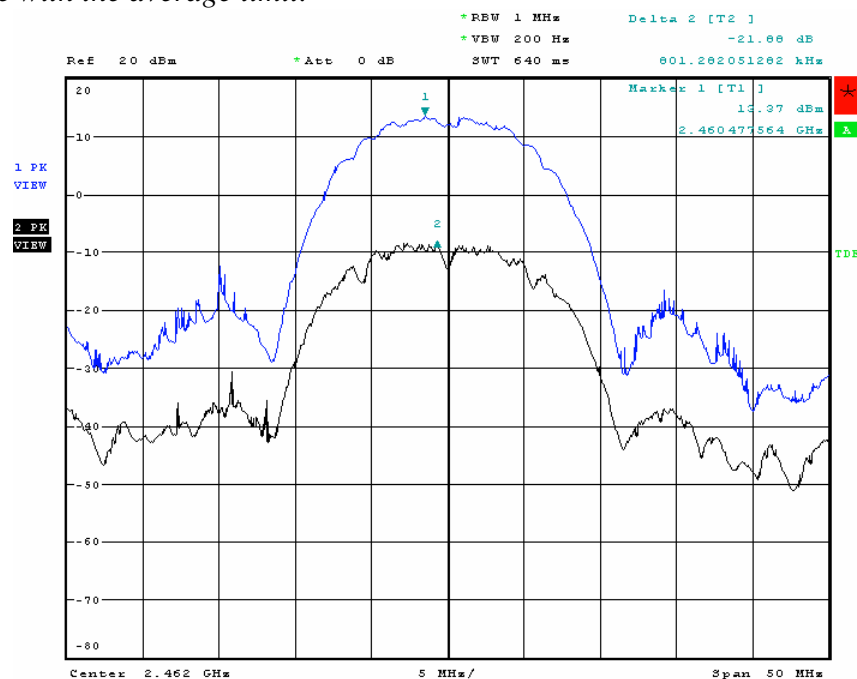

Peak to Average Correction Factor

The peak is measured with RBW = VBW = 1MHz. For the average measurement the VBW was reduced down to the Hz range.

7.0 Occupied Bandwidth

7.1 Test Standard

FCC CFR47, Part 15, Subpart B 15.247a.

1 (a) Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. 1

7.2 Test Limits


The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3 Test Setup

This test is performed conducted. The measurement equipment is connected directly to the antenna port of the EUT.



The test is performed at low, middle and high channels using both OFDM and DSSS modulations where applicable and in 20 MHz bandwidths for both 2.4 and 5.8 GHz frequency bands.


7.3.1 Test Setup Block Diagram

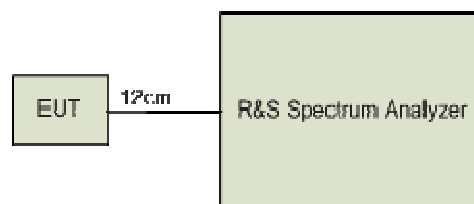


7.4 Test Results, 6 dB Occupied Bandwidth at 2.4 GHz Frequency band



7.4.1 DSSS Mode

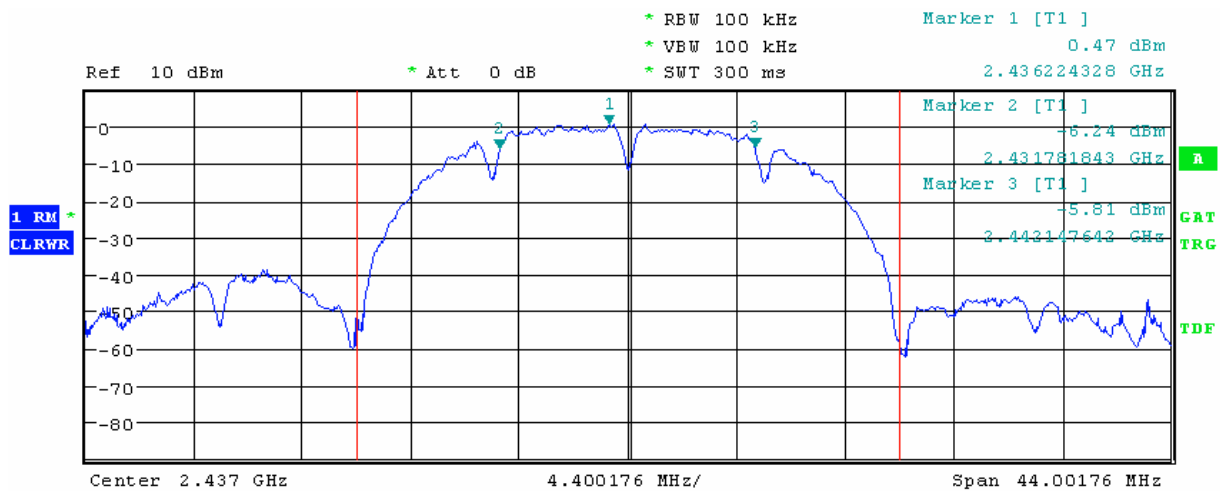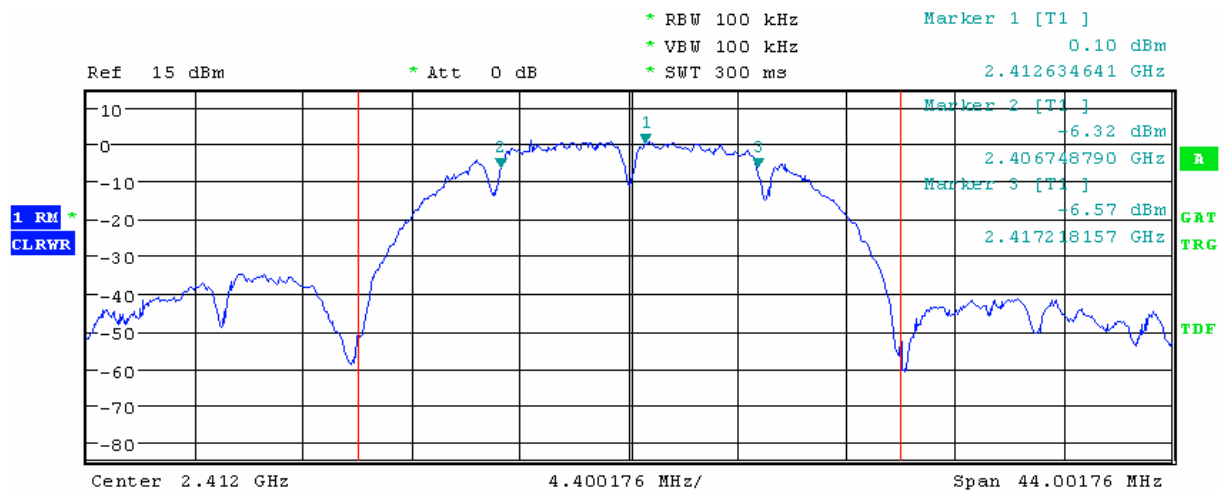

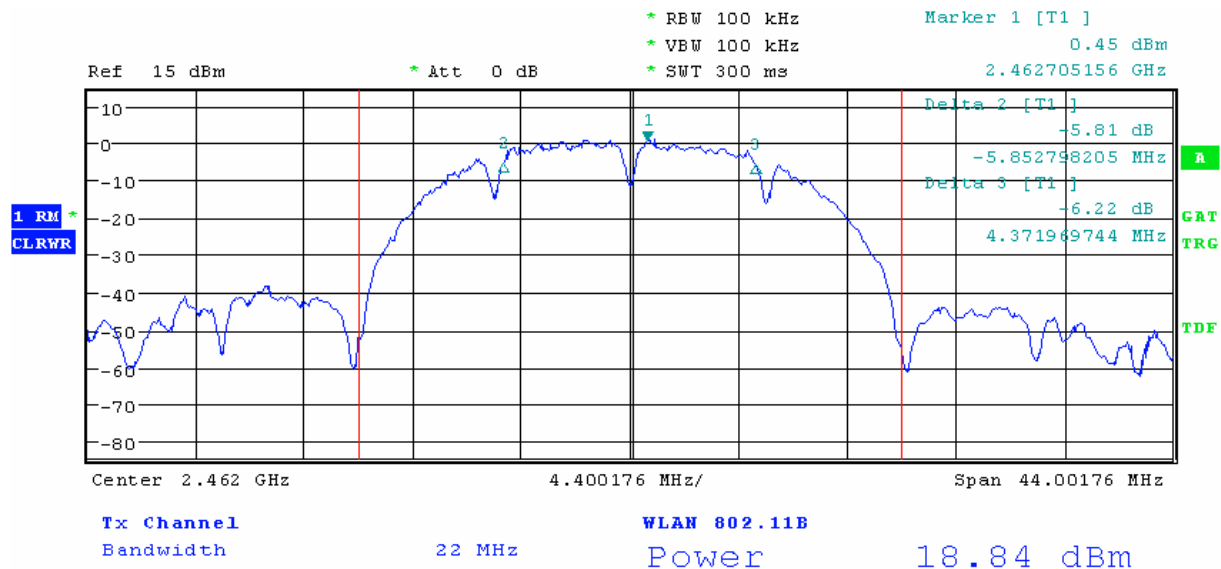

7.4.2 OFDM Mode

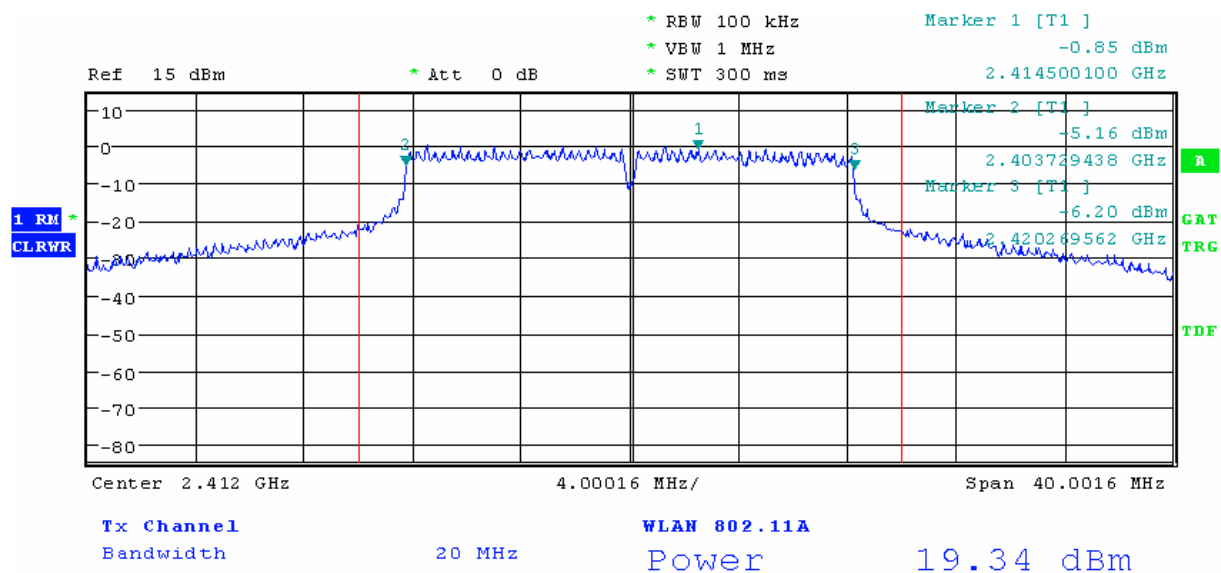

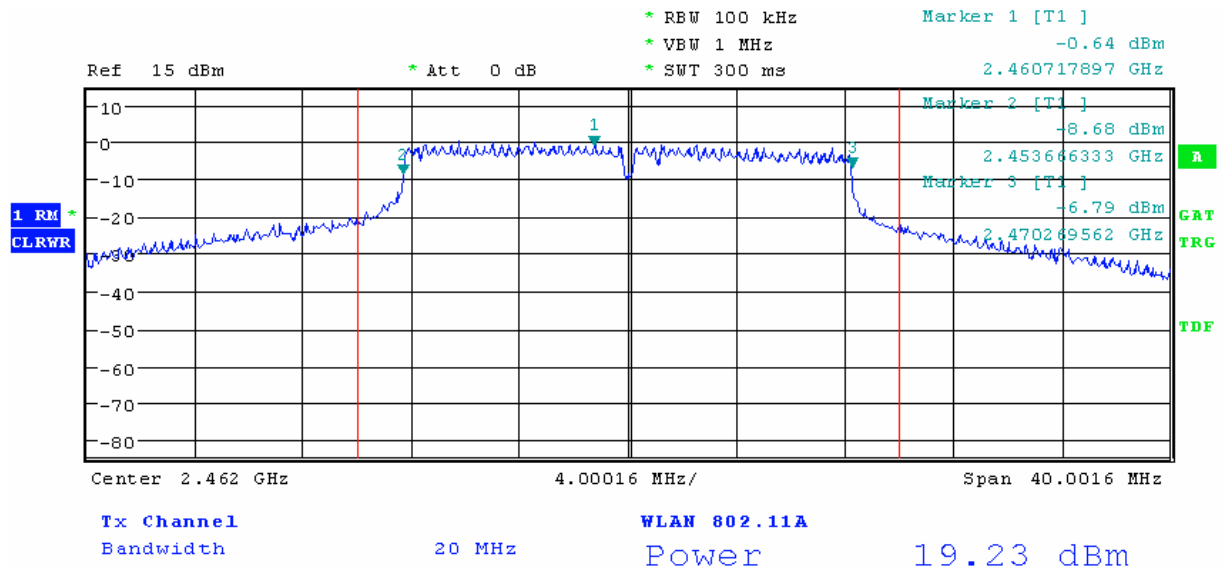
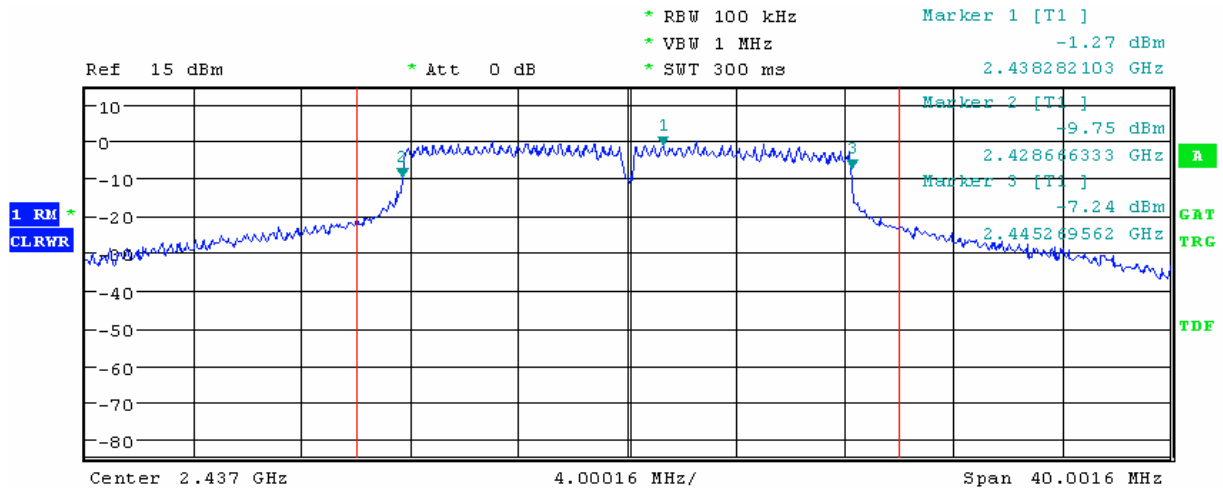



7.4.3 Data Table – Occupied Bandwidth

Mode DSSS/ Channel BW = 20MHz				
Channel	Frequency(MHz)	Occupied Bandwidth(MHz)	Limit	Result
Ch 1	2412	10.5	0.5	PASS
Ch 6	2437	10.3	0.5	PASS
Ch 11	2462	10.2	0.5	PASS

Mode OFDM/ Channel BW = 20MHz				
Channel	Frequency(MHz)	Occupied Bandwidth(MHz)	Limit	Result
Ch 1	2412	16.5	0.5	PASS
Ch 6	2437	16.6	0.5	PASS
Ch 11	2462	16.5	0.5	PASS

7.5 Test Results, 6 dB Occupied Bandwidth at 5.8 GHz Frequency band

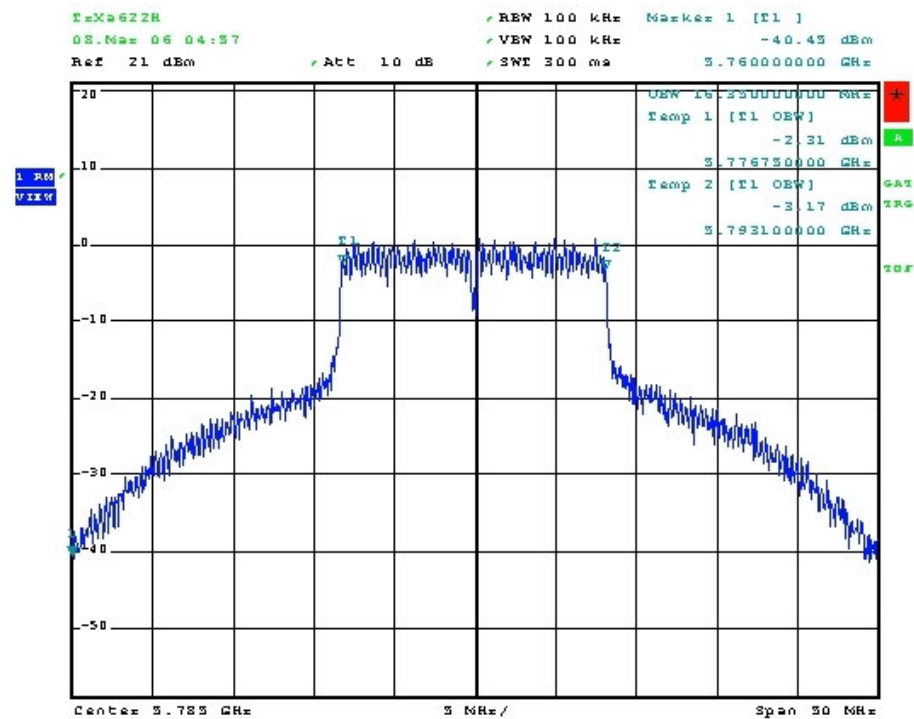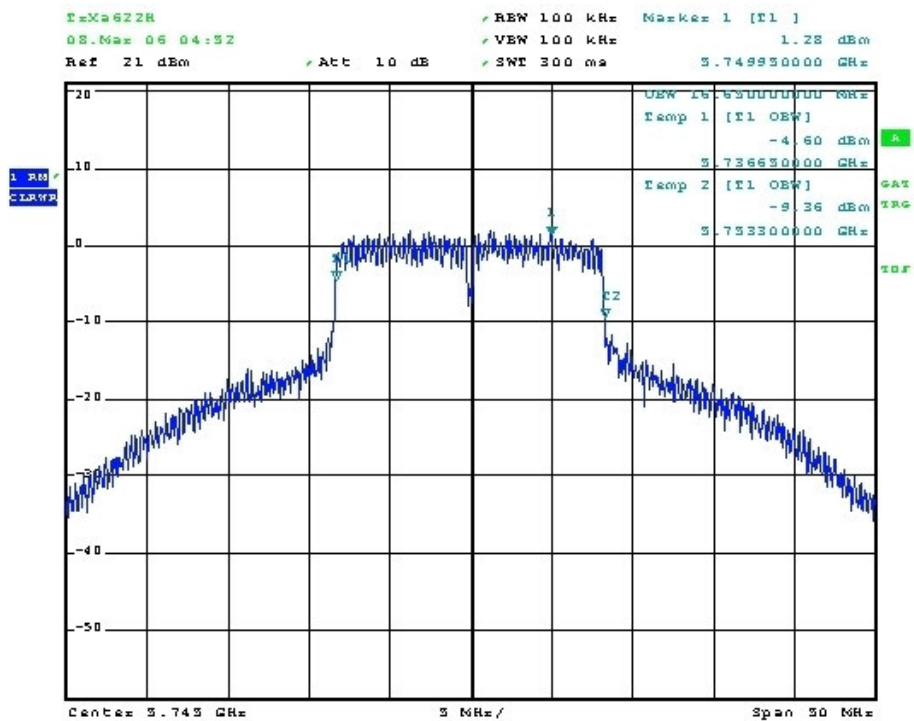

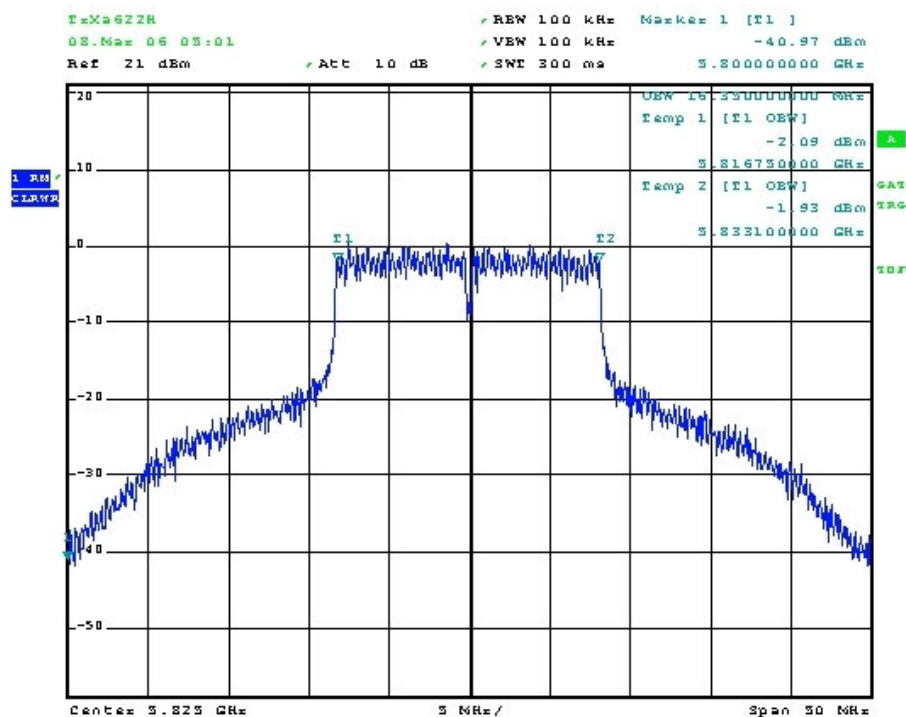

7.5.1 Data Table – Occupied Bandwidth

Mode OFDM/ Channel BW = 20MHz				
Channel	Frequency(MHz)	Occupied Bandwidth(MHz)	Limit	Result
Ch 149	5745	16.65	0.5	PASS
Ch 157	5785	16.35	0.5	PASS
Ch 165	5825	16.35	0.5	PASS

8.0 Power Spectral Density

8.1 Test Standard

FCC CFR 47, Part 15, Subpart B 15.247e.

1 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density. 1

8.2 Test Limits


The transmitted power density shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3 Test Setup

This test is performed conducted. The measurement equipment is connected directly to the antenna port of the EUT.



The test is performed at low, middle and high channels using both OFDM and DSSS modulations where applicable and in 20 MHz bandwidths for both 2.4 and 5.8 GHz frequency bands.


8.3.1 Test Setup Block Diagram

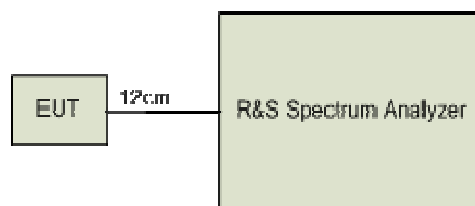

8.4 Test Results 15.247



8.4.1 2.4 GHz frequency band– DSSS Mode

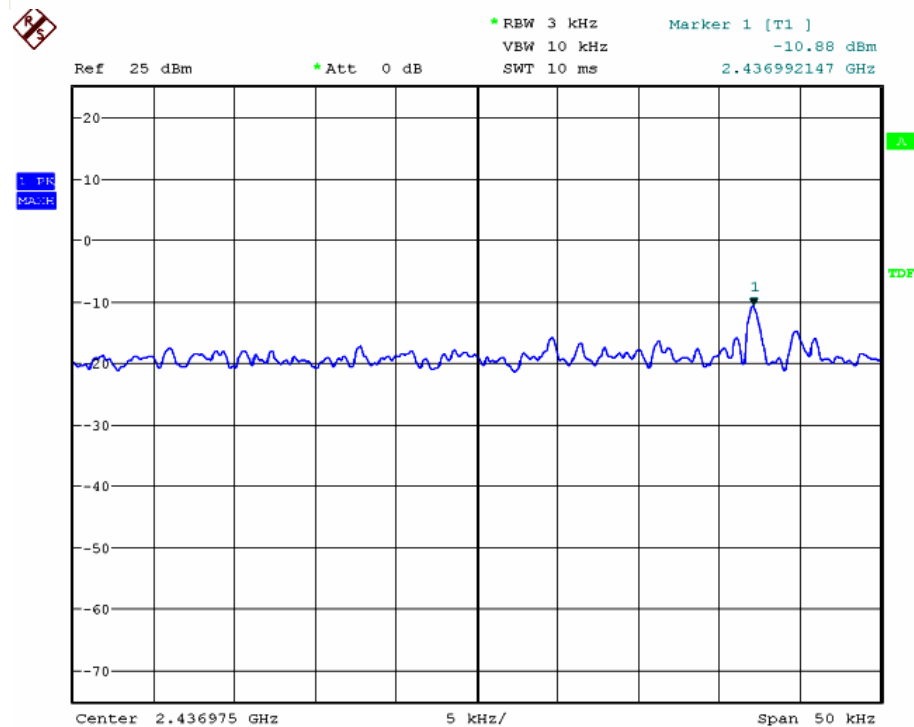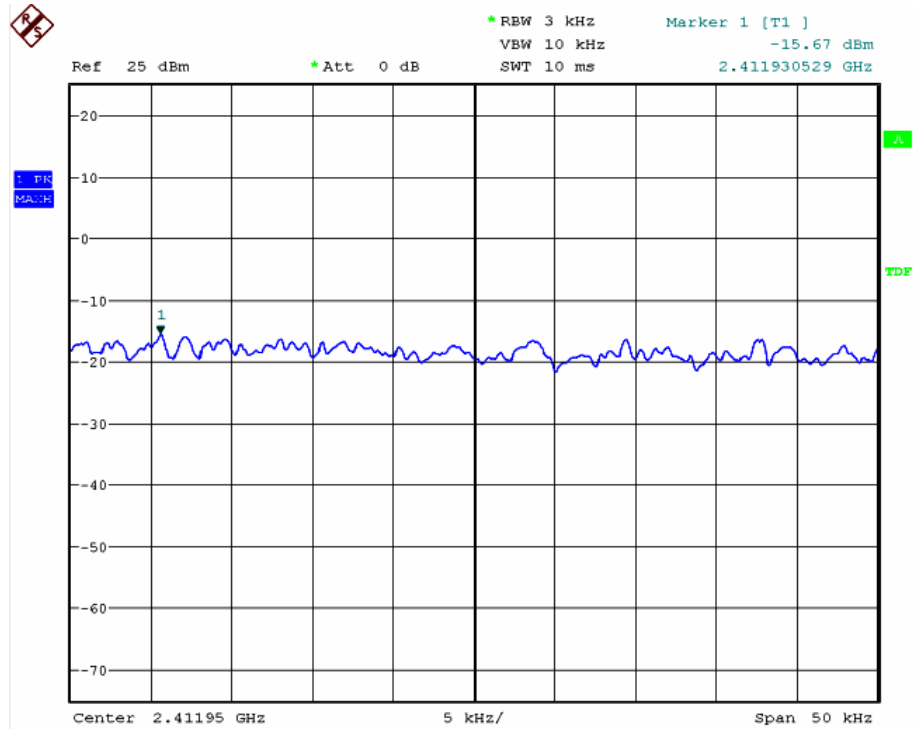


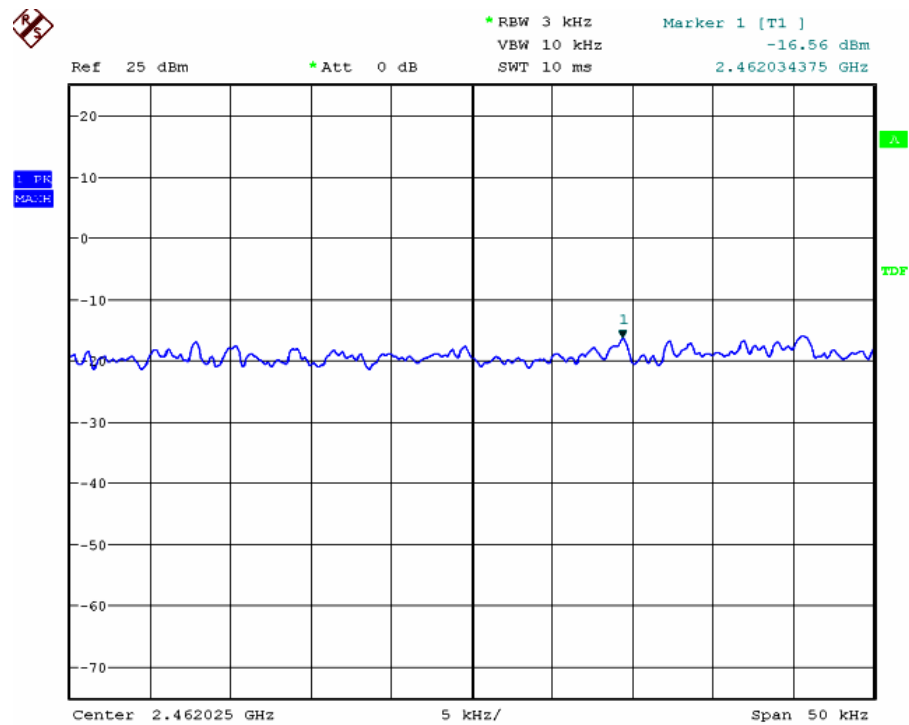

Frequency(MHz)	PSD in 3 KHz (dBm)	Limit (dBm)	Result
2414.0	-15.67	8	PASS
2438.7	-10.88	8	PASS
2461.0	-16.56	8	PASS



8.4.2 2.4 GHz frequency band– OFDM Mode

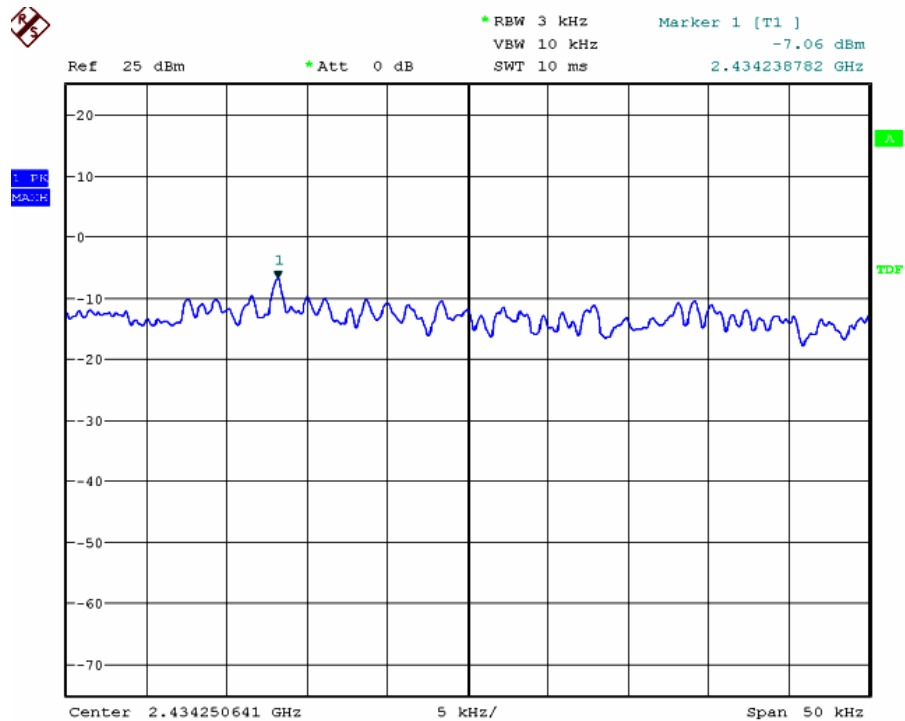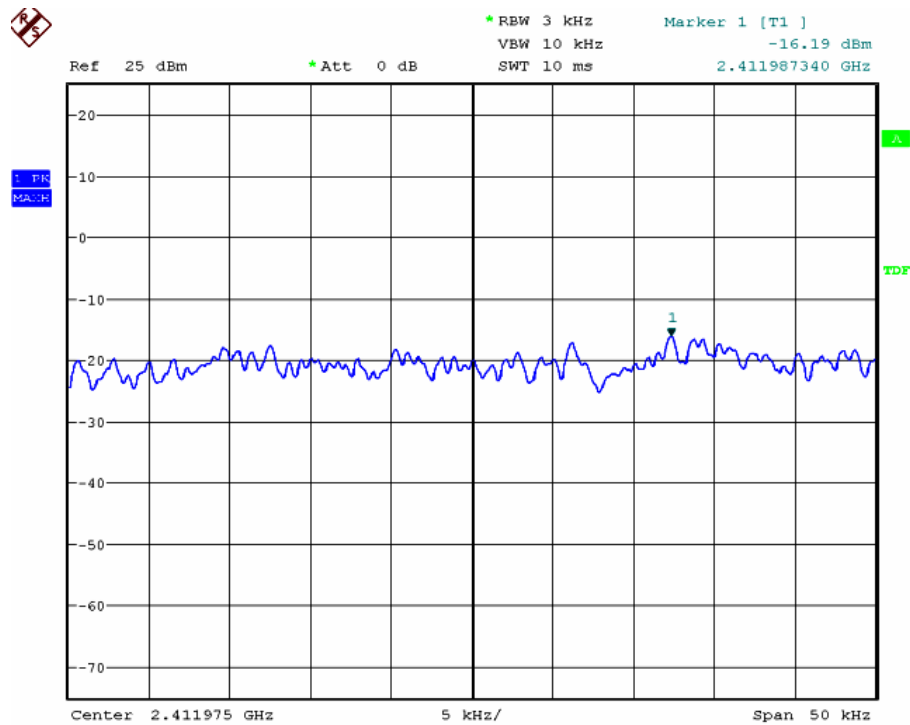


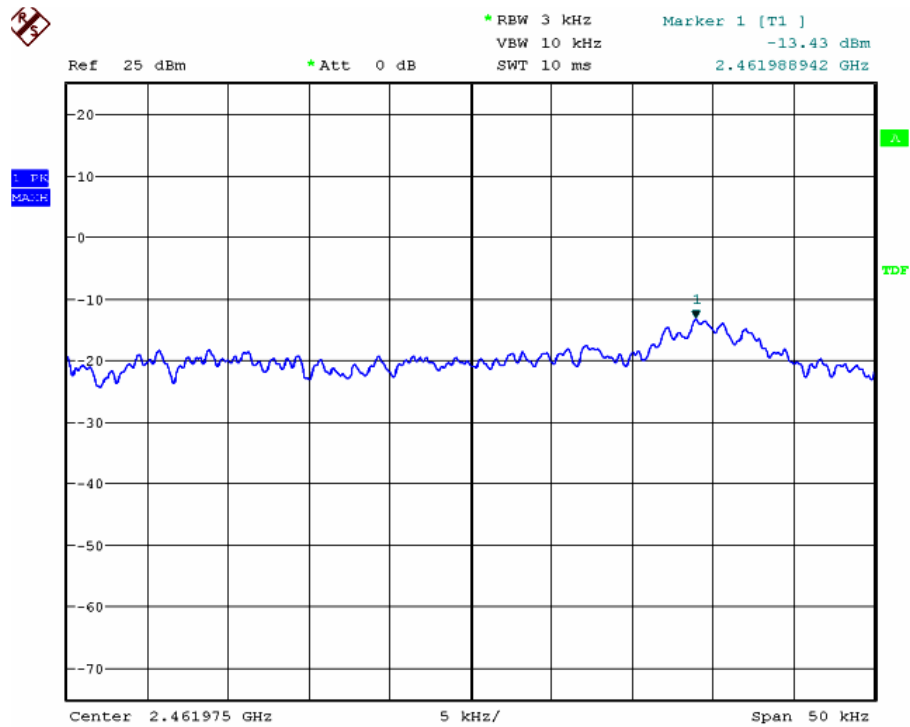

Frequency(MHz)	PSD in 3 KHz (dBm)	Limit (dBm)	Result
2414.0	-16.19	8	PASS
2438.7	-7.06	8	PASS
2461.0	-13.43	8	PASS

8.4.3 5.8 GHz frequency band– Power Spectral Density

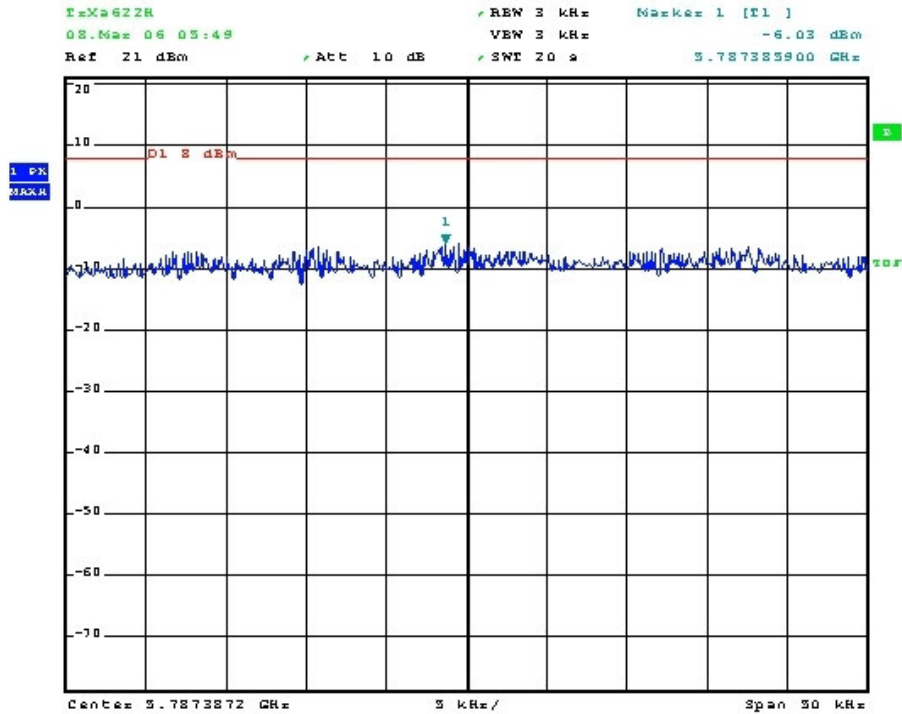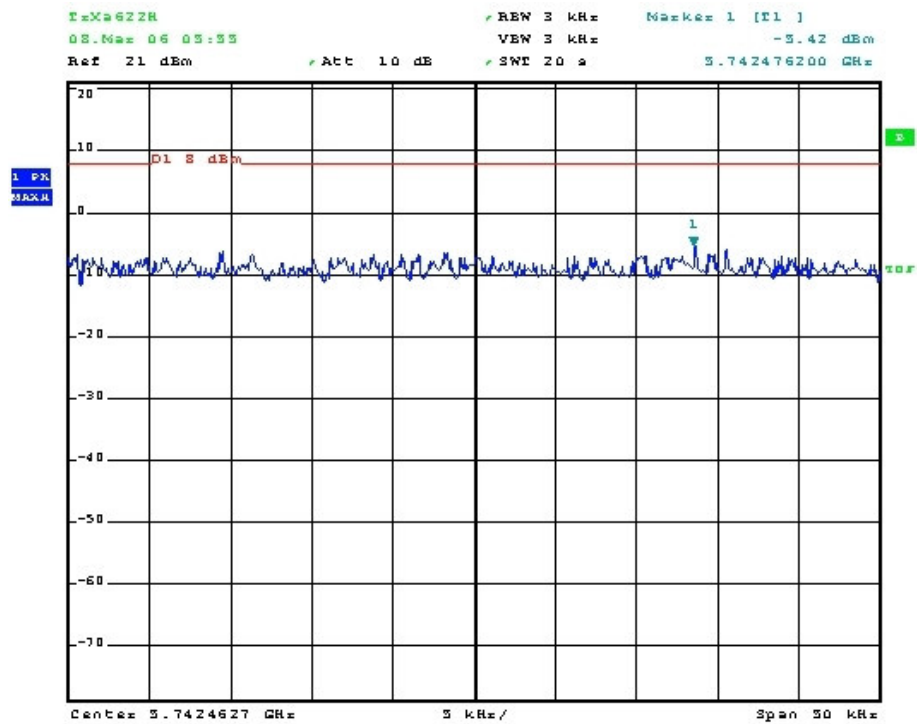

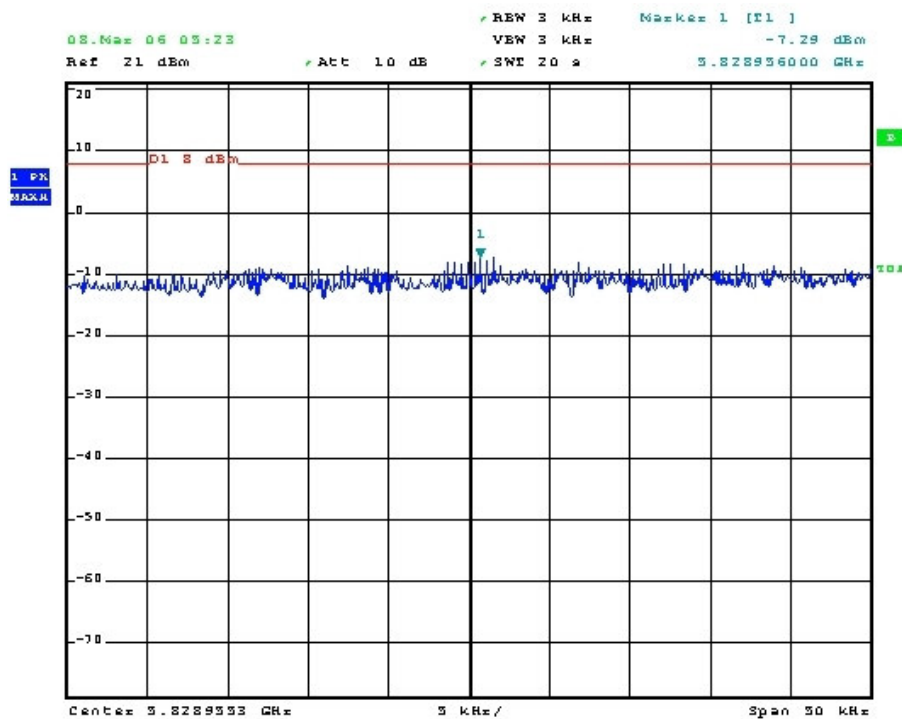

Frequency(MHz)	PSD in 3 KHz (dBm)	Limit	Result
5743	-5.42	8	PASS
5787	-6.03	8	PASS
5829	-7.29	8	PASS

9.0 RF Exposure Evaluation

FCC 1.1310 states the criteria listed in the table below shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Section 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Section 2.1093 of this chapter. Further information on evaluating compliance with these limits can be found in the FCC's OST/OET Bulletin Number 65, "Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radiofrequency Radiation".

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/M)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational/Control Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposures				
300-1500	--	--	F/1500	6
1500-100,000	--	--	1	30

9.1 EUT Operating Condition

The maximum antenna gain is 7.5 dBi at 2.4 GHz and 10.5 dBi at 5.8 GHz.

9.2 RF exposure evaluation distance calculation

2.4GHz radio with 7.5 dBi antenna

Freq (MHz)	Output Power to Antenna (dBm)	Antenna Gain (dBi)	r (cm)
2412	10.34	7.5	2.2
2437	19.19	7.5	6.1
2462	12.23	7.5	2.8


5.8GHz radio with 10.5 dBi antenna

Freq (MHz)	Output Power to Antenna (dBm)	Antenna Gain (dBi)	r (cm)
5745	22.94	10.5	13.2
5785	22.68	10.5	12.9
5825	21.78	10.5	11.6

As shown above, the minimum distance where the MPE limit is reached is 13.2 cm for the EUT.

10.0 Test Photos

10.1 Radiated emissions setup

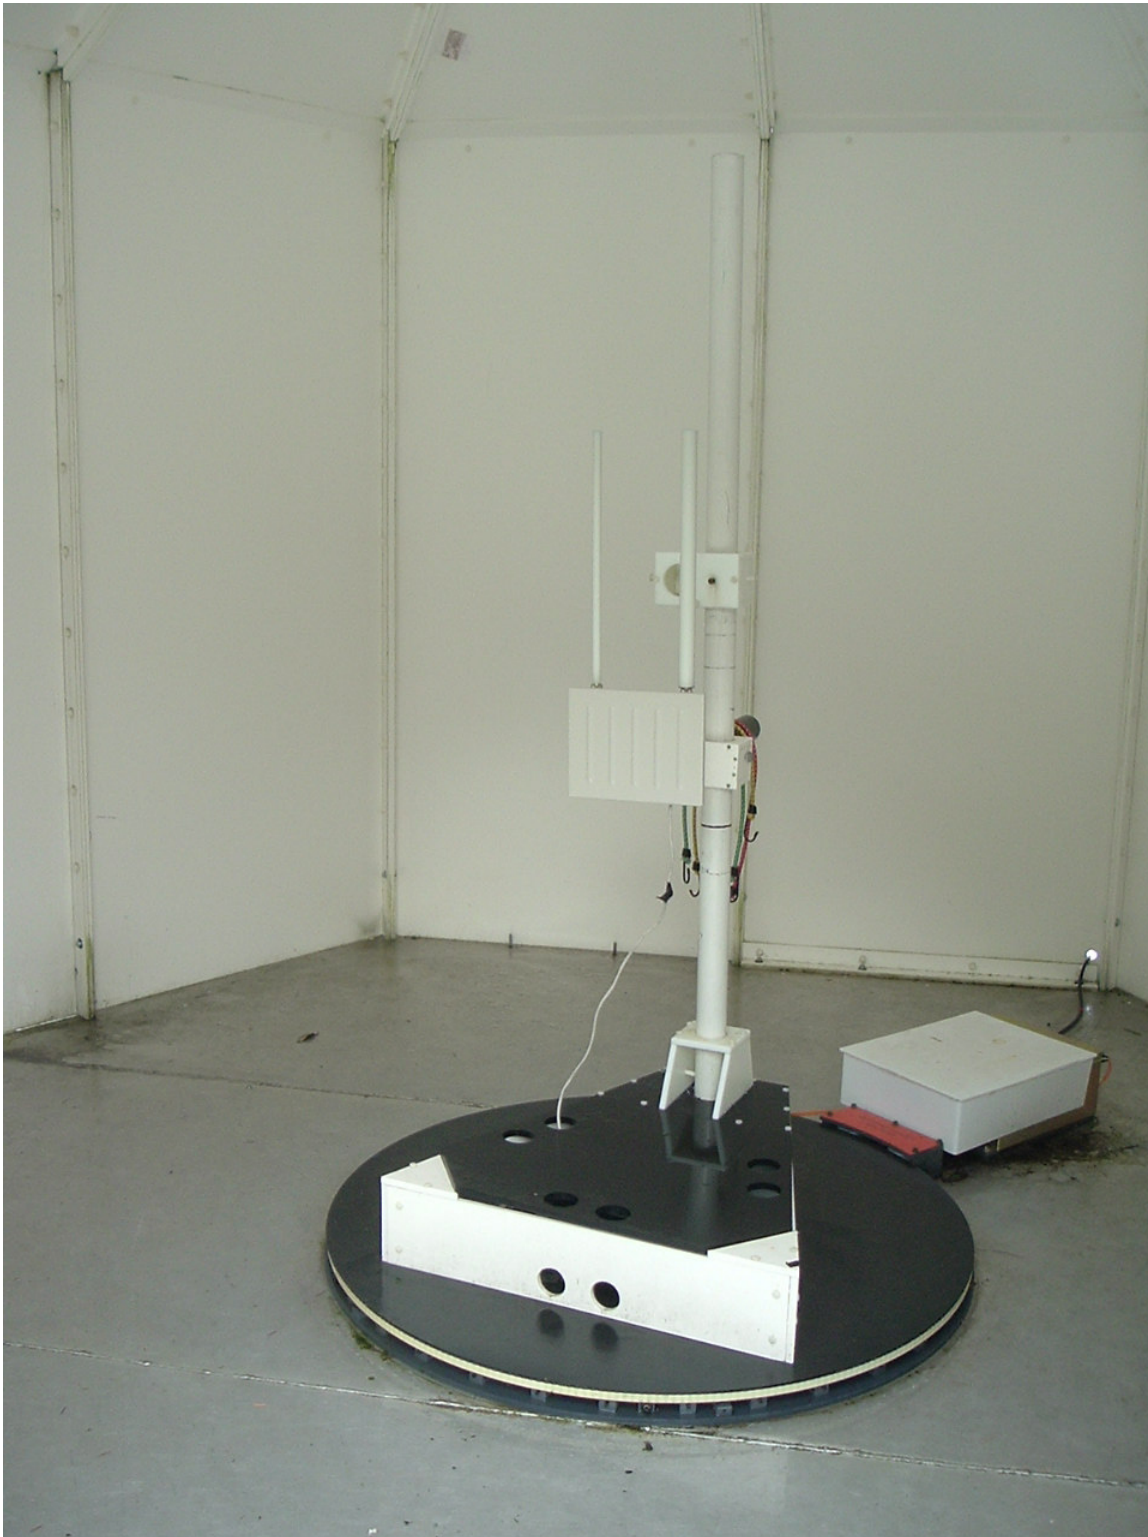

10.2 Conducted emissions setup

