



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E033R-015

Applicant : Mbestek Inc.

Address : 3 Fl. Bo Sung B/D, 1425-1, Seocho-Dong, Seocho-Ku, Seoul, Korea

Manufacturer : Mbestek Inc.

Address : 3 Fl. Bo Sung B/D, 1425-1, Seocho-Dong, Seocho-Ku, Seoul, Korea

Type of Equipment : TFT-LCD Monitor

FCC ID. : QRHMB181ATP

Model / Type No. : MB181ATP

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : January 27, 2003

Date of issue : March 08, 2003

SUMMARY

The equipment complies with the regulation; **FCC PART 15 CFR 47 SUBPART B, Class B**.

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:

G. W. Lee/ Chief Engineer
EMC & Telecom Div.
ONETECH Corp.

Reviewed by:

Y. K. Kwon/ Director
EMC & Telecom Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS.....	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION.....	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS.....	7
3.6 CONFIGURATION OF TEST SYSTEM.....	8
4. PRELIMINARY TEST	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST.....	8
5. FINAL RESULT OF MEASURMENT	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST FOR DIGITAL MODE.....	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT.....	13



1. VERIFICATION OF COMPLIANCE

APPLICANT : Mbestek Inc.
ADDRESS : 3 Fl. Bo Sung B/D, 1425-1, Seocho-Dong, Seocho-Ku, Seoul, Korea
CONTACT PERSON : Jung Myoung Doe / Manager
TELEPHONE NO. : +82-2-583-4330
FCC ID : QRHMB181ATP
MODEL NO/NAME : MB181ATP
SERIAL NUMBER : N/A
DATE : March 08, 2003

DEVICE TYPE	Peripheral Device for Class B Computing Device -UNINTENTIONAL RADIATOR
E.U.T. DESCRIPTION	TFT-LCD Monitor
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART (S)	FCC PART 15 SECTION 15.101(CLASS B)
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	YES
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 and is not affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The Mbestek Inc., Model MB181ATP (referred to as the EUT in this report) is a TFT-LCD Monitor with TV, which has connectors for a TV tuner input, VCR input terminal, Audio input/output and S-Video terminal as well as basic PC monitor. The Verification report for the TV Tuner shall be issued with other test report numbers. The Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic – Non coated
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	16.000 MHz, 27.0052MHz and 24.576MHz on the main board
LCD PANEL SPEC.	LM181E06 (A4M1) / LG. PHILIPS LCD
INPUT VIDEO SIGNAL	VGA Compatible Analog RGB
DISPLAY MODE	Normally White
DISPLAY RESOLUTION	Maximum: 1280 x 1024, 75Hz
POWER REQUIREMENT	AC/DC Adaptor Used (Input: 100-240Vac, 50-60Hz, 1.8A / Output: 12Vdc, 4.16A)
USED AC/DC ADAPTERS	LCA01F manufactured by LIEN CHANG
NUMBER OF LAYERS	Main Board: 4 Layers OSD Board (1), OSD Board (2), Inverter Board & Tuner Board: 2 Layers
EXTERNAL CONNECTORS	Power Input Terminal, D-SUB Terminal, S-VHS Input terminal, External Image Input Terminal, External Sound Input Terminal (Left), External Sound Input Terminal (Right), Audio Input Terminal, Audio Output Terminal and Antenna Input Terminal

Model Differences:

-.. None

2.2 Related Submittal(s) / Grant(s)

-.. Original submittal only



2.3 Test System Details

The model numbers for all the equipments, which were used in the tested system, is:

Model	Manufacturer	Description	FCC ID	Connected to
MB181ATP	Mbestek Inc.	TFT-LCD Monitors (EUT)	QRHMB181ATP	PC
LCA01F	LIEN CHANG	AC/DC ADAPTER	N/A	EUT
GX240	DELL Computer Corp.	PC	DoC	EUT
SK-8110	SILITEK	KEYBOARD	DoC	PC
X06-08477	Microsoft Corp.	MOUSE	DoC	PC
GHV-S9990	GoldStar	VCR	DoC	EUT
2225C	HP	PRINTER	DSI6XU2225	PC
020-0470	CARDINAL	MODEM	GDE0196	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992.

Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Si, Kyounggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	TEVI Logic	N/A	N/A
DC/AC Inverter Board	FRONTEK CO., LTD.	P1866E03	N/A
Tuner Board	N/A	N/A	N/A
OSD Board_1	TEVI Logic	N/A	N/A
OSD Board_2	TEVI Logic	N/A	N/A
LCD Panel	LG PHILIPS LCD	LM181E06 (A4M1)	N/A

3.2 EUT exercise Software

The windows program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. This program was included into HOST. Once loaded, this program sequentially exercises each system component in turn. The sequence used is: (1) series of "H" characters are printed on the monitor until the screen is completely full, (2) copy series of "H" characters to mass storage device (if one is used), (3) print series of "H" characters to printer. The complete cycle is repeated continuously.

The test was performed about each resolution from minimum resolution to maximum resolution for getting maximum noise level and the investigated maximum resolution mode of the EUT was 1280 x 1024, 75Hz.



3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
TFT-LCD Monitor (EUT)	N	Y	1.5(P), 1.2(D)
AC/DC ADAPTER	N	N/A	1.2(P)
PERSONAL COMPUTER	N	Y	1.5(P), 1.2(D)
KEYBOARD	N/A	Y	1.5(D)
MOUSE	N/A	Y	1.5(D)
VCR	N	N	1.5(P), 1.2(D)
PRINTER	N	Y	1.5(P), 1.2(D)
MODEM	N	Y	1.5(P), 1.2(D)

* The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
TFT-LCD Monitor (EUT)	Y	EUT END	Y	BOTH END
AC/DC ADAPTER	Y	EUT END	Y	EUT END
PERSONAL COMPUTER	-	-	-	-
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
VCR	N	N/A	Y	BOTH END
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

1. Added Gaskets Between Metal Housing and LCD Panel.
2. Added gaskets at the bottom side of the shield cover for main board.
3. Added Ferrite Cores between Main board and OSD boards at the nearest connector on the main board.
4. Changed Unshielded OSD Cables to Shielded OSD Cables and Added a ground wire on OSD cables.
5. Changed Unshielded Main Cable to Shielded Main Cable.



3.6 Configuration of Test System

Line Conducted Test: The power of the EUT was supplied by AC/DC adapter and the adapter was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Resolution: 640 x 480	
Resolution: 800 x 600	
Resolution: 1024 x 768	
Resolution: 1280 x 1024	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Resolution: 640 x 480	
Resolution: 800 x 600	
Resolution: 1024 x 768	
Resolution: 1280 x 1024	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test

Humidity Level	: <u>45%</u>	Temperature : <u>17°C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B, SECTION 15.107</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -4.51 dB at 0.18 MHz when used Peak detector mode</u>	

EUT	: TFT-LCD Monitor	Date : March 04, 2003
Operating Condition	: Continuously displayed "H" characters on the screen of EUT	
Detector	: CISPR Quasi-Peak and Average(6 dB Bandwidth: 9 kHz)	
Resolution	: 1280 x 1024, 75Hz	


Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission Level	Detector Mode	Limits		Emission level	Limits	
0.18	N	59.78	P	64.72	-4.94	50.21	54.72	-4.51
0.24	N	52.25	P	62.27	-10.02	45.93	52.27	-6.34
0.29	N	47.32	P	60.52	-13.20	42.22	50.52	-8.30
0.41	N	43.16	P	57.65	-14.49	38.92	47.65	-8.73
0.47	N	40.70	P	56.60	-15.90	38.20	46.60	-8.40
7.24	N	45.85	P	60.00	-14.15	32.23	50.00	-17.77
8.47	N	52.78	P	60.00	-7.22	35.82	50.00	-14.18

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector, "Q.P.": Quasi-Peak Detector Mode

See Appendix I for an overview sweep performed with peak detector and average.

Tested by : Dan-ki, Lee / Test Engineer

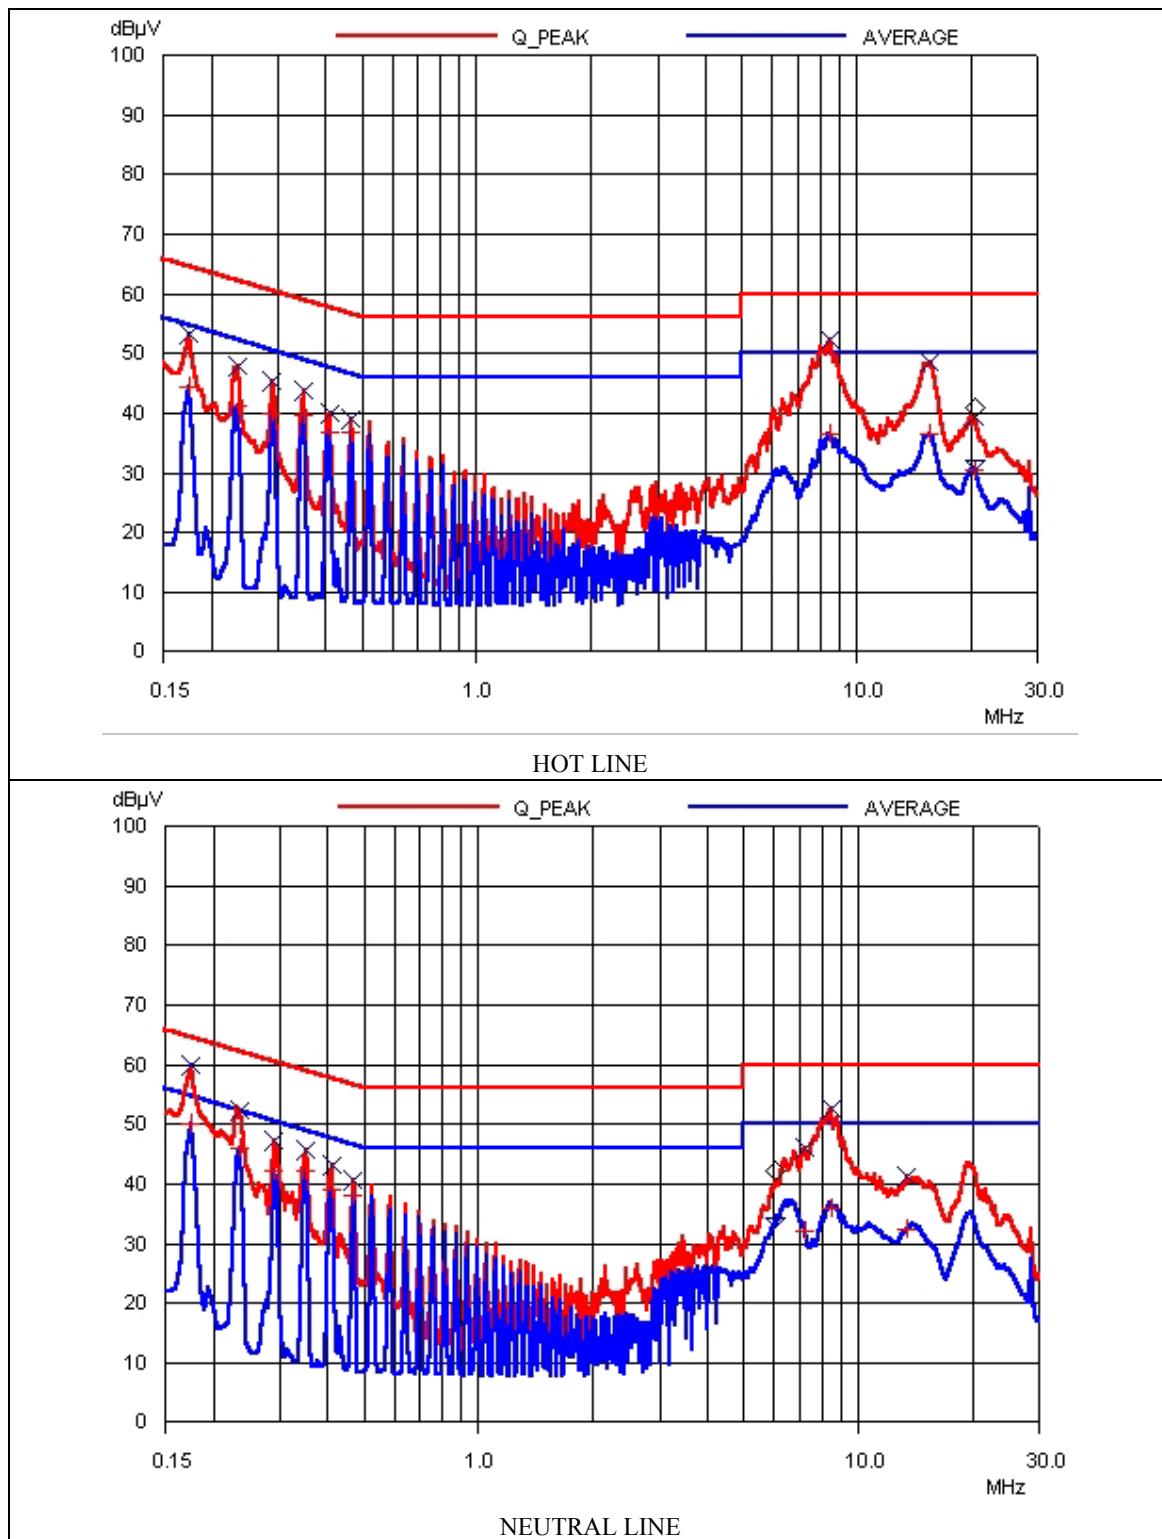



5.2 Radiated Emission Test for Digital mode

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>47 %</u>	Temperature : <u>14°C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B, SECTION 15.109</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -3.68 dB at 53.90 MHz</u>	

EUT	: TFT-LCD Monitor	Date : March 05, 2003
Operating Condition	: Continuously displayed "H" characters on the screen of EUT	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	
Resolution	: 1280 x 1024, 75Hz	

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
43.10	19.30	V	10.80	0.86	30.96	40.00	-9.04
53.90	25.10	V	10.25	0.97	36.32	40.00	-3.68
75.80	23.90	V	6.98	1.00	31.88	40.00	-8.12
97.58	19.10	V	11.36	1.14	31.60	40.00	-8.40
108.11	20.50	V	12.76	1.19	34.45	40.00	-5.55
137.99	18.10	H	12.63	1.30	32.03	40.00	-7.97
162.02	13.60	V	15.67	1.39	30.66	40.00	-9.34
183.80	16.50	H	16.27	1.47	34.24	40.00	-5.76
194.60	11.80	H	16.68	1.54	30.02	40.00	-9.98
248.20	25.70	H	12.00	1.82	39.52	47.00	-7.48
270.00	26.60	H	12.74	1.88	41.22	47.00	-5.78
302.60	17.00	H	15.01	2.02	34.03	47.00	-12.97
583.40	14.50	H	18.81	2.88	35.89	47.00	-11.11

Radiated Emission Tabulated Data

Tested by : Dan-ki, Lee / Test Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/02	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APR/02	12MONTH	
3.	Spectrum analyzer	HP	8568B	3026A0226	APR/02	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	APR/02	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/02	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/02	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/03	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	JUN/02	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUN/02	12MONTH	■
10.	RF Amplifier	HP	8447F	3113A04554	JUN/02	N/A	
11.	Spectrum Analyzer	HP	8591A	3131A02312	APR/02	12MONTH	
12.	Computer System Hard disk drive	HP	98581C 9153C	98543A CMC762Z9153	N/A N/A	N/A N/A	
13.	Plotter	HP	7475A	30052 22986	N/A	N/A	
14.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
15.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
16.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

* Mark “■” means used equipment.