

# **FCC REPORT** (Bluetooth)

**Applicant:** Azumi S.A

**Address of Applicant:** Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza,  
Piso 16 of. 16-01, Marbella, Ciudad de Panama City, Rep.  
Panama

**Equipment Under Test (EUT)**

**Product Name:** Mobile Phone

**Model No.:** Chic wf

**FCC ID:** QRP-AZUMICHICWF

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247:2011

**Date of sample receipt:** 22 Oct., 2012

**Date of Test:** 25 Oct., to 27 Oct., 2012

**Date of report issued:** 29 Oct., 2012

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | 29 Oct., 2012 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |
|             |               |             |

**Prepared By:**

*Joe. Zhou*

**Project Engineer**

**Date:**

29 Oct., 2012

**Check By:**

*Bruce Zhang*

**Reviewer**

**Date:**

29 Oct., 2012

## 2 Contents

|                                                      | Page      |
|------------------------------------------------------|-----------|
| <b>1 COVER PAGE .....</b>                            | <b>1</b>  |
| <b>2 CONTENTS.....</b>                               | <b>3</b>  |
| <b>3 TEST SUMMARY.....</b>                           | <b>4</b>  |
| <b>4 GENERAL INFORMATION .....</b>                   | <b>5</b>  |
| 4.1 CLIENT INFORMATION.....                          | 5         |
| 4.2 GENERAL DESCRIPTION OF E.U.T. ....               | 5         |
| 4.3 TEST MODE.....                                   | 7         |
| 4.4 TEST FACILITY .....                              | 7         |
| 4.5 TEST LOCATION .....                              | 7         |
| 4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 7         |
| 4.7 TEST INSTRUMENTS LIST .....                      | 8         |
| <b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>      | <b>9</b>  |
| 5.1 ANTENNA REQUIREMENT: .....                       | 9         |
| 5.2 CONDUCTED EMISSIONS.....                         | 10        |
| 5.3 CONDUCTED OUTPUT POWER .....                     | 13        |
| 5.4 20dB OCCUPY BANDWIDTH.....                       | 17        |
| 5.5 CARRIER FREQUENCIES SEPARATION.....              | 21        |
| 5.6 HOPPING CHANNEL NUMBER .....                     | 26        |
| 5.7 DWELL TIME .....                                 | 28        |
| 5.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....     | 32        |
| 5.9 BAND EDGE .....                                  | 33        |
| 5.9.1 Conducted Emission Method .....                | 33        |
| 5.9.2 Radiated Emission Method.....                  | 37        |
| 5.10 SPURIOUS EMISSION .....                         | 39        |
| 5.10.1 Conducted Emission Method.....                | 39        |
| 5.10.2 Radiated Emission Method.....                 | 43        |
| <b>6 TEST SETUP PHOTO.....</b>                       | <b>48</b> |
| <b>7 EUT CONSTRUCTIONAL DETAILS .....</b>            | <b>49</b> |

### 3 Test Summary

| Test Item                               | Section in CFR 47                                | Result |
|-----------------------------------------|--------------------------------------------------|--------|
| Antenna Requirement                     | 15.203/15.247 (c)                                | Pass   |
| AC Power Line Conducted Emission        | 15.207                                           | Pass   |
| Conducted Peak Output Power             | 15.247 (b)(1)                                    | Pass   |
| 20dB Occupied Bandwidth                 | 15.247 (a)(1)                                    | Pass   |
| Carrier Frequencies Separation          | 15.247 (a)(1)                                    | Pass   |
| Hopping Channel Number                  | 15.247 (a)(1)                                    | Pass   |
| Dwell Time                              | 15.247 (a)(1)                                    | Pass   |
| Pseudorandom Frequency Hopping Sequence | 15.247(b)(4)&TCB Exclusion List<br>(7 July 2002) | Pass   |
| Radiated Emission                       | 15.205/15.209                                    | Pass   |
| Band Edge                               | 15.247(d)                                        | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

## 4 General Information

### 4.1 Client Information

|                          |                                                                                                                                   |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Applicant:               | Azumi S.A                                                                                                                         |
| Address of Applicant:    | Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panama City, Rep. Panama      |
| Manufacturer:            | ZECHIN Technology Co., Ltd                                                                                                        |
| Address of Manufacturer: | Unit804,8th Floor Desay Tech Building Gaoxin Road South,Nanshan District Shenzhen,China                                           |
| Factory:                 | Longconn Electronics(Shenzhen) Co.,Ltd                                                                                            |
| Address of Factory:      | (Xinchuangji Industrial park) NO. 42,Xingye 1 Road,Phoenix 1st Industrial Zone,Fuyong Town,Baoan District, Shenzhen,518103 ,China |

### 4.2 General Description of E.U.T.

|                        |                                                          |
|------------------------|----------------------------------------------------------|
| Product Name:          | Mobile Phone                                             |
| Model No.:             | Chic wf                                                  |
| Operation Frequency:   | 2402MHz~2480MHz                                          |
| Transfer rate:         | 1/2/3 Mbits/s                                            |
| Number of channel:     | 79                                                       |
| Modulation type:       | GFSK, $\pi/4$ -DQPSK, 8DPSK                              |
| Modulation technology: | FHSS                                                     |
| Antenna Type:          | Integral Antenna                                         |
| Antenna gain:          | -4 dBi                                                   |
| AC adapter:            | Input:100-240V AC,50/60Hz 0.15A<br>Output:5V DC MAX400mA |
| Power supply:          | Rechargeable Li-ion Battery DC3.7V/800mAh                |

| Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK     |           |         |           |         |           |         |           |
|-------------------------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                                                 | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0                                                                       | 2402MHz   | 20      | 2422MHz   | 40      | 2442MHz   | 60      | 2462MHz   |
| 1                                                                       | 2403MHz   | 21      | 2423MHz   | 41      | 2443MHz   | 61      | 2463MHz   |
| 2                                                                       | 2404MHz   | 22      | 2424MHz   | 42      | 2444MHz   | 62      | 2464MHz   |
| 3                                                                       | 2405MHz   | 23      | 2425MHz   | 43      | 2445MHz   | 63      | 2465MHz   |
| 4                                                                       | 2406MHz   | 24      | 2426MHz   | 44      | 2446MHz   | 64      | 2466MHz   |
| 5                                                                       | 2407MHz   | 25      | 2427MHz   | 45      | 2447MHz   | 65      | 2467MHz   |
| 6                                                                       | 2408MHz   | 26      | 2428MHz   | 46      | 2448MHz   | 66      | 2468MHz   |
| 7                                                                       | 2409MHz   | 27      | 2429MHz   | 47      | 2449MHz   | 67      | 2469MHz   |
| 8                                                                       | 2410MHz   | 28      | 2430MHz   | 48      | 2450MHz   | 68      | 2470MHz   |
| 9                                                                       | 2411MHz   | 29      | 2431MHz   | 49      | 2451MHz   | 69      | 2471MHz   |
| 10                                                                      | 2412MHz   | 30      | 2432MHz   | 50      | 2452MHz   | 70      | 2472MHz   |
| 11                                                                      | 2413MHz   | 31      | 2433MHz   | 51      | 2453MHz   | 71      | 2473MHz   |
| 12                                                                      | 2414MHz   | 32      | 2434MHz   | 52      | 2454MHz   | 72      | 2474MHz   |
| 13                                                                      | 2415MHz   | 33      | 2435MHz   | 53      | 2455MHz   | 73      | 2475MHz   |
| 14                                                                      | 2416MHz   | 34      | 2436MHz   | 54      | 2456MHz   | 74      | 2476MHz   |
| 15                                                                      | 2417MHz   | 35      | 2437MHz   | 55      | 2457MHz   | 75      | 2477MHz   |
| 16                                                                      | 2418MHz   | 36      | 2438MHz   | 56      | 2458MHz   | 76      | 2478MHz   |
| 17                                                                      | 2419MHz   | 37      | 2439MHz   | 57      | 2459MHz   | 77      | 2479MHz   |
| 18                                                                      | 2420MHz   | 38      | 2440MHz   | 58      | 2460MHz   | 78      | 2480MHz   |
| 19                                                                      | 2421MHz   | 39      | 2441MHz   | 59      | 2461MHz   |         |           |
| Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK. |           |         |           |         |           |         |           |

## 4.3 Test mode

|                    |                                                              |
|--------------------|--------------------------------------------------------------|
| Transmitting mode: | Keep the EUT in transmitting mode with worse case data rate. |
| Remark             | 8DPSK were the worst case mode.                              |

## 4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.:** 817957

China Certification & Inspection Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of China Certification & Inspection Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

## 4.5 Test Location

All tests were performed at:

China Certification & Inspection Services Co., Ltd.

Address: 1st Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-23118282

Fax: 0755-23116366

## 4.6 Other Information Requested by the Customer

None.


## 4.7 Test Instruments list

| Radiated Emission: |                               |                                      |                             |               |                     |                         |
|--------------------|-------------------------------|--------------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                | Manufacturer                         | Model No.                   | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1                  | 3m Semi- Anechoic Chamber     | SAEMC                                | 9(L)*6(W)* 6(H)             | CCIS0001      | June 09 2012        | June 09 2013            |
| 2                  | Control Room                  | ZhongYu Electron                     | 6.2(L)*2.5(W)* 2.4(H)       | CCIS0002      | N/A                 | N/A                     |
| 3                  | BiConiLog Antenna             | SCHWARZBECK<br>MESS-ELEKTRONIK       | VULB9163                    | CCIS0005      | June 04 2012        | June 04 2013            |
| 4                  | Double -ridged waveguide horn | SCHWARZBECK<br>MESS-ELEKTRONIK       | BBHA9120D                   | CCIS0006      | May 30 2012         | May 30 2013             |
| 5                  | EMI Test Software             | AUDIX                                | E3                          | N/A           | N/A                 | N/A                     |
| 6                  | Coaxial Cable                 | CCIS                                 | N/A                         | CCIS0016      | Apr. 01 2012        | Apr. 01 2013            |
| 7                  | Coaxial Cable                 | CCIS                                 | N/A                         | CCIS0017      | Apr. 01 2012        | Apr. 01 2013            |
| 8                  | Coaxial cable                 | CCIS                                 | N/A                         | CCIS0018      | Apr. 01 2012        | Apr. 01 2013            |
| 9                  | Coaxial Cable                 | CCIS                                 | N/A                         | CCIS0019      | Apr. 01 2012        | Apr. 01 2013            |
| 10                 | Coaxial Cable                 | CCIS                                 | N/A                         | CCIS0087      | Apr. 01 2012        | Apr. 01 2013            |
| 11                 | Amplifier(10KHz-1.3GHz)       | HP                                   | 8447D                       | CCIS0003      | Apr. 01 2012        | Apr. 01 2013            |
| 12                 | Amplifier(1GHz-18GHz)         | Compliance<br>Direction Systems Inc. | PAP-1G18                    | CCIS0011      | June 09 2012        | June 09 2013            |
| 13                 | Pre-amplifier (18-26GHz)      | Rohde & Schwarz                      | AFS33-18002<br>650-30-8P-44 | GTS218        | Apr. 01 2012        | Mar. 31 2013            |
| 14                 | Horn Antenna                  | ETS-LINDGREN                         | 3160                        | GTS217        | Mar. 30 2012        | Mar. 29 2013            |
| 15                 | Printer                       | Hp                                   | HP LaserJet P1007           | N/A           | N/A                 | N/A                     |
| 16                 | Positioning Controller        | UC                                   | UC3000                      | CCIS0015      | N/A                 | N/A                     |


| Conducted Emission: |                   |                    |                       |               |                     |                         |
|---------------------|-------------------|--------------------|-----------------------|---------------|---------------------|-------------------------|
| Item                | Test Equipment    | Manufacturer       | Model No.             | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1                   | Shielding Room    | ZhongShuo Electron | 11.0(L)x4.0(W)x3.0(H) | CCIS0061      | Oct. 10 2012        | Oct. 10 2013            |
| 2                   | EMI Test Receiver | Rohde & Schwarz    | ESPI                  | CCIS0022      | Mar. 16 2012        | Mar. 16 2013            |
| 4                   | LISN              | CHASE              | MN2050D               | CCIS0074      | Apr. 14 2012        | Apr. 14 2013            |
| 5                   | Coaxial Cable     | CCIS               | N/A                   | CCIS0086      | Mar. 01 2012        | Mar. 01 2013            |
| 6                   | EMI Test Software | AUDIX              | E3                    | N/A           | N/A                 | N/A                     |

## 5 Test results and Measurement Data

### 5.1 Antenna requirement:

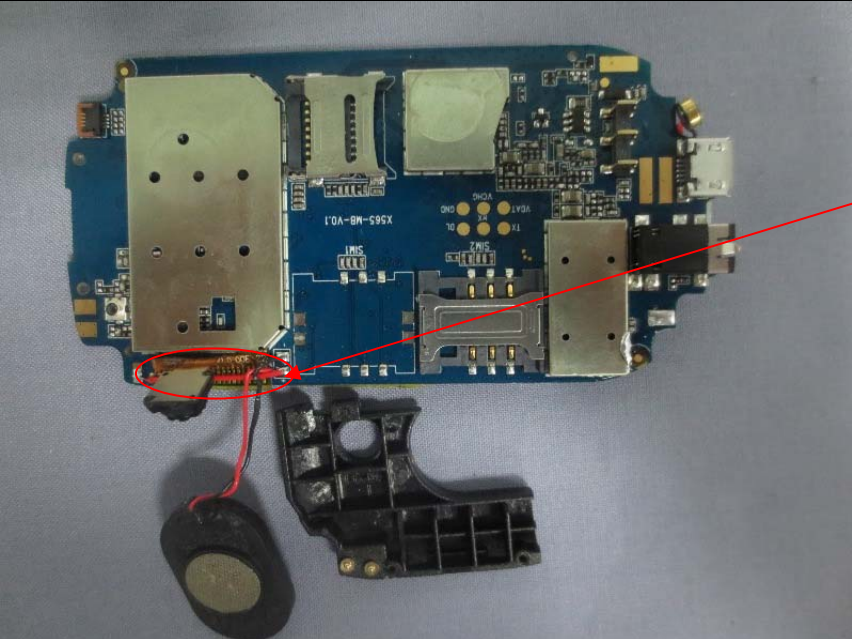
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | FCC Part15 C Section 15.203 /247(c) |
| <p><b>15.203 requirement:</b><br/> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><b>15.247(c) (1)(i) requirement:</b><br/> <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p> |                                     |
| <b>E.U.T Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| <p><i>The antenna is an integral antenna which permanently attached, and the best case gain of the antenna is -4 dBi.</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                     |
|  <p>Bluetooth Antenna</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     |

## 5.2 Conducted Emissions
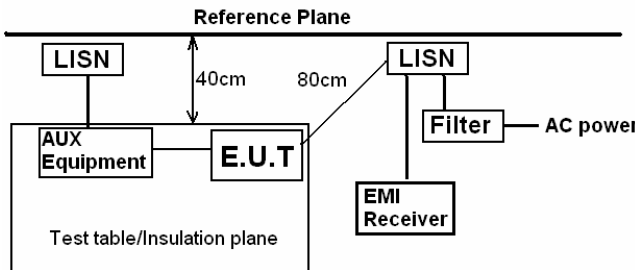
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |           |
| Test Method:                                     | ANSI C63.4:2003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
| Test Frequency Range:                            | 150KHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
| Class / Severity:                                | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |           |
| Receiver setup:                                  | RBW=9kHz, VBW=30kHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
| Test setup:                                      |  <p>Remark:<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |              |           |
| Test procedure:                                  | <ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol> |              |           |
| Test Instruments:                                | Refer to section 5.7 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |           |
| Test mode:                                       | Bluetooth mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |           |
| Test results:                                    | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              |           |

### Measurement Data

Line:

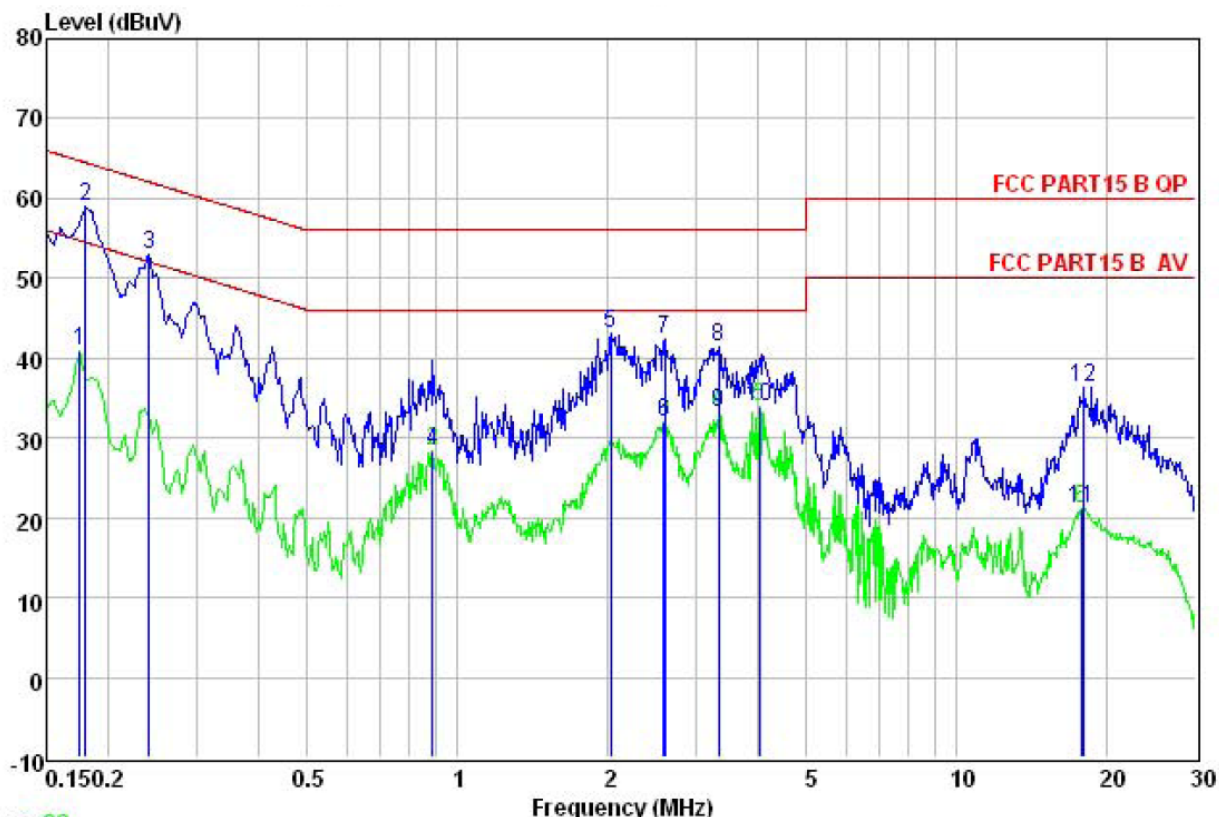


Trace: 29

Site : CCIS Conducted Test Site  
Condition : FCC PART15 B QP LISN LINE  
Job NO. : 205RF  
Test Mode : BT mode  
Test engineer: Joe  
Power Rating: AC 120V/60Hz

|    | Freq   | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |         |
| 1  | 0.175  | 30.02      | 10.23       | 0.77       | 41.02 | 54.72      | -13.70     | Average |
| 2  | 0.180  | 47.90      | 10.22       | 0.77       | 58.89 | 64.50      | -5.61      | QP      |
| 3  | 0.240  | 41.97      | 10.23       | 0.75       | 52.95 | 62.08      | -9.13      | QP      |
| 4  | 0.890  | 17.36      | 10.20       | 0.84       | 28.40 | 46.00      | -17.60     | Average |
| 5  | 2.023  | 31.91      | 10.28       | 0.96       | 43.15 | 56.00      | -12.85     | QP      |
| 6  | 2.581  | 20.69      | 10.28       | 0.94       | 31.91 | 46.00      | -14.09     | Average |
| 7  | 2.594  | 31.04      | 10.28       | 0.94       | 42.26 | 56.00      | -13.74     | QP      |
| 8  | 3.328  | 30.28      | 10.29       | 0.90       | 41.47 | 56.00      | -14.53     | QP      |
| 9  | 3.328  | 21.94      | 10.29       | 0.90       | 33.13 | 46.00      | -12.87     | Average |
| 10 | 4.006  | 22.78      | 10.29       | 0.89       | 33.96 | 46.00      | -12.04     | Average |
| 11 | 17.755 | 9.94       | 10.29       | 0.92       | 21.15 | 50.00      | -28.85     | Average |
| 12 | 17.944 | 25.20      | 10.29       | 0.92       | 36.41 | 60.00      | -23.59     | QP      |

Neutral:

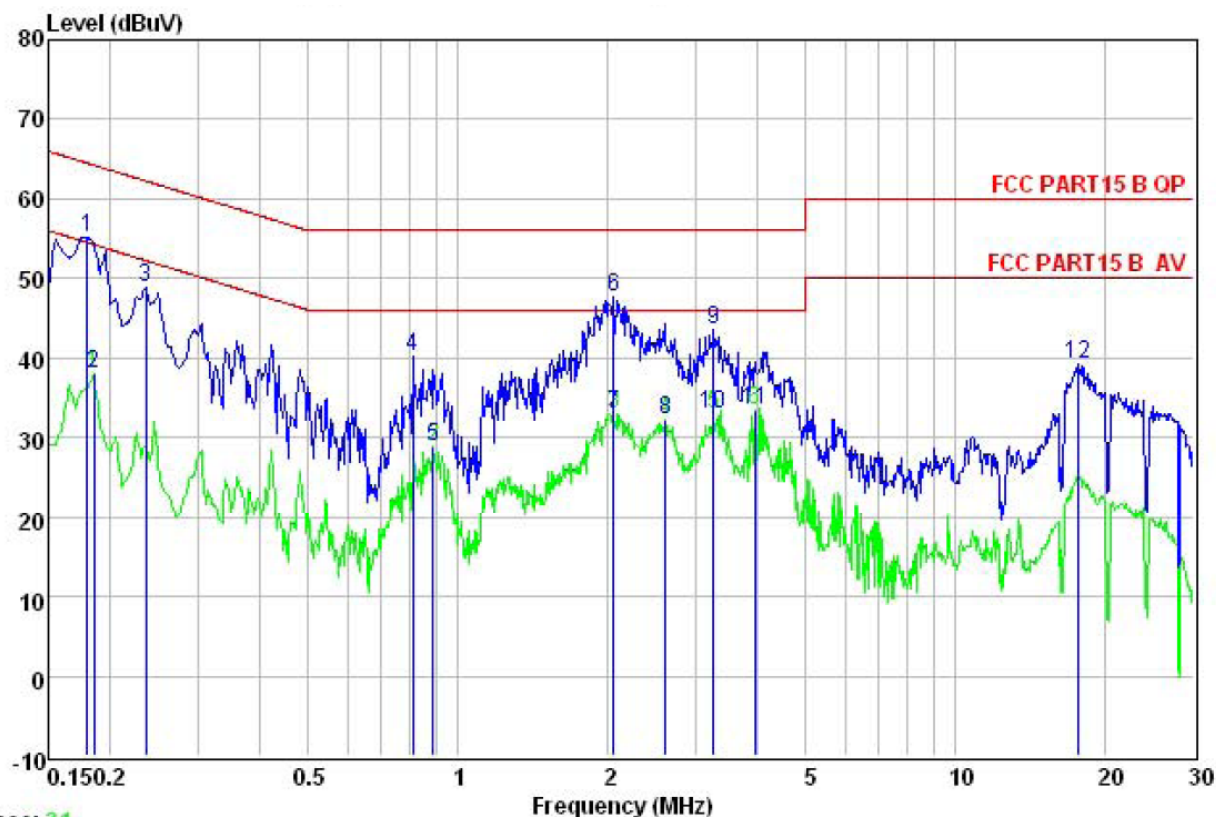

Trace: 31


Site : CCIS Conducted Test Site  
 Condition : FCC PART15 B QP LISN NEUTRAL  
 Job NO. : 205RF  
 Test Mode : BT mode  
 Test engineer: Joe  
 Power Rating: AC 120W/60Hz

|    | Freq   | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |         |
| 1  | 0.180  | 44.26      | 10.24       | 0.77       | 55.27 | 64.50      | -9.23      | QP      |
| 2  | 0.185  | 26.97      | 10.24       | 0.77       | 37.98 | 54.24      | -16.26     | Average |
| 3  | 0.235  | 37.98      | 10.23       | 0.75       | 48.96 | 62.26      | -13.30     | QP      |
| 4  | 0.809  | 29.12      | 10.18       | 0.81       | 40.11 | 56.00      | -15.89     | QP      |
| 5  | 0.890  | 17.90      | 10.19       | 0.84       | 28.93 | 46.00      | -17.07     | Average |
| 6  | 2.055  | 36.33      | 10.27       | 0.96       | 47.56 | 56.00      | -8.44      | QP      |
| 7  | 2.055  | 21.84      | 10.27       | 0.96       | 33.07 | 46.00      | -12.93     | Average |
| 8  | 2.608  | 21.08      | 10.27       | 0.94       | 32.29 | 46.00      | -13.71     | Average |
| 9  | 3.258  | 32.40      | 10.28       | 0.90       | 43.58 | 56.00      | -12.42     | QP      |
| 10 | 3.258  | 21.69      | 10.28       | 0.90       | 32.87 | 46.00      | -13.13     | Average |
| 11 | 3.943  | 22.33      | 10.28       | 0.89       | 33.50 | 46.00      | -12.50     | Average |
| 12 | 17.661 | 27.93      | 10.29       | 0.92       | 39.14 | 60.00      | -20.86     | QP      |

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

## 5.3 Conducted Output Power

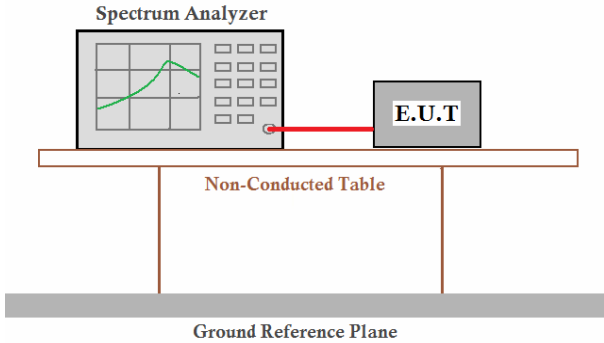
|                   |                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3)                                                                                |
| Test Method:      | ANSI C63.4:2003 and DA00-705                                                                                      |
| Receiver setup:   | RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤ 1 MHz)<br>RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz) |
| Limit:            | 30dBm                                                                                                             |
| Test setup:       |                                 |
| Test Instruments: | Refer to section 5.7 for details                                                                                  |
| Test mode:        | Non-hopping mode                                                                                                  |
| Test results:     | Pass                                                                                                              |

## Measurement Data


| GFSK mode           |                         |             |        |
|---------------------|-------------------------|-------------|--------|
| Test channel        | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest              | 5.20                    | 30.00       | Pass   |
| Middle              | 5.61                    | 30.00       | Pass   |
| Highest             | 6.22                    | 30.00       | Pass   |
| $\pi/4$ -DQPSK mode |                         |             |        |
| Test channel        | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest              | 4.05                    | 30.00       | Pass   |
| Middle              | 4.63                    | 30.00       | Pass   |
| Highest             | 5.33                    | 30.00       | Pass   |
| 8DPSK mode          |                         |             |        |
| Test channel        | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest              | 4.14                    | 30.00       | Pass   |
| Middle              | 4.78                    | 30.00       | Pass   |
| Highest             | 5.51                    | 30.00       | Pass   |

Test plot as follows:


|                  |      |
|------------------|------|
| Modulation mode: | GFSK |
|------------------|------|

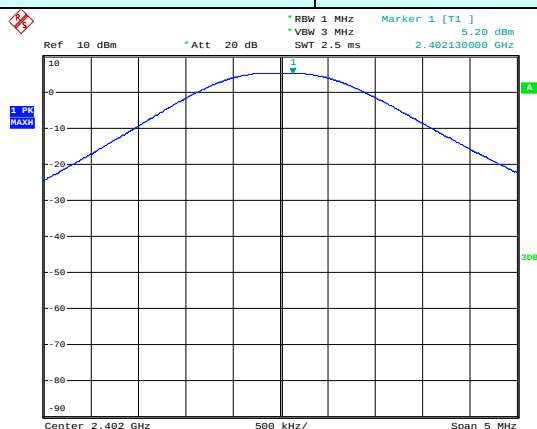

Lowest channel

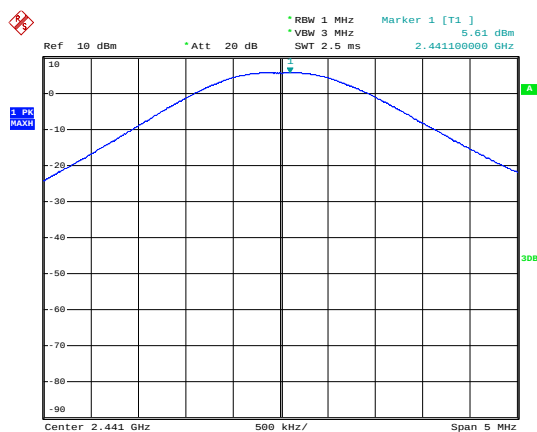


Middle channel

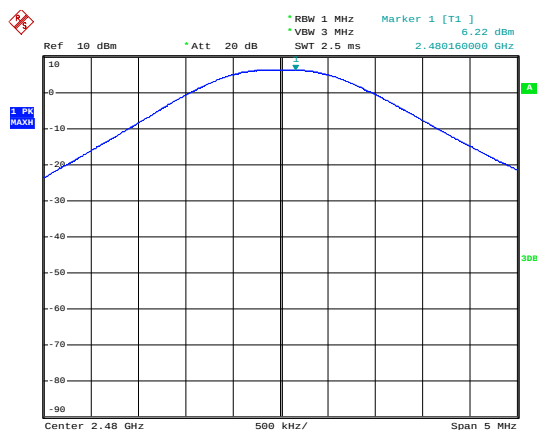


Highest channel


|                  |                |
|------------------|----------------|
| Modulation mode: | $\pi/4$ -DQPSK |
|------------------|----------------|

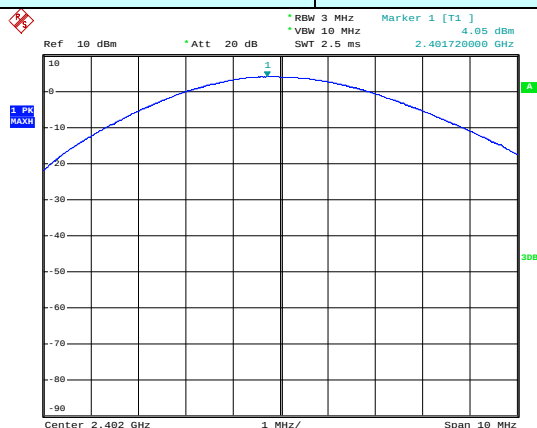

Lowest channel

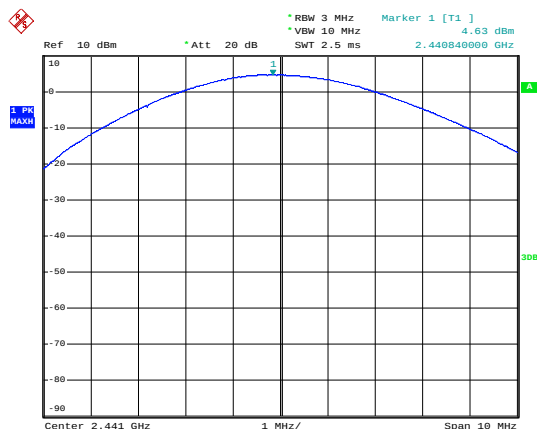


Middle channel

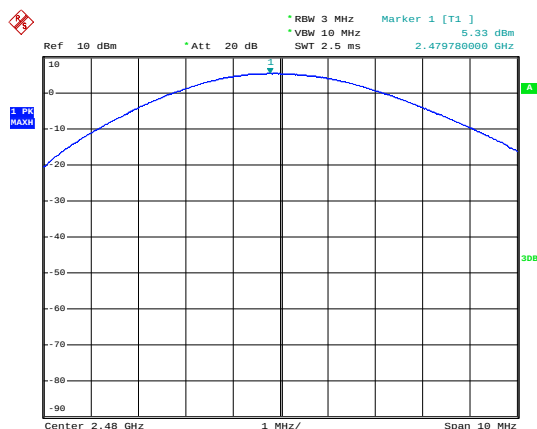


Highest channel


|                  |       |
|------------------|-------|
| Modulation mode: | 8DPSK |
|------------------|-------|

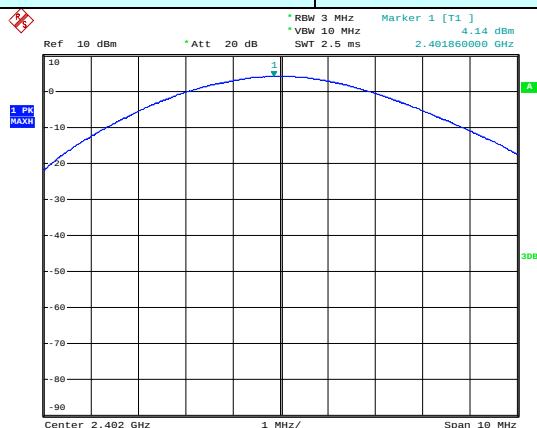

Lowest channel

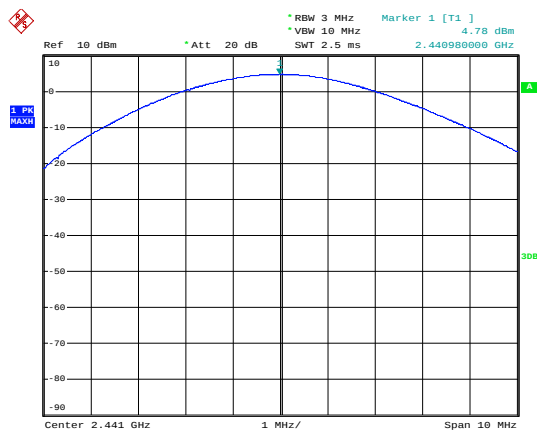


Middle channel

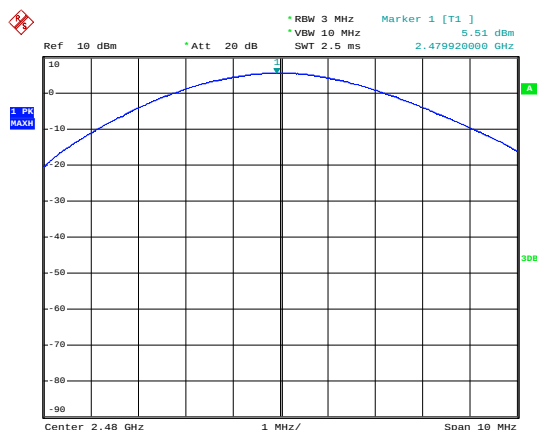

Highest channel

## 5.420dB Occupy Bandwidth
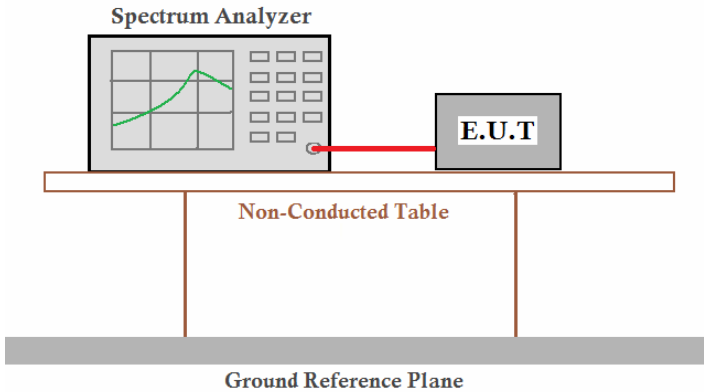
|                   |                                                                                                                                                                                                                                                                                                                |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)                                                                                                                                                                                                                                                                             |
| Test Method:      | ANSI C63.4:2003 and DA00-705                                                                                                                                                                                                                                                                                   |
| Receiver setup:   | RBW=30kHz, VBW=100kHz,detector=Peak                                                                                                                                                                                                                                                                            |
| Limit:            | NA                                                                                                                                                                                                                                                                                                             |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.7 for details                                                                                                                                                                                                                                                                               |
| Test mode:        | Non-hopping mode                                                                                                                                                                                                                                                                                               |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                           |


### Measurement Data

| Test channel | 20dB Occupy Bandwidth (kHz) |                |       |
|--------------|-----------------------------|----------------|-------|
|              | GFSK                        | $\pi/4$ -DQPSK | 8DPSK |
| Lowest       | 964                         | 1120           | 1164  |
| Middle       | 952                         | 1120           | 1164  |
| Highest      | 980                         | 1120           | 1168  |


Test plot as follows:

Modulation mode:


GFSK

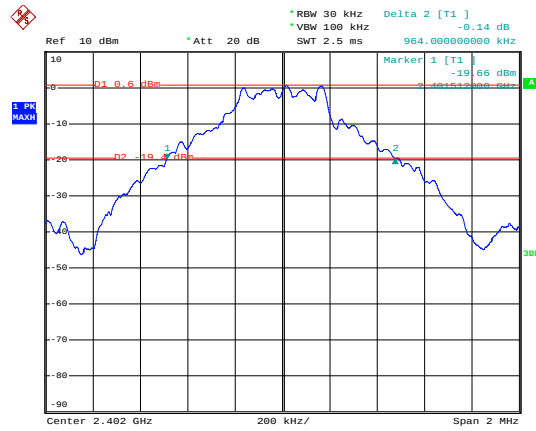

Lowest channel

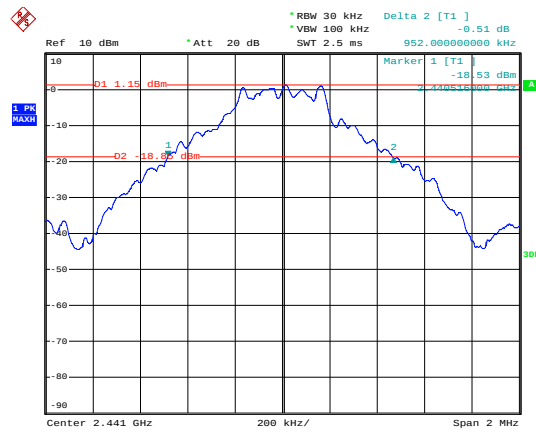


Middle channel

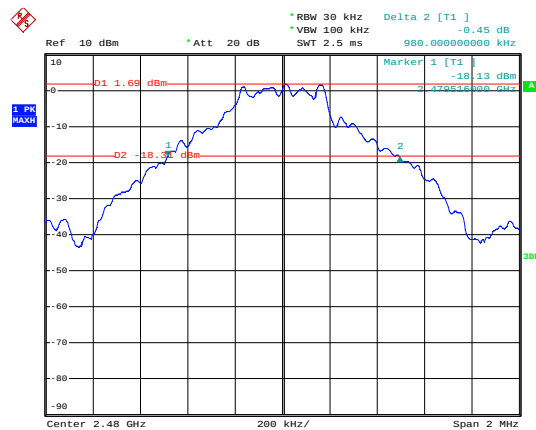


Highest channel


|                  |                |
|------------------|----------------|
| Modulation mode: | $\pi/4$ -DQPSK |
|------------------|----------------|

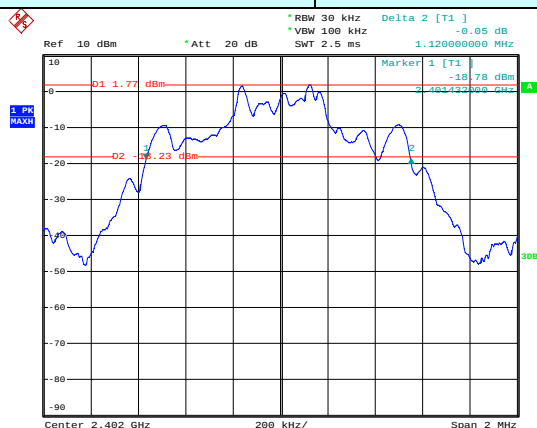

Lowest channel

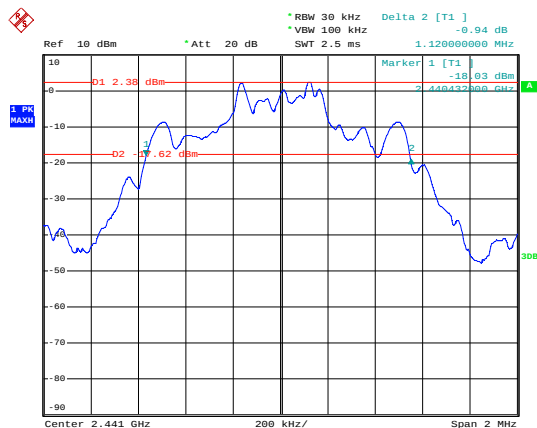


Middle channel

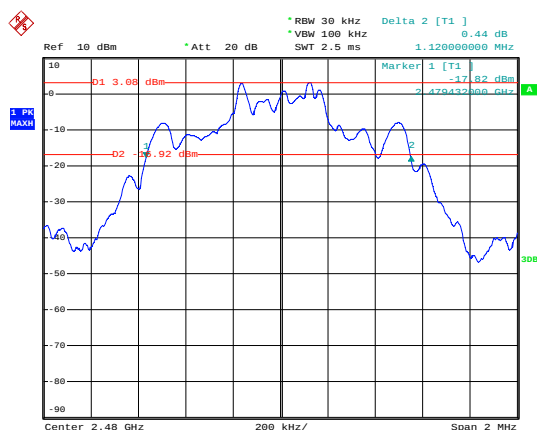


Highest channel


|                  |       |
|------------------|-------|
| Modulation mode: | 8DPSK |
|------------------|-------|

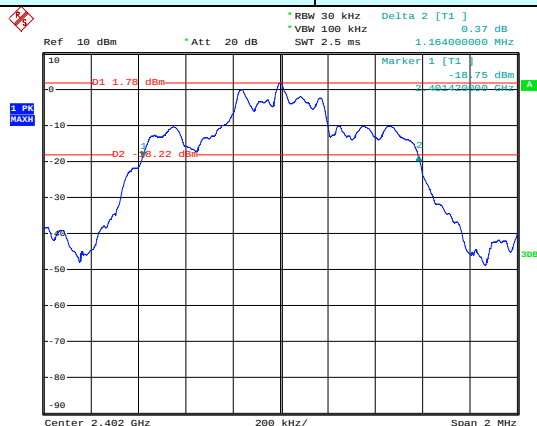

Lowest channel

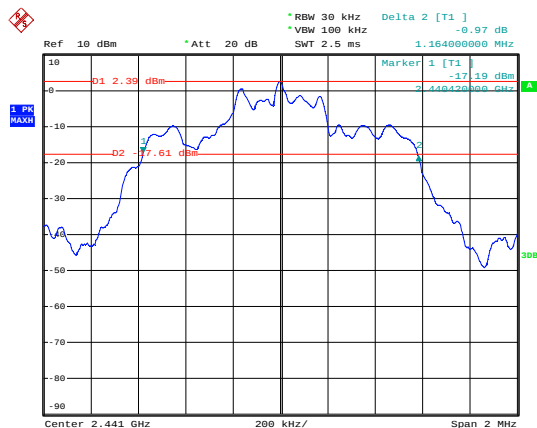


Middle channel

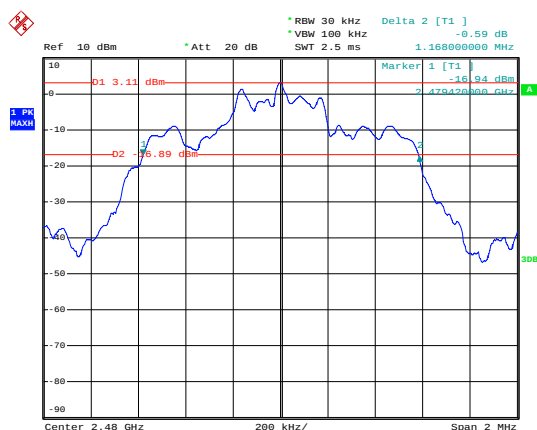

Highest channel

## 5.5 Carrier Frequencies Separation
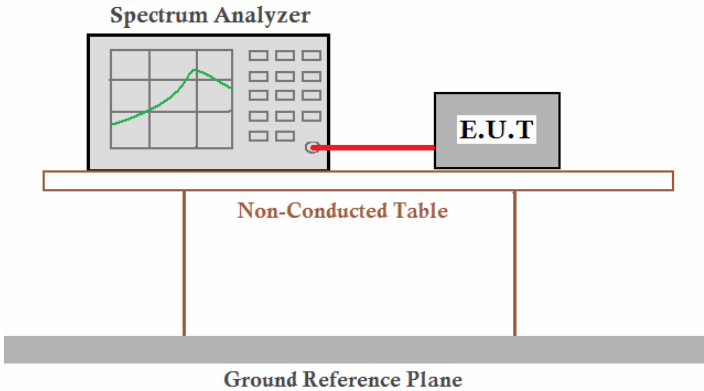
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Method:      | ANSI C63.4:2003 and DA00-705                                                                                                                                                                                                                                                                                                                                                                                                      |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, detector=Peak                                                                                                                                                                                                                                                                                                                                                                                             |
| Limit:            | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)                                                                                                                                                                                                                                                                                                                                                                      |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p> |
| Test Instruments: | Refer to section 5.7 for details                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test mode:        | Hopping mode                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                              |

### Measurement Data


| GFSK mode           |                                      |             |        |
|---------------------|--------------------------------------|-------------|--------|
| Test channel        | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
| Lowest              | 1004                                 | 653.333     | Pass   |
| Middle              | 1000                                 | 653.333     | Pass   |
| Highest             | 1000                                 | 653.333     | Pass   |
| $\pi/4$ -DQPSK mode |                                      |             |        |
| Test channel        | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
| Lowest              | 1008                                 | 746.667     | Pass   |
| Middle              | 1000                                 | 746.667     | Pass   |
| Highest             | 1000                                 | 746.667     | Pass   |
| 8DPSK mode          |                                      |             |        |
| Test channel        | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
| Lowest              | 1000                                 | 778.667     | Pass   |
| Middle              | 1008                                 | 778.667     | Pass   |
| Highest             | 1000                                 | 778.667     | Pass   |

Note: According to section 5.4


| Mode           | 20dB bandwidth (kHz)<br>(worse case) | Limit (kHz)<br>(Carrier Frequencies Separation) |
|----------------|--------------------------------------|-------------------------------------------------|
| GFSK           | 980                                  | 653.333                                         |
| $\pi/4$ -DQPSK | 1120                                 | 746.667                                         |
| 8DPSK          | 1168                                 | 778.667                                         |

Test plot as follows:


|                  |      |
|------------------|------|
| Modulation mode: | GFSK |
|------------------|------|

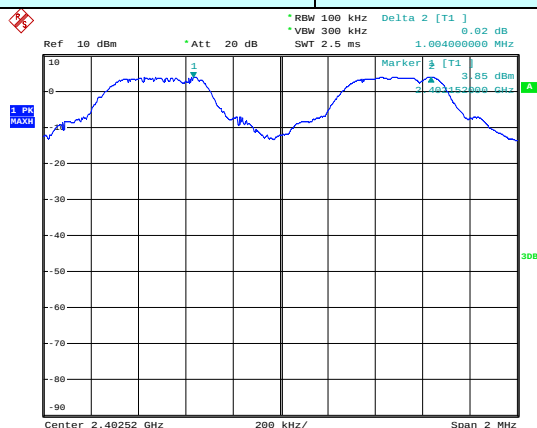

Lowest channel

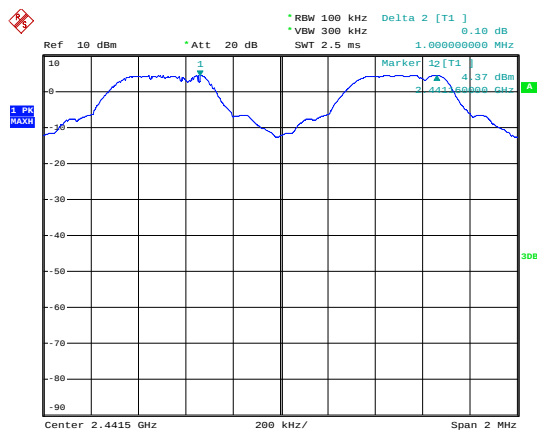


Middle channel

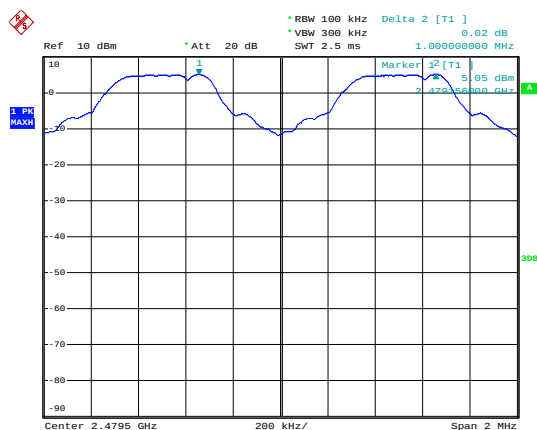


Highest channel


|                  |                |
|------------------|----------------|
| Modulation mode: | $\pi/4$ -DQPSK |
|------------------|----------------|

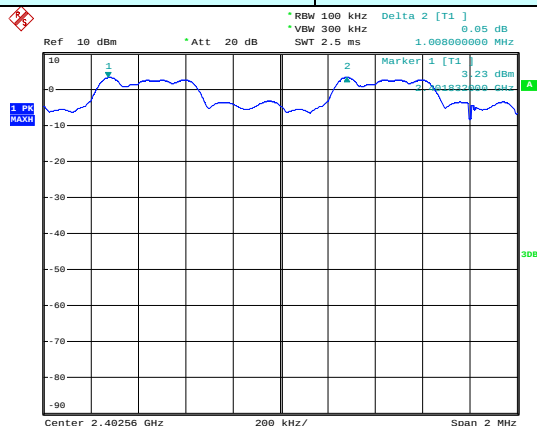

Lowest channel

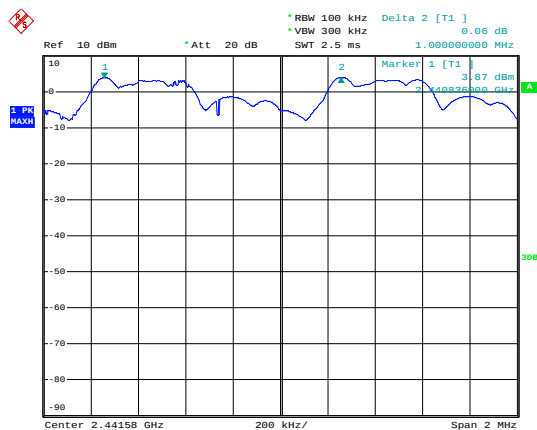


Middle channel

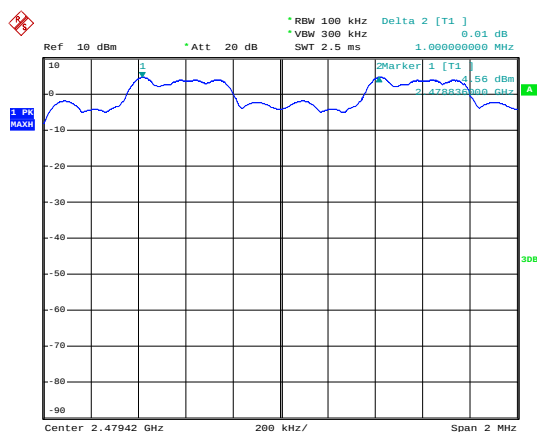


Highest channel

|                  |       |
|------------------|-------|
| Modulation mode: | 8DPSK |
|------------------|-------|

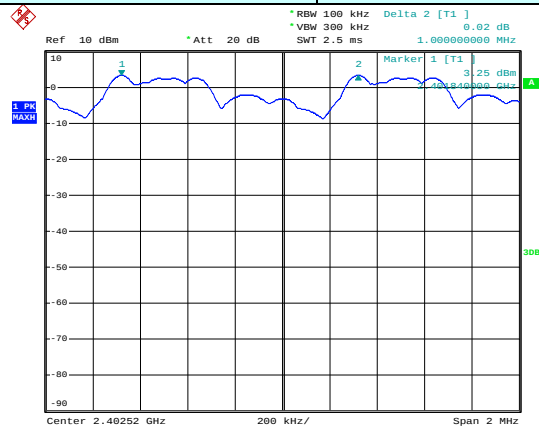


Date: 27 OCT 2012 04:13:56

## Lowest channel

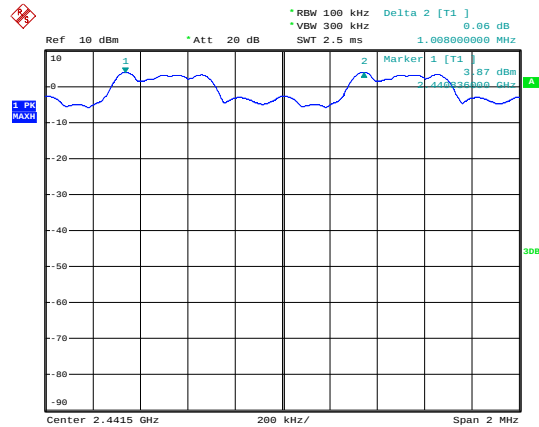


## Middle channel

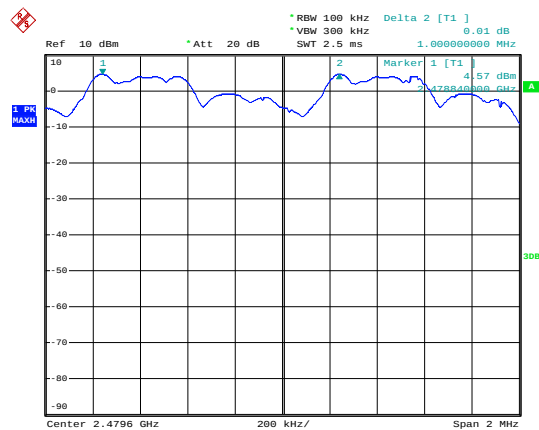

## Highest channel


## 5.6 Hopping Channel Number
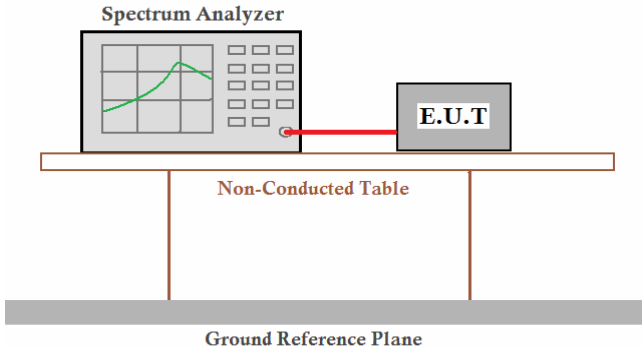
|                   |                                                                                                                                                                                                                                                                                                                |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)                                                                                                                                                                                                                                                                             |
| Test Method:      | ANSI C63.4:2003 and DA00-705                                                                                                                                                                                                                                                                                   |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak                                                                                                                                                                                                                                       |
| Limit:            | 15 channels                                                                                                                                                                                                                                                                                                    |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.7 for details                                                                                                                                                                                                                                                                               |
| Test mode:        | Hopping mode                                                                                                                                                                                                                                                                                                   |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                           |


### Measurement Data:

| Mode                         | Hopping channel numbers | Limit | Result |
|------------------------------|-------------------------|-------|--------|
| GFSK, $\pi/4$ -DQPSK, 8DPSK, | 79                      | 15    | Pass   |


## GFSK

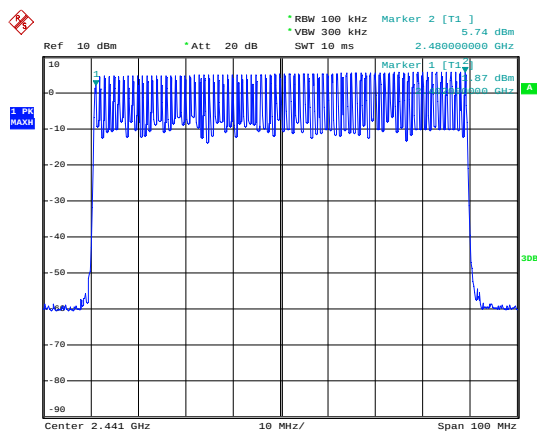


## $\pi/4$ -DQPSK

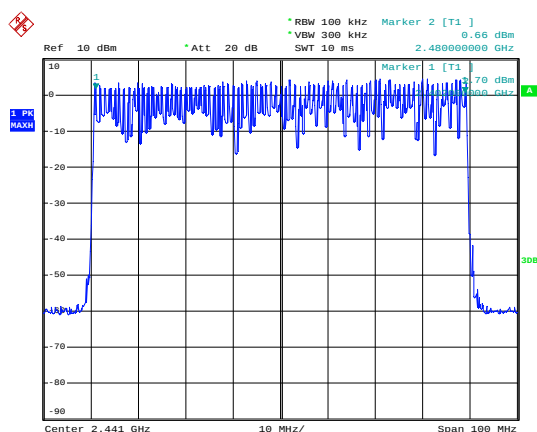

## 8DPSK

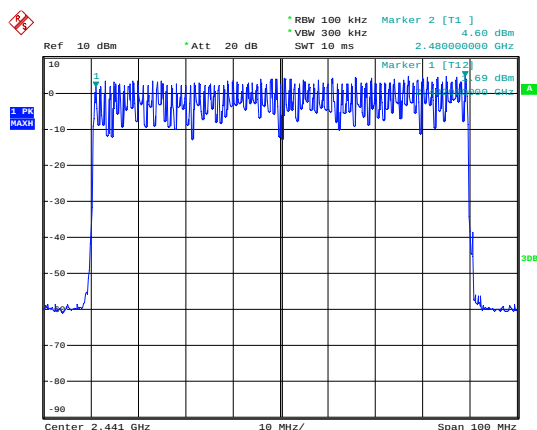

## 5.7 Dwell Time
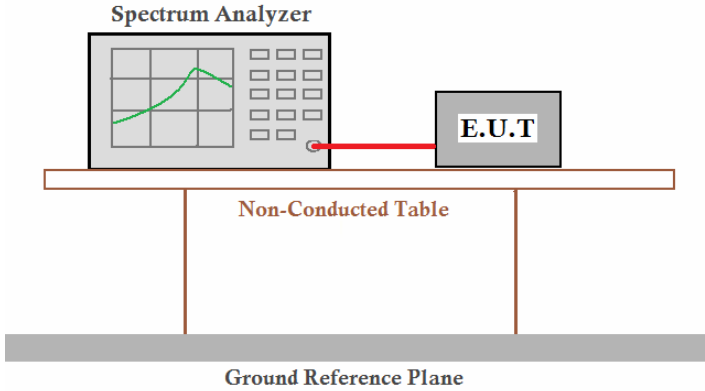
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)                                                 |
| Test Method:      | ANSI C63.4:2003 and KDB DA00-705                                                   |
| Receiver setup:   | RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak                                        |
| Limit:            | 0.4 Second                                                                         |
| Test setup:       |  |
| Test Instruments: | Refer to section 5.7 for details                                                   |
| Test mode:        | Hopping mode                                                                       |
| Test results:     | Pass                                                                               |

### Measurement Data (Worse case)

| Mode           | Packet | Dwell time (second) | Limit (second) | Result |
|----------------|--------|---------------------|----------------|--------|
| GFSK           | DH1    | 0.1536              | 0.4            | Pass   |
|                | DH3    | 0.1088              |                |        |
|                | DH5    | 0.3129              |                |        |
| $\pi/4$ -DQPSK | 2-DH1  | 0.1312              | 0.4            | Pass   |
|                | 2-DH3  | 0.2707              |                |        |
|                | 2-DH5  | 0.3138              |                |        |
| 8DPSK          | 3-DH1  | 0.1325              | 0.4            | Pass   |
|                | 3-DH3  | 0.2701              |                |        |
|                | 3-DH5  | 0.3147              |                |        |

For GFSK,  $\pi/4$ -DQPSK and 8DPSK:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot =  $0.408(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 153.6 \text{ ms}$

DH3 time slot =  $1.680(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 108.8 \text{ ms}$

DH5 time slot =  $2.936(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 312.9 \text{ ms}$

2-DH1 time slot =  $0.410(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 131.2 \text{ ms}$

2-DH3 time slot =  $1.692(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 270.7 \text{ ms}$

2-DH5 time slot =  $2.944(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 313.8 \text{ ms}$


3-DH1 time slot =  $0.414(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 132.5 \text{ ms}$

3-DH3 time slot =  $1.688(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 270.1 \text{ ms}$


3-DH5 time slot =  $2.952(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 314.7 \text{ ms}$

Test plot as follows:


|                  |      |
|------------------|------|
| Modulation mode: | GFSK |
|------------------|------|

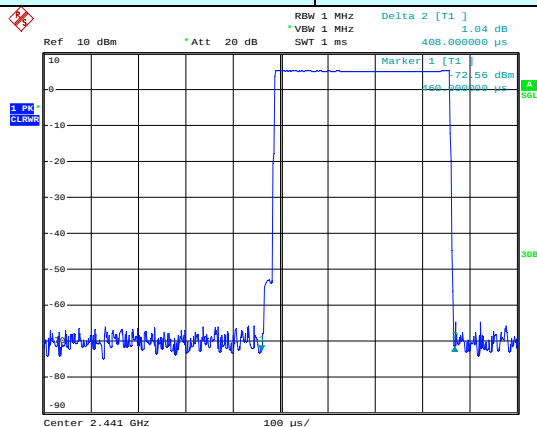

DH1




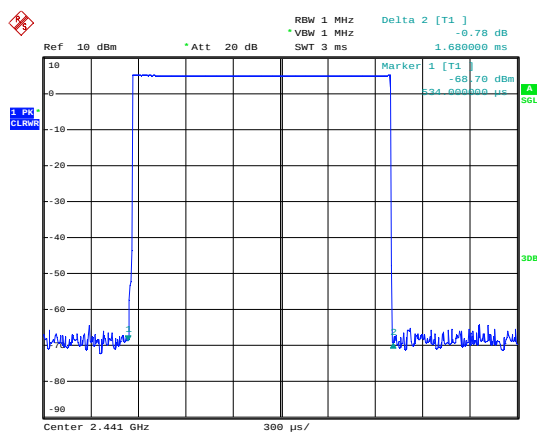


DH3




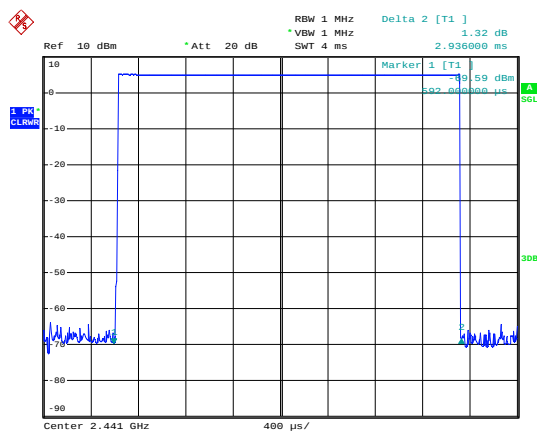


DH5



|                  |                |
|------------------|----------------|
| Modulation mode: | $\pi/4$ -DQPSK |
|------------------|----------------|

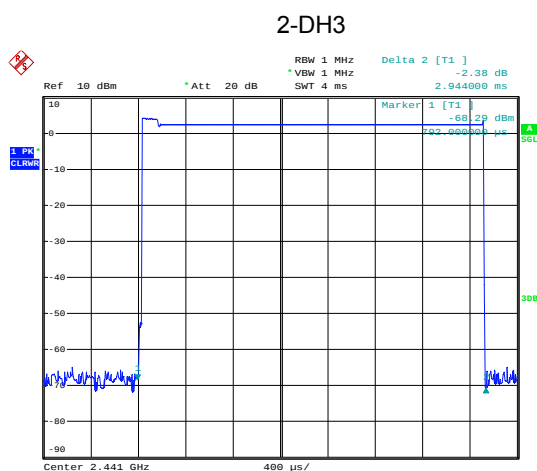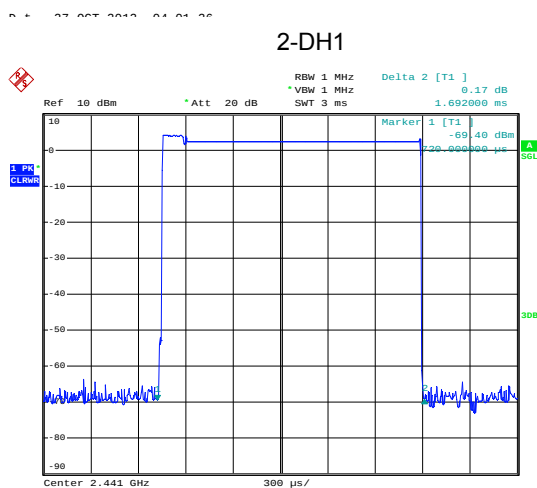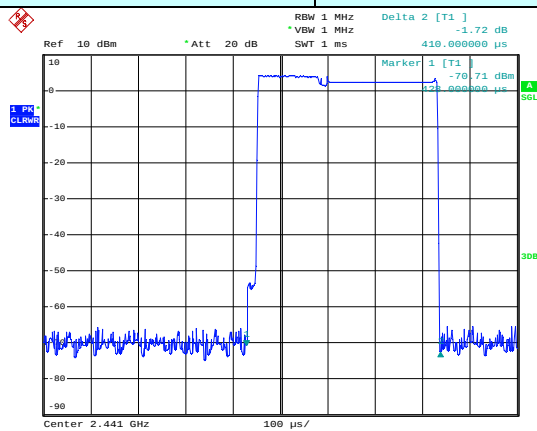

|                  |       |
|------------------|-------|
| Modulation mode: | 8DPSK |
|------------------|-------|

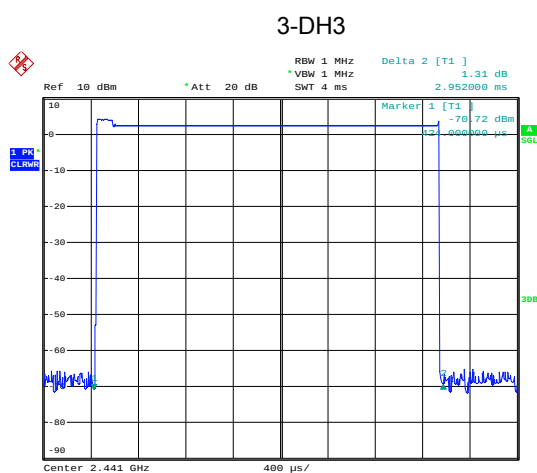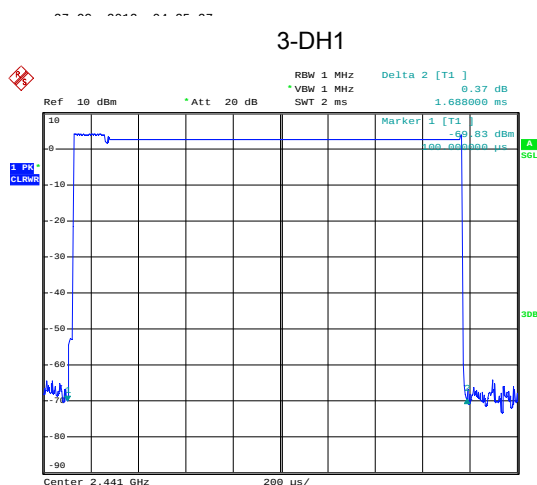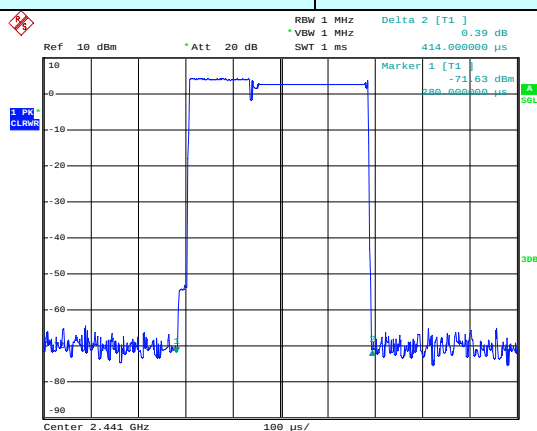


## 5.8 Pseudorandom Frequency Hopping Sequence
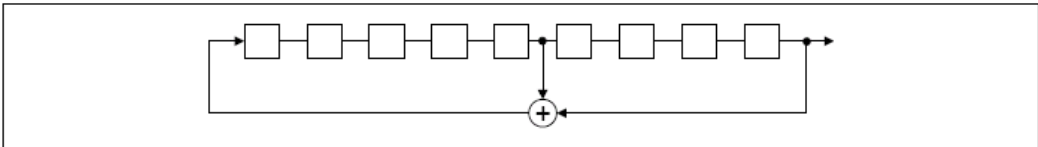
| Test Requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | FCC Part15 C Section 15.247 (a)(1) requirement: |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| <p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> |                                                 |
| EUT Pseudorandom Frequency Hopping Sequence                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                 |
| <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                            |                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                 |
| <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                 |
| <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                 |



## 5.9 Band Edge

### 5.9.1 Conducted Emission Method
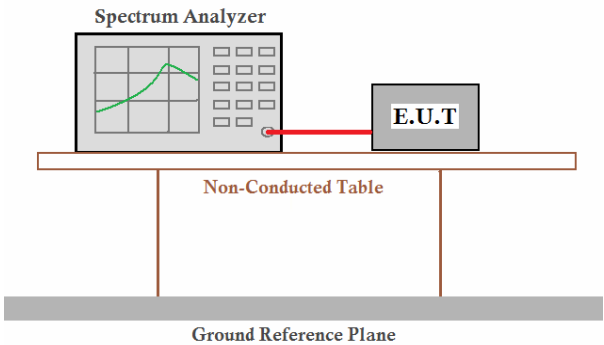
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.4:2003 and DA00-705                                                                                                                                                                                                                                                                                                                                                            |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, Detector=Peak                                                                                                                                                                                                                                                                                                                                                   |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>                               |
| Test Instruments: | Refer to section 5.7 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Non-hopping mode and hopping mode                                                                                                                                                                                                                                                                                                                                                       |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |


Test plot as follows:

GFSK

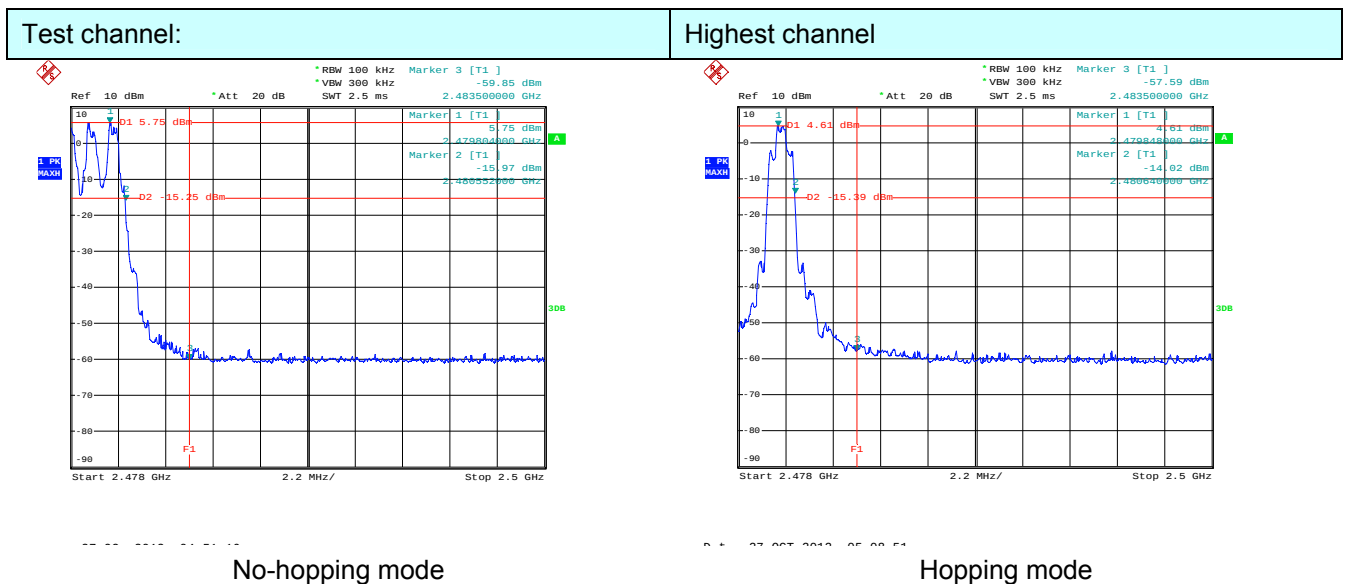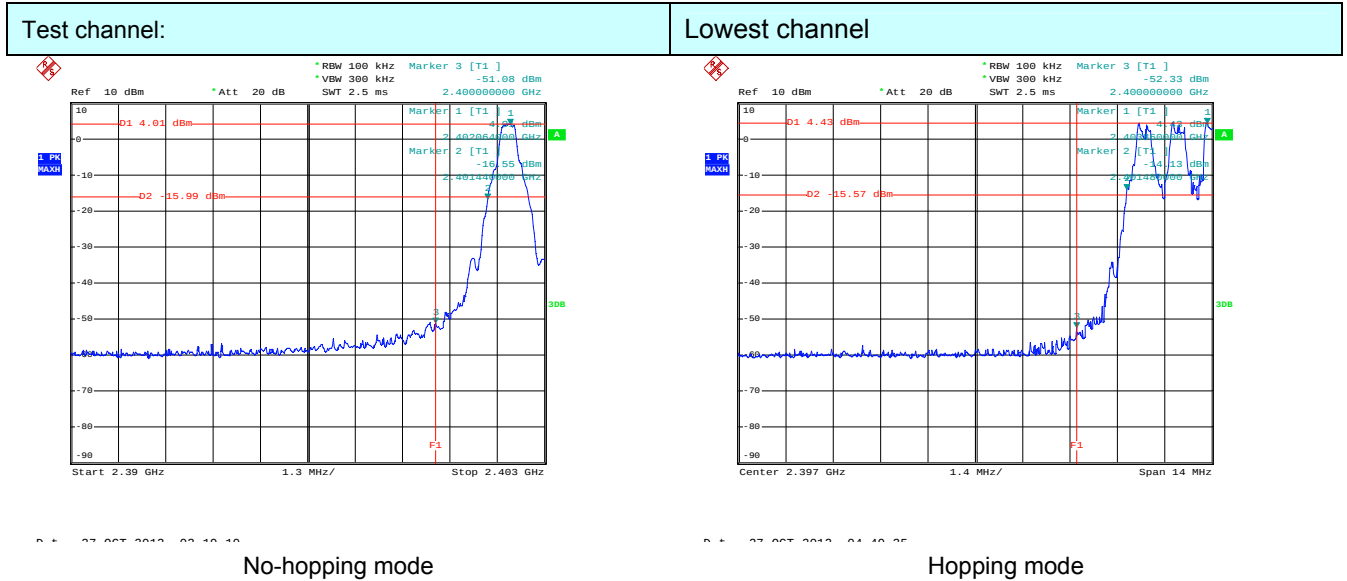


$\pi$ /4-QPSK

| Test channel: | Lowest channel |
|---------------|----------------|
|---------------|----------------|

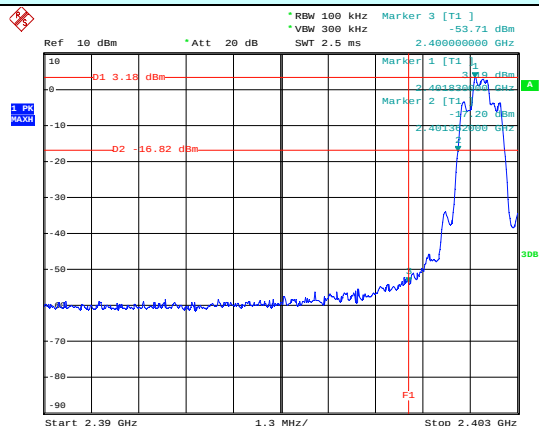


No-hopping mode

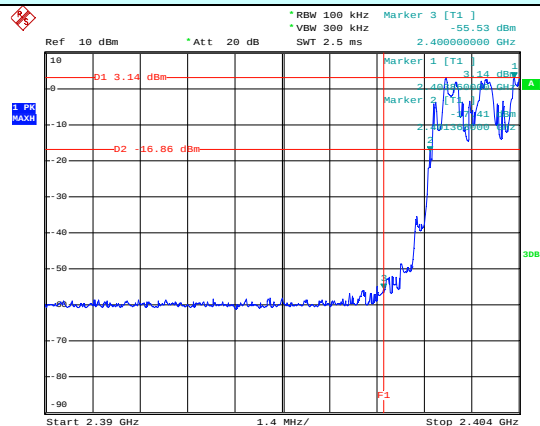


Hopping mode

| Test channel: | Highest channel |
|---------------|-----------------|
|---------------|-----------------|

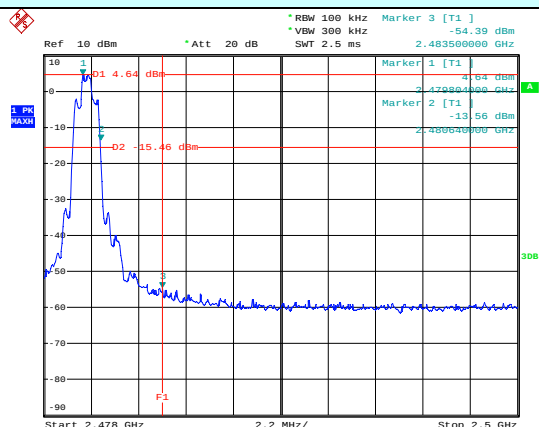


No-hopping mode

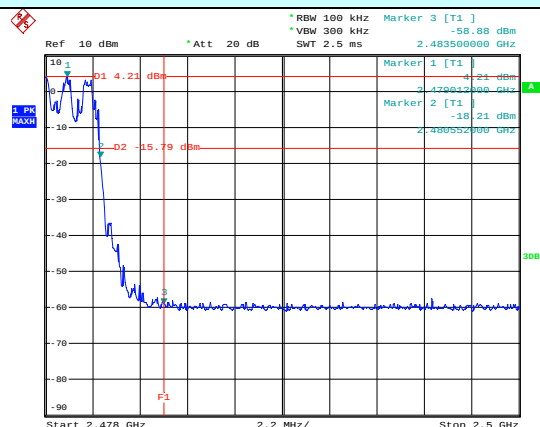


Hopping mode

## 8DPSK

| Test channel: | Lowest channel |
|---------------|----------------|
|---------------|----------------|

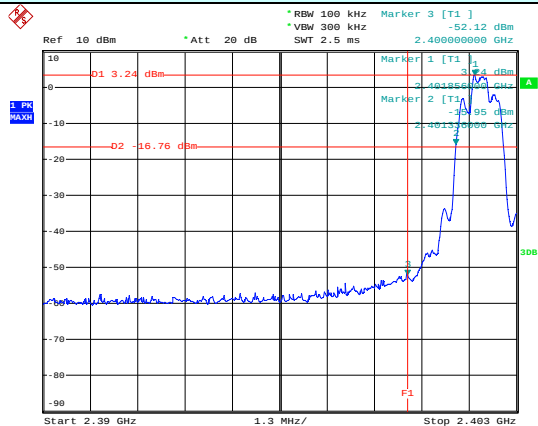


No-hopping mode

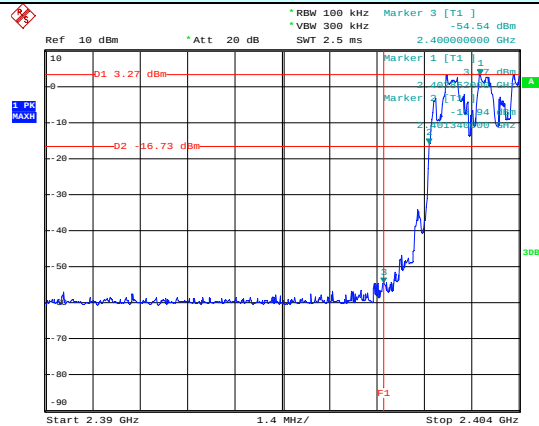


Hopping mode

| Test channel: | Highest channel |
|---------------|-----------------|
|---------------|-----------------|

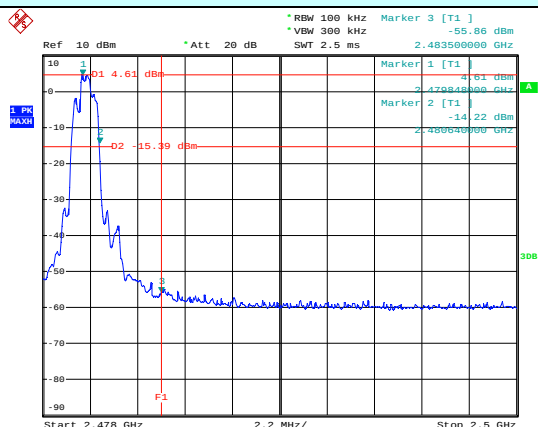


No-hopping mode

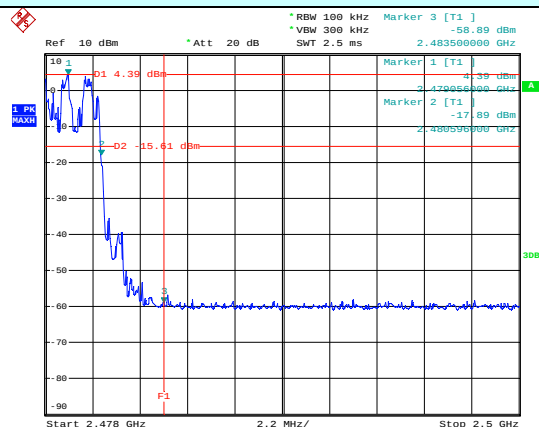

Hopping mode

## 5.9.2 Radiated Emission Method
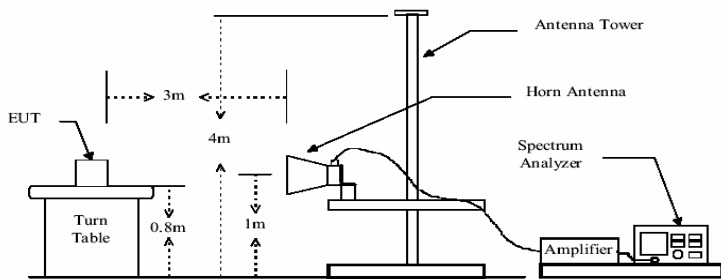
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |                    |      |               |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------|------|---------------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |                    |      |               |
| Test Method:          | ANSI C63.4: 2003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |                    |      |               |
| Test Frequency Range: | 2.3GHz to 2.5GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |                    |      |               |
| Test site:            | Measurement Distance: 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |                    |      |               |
| Receiver setup:       | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Detector | RBW                | VBW  | Remark        |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Peak     | 1MHz               | 3MHz | Peak Value    |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Peak     | 1MHz               | 10Hz | Average Value |
| Limit:                | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          | Limit (dBuV/m @3m) |      | Remark        |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | 54.00              |      | Average Value |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          | 74.00              |      | Peak Value    |
| Test setup:           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |          |                    |      |               |
| Test Procedure:       | <div>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</div> <div>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</div> <div>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</div> <div>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</div> <div>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</div> |          |                    |      |               |
| Test Instruments:     | Refer to section 5.7 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |                    |      |               |
| Test mode:            | Non-hopping mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |                    |      |               |
| Test results:         | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |                    |      |               |

### Remark:

1. During the test, pre-scan the GFSK,  $\pi$ /4-DQPSK, 8DPSK, and found the 8DPSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

| Test channel:   |                     | Lowest              |                 |                          | Level:         |                     | Peak            |              |
|-----------------|---------------------|---------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV/m) | Antenna Factor (dB) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2390.00         | 68.26               | 27.58               | 3.81            | 34.83                    | 64.82          | 74.00               | -9.18           | Horizontal   |
| 2390.00         | 64.32               | 27.58               | 3.81            | 34.83                    | 60.88          | 74.00               | -13.12          | Vertical     |

| Test channel:   |                     | Lowest              |                 |                          | Level:         |                     | Average         |              |
|-----------------|---------------------|---------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV/m) | Antenna Factor (dB) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2390.00         | 45.36               | 27.58               | 3.81            | 34.83                    | 41.92          | 54.00               | -12.08          | Horizontal   |
| 2390.00         | 46.95               | 27.58               | 3.81            | 34.83                    | 43.51          | 54.00               | -10.49          | Vertical     |

| Test channel:   |                     | Highest             |                 |                          | Level:         |                     | Peak            |              |
|-----------------|---------------------|---------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV/m) | Antenna Factor (dB) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50         | 69.32               | 27.52               | 3.89            | 34.86                    | 65.87          | 74.00               | -8.13           | Horizontal   |
| 2483.50         | 67.38               | 27.52               | 3.89            | 34.86                    | 63.93          | 74.00               | -10.07          | Vertical     |


| Test channel:   |                     | Highest             |                 |                          | Level:         |                     | Average         |              |
|-----------------|---------------------|---------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV/m) | Antenna Factor (dB) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50         | 49.35               | 27.52               | 3.89            | 34.86                    | 45.9           | 54.00               | -8.1            | Horizontal   |
| 2483.50         | 45.35               | 27.52               | 3.89            | 34.86                    | 41.9           | 54.00               | -12.1           | Vertical     |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


## 5.10 Spurious Emission

### 5.10.1 Conducted Emission Method

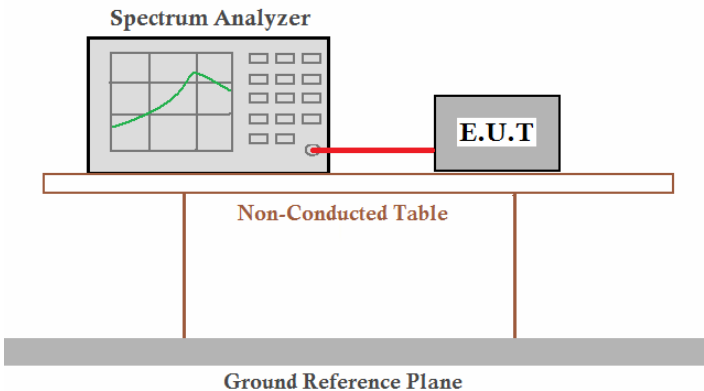
|                   |                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | ANSI C63.4:2003 and DA00-705                                                                                                                                                                                                                                                                                                                                                               |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.    |
| Test setup:       |  <p>The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.7 for details                                                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Non-hopping mode                                                                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                       |

GFSK

## Lowest channel

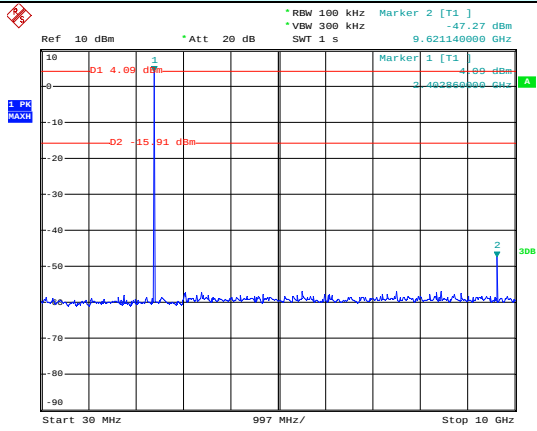


30MHz~10GHz

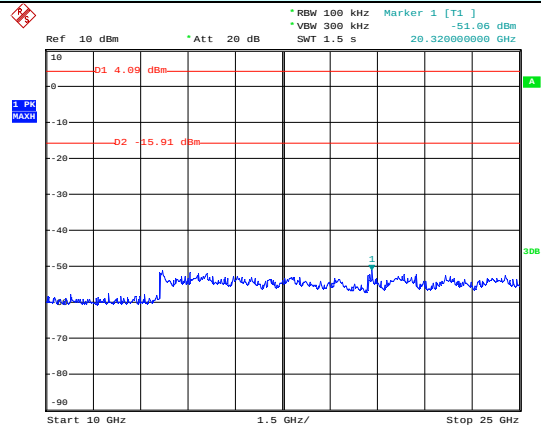


10GHz~25GHz

## Middle channel

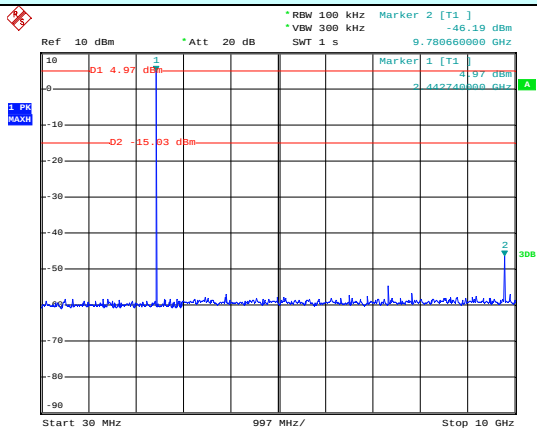


30MHz~10GHz

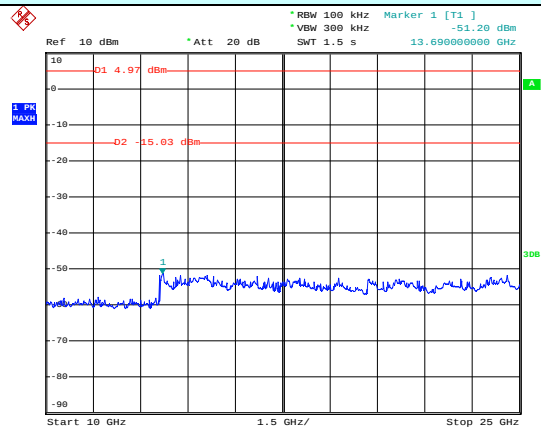


10GHz~25GHz

## Highest channel

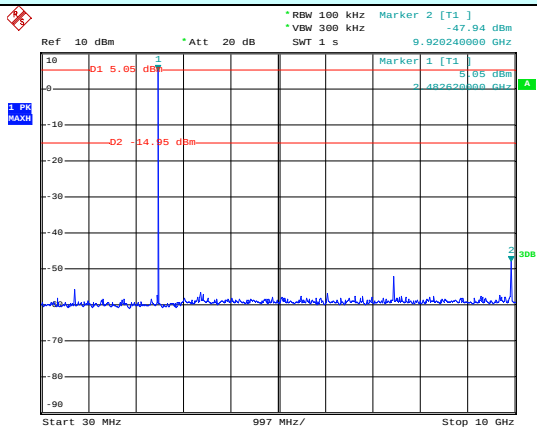



30MHz~10GHz

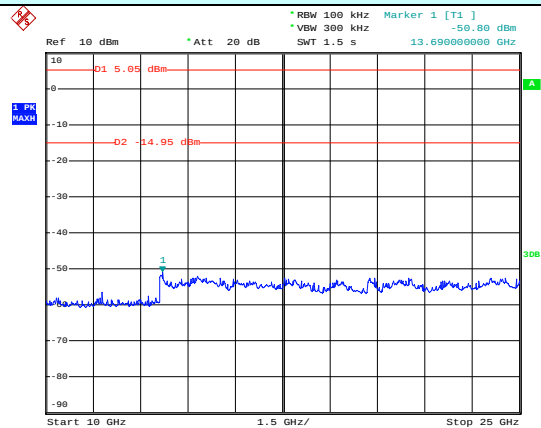

10GHz~25GHz

$\pi/4$ -DQPSK



## Lowest channel

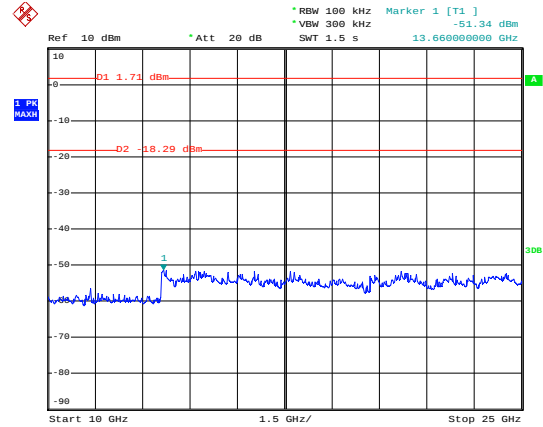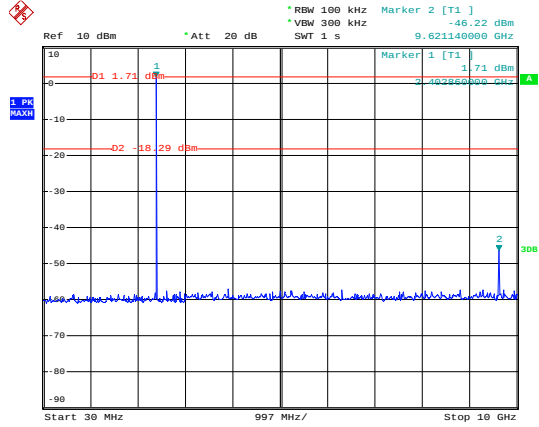

30MHz~10GHz

10GHz~25GHz



## Middle channel

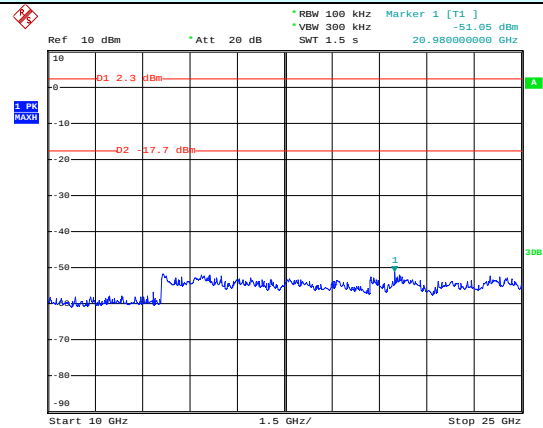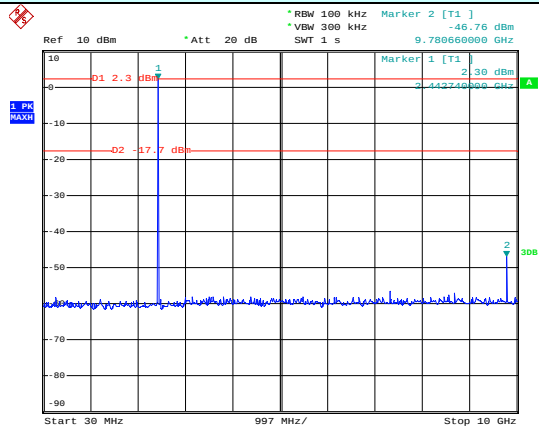

30MHz~10GHz

10GHz~25GHz

## Highest channel

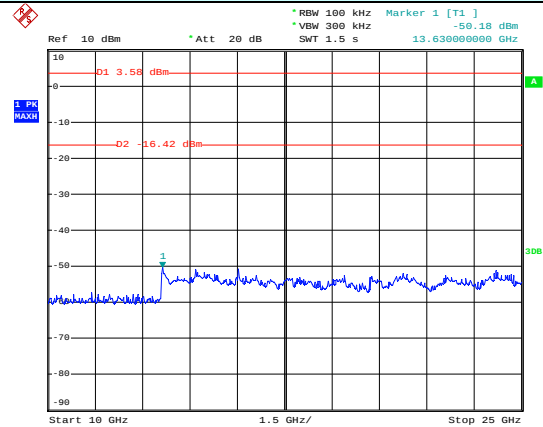
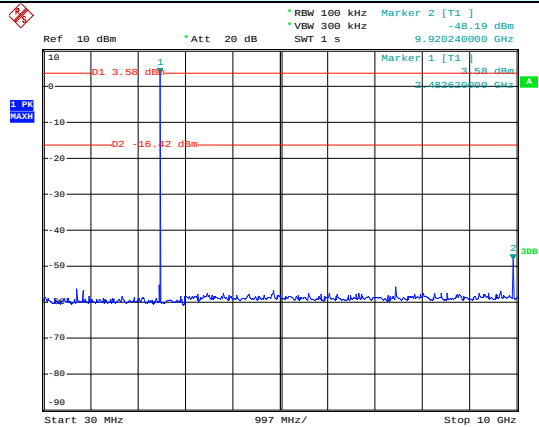


30MHz~10GHz

10GHz~25GHz

8DPSK



## Lowest channel

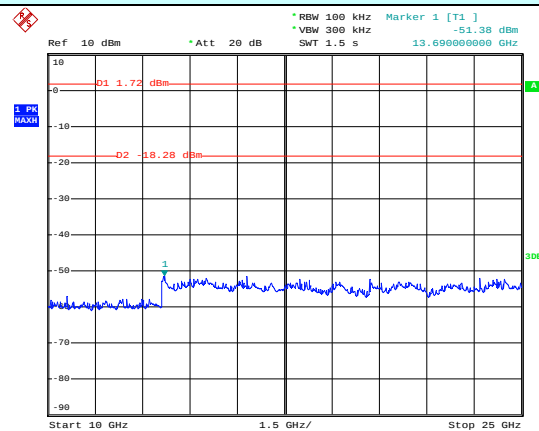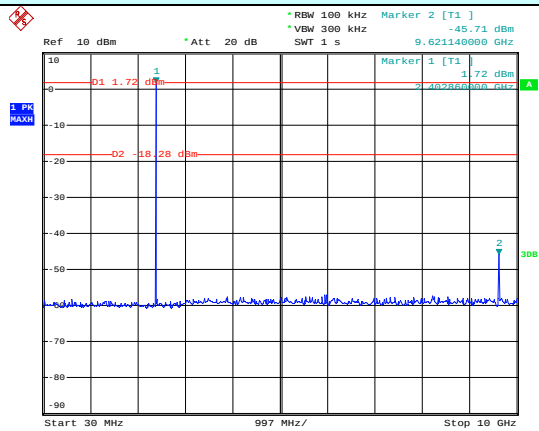

30MHz~10GHz

10GHz~25GHz



## Middle channel

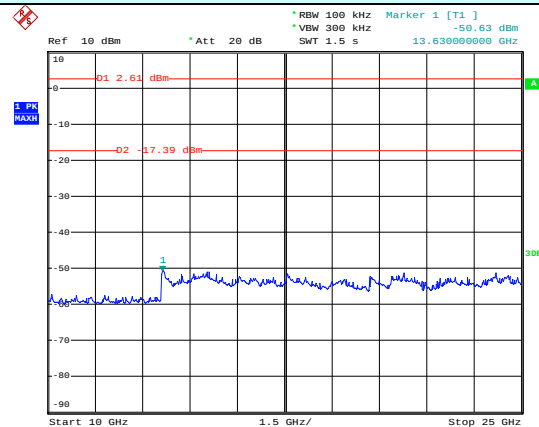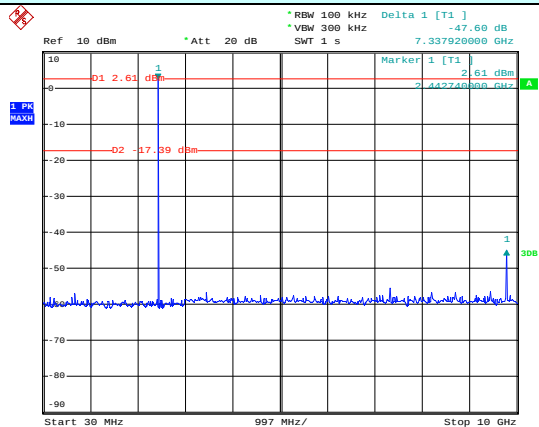

30MHz~10GHz

10GHz~25GHz



## Highest channel

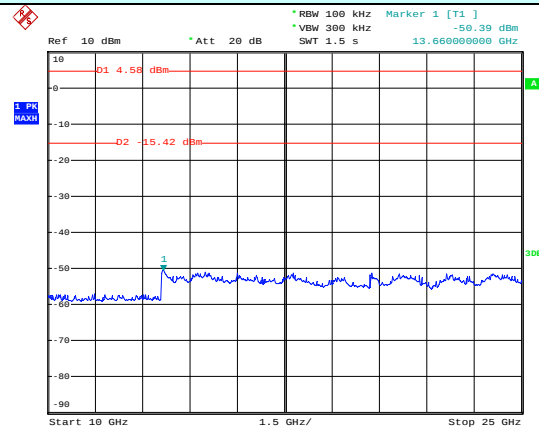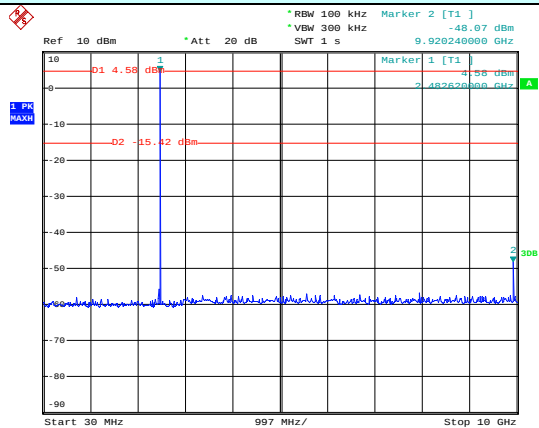

30MHz~10GHz

10GHz~25GHz

## 5.10.2 Radiated Emission Method
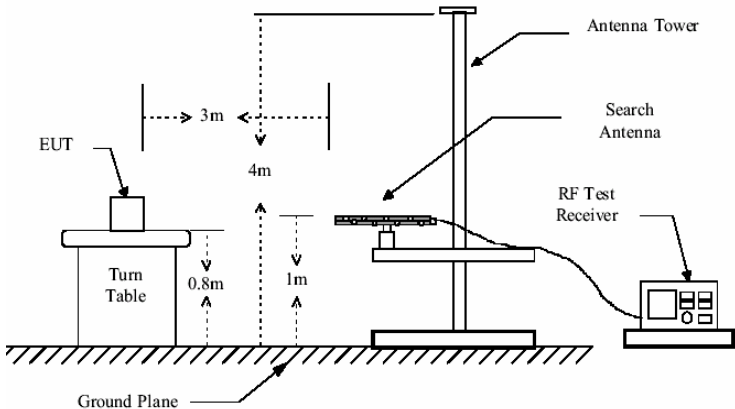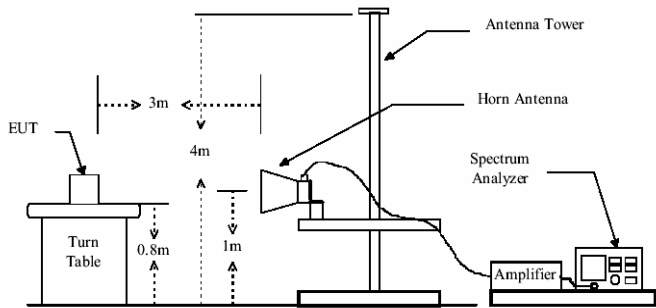
|                       |                                                                                      |            |                    |        |                  |
|-----------------------|--------------------------------------------------------------------------------------|------------|--------------------|--------|------------------|
| Test Requirement:     | FCC Part15 C Section 15.209                                                          |            |                    |        |                  |
| Test Method:          | ANSI C63.4: 2003                                                                     |            |                    |        |                  |
| Test Frequency Range: | 30MHz to 25GHz                                                                       |            |                    |        |                  |
| Test site:            | Measurement Distance: 3m                                                             |            |                    |        |                  |
| Receiver setup:       | Frequency                                                                            | Detector   | RBW                | VBW    | Remark           |
|                       | 30MHz-1GHz                                                                           | Quasi-peak | 100KHz             | 300KHz | Quasi-peak Value |
|                       | Above 1GHz                                                                           | Peak       | 1MHz               | 3MHz   | Peak Value       |
|                       |                                                                                      | Peak       | 1MHz               | 10Hz   | Average Value    |
| Limit:                | Frequency                                                                            |            | Limit (dBuV/m @3m) |        | Remark           |
|                       | 30MHz-88MHz                                                                          |            | 40.0               |        | Quasi-peak Value |
|                       | 88MHz-216MHz                                                                         |            | 43.5               |        | Quasi-peak Value |
|                       | 216MHz-960MHz                                                                        |            | 46.0               |        | Quasi-peak Value |
|                       | 960MHz-1GHz                                                                          |            | 54.0               |        | Quasi-peak Value |
|                       | Above 1GHz                                                                           |            | 54.0               |        | Average Value    |
|                       |                                                                                      |            | 74.0               |        | Peak Value       |
| Test setup:           | Below 1GHz                                                                           |            |                    |        |                  |
|                       |  |            |                    |        |                  |
| Test setup:           | Above 1GHz                                                                           |            |                    |        |                  |
|                       |  |            |                    |        |                  |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| Test Instruments: | Refer to section 5.7 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test mode:        | Non-hopping mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Remark:**

1. During the test, pre-scan the GFSK,  $\pi/4$ -DQPSK, 8DPSK modulation, and found the 8DPSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

**Measurement data:**

**Below 1GHz**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 53.13           | 47.08             | 13.12                 | 1.32            | 28.60              | 32.92          | 40.00               | -7.08           | Vertical     |
| 100.58          | 46.52             | 13.11                 | 1.94            | 30.07              | 31.50          | 43.50               | -12.00          | Vertical     |
| 143.83          | 46.70             | 8.22                  | 2.44            | 29.32              | 28.04          | 43.50               | -15.46          | Vertical     |
| 191.75          | 46.37             | 10.56                 | 2.81            | 29.83              | 29.91          | 43.50               | -13.59          | Vertical     |
| 294.11          | 42.16             | 12.95                 | 2.92            | 29.45              | 28.58          | 46.00               | -17.42          | Vertical     |
| 622.89          | 38.33             | 18.54                 | 3.90            | 30.56              | 30.21          | 46.00               | -15.79          | Vertical     |
| 59.03           | 42.25             | 12.77                 | 1.38            | 29.13              | 27.27          | 40.00               | -12.73          | Horizontal   |
| 66.03           | 44.19             | 10.30                 | 1.41            | 29.78              | 26.12          | 40.00               | -13.88          | Horizontal   |
| 92.79           | 41.17             | 12.41                 | 2.03            | 30.08              | 25.53          | 43.50               | -17.97          | Horizontal   |
| 175.65          | 45.90             | 9.36                  | 2.70            | 27.57              | 30.39          | 43.50               | -13.11          | Horizontal   |
| 233.35          | 39.20             | 11.78                 | 2.83            | 29.67              | 24.14          | 46.00               | -21.86          | Horizontal   |
| 314.38          | 39.68             | 13.26                 | 2.98            | 29.51              | 26.41          | 46.00               | -19.59          | Horizontal   |

### Above 1GHz

|               |        |        |      |
|---------------|--------|--------|------|
| Test channel: | Lowest | Level: | Peak |
|---------------|--------|--------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4804            | 48.06             | 31.78                 | 5.32            | 24.09                    | 61.07          | 74.00               | -12.93          | Vertical     |
| 7206            | 44.07             | 36.15                 | 6.87            | 26.38                    | 60.71          | 74.00               | -13.29          | Vertical     |
| 9608            | 40.36             | 37.95                 | 8.94            | 25.4                     | 61.85          | 74.00               | -12.15          | Vertical     |
| 4804            | 49.08             | 31.78                 | 5.32            | 24.09                    | 62.09          | 74.00               | -11.91          | Horizontal   |
| 7206            | 41.24             | 36.15                 | 6.87            | 26.38                    | 57.88          | 74.00               | -16.12          | Horizontal   |
| 9608            | 36.10             | 37.95                 | 8.94            | 25.4                     | 57.59          | 74.00               | -16.41          | Horizontal   |

|               |        |        |         |
|---------------|--------|--------|---------|
| Test channel: | Lowest | Level: | Average |
|---------------|--------|--------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4804            | 32.38             | 31.78                 | 5.32            | 24.09                    | 45.39          | 54.00               | -8.61           | Vertical     |
| 7206            | 30.43             | 36.15                 | 6.87            | 26.38                    | 47.07          | 54.00               | -6.93           | Vertical     |
| 9608            | 21.79             | 37.95                 | 8.94            | 25.40                    | 43.28          | 54.00               | -10.72          | Vertical     |
| 4804            | 36.79             | 31.78                 | 5.32            | 24.09                    | 49.80          | 54.00               | -4.20           | Horizontal   |
| 7206            | 19.15             | 36.15                 | 6.87            | 26.38                    | 35.79          | 54.00               | -18.21          | Horizontal   |
| 9608            | 15.58             | 37.95                 | 8.94            | 25.40                    | 37.07          | 54.00               | -16.93          | Horizontal   |

#### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

|               |        |        |      |
|---------------|--------|--------|------|
| Test channel: | Middle | Level: | Peak |
|---------------|--------|--------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882            | 50.36             | 31.85                 | 5.40            | 24.01              | 63.60          | 74.00               | -10.40          | Vertical     |
| 7323            | 46.39             | 36.37                 | 6.91            | 26.62              | 63.05          | 74.00               | -10.95          | Vertical     |
| 9764            | 43.56             | 38.35                 | 9.01            | 25.29              | 65.63          | 74.00               | -8.37           | Vertical     |
| 4882            | 53.40             | 31.85                 | 5.40            | 24.01              | 66.64          | 74.00               | -7.36           | Horizontal   |
| 7323            | 42.84             | 36.37                 | 6.91            | 26.62              | 59.50          | 74.00               | -14.50          | Horizontal   |
| 9764            | 41.30             | 38.35                 | 9.01            | 25.29              | 63.37          | 74.00               | -10.63          | Horizontal   |

|               |        |        |         |
|---------------|--------|--------|---------|
| Test channel: | Middle | Level: | Average |
|---------------|--------|--------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882            | 34.51             | 31.85                 | 5.40            | 24.01              | 47.75          | 54.00               | -6.25           | Vertical     |
| 7323            | 32.73             | 36.37                 | 6.91            | 26.62              | 49.39          | 54.00               | -4.61           | Vertical     |
| 9764            | 23.33             | 38.35                 | 9.01            | 25.29              | 45.40          | 54.00               | -8.60           | Vertical     |
| 4882            | 26.35             | 31.85                 | 5.40            | 24.01              | 39.59          | 54.00               | -14.41          | Horizontal   |
| 7323            | 22.05             | 36.37                 | 6.91            | 26.62              | 38.71          | 54.00               | -15.29          | Horizontal   |
| 9764            | 16.90             | 38.35                 | 9.01            | 25.29              | 38.97          | 54.00               | -15.03          | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

|               |         |        |      |
|---------------|---------|--------|------|
| Test channel: | Highest | Level: | Peak |
|---------------|---------|--------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4960            | 44.64             | 31.93                 | 5.47            | 23.93                    | 58.11          | 74.00               | -15.89          | Vertical     |
| 7440            | 40.78             | 36.59                 | 6.95            | 26.95                    | 57.37          | 74.00               | -16.63          | Vertical     |
| 9920            | 34.78             | 38.81                 | 9.07            | 25.22                    | 57.44          | 74.00               | -16.56          | Vertical     |
| 4960            | 43.76             | 31.93                 | 5.47            | 23.93                    | 57.23          | 74.00               | -16.77          | Horizontal   |
| 7440            | 37.10             | 36.59                 | 6.95            | 26.95                    | 53.69          | 74.00               | -20.31          | Horizontal   |
| 9920            | 29.70             | 38.81                 | 9.07            | 25.22                    | 52.36          | 74.00               | -21.64          | Horizontal   |

|               |         |        |         |
|---------------|---------|--------|---------|
| Test channel: | Highest | Level: | Average |
|---------------|---------|--------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4960            | 36.55             | 31.93                 | 5.47            | 23.93                    | 50.02          | 54.00               | -3.98           | Vertical     |
| 7440            | 33.37             | 36.59                 | 6.95            | 26.95                    | 49.96          | 54.00               | -4.04           | Vertical     |
| 9920            | 30.67             | 38.81                 | 9.07            | 25.22                    | 53.33          | 54.00               | -0.67           | Vertical     |
| 4960            | 28.47             | 31.93                 | 5.47            | 23.93                    | 41.94          | 54.00               | -12.06          | Horizontal   |
| 7440            | 27.47             | 36.59                 | 6.95            | 26.95                    | 44.06          | 54.00               | -9.94           | Horizontal   |
| 9920            | 25.44             | 38.81                 | 9.07            | 25.22                    | 48.10          | 54.00               | -5.90           | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.