

FCC REPORT

Applicant: AZUMI S.A

Address of Applicant: Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza,
Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep.
Panamá

Equipment Under Test (EUT)

Product Name: Mobile phone

Model No.: L3GA

FCC ID: QRP-AZUMIL3GA

Applicable standards: FCC CFR Title 47 Part 2: 2011
FCC CFR Title 47 Part 22 Subpart H: 2011
FCC CFR Title 47 Part 24 Subpart E: 2011

Date of sample receipt: 29 Mar., 2013

Date of Test: 01 Apr., to 08 Apr.,2013

Date of report issued: 11 Apr.,2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	11 Apr.,2013	Original

Prepared By:

Lisa Chen

Report Clerk

Date:

11 Apr., 2013

Check By:

Joe. Zhou

Project Engineer

Date:

12 Apr., 2013

3. Contents

	Page
1. COVER PAGE	1
2. VERSION.....	2
3. CONTENTS.....	3
4. TEST SUMMARY.....	4
5. GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE	8
5.4 RELATED SUBMITTAL(S) / GRANT (S).....	8
5.5 TEST METHODOLOGY.....	8
5.6 LABORATORY FACILITY.....	8
5.7 LABORATORY LOCATION	9
5.8 TEST INSTRUMENTS LIST.....	9
6. SYSTEM TEST CONFIGURATION	10
6.1 EUT CONFIGURATION	10
6.2 EUT EXERCISE.....	10
6.3 CONFIGURATION OF TESTED SYSTEM	10
6.4 DESCRIPTION OF TEST MODES.....	10
7. TEST RESULTS AND MEASUREMENT DATA.....	11
7.1 CONDUCTED OUTPUT POWER	11
7.2 OCCUPY BANDWIDTH	17
7.3 MODULATION CHARACTERISTIC.....	35
7.4 OUT OF BAND EMISSION AT ANTENNA TERMINALS	35
7.5 ERP, EIRP MEASUREMENT	56
7.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	60
7.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	69
7.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	82
8. TEST SETUP PHOTO.....	89
9. EUT CONSTRUCTIONAL DETAILS.....	90

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed* (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5. General Information

5.1 Client Information

Applicant:	AZUMI S.A
Address of Applicant:	Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep. Panamá
Manufacturer:	AZUMI (HK) Limited
Address of Manufacturer:	RM 2309, 23/F HO KING COMM CTR, 2-16 FAYUEN ST, MONGKOK KOWLOON, HONG KONG
Factory:	SHENZHEN CHINO-E ELECTRONIC INDUSTRY CO.,LTD.
Address of Factory:	chino-E Industrial Park,longhua ,Baoan Area,shenzhen

5.2 General Description of E.U.T.

Product Name:	Mobile phone
Model No.:	L3GA
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V:826.4MHz-846.6MHz WCDMA Band II:1852.4 MHz -1907.6 MHz
IMEI:	IMEI :358688000000158
Modulation type:	GSM/GPRS:GMSK, UMTS:QPSK
Antenna type:	Internal Antenna
Antenna gain:	Cellular Band: -5 dBi PCS Band: 0dBi
AC adapter:	Input:100-240V AC,50/60Hz 0.15A Output:5.0V DC MAX400mA
Power supply:	Rechargeable Li-ion Battery DC3.7V/750mAh

Operation Frequency List:

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....			
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60

5.3 Test mode

Communicate mode (GSM850)	Keep the EUT in communicating mode on GSM850 band.
Data mode (GPRS850)	Keep the EUT in data communicating mode on GPRS850 band.
Communicate mode (PCS1900)	Keep the EUT in communicating mode on PCS1900 band.
Data mode (GPRS1900)	Keep the EUT in data communicating mode on GPRS1900 band.
Communicate mode (RMC UMTS 850)	Keep the EUT in data communicating mode on RMC in UMTS850 (12.2kbps, 64kbps, 144kbps&384kbps).
Communicate mode (AMR UMTS 850)	Keep the EUT in data communicating mode on AMR in UMTS850.
Data mode (HSDPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 4).
Communicate mode (RMC UMTS 1900)	Keep the EUT in data communicating mode on RMC in UMTS850 (12.2kbps, 64kbps, 144kbps&384kbps).
Communicate mode (AMR UMTS 1900)	Keep the EUT in data communicating mode on AMR in UMTS1900.
Data mode (HSDPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 4).
Remark :	Pre-test output power of all modes, and found GSM 900, PCS 1900, UMTS 850 12.2k RMC & UMTS 1900 12.2k RMC were the worst case. The details please refer to section 6.5.

5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● FCC - Registration No.: 817957

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● IC - Registration No.: 10106A-1

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● CNAS - Registration No.: CNAS L6048

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: 0755-23118282
Fax: 0755-23116366

5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (dd-mm-yy)	Cal. Due date (dd-mm-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2012	June 08 2013
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	June 04 2012	June 03 2013
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 30 2012	May 29 2013
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2013	Mar. 31 2014
6	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2013	Mar. 31 2014
7	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2013	Mar. 31 2014
8	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2013	Mar. 31 2014
9	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2013	Mar. 31 2014
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2013	Mar. 31 2014
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2012	June 08 2013
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2013	Mar. 31 2014
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2013	Mar. 29 2014
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 29 2012	May. 28 2013
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2013	Mar. 31 2014
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2012	Aug. 11 2013
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	May. 29 2012	May. 28 2013

6. System test configuration


6.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

6.3 Configuration of Tested System

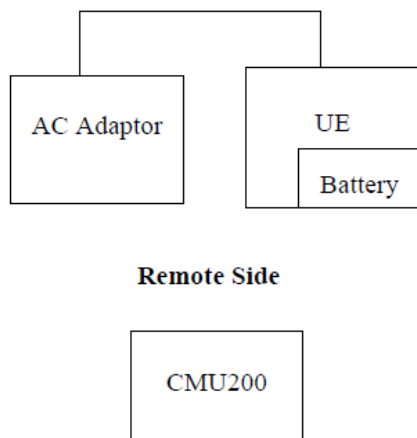


6.4 Description of Test Modes

The EUT has been tested under operating condition. EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for three modes (GSM850, PCS1900, WCDMA Band V and WCDMA Band II) with power adaptor, earphone and Data cable. The worst-case H mode for GSM850, PCS1900, UMTS 850 and UMTS 1900.

7. Test results and measurement data

7.1 Conducted Output Power

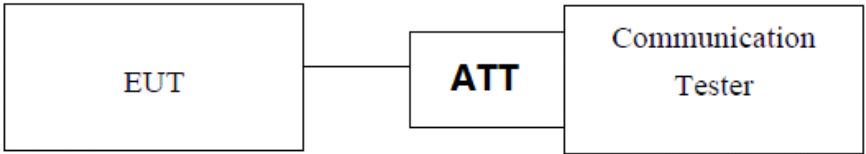Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850 7W PCS1900 2W WCDMA Band V: 7W WCDMA Band II: 2W
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the CMU200. Transmitter output was read off the CMU200 in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

EUT Mode	Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
GSM 850	128	824.20	33.67	38.45	Pass
	190	836.60	33.73		
	251	848.80	33.66		
GPRS 850 (1 Uplink slot)	128	824.20	33.17		
	190	836.60	33.20		
	251	848.80	33.18		
GPRS 850 (2 Uplink slots)	128	824.20	33.05		
	190	836.60	33.05		
	251	848.80	32.99		
GPRS 850 (3 Uplink slots)	128	824.20	32.04		
	190	836.60	32.14		
	251	848.80	32.16		
GPRS 850 (4 Uplink slots)	128	824.20	30.87		
	190	836.60	30.99		
	251	848.80	31.06		
PCS 1900	512	1850.20	29.67	33.00	Pass
	661	1880.00	29.10		
	810	1909.80	29.25		
GPRS 1900 (1 Uplink slot)	512	1850.20	29.31		
	661	1880.00	29.06		
	810	1909.80	29.15		
GPRS 1900 (2 Uplink slots)	512	1850.20	28.91		
	661	1880.00	28.43		
	810	1909.80	28.90		
GPRS 1900 (3 Uplink slots)	512	1850.20	27.87		
	661	1880.00	27.33		
	810	1909.80	26.50		
GPRS 1900 (4 Uplink slots)	512	1850.20	27.05		
	661	1880.00	26.43		
	810	1909.80	26.39		


EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS 850 HSDPA	Subtest 1	4132	826.40	25.06	38.45	Pass
		4183	836.60	24.04		
		4233	846.60	24.69		
	Subtest 2	4132	826.40	25.01		
		4183	836.60	23.99		
		4233	846.60	24.68		
	Subtest 3	4132	826.40	24.95		
		4183	836.60	23.98		
		4233	846.60	24.65		
	Subtest 4	4132	826.40	25.06		
		4183	836.60	23.98		
		4233	846.60	24.65		
UMTS 850 RMC	12.2kbps	4132	826.40	25.09	38.45	Pass
		4183	836.60	24.13		
		4233	846.60	24.72		
	64kbps	4132	826.40	24.96		
		4183	836.60	23.03		
		4233	846.60	24.74		
	144kbps	4132	826.40	24.67		
		4183	836.60	24.13		
		4233	846.60	25.01		
	384kbps	4132	826.40	25.04		
		4183	836.60	23.59		
		4233	846.60	24.69		

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS 850 HSUPA	Subtest 1	4132	826.40	24.54	38.45	Pass
		4183	836.60	23.24		
		4233	846.60	24.72		
	Subtest 2	4132	826.40	24.51		
		4183	836.60	23.17		
		4233	846.60	24.16		
	Subtest 3	4132	826.40	24.00		
		4183	836.60	23.71		
		4233	846.60	24.15		
	Subtest 4	4132	826.40	22.85		
		4183	836.60	22.53		
		4233	846.60	23.66		
	Subtest 5	4132	826.40	22.28		
		4183	836.60	21.01		
		4233	846.60	22.44		
UMTS 850 AMR	12.2kbps	4132	826.40	22.27		
		4183	836.60	21.01		
		4233	846.60	21.59		

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS1900 HSDPA	Subtest 1	9262	1852.40	21.84	33.00	Pass
		9400	1880.00	22.77		
		9538	1907.60	22.61		
	Subtest 2	9262	1852.40	20.68		
		9400	1880.00	21.67		
		9538	1907.60	21.70		
	Subtest 3	9262	1852.40	19.54		
		9400	1880.00	20.58		
		9538	1907.60	20.57		
	Subtest 4	9262	1852.40	19.52		
		9400	1880.00	20.50		
		9538	1907.60	20.56		
UMTS1900 RMC	12.2kbps	9262	1852.40	21.87	33.00	Pass
		9400	1880.00	22.77		
		9538	1907.60	22.84		
	64kbps	9262	1852.40	21.80		
		9400	1880.00	22.74		
		9538	1907.60	22.81		
	144kbps	9262	1852.40	21.79		
		9400	1880.00	22.71		
		9538	1907.60	22.69		
	384kbps	9262	1852.40	21.76		
		9400	1880.00	22.64		
		9538	1907.60	22.59		

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS1900 HSUPA	Subtest 1	9262	1852.40	21.70	33.00	Pass
		9400	1880.00	22.10		
		9538	1907.60	22.45		
	Subtest 2	9262	1852.40	21.66		
		9400	1880.00	22.09		
		9538	1907.60	22.33		
	Subtest 3	9262	1852.40	21.23		
		9400	1880.00	22.03		
		9538	1907.60	22.20		
	Subtest 4	9262	1852.40	20.21		
		9400	1880.00	21.12		
		9538	1907.60	21.20		
	Subtest 5	9262	1852.40	19.57		
		9400	1880.00	20.52		
		9538	1907.60	20.59		
UMTS1900 AMR	12.2kbps	9262	1852.40	19.46		
		9400	1880.00	20.41		
		9538	1907.60	20.56		

7.2 Occupy Bandwidth

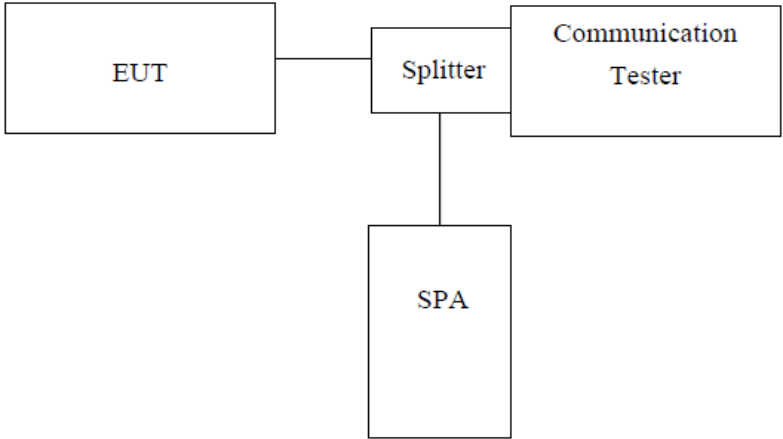Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1049
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.20	248	324
	190	836.60	246	324
	251	848.80	248	322
PCS 1900	512	1850.20	250	322
	661	1880.00	252	324
	810	1909.80	249	318
UMTS850 12.2k RMC	4132	824.40	4180	4700
	4183	836.60	4180	4680
	4233	846.60	4180	4720
UMTS1900 12.2k RMC	9262	1852.40	4220	4720
	9400	1880.00	4180	4720
	9538	1907.60	4180	4720
UMTS850 HSDPA	4132	824.40	4160	4680
	4183	836.60	4220	4680
	4233	846.60	4200	4680
UMTS1900 HSDPA	9262	1852.40	4200	4700
	9400	1880.00	4180	4680
	9538	1907.60	4200	4680
UMTS850 HSUPA	4132	824.40	4160	4700
	4183	836.60	4200	4720
	4233	846.60	4180	4700
UMTS1900 HSUPA	9262	1852.40	4180	4720
	9400	1880.00	4200	4700
	9538	1907.60	4180	4720

Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.


Test plot as follows:

Test Item:

99% Occupy bandwidth


Test Mode:

GSM850

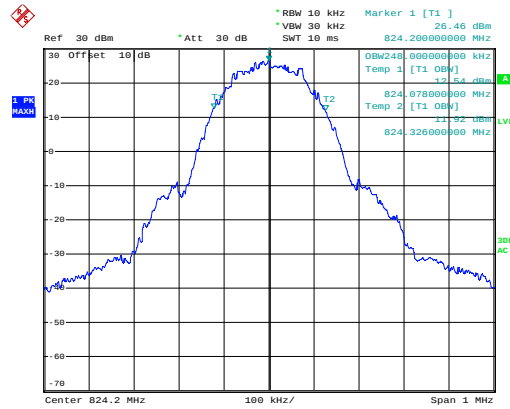


Date: 2.APR.2013 12:11:38

Lowest channel

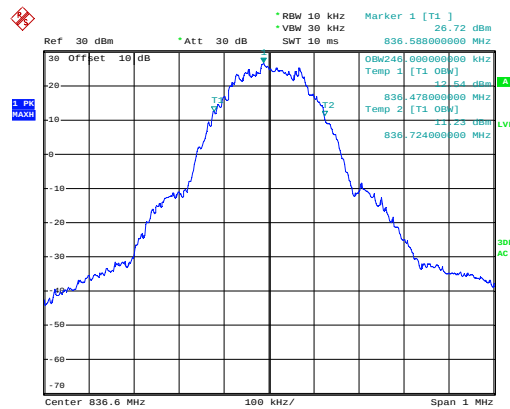

Date: 2.APR.2013 12:13:53

Middle channel

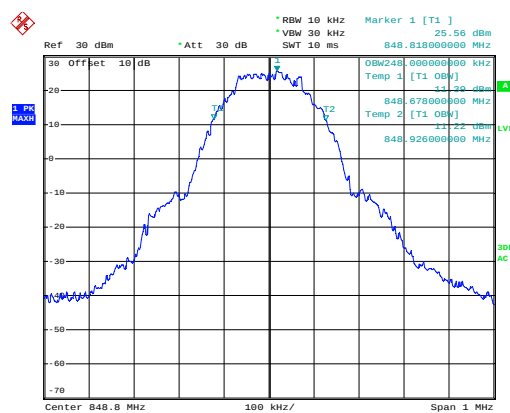

Date: 2.APR.2013 12:16:42


Highest channel

Test Item:

-26dB bandwidth


Test Mode:

GSM850

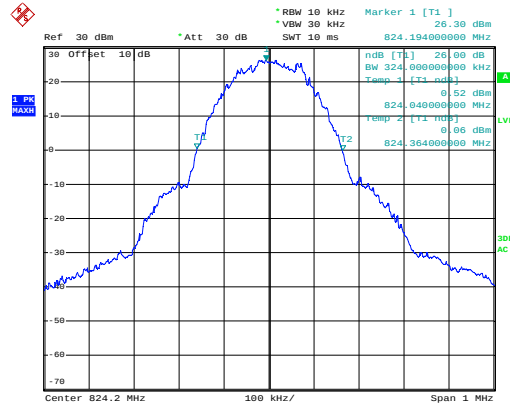


Date: 2.APR.2013 12:11:01

Lowest channel

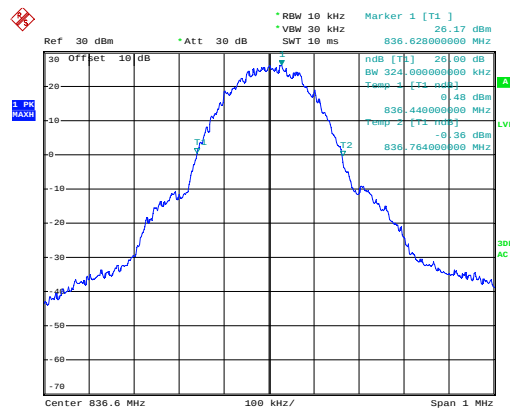

Date: 2.APR.2013 12:13:22

Middle channel

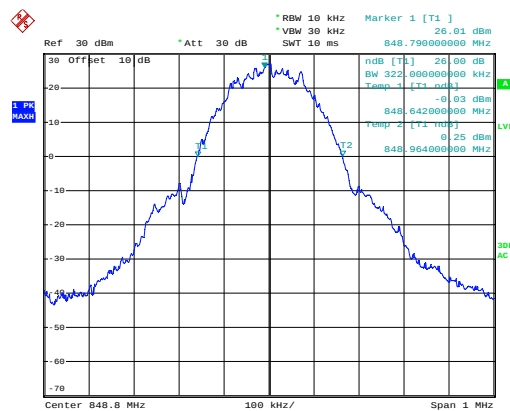

Date: 2.APR.2013 12:16:13


Highest channel

Test Item:

99% Occupy bandwidth


Test Mode:

PCS 1900

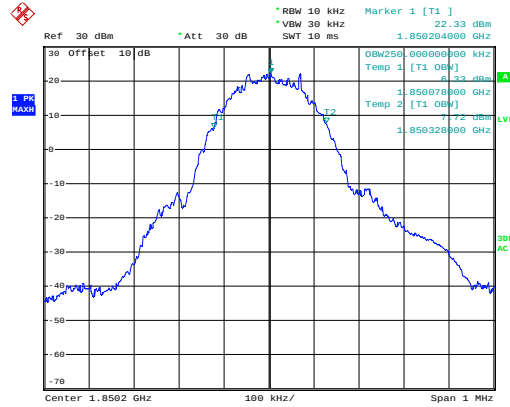


Date: 2.APR.2013 12:20:19

Lowest channel

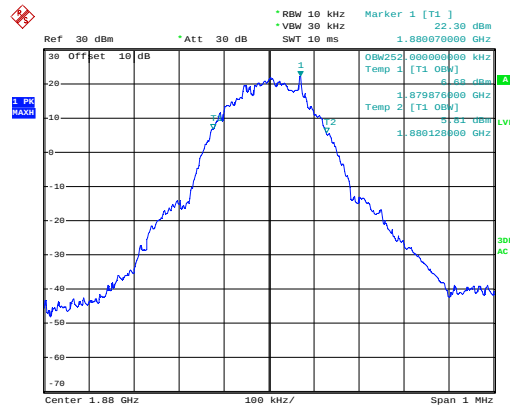

Date: 2.APR.2013 12:22:46


Middle channel

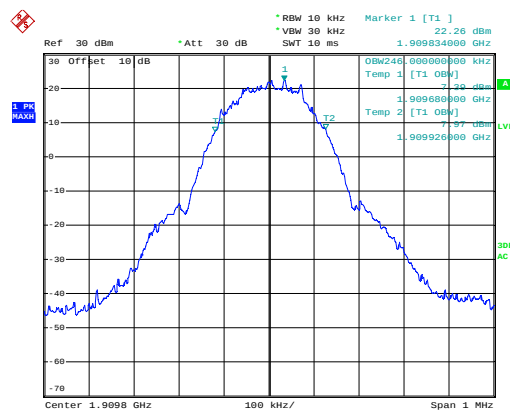

Date: 2.APR.2013 12:34:03


Highest channel

Test Item: -26dB bandwidth Test Mode: PCS 1900

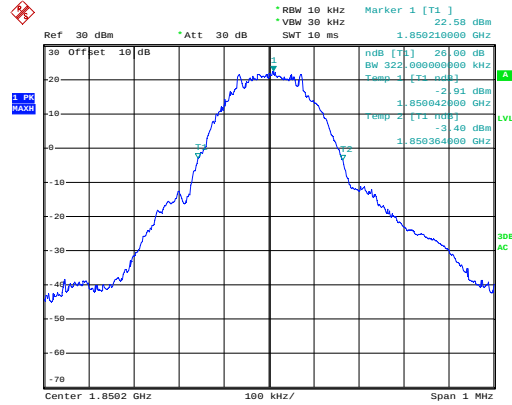


Date: 2.APR.2013 12:19:55

Lowest channel

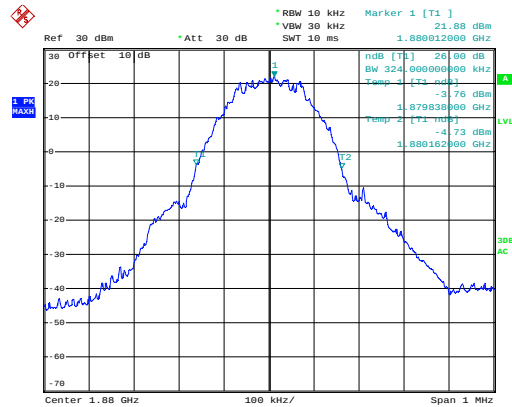

Date: 2.APR.2013 12:22:22

Middle channel

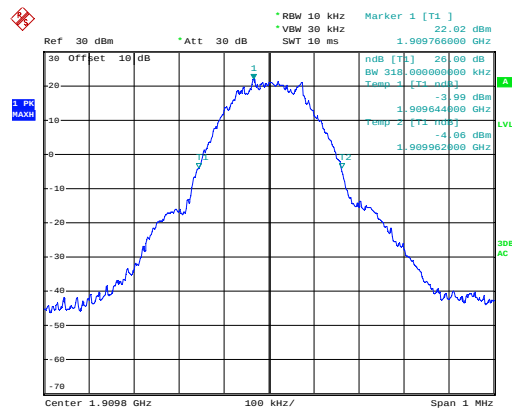

Date: 2.APR.2013 12:33:23


Highest channel

Test Item:

99% Occupy bandwidth


Test Mode:

UMTS 850 12.2k RMC

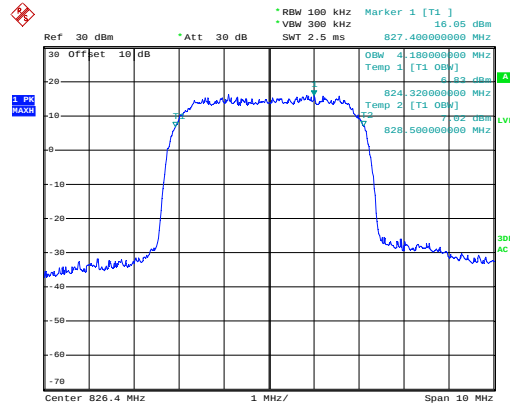


Date: 2.APR.2013 12:38:46

Lowest channel

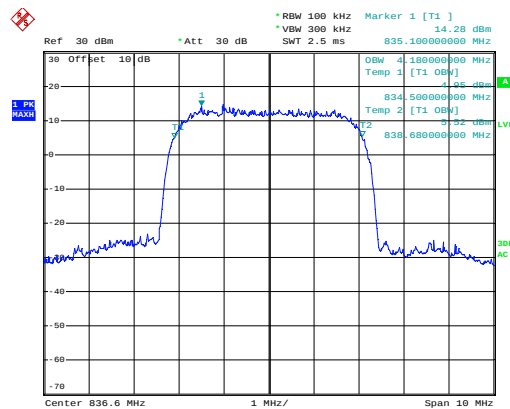

Date: 2.APR.2013 12:40:38

Middle channel

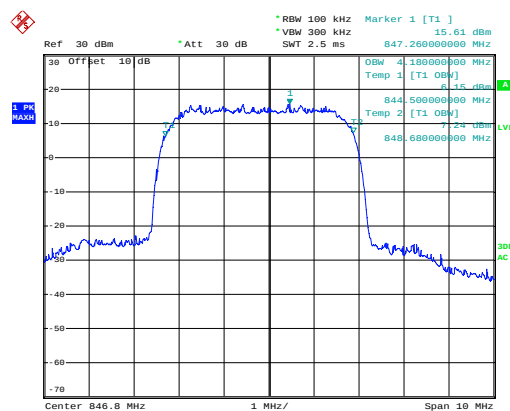


Date: 2.APR.2013 12:41:55

Highest channel

Test Item: -26dB bandwidth


Test Mode:

UMTS 850 12.2k RMC

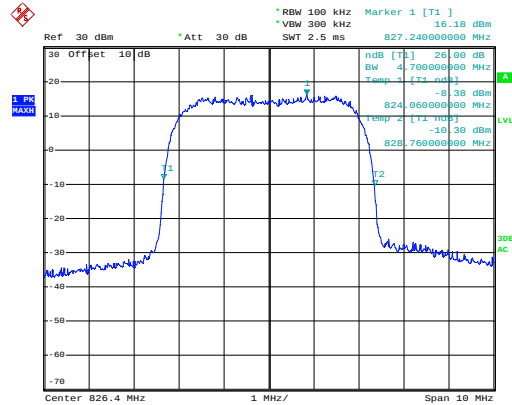


Date: 2.APR.2013 12:38:19

Lowest channel

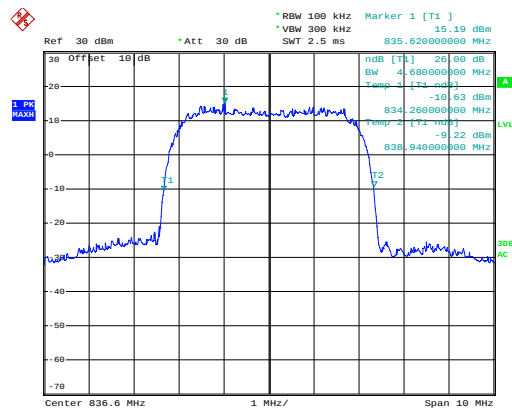

Date: 2.APR.2013 12:40:17


Middle channel

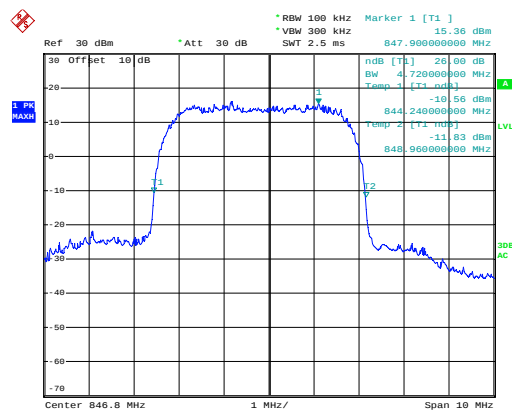

Date: 2.APR.2013 12:41:32


Highest channel

Test Item: 99% Occupy bandwidth Test Mode: UMTS 1900 12.2k RMC

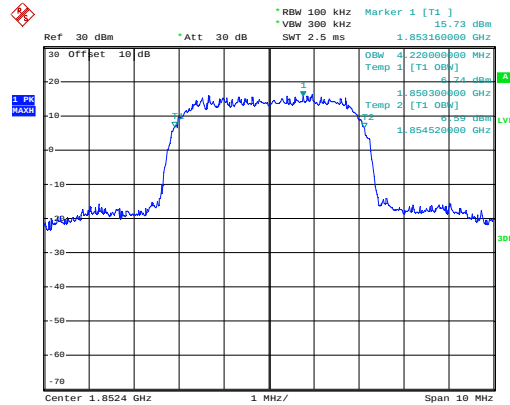


Date: 10.APR.2013 14:48:26

Lowest channel

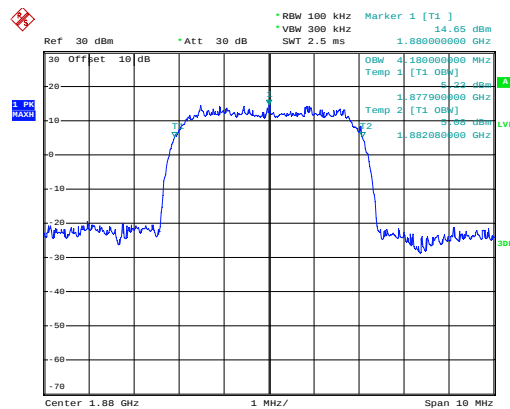

Date: 10.APR.2013 14:45:34


Middle channel

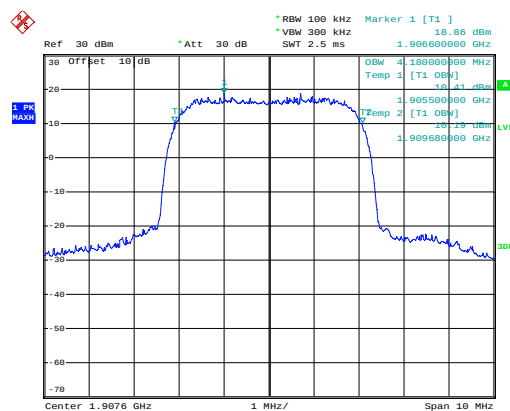

Date: 7.APR.2013 16:59:02


Highest channel

Test Item: -26dB bandwidth Test Mode: UMTS 1900 12.2k RMC

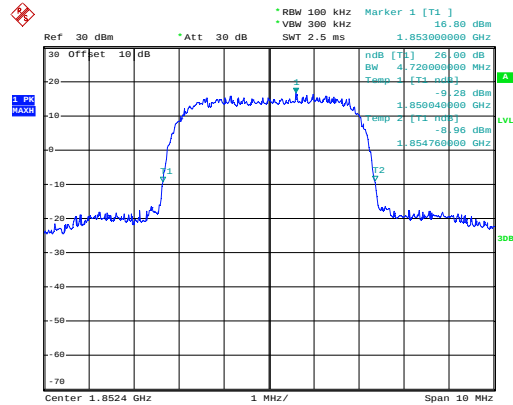


Date: 10.APR.2013 14:48:08

Lowest channel

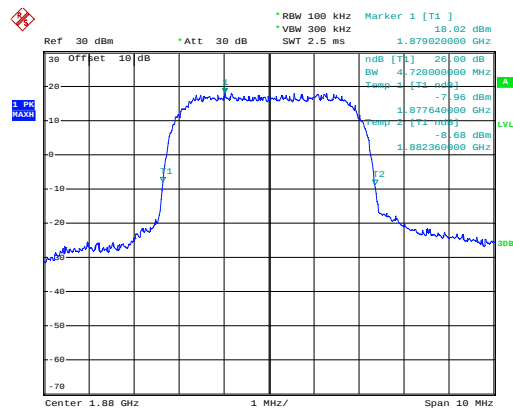

Date: 7.APR.2013 16:56:39


Middle channel

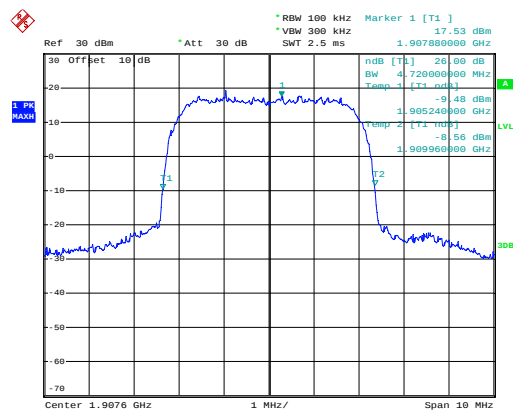

Date: 7.APR.2013 16:58:15


Highest channel

Test Item: -26dB bandwidth Test Mode: UMTS 850 HSDPA

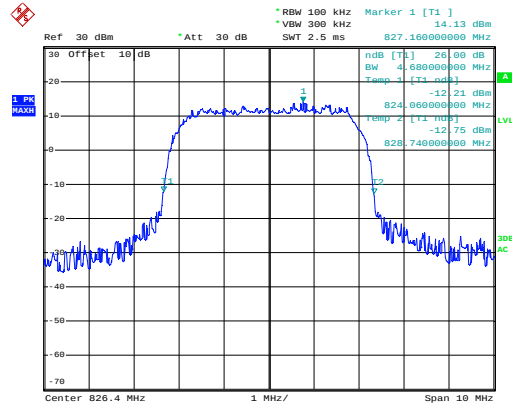


Date: 2.APR.2013 12:51:49

Lowest channel

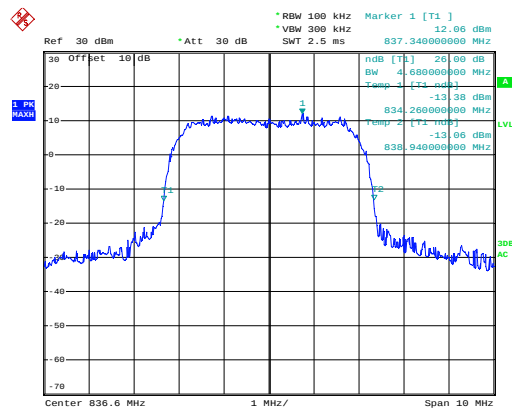

Date: 2.APR.2013 12:50:20


Middle channel

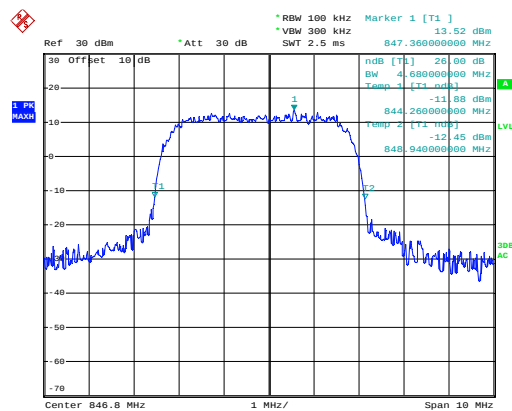

Date: 2.APR.2013 12:48:44


Highest channel

Test Item: 99% Occupy bandwidth Test Mode: UMTS 850 HSDPA

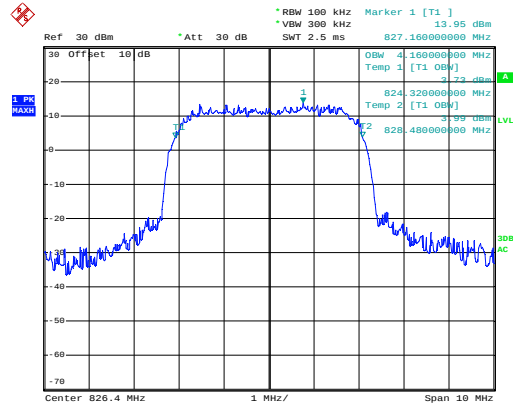


Date: 2.APR.2013 12:52:19

Lowest channel

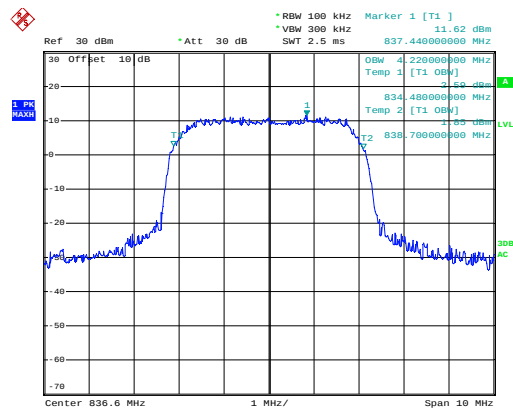

Date: 2.APR.2013 12:50:52


Middle channel

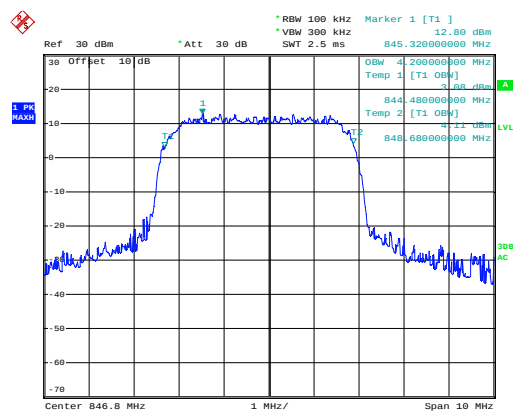

Date: 2.APR.2013 12:49:07


Highest channel

Test Item: -26dB bandwidth Test Mode: UMTS 1900 HSDPA

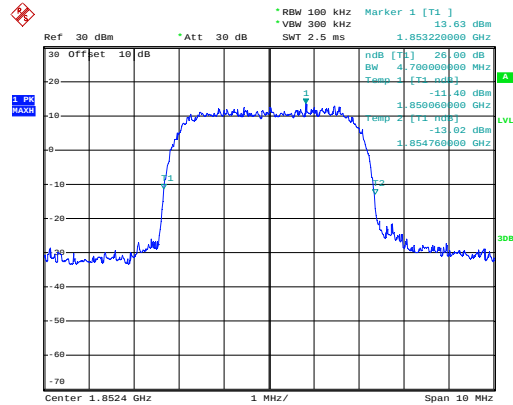


Date: 10.APR.2013 14:46:36

Lowest channel

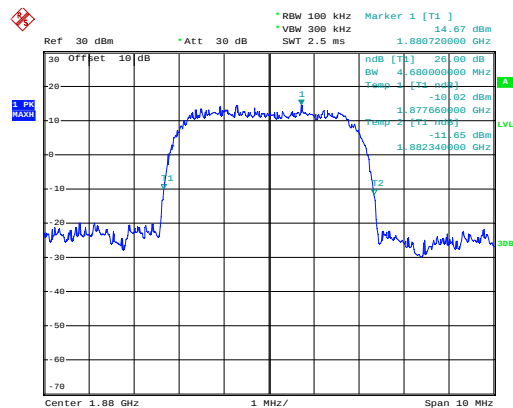

Date: 10.APR.2013 14:45:13


Middle channel

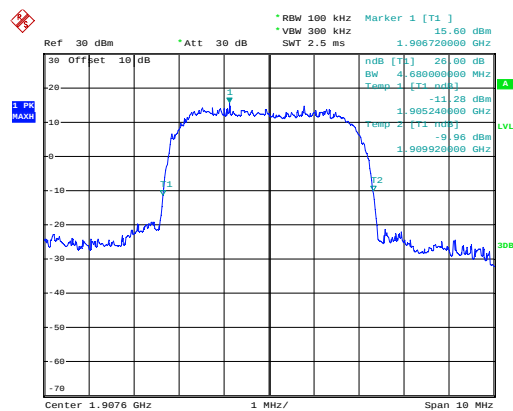

Date: 10.APR.2013 14:44:17


Highest channel

Test Item: 99% Occupy bandwidth Test Mode: UMTS 1900 HSDPA

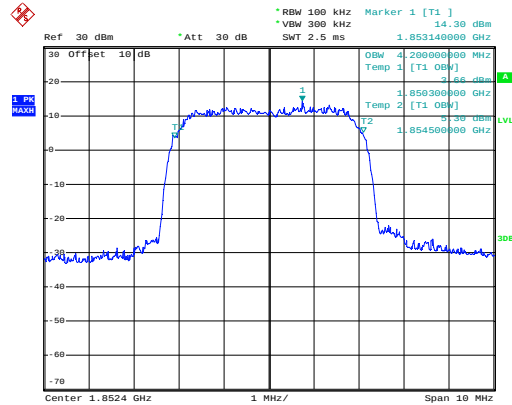


Date: 10.APR.2013 14:46:21

Lowest channel

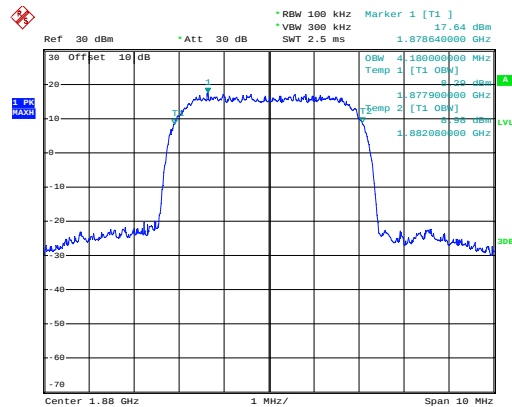

Date: 7.APR.2013 17:39:47


Middle channel

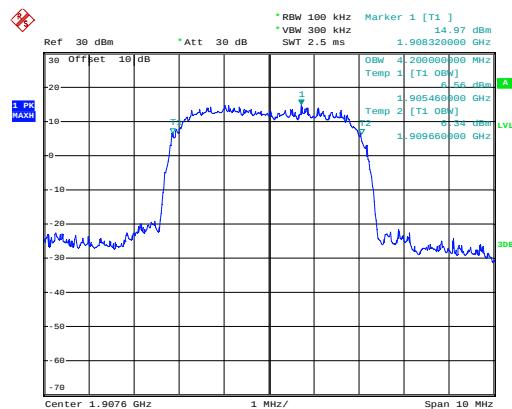

Date: 10.APR.2013 14:44:33


Highest channel

Test Item: -26dB bandwidth Test Mode: UMTS 850 HSUPA

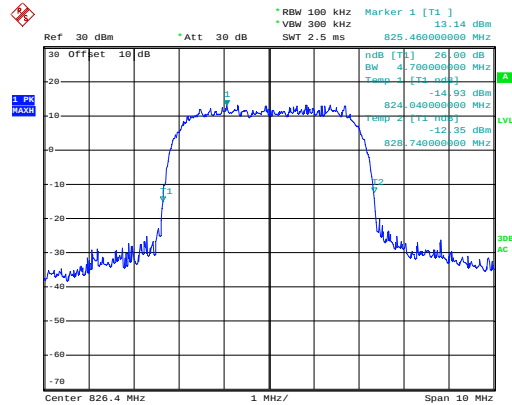


Date: 2.APR.2013 12:55:05

Lowest channel

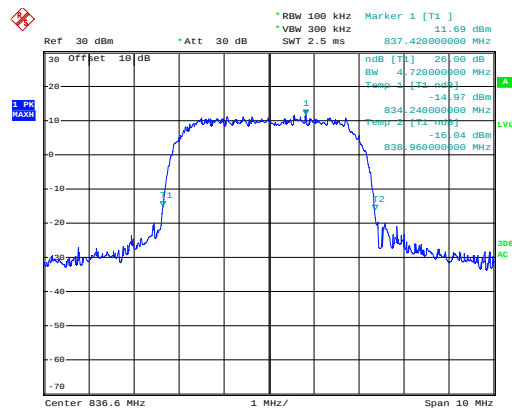

Date: 2.APR.2013 12:56:35


Middle channel

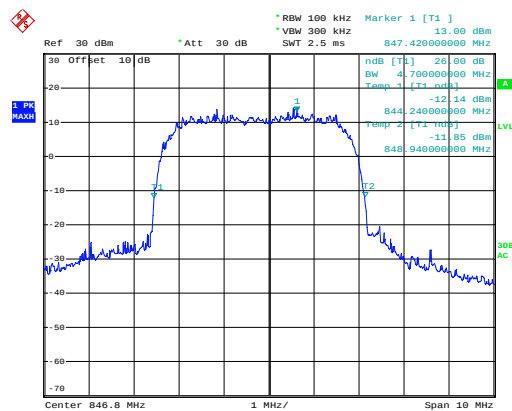

Date: 2.APR.2013 12:57:46


Highest channel

Test Item: 99% Occupy bandwidth Test Mode: UMTS 850 HSUPA

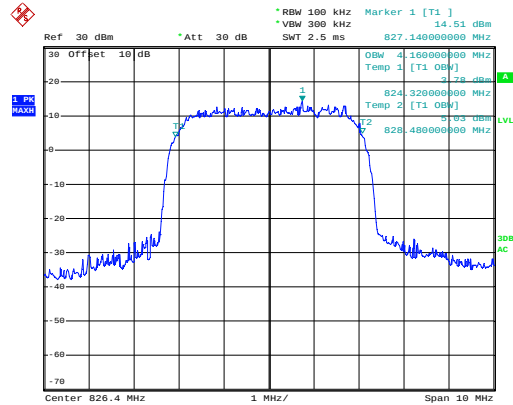


Date: 2.APR.2013 12:55:24

Lowest channel

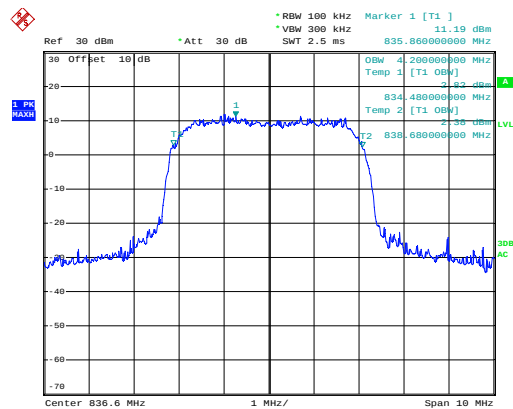

Date: 2.APR.2013 12:56:03

Middle channel

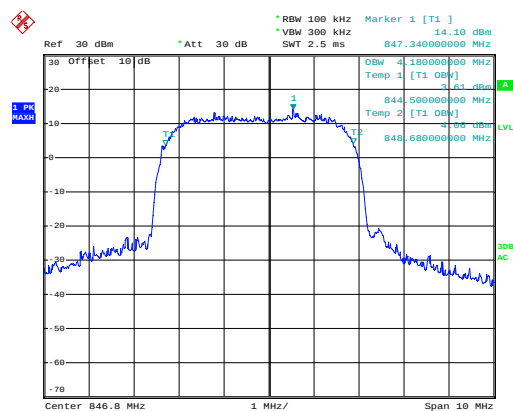


Date: 2.APR.2013 12:58:22

Highest channel

Test Item: -26dB bandwidth


Test Mode:

UMTS 1900 HSUPA

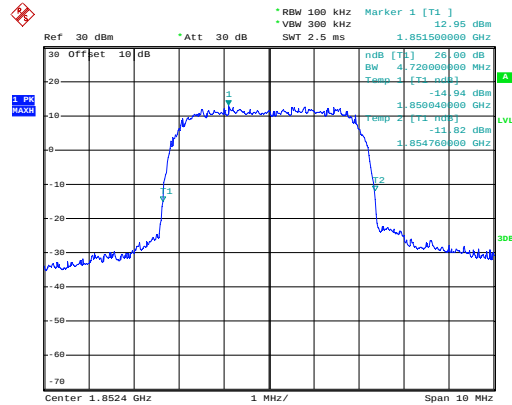


Date: 10.APR.2013 14:38:54

Lowest channel

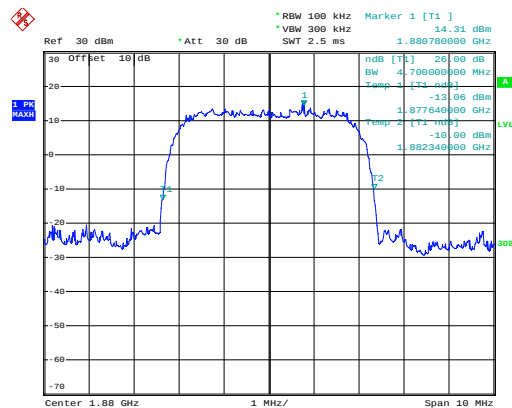

Date: 10.APR.2013 14:40:32


Middle channel

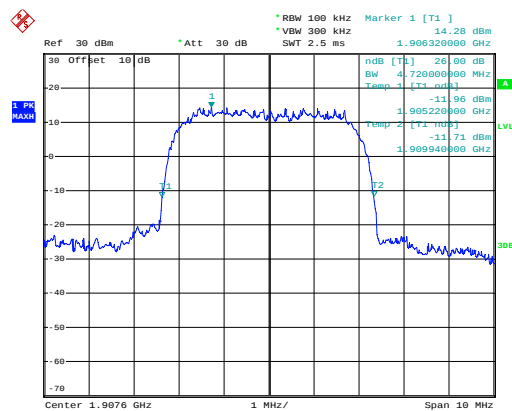

Date: 10.APR.2013 14:42:02


Highest channel

Test Item: 99% Occupy bandwidth Test Mode: UMTS 1900 HSUPA

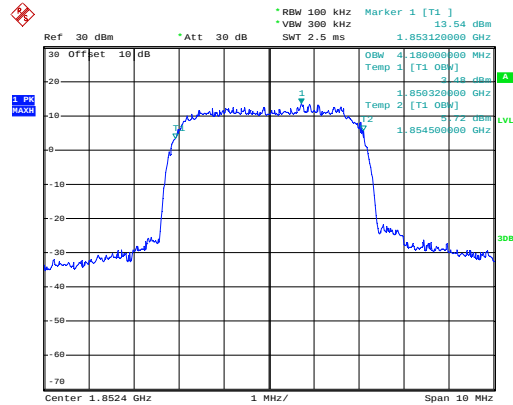


Date: 10.APR.2013 14:39:29

Lowest channel

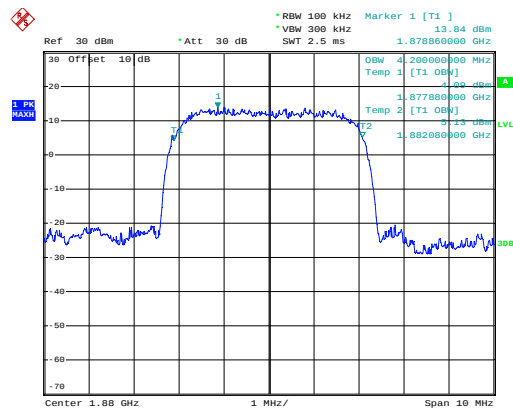

Date: 10.APR.2013 14:40:53

Middle channel

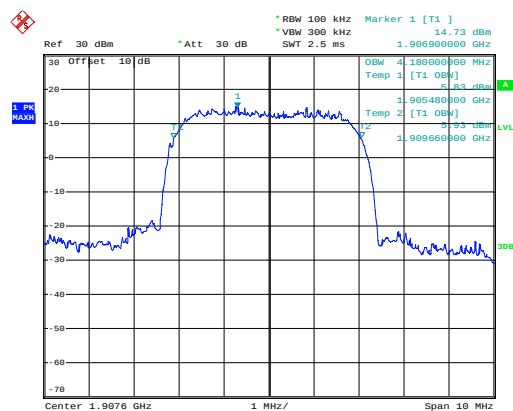


Date: 10.APR.2013 14:41:48

Highest channel

7.3 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


7.4 Out of band emission at antenna terminals

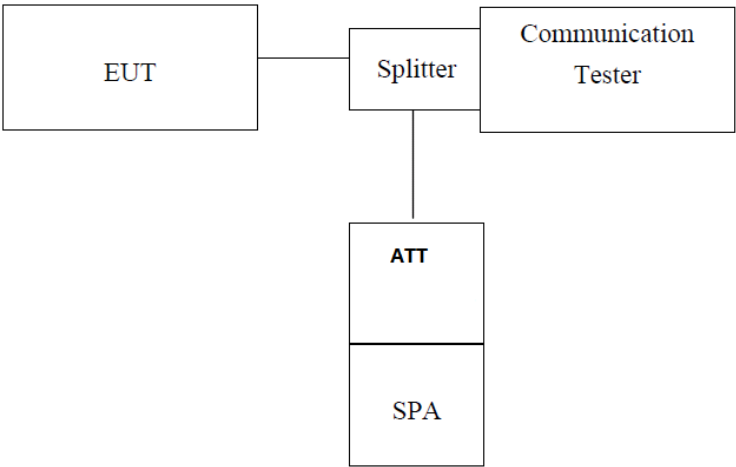Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1051
Limit:	-13dBm
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

Spurious emission


Test Mode: GSM850

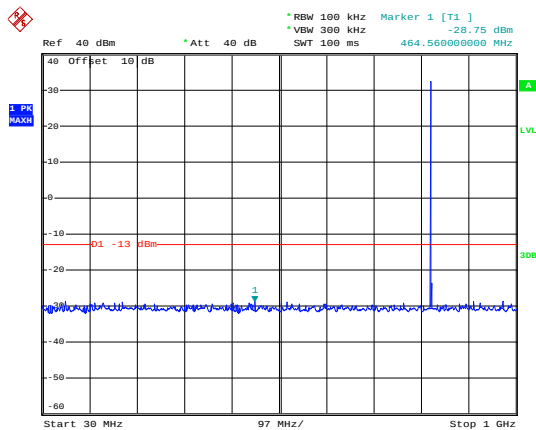

Date: 7.APR.2013 15:44:25

30MHz~1GHz


Test Channel: Lowest channel

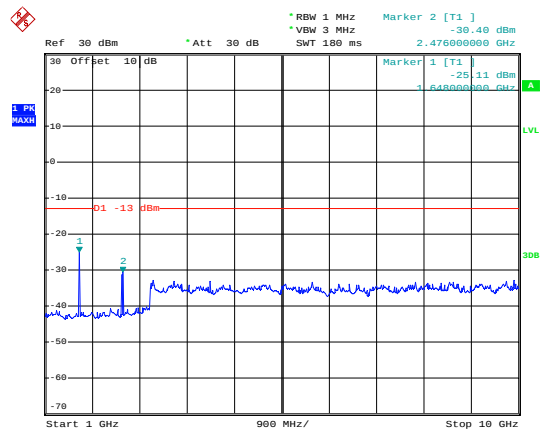

Date: 7.APR.2013 15:48:28

1GHz~10GHz


Test Mode: GSM850

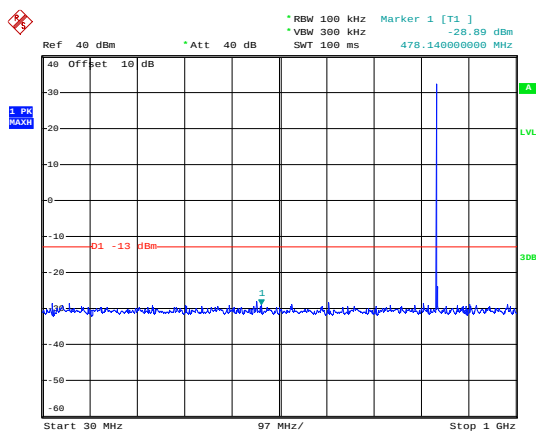

Date: 7.APR.2013 15:44:45

30MHz~1GHz


Test Channel: Middle channel

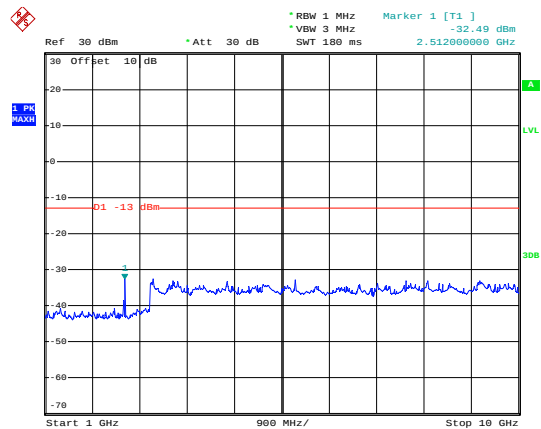

Date: 7.APR.2013 15:47:14

1GHz~10GHz


Test Mode: GSM850

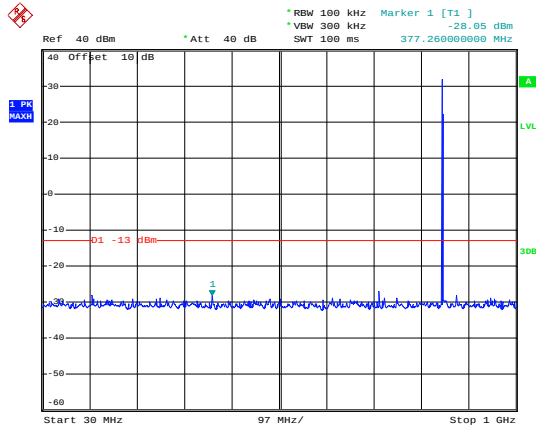

Date: 7.APR.2013 15:45:54

30MHz~1GHz


Test Channel: Highest channel

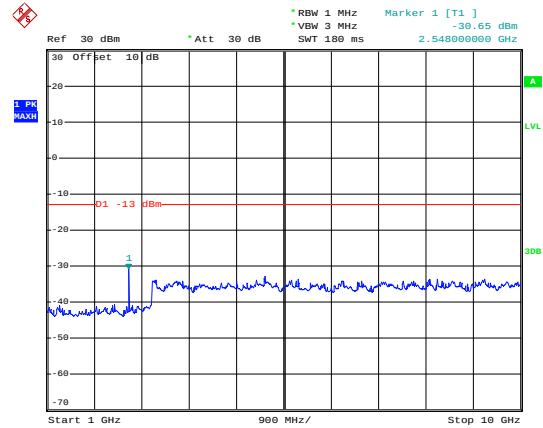

Date: 7.APR.2013 15:46:56

1GHz~10GHz


Test Mode: PCS1900

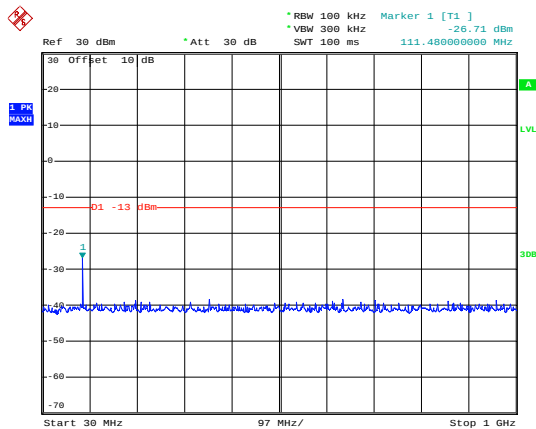

Date: 7.APR.2013 15:43:22

30MHz~1GHz


Test Channel: Lowest channel

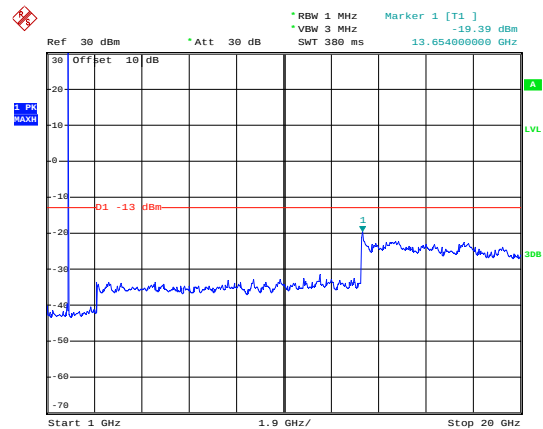

Date: 7.APR.2013 15:39:00

1GHz~20GHz


Test Mode: PCS1900

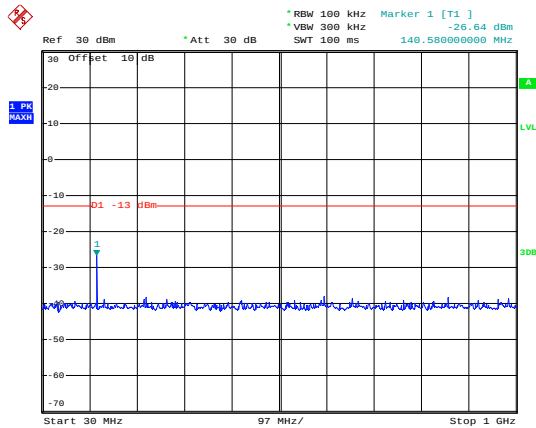

Date: 7.APR.2013 15:42:46

30MHz~1GHz


Test Channel: Middle channel

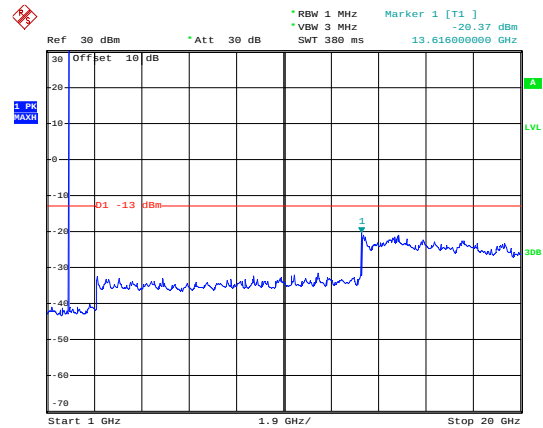

Date: 7.APR.2013 15:39:29

1GHz~20GHz


Test Mode: PCS1900

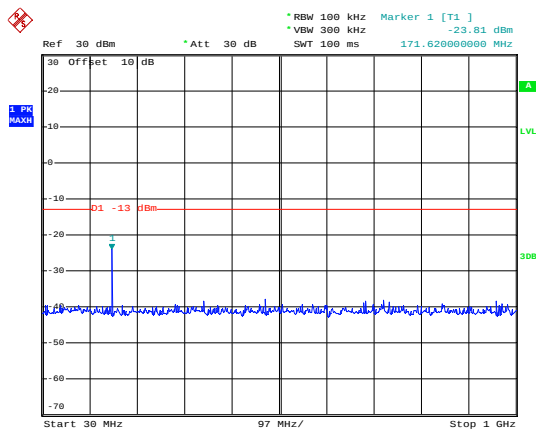

Date: 7.APR.2013 15:42:27

30MHz~1GHz


Test Channel: Highest channel

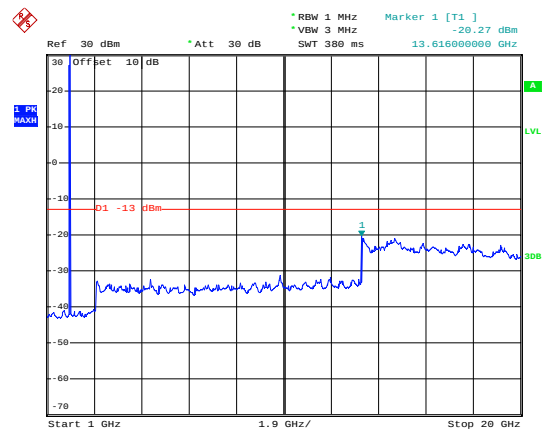

Date: 7.APR.2013 15:41:30

1GHz~20GHz


Test Mode: UMTS 850 12.2k RMC

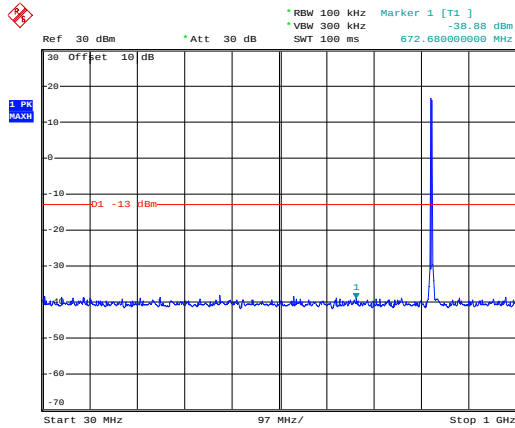

Date: 7.APR.2013 16:22:28

30MHz~1GHz


Test Channel: Lowest channel

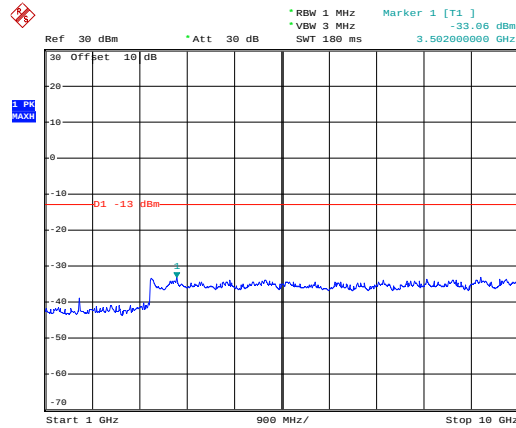

Date: 7.APR.2013 16:24:02

1GHz~10GHz


Test Mode: UMTS 850 12.2k RMC

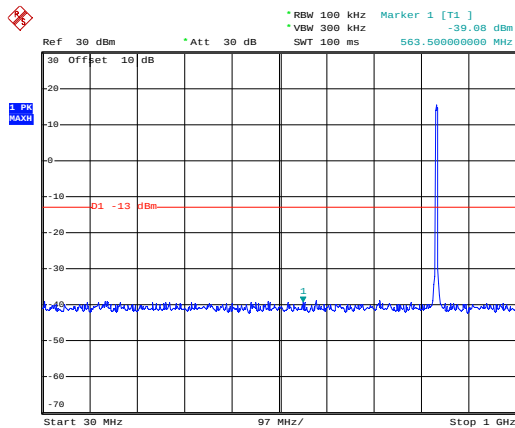

Date: 7.APR.2013 16:25:22

30MHz~1GHz


Test Channel: Middle channel

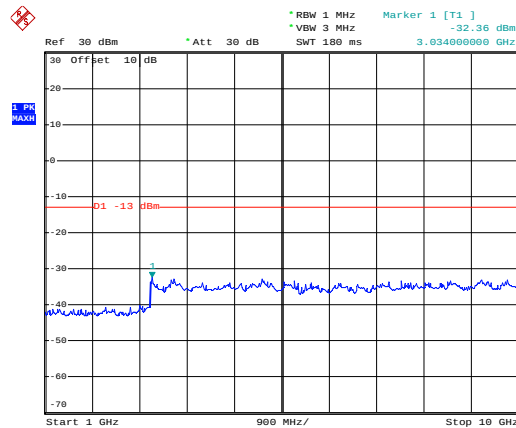

Date: 7.APR.2013 16:24:34

1GHz~10GHz


Test Mode: UMTS 850 12.2k RMC

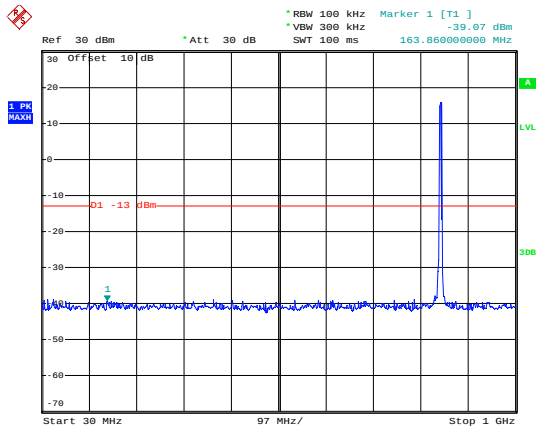

Date: 7.APR.2013 16:25:41

30MHz~1GHz


Test Channel: Highest channel

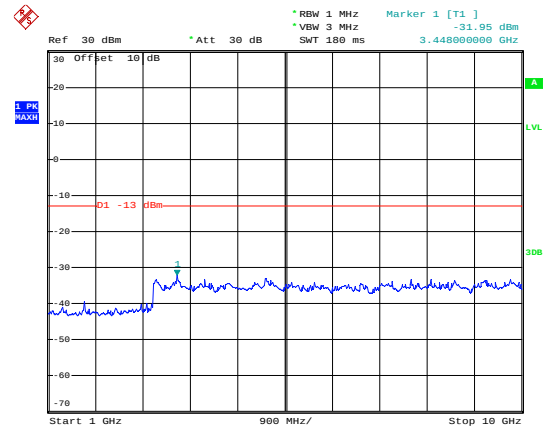

Date: 7.APR.2013 16:26:43

1GHz~10GHz


Test Mode: UMTS 1900 12.2k RMC

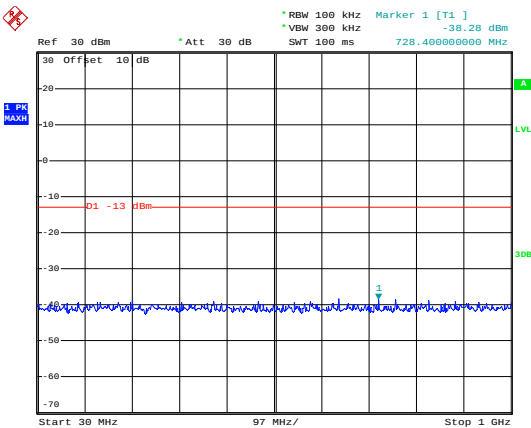

Date: 7.APR.2013 16:51:52

30MHz~1GHz


Test Channel: Lowest channel

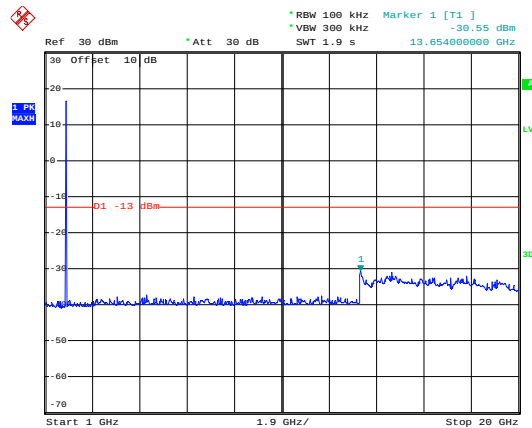

Date: 7.APR.2013 16:52:38

1GHz~20GHz


Test Mode: UMTS 1900 12.2k RMC

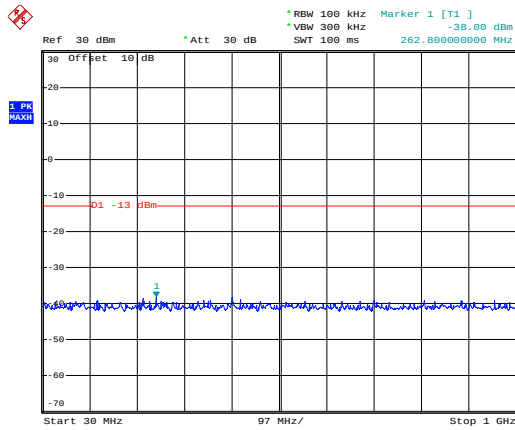

Date: 7.APR.2013 16:55:58

30MHz~1GHz


Test Channel: Middle channel

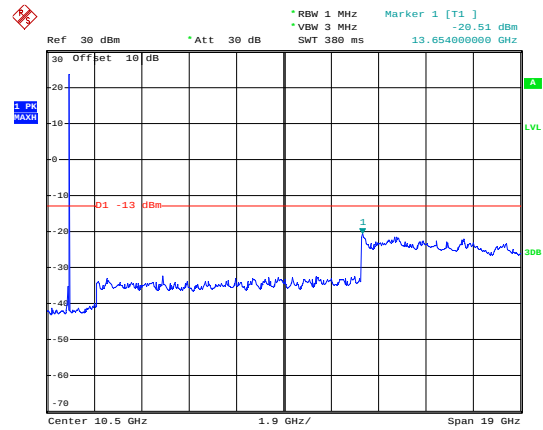

Date: 7.APR.2013 16:55:11

10.5GHz~19GHz


Test Mode: UMTS 1900 12.2k RMC

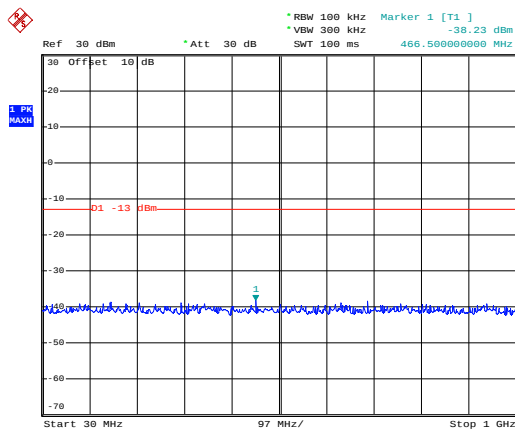

Date: 7.APR.2013 17:00:01

30MHz~1GHz


Test Channel: Highest channel

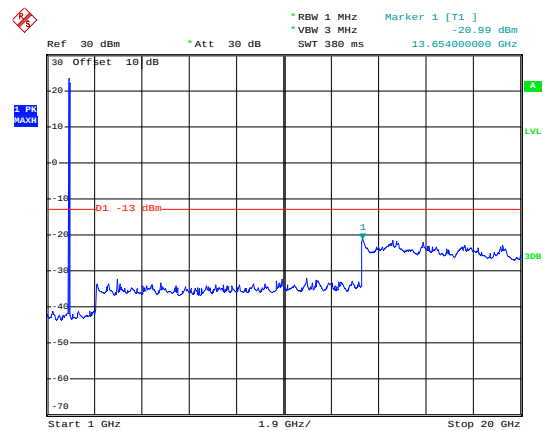

Date: 7.APR.2013 17:00:41

1GHz~20GHz


Test Mode: UMTS 850 HSDPA

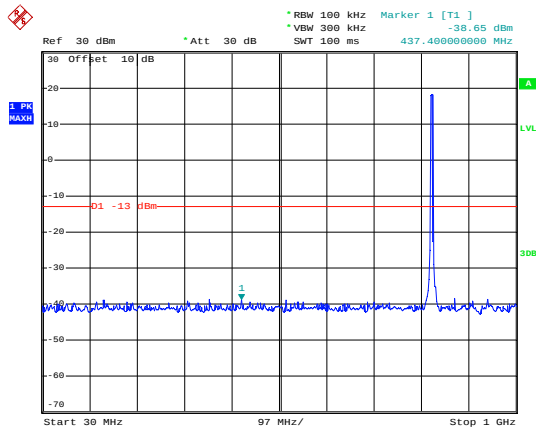

Date: 7.APR.2013 17:56:29

30MHz~1GHz


Test Channel: Lowest channel

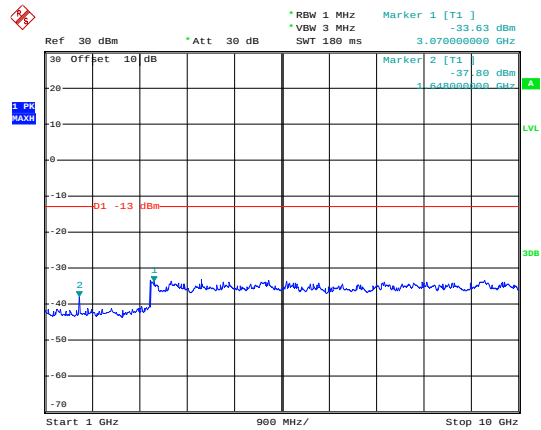

Date: 7.APR.2013 17:55:55

1GHz~10GHz


Test Mode: UMTS 850 HSDPA

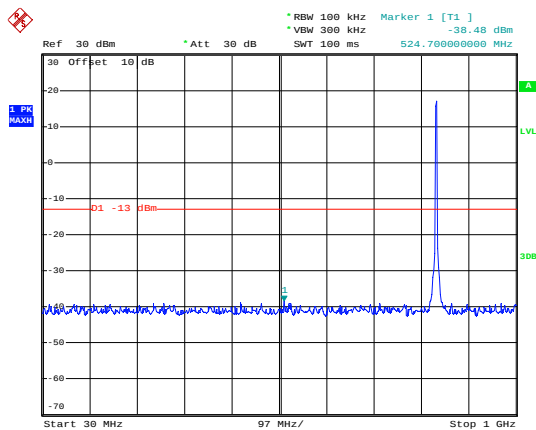

Date: 7.APR.2013 17:54:40

30MHz~1GHz


Test Channel: Middle channel

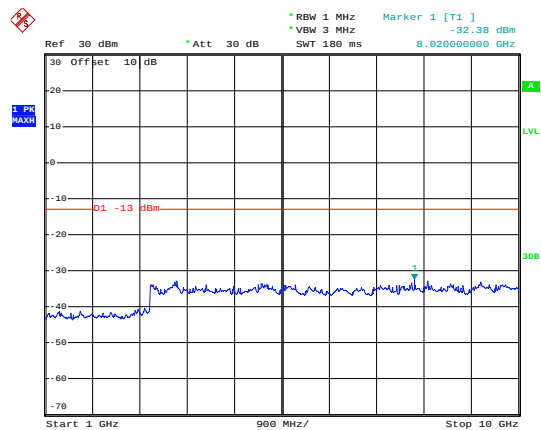

Date: 7.APR.2013 17:55:06

1GHz~10GHz


Test Mode: UMTS 850 HSDPA

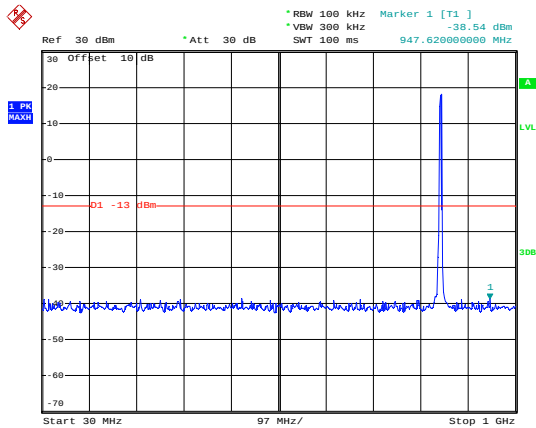

Date: 7.APR.2013 17:51:53

30MHz~1GHz


Test Channel: Highest channel

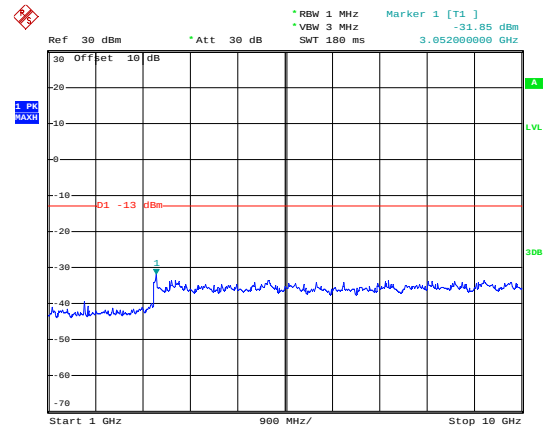

Date: 7.APR.2013 17:51:07

1GHz~10GHz


Test Mode: UMTS 1900 HSDPA

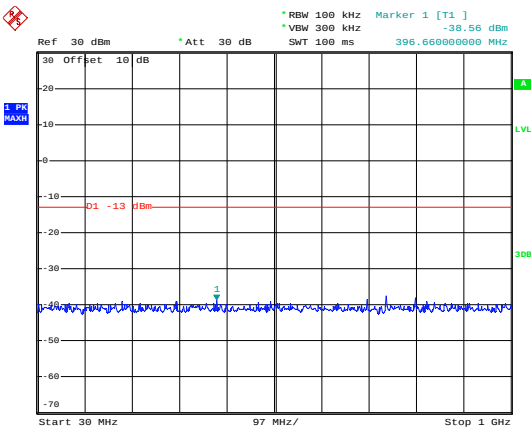

Date: 7.APR.2013 17:29:08

30MHz~1GHz


Test Channel: Lowest channel

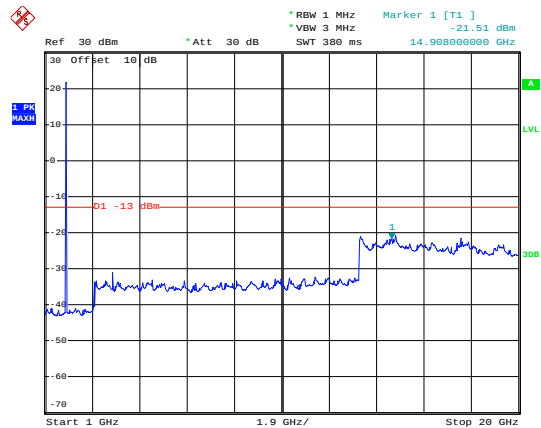

Date: 7.APR.2013 17:28:26

1GHz~20GHz


Test Mode: UMTS 1900 HSDPA

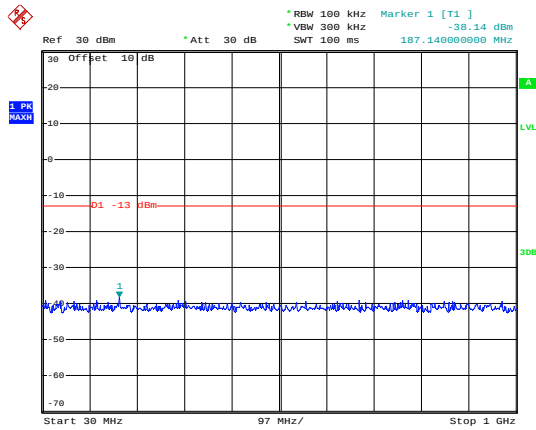

Date: 7.APR.2013 17:31:14

30MHz~1GHz


Test Channel: Middle channel

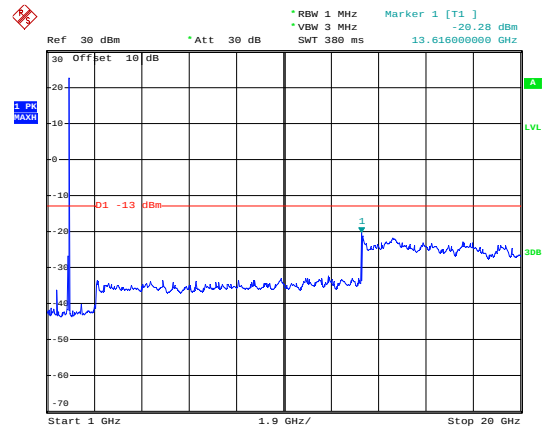

Date: 7.APR.2013 17:31:33

1GHz~20GHz


Test Mode: UMTS 1900 HSDPA

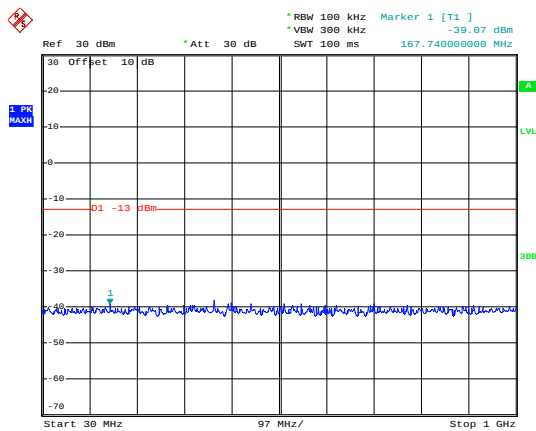

Date: 7.APR.2013 17:32:42

30MHz~1GHz


Test Channel: Highest channel

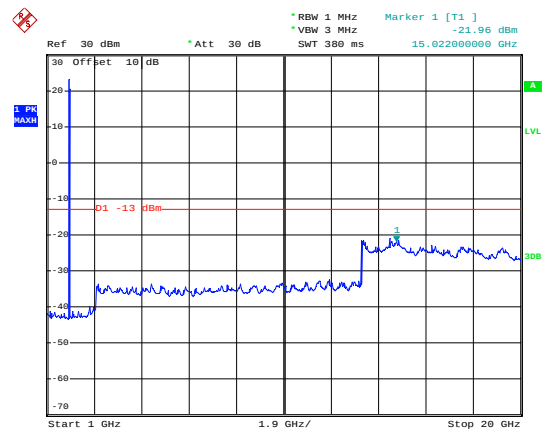

Date: 7.APR.2013 17:32:06

1GHz~20GHz


Test Mode: UMTS 850 HSUPA

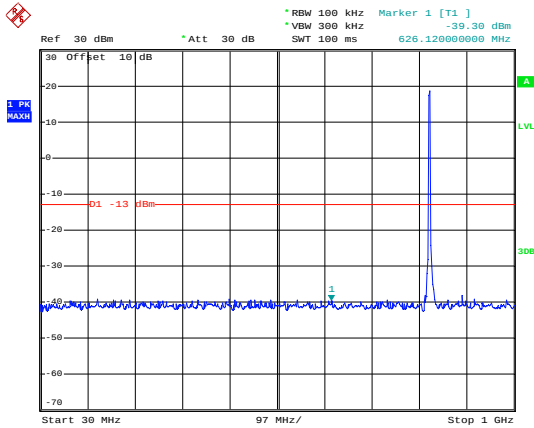

Date: 7.APR.2013 17:44:26

30MHz~1GHz


Test Channel: Lowest channel

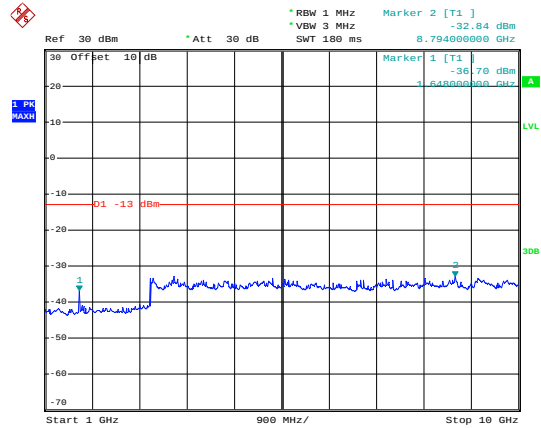

Date: 7.APR.2013 17:44:49

1GHz~10GHz


Test Mode: UMTS 850 HSUPA

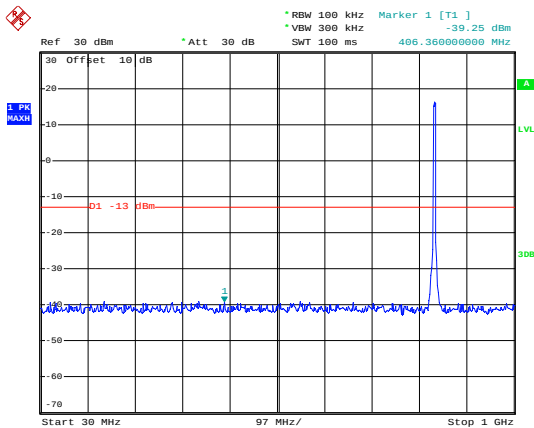

Date: 7.APR.2013 17:46:43

30MHz~1GHz


Test Channel: Middle channel

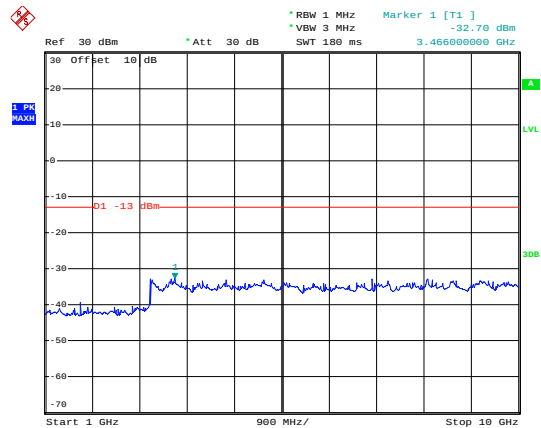

Date: 7.APR.2013 17:46:27

1GHz~10GHz


Test Mode: UMTS 850 HSUPA

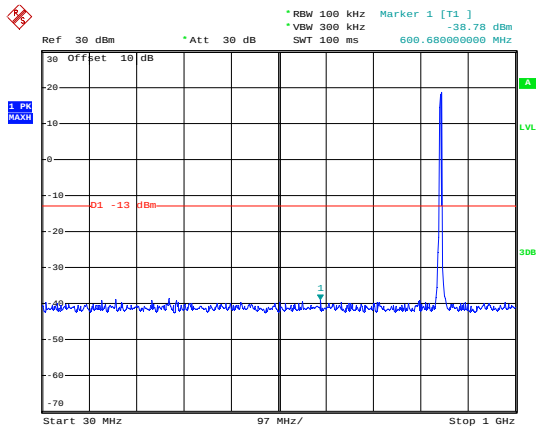

Date: 7.APR.2013 17:49:21

30MHz~1GHz


Test Channel: Highest channel

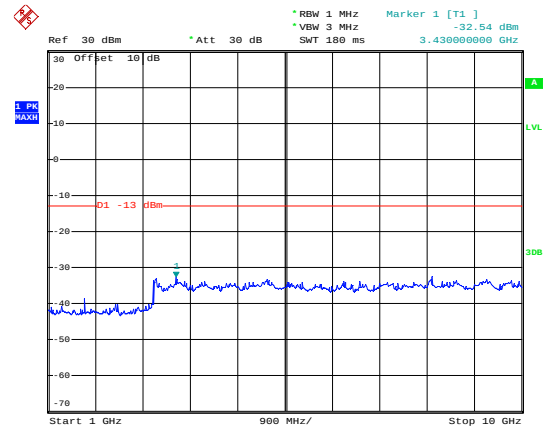

Date: 7.APR.2013 17:49:54

1GHz~10GHz


Test Mode: UMTS 1900 HSUPA

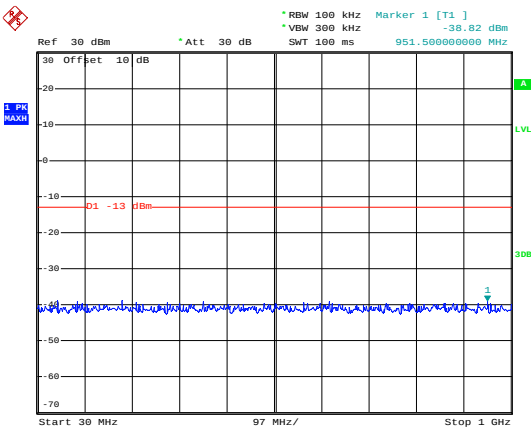

Date: 7.APR.2013 17:35:50

30MHz~1GHz


Test Channel: Lowest channel

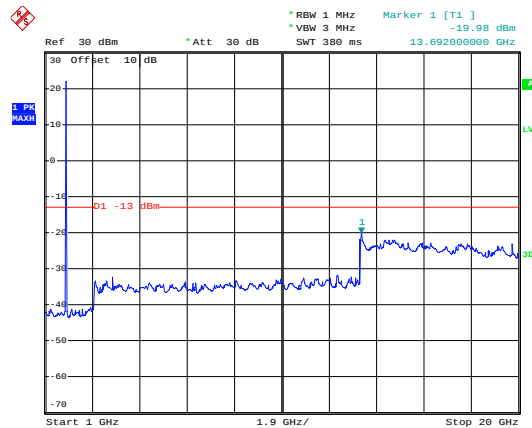

Date: 7.APR.2013 17:37:14

1GHz~20GHz


Test Mode: UMTS 1900 HSUPA

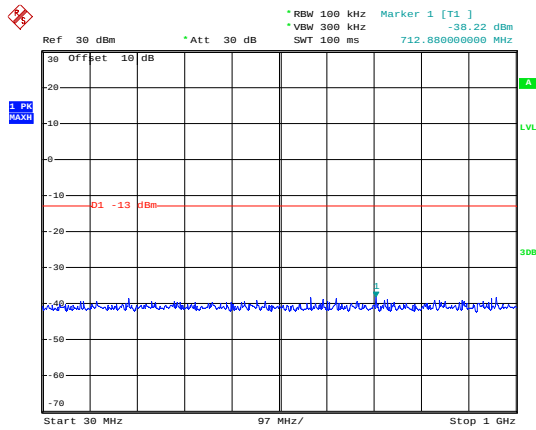

Date: 7.APR.2013 17:38:32

30MHz~1GHz


Test Channel: Middle channel

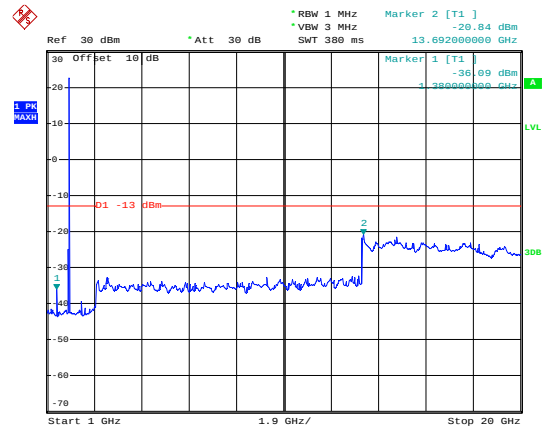

Date: 7.APR.2013 17:38:13

1GHz~20GHz


Test Mode: UMTS 1900 HSUPA

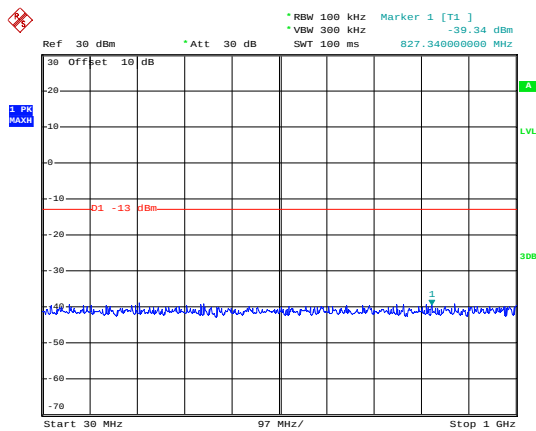

Date: 7.APR.2013 17:41:11

30MHz~1GHz

Test Channel: Highest channel

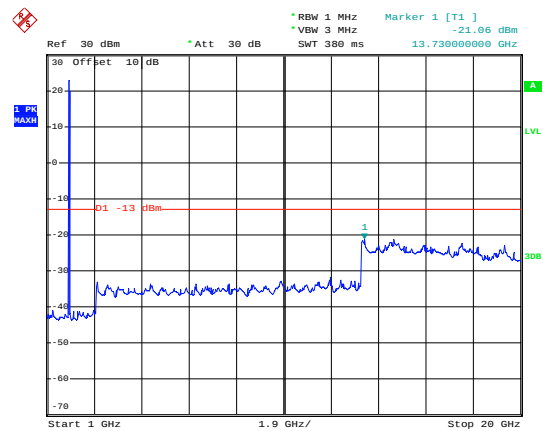


Date: 7.APR.2013 17:41:28

1GHz~20GHz

Band edge emission:


Test Mode:

GSM850

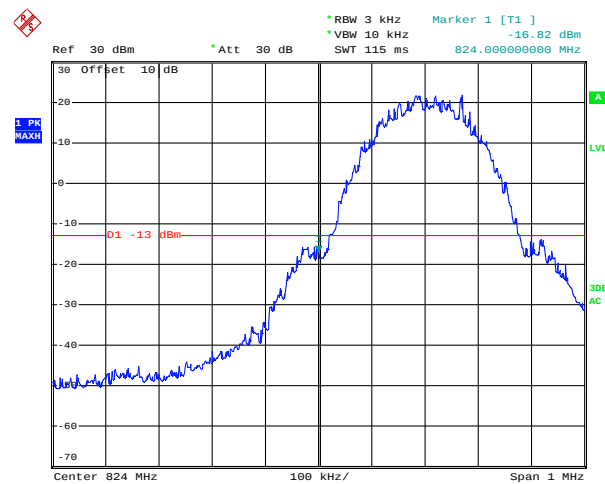

Date: 2.APR.2013 12:12:28

Lowest channel

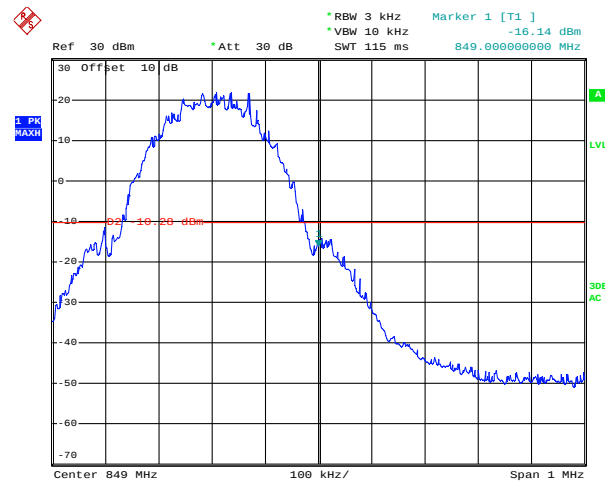


Date: 2.APR.2013 12:17:48

Highest channel


Test Mode:

PCS1900

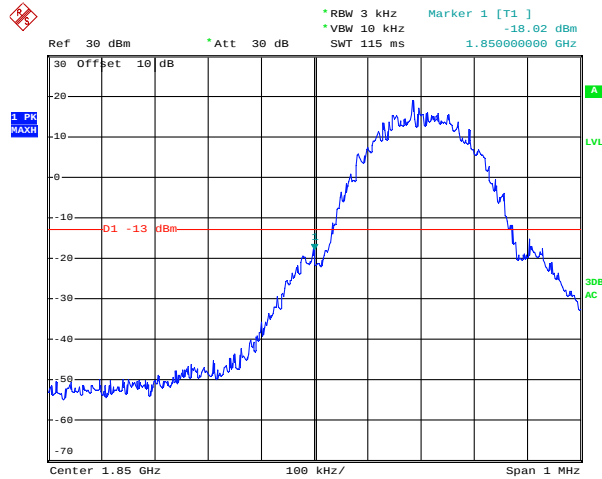

Date: 2.APR.2013 12:21:33

Lowest channel

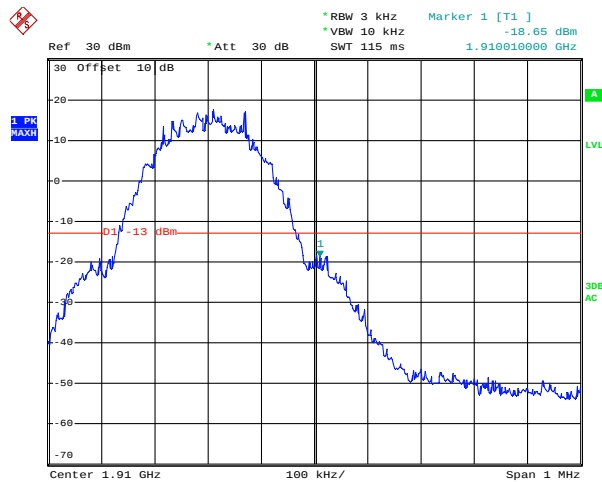


Date: 2.APR.2013 12:34:54

Highest channel


Test Mode:

UMTS850 12.2k RMC

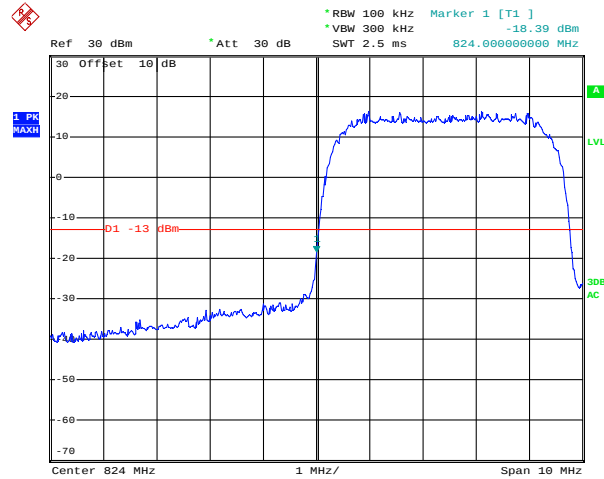

Date: 2.APR.2013 12:39:18

Lowest channel

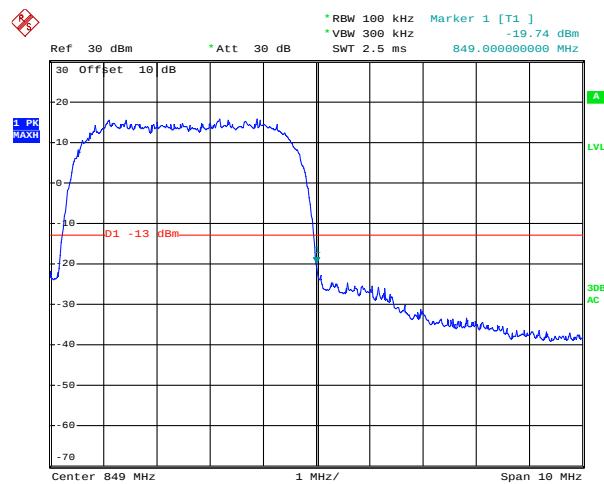


Date: 2.APR.2013 12:42:17

Highest channel


Test Mode:

UMTS 1900 12.2k RMC

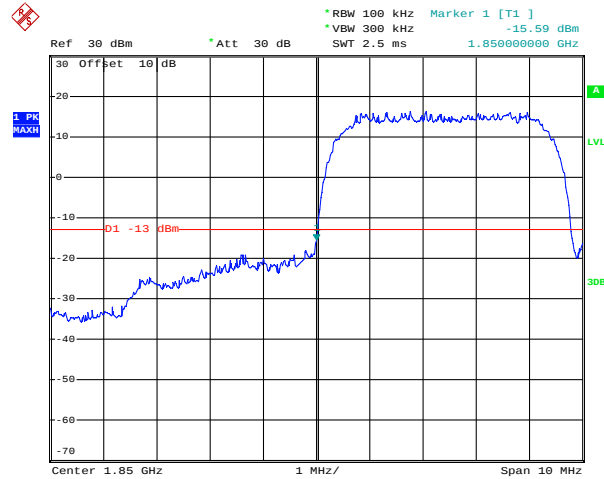

Date: 10.APR.2013 14:47:48

Lowest channel

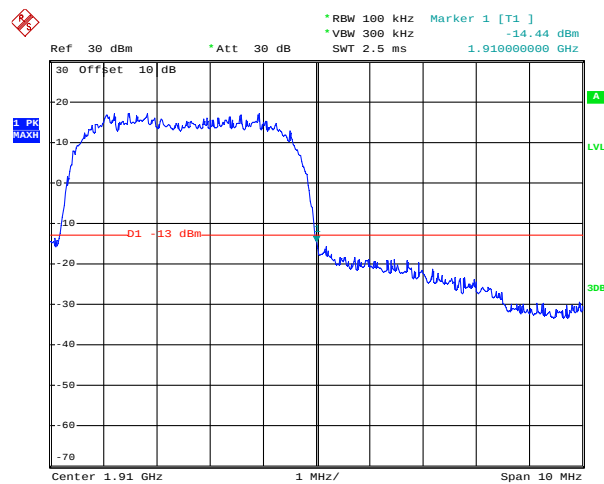


Date: 10.APR.2013 14:57:07

Highest channel


Test Mode:

UMTS850 HSDPA

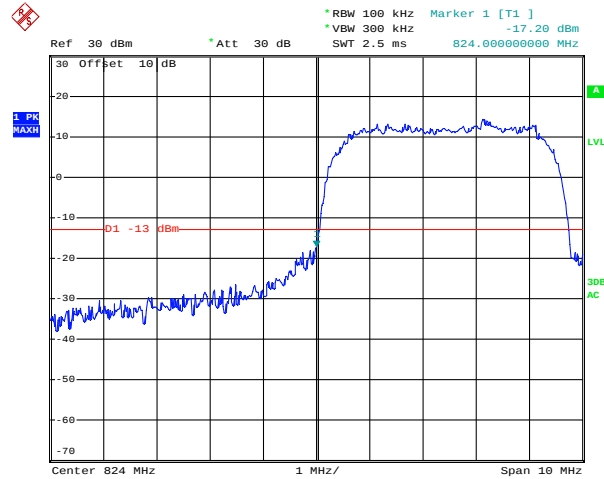

Date: 2.APR.2013 12:53:10

Lowest channel

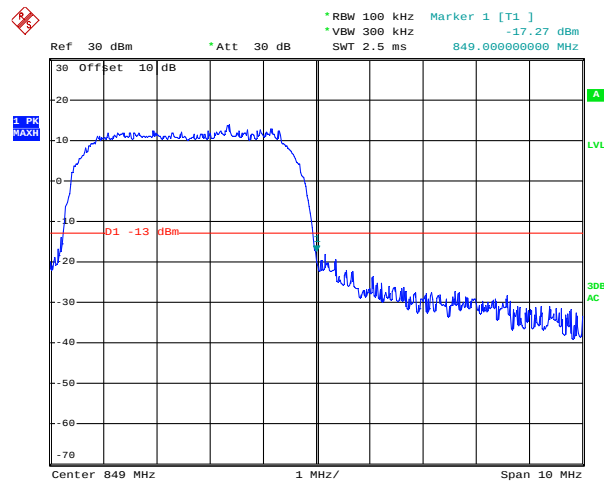


Date: 2.APR.2013 12:48:10

Highest channel


Test Mode:

UMTS 1900 HSDPA

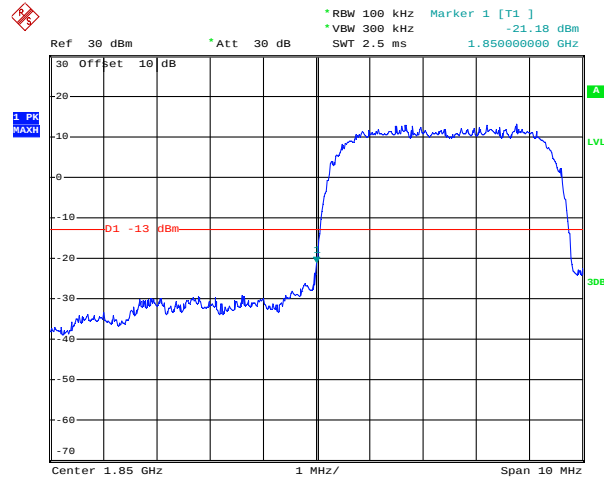

Date: 10.APR.2013 14:46:53

Lowest channel

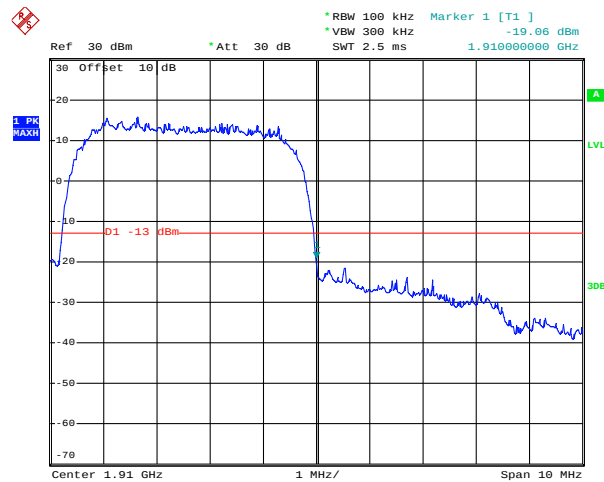


Date: 10.APR.2013 14:43:53

Highest channel


Test Mode:

UMTS850 HSUPA

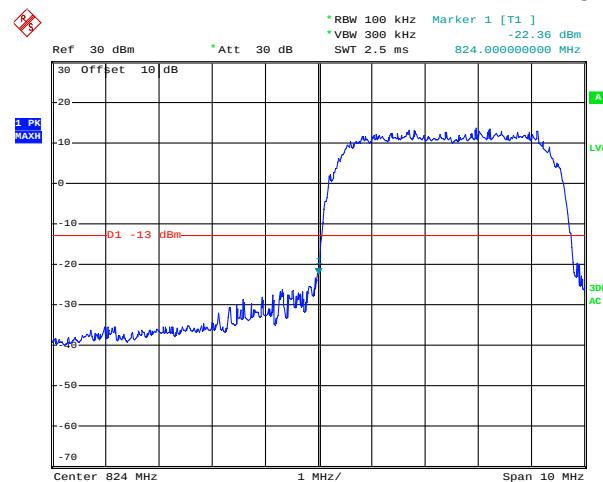

Date: 2.APR.2013 12:54:39

Lowest channel

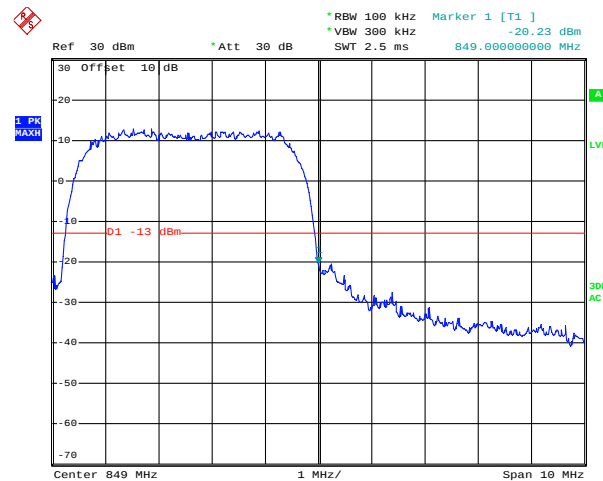


Date: 2.APR.2013 12:59:23

Highest channel


Test Mode:

UMTS 1900 HSUPA

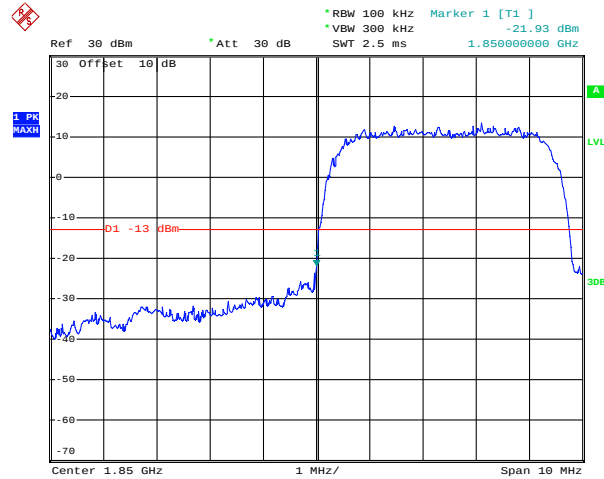

Date: 10.APR.2013 14:39:47




Lowest channel

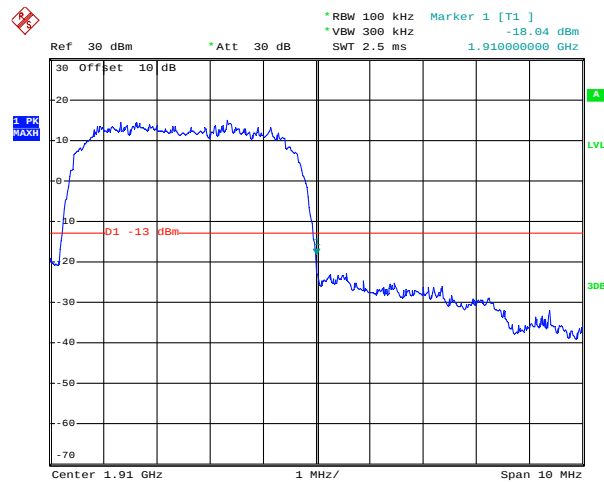

Date: 10.APR.2013 14:42:28

Highest channel

7.5 ERP, EIRP Measurement

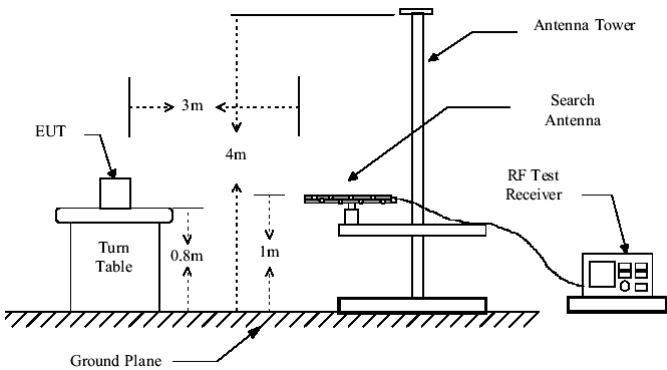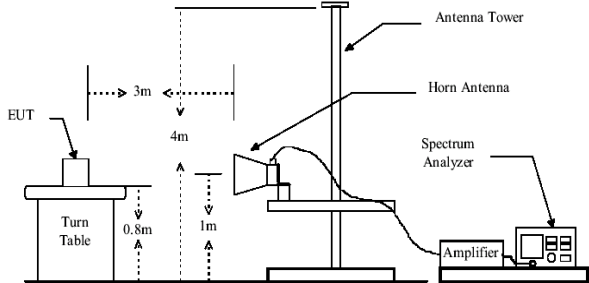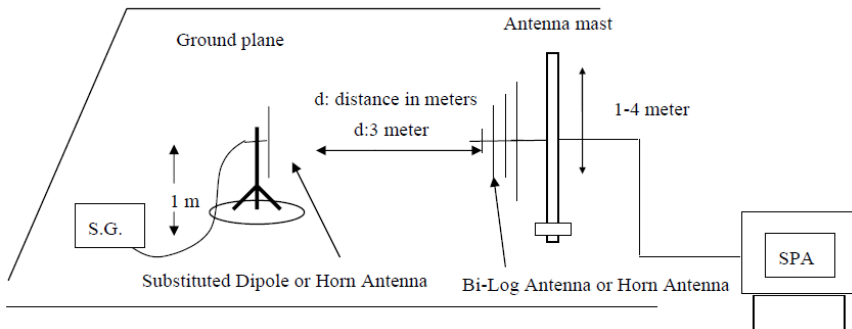Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850 7W ERP PCS1900 2W EIRP WCDMA Band V: 7W ERP WCDMA Band II: 2W EIRP
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$ 5. The worse case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case)




EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850	190	H	V	28.06	38.45	Pass
			H	18.56		
		E1	V	26.75		
			H	17.55		
		E2	V	25.94		
			H	16.78		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
PCS1900	512	H	V	29.45	33.00	Pass
			H	20.51		
		E1	V	26.96		
			H	19.70		
		E2	V	25.99		
			H	18.42		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
UMTS 850 12.2k RMC	4132	H	V	23.41	38.45	Pass
			H	16.00		
		E1	V	23.17		
			H	10.68		
		E2	V	20.61		
			H	12.63		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
UMTS 1900 12.2k RMC	9262	H	V	24.36	33.00	Pass
			H	21.92		
		E1	V	23.86		
			H	20.72		
		E2	V	20.47		
			H	18.35		

7.6 Field strength of spurious radiation measurement

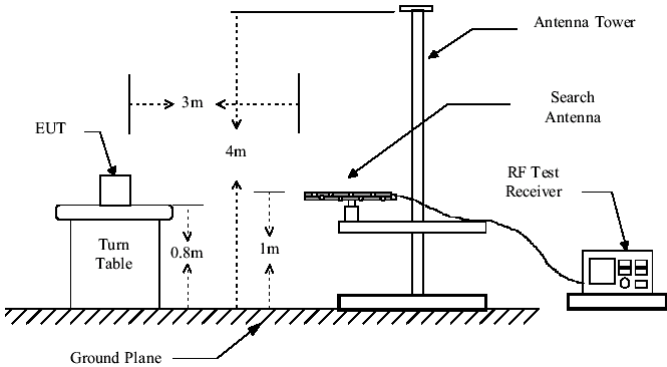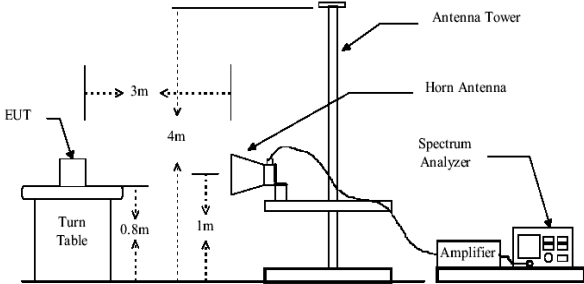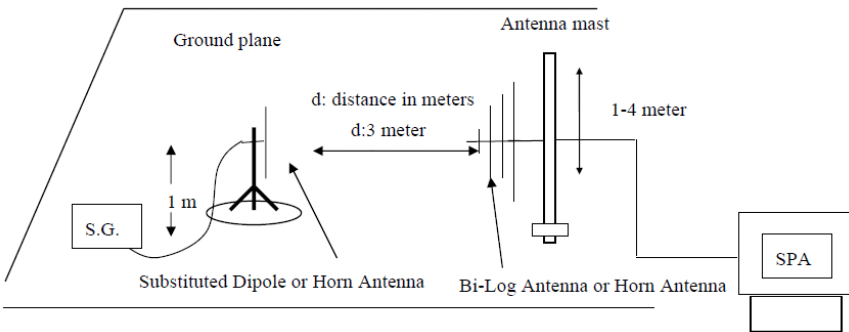Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1053
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT

	positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details. Based on the ERP/EIRP results, we selected GSM850, PCS1900, UMTS RMC 850 and UMTS RMC 1900 for Radiated spurious emission test; HSDPA, HSUPA and GPRS mode were not test.
Test results:	Passed

Measurement Data (worst case)

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1133.63	Vertical	-43.80	-13.00	Pass
1648.56	V	-55.10		
2471.53	V	-37.02		
3297.99	V	-40.13		
4945.20	V	---		
5769.40	V	---		
1194.09	Horizontal	-55.92	-13.00	Pass
1648.56	H	-42.95		
2471.53	H	-44.27		
3297.99	H	-40.25		
4945.20	H	---		
5769.40	H	---		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1133.63	Vertical	-51.50	-13.00	Pass
1672.36	V	-40.22		
2511.71	V	-53.95		
3345.60	V	-31.41		
5019.60	V	---		
5856.20	V	---		
1196.23	Horizontal	-54.37	-13.00	Pass
1672.36	H	-40.49		
2414.63	H	-47.39		
2511.71	H	-45.21		
5019.60	H	---		
5856.20	H	---		

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1133.63	Vertical	-36.36	-13.00	Pass
1696.50	V	-53.49		
2547.97	V	-38.36		
3393.90	V	-42.76		
5092.80	V	---		
5941.60	V	---		
1194.09	Horizontal	-54.93	-13.00	Pass
1696.50	H	-39.98		
2547.97	H	-37.77		
3393.90	H	-40.93		
5092.80	H	---		
5941.60	H	---		
Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-31.61	-13.00	Pass
5550.60	V	-20.54		
7400.80	V	-25.46		
9251.00	V	-32.78		
11101.20	V	---		
12951.40	V	---		
3700.40	Horizontal	-30.50	-13.00	Pass
5550.60	H	-25.14		
7400.80	H	-24.25		
9251.00	H	-26.00		
11101.20	H	---		
12951.40	H	---		

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-40.08	-13.00	Pass
5640.00	V	-15.38		
7520.00	V	-29.04		
9400.00	V	-28.90		
11280.00	V	---		
13160.00	V	---		
3760.00	Horizontal	-42.40	-13.00	Pass
5640.00	H	-29.51		
7520.00	H	-30.28		
9400.00	H	-24.58		
11280.00	H	---		
13160.00	H	---		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-30.83	-13.00	Pass
5729.40	V	-27.79		
7639.20	V	-35.70		
9549.00	V	-19.78		
11458.80	V	---		
13368.60	V	---		
3819.60	Horizontal	-36.52	-13.00	Pass
5729.40	H	-26.60		
7639.20	H	-30.05		
9549.00	H	-19.69		
11458.80	H	---		
13368.60	H	---		

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	UMTS850 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1651.51	Vertical	-35.09	-13.00	Pass
2458.28	V	-40.95		
3309.83	V	-45.20		
4140.70	V	-36.52		
4958.40	V	---		
5784.80	V	---		
1648.56	Horizontal	-45.33	-13.00	Pass
2410.31	H	-40.17		
3309.83	H	-37.59		
4140.70	H	-42.40		
4958.40	H	---		
5784.80	H	---		
Test mode:	UMTS850 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1675.36	Vertical	-34.94	-13.00	Pass
2397.39	V	-45.36		
3345.60	V	-41.08		
4177.96	V	-40.60		
5016.00	V	---		
5852.00	V	---		
1196.23	Horizontal	-53.47	-13.00	Pass
1675.36	H	-47.09		
2436.36	H	-48.17		
3351.60	H	-43.10		
5016.00	H	---		
5852.00	H	---		

Test mode:	UMTS850 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1690.43	Vertical	-35.16	-13.00	Pass
2397.39	V	-42.81		
3387.83	V	-32.25		
4238.28	V	-37.04		
5079.60	V	---		
5926.20	V	---		
1196.23	Horizontal	-45.39	-13.00	Pass
1693.47	H	-39.20		
2397.39	H	-40.97		
3393.90	H	-32.23		
5079.60	H	---		
5926.20	H	---		

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.


Test mode:	UMTS 1900 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-37.08	-13.00	Pass
2479.20	V	-30.74		
3305.34	V	-27.62		
4132.00	V	-30.28		
4958.40	V	---		
5784.80	V	---		
1652.80	Horizontal	-30.69	-13.00	Pass
2440.73	H	-34.67		
3305.34	H	-45.26		
4132.00	H	-32.28		
4958.40	H	---		
5784.80	H	---		
Test mode:	UMTS 1900 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1672.00	Vertical	-32.98	-13.00	Pass
2508.00	V	-39.60		
3758.84	V	-43.72		
4183.00	V	-34.64		
5016.00	V	---		
5852.00	V	---		
1672.00	Horizontal	-39.20	-13.00	Pass
2393.09	H	-42.16		
3758.84	H	-34.69		
4183.00	H	-34.14		
5016.00	H	---		
5852.00	H	---		

Test mode:	UMTS 1900 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-35.65	-13.00	Pass
2436.36	V	-30.26		
3386.40	V	-40.62		
4233.00	V	-40.72		
5079.60	V	---		
5926.20	V	---		
1693.20	Horizontal	-26.52	-13.00	Pass
2436.36	H	-28.61		
3386.40	H	-30.86		
4233.00	H	-36.45		
5079.60	H	---		
5926.20	H	---		

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

7.7 Frequency stability V.S. Temperature measurement

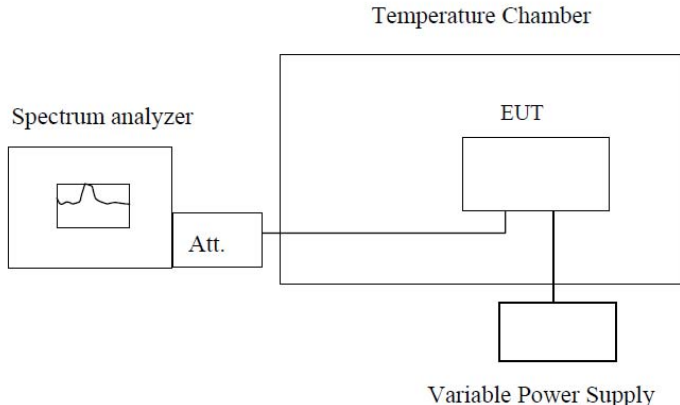Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Reference Frequency: GSM850 Lowest channel=128 channel=824.2MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	48	0.058238	2.5	Pass
	-20	55	0.066731		
	-10	42	0.050959		
	0	35	0.042465		
	10	43	0.052172		
	20	31	0.037612		
	30	46	0.055812		
	40	36	0.043679		
	50	40	0.048532		
Reference Frequency: PCS1900 Lowest channel=512 channel=1850.2MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error			Result
		Hz	ppm		
3.70	-30	40	0.021619	2.5	Pass
	-20	45	0.024322		
	-10	35	0.018917		
	0	33	0.017836		
	10	40	0.021619		
	20	36	0.019457		
	30	38	0.020538		
	40	45	0.024322		
	50	46	0.024862		

Reference Frequency: UMTS850 12.2k RMC Lowest channel=4132 channel=826.4MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	34	0.041142	2.5	Pass
	-20	45	0.054453		
	-10	23	0.027831		
	0	30	0.036302		
	10	45	0.054453		
	20	46	0.055663		
	30	35	0.042352		
	40	38	0.045982		
	50	42	0.050823		
Reference Frequency: UMTS1900 12.2k RMC Lowest channel=9262 channel=1852.4MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	36	0.019434	2.5	Pass
	-20	45	0.024293		
	-10	26	0.014036		
	0	40	0.021594		
	10	43	0.023213		
	20	42	0.022673		
	30	38	0.020514		
	40	40	0.021594		
	50	36	0.019434		

Reference Frequency: UMTS850 HSDPA Lowest channel=4132 channel=826.4MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	30	0.036302	2.5	Pass
	-20	40	0.048403		
	-10	25	0.030252		
	0	43	0.052033		
	10	45	0.054453		
	20	42	0.050823		
	30	31	0.037512		
	40	40	0.048403		
	50	46	0.055663		
Reference Frequency: UMTS1900 HSDPA Lowest channel=9262 channel=1852.4MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	38	0.020514	2.5	Pass
	-20	52	0.028072		
	-10	35	0.018894		
	0	30	0.016195		
	10	46	0.024833		
	20	45	0.024293		
	30	35	0.018894		
	40	40	0.021594		
	50	45	0.024293		

Reference Frequency: UMTS850 HSUPA Lowest channel=4132 channel=826.4MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	35	0.042352	2.5	Pass
	-20	45	0.054453		
	-10	35	0.042352		
	0	38	0.045983		
	10	40	0.048403		
	20	49	0.059293		
	30	35	0.042352		
	40	43	0.052033		
	50	48	0.058083		
Reference Frequency: UMTS1900 HSUPA Lowest channel=9262 channel=1852.4MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	35	0.018894	2.5	Pass
	-20	40	0.021594		
	-10	35	0.018894		
	0	30	0.016195		
	10	48	0.025912		
	20	45	0.024293		
	30	35	0.018894		
	40	46	0.024833		
	50	47	0.025372		

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	40	0.047813	2.5	Pass
	-20	56	0.066938		
	-10	39	0.046617		
	0	40	0.047813		
	10	45	0.053789		
	20	47	0.056180		
	30	40	0.047813		
	40	43	0.051399		
	50	38	0.045422		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error			Result
		Hz	ppm		
3.70	-30	45	0.023936	2.5	Pass
	-20	40	0.021277		
	-10	38	0.020213		
	0	35	0.018617		
	10	30	0.015957		
	20	37	0.019681		
	30	31	0.016489		
	40	45	0.023936		
	50	41	0.021809		

Reference Frequency: UMTS850 12.2k RMC Middle channel=4183 channel=836MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	48	0.057416	2.5	Pass
	-20	42	0.050239		
	-10	40	0.047847		
	0	38	0.045455		
	10	49	0.058612		
	20	45	0.053828		
	30	34	0.040670		
	40	48	0.057416		
	50	46	0.055024		
Reference Frequency: UMTS1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	38	0.020213	2.5	Pass
	-20	50	0.026596		
	-10	41	0.021809		
	0	40	0.021277		
	10	50	0.026596		
	20	47	0.025000		
	30	28	0.014894		
	40	38	0.020213		
	50	40	0.021277		

Reference Frequency: UMTS850 HSDPA Middle channel=4183 channel=836MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	40	0.047847	2.5	Pass
	-20	50	0.059809		
	-10	43	0.051435		
	0	42	0.050239		
	10	48	0.057416		
	20	35	0.041866		
	30	30	0.035885		
	40	41	0.049043		
	50	42	0.050239		
Reference Frequency: UMTS1900 HSDPA Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	41	0.021809	2.5	Pass
	-20	50	0.026596		
	-10	48	0.025532		
	0	38	0.020213		
	10	50	0.026596		
	20	41	0.021809		
	30	38	0.020213		
	40	46	0.024468		
	50	38	0.020213		

Reference Frequency: UMTS850 HSUPA Middle channel=4183 channel=836MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	41	0.049043	2.5	Pass
	-20	50	0.059809		
	-10	38	0.045455		
	0	30	0.035885		
	10	51	0.061005		
	20	43	0.051435		
	30	35	0.041866		
	40	40	0.047847		
	50	38	0.045455		
Reference Frequency: UMTS1900 HSUPA Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	46	0.024468	2.5	Pass
	-20	40	0.021277		
	-10	33	0.017553		
	0	36	0.019149		
	10	42	0.022340		
	20	40	0.021277		
	30	35	0.018617		
	40	40	0.021277		
	50	38	0.020213		


Reference Frequency: GSM850 Highest channel=251 channel=848.8 MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	30	0.035344	2.5	Pass
	-20	59	0.069510		
	-10	30	0.035344		
	0	41	0.048303		
	10	30	0.035344		
	20	34	0.040057		
	30	35	0.041235		
	40	31	0.036522		
	50	27	0.031810		
Reference Frequency: PCS1900 Highest channel=810 channel=1909.8MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error			Result
		Hz	ppm		
3.70	-30	32	0.016756	2.5	Pass
	-20	45	0.023563		
	-10	40	0.020945		
	0	40	0.020945		
	10	34	0.017803		
	20	30	0.015708		
	30	35	0.018327		
	40	36	0.018850		
	50	28	0.014661		

Reference Frequency: UMTS 850 12.2k RMC Highest channel=4233 channel=846.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	34	0.040161	2.5	Pass
	-20	48	0.056697		
	-10	35	0.041342		
	0	41	0.048429		
	10	38	0.044885		
	20	42	0.049610		
	30	30	0.035436		
	40	38	0.044885		
	50	35	0.041342		
Reference Frequency: UMTS 190012.2k RMC Highest channel=9538 channel=1907.60MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	30	0.015727	2.5	Pass
	-20	40	0.020969		
	-10	42	0.022017		
	0	38	0.019920		
	10	40	0.020969		
	20	50	0.026211		
	30	55	0.028832		
	40	34	0.017823		
	50	37	0.019396		

Reference Frequency: UMTS 850 HSDPA Highest channel=4233 channel=846.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	35	0.041342	2.5	Pass
	-20	42	0.049610		
	-10	38	0.044885		
	0	50	0.059060		
	10	40	0.047248		
	20	47	0.055516		
	30	35	0.041342		
	40	34	0.040161		
	50	38	0.044885		
Reference Frequency: UMTS 1900 HSDPA Highest channel=9538 channel=1907.60MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	34	0.017823	2.5	Pass
	-20	36	0.018872		
	-10	40	0.020969		
	0	43	0.022541		
	10	39	0.020445		
	20	41	0.021493		
	30	38	0.019920		
	40	48	0.025163		
	50	39	0.020445		

Reference Frequency: UMTS 850 HSUPA Highest channel=4233 channel=846.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	35	0.041342	2.5	Pass
	-20	40	0.047248		
	-10	43	0.050791		
	0	45	0.053154		
	10	47	0.055516		
	20	40	0.047248		
	30	35	0.041342		
	40	38	0.044885		
	50	36	0.042523		
Reference Frequency: UMTS 1900 HSUPA Highest channel=9538 channel=1907.60MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	30	0.015727	2.5	Pass
	-20	34	0.017823		
	-10	40	0.020969		
	0	44	0.023066		
	10	38	0.019920		
	20	45	0.023590		
	30	36	0.018872		
	40	40	0.020969		
	50	35	0.018348		

7.8 Frequency stability V.S. Voltage measurement

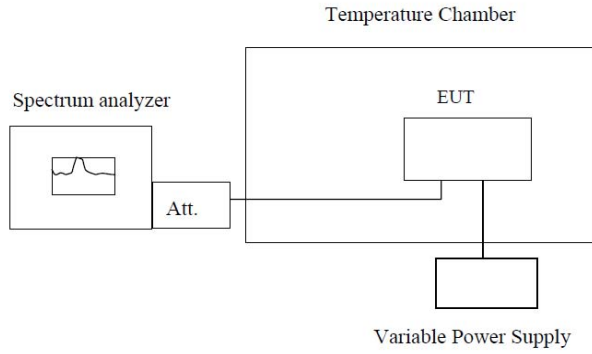Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Reference Frequency: GSM850 Lowest channel=128 channel=824.2MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	36	0.043679	2.5	Pass
	3.70	35	0.042465		
	3.40	33	0.040039		
Reference Frequency: PCS1900 Lowest channel=512 channel=1850.2MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	55	0.030468	2.5	Pass
	3.70	36	0.019942		
	3.40	40	0.022158		
Reference Frequency: UMTS 850 12.2k RMC Lowest channel=4132 channel=826.4MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	46	0.055663	2.5	Pass
	3.70	40	0.048403		
	3.40	39	0.047193		
Reference Frequency: UMTS 1900 12.2k RMC Lowest channel=9262 channel=1852.40MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	48	0.025912	2.5	Pass
	3.70	33	0.017815		
	3.40	40	0.021594		

Reference Frequency: UMTS 850 HSDPA Lowest channel=4132 channel=826.4MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	48	0.058083	2.5	Pass
	3.70	33	0.039932		
	3.40	35	0.042352		
Reference Frequency: UMTS 1900 HSDPA Lowest channel=9262 channel=1852.40MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	54	0.029151	2.5	Pass
	3.70	38	0.020514		
	3.40	40	0.021594		
Reference Frequency: UMTS 850 HSUPA Lowest channel=4132 channel=826.4MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	48	0.058083	2.5	Pass
	3.70	36	0.043562		
	3.40	34	0.041142		
Reference Frequency: UMTS 1900 HSUPA Lowest channel=9262 channel=1852.40MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	41	0.022133	2.5	Pass
	3.70	35	0.018894		
	3.40	36	0.019434		

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	40	0.047813	2.5	Pass
	3.70	38	0.045422		
	3.40	45	0.053789		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	47	0.025000	2.5	Pass
	3.70	58	0.030851		
	3.40	46	0.024468		
Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	35	0.041866	2.5	Pass
	3.70	47	0.056220		
	3.40	38	0.045455		
Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	47	0.025000	2.5	Pass
	3.70	50	0.026596		
	3.40	39	0.020745		

Reference Frequency: UMTS 850 HSDPA Middle channel=4183 channel=836MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	40	0.047847	2.5	Pass
	3.70	38	0.045455		
	3.40	39	0.046651		
Reference Frequency: UMTS 1900 HSDPA Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	45	0.002261	2.5	Pass
	3.70	47	0.001968		
	3.40	38	0.001809		
Reference Frequency: UMTS 850 HSUPA Middle channel=4183 channel=836MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	38	0.045455	2.5	Pass
	3.70	46	0.055024		
	3.40	38	0.045455		
Reference Frequency: UMTS 1900 HSUPA Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	45	0.023936	2.5	Pass
	3.70	43	0.022872		
	3.40	35	0.018617		

Reference Frequency: GSM850 Highest channel=251 channel=848.8MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	36	0.042413	2.5	Pass
	3.70	38	0.044769		
	3.40	45	0.053016		
Reference Frequency: PCS1900 Highest channel=810 channel=1909.8MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	36	0.018850	2.5	Pass
	3.70	54	0.028275		
	3.40	40	0.020945		
Reference Frequency: 12.2k RMC UMTS 850 12.2k RMC Highest channel=4233 channel=846.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	46	0.054335	2.5	Pass
	3.70	38	0.044885		
	3.40	47	0.055516		
Reference Frequency: UMTS 1900 12.2k RMC Highest channel=9538 channel=1907.60MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	38	0.019920	2.5	Pass
	3.70	37	0.019396		
	3.40	40	0.020969		

Reference Frequency: UMTS 850 HSDPA Highest channel=4233 channel=846.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	46	0.054335	2.5	Pass
	3.70	43	0.050791		
	3.40	38	0.044885		
Reference Frequency: UMTS 1900 HSDPA Highest channel=9538 channel=1907.60MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	35	0.018348	2.5	Pass
	3.70	37	0.019396		
	3.40	40	0.020969		
Reference Frequency: UMTS 850 HSUPA Highest channel=4233 channel=846.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	46	0.054335	2.5	Pass
	3.70	48	0.056697		
	3.40	35	0.041342		
Reference Frequency: UMTS 1900 HSUPA Highest channel=9538 channel=1907.60MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	37	0.019396	2.5	Pass
	3.70	40	0.020969		
	3.40	39	0.020445		