

EMC TEST REPORT



Report No.: 15070965-FCC-E

Supersede Report No.:N/A

Applicant	AZUMI S.A	
Product Name	Mobile phone	
Model No.	L3GA Lite	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2014	
Test Date	October 22 to December 08, 2015	
Issue Date	December 24, 2015	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
<i>Winnie Zhang</i>	<i>David Huang</i>	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15070965-FCC-E
Page	3 of 30

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS.....	15
ANNEX A. TEST INSTRUMENT.....	20
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	21
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	26
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	29
ANNEX E. DECLARATION OF SIMILARITY	30

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070965-FCC-E	NONE	Original	December 08,2015
15070965-FCC-E	V1	Change EUT Photos	December 19, 2015
15070965-FCC-E	V2	Delete calibration date	December 24, 2015

2. Customer information

Applicant Name	AZUMI S.A
Applicant Add	Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep. Panamá
Manufacturer	Shenzhen Haierhea Telecom Co.,Ltd.
Manufacturer Add	Room 418,Block M-3,Middle of Hi-Tech Park,Nanshan,Shenzhen,China 518057

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Description of EUT:	Mobile phone
Main Model:	L3GA Lite
Serial Model:	N/A
Antenna Gain:	GSM850: -3dBi PCS1900: -3 dBi UMTS-FDD Band V: -3 dBi UMTS-FDD Band II: -3 dBi Bluetooth: -1 dBi GPS:-1 dBi
Input Power:	Adapter: Model: L3GA Lite Input: AC 100-240V; 50/60Hz;0.2A Output: DC 5.0V,500mA Battery: Model: L3GA Lite Spec:3.7V,600mAh,2.22Wh
Equipment Category :	JBP
Type of Modulation:	GSM / GPRS: GMSK UMTS-FDD: QPSK, 16QAM Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz Bluetooth: 2402-2480 MHz GPS RX:1575.42 MHz

Test Report	15070965-FCC-E
Page	7 of 30

Number of Channels: GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V : 102CH
UMTS-FDD Band II : 277CH
Bluetooth: 79CH
GPS:1CH

Port: Power Port, Earphone Port, USB Port

Trade Name : AZUMI

FCC ID: QRP-AZUMIL3GALITE

Date EUT received: October 21, 2015

Test Date(s): October 22 to December 03, 2015

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	28°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	November 28, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.															
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	
Frequency ranges (MHz)	Limit (dBµV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

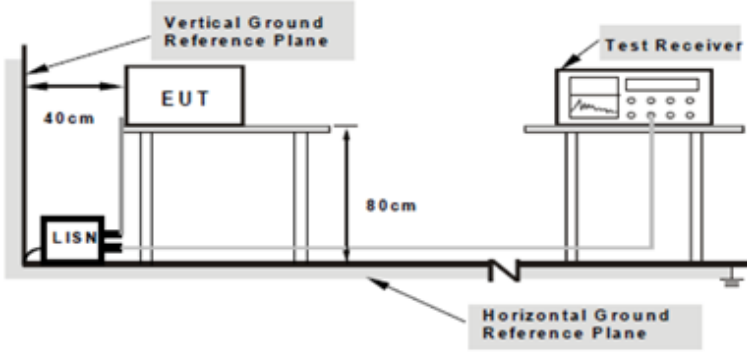Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains.
-----------	--


Test Report	15070965-FCC-E
Page	10 of 30

	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode : USB Mode

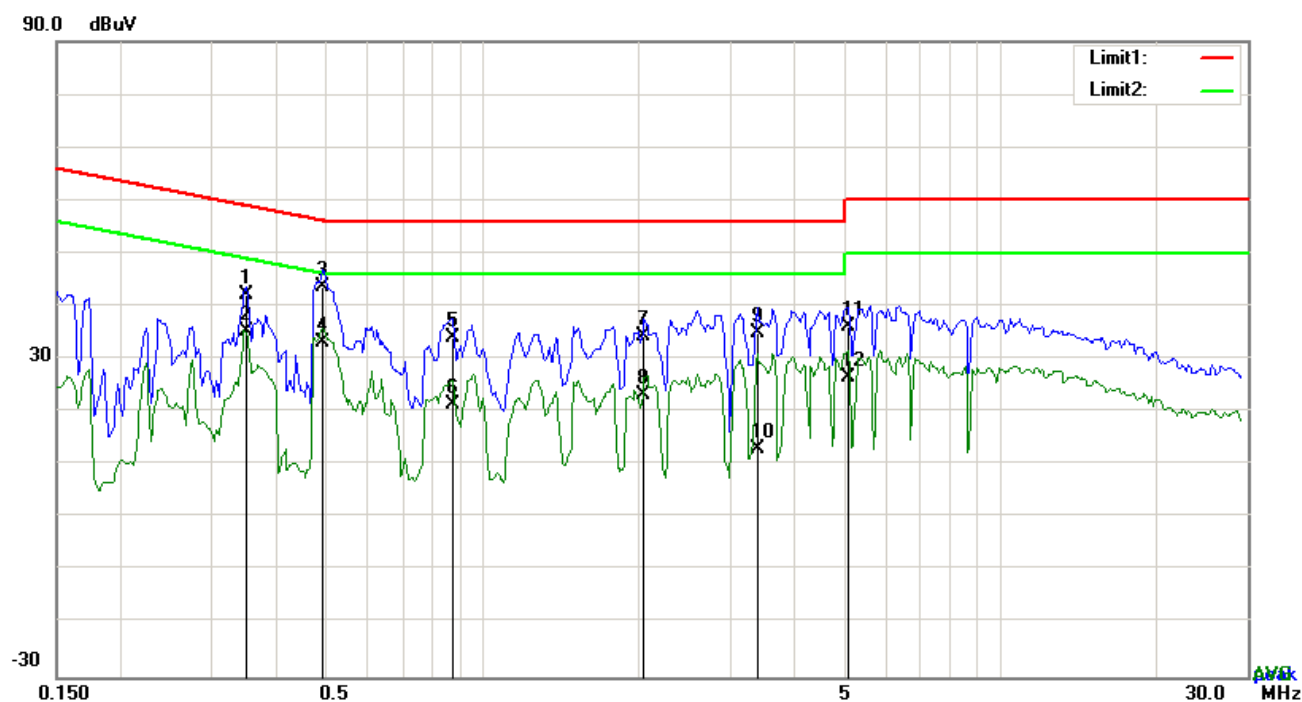


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.3489	32.25	QP	10.03	42.28	58.99	-16.71
2	L1	0.3489	25.22	AVG	10.03	35.25	48.99	-13.74
3	L1	0.4893	33.53	QP	10.03	43.56	56.18	-12.62
4	L1	0.4893	23.04	AVG	10.03	33.07	46.18	-13.11
5	L1	0.8754	23.88	QP	10.03	33.91	56.00	-22.09
6	L1	0.8754	11.48	AVG	10.03	21.51	46.00	-24.49
7	L1	2.0493	24.26	QP	10.04	34.30	56.00	-21.70
8	L1	2.0493	13.15	AVG	10.04	23.19	46.00	-22.81
9	L1	3.3861	24.99	QP	10.06	35.05	56.00	-20.95
10	L1	3.3861	3.01	AVG	10.06	13.07	46.00	-32.93
11	L1	5.0631	26.14	QP	10.08	36.22	60.00	-23.78
12	L1	5.0631	16.39	AVG	10.08	26.47	50.00	-23.53

Test Mode : USB Mode

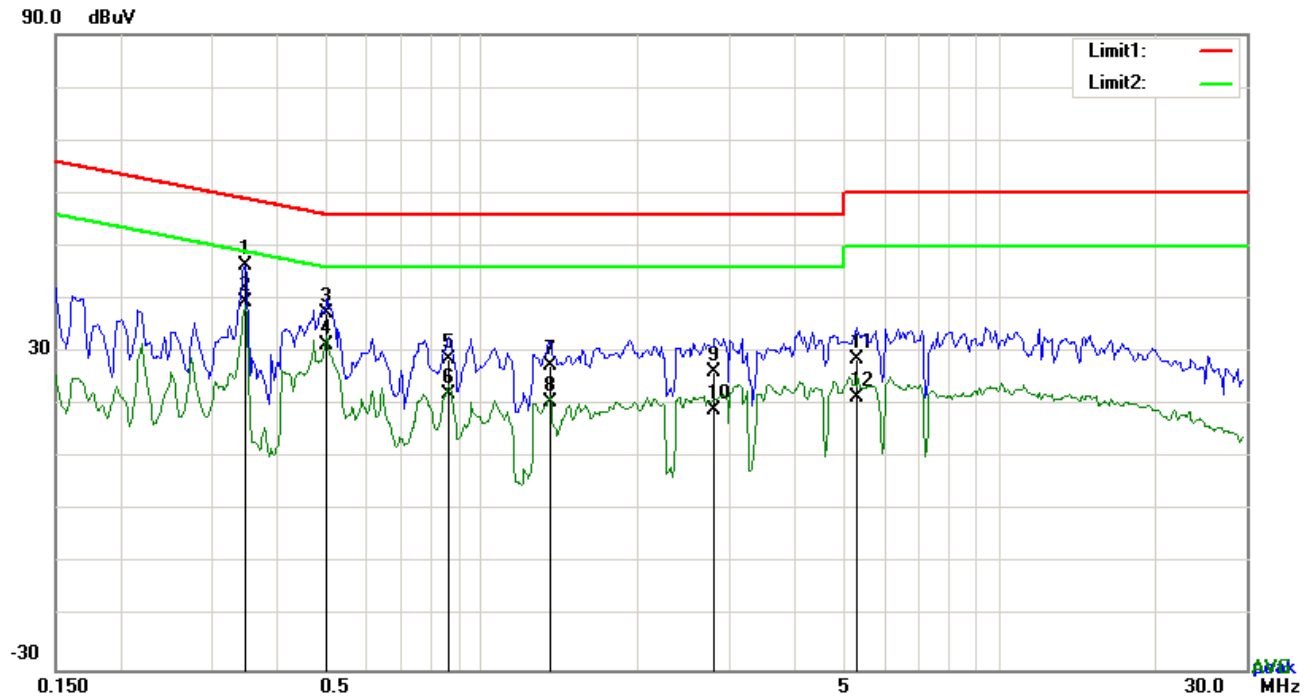


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.3489	36.32	QP	10.02	46.34	58.99	-12.65
2	N	0.3489	29.38	AVG	10.02	39.40	48.99	-9.59
3	N	0.5010	27.44	QP	10.02	37.46	56.00	-18.54
4	N	0.5010	21.37	AVG	10.02	31.39	46.00	-14.61
5	N	0.8637	18.72	QP	10.03	28.75	56.00	-27.25
6	N	0.8637	12.14	AVG	10.03	22.17	46.00	-23.83
7	N	1.3551	17.38	QP	10.03	27.41	56.00	-28.59
8	N	1.3551	10.38	AVG	10.03	20.41	46.00	-25.59
9	N	2.8137	16.26	QP	10.05	26.31	56.00	-29.69
10	N	2.8137	9.01	AVG	10.05	19.06	46.00	-26.94
11	N	5.2854	18.57	QP	10.07	28.64	60.00	-31.36
12	N	5.2854	11.30	AVG	10.07	21.37	50.00	-28.63

Test Mode : USB Mode

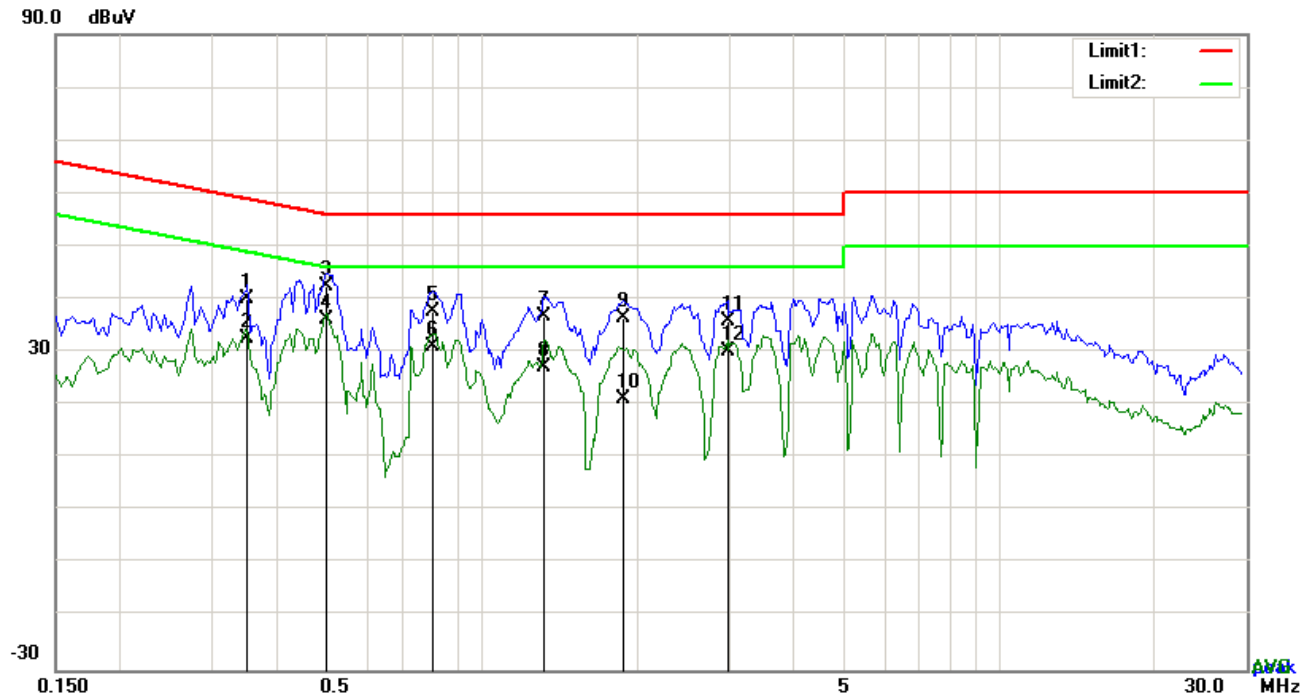


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.3528	29.97	QP	10.03	40.00	58.90	-18.90
2	L1	0.3528	22.44	AVG	10.03	32.47	48.90	-16.43
3	L1	0.5010	32.32	QP	10.03	42.35	56.00	-13.65
4	L1	0.5010	26.05	AVG	10.03	36.08	46.00	-9.92
5	L1	0.8013	27.71	QP	10.03	37.74	56.00	-18.26
6	L1	0.8013	20.99	AVG	10.03	31.02	46.00	-14.98
7	L1	1.3200	26.57	QP	10.03	36.60	56.00	-19.40
8	L1	1.3200	17.04	AVG	10.03	27.07	46.00	-18.93
9	L1	1.8738	26.30	QP	10.04	36.34	56.00	-19.66
10	L1	1.8738	11.18	AVG	10.04	21.22	46.00	-24.78
11	L1	2.9814	25.84	QP	10.05	35.89	56.00	-20.11
12	L1	2.9814	20.06	AVG	10.05	30.11	46.00	-15.89

Test Mode : USB Mode

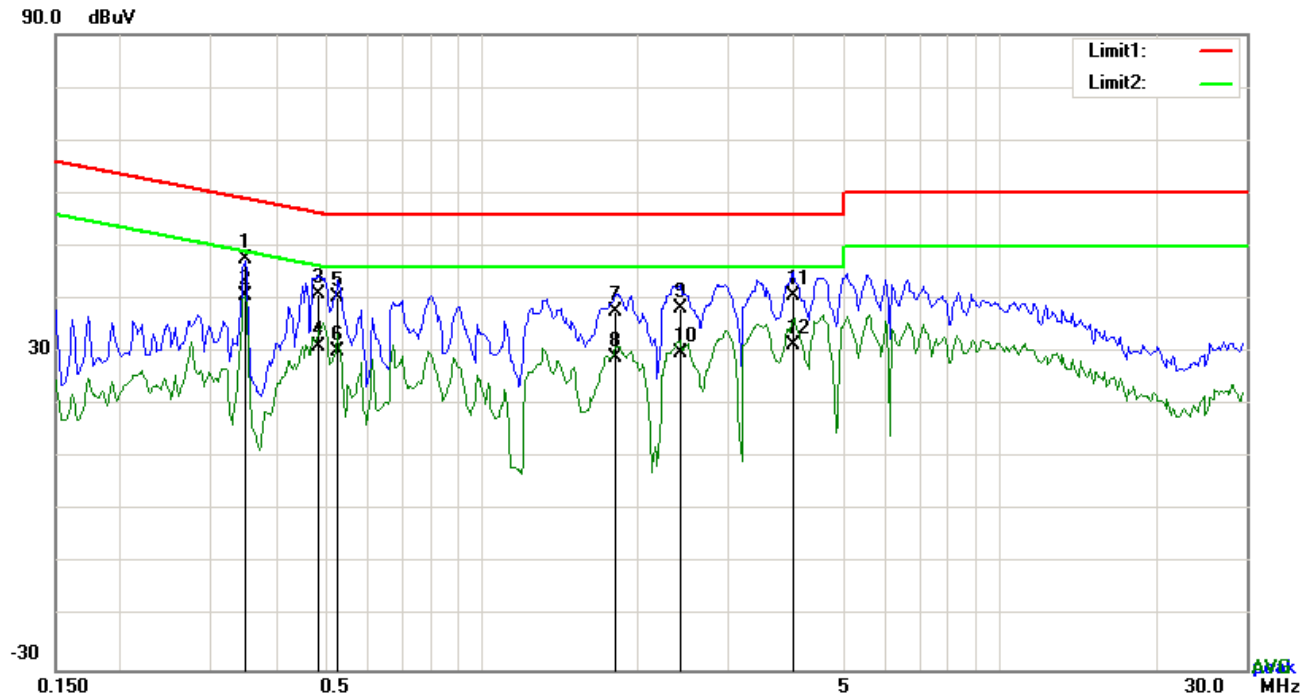

Test Data

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.3489	37.54	QP	10.02	47.56	58.99	-11.43
2	N	0.3489	30.57	AVG	10.02	40.59	48.99	-8.40
3	N	0.4815	30.79	QP	10.02	40.81	56.31	-15.50
4	N	0.4815	21.18	AVG	10.02	31.20	46.31	-15.11
5	N	0.5283	30.48	QP	10.02	40.50	56.00	-15.50
6	N	0.5283	20.05	AVG	10.02	30.07	46.00	-15.93
7	N	1.8153	27.47	QP	10.04	37.51	56.00	-18.49
8	N	1.8153	18.90	AVG	10.04	28.94	46.00	-17.06
9	N	2.4120	28.34	QP	10.04	38.38	56.00	-17.62
10	N	2.4120	19.72	AVG	10.04	29.76	46.00	-16.24
11	N	3.9867	30.68	QP	10.06	40.74	56.00	-15.26
12	N	3.9867	21.33	AVG	10.06	31.39	46.00	-14.61

6.2 Radiated Emissions

Temperature	28°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	November 28, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level
-----------	--

Test Report	15070965-FCC-E
Page	16 of 30


	over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode : USB Mode

Below 1GHz

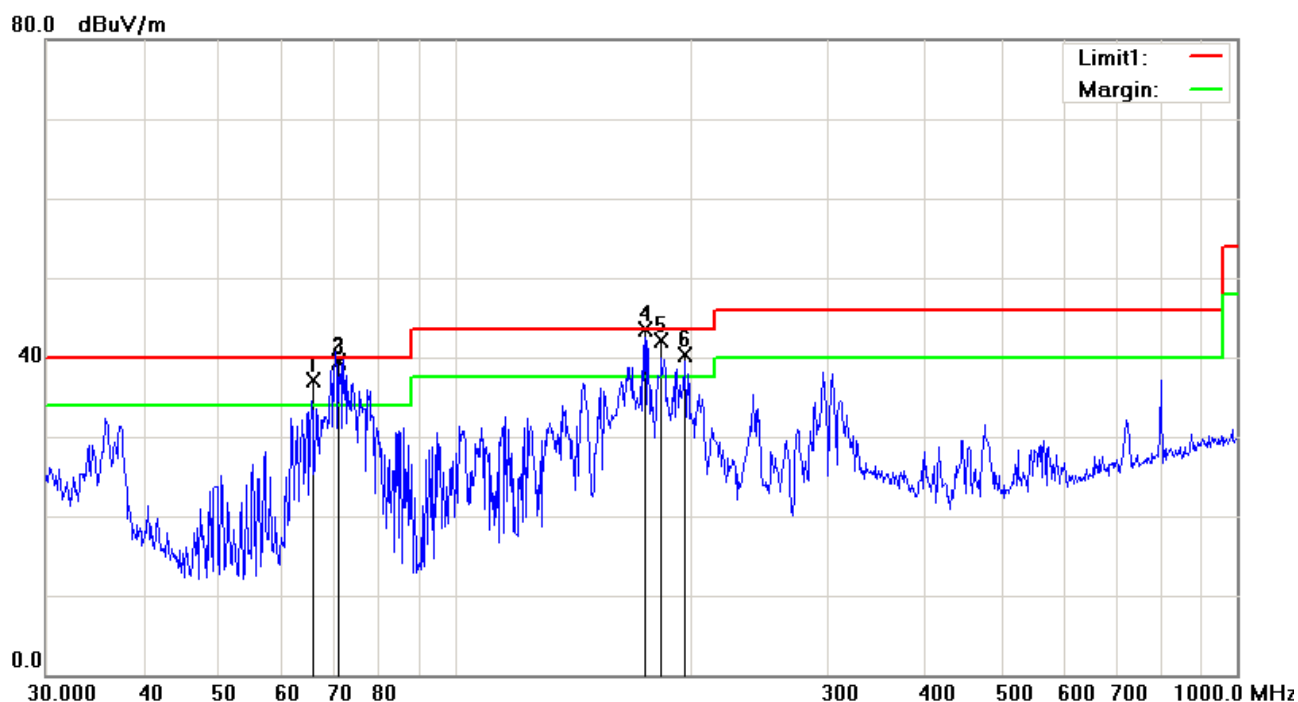


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	H	65.8085	50.96	QP	-13.90	37.06	40.00	-2.94	100	102
2	H	71.2511	53.23	QP	-13.65	39.58	40.00	-0.42	100	102
3	H	71.2516	52.94	QP	-13.65	39.29	40.00	-0.71	100	102
4	H	175.1627	52.98	QP	-9.50	43.48	43.50	-0.02	100	154
5	H	183.8700	51.80	QP	-9.64	42.16	43.50	-1.34	100	166
6	H	196.4508	49.23	QP	-8.92	40.31	43.50	-3.19	100	154

Below 1GHz

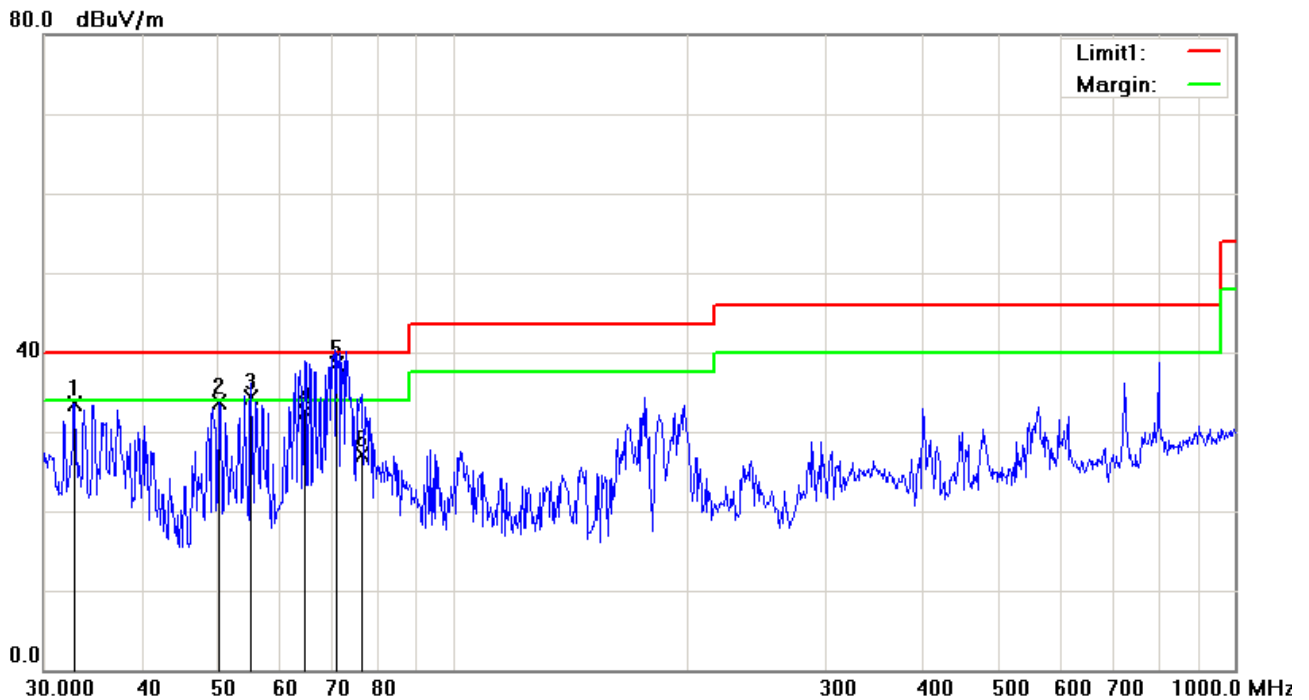

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	V	32.8637	35.92	peak	-2.37	33.55	40.00	-6.45	100	261
2	V	50.2325	46.82	peak	-13.21	33.61	40.00	-6.39	100	73
3	V	55.3126	48.02	QP	-13.80	34.22	40.00	-5.78	100	191
4	V	64.8352	46.44	QP	-13.98	32.46	40.00	-7.54	100	259
5	V	71.2509	52.18	QP	-13.65	38.53	40.00	-1.47	100	176
6	V	76.4502	40.82	QP	-13.75	27.07	40.00	-12.93	100	305

Above 1GHz

Frequency (MHz)	Amplitude (dBμV/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Limit (dBμV/m)	Margin (dB)	Detector (PK/AV)
1420.01	48.46	46	180	V	-21.23	74	-25.44	PK
2852.12	46.12	125	160	V	-22.75	74	-27.88	PK
1764.25	50.45	75	210	V	-23.12	74	-23.55	PK
2677.38	49.98	65	230	H	-23.33	74	-24.02	PK
2984.15	50.63	96	150	H	-22.86	74	-23.37	PK
2188.02	50.12	85	170	H	-22.46	74	-23.88	PK

Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to $5 \times 2480 \text{ MHz} = 12,400 \text{ MHz}$.

Note2: The frequency that above 3GHz is mainly from the environment noise.


Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	☒
Line Impedance Stabilization Network	LI-125A	191106	09/25/2015	09/24/2016	☒
Line Impedance Stabilization Network	LI-125A	191107	09/25/2015	09/24/2016	☒
LISN	ISN T800	34373	09/25/2015	09/24/2016	☒
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	☒
Double Ridge Horn Antenna	AH-118	71259	09/24/2015	09/23/2016	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

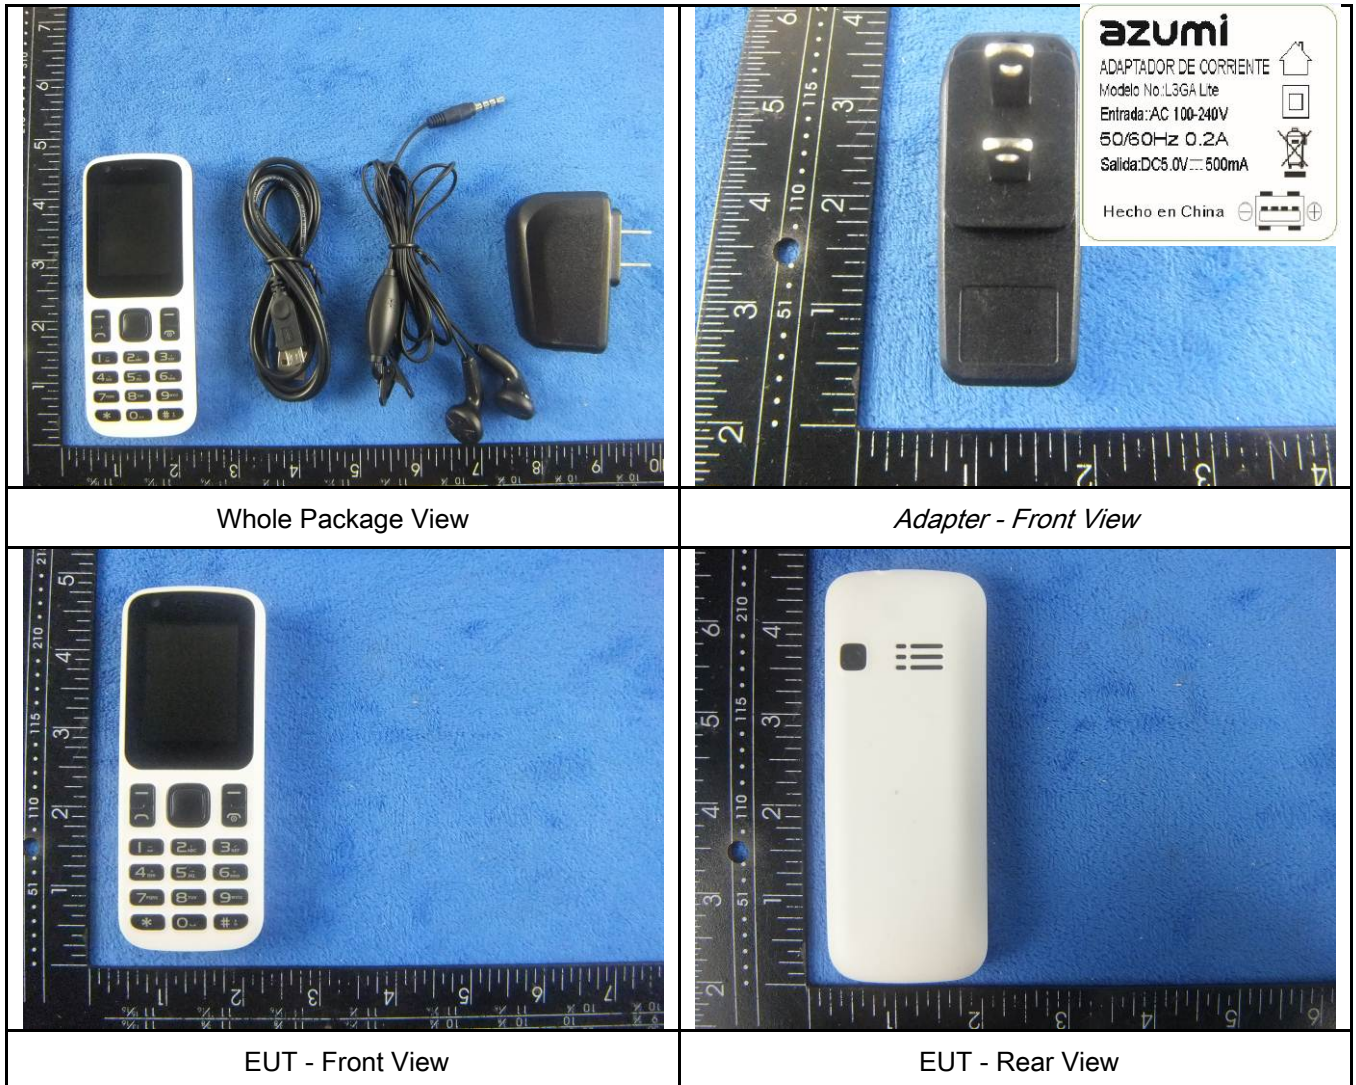



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo




Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View

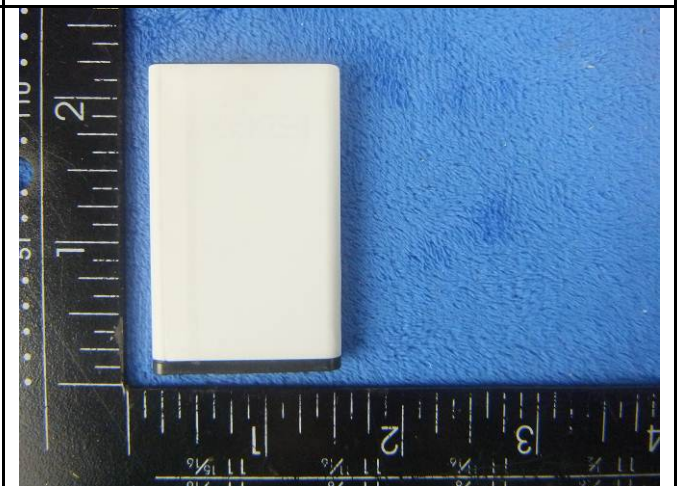


Battery - Rear View

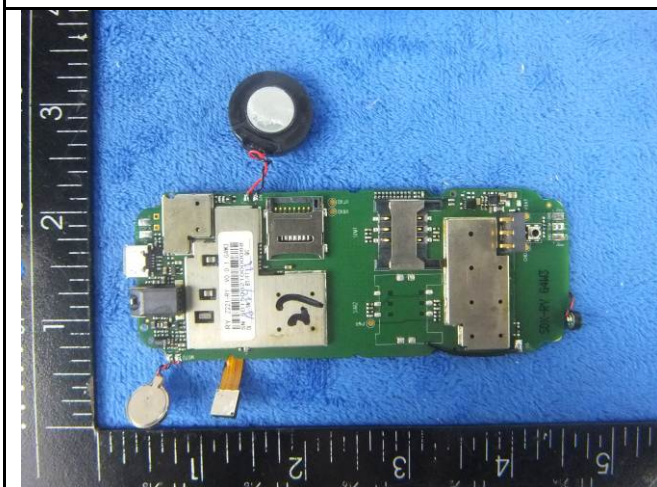


Mainboard with Shielding - Front View

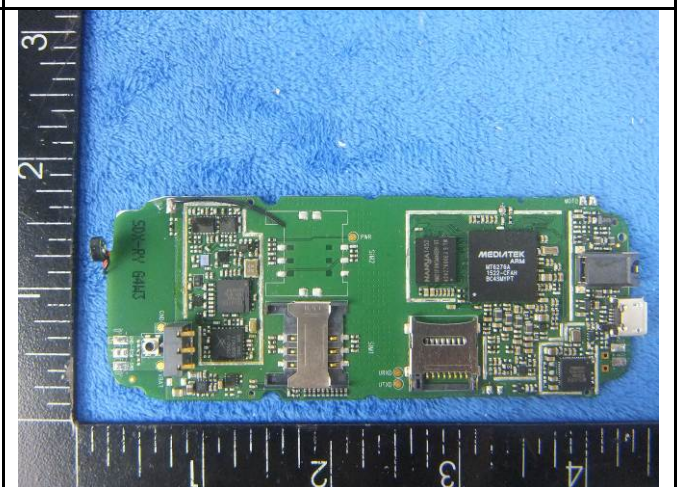


Mainboard without Shielding - Front View

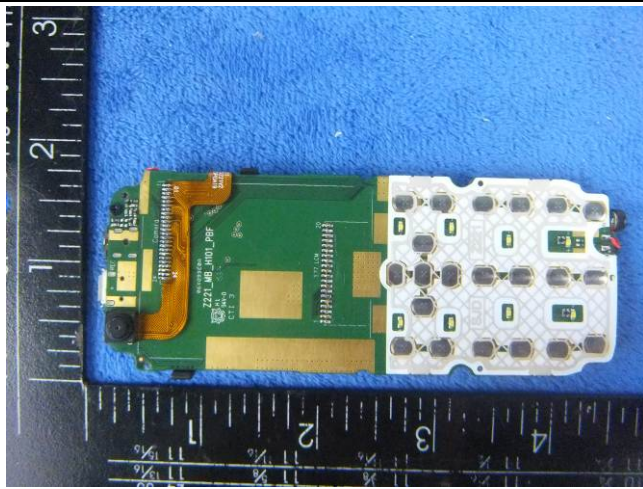

Mainboard – Rear View

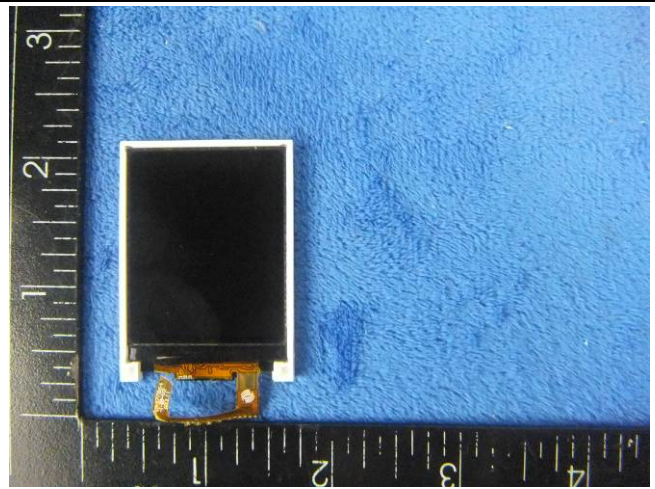


LCD – Front View

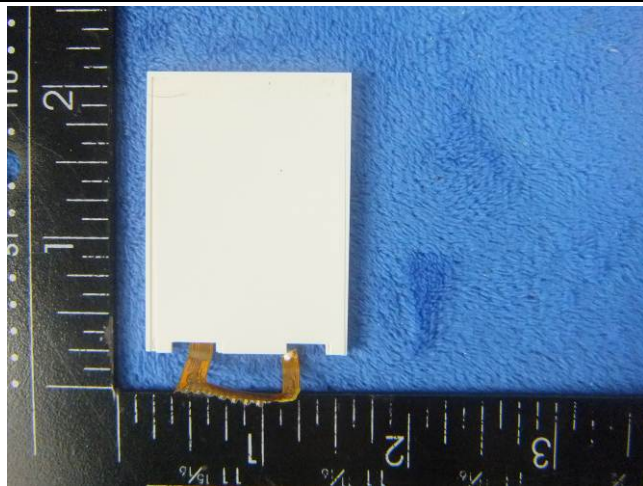

LCD – Rear View



GSM/PCS/UMTS-FDD Antenna View

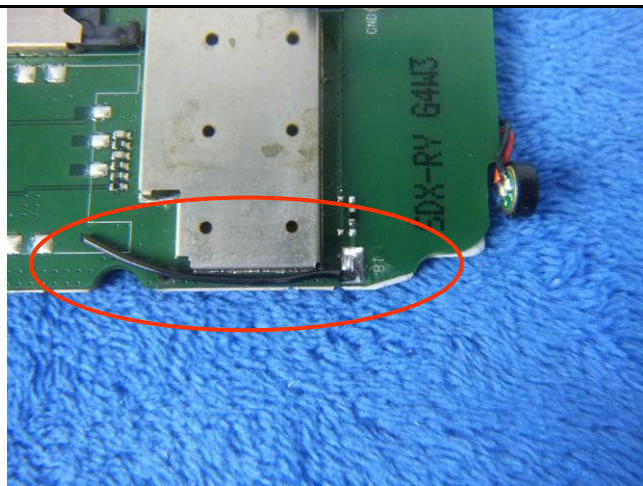

BT - Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

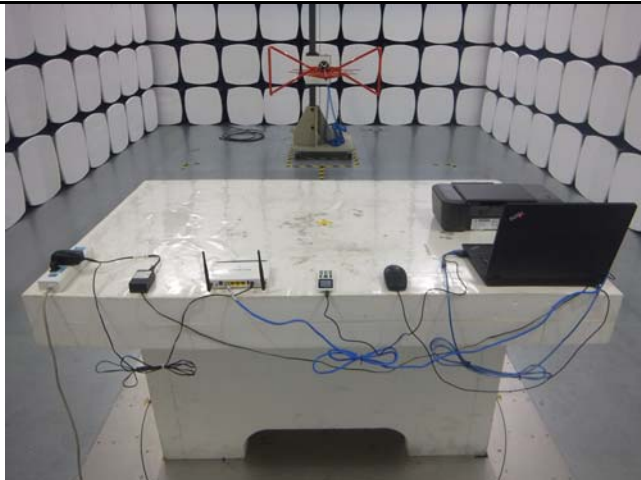

Radiated Emissions Test Setup Below 1GHz

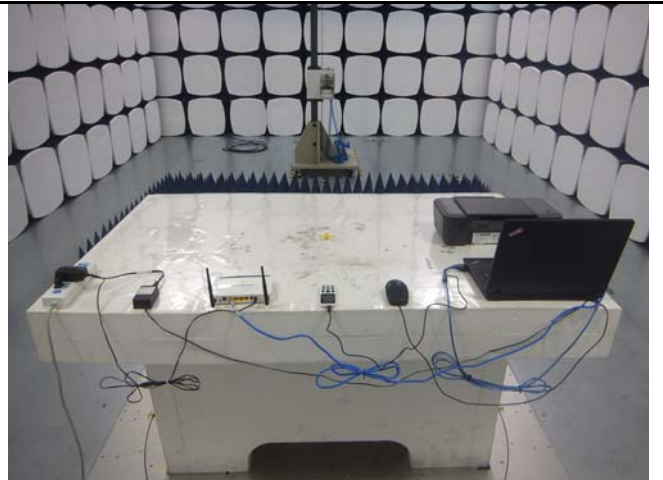


Radiated Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

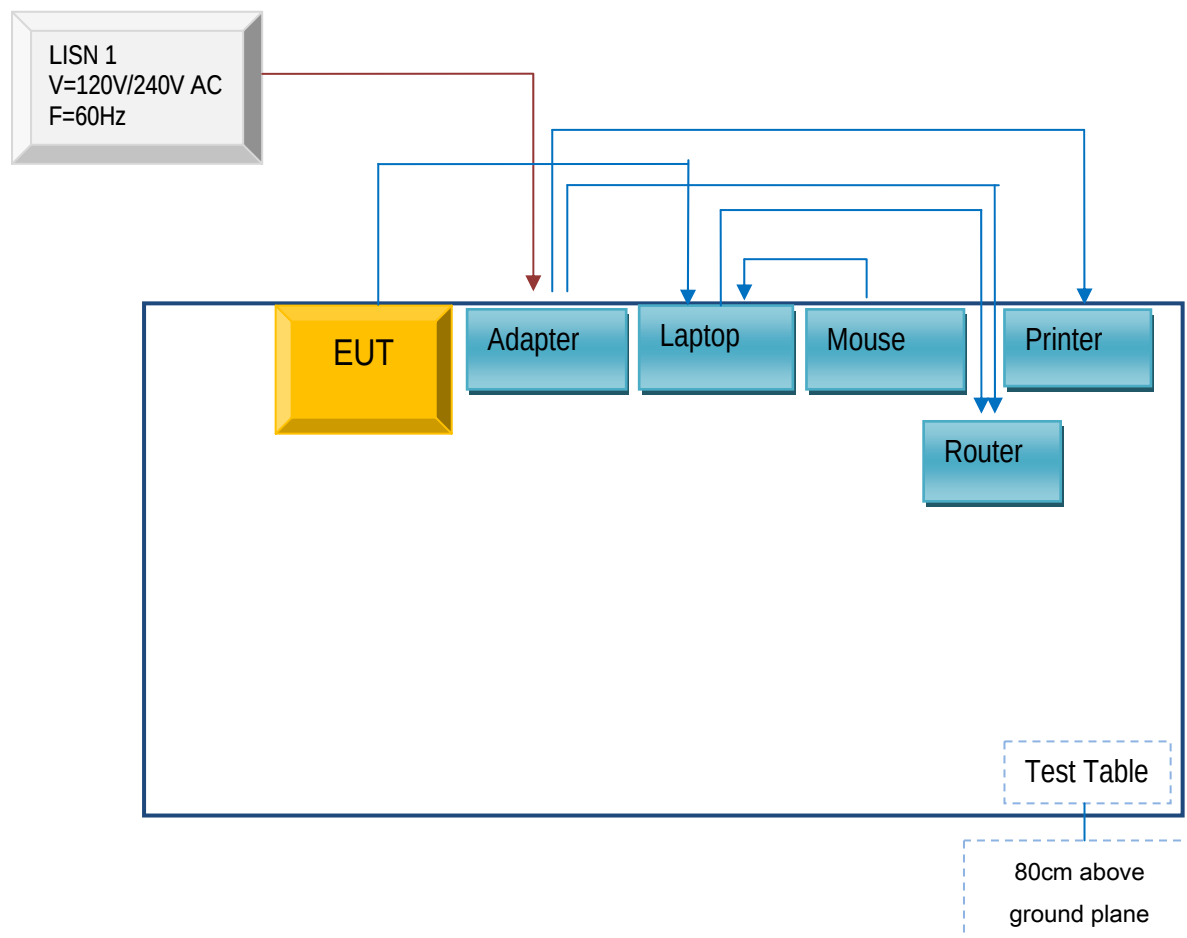

Block Configuration Diagram for Radiated Emissions

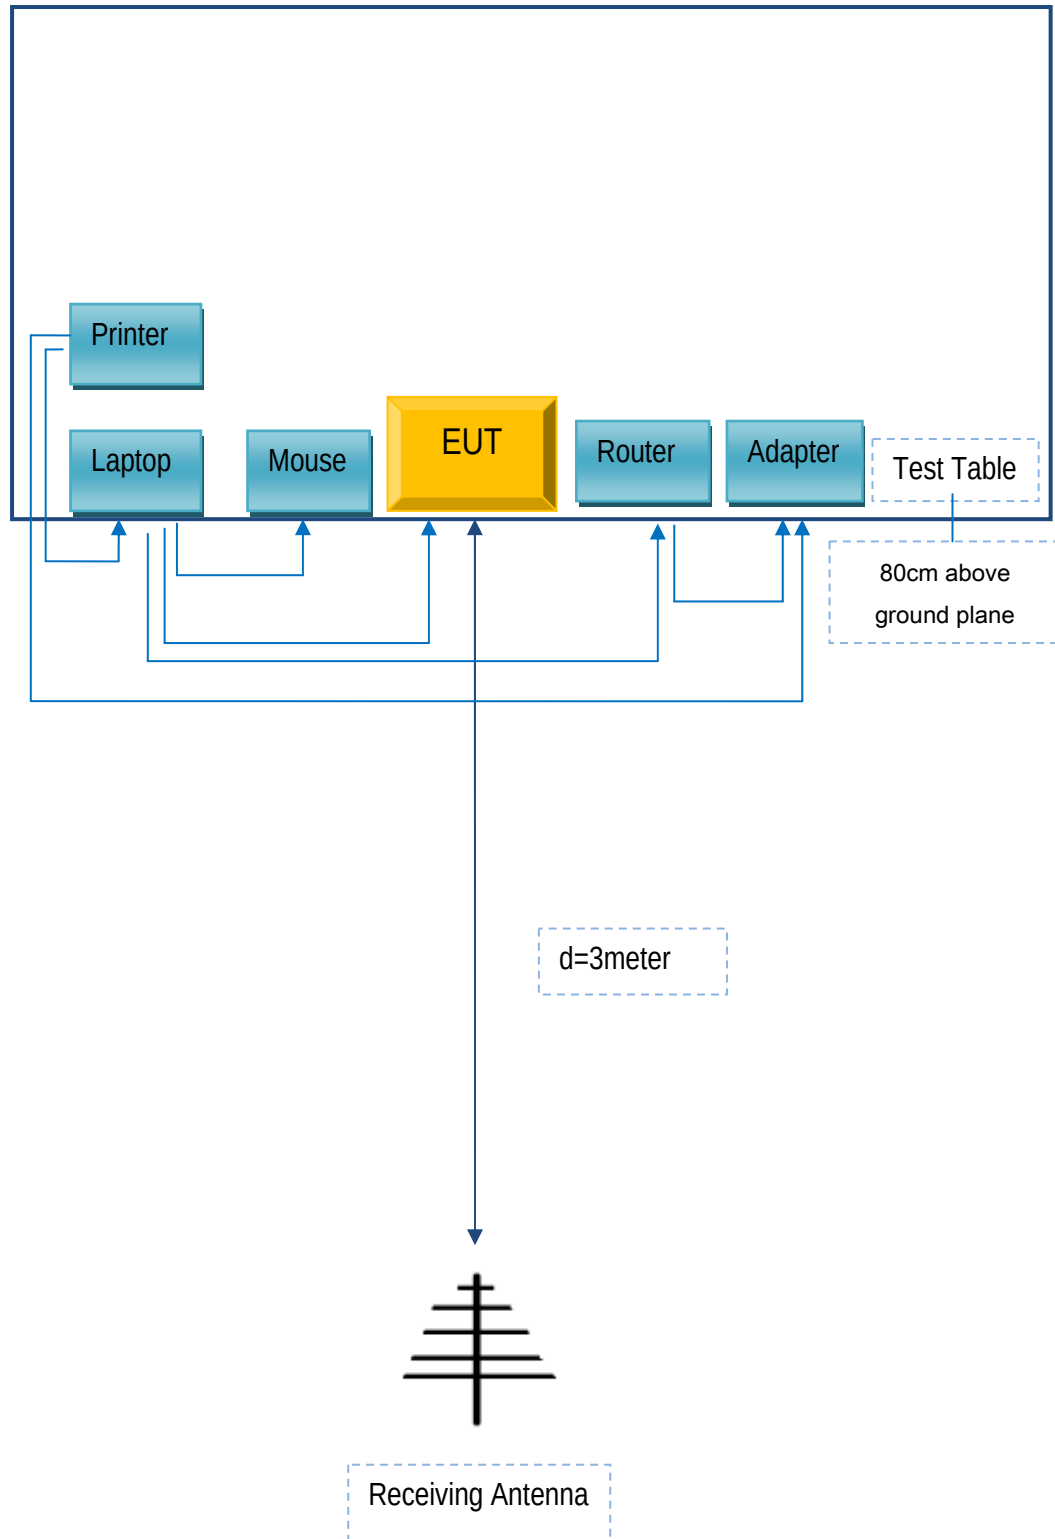

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
MACATE GROUP CORPORATION	Adapter	A88-502000	CN15020403

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
USB Cable	Un-shielding	No	0.8m	JX542214

Test Report	15070965-FCC-E
Page	29 of 30

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Test Report	15070965-FCC-E
Page	30 of 30

Annex E. DECLARATION OF SIMILARITY

N/A