


5.5.4. Test Setup Layout

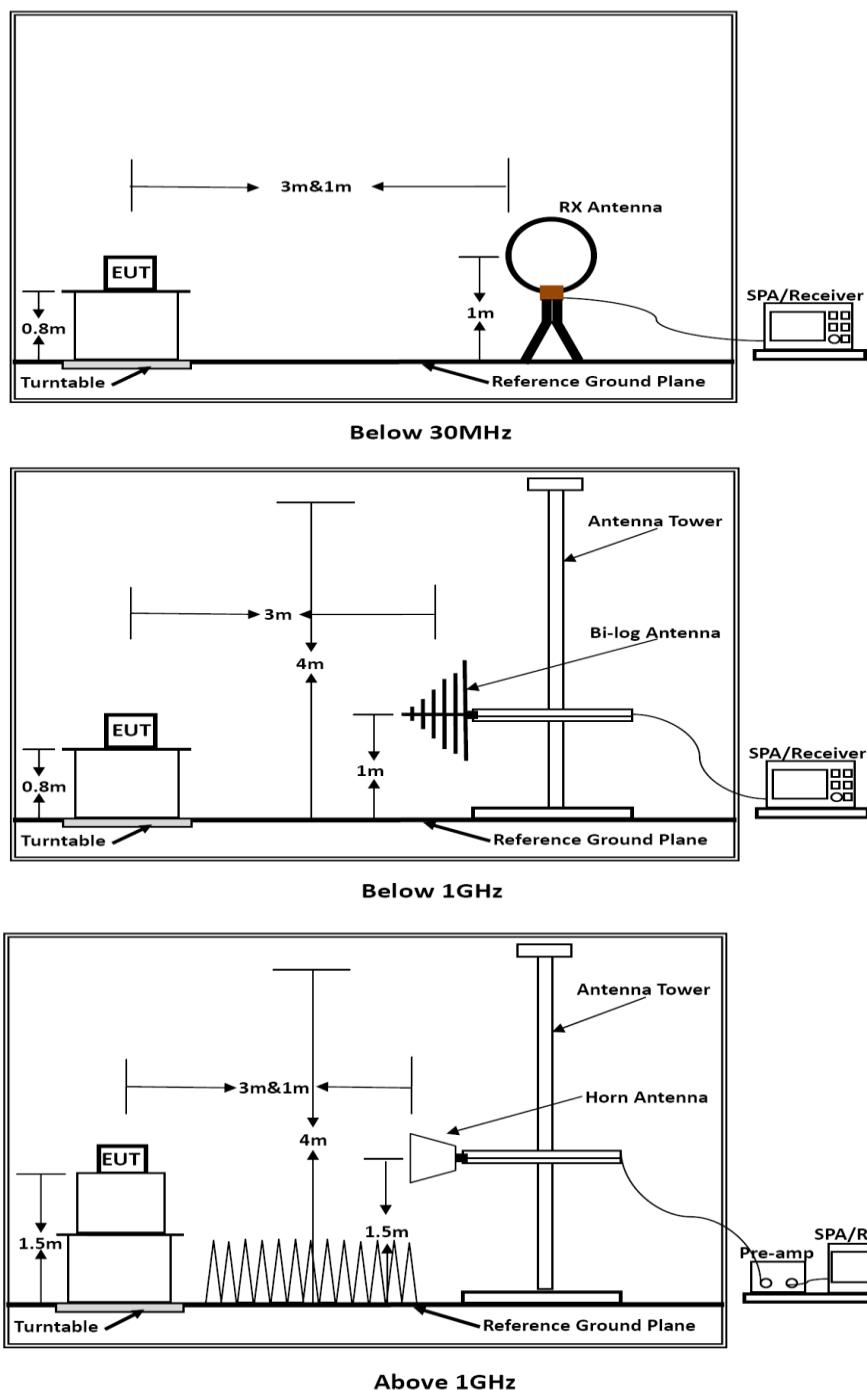

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Kyle.Yin	Configurations	IEEE 802.11b/g/n & BT LE

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Kyle.Yin	Configurations	IEEE 802.11b (High CH)

Test result for IEEE 802.11b (High Channel)

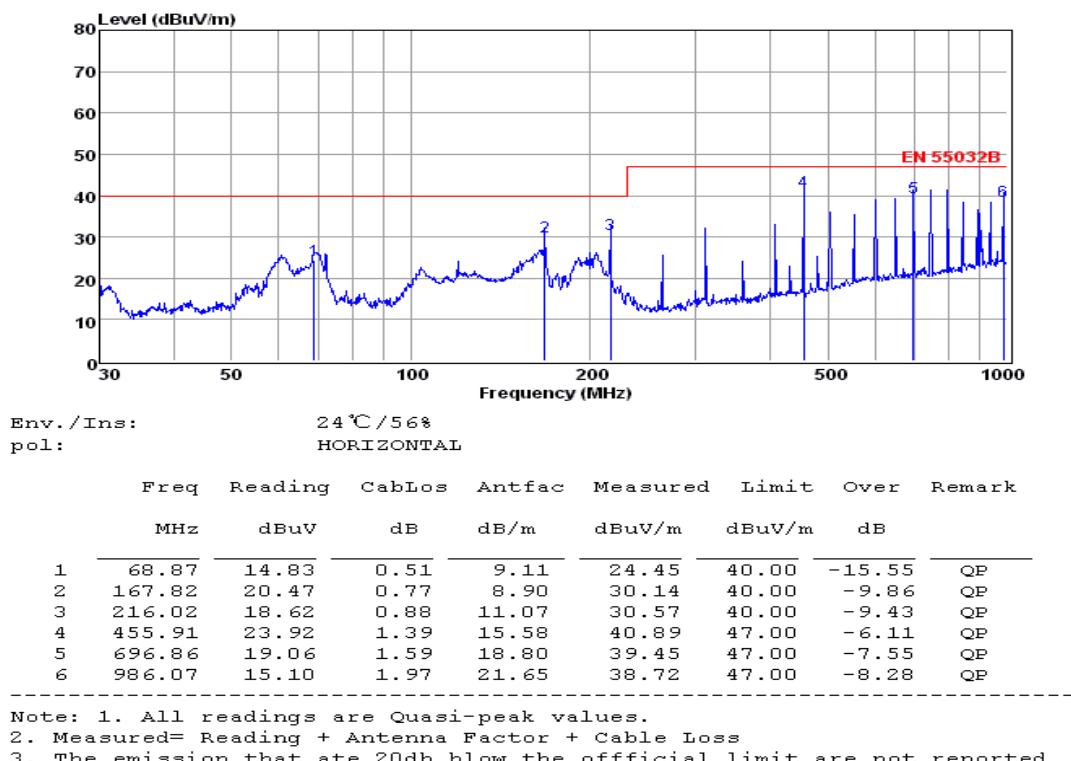

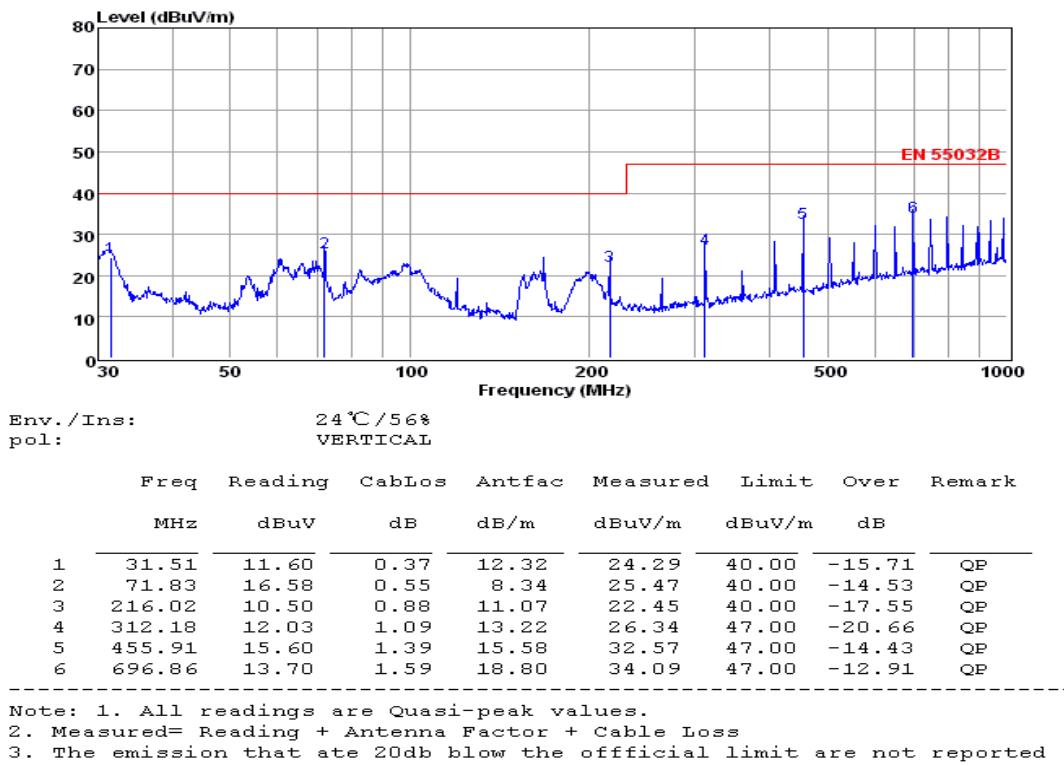

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b (High Channel)). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

IEEE 802.11b

Channel 1 / 2412MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	60.05	33.06	35.04	3.94	62.01	74.00	-11.99	Peak	Horizontal
4824.00	45.42	33.06	35.04	3.94	47.38	54.00	-6.62	Average	Horizontal
4824.00	58.77	33.06	35.04	3.94	60.73	74.00	-13.27	Peak	Vertical
4824.00	41.77	33.06	35.04	3.94	43.73	54.00	-10.27	Average	Vertical

Channel 6 / 2437MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	61.53	33.16	35.15	3.96	63.50	74.00	-10.50	Peak	Horizontal
4874.00	43.55	33.16	35.15	3.96	45.52	54.00	-8.48	Average	Horizontal
4874.00	57.16	33.16	35.15	3.96	59.13	74.00	-14.87	Peak	Vertical
4874.00	42.96	33.16	35.15	3.96	44.93	54.00	-9.07	Average	Vertical

Channel 11 / 2462MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	62.08	33.26	35.14	3.98	64.18	74.00	-9.82	Peak	Horizontal
4924.00	46.12	33.26	35.14	3.98	48.22	54.00	-5.78	Average	Horizontal
4924.00	56.50	33.26	35.14	3.98	58.60	74.00	-15.40	Peak	Vertical
4924.00	42.70	33.26	35.14	3.98	44.80	54.00	-9.20	Average	Vertical

IEEE 802.11g

Channel 1 / 2412MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	57.44	33.06	35.04	3.94	59.40	74.00	-14.60	Peak	Horizontal
4824.00	44.46	33.06	35.04	3.94	46.42	54.00	-7.58	Average	Horizontal
4824.00	57.60	33.06	35.04	3.94	59.56	74.00	-14.44	Peak	Vertical
4824.00	42.28	33.06	35.04	3.94	44.24	54.00	-9.76	Average	Vertical

Channel 6 / 2437MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	57.90	33.16	35.15	3.96	59.87	74.00	-14.13	Peak	Horizontal
4874.00	42.98	33.16	35.15	3.96	44.95	54.00	-9.05	Average	Horizontal
4874.00	56.04	33.16	35.15	3.96	58.01	74.00	-15.99	Peak	Vertical
4874.00	39.59	33.16	35.15	3.96	41.56	54.00	-12.44	Average	Vertical

Channel 11 / 2462MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	60.10	33.26	35.14	3.98	62.20	74.00	-11.80	Peak	Horizontal
4924.00	44.09	33.26	35.14	3.98	46.19	54.00	-7.81	Average	Horizontal
4924.00	58.50	33.26	35.14	3.98	60.60	74.00	-13.40	Peak	Vertical
4924.00	41.25	33.26	35.14	3.98	43.35	54.00	-10.65	Average	Vertical

Channel 1 / 2412MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	58.83	33.06	35.04	3.94	60.79	74.00	-13.21	Peak	Horizontal
4824.00	42.15	33.06	35.04	3.94	44.11	54.00	-9.89	Average	Horizontal
4824.00	56.55	33.06	35.04	3.94	58.51	74.00	-15.49	Peak	Vertical
4824.00	42.43	33.06	35.04	3.94	44.39	54.00	-9.61	Average	Vertical

Channel 6 / 2437MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	58.23	33.16	35.15	3.96	60.20	74.00	-13.80	Peak	Horizontal
4874.00	41.84	33.16	35.15	3.96	43.81	54.00	-10.19	Average	Horizontal
4874.00	57.85	33.16	35.15	3.96	59.82	74.00	-14.18	Peak	Vertical
4874.00	42.06	33.16	35.15	3.96	44.03	54.00	-9.97	Average	Vertical

Channel 11 / 2462MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	56.82	33.26	35.14	3.98	58.92	74.00	-15.08	Peak	Horizontal
4924.00	40.65	33.26	35.14	3.98	42.75	54.00	-11.25	Average	Horizontal
4924.00	55.95	33.26	35.14	3.98	58.05	74.00	-15.95	Peak	Vertical
4924.00	40.12	33.26	35.14	3.98	42.22	54.00	-11.78	Average	Vertical

IEEE 802.11n HT40

Channel 1 / 2422MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	60.01	33.06	35.04	3.94	61.97	74.00	-12.03	Peak	Horizontal
4844.00	42.11	33.06	35.04	3.94	44.07	54.00	-9.93	Average	Horizontal
4844.00	57.22	33.06	35.04	3.94	59.18	74.00	-14.82	Peak	Vertical
4844.00	41.26	33.06	35.04	3.94	43.22	54.00	-10.78	Average	Vertical

Channel 6 / 2437MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	56.86	33.16	35.15	3.96	58.83	74.00	-15.17	Peak	Horizontal
4874.00	41.99	33.16	35.15	3.96	43.96	54.00	-10.04	Average	Horizontal
4874.00	58.77	33.16	35.15	3.96	60.74	74.00	-13.26	Peak	Vertical
4874.00	42.60	33.16	35.15	3.96	44.57	54.00	-9.43	Average	Vertical

Channel 11 / 2452MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	57.56	33.26	35.14	3.98	59.66	74.00	-14.34	Peak	Horizontal
4904.00	40.55	33.26	35.14	3.98	42.65	54.00	-11.35	Average	Horizontal
4904.00	55.09	33.26	35.14	3.98	57.19	74.00	-16.81	Peak	Vertical
4904.00	40.15	33.26	35.14	3.98	42.25	54.00	-11.75	Average	Vertical

BT LE

Channel 1 / 2402MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	55.97	33.06	35.04	3.94	57.93	74.00	-16.07	Peak	Horizontal
4804.00	39.75	33.06	35.04	3.94	41.71	54.00	-12.29	Average	Horizontal
4804.00	52.31	33.06	35.04	3.94	54.27	74.00	-19.73	Peak	Vertical
4804.00	38.50	33.06	35.04	3.94	40.46	54.00	-13.54	Average	Vertical

Channel 19 / 2440MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.00	53.97	33.16	35.15	3.96	55.94	74.00	-18.06	Peak	Horizontal
4880.00	39.56	33.16	35.15	3.96	41.53	54.00	-12.47	Average	Horizontal
4880.00	51.58	33.16	35.15	3.96	53.55	74.00	-20.45	Peak	Vertical
4880.00	39.00	33.16	35.15	3.96	40.97	54.00	-13.03	Average	Vertical

Channel 40 / 2480MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	53.86	33.26	35.14	3.98	55.96	74.00	-18.04	Peak	Horizontal
4960.00	39.09	33.26	35.14	3.98	41.19	54.00	-12.81	Average	Horizontal
4960.00	53.13	33.26	35.14	3.98	55.23	74.00	-18.77	Peak	Vertical
4960.00	36.55	33.26	35.14	3.98	38.65	54.00	-15.35	Average	Vertical

Notes:

1. Measuring frequencies from 9 KHz~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20

5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 KHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.6.6. Test Results of Conducted Spurious Emissions

Temperature	25°C	Humidity	60%
Test Engineer	Kyle.Yin	Configurations	IEEE 802.11b/g/n & BT LE

Test Mode	Channel	Frequency (MHz)	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
IEEE 802.11b	1	2412	<-20	-20	PASS
	6	2437	<-20		
	11	2462	<-20		
IEEE 802.11g	1	2412	<-20	-20	PASS
	6	2437	<-20		
	11	2462	<-20		
IEEE 802.11n HT20	1	2412	<-20	-20	PASS
	6	2437	<-20		
	11	2462	<-20		
BT – LE	0	2402	<-20	-20	PASS
	19	2440	<-20		
	39	2480	<-20		



Remark:

1. Measured RF conducted spurious emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20 13.5Mbps at IEEE 802.11n HT20; “---”means that the fundamental frequency not for 15.209 limits requirement.
4. Please refer to following plots;


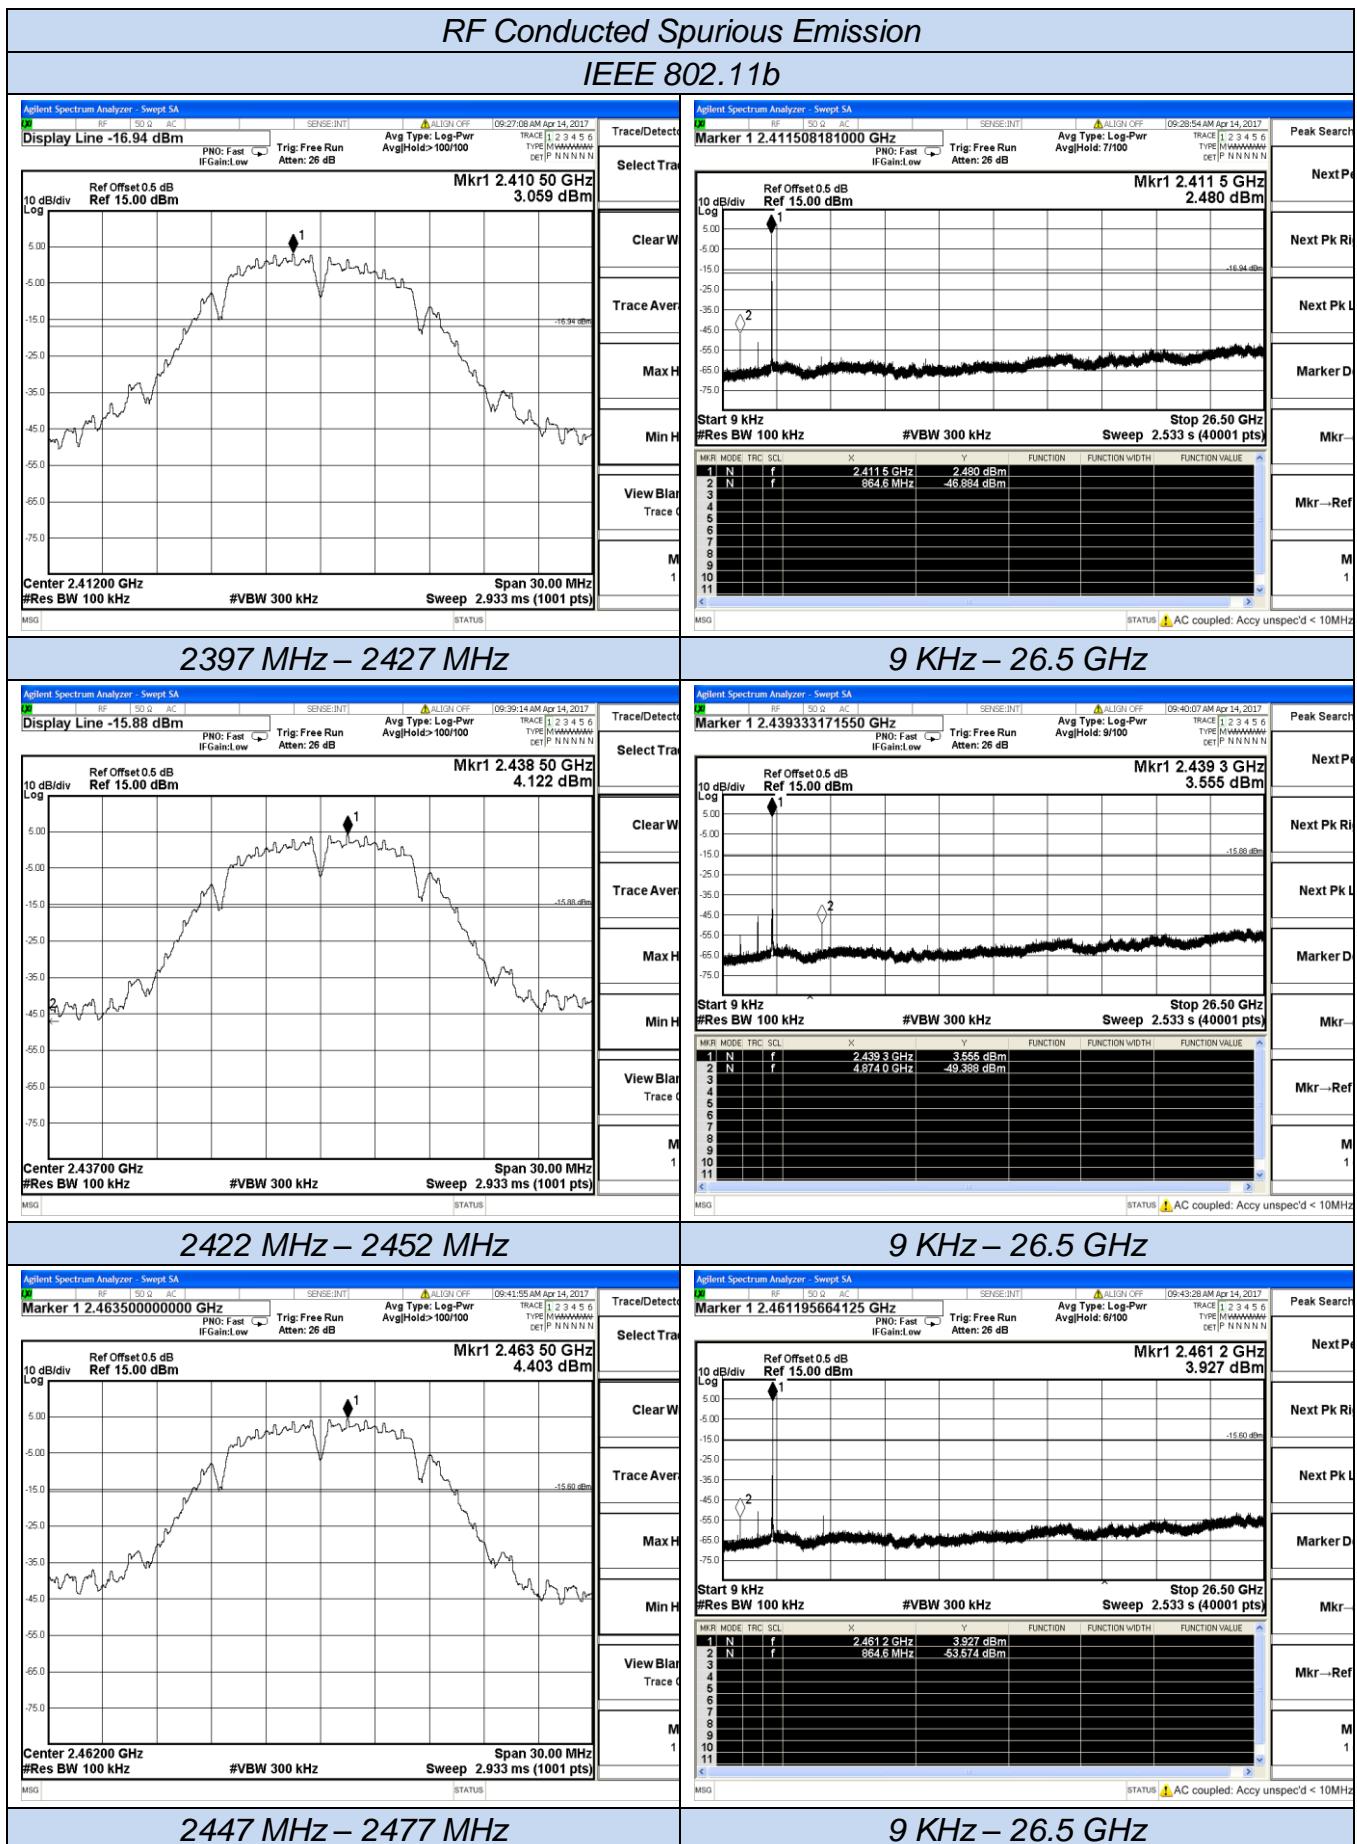


RF Conducted Spurious Emission



IEEE 802.11g

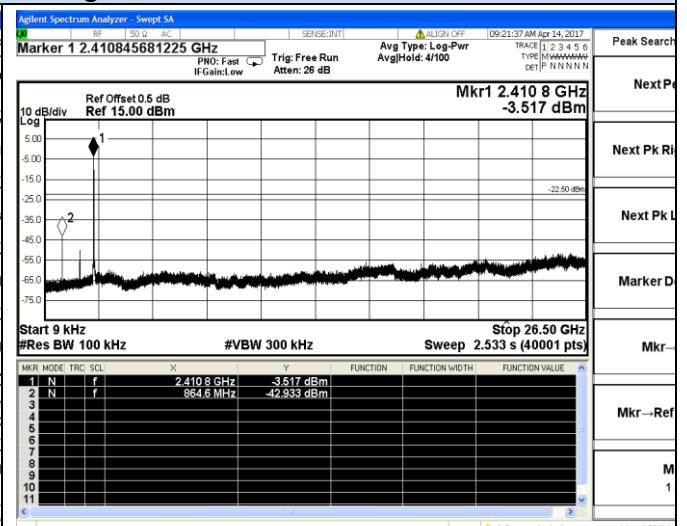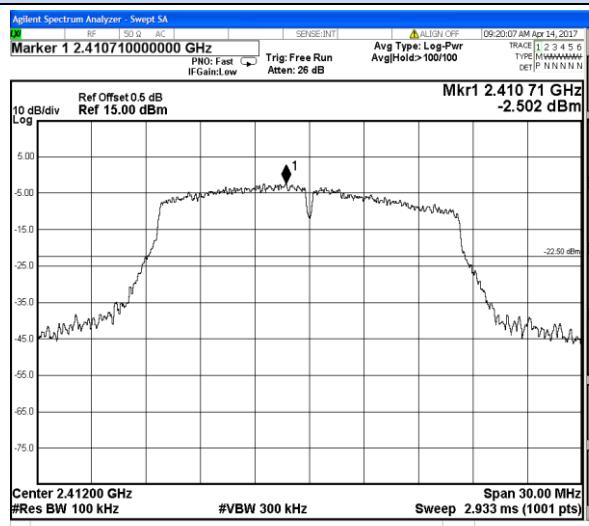



2397 MHz – 2427 MHz

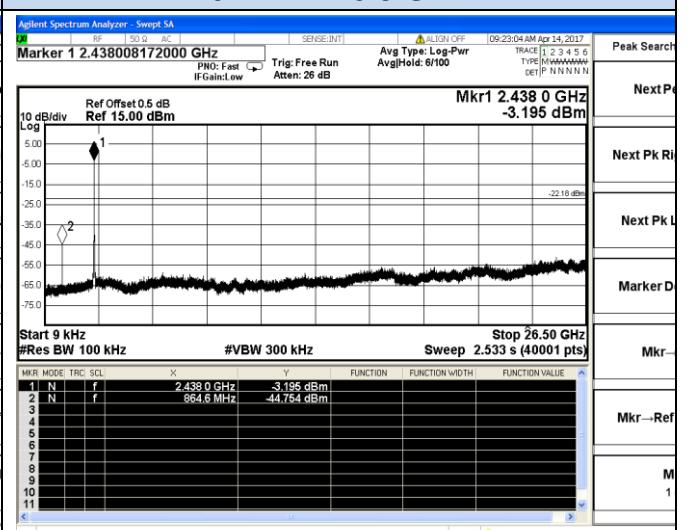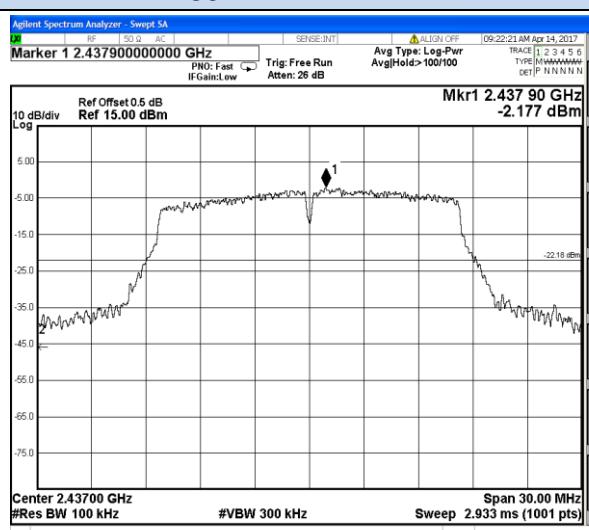

2422 MHz = 2452 MHz

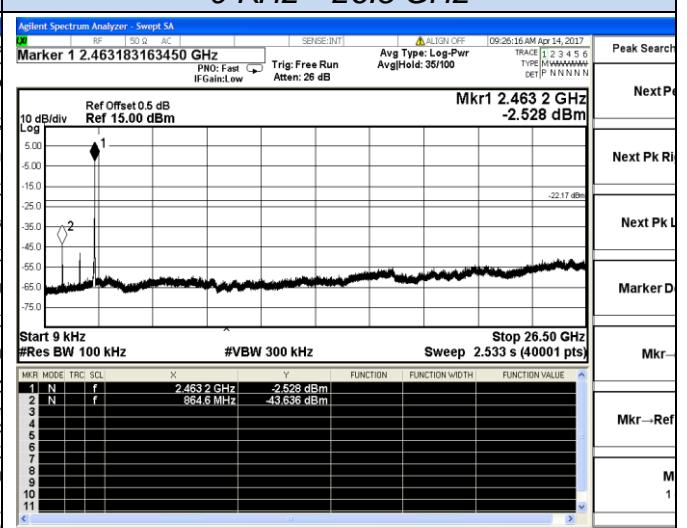
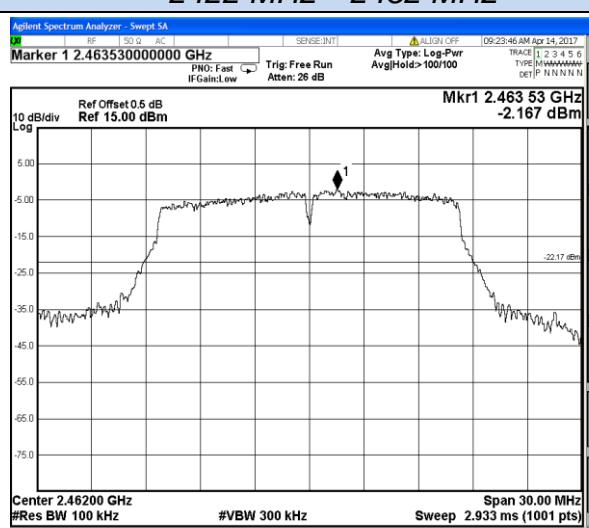


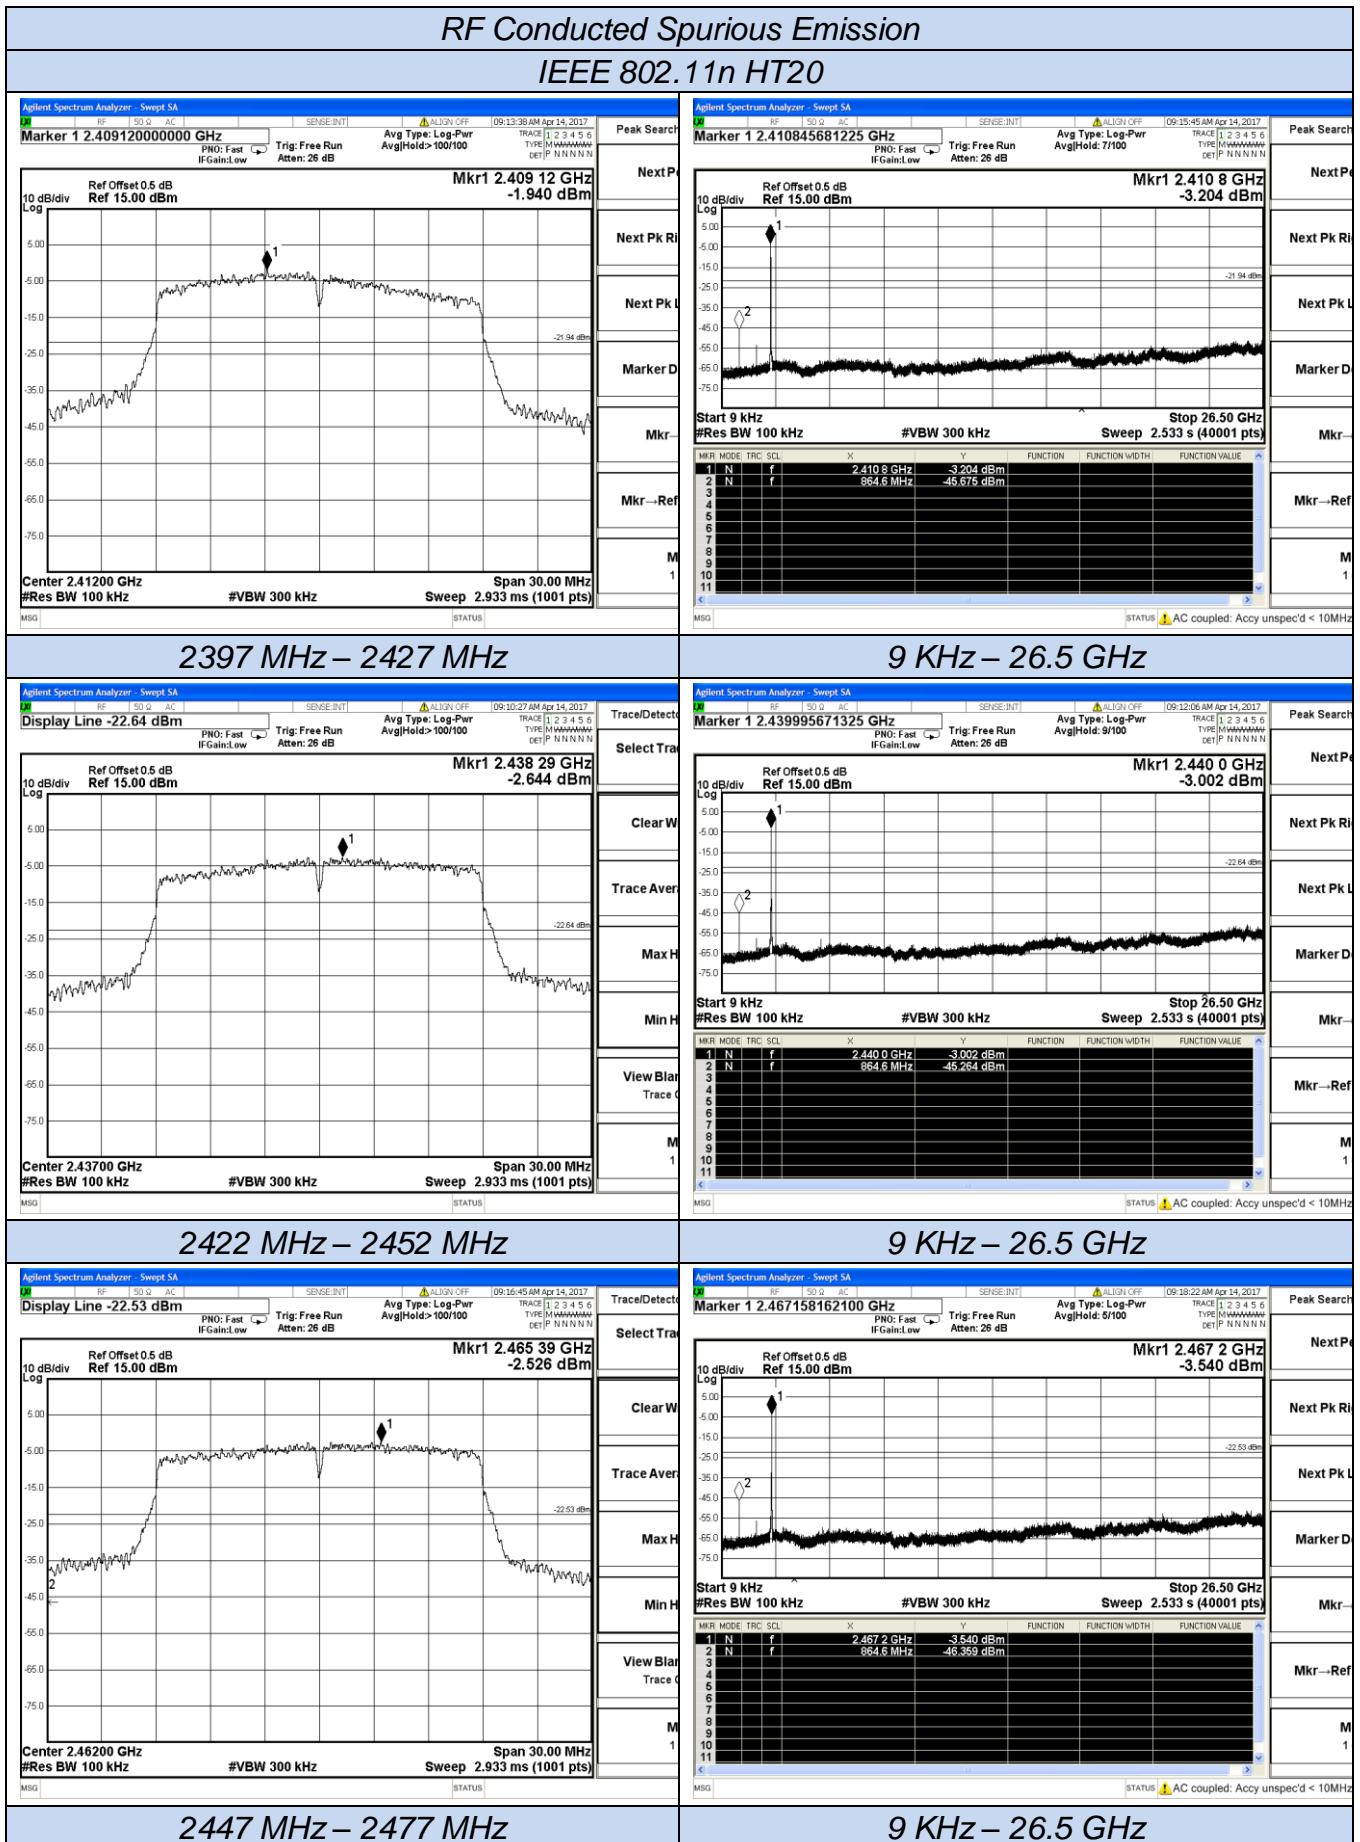


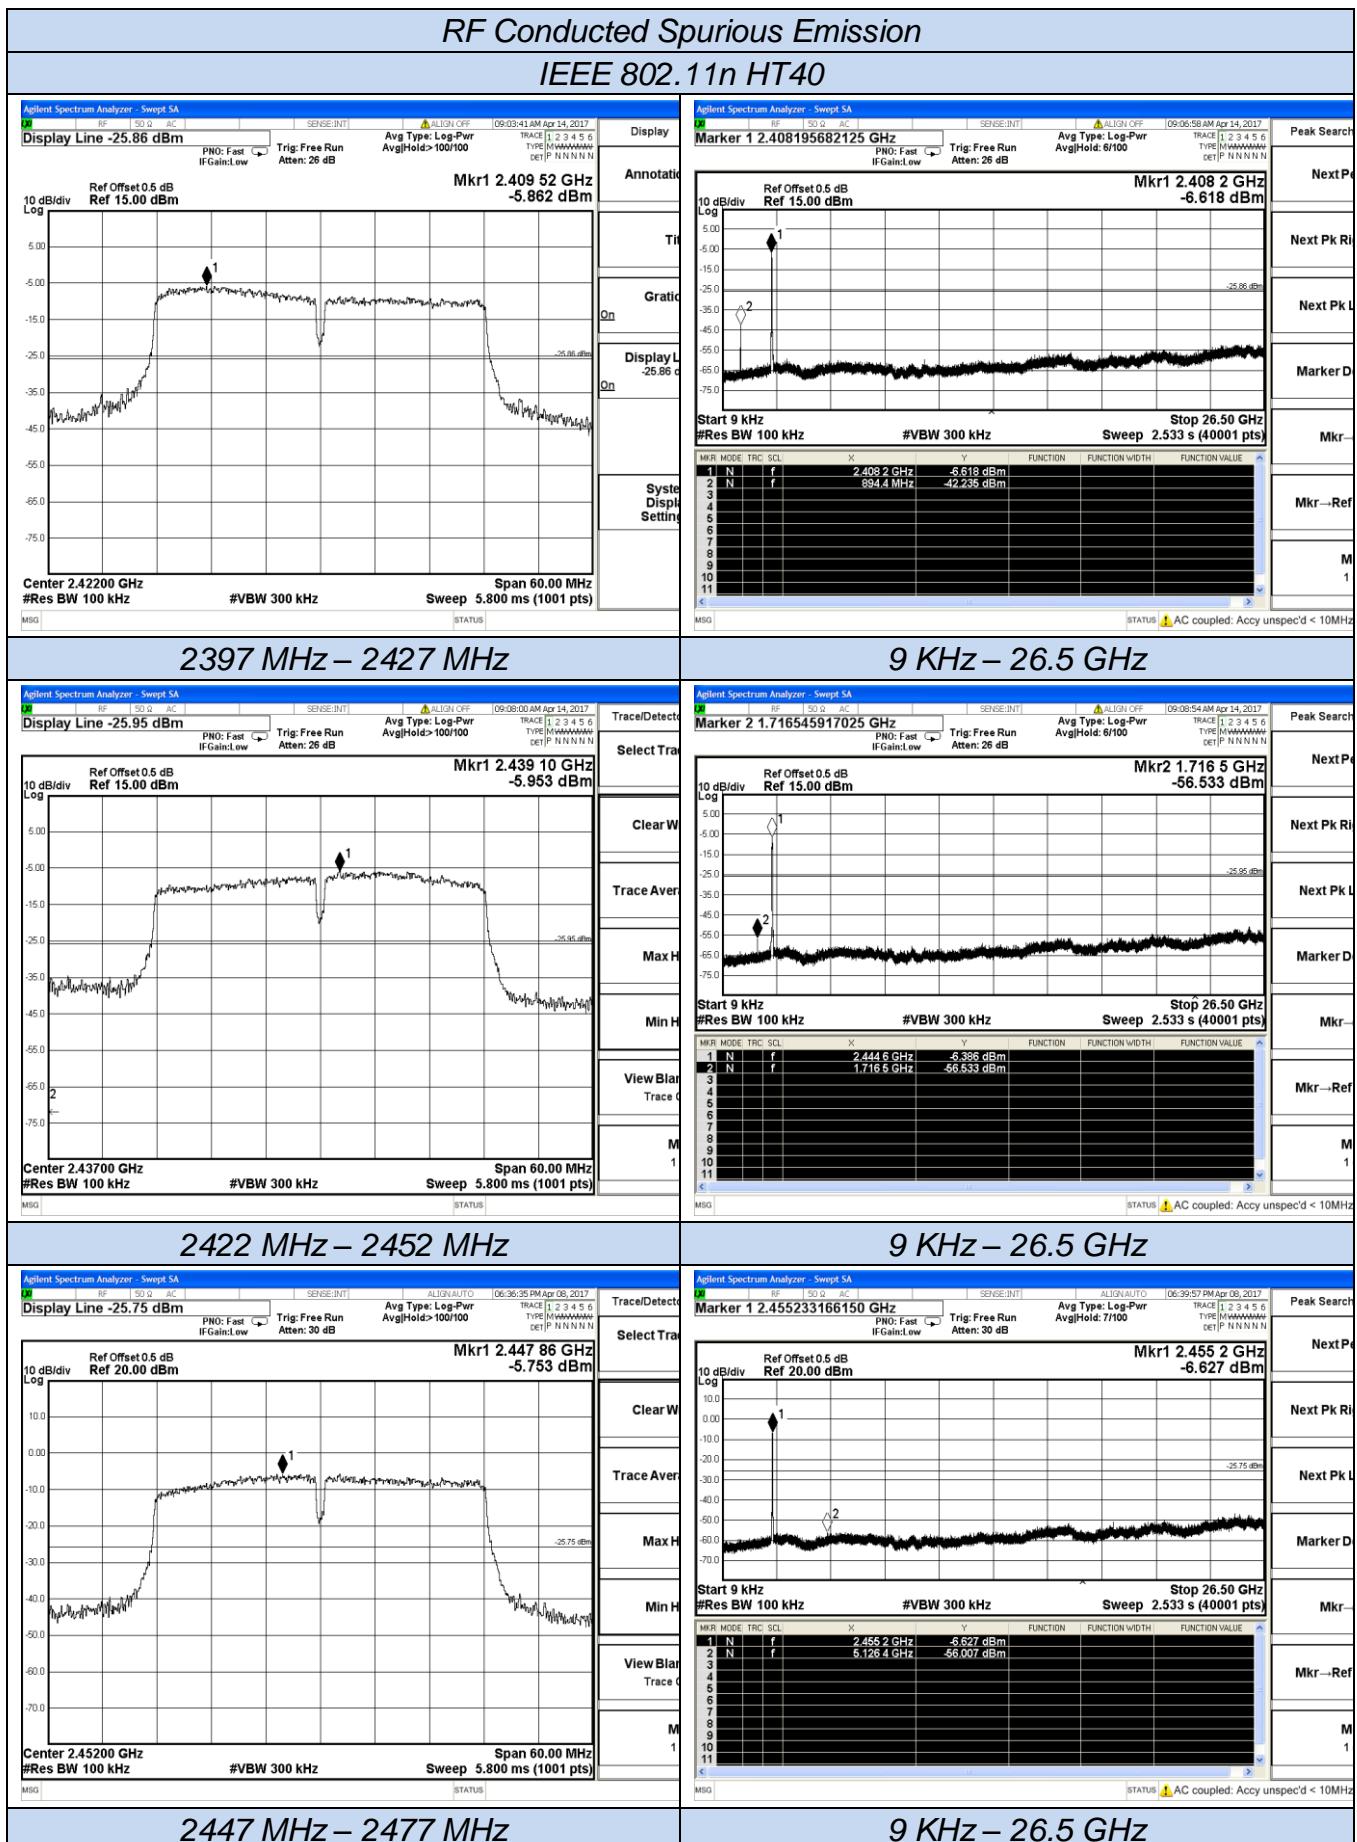


RF Conducted Spurious Emission



BT LE

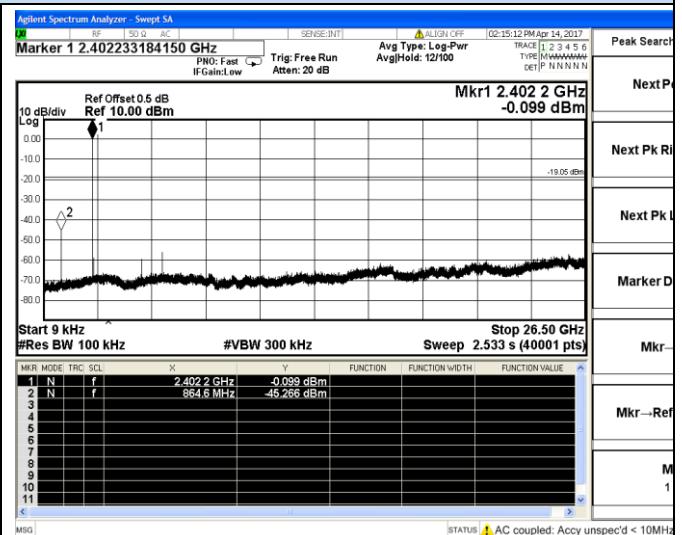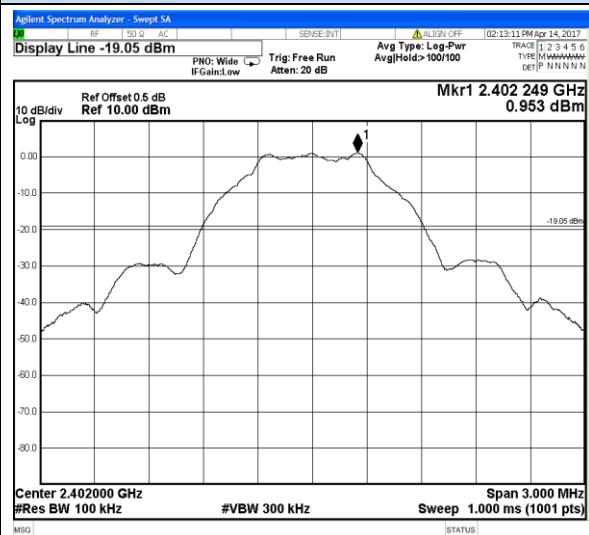

2399.5 MHz - 2404.5 MHz

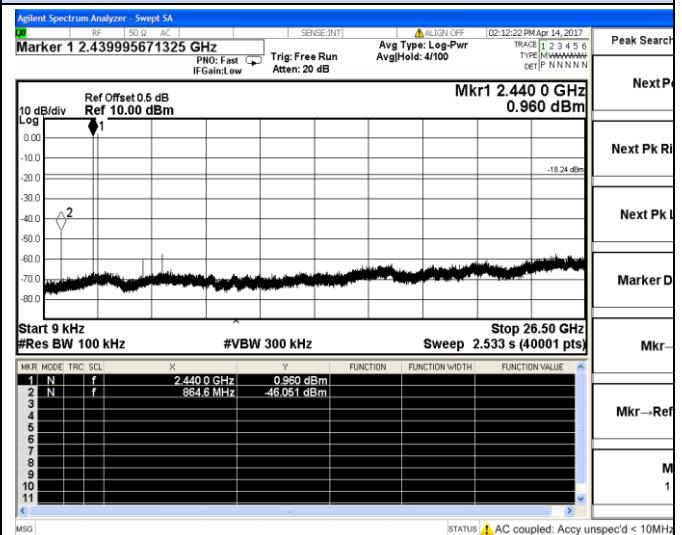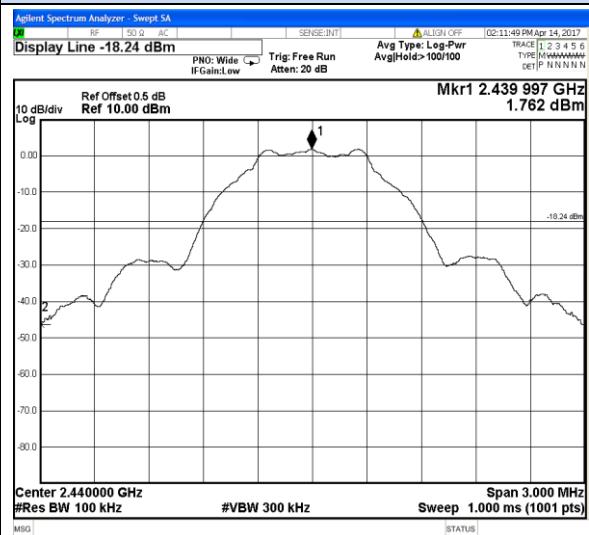

2437.5 MHz - 2442.5 MHz

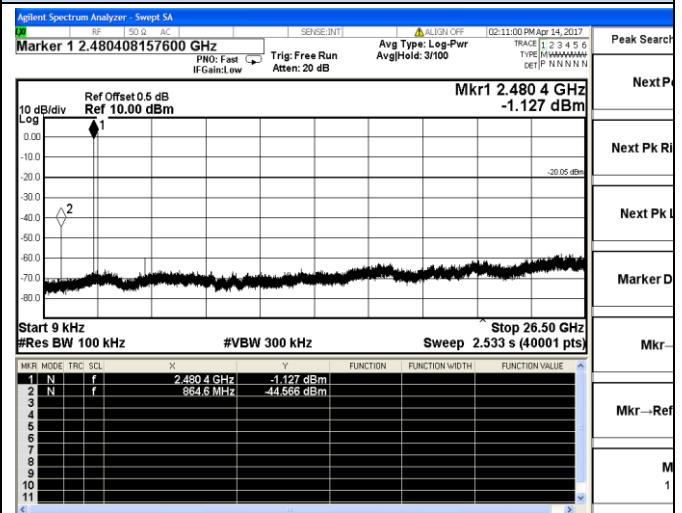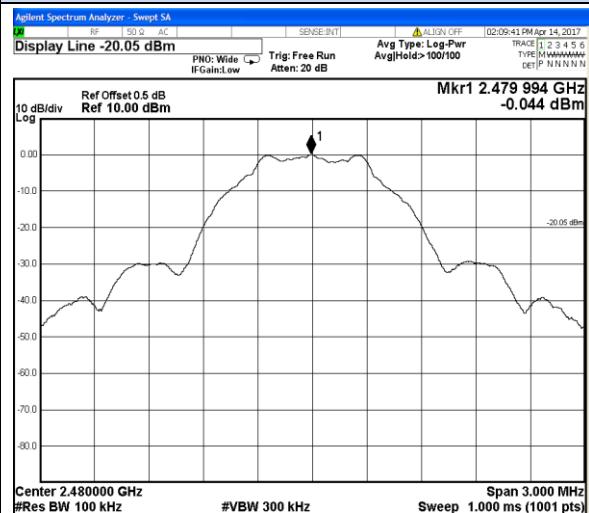


2477.5 MHz - 2482.5 MHz


9 KHz - 26.5 GHz

Band-edge measurements for conducted emissions

IEEE 802.11b

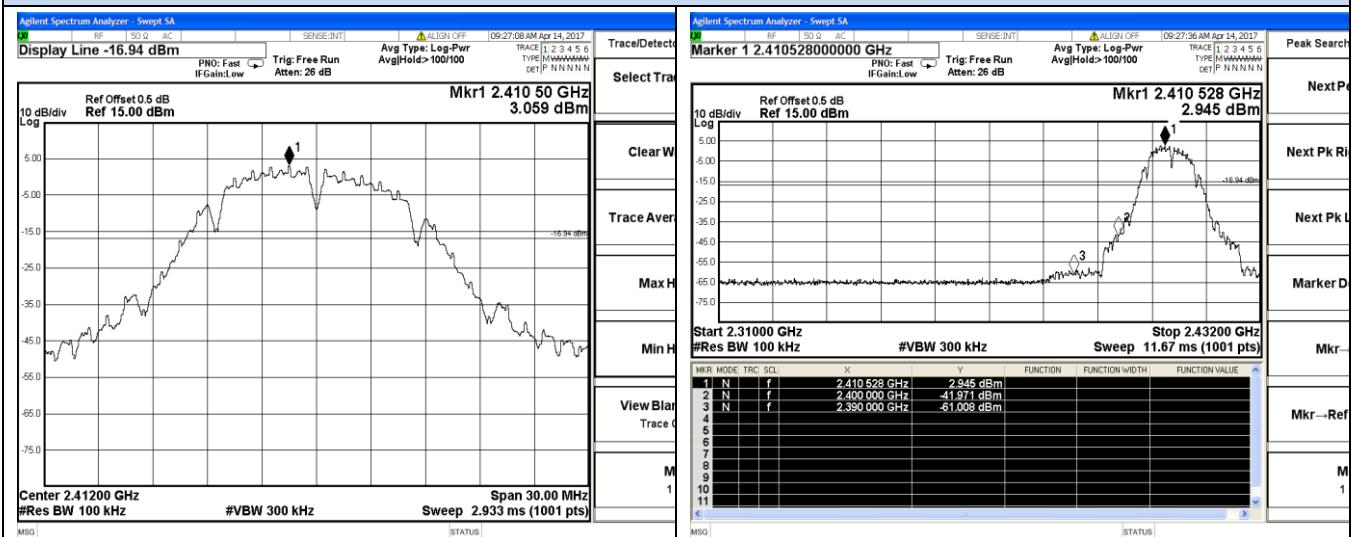


2397 MHz – 2427 MHz

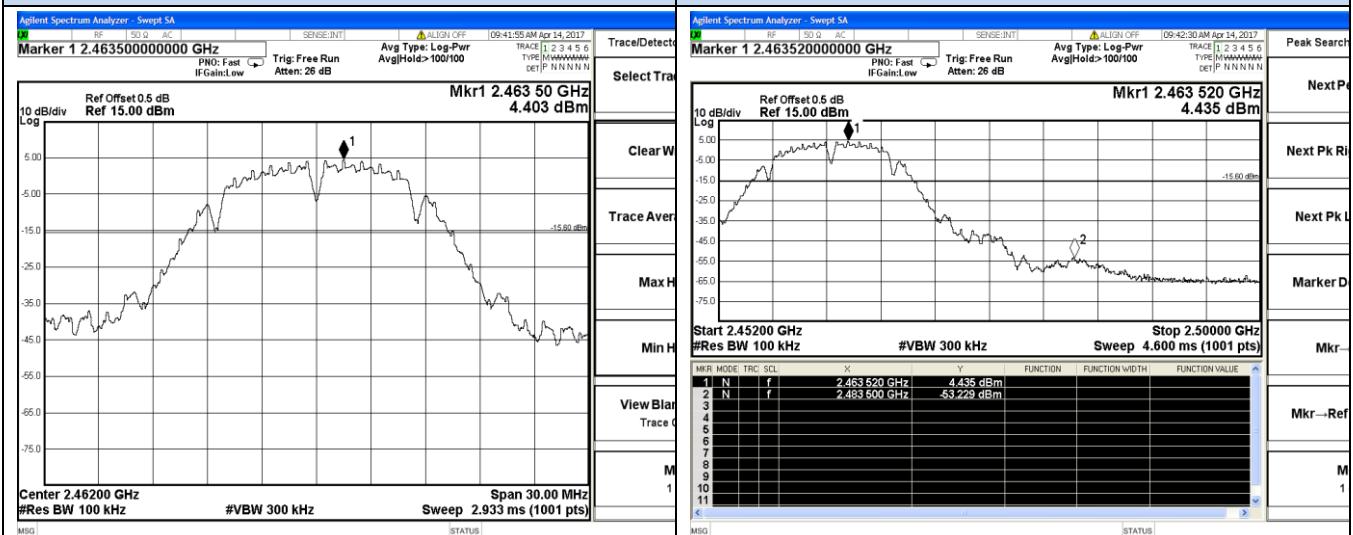

2447 MHz – 2477 MHz

IEEE 802.11g

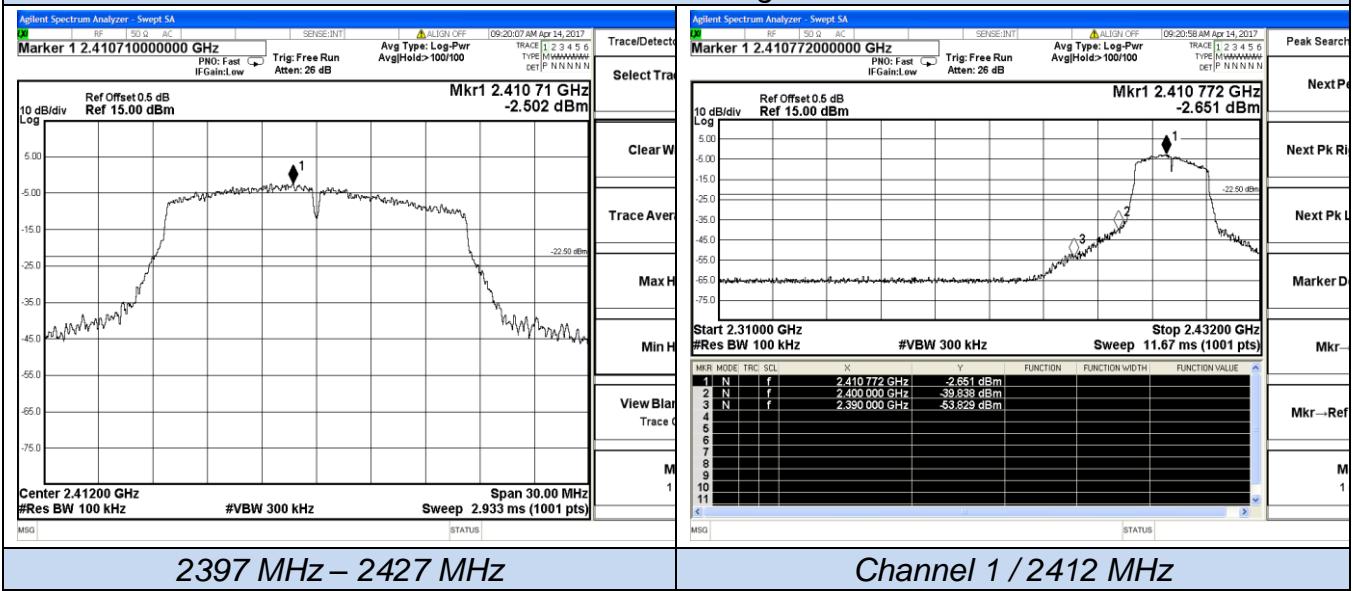


2397 MHz – 2427 MHz

Channel 1 / 2412 MHz

Band-edge measurements for conducted emissions


IEEE 802.11g

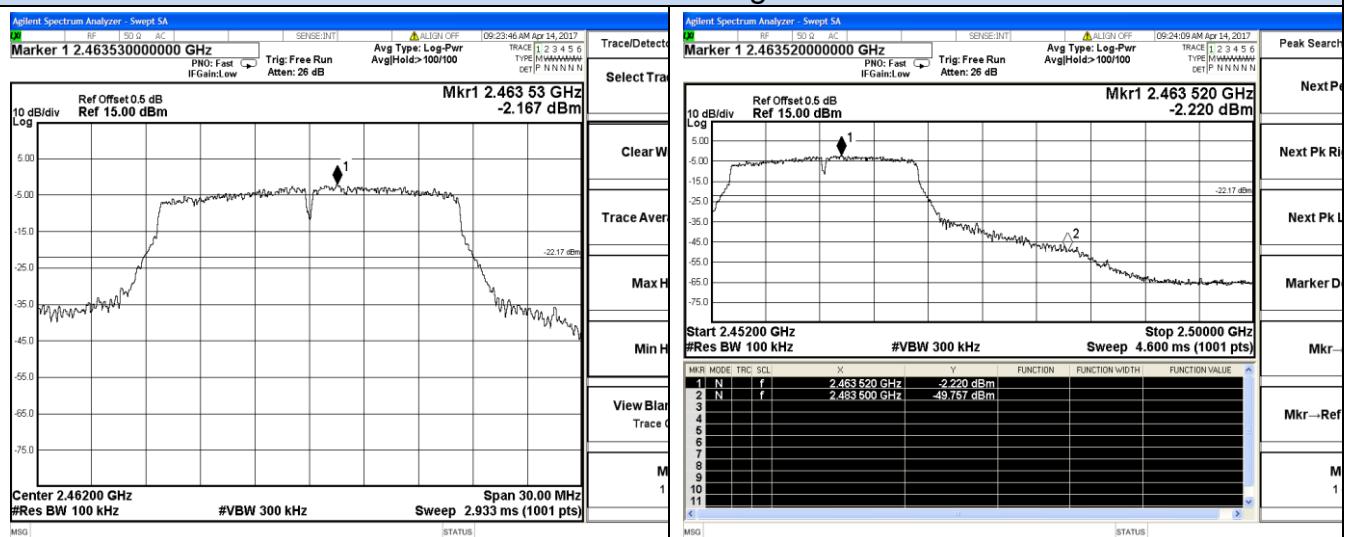

2447 MHz – 2477 MHz


Channel 11 / 2462 MHz

IEEE 802.11n HT20

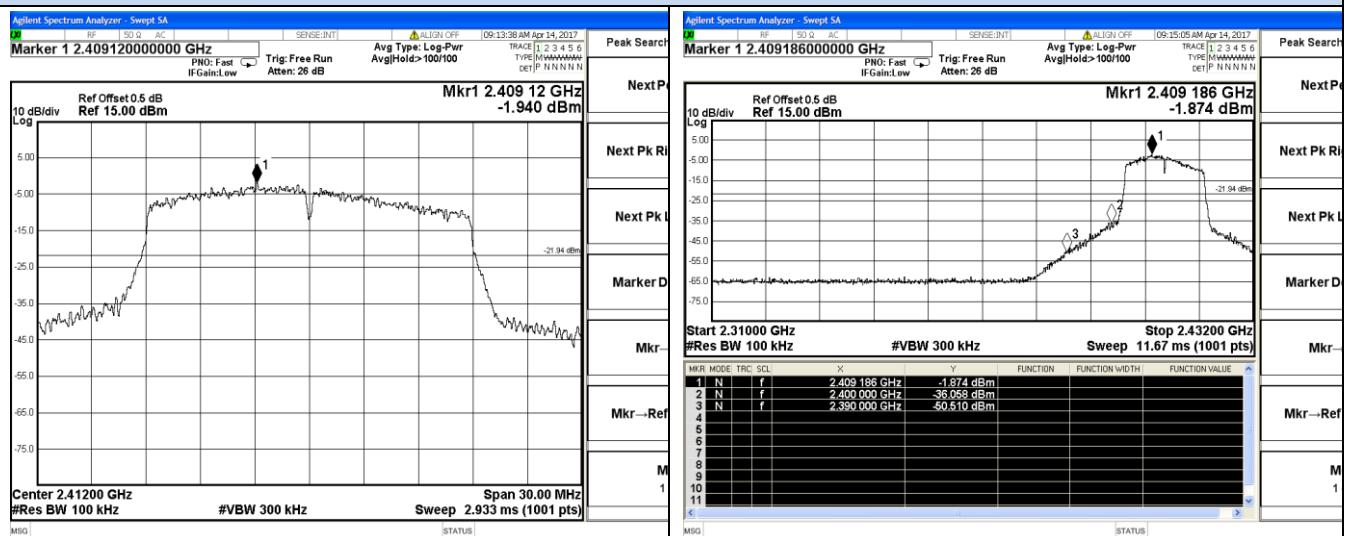

2397 MHz – 2427 MHz

Channel 1 / 2412 MHz


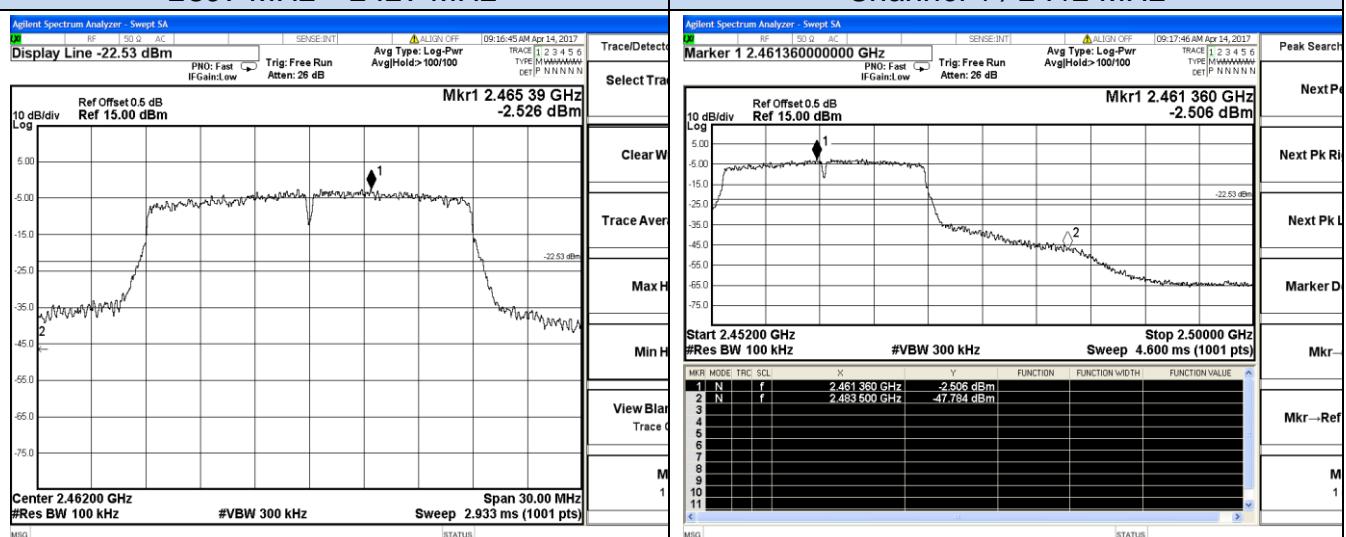


2447 MHz – 2477 MHz



Channel 11 / 2462 MHz

Band-edge measurements for conducted emissions

IEEE 802.11n HT40

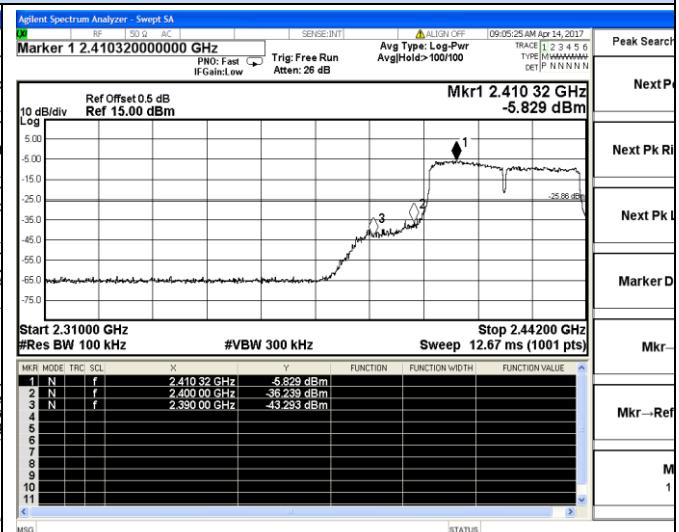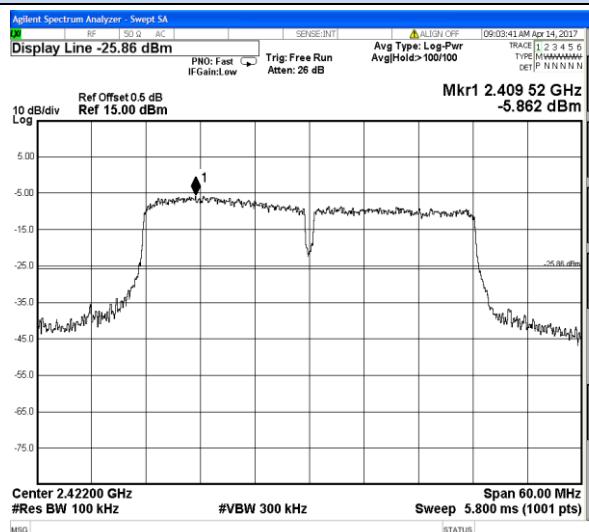


2399.5 MHz – 2404.5 MHz

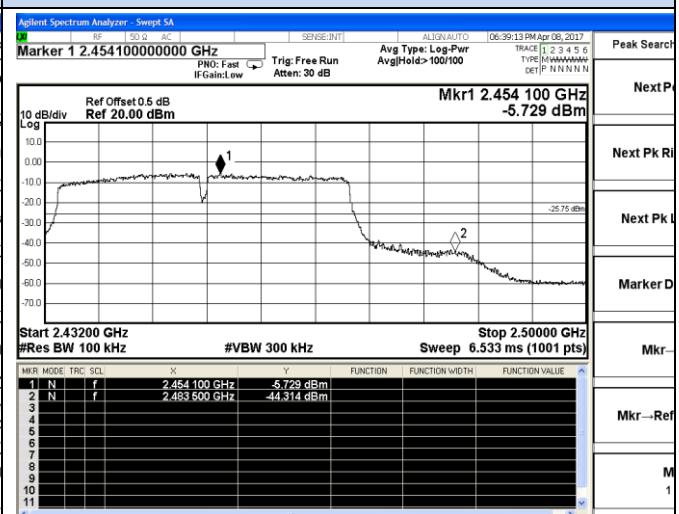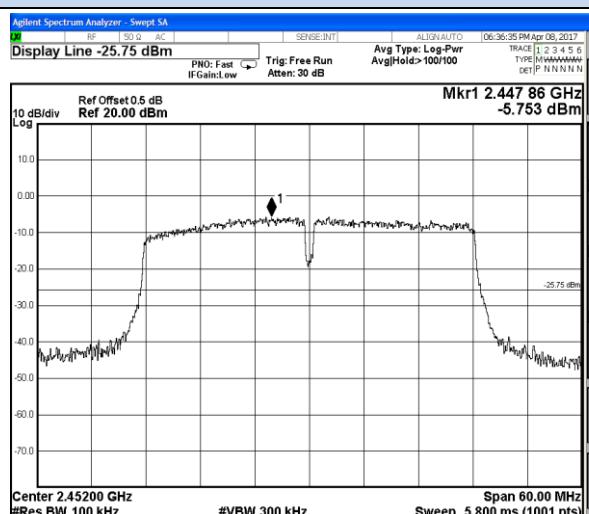

2477.5 MHz 2488.5 MHz

Channel 0 (0.400 MHz)

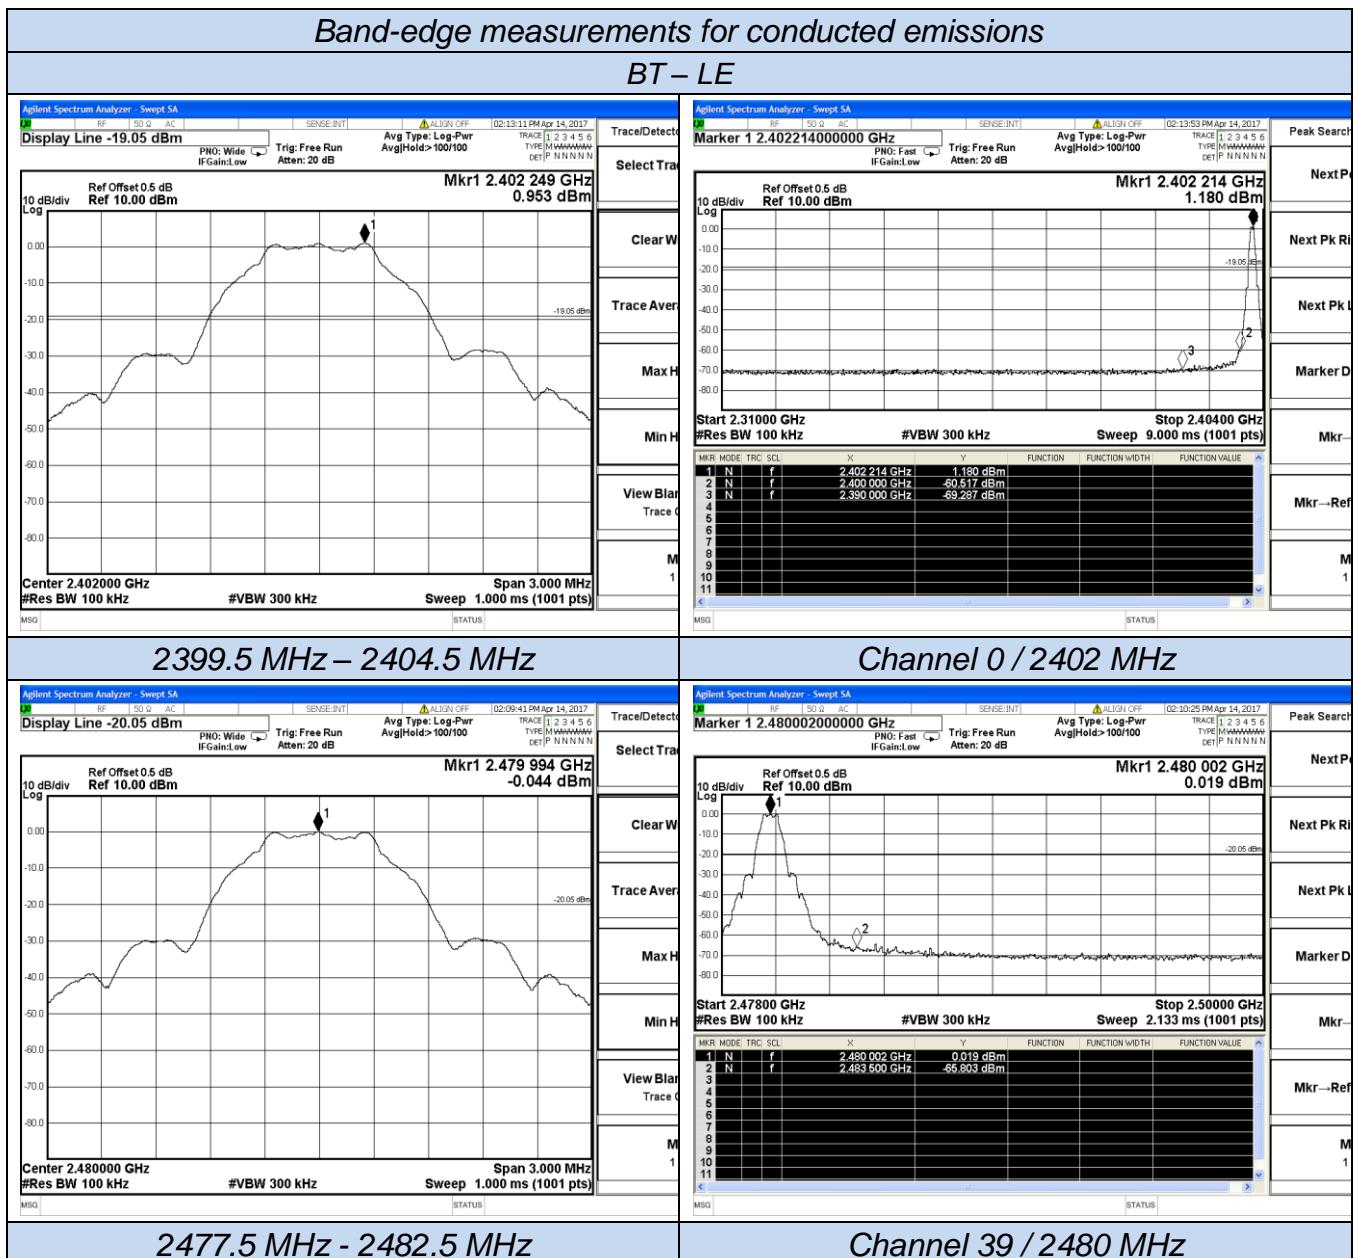

5.7. Power line conducted emissions


5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency



5.7.2 Block Diagram of Test Setup

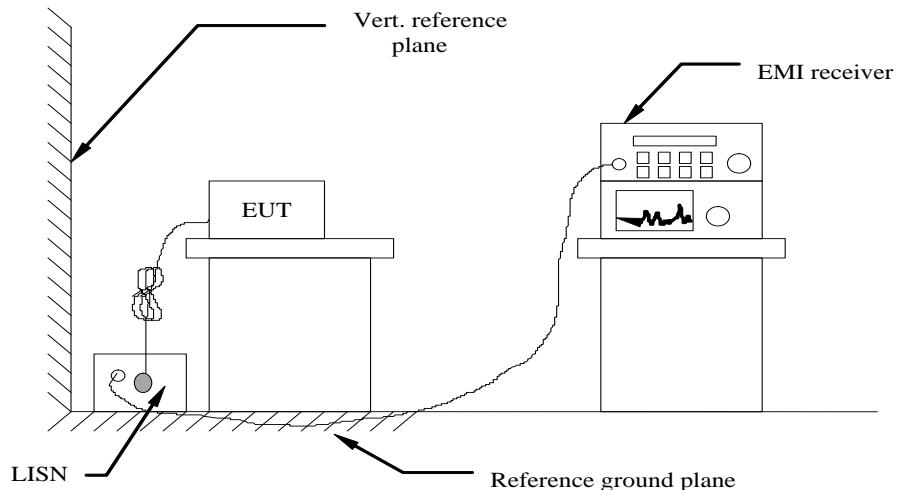


5.7.3 Test Results

PASS.


The test data please refer to following page.

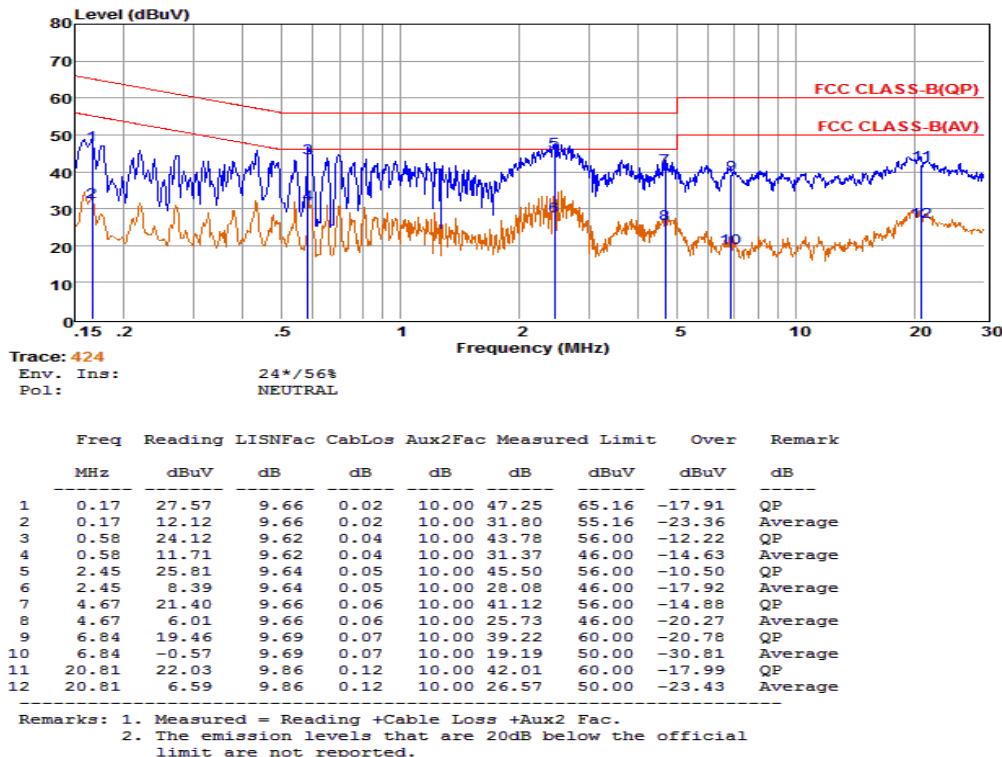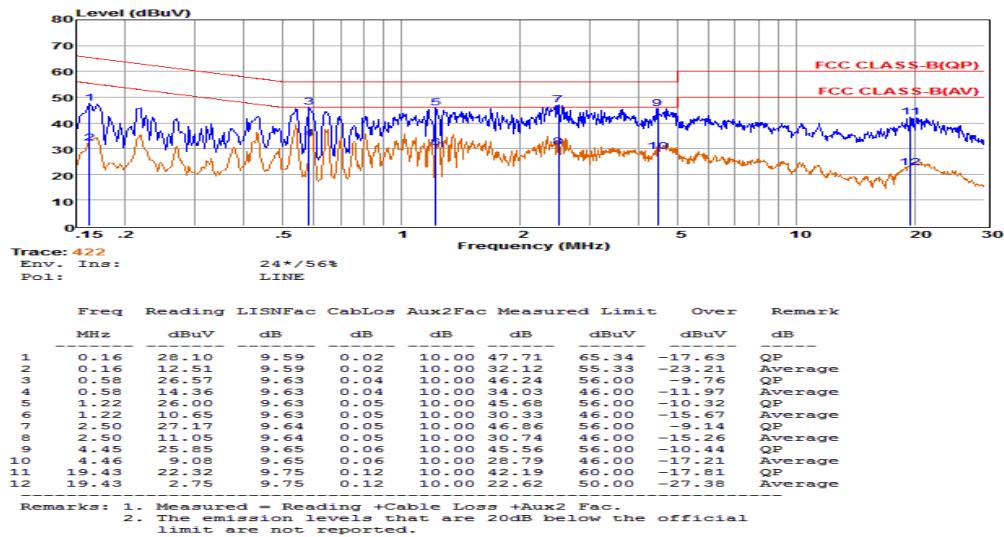AC Conducted Emission of power adapter @ AC 120V/60Hz @ IEEE 802.11b (worst case)

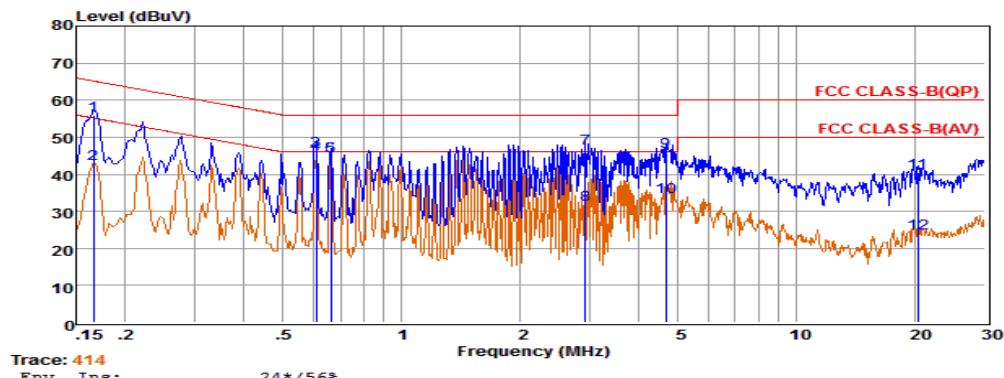AC Conducted Emission of power adapter @ AC 240V/50Hz @ IEEE 802.11b (worst case)

Freq MHz	Reading		LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	36.23	9.66	0.02	10.00	55.91	65.16	-9.25	QP
2	0.17	23.23	9.66	0.02	10.00	42.91	55.16	-12.25	Average
3	0.61	26.69	9.63	0.04	10.00	46.36	56.00	-9.64	QP
4	0.61	25.82	9.63	0.04	10.00	45.49	46.00	-0.51	Average
5	0.66	25.21	9.63	0.04	10.00	44.88	56.00	-11.12	QP
6	0.66	25.20	9.63	0.04	10.00	44.87	46.00	-1.13	Average
7	2.92	27.19	9.64	0.06	10.00	46.89	56.00	-9.11	QP
8	2.92	12.10	9.64	0.06	10.00	31.80	46.00	-14.20	Average
9	4.67	26.43	9.66	0.06	10.00	46.15	56.00	-9.85	QP
10	4.67	14.30	9.66	0.06	10.00	34.02	46.00	-11.98	Average
11	20.27	20.38	9.88	0.12	10.00	40.38	60.00	-19.62	QP
12	20.27	3.99	9.88	0.12	10.00	23.99	50.00	-26.01	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

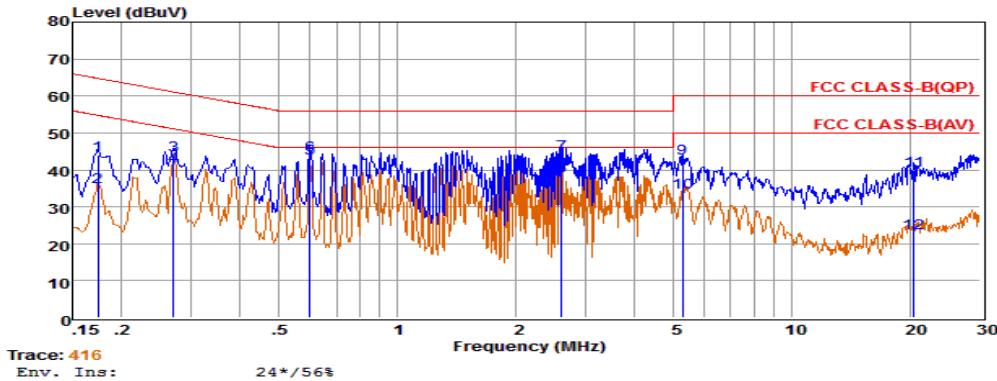

Freq MHz	Reading		LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	24.24	9.64	0.02	10.00	43.90	64.77	-20.87	QP
2	0.17	15.81	9.64	0.02	10.00	35.47	54.76	-19.29	Average
3	0.27	24.30	9.60	0.03	10.00	43.93	61.12	-17.19	QP
4	0.27	21.39	9.60	0.03	10.00	41.02	51.11	-10.09	Average
5	0.60	23.40	9.63	0.04	10.00	43.07	46.00	-2.93	Average
6	0.60	24.40	9.63	0.04	10.00	44.07	56.00	-11.93	QP
7	2.61	24.55	9.64	0.05	10.00	44.24	56.00	-11.76	QP
8	2.61	18.71	9.64	0.05	10.00	38.40	46.00	-7.60	Average
9	5.28	23.41	9.66	0.06	10.00	43.13	60.00	-16.87	QP
10	5.28	14.29	9.66	0.06	10.00	34.01	50.00	-15.99	Average
11	20.38	19.99	9.87	0.12	10.00	39.98	60.00	-20.02	QP
12	20.38	3.01	9.87	0.12	10.00	23.00	50.00	-27.00	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.


***Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b).

5.8. Band-edge measurements for radiated emissions

5.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2. Test Setup Layout

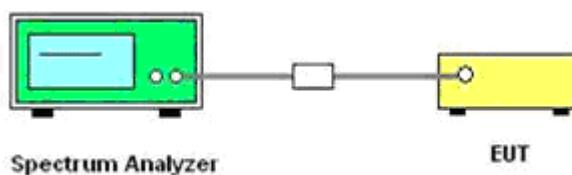

5.8.3. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.8.4. Test Procedures

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30

MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test duress until all measured frequencies were complete.

5.8.5 Test Results

IEEE 802.11b							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dB μ V/m)	Detector	Limit (dB μ V/m)	Verdict
2310.000	-49.972	0.500	0.00	47.288	Peak	74.00	PASS
2310.000	-61.551	0.500	0.00	35.709	AV	54.00	PASS
2390.000	-48.054	0.500	0.00	49.206	Peak	74.00	PASS
2390.000	-59.961	0.500	0.00	37.299	AV	54.00	PASS
2483.500	-44.986	0.500	0.00	52.274	Peak	74.00	PASS
2483.500	-56.073	0.500	0.00	41.187	AV	54.00	PASS
2500.000	-47.941	0.500	0.00	49.319	Peak	74.00	PASS
2500.000	-60.861	0.500	0.00	36.399	AV	54.00	PASS

IEEE 802.11g							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dB μ V/m)	Detector	Limit (dB μ V/m)	Verdict
2310.000	-49.785	0.500	0.00	47.475	Peak	74.00	PASS
2310.000	-61.621	0.500	0.00	35.639	AV	54.00	PASS
2390.000	-34.705	0.500	0.00	62.555	Peak	74.00	PASS
2390.000	-52.458	0.500	0.00	44.802	AV	54.00	PASS
2483.500	-30.662	0.500	0.00	66.598	Peak	74.00	PASS
2483.500	-47.455	0.500	0.00	49.805	AV	54.00	PASS
2500.000	-50.143	0.500	0.00	47.117	Peak	74.00	PASS
2500.000	-61.021	0.500	0.00	36.239	AV	54.00	PASS

IEEE 802.11n HT20

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-49.012	0.500	0.00	48.248	Peak	74.00	PASS
2310.000	-61.611	0.500	0.00	35.649	AV	54.00	PASS
2390.000	-30.614	0.500	0.00	66.646	Peak	74.00	PASS
2390.000	-51.359	0.500	0.00	45.901	AV	54.00	PASS
2483.500	-28.078	0.500	0.00	69.182	Peak	74.00	PASS
2483.500	-47.373	0.500	0.00	49.887	AV	54.00	PASS
2500.000	-49.253	0.500	0.00	48.007	Peak	74.00	PASS
2500.000	-61.011	0.500	0.00	36.249	AV	54.00	PASS

IEEE 802.11n HT40


Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-49.063	0.500	0.00	48.197	Peak	74.00	PASS
2310.000	-61.625	0.500	0.00	35.635	AV	54.00	PASS
2390.000	-33.825	0.500	0.00	63.435	Peak	74.00	PASS
2390.000	-51.796	0.500	0.00	45.464	AV	54.00	PASS
2483.500	-27.199	0.500	0.00	70.061	Peak	74.00	PASS
2483.500	-42.506	0.500	0.00	54.754	AV	54.00	PASS
2500.000	-49.696	0.500	0.00	47.564	Peak	74.00	PASS
2500.000	-60.964	0.500	0.00	36.296	AV	54.00	PASS

BT - LE

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-63.544	0.500	0.00	33.716	Peak	74.00	PASS
2310.000	-70.753	0.500	0.00	26.507	AV	54.00	PASS
2390.000	-60.821	0.500	0.00	36.439	Peak	74.00	PASS
2390.000	-69.482	0.500	0.00	27.778	AV	54.00	PASS
2483.500	-57.829	0.500	0.00	39.431	Peak	74.00	PASS
2483.500	-66.883	0.500	0.00	30.377	AV	54.00	PASS
2500.000	-62.026	0.500	0.00	35.234	Peak	74.00	PASS
2500.000	-70.665	0.500	0.00	26.595	AV	54.00	PASS


Remark:

1. Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20 13.5Mbps at IEEE 802.11n HT40;
4. “---”means that the fundamental frequency not for 15.209 limits requirement.
5. Please refer to following plots;

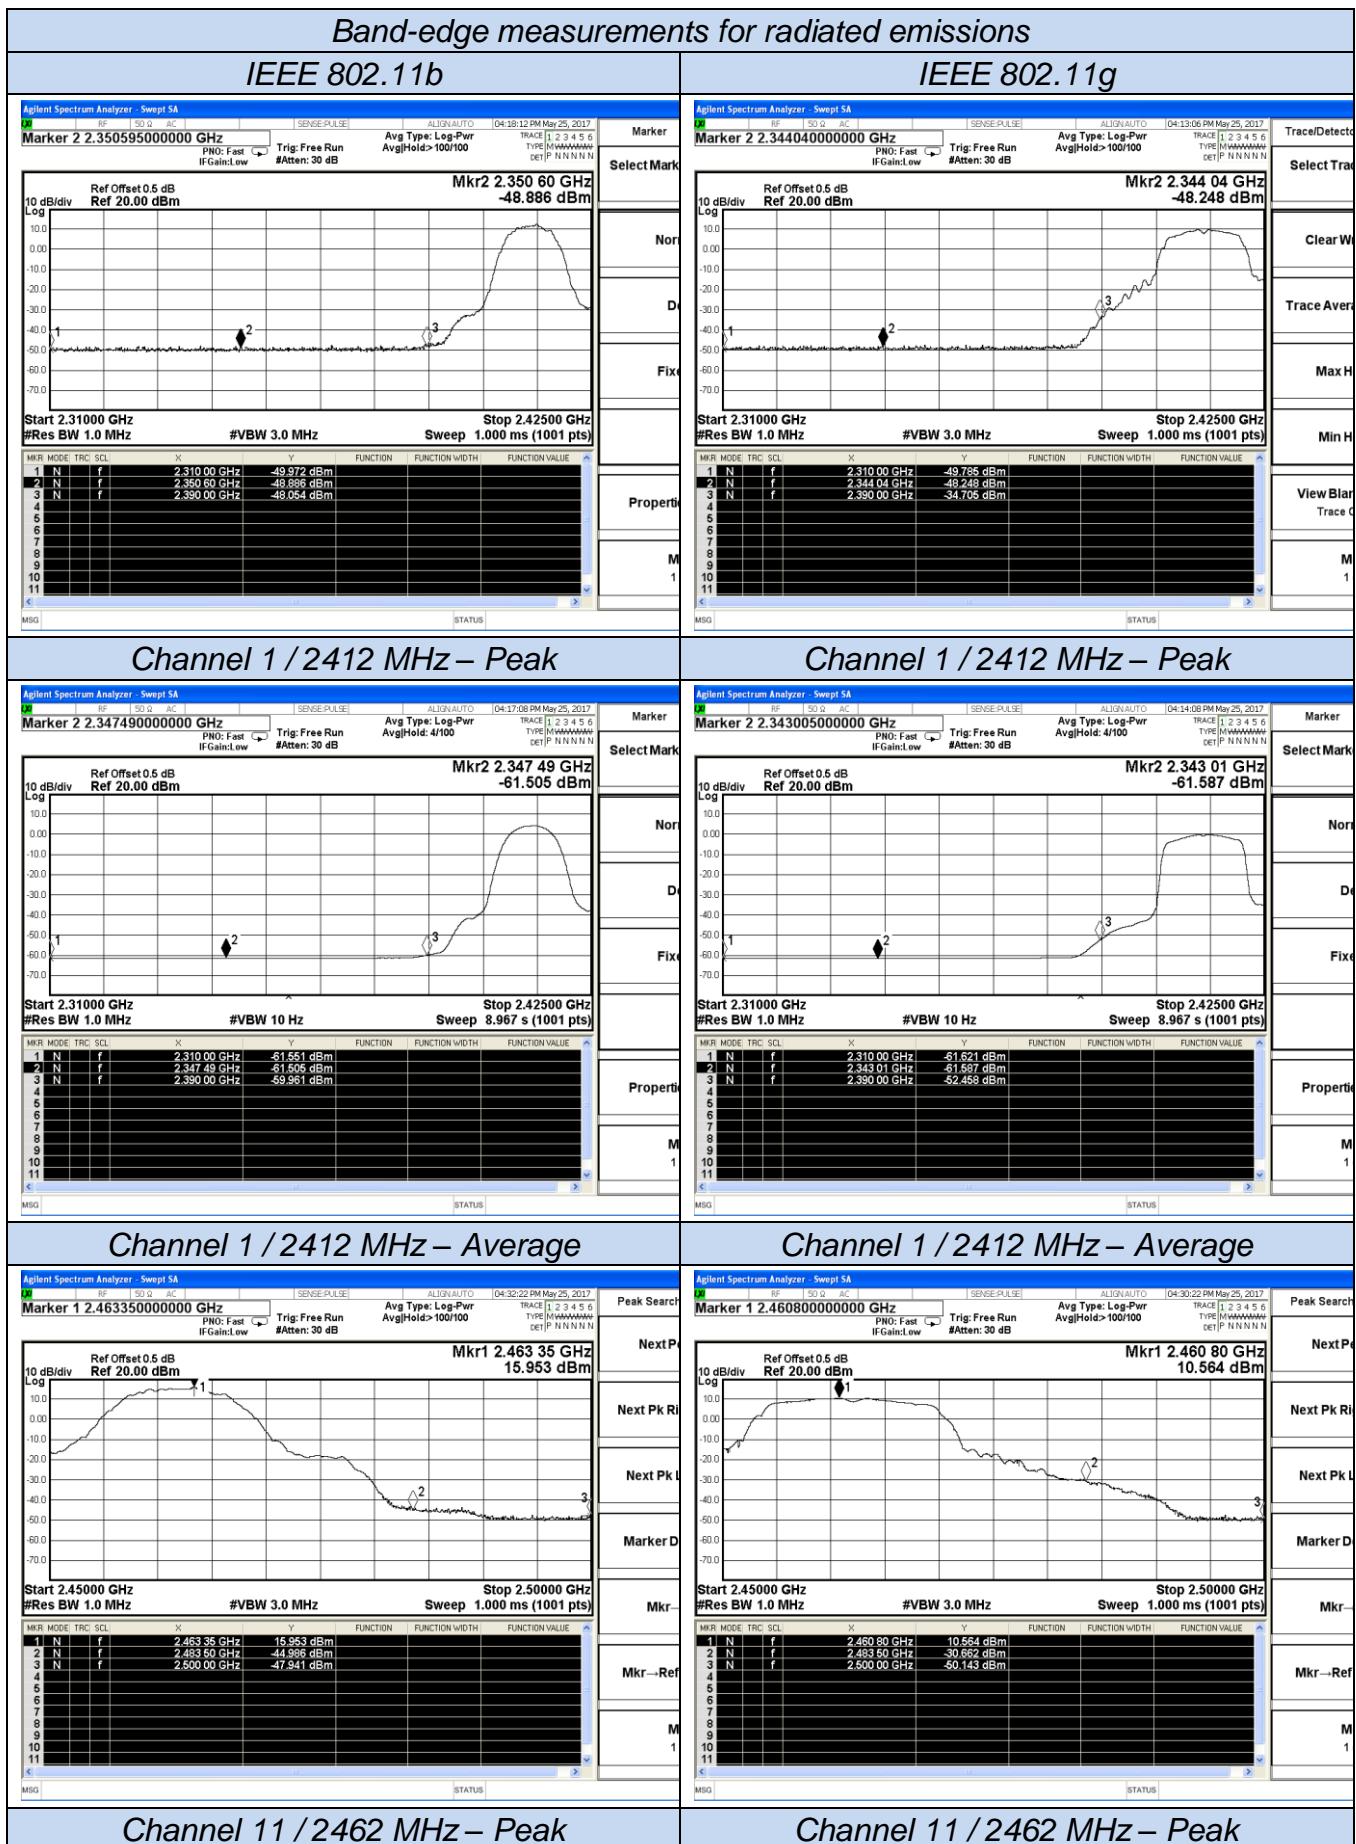


Band-edge measurements for radiated emissions

IEEE 802.11b

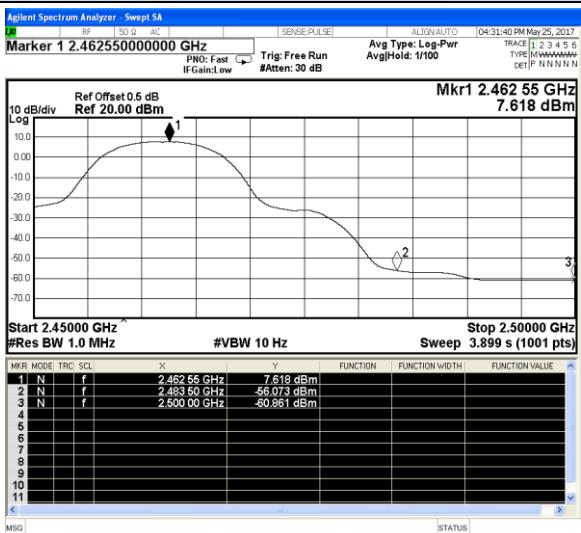


IEEE 802.11g

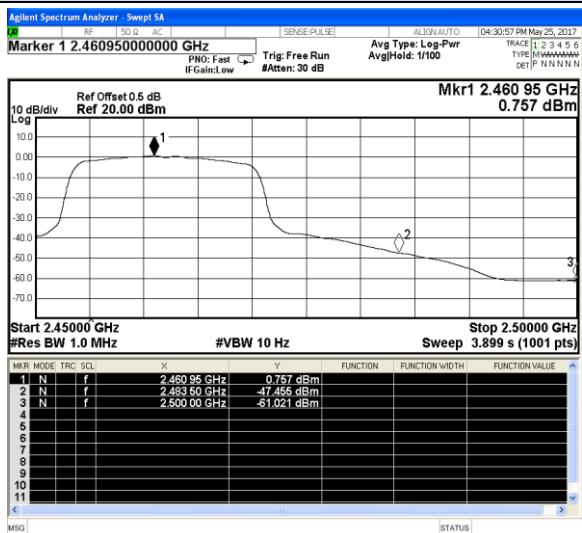


Channel 11 / 2462 MHz – Average

IEEE 802.11n HT20

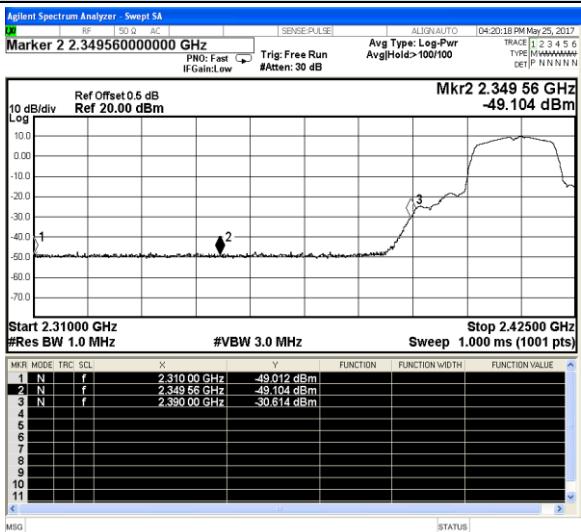


Channel 11 / 2462 MHz – Average


IEEE 802.11n HT40

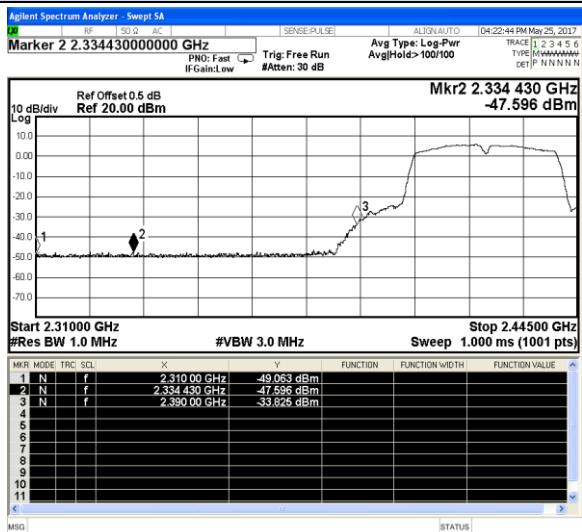

Channel 1 / 2412 MHz – Peak

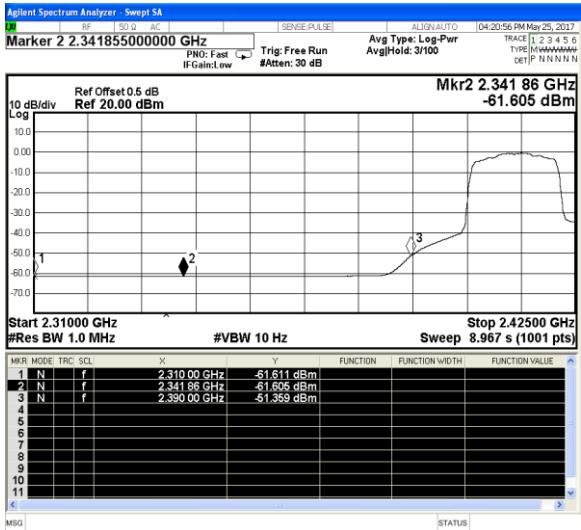

Channel 3 / 2422 MHz – Peak

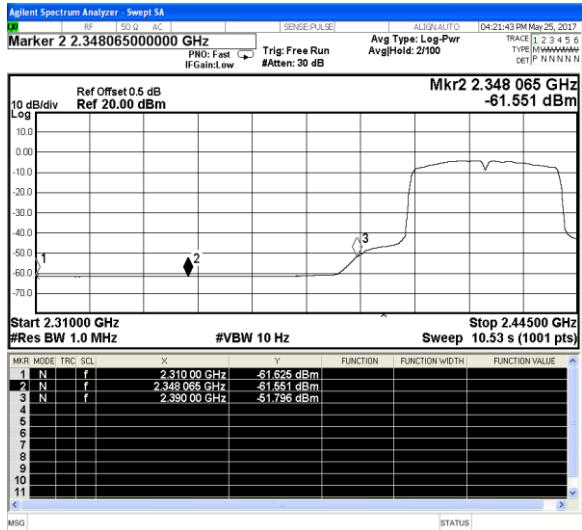



Channel 1 / 2412 MHz – Average

Channel 3 / 2422 MHz – Average


Band-edge measurements for radiated emissions

IEEE 802.11n HT20


IEEE 802.11n HT40

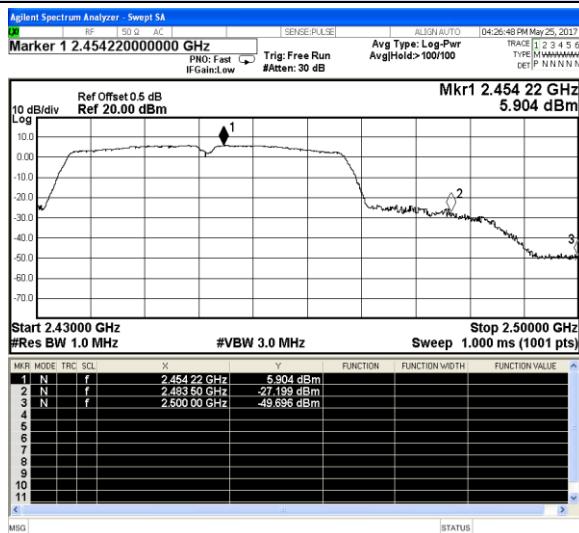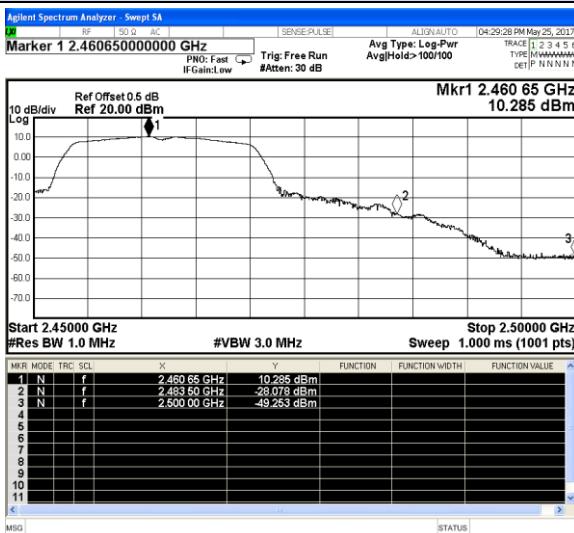

Channel 11 / 2462 MHz – Peak

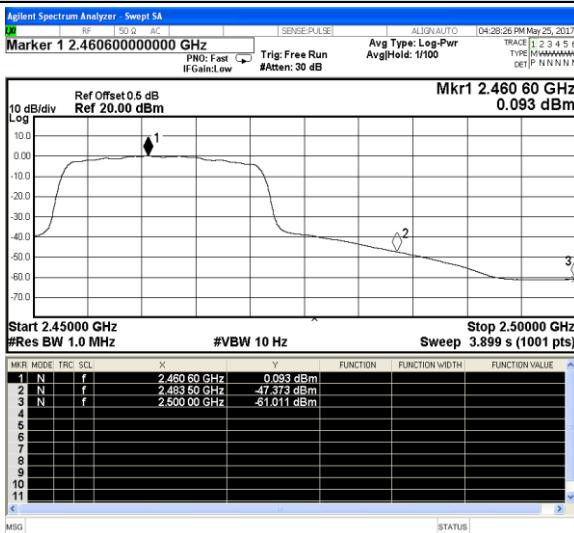



Channel 9 / 2452 MHz – Peak

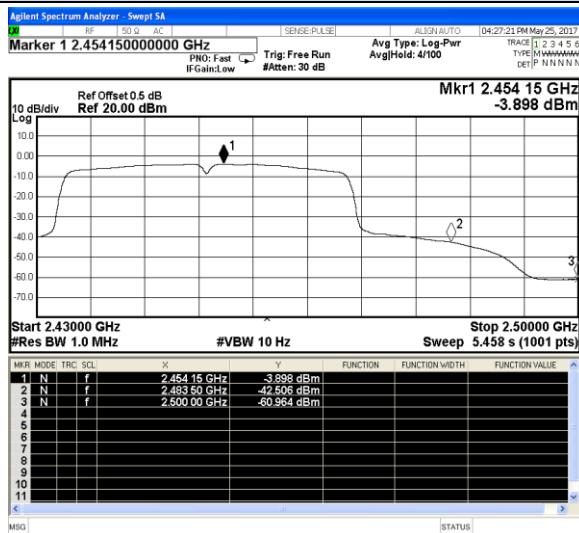

Channel 11 / 2462 MHz – Average

Channel 9 / 2452 MHz – Average

BT LE

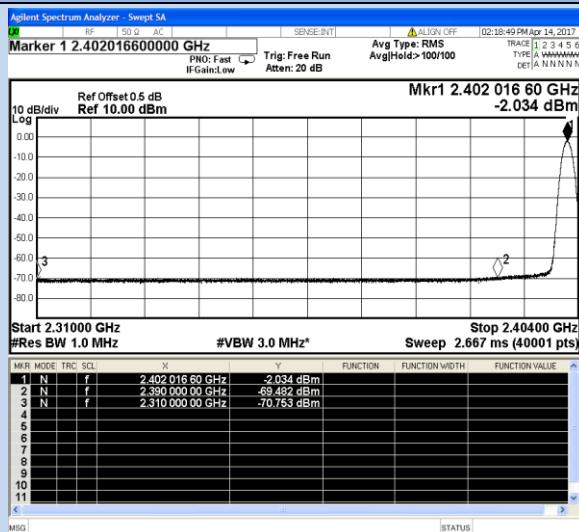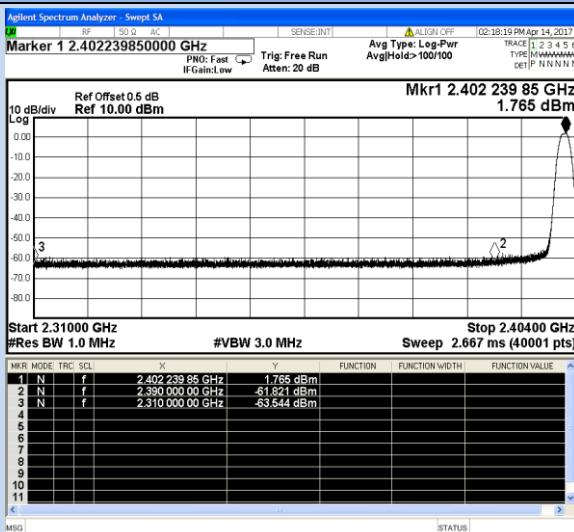


Channel 0 / 2402 MHz – Peak

Channel 0 / 2402 MHz – Average

Band-edge measurements for radiated emissions

BTLE

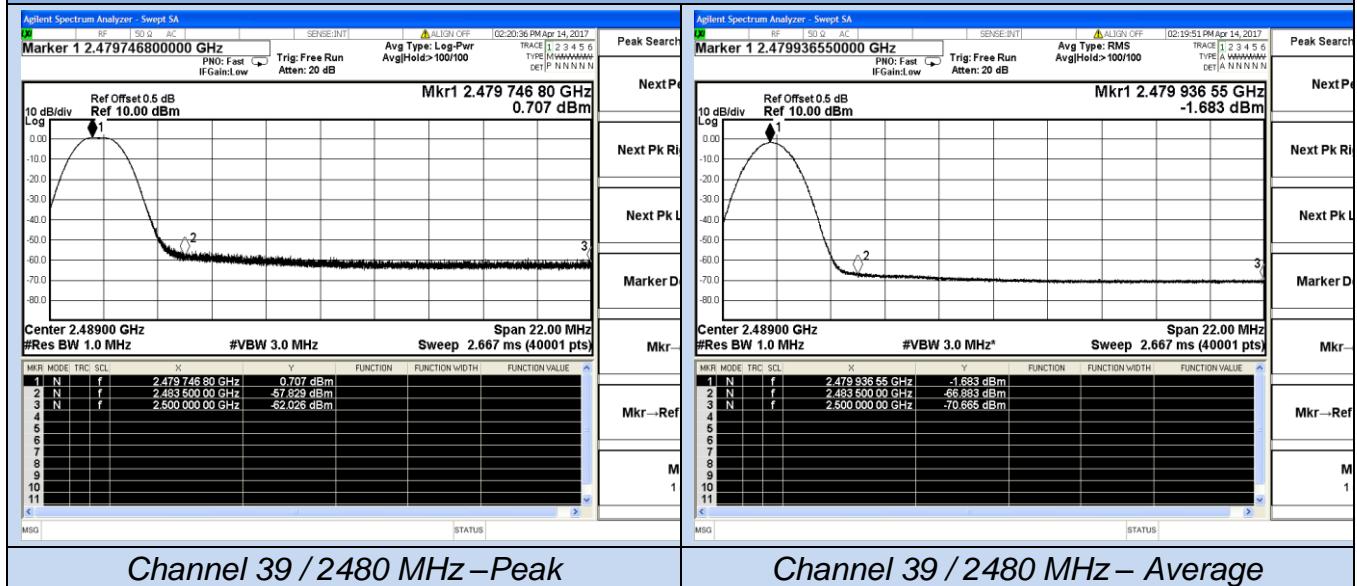

5.9. Antenna Requirements

5.9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2 Antenna Connected Construction

5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.9.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0.5dBi, and the antenna is an R-SMA antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.
The WLAN and BT share same antenna;

5.9.2.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	ISED
Antenna Gain	
6 dBi	

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For WLAN devices, the DSSS mode is used;

T _{nom}	V _{nom}	Lowest Channel 2412 MHz	Middle Channel 2437 MHz	Highest Channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		11.124	11.265	11.346
Radiated power [dBm] Measured with DSSS modulation		11.595	11.700	11.758
Gain [dBi] Calculated		0.471	0.435	0.412
Measurement uncertainty		± 1.6 dB (cond.) / ± 3.8 dB (rad.)		

T _{nom}	V _{nom}	Lowest Channel 2402 MHz	Middle Channel 2440 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with DSSS modulation		1.86	2.81	0.87
Radiated power [dBm] Measured with DSSS modulation		2.330	3.245	1.281
Gain [dBi] Calculated		0.470	0.435	0.411
Measurement uncertainty		± 1.6 dB (cond.) / ± 3.8 dB (rad.)		

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18, 2016	June 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16, 2016	July 15, 2017
Signal analyzer	Agilent	N9020A	MY50510140	9kHz~26.5GHz	October 27, 2016	October 27, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2016	June 17, 2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18, 2016	June 17, 2017
RF CABLE-1m	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18, 2016	June 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18, 2016	June 17, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz 3m	June 18, 2016	June 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18, 2016	June 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16, 2016	July 15, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16, 2016	July 15, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2016	June 17, 2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10, 2016	June 09, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10, 2016	June 09, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA91701 54	15GHz-40GHz	June 10, 2016	June 09, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2016	June 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2016	June 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18, 2016	June 17, 2017
AC Power Source	HPC	HPA-500E	HPA-910002 4	AC 0~300V	June 18, 2016	June 17, 2017
DC power source	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2016	June 17, 2017
Temp. and Humidify Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2016	June 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2016	June 17, 2017
RF CABLE-2m	JYE Bao	RG142	CB35-2m	20MHz-1GHz	June 18, 2016	June 17, 2017
EMC Test Software	Audix	E3	N/A	N/A	N/A	N/A

Note: All equipment through GRGT EST calibration

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Test Setup Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Test Setup Photos of the EUT.

-----THE END OF REPORT-----