

FCC RADIO TEST REPORT

FCC ID: QRP-SP-022

Product: Mobile Phone
Trade Mark: AZUMI
Model No.: V55
Family Model: N/A
Report No.: S20111601501004
Issue Date: 02 Dec, 2020

Prepared for

Azumi S.A
Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza,
Piso 16 of. 16-01, Marbella, Ciudad de Panama, Panama

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China
Tel. 400-800-6106, 0755-3699 5508
Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	9
6.2	SUPPORT EQUIPMENT.....	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
7	TEST REQUIREMENTS.....	12
7.1	FIELD STRENGTH OF SPURIOUS RADIATION	12
7.2	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER.....	23
7.3	CONDUCTED OUTPUT POWER.....	29
7.4	FREQUENCY STABILITY	31
7.5	PEAK-TO-AVERAGE RATIO	38
7.6	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	39
7.7	CONDUCTED BAND EDGE	41
7.8	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	42
8	TEST RESULTS	43
8.1	CONDUCTED OUTPUT POWER.....	43
8.2	PEAK-TO-AVERAGE RATIO	44
8.3	OCCUPIED BANDWIDTH	52
8.4	BAND EDGE.....	60
8.5	OUT-OF-BAND EMISSIONS	66
8.6	CONDUCTED OUTPUT POWER.....	74
8.7	CONDUCTED OUTPUT POWER.....	76
8.8	PEAK-TO-AVERAGE RATIO	78
8.9	OCCUPIED BANDWIDTH	82
8.10	BAND EDGE.....	86
8.11	OUT-OF-BAND EMISSIONS	89
8.12	PEAK-TO-AVERAGE RATIO	93
8.13	OCCUPIED BANDWIDTH	97
8.14	BAND EDGE.....	101
8.15	OUT-OF-BAND EMISSIONS	104

1 TEST RESULT CERTIFICATION

Applicant's name	Azumi S.A
Address	Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panama, Panama
Manufacturer's Name	AZUMI HK LTD
Address	FLAT/RM 18 BLK 1 14/F GOLDEN INDUSTRIAL BUILDING 16-26 KWAI TAK STREET KWAI CHUNG, HK
Product description	
Product name	Mobile Phone
Model and/or type reference	V55
Family Model	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
47 CFR Part 2, Part 22H, Part 24E, Part 27L ANSI/TIA-603-E-2016 FCC KDB 971168 D01 Power Meas License Digital Systems v03r01 ANSI C63.26:2015	Complied


This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 16 Nov. 2020 ~01 Dec, 2020

Testing Engineer : 
(Allen Liu)

Technical Manager : 
(Jason Chen)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS
**FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L,
 KDB 971168 D01 Power Meas License Digital Systems v03r01**

FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(5) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(h) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53(h) KDB 971168 D01 Clause 6	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.
4. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Mobile Phone
Trade Mark	AZUMI
FCC ID	QRP-SP-022
Model No.	V55
Family Model	N/A
Model Difference	N/A
Operating Frequency	☒ GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; ☒ UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; ☒ PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; ☒ UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz; ☒ UMTS-FDD Band IV:TX1710MHz~1755MHz /RX2110MHz~2155MHz
Modulation	☒ GMSK for GSM/GPRS; ☒ 8PSK for EGPRS; ☒ QPSK for UMTS bands;
GPRS Class	☒ Multi-Class12 ☒ Only 4 timeslots are used for GPRS
SIM CARD	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna Type	PIFA Antenna
Antenna Gain	GSM850: 1.25dBi, PCS1900: 1.11dBi, Band II: 1.31dBi, Band V: 1.2dBi, Band IV: 1.19dBi
Power supply	☒ DC supply: DC 3.8V/2500mAh from battery or DC 5V from Adapter.
	☒ Adapter supply: Input: 100-240V~50-60Hz 0.2A Output: 5.0V---1A
HW Version	AZUMI_V55_OM_LATAM_V001
SW Version	AZUMI_V55_HW_V1.0

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. The High Voltage 4.4V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Revision History

Report No.	Version	Description	Issued Date
S20111601501004	Rev.01	Initial issue of report	02 Dec, 2020

5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on all frequency band.

Note: GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, RMC 12.2k band II, HSDPA band V, HSUPA band V, RMC 12.2k band V, HSDPA band IV, HSUPA band IV. RMC 12.2k HSDPA band IV, modes have been tested during the test. the worst condition (GSM850, GSM1900, RMC 12.2k) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V/ UMTS FDD Band IV.
2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	For Conducted Test Cases	For Radiated Test Cases
GSM 850	GSM Link	GSM Link
GSM 1900	GSM Link	GSM Link
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band IV	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Test Frequency and Channels:


Frequency Band	☒ GSM 850		☒ GSM 1900		☒ UMTS Band II		☒ UMTS Band V	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	189	836.4	661	1880.0	9400	1880.0	4182	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4

Frequency Band	☒ UMTS Band IV	
	Channel	Frequency (MHz)
CH_H	1513	1752.6
CH_M	1412	1732.4
CH_L	1312	1712.4


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For Radiated Test Cases

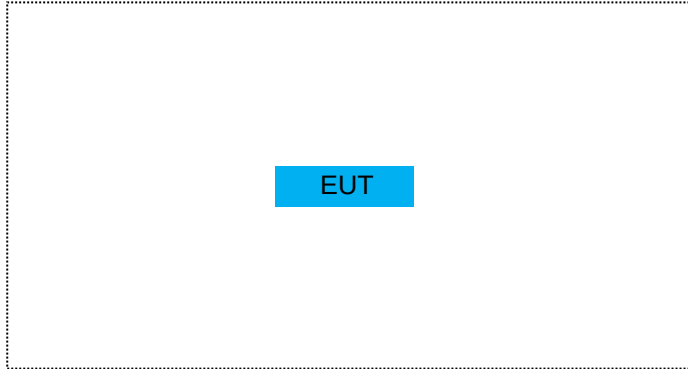


For Conducted Output Power

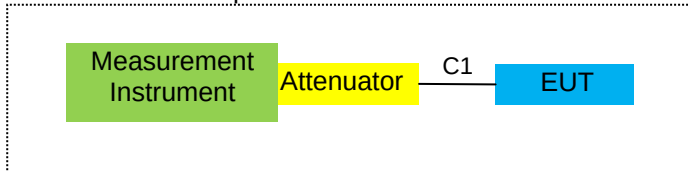

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

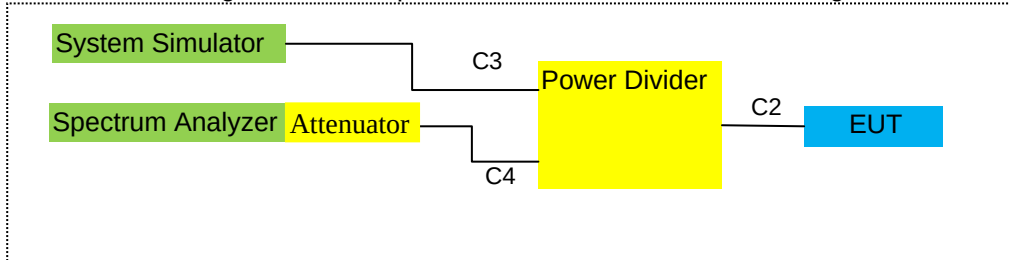

For Frequency Stability

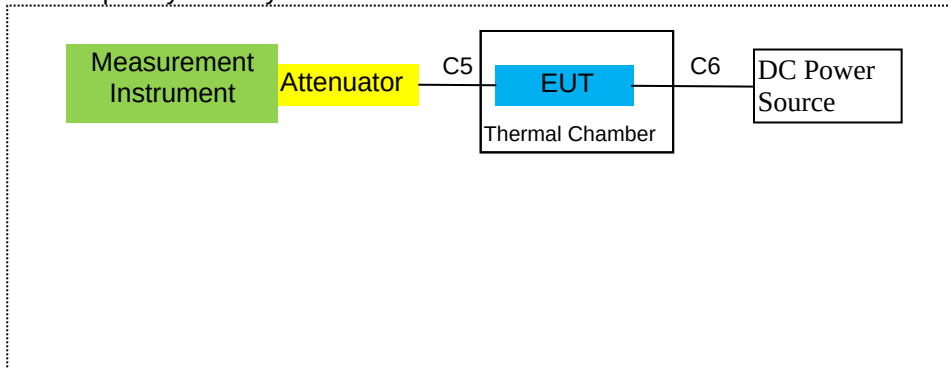

Note: EUT built-in battery-powered, the battery is fully-charged.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	0.1m
C-2	RF Cable	YES	NO	0.1m
C-3	RF Cable	YES	NO	0.1m
C-4	RF Cable	YES	NO	0.2m
C-5	RF Cable	YES	NO	0.2m
C-6	DC Cable	NO	NO	1.0m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2020.07.13	2021.07.12	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.12.10	2020.12.09	1 year
7	Amplifier	EM	EM-30180	060538	2020.07.13	2021.07.12	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2020.07.13	2021.07.12	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2020.07.13	2021.07.12	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	3 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2021.05.10	1 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2020.07.13	2021.07.12	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year
27	DC Power Source	N/A	PS-6005D	20170402923	2019.08.06	2022.08.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 FIELD STRENGTH OF SPURIOUS RADIATION

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI/TIA-603-E-2016 Section 2.2.12

7.1.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.1.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II / WCDMA Band V / WCDMA Band IV / GSM 850 / GSM 1900.

TEST CONFIGURATION

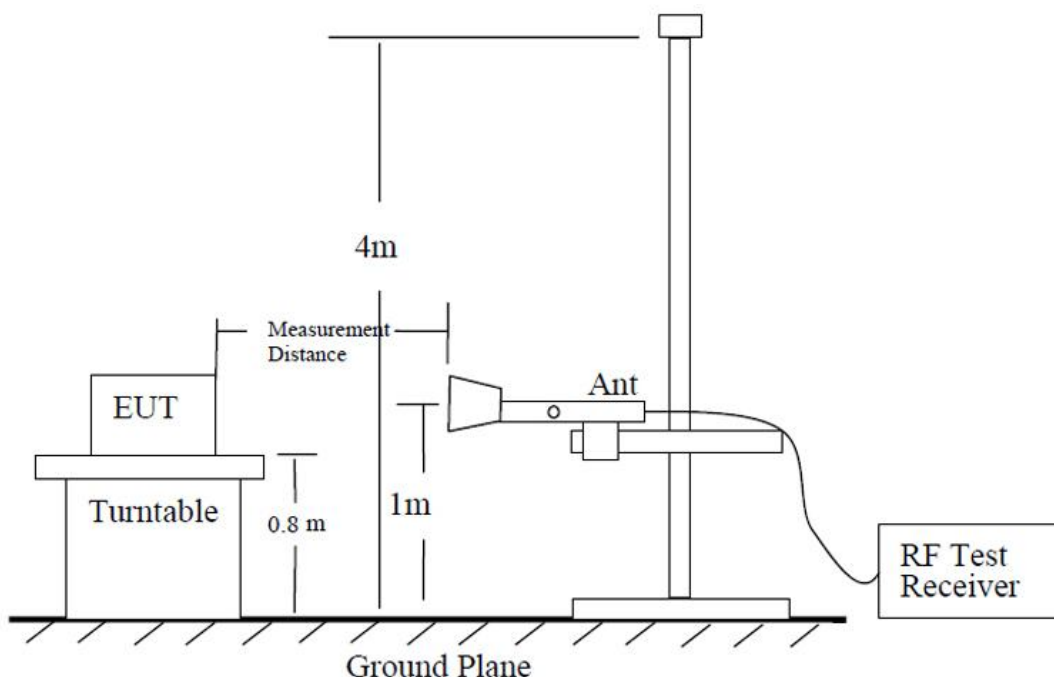

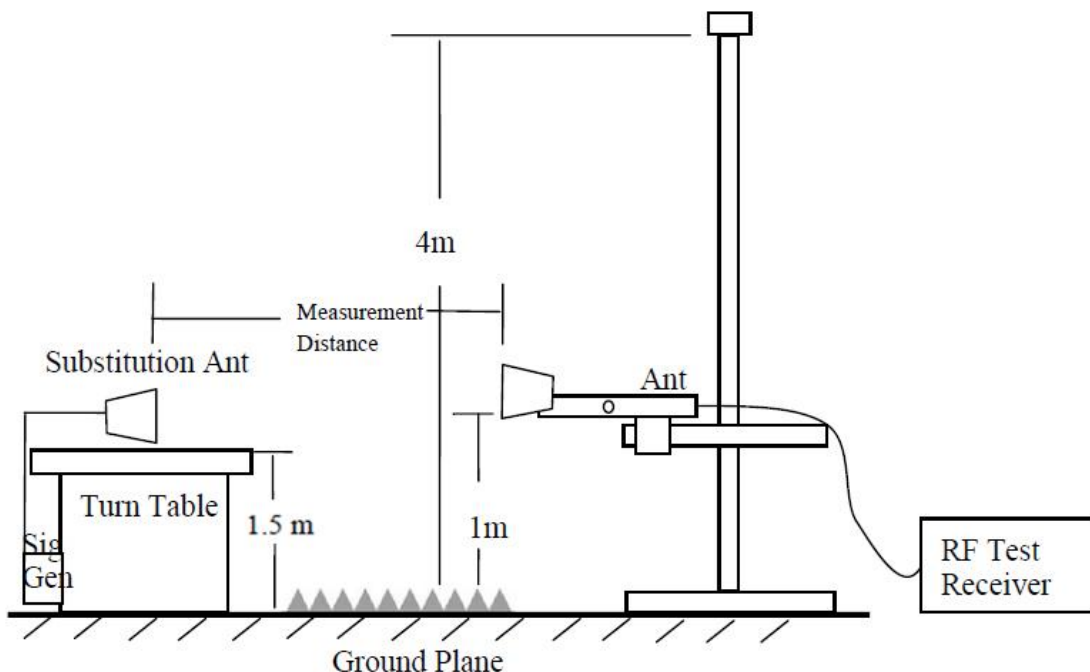

7.1.5 Test Procedure

1. EUT was placed on a 0.8 meter (For frequency above 1G, EUT should be placed on 1.5m) high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (SG Level) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (SG Level) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Cable Loss) ,the Substitution Antenna Gain should be recorded after test.
The measurement results are obtained as described below:
 $\text{Power(EIRP)} = \text{SG Level} - \text{Cable Loss} + \text{Antenna Gain}$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

7.1.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

■ Radiated Spurious Emission

GSM 850							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-47.87	2.80	27.50	-23.17	-13	-10.17	Vertical
1648.4	-46.76	2.80	27.50	-22.06	-13	-9.06	Horizontal
2472.6	-53.46	2.91	27.80	-28.57	-13	-15.57	Vertical
2472.6	-48.07	2.91	27.80	-23.18	-13	-10.18	Horizontal
3296.8	-46.02	4.02	29.87	-20.17	-13	-7.17	Vertical
3296.8	-51.61	4.02	29.87	-25.76	-13	-12.76	Horizontal
131.2	-49.42	1.35	17.77	-33.00	-13	-20.00	Vertical
116.8	-46.13	1.77	17.83	-30.07	-13	-17.07	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-45.48	2.80	27.48	-20.80	-13	-7.80	Vertical
1673.2	-44.86	2.80	27.48	-20.18	-13	-7.18	Horizontal
2509.8	-45.89	2.91	27.70	-21.10	-13	-8.10	Vertical
2509.8	-48.91	2.91	27.70	-24.12	-13	-11.12	Horizontal
3346.4	-53.7	4.02	29.82	-27.90	-13	-14.90	Vertical
3346.4	-53.49	4.02	29.82	-27.69	-13	-14.69	Horizontal
208.8	-48.6	1.44	15.26	-34.79	-13	-21.79	Vertical
131.6	-47.6	1.51	17.23	-31.88	-13	-18.88	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-48.04	2.80	27.42	-23.42	-13	-10.42	Vertical
1697.6	-47.67	2.80	27.42	-23.05	-13	-10.05	Horizontal
2546.4	-51.23	2.91	27.68	-26.46	-13	-13.46	Vertical
2546.4	-47.48	2.91	27.68	-22.71	-13	-9.71	Horizontal
3395.2	-46.68	4.02	29.80	-20.90	-13	-7.90	Vertical
3395.2	-46.24	4.02	29.80	-20.46	-13	-7.46	Horizontal
95.0	-44.64	1.74	16.46	-29.92	-13	-16.92	Vertical
208.3	-51.31	1.68	16.21	-36.78	-13	-23.78	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GPRS 850							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-47.48	2.80	27.50	-22.78	-13	-9.78	Vertical
1648.4	-51.73	2.80	27.50	-27.03	-13	-14.03	Horizontal
2472.6	-45.39	2.91	27.80	-20.50	-13	-7.50	Vertical
2472.6	-53.46	2.91	27.80	-28.57	-13	-15.57	Horizontal
3296.8	-47.75	4.02	29.87	-21.90	-13	-8.90	Vertical
3296.8	-46.59	4.02	29.87	-20.74	-13	-7.74	Horizontal
154.8	-50.63	1.35	16.91	-35.07	-13	-22.07	Vertical
238.4	-52.51	1.59	17.39	-36.70	-13	-23.70	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-46.42	2.80	27.48	-21.74	-13	-8.74	Vertical
1673.2	-52.17	2.80	27.48	-27.49	-13	-14.49	Horizontal
2509.8	-46.27	2.91	27.70	-21.48	-13	-8.48	Vertical
2509.8	-47.64	2.91	27.70	-22.85	-13	-9.85	Horizontal
3346.4	-49.35	4.02	29.82	-23.55	-13	-10.55	Vertical
3346.4	-47.38	4.02	29.82	-21.58	-13	-8.58	Horizontal
110.1	-44.65	1.36	17.36	-28.65	-13	-15.65	Vertical
148.2	-51.43	1.32	15.19	-37.57	-13	-24.57	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-45.95	2.80	27.42	-21.33	-13	-8.33	Vertical
1697.6	-51.02	2.80	27.42	-26.40	-13	-13.40	Horizontal
2546.4	-45.34	2.91	27.68	-20.57	-13	-7.57	Vertical
2546.4	-52.84	2.91	27.68	-28.07	-13	-15.07	Horizontal
3395.2	-46.69	4.02	29.80	-20.91	-13	-7.91	Vertical
3395.2	-46.77	4.02	29.80	-20.99	-13	-7.99	Horizontal
198.1	-45.67	1.46	17.68	-29.45	-13	-16.45	Vertical
220.2	-49.91	1.31	15.79	-35.43	-13	-22.43	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

EGPRS 850							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-46.41	2.80	27.50	-21.71	-13	-8.71	Vertical
1648.4	-45.96	2.80	27.50	-21.26	-13	-8.26	Horizontal
2472.6	-48.46	2.91	27.80	-23.57	-13	-10.57	Vertical
2472.6	-46.54	2.91	27.80	-21.65	-13	-8.65	Horizontal
3296.8	-45.9	4.02	29.87	-20.05	-13	-7.05	Vertical
3296.8	-45.62	4.02	29.87	-19.77	-13	-6.77	Horizontal
116.4	-46.94	1.69	16.60	-32.03	-13	-19.03	Vertical
166.1	-53.94	1.44	17.78	-37.59	-13	-24.59	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-50.31	2.80	27.48	-25.63	-13	-12.63	Vertical
1673.2	-51.52	2.80	27.48	-26.84	-13	-13.84	Horizontal
2509.8	-45.09	2.91	27.70	-20.30	-13	-7.30	Vertical
2509.8	-51.73	2.91	27.70	-26.94	-13	-13.94	Horizontal
3346.4	-45.48	4.02	29.82	-19.68	-13	-6.68	Vertical
3346.4	-51.01	4.02	29.82	-25.21	-13	-12.21	Horizontal
160.1	-46.92	1.54	16.14	-32.33	-13	-19.33	Vertical
246.5	-50.29	1.31	17.24	-34.36	-13	-21.36	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-48.47	2.80	27.42	-23.85	-13	-10.85	Vertical
1697.6	-45.28	2.80	27.42	-20.66	-13	-7.66	Horizontal
2546.4	-46.53	2.91	27.68	-21.76	-13	-8.76	Vertical
2546.4	-51.37	2.91	27.68	-26.60	-13	-13.60	Horizontal
3395.2	-53.77	4.02	29.80	-27.99	-13	-14.99	Vertical
3395.2	-52.6	4.02	29.80	-26.82	-13	-13.82	Horizontal
272.1	-51.21	1.73	15.96	-36.98	-13	-23.98	Vertical
163.9	-50	1.35	17.53	-33.82	-13	-20.82	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GSM 1900							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-47.69	4.04	33.51	-18.22	-13	-5.22	Vertical
3700.4	-52.7	4.04	33.51	-23.23	-13	-10.23	Horizontal
5550.6	-52.19	5.24	35.84	-21.59	-13	-8.59	Vertical
5550.6	-48.94	5.24	35.84	-18.34	-13	-5.34	Horizontal
105.3	-50.96	1.40	15.14	-37.22	-13	-24.22	Vertical
247.6	-49.45	1.45	17.54	-33.36	-13	-20.36	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-44.95	4.04	33.56	-15.43	-13	-2.43	Vertical
3760	-48.44	4.04	33.56	-18.92	-13	-5.92	Horizontal
5640	-49.17	5.24	35.91	-18.50	-13	-5.50	Vertical
5640	-47.3	5.24	35.91	-16.63	-13	-3.63	Horizontal
187.9	-44.51	1.74	16.40	-29.85	-13	-16.85	Vertical
86.7	-47.15	1.42	15.72	-32.84	-13	-19.84	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-51.14	4.04	34.00	-21.18	-13	-8.18	Vertical
3819.6	-46.01	4.04	34.00	-16.05	-13	-3.05	Horizontal
5729.4	-50.6	5.24	36.04	-19.80	-13	-6.80	Vertical
5729.4	-51.57	5.24	36.04	-20.77	-13	-7.77	Horizontal
217.3	-44.68	1.67	17.51	-28.84	-13	-15.84	Vertical
112.7	-51.97	1.58	17.73	-35.82	-13	-22.82	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GPRS 1900							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-51.05	4.04	33.51	-21.58	-13	-8.58	Vertical
3700.4	-46.77	4.04	33.51	-17.30	-13	-4.30	Horizontal
5550.6	-48.37	5.24	35.84	-17.77	-13	-4.77	Vertical
5550.6	-45.06	5.24	35.84	-14.46	-13	-1.46	Horizontal
249.9	-53.7	1.66	17.06	-38.31	-13	-25.31	Vertical
237.9	-52.53	1.34	15.54	-38.33	-13	-25.33	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-46.4	4.04	33.56	-16.88	-13	-3.88	Vertical
3760	-46.9	4.04	33.56	-17.38	-13	-4.38	Horizontal
5640	-47.74	5.24	35.91	-17.07	-13	-4.07	Vertical
5640	-51.46	5.24	35.91	-20.79	-13	-7.79	Horizontal
168.5	-53.19	1.33	16.18	-38.34	-13	-25.34	Vertical
249.4	-50.85	1.60	17.99	-34.46	-13	-21.46	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-50.2	4.04	34.00	-20.24	-13	-7.24	Vertical
3819.6	-49.62	4.04	34.00	-19.66	-13	-6.66	Horizontal
5729.4	-46.2	5.24	36.04	-15.40	-13	-2.40	Vertical
5729.4	-49.36	5.24	36.04	-18.56	-13	-5.56	Horizontal
206.6	-47.16	1.65	17.27	-31.55	-13	-18.55	Vertical
227.8	-45.99	1.39	15.49	-31.90	-13	-18.90	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

EGPRS 1900							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-47.55	4.04	33.51	-18.08	-13	-5.08	Vertical
3700.4	-47.41	4.04	33.51	-17.94	-13	-4.94	Horizontal
5550.6	-48.85	5.24	35.84	-18.25	-13	-5.25	Vertical
5550.6	-48.74	5.24	35.84	-18.14	-13	-5.14	Horizontal
224.9	-49.82	1.41	17.87	-33.36	-13	-20.36	Vertical
105.4	-45.92	1.47	17.45	-29.95	-13	-16.95	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-52.76	4.04	33.56	-23.24	-13	-10.24	Vertical
3760	-53.48	4.04	33.56	-23.96	-13	-10.96	Horizontal
5640	-52.93	5.24	35.91	-22.26	-13	-9.26	Vertical
5640	-47.9	5.24	35.91	-17.23	-13	-4.23	Horizontal
110.0	-44.07	1.35	15.31	-30.12	-13	-17.12	Vertical
231.5	-46.16	1.48	17.05	-30.59	-13	-17.59	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-50.47	4.04	34.00	-20.51	-13	-7.51	Vertical
3819.6	-46.69	4.04	34.00	-16.73	-13	-3.73	Horizontal
5729.4	-51.86	5.24	36.04	-21.06	-13	-8.06	Vertical
5729.4	-46.97	5.24	36.04	-16.17	-13	-3.17	Horizontal
156.0	-47.16	1.49	17.71	-30.94	-13	-17.94	Vertical
144.9	-49.48	1.55	15.08	-35.95	-13	-22.95	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band II							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 9262/1852.4MHz							
3704.8	-52.09	4.04	33.51	-22.62	-13	-9.62	Vertical
3704.8	-48.78	4.04	33.51	-19.31	-13	-6.31	Horizontal
5557.2	-51.45	5.24	35.84	-20.85	-13	-7.85	Vertical
5557.2	-50.99	5.24	35.84	-20.39	-13	-7.39	Horizontal
91.6	-47.63	1.66	17.47	-31.82	-13	-18.82	Vertical
104.4	-50.29	1.38	16.18	-35.49	-13	-22.49	Horizontal
Test Results for Channel 9400/1880MHz							
3760	-53.99	4.04	33.56	-24.47	-13	-11.47	Vertical
3760	-52.53	4.04	33.56	-23.01	-13	-10.01	Horizontal
5640	-49.49	5.24	35.91	-18.82	-13	-5.82	Vertical
5640	-53.57	5.24	35.91	-22.90	-13	-9.90	Horizontal
121.2	-48.47	1.38	16.34	-33.51	-13	-20.51	Vertical
167.8	-50.07	1.34	16.03	-35.38	-13	-22.38	Horizontal
Test Results for Channel 9538/1907.6MHz							
3815.2	-52.2	4.04	34.00	-22.24	-13	-9.24	Vertical
3815.2	-46.63	4.04	34.00	-16.67	-13	-3.67	Horizontal
5722.8	-51.88	5.24	36.04	-21.08	-13	-8.08	Vertical
5722.8	-44.96	5.24	36.04	-14.16	-13	-1.16	Horizontal
135.9	-51.39	1.51	15.52	-37.38	-13	-24.38	Vertical
247.5	-45.23	1.32	17.18	-29.38	-13	-16.38	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band V							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 4233/846.6MHz							
1693.2	-48.67	2.80	27.50	-23.97	-13	-10.97	Vertical
1693.2	-52.09	2.80	27.50	-27.39	-13	-14.39	Horizontal
2539.8	-46.12	2.91	27.80	-21.23	-13	-8.23	Vertical
2539.8	-50.9	2.91	27.80	-26.01	-13	-13.01	Horizontal
3386.4	-50.41	4.02	29.87	-24.56	-13	-11.56	Vertical
3386.4	-53.24	4.02	29.87	-27.39	-13	-14.39	Horizontal
264.3	-53.96	1.75	15.49	-40.22	-13	-27.22	Vertical
209.9	-48.15	1.37	16.58	-32.94	-13	-19.94	Horizontal
Test Results for Channel 4182/836.4MHz							
1672.8	-45.99	2.80	27.48	-21.31	-13	-8.31	Vertical
1672.8	-48.68	2.80	27.48	-24.00	-13	-11.00	Horizontal
2509.2	-49.12	2.91	27.70	-24.33	-13	-11.33	Vertical
2509.2	-52.9	2.91	27.70	-28.11	-13	-15.11	Horizontal
3345.6	-49.31	4.02	29.82	-23.51	-13	-10.51	Vertical
3345.6	-50	4.02	29.82	-24.20	-13	-11.20	Horizontal
255.8	-48.04	1.68	17.84	-31.88	-13	-18.88	Vertical
129.8	-51.07	1.49	16.34	-36.21	-13	-23.21	Horizontal
Test Results for Channel 4132/826.4MHz							
1652.8	-44.17	2.80	27.42	-19.55	-13	-6.55	Vertical
1652.8	-52.41	2.80	27.42	-27.79	-13	-14.79	Horizontal
2479.2	-47.47	2.91	27.68	-22.70	-13	-9.70	Vertical
2479.2	-44.15	2.91	27.68	-19.38	-13	-6.38	Horizontal
3305.6	-50.9	4.02	29.80	-25.12	-13	-12.12	Vertical
3305.6	-51.96	4.02	29.80	-26.18	-13	-13.18	Horizontal
135.6	-47.42	1.36	17.52	-31.26	-13	-18.26	Vertical
190.6	-49.06	1.63	15.02	-35.67	-13	-22.67	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band IV							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 1312/1712.4MHz							
3424.8	-44.69	4.02	29.80	-18.91	-13	-5.91	Vertical
3424.8	-50.11	4.02	29.80	-24.33	-13	-11.33	Horizontal
5137.2	-52.72	5.24	35.84	-22.12	-13	-9.12	Vertical
5137.2	-50.79	5.24	35.84	-20.19	-13	-7.19	Horizontal
81.8	-46.44	1.66	15.00	-33.10	-13	-20.10	Vertical
115.1	-45.88	1.58	16.20	-31.26	-13	-18.26	Horizontal
Test Results for Channel 1412/1732.4MHz							
3464.8	-52.68	4.03	30.00	-26.71	-13	-13.71	Vertical
3464.8	-49.73	4.03	30.00	-23.76	-13	-10.76	Horizontal
5197.2	-53.18	5.25	35.86	-22.57	-13	-9.57	Vertical
5197.2	-52.45	5.25	35.86	-21.84	-13	-8.84	Horizontal
246.8	-47.96	1.55	16.39	-33.11	-13	-20.11	Vertical
101.0	-52.83	1.32	16.25	-37.90	-13	-24.90	Horizontal
Test Results for Channel 1513/1752.6MHz							
3505.2	-53.39	2.91	27.68	-28.62	-13	-15.62	Vertical
3505.2	-47.34	2.91	27.68	-22.57	-13	-9.57	Horizontal
5257.8	-52.05	5.26	35.86	-21.45	-13	-8.45	Vertical
5257.8	-51.85	5.26	35.86	-21.25	-13	-8.25	Horizontal
199.0	-50.7	1.33	15.78	-36.25	-13	-23.25	Vertical
193.1	-53.59	1.47	17.42	-37.64	-13	-24.64	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Factor
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

7.2 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v03r01 Section 5.2.1/ Section 5.2.2.2 and ANSI/TIA-603-E-2016 Section 2.2.17

7.2.2 Conformance Limit

The substitution method, in ANSI/TIA-603-E-2016, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band), and the EIRP of mobile transmitters are limited to 1 Watts (PCS Band)

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

Reference 7.1.4

7.2.5 Test Procedure

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$ERP/EIRP = SGLevel - P_{cl} + G_a$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

G_a = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

P_{cl} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

	GSM/GPRS/EGPRS	UMTS band
Span	500KHz	10MHz
RBW	10KHz	300KHz
VBW	30KHz	1MHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

7.2.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

■ Effective Radiated Power

Radiated Power (ERP) for GSM850							
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	13.71	2.11	23.84	2.15	33.29	2.133045
836.6	H	14.57	2.13	23.15	2.15	33.44	2.208005
848.8	H	14.69	2.13	23.06	2.15	33.47	2.223310
824.2	V	14.10	2.11	23.11	2.15	32.95	1.972423
836.6	V	14.66	2.13	23.07	2.15	33.45	2.213095
848.8	V	13.84	2.13	23.25	2.15	32.81	1.909853

Radiated Power (ERP) for GPRS850							
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	13.97	2.11	23.84	2.15	33.55	2.264644
836.6	H	14.56	2.13	23.15	2.15	33.43	2.202926
848.8	H	14.69	2.13	23.06	2.15	33.47	2.223310
824.2	V	14.30	2.11	23.11	2.15	33.15	2.065380
836.6	V	14.13	2.13	23.07	2.15	32.92	1.958845
848.8	V	13.86	2.13	23.25	2.15	32.83	1.918669

Radiated Power (ERP) for EGPRS850							
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	9.34	2.11	23.84	2.15	28.92	0.779830
836.6	H	9.98	2.13	23.15	2.15	28.85	0.767361
848.8	H	9.70	2.13	23.06	2.15	28.48	0.704693
824.2	V	10.64	2.11	23.11	2.15	29.49	0.889201
836.6	V	9.53	2.13	23.07	2.15	28.32	0.679204
848.8	V	10.30	2.13	23.25	2.15	29.27	0.845279

Radiated Power (ERP) for UMTS band V							
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
826.4	H	5.34	2.11	23.84	2.15	24.92	0.310456
835	H	5.96	2.13	23.15	2.15	24.83	0.304089
846.6	H	5.78	2.13	23.06	2.15	24.56	0.285759
826.4	V	5.86	2.11	23.11	2.15	24.71	0.295801
835	V	5.61	2.13	23.07	2.15	24.40	0.275423
846.6	V	5.14	2.13	23.25	2.15	24.11	0.257632

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Factor Gain

Peak EIRP(dBm)= SGLevel -Pcl +Ga

ERP(dBm)=EIRP-2.15

■ Effective Isotropic Radiated Power

Radiated Power (E.I.R.P) for GSM1900						
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	7.68	3.76	28.24	32.16	1.644372
1880	H	8.07	3.91	28.22	32.38	1.729816
1909.8	H	8.09	3.93	28.20	32.36	1.721869
1850.2	V	8.97	3.76	27.32	32.53	1.790606
1880	V	9.18	3.91	27.33	32.60	1.819701
1909.8	V	9.05	3.93	27.31	32.43	1.749847

Radiated Power (E.I.R.P) for GPRS1900						
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	7.67	3.76	28.24	32.15	1.640590
1880	H	8.07	3.91	28.22	32.38	1.729816
1909.8	H	8.07	3.93	28.20	32.34	1.713957
1850.2	V	8.88	3.76	27.32	32.44	1.753881
1880	V	8.50	3.91	27.33	31.92	1.555966
1909.8	V	8.96	3.93	27.31	32.34	1.713957

Radiated Power (E.I.R.P) for EGPRS1900						
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	3.86	3.76	28.24	28.34	0.682339
1880	H	4.23	3.91	28.22	28.54	0.714496
1909.8	H	4.16	3.93	28.20	28.43	0.696627
1850.2	V	4.38	3.76	27.32	27.94	0.622300
1880	V	4.68	3.91	27.33	28.10	0.645654
1909.8	V	4.75	3.93	27.31	28.13	0.650130

Radiated Power (E.I.R.P) for UMTS band II						
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1852.4	H	1.24	3.76	28.24	25.72	0.373250
1880	H	1.40	3.91	28.22	25.71	0.372392
1907.6	H	1.60	3.93	28.20	25.87	0.386367
1852.4	V	1.68	3.76	27.32	25.24	0.334195
1880	V	2.96	3.91	27.33	26.38	0.434510
1907.6	V	3.31	3.93	27.31	26.69	0.466659

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel –Pcl+Ga.

Radiated Power (E.I.R.P) for UMTS band IV						
Frequency	Polarization	SG Level	Pcl	Ga Factor Gain	EIRP	EIRP
(MHz)		(dBm)				
1712.4	H	0.06	3.13	27.63	24.56	0.285759
1732.4	H	0.26	3.27	27.61	24.60	0.288403
1752.6	H	0.36	3.30	27.60	24.66	0.292415
1712.4	V	0.09	3.13	27.63	24.59	0.287740
1732.4	V	0.35	3.27	27.61	24.69	0.294442
1752.6	V	0.23	3.30	27.60	24.53	0.283792

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Factor Gain

Peak EIRP(dBm)= SGLevel –Pcl+Ga.

7.3 CONDUCTED OUTPUT POWER

7.3.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC Part 24.232(c) and FCC KDB 971168 D01 v03r01 Section 5.2

7.3.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

7.3.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

Test data reference attachment

7.4 FREQUENCY STABILITY

7.4.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC Part 24.235 and FCC KDB 971168 D01 Section 9.0

7.4.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

1. The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

7.4.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	9.08	0.010856
3.8	9.37	0.011203
4.4	8.72	0.010426

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	4.43	0.005297
-20	9.04	0.010808
-10	7.29	0.008716
0	6.36	0.007604
10	6.21	0.007425
20	8.33	0.009959
30	7.16	0.008560
40	7.72	0.009230
50	10.86	0.012984

Frequency Error Against Voltage for GPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	7.56	0.009039
3.8	8.56	0.010234
4.4	9.55	0.011418

Frequency Error Against Temperature for GPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	9.87	0.011801
-20	9.17	0.010964
-10	7.91	0.009457
0	6.5	0.007771
10	8.28	0.009900
20	6.33	0.007568
30	8.15	0.009744
40	9.18	0.010976
50	12.5	0.014945

Frequency Error Against Voltage for EGPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	9.39	0.011227
3.8	8.15	0.009744
4.4	8.91	0.010653

Frequency Error Against Temperature for EGPRS850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	7.53	0.009003
-20	6.35	0.007592
-10	8.28	0.009900
0	6.13	0.007329
10	7.36	0.008800
20	9.42	0.011263
30	7.94	0.009493
40	6.31	0.007544
50	10.19	0.012183

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	16.27	0.008654
3.8	17.62	0.009372
4.4	16.72	0.008894

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	20.76	0.011043
-20	20.85	0.011090
-10	17.15	0.009122
0	16.74	0.008904
10	16.37	0.008707
20	16.89	0.008984
30	17.42	0.009266
40	19.76	0.010511
50	23.07	0.012271

Frequency Error Against Voltage for GPRS1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	20.14	0.010713
3.8	18.73	0.009963
4.4	19.76	0.010511

Frequency Error Against Temperature for GPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	19.99	0.010633
-20	16.72	0.008894
-10	16.15	0.008590
0	19.69	0.010473
10	17.2	0.009149
20	17.94	0.009543
30	17.68	0.009404
40	20.26	0.010777
50	23.39	0.012441

Frequency Error Against Voltage for EGPRS1900 band

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	20.63	0.010973
3.8	16.37	0.008707
4.4	16.69	0.008878

Frequency Error Against Temperature for EGPRS1900 band

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	21.17	0.011261
-20	17.77	0.009452
-10	16.49	0.008771
0	16.5	0.008777
10	20.04	0.010660
20	17.81	0.009473
30	17.88	0.009511
40	17.23	0.009165
50	21.41	0.011388

Frequency Error Against Voltage for UMTS band II		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-17.74	-0.009436
3.8	-19.47	-0.010356
4.4	-16.88	-0.008979

Frequency Error Against Temperature for UMTS band II		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-17	-0.009043
-20	-16.1	-0.008564
-10	-15.01	-0.007984
0	-15.97	-0.008495
10	-16.13	-0.008580
20	-19.96	-0.010617
30	-17.4	-0.009255
40	-19.2	-0.010213
50	-21.86	-0.011628

Frequency Error Against Voltage for UMTS band V		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-19.37	-0.023159
3.8	-15.44	-0.018460
4.4	-17.73	-0.021198

Frequency Error Against Temperature for UMTS band V		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-19.04	-0.022764
-20	-19.04	-0.022764
-10	-19.03	-0.022752
0	-19.4	-0.023195
10	-17.1	-0.020445
20	-18	-0.021521
30	-19.7	-0.023553
40	-15.14	-0.018101
50	-24.15	-0.028874

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band IV

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-15.51	-0.008953
3.8	-14.72	-0.008497
4.4	-19.21	-0.011089

Frequency Error Against Temperature for UMTS band IV

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-9.92	-0.005726
-20	-14.46	-0.008347
-10	-10.2	-0.005888
0	-10.24	-0.005911
10	-15.35	-0.008861
20	-17.07	-0.009853
30	-15.48	-0.008936
40	-17.54	-0.010125
50	-19.05	-0.010996

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

7.5 PEAK-TO-AVERAGE RATIO

7.5.1 Applicable Standard

According to FCC 22.913 and FCC 24.232(d) and FCC KDB 971168 D01 Section 5.7.1

7.5.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

7.5.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Test data reference attachment

7.6 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.6.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC Part 24E and FCC KDB 971168 D01 Section 4.0

7.6.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 971168 v03r01 Section 4.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.6.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Test data reference attachment

7.7 CONDUCTED BAND EDGE

7.7.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and 24.238(a) and FCC KDB 971168 D01 Section 6.0

7.7.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v03r01 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$

$$= -13 \text{ dBm.}$$

7.7.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Test data reference attachment

7.8 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and Part 24.238(a) and FCC KDB 971168 D01 Section 6.0

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v03r01 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$

$$= -13 \text{ dBm.}$$

7.8.6 Test Results

EUT:	Mobile Phone	Model No.:	V55
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Test data reference attachment

8 TEST RESULTS


8.1 CONDUCTED OUTPUT POWER

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
WCDMA Band2	9262	1852.4	22.69	PASS
WCDMA Band2	9400	1880	22.75	PASS
WCDMA Band2	9538	1907.6	22.73	PASS
WCDMA Band4	1312	1712.4	22.51	PASS
WCDMA Band4	1450	1740	22.53	PASS
WCDMA Band4	1513	1752.6	22.59	PASS
WCDMA Band5	4132	826.4	22.68	PASS
WCDMA Band5	4182	836.4	22.72	PASS
WCDMA Band5	4233	846.6	22.73	PASS
GSM1900	512	1850.2	30.66	PASS
GSM1900	661	1880	30.53	PASS
GSM1900	810	1909.8	30.39	PASS
GSM850	128	824.2	32.28	PASS
GSM850	190	836.6	32.39	PASS
GSM850	251	848.8	32.44	PASS


8.2 PEAK-TO-AVERAGE RATIO

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
WCDMA Band2	9262	1852.4	2.89	13	PASS
WCDMA Band2	9400	1880	2.90	13	PASS
WCDMA Band2	9538	1907.6	2.85	13	PASS
WCDMA Band4	1312	1712.4	3.12	13	PASS
WCDMA Band4	1450	1740	3.12	13	PASS
WCDMA Band4	1513	1752.6	3.09	13	PASS
WCDMA Band5	4132	826.4	2.86	13	PASS
WCDMA Band5	4182	836.4	3.12	13	PASS
WCDMA Band5	4233	846.6	2.86	13	PASS
GSM1900	512	1850.2	2.62	13	PASS
GSM1900	661	1880	2.62	13	PASS
GSM1900	810	1909.8	2.65	13	PASS
GSM850	128	824.2	2.63	13	PASS
GSM850	190	836.6	2.63	13	PASS
GSM850	251	848.8	2.63	13	PASS


WCDMA Band2 Channel=9400

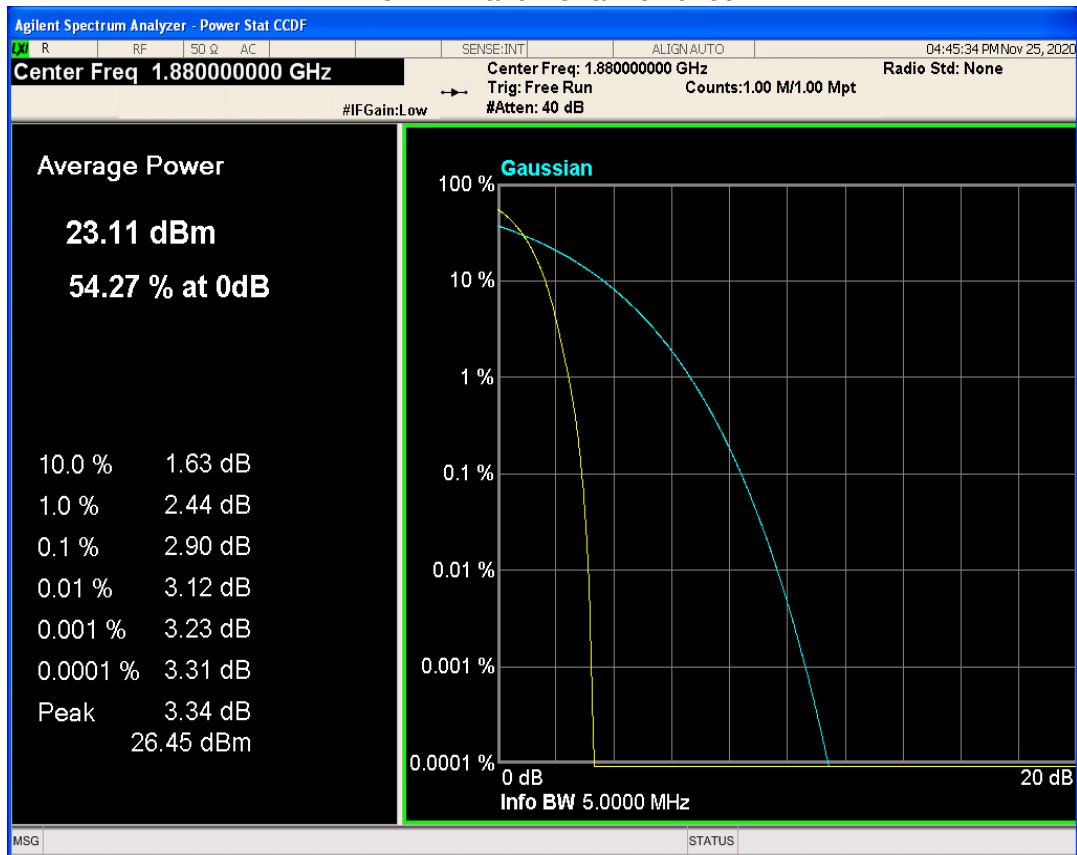


WCDMA Band2 Channel=9262

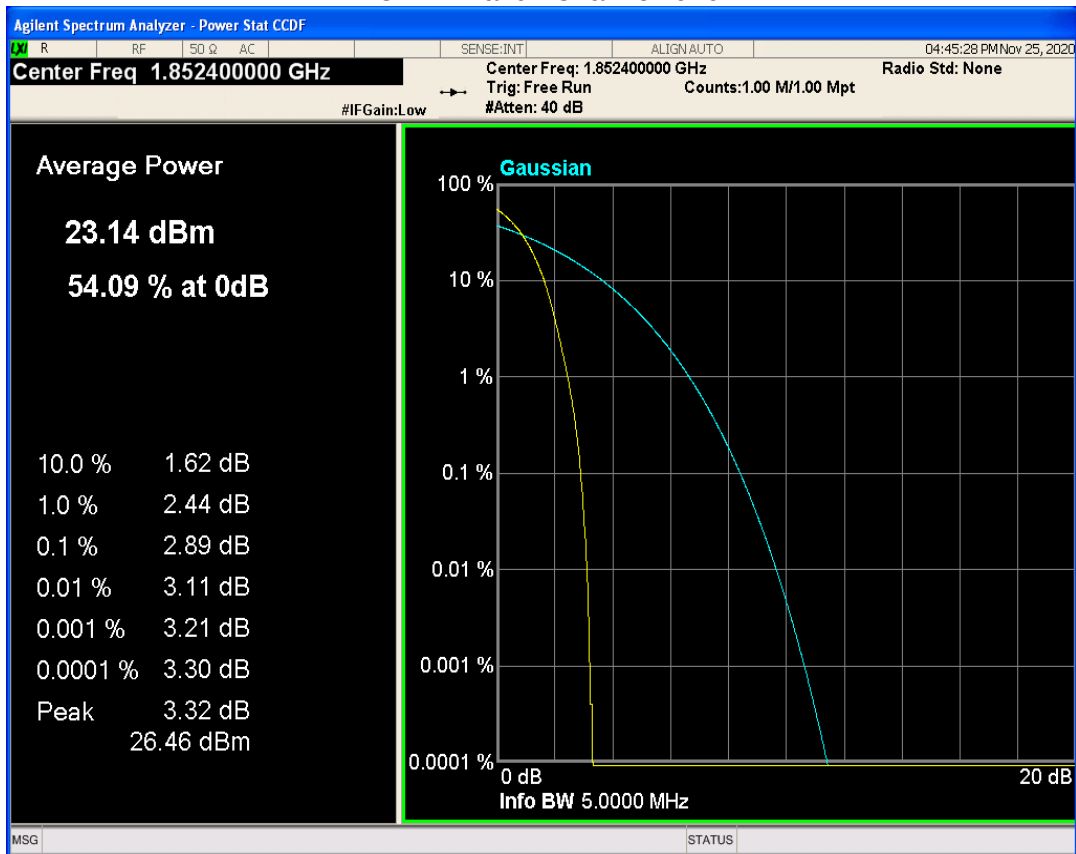


WCDMA Band2 Channel=9538

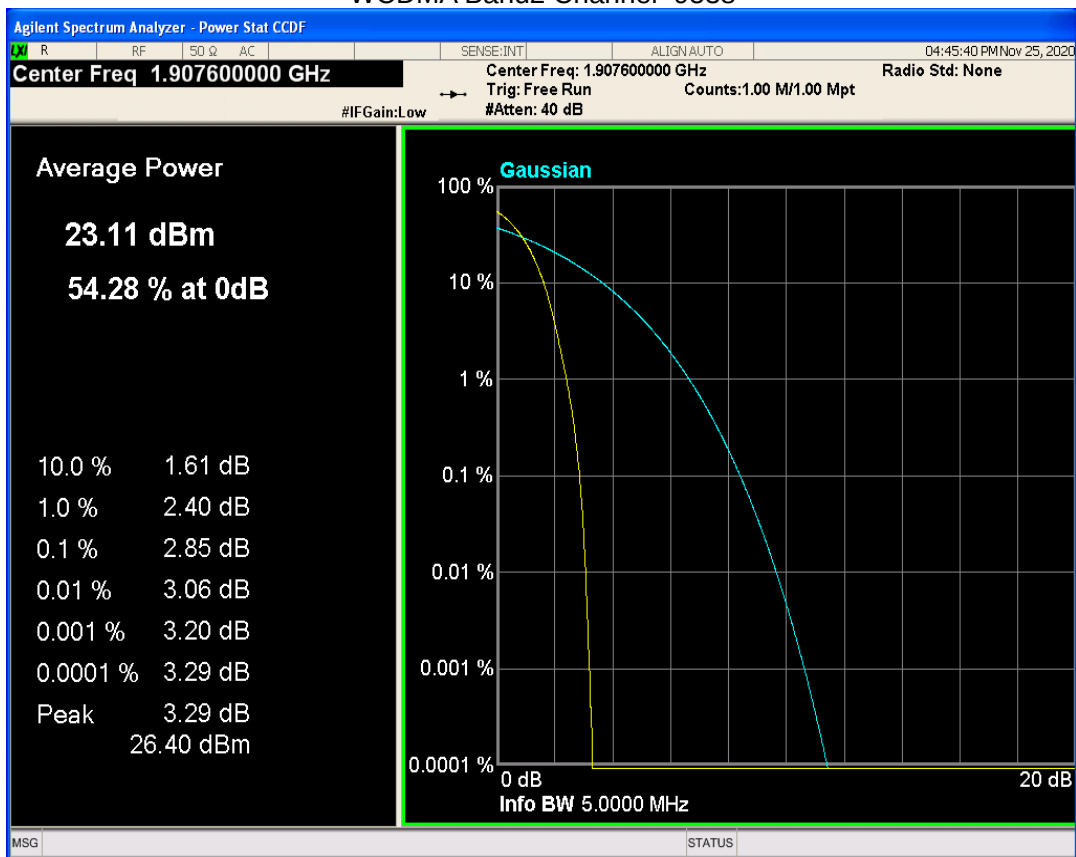


WCDMA Band4 Channel=1450

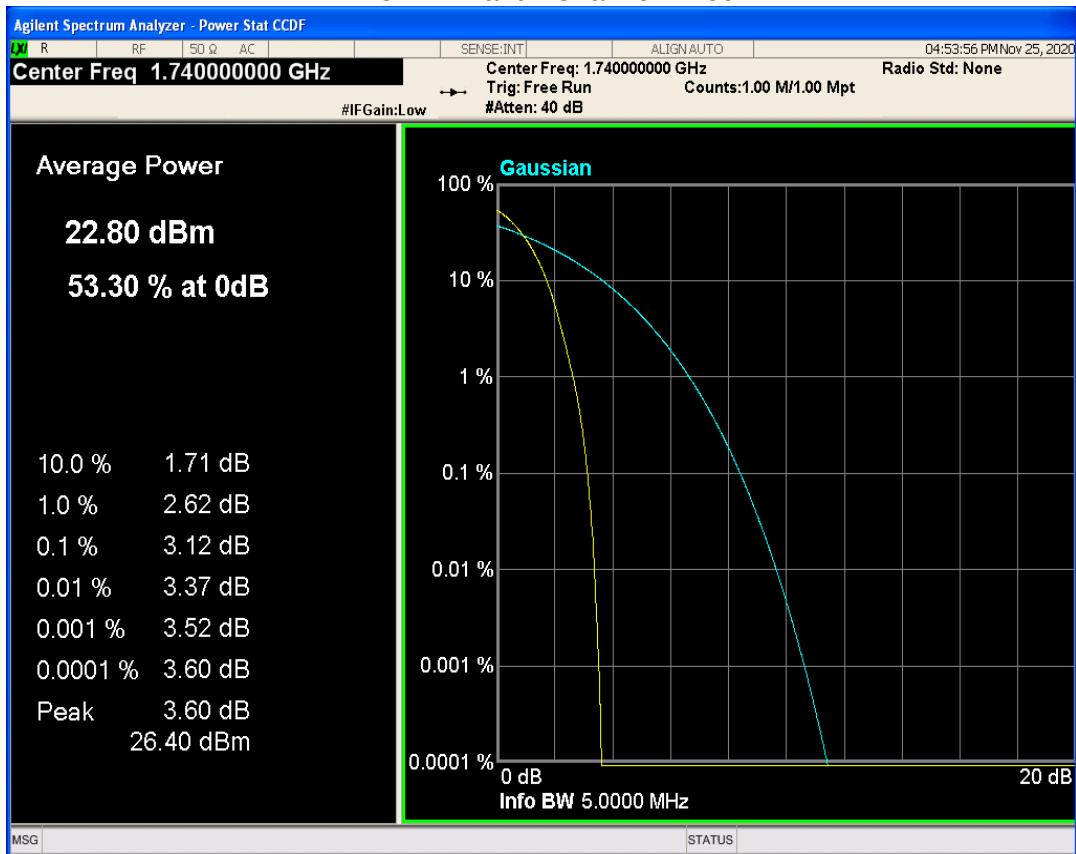


WCDMA Band4 Channel=1312

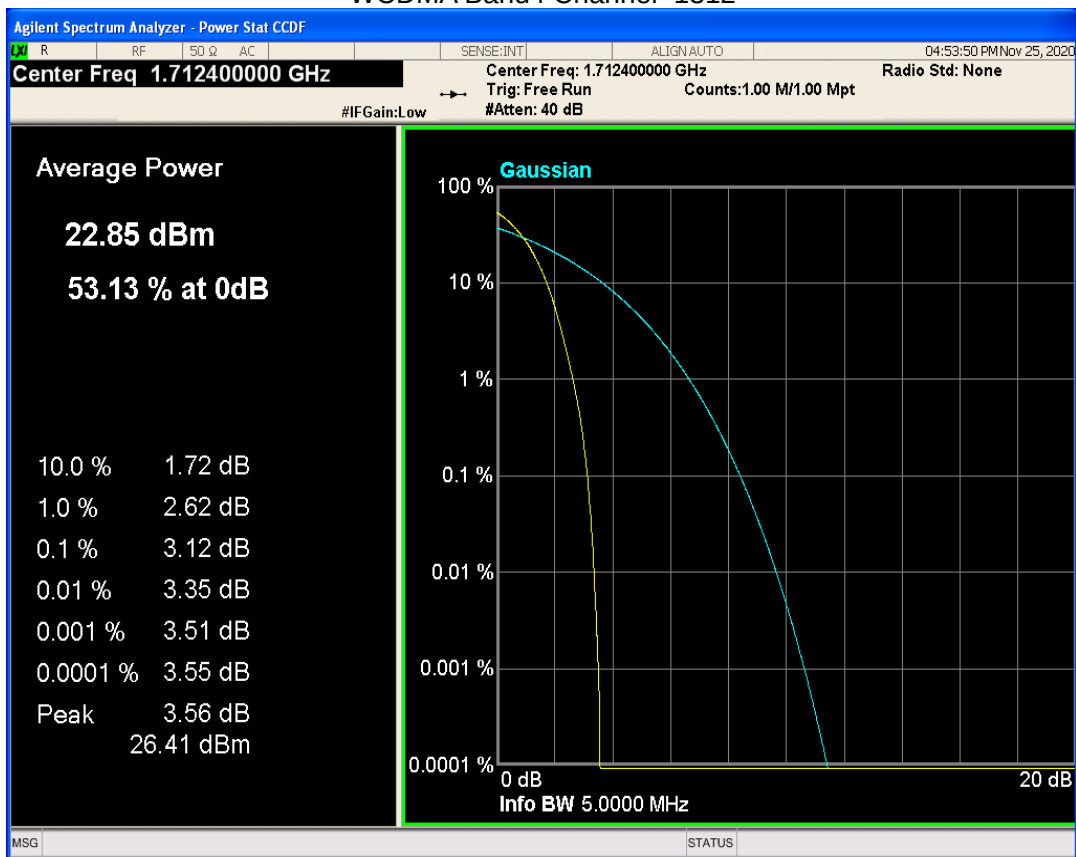


WCDMA Band4 Channel=1513

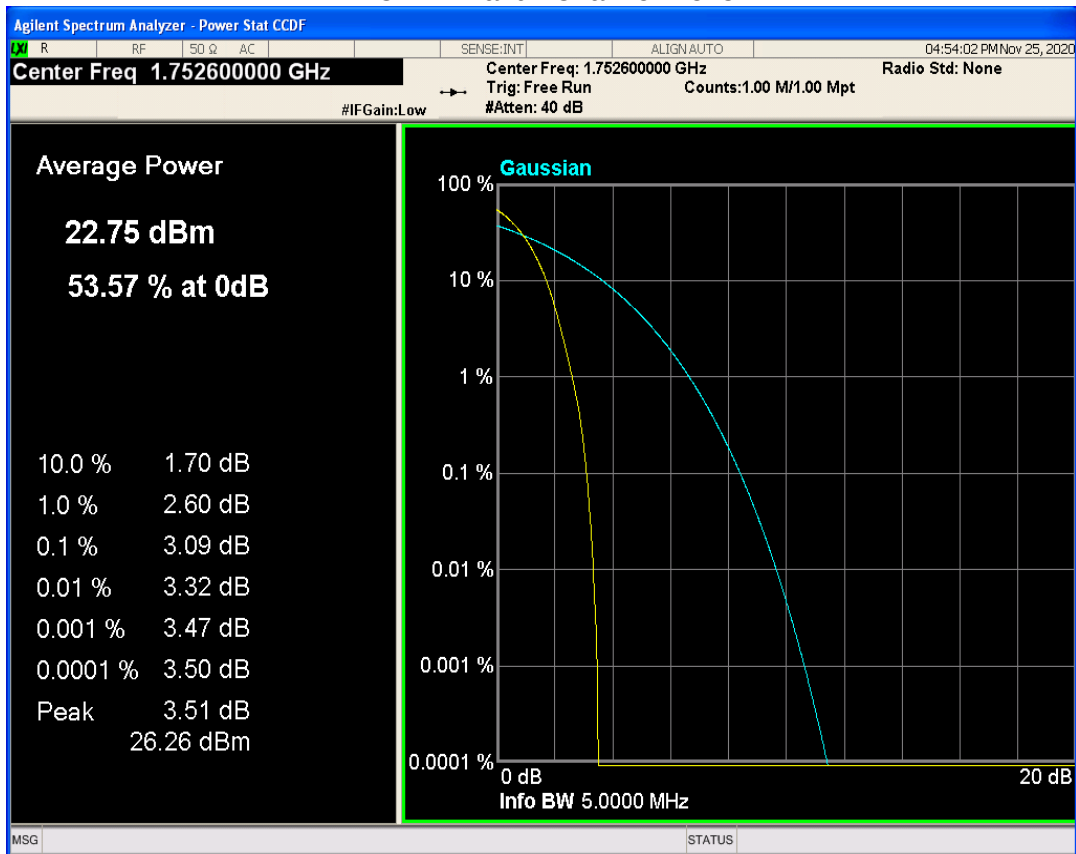


WCDMA Band5 Channel=4132

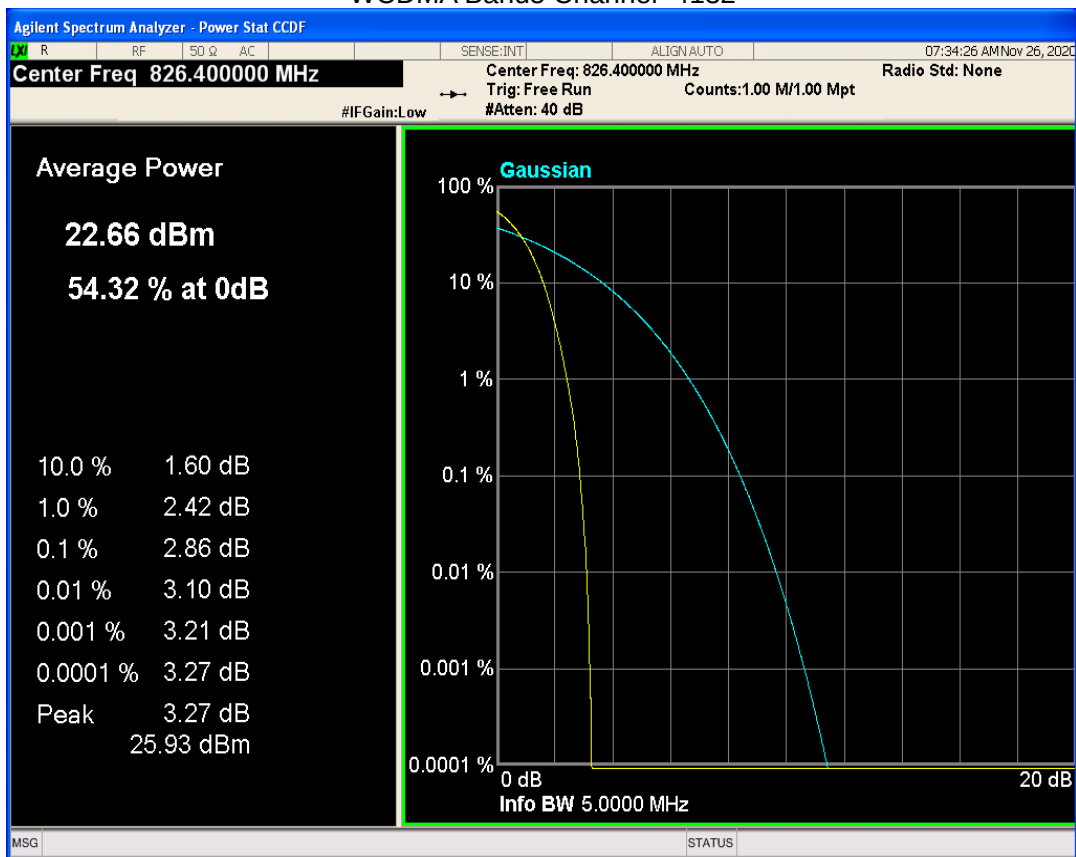


WCDMA Band5 Channel=4182

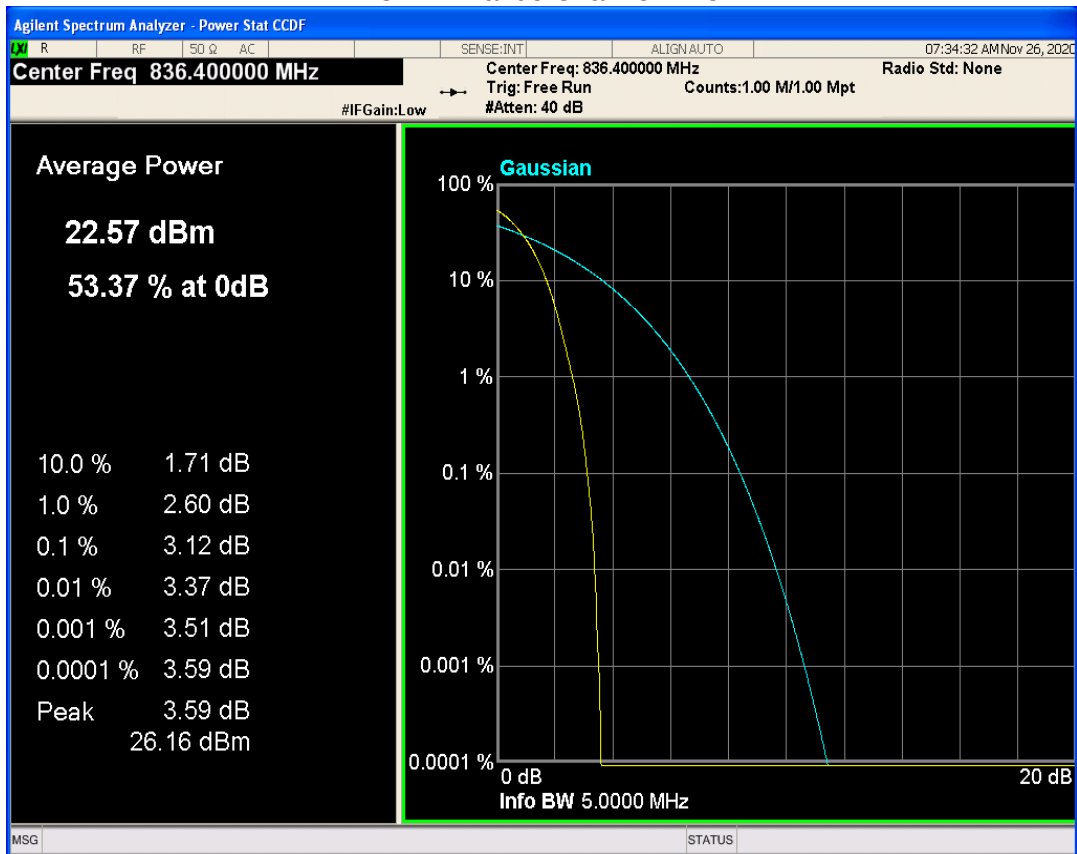


WCDMA Band5 Channel=4233

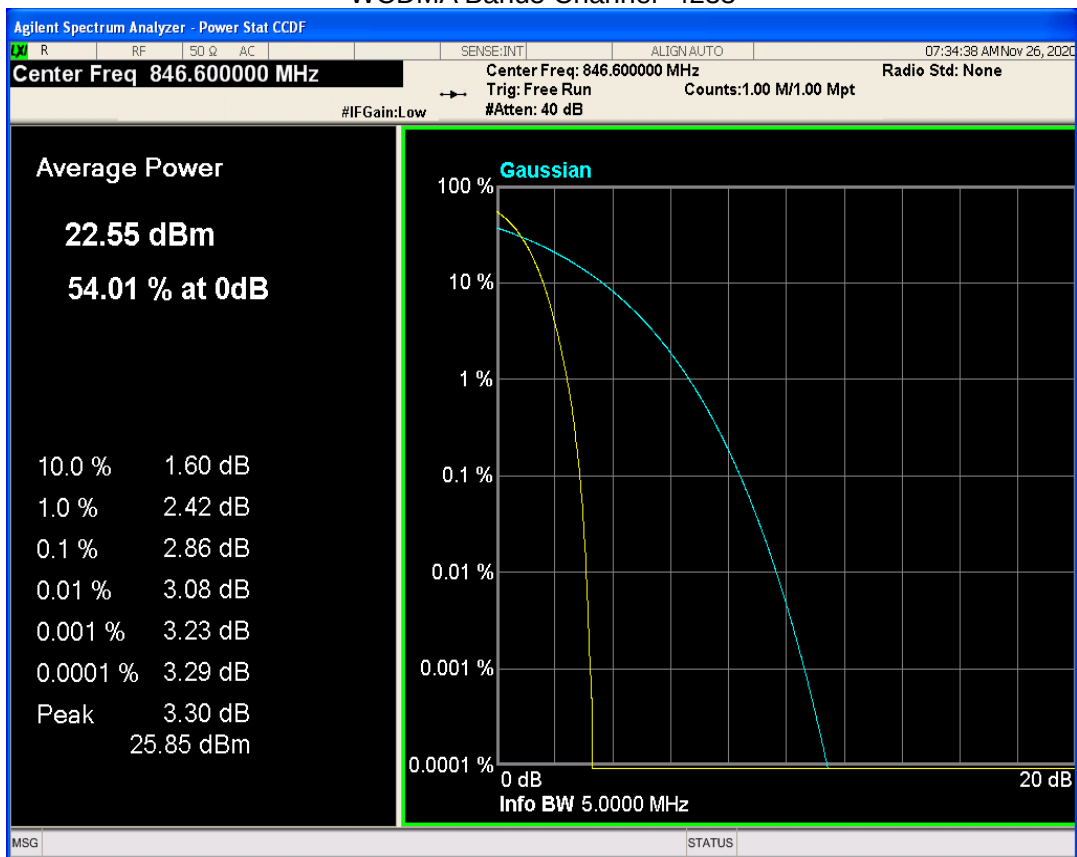


GSM1900 Channel=512

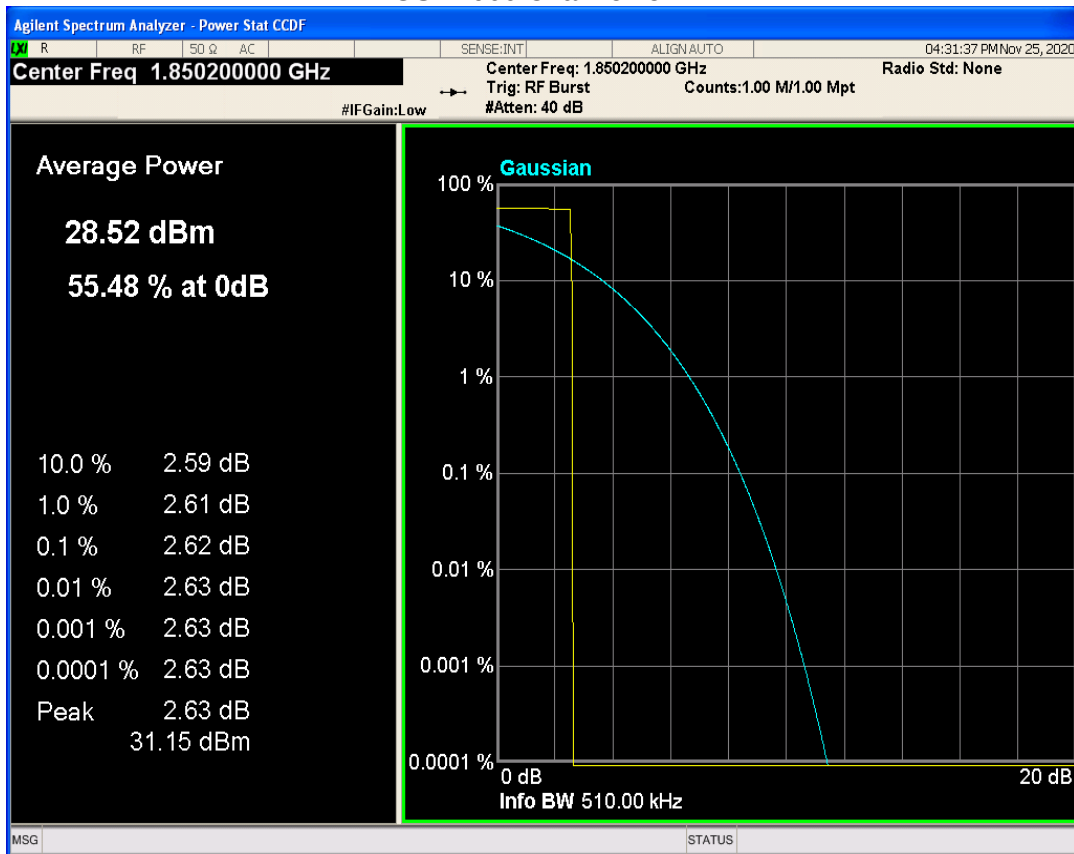


GSM1900 Channel=810

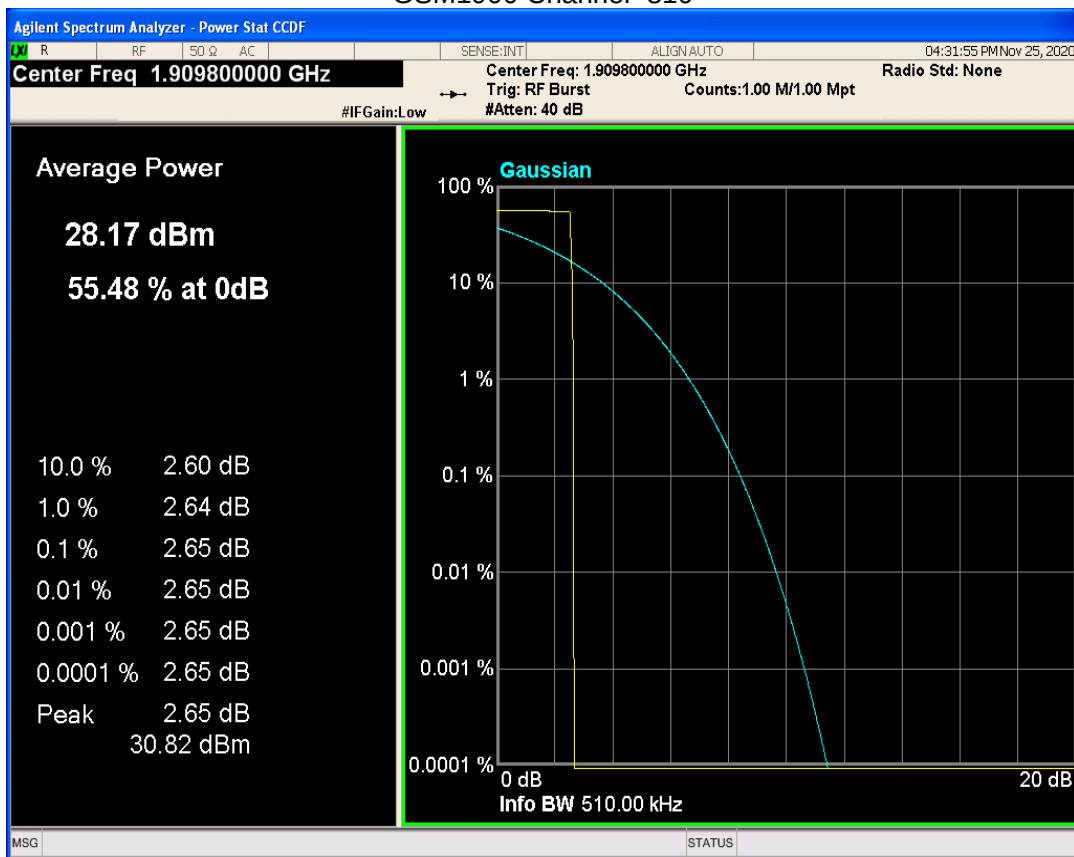


GSM1900 Channel=661

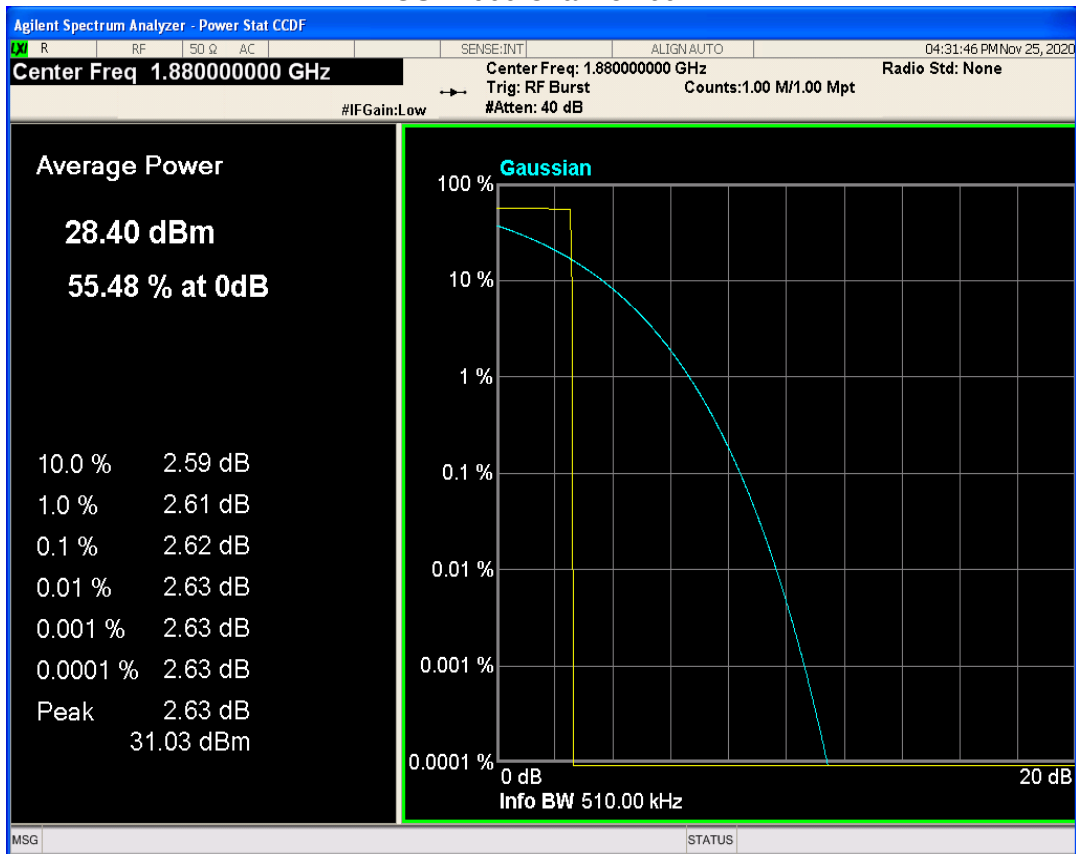


GSM850 Channel=190

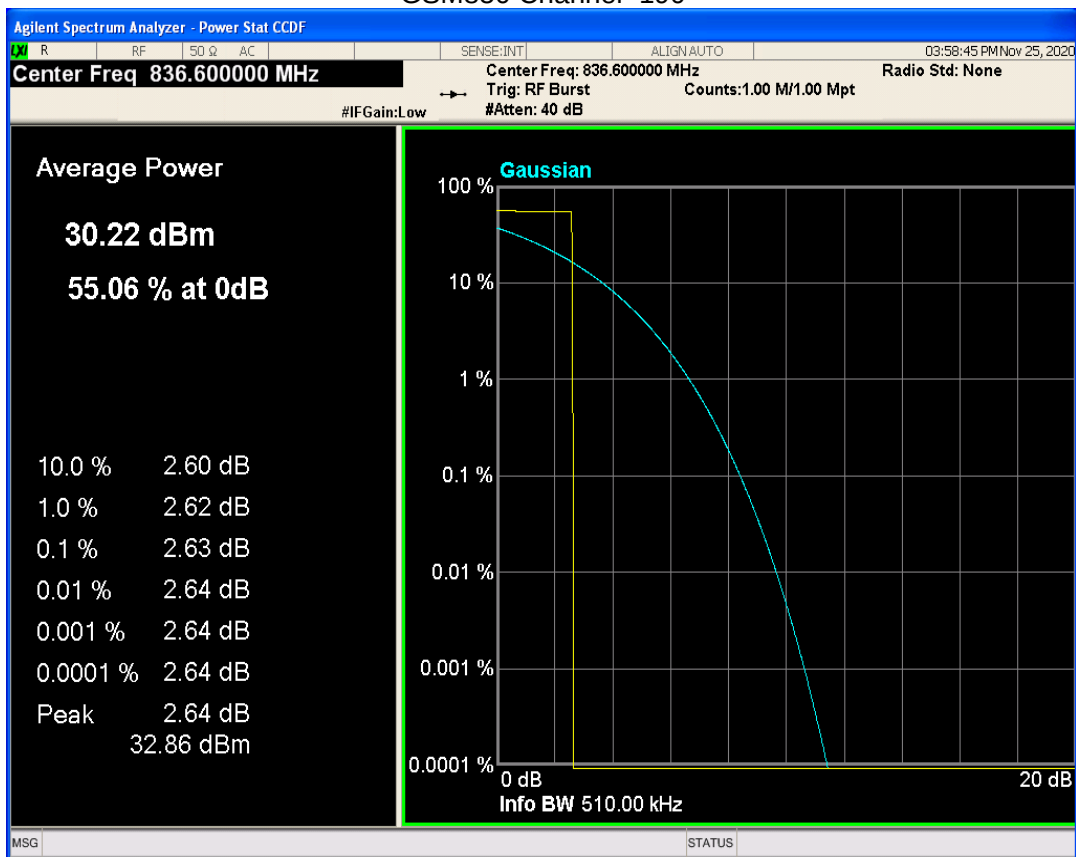

GSM850 Channel=128

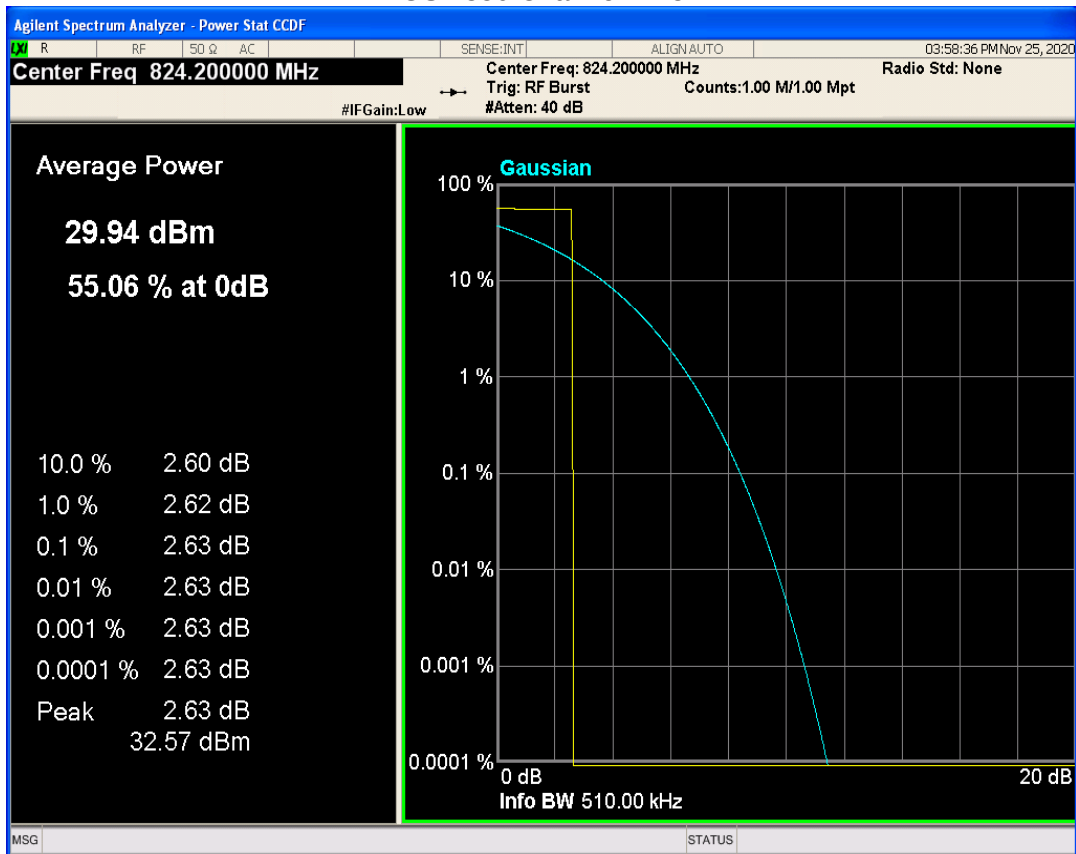


GSM850 Channel=251

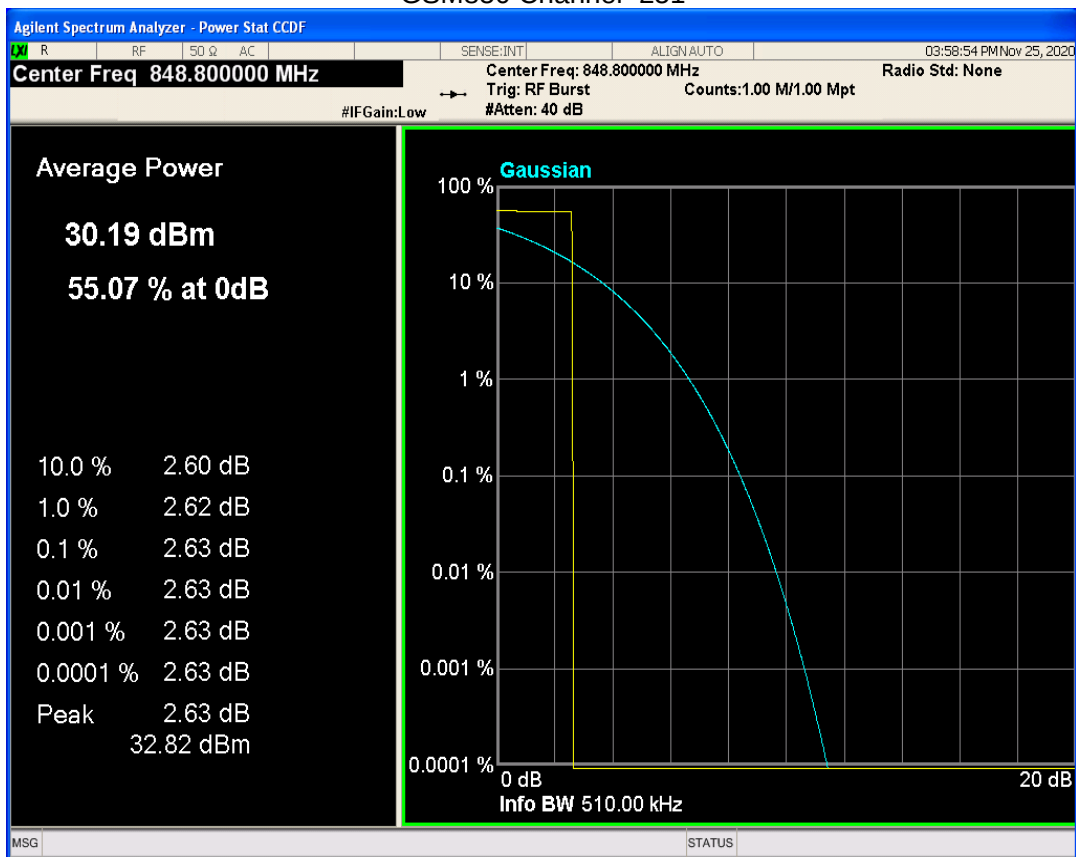


8.3 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
WCDMA Band2	9262	1852.4	4143.709	4666.680	PASS
WCDMA Band2	9400	1880	4141.066	4670.721	PASS
WCDMA Band2	9538	1907.6	4174.102	4689.252	PASS
WCDMA Band4	1312	1712.4	4150.624	4649.872	PASS
WCDMA Band4	1450	1740	4158.372	4691.640	PASS
WCDMA Band4	1513	1752.6	4168.697	4677.655	PASS
WCDMA Band5	4132	826.4	4121.955	4634.601	PASS
WCDMA Band5	4182	836.4	4157.515	4672.655	PASS
WCDMA Band5	4233	846.6	4152.610	4690.645	PASS
GSM1900	512	1850.2	242.513	318.610	PASS
GSM1900	661	1880	250.897	324.689	PASS
GSM1900	810	1909.8	245.212	314.012	PASS
GSM850	128	824.2	248.900	313.624	PASS
GSM850	190	836.6	251.581	317.447	PASS
GSM850	251	848.8	245.469	317.743	PASS


WCDMA Band2 Channel=9262

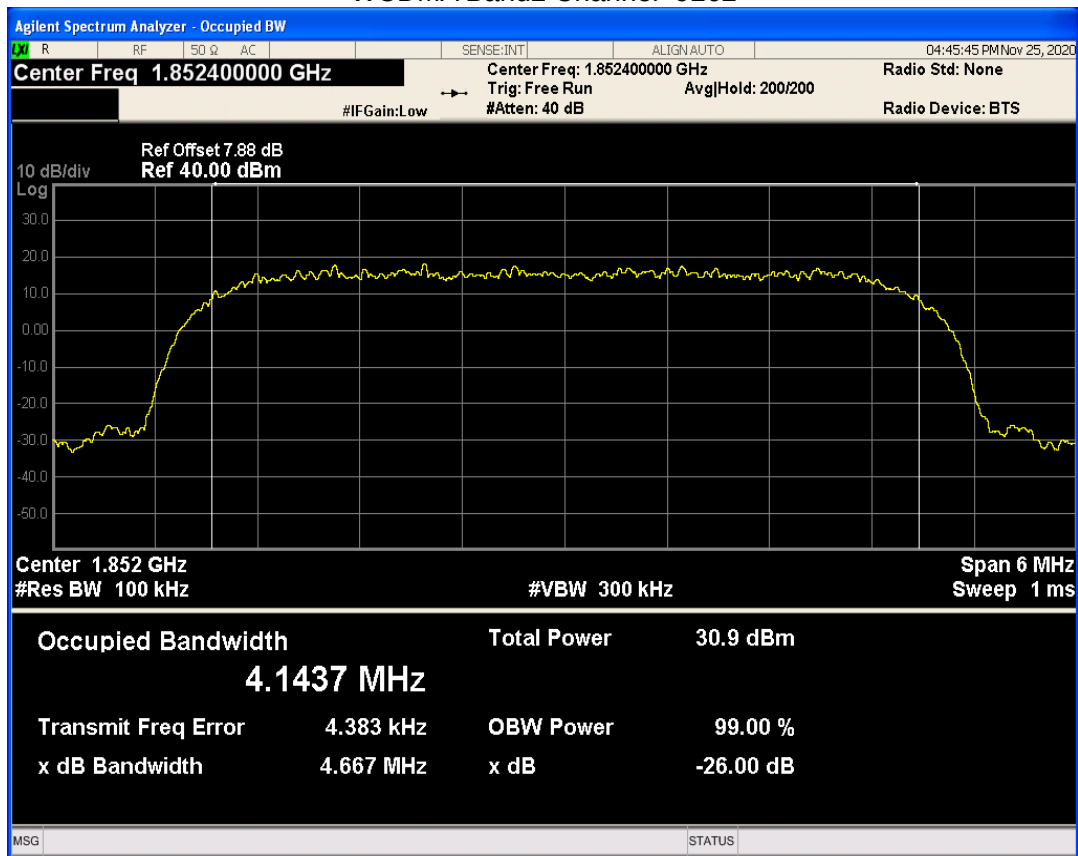


WCDMA Band2 Channel=9538

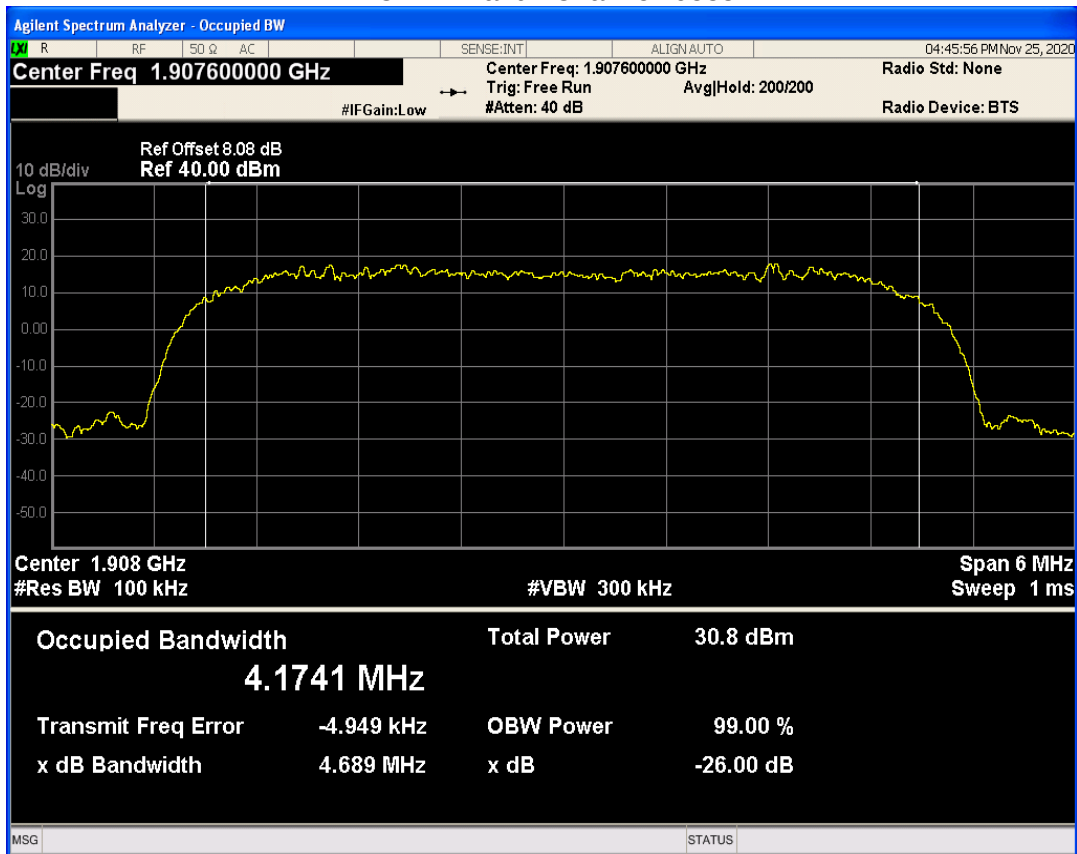


WCDMA Band2 Channel=9400

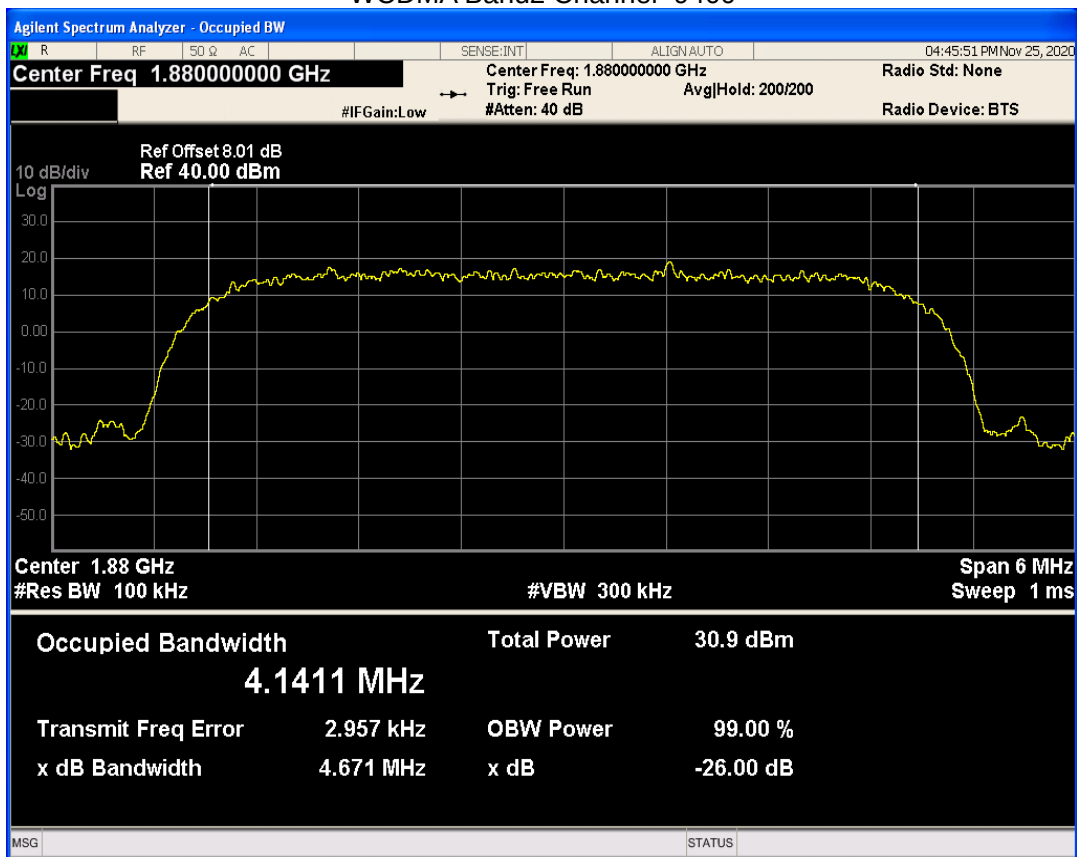


WCDMA Band4 Channel=1450

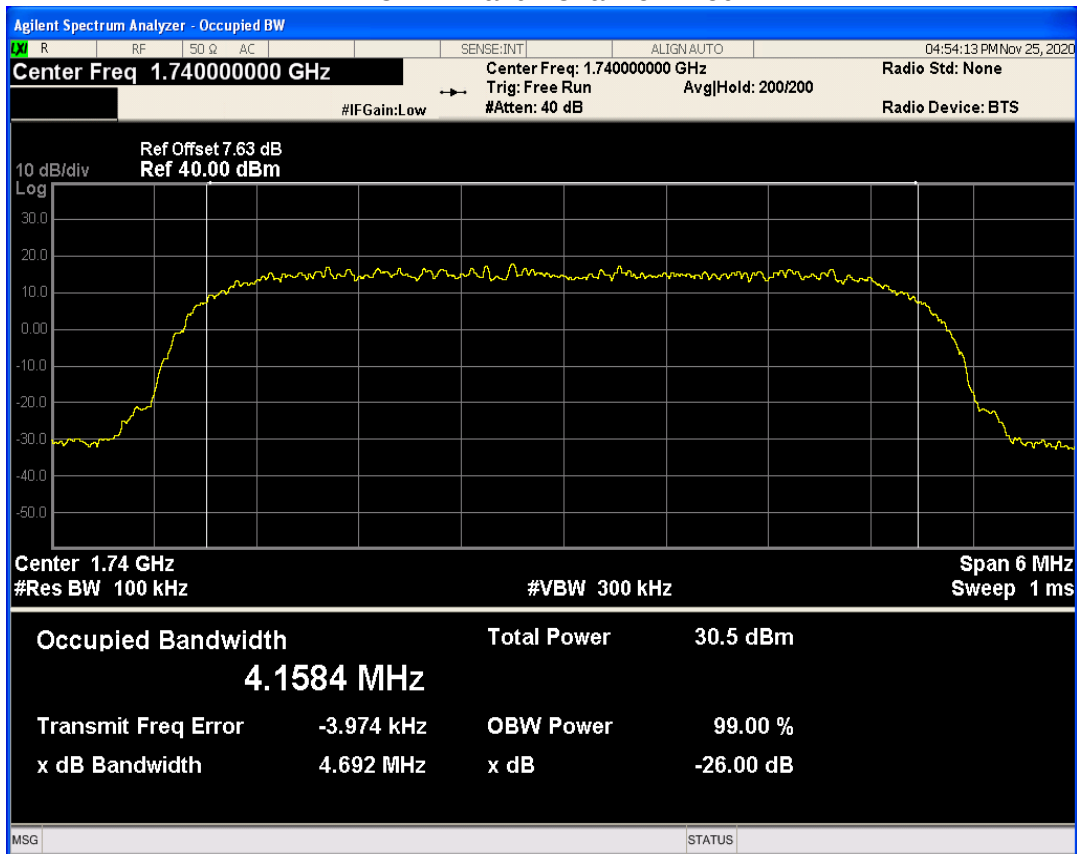


WCDMA Band4 Channel=1312

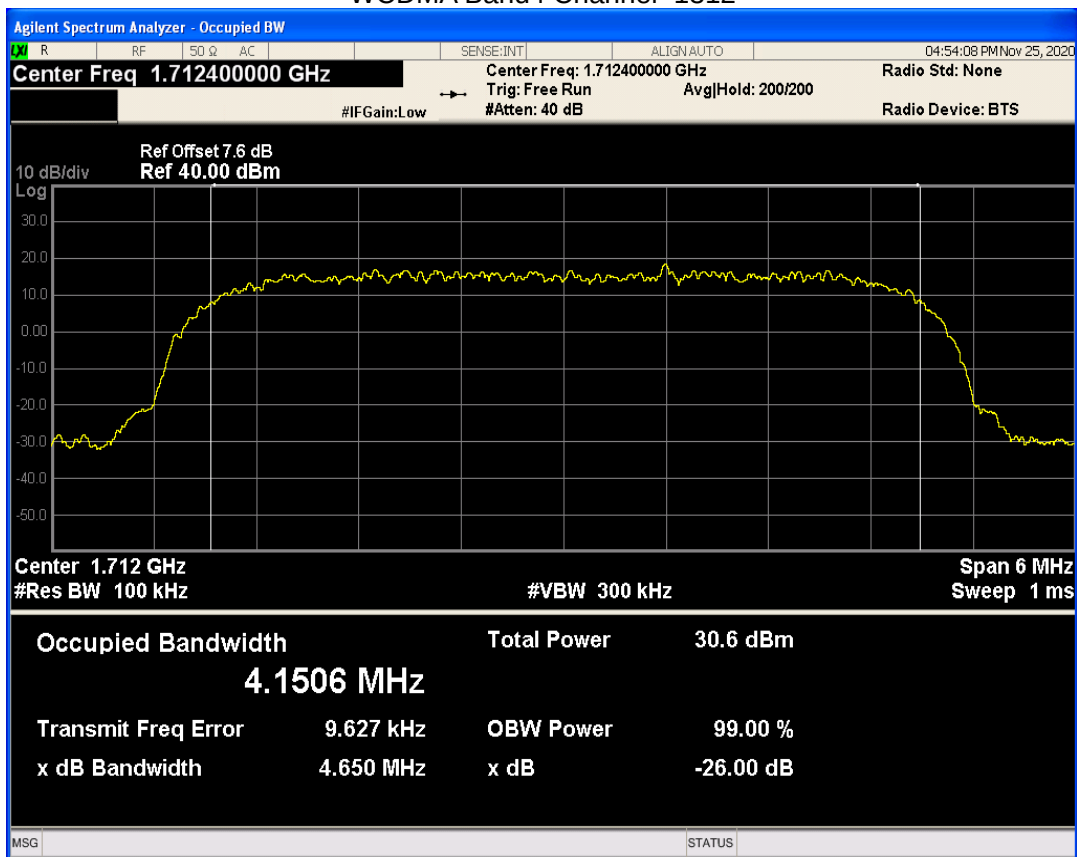


WCDMA Band4 Channel=1513

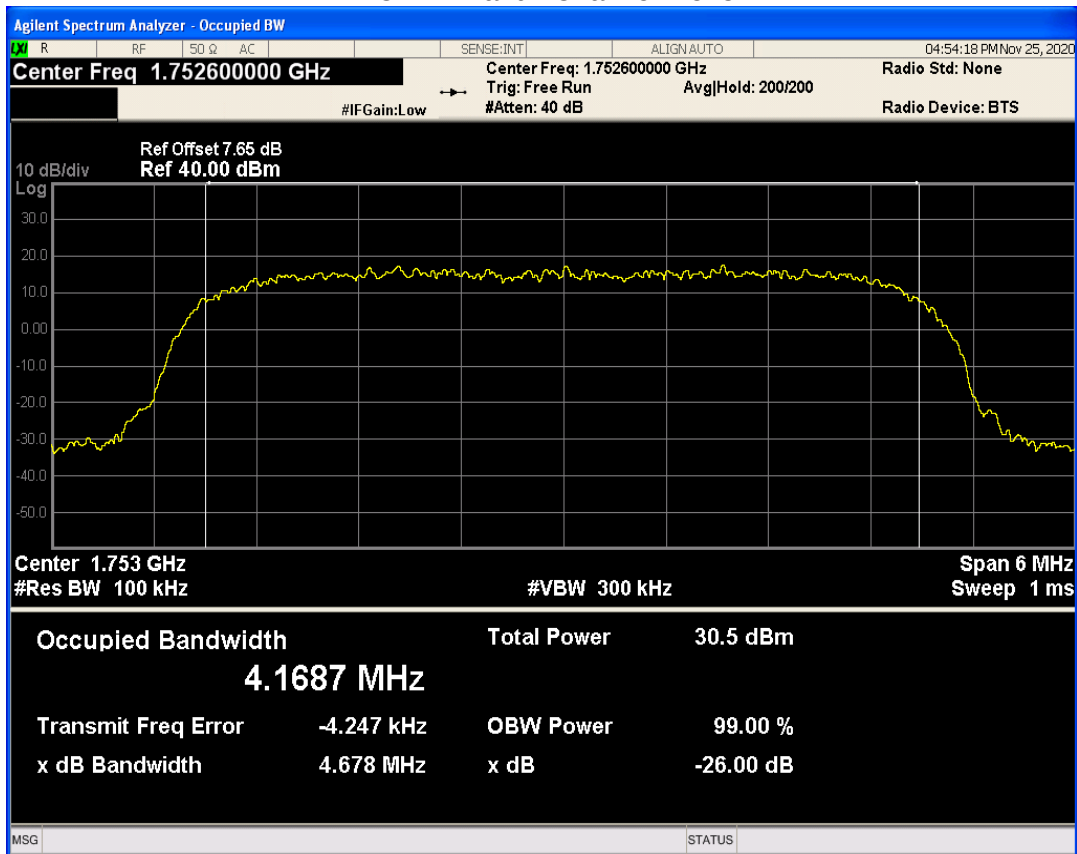


WCDMA Band5 Channel=4132

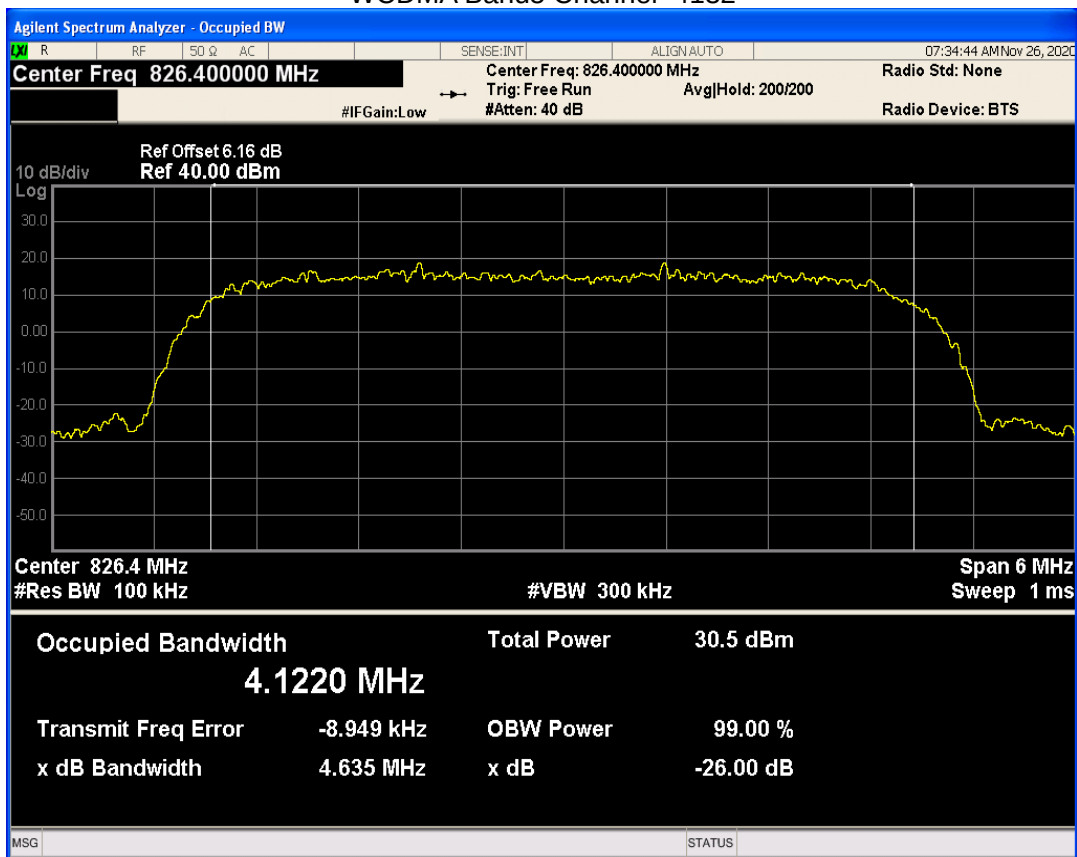


WCDMA Band5 Channel=4233

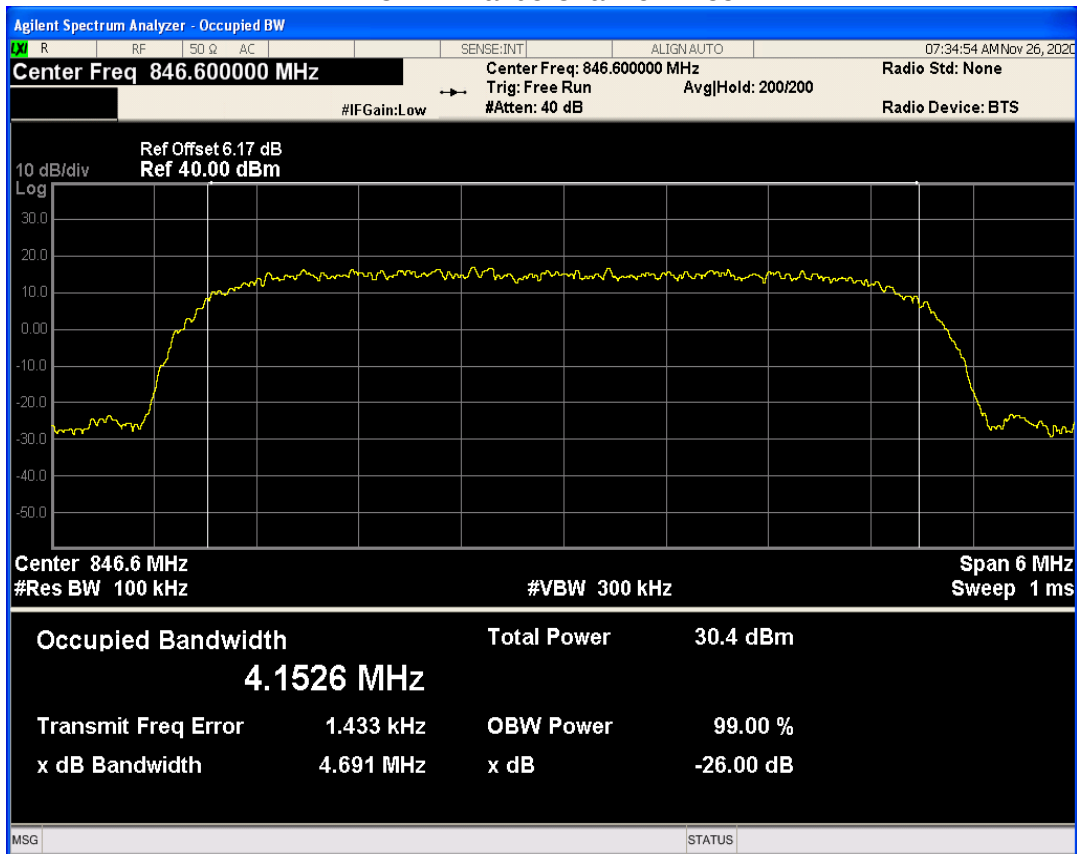


WCDMA Band5 Channel=4182

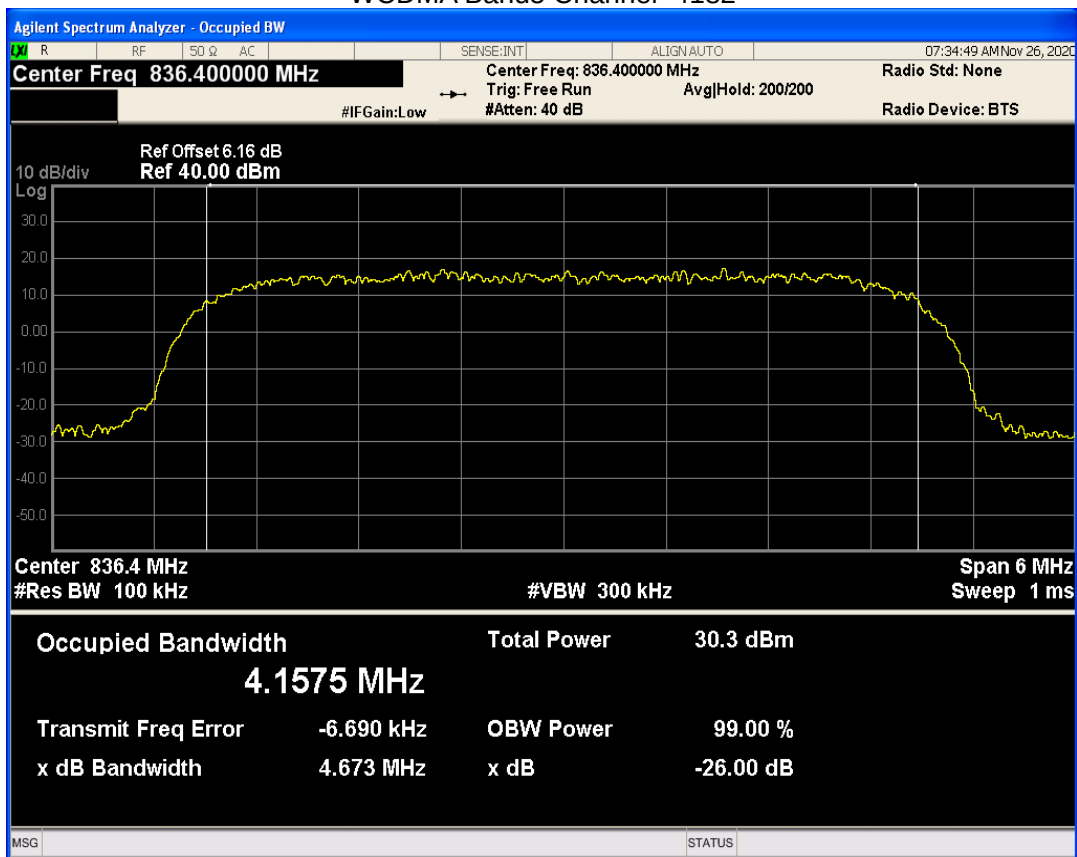


GSM1900 Channel=512

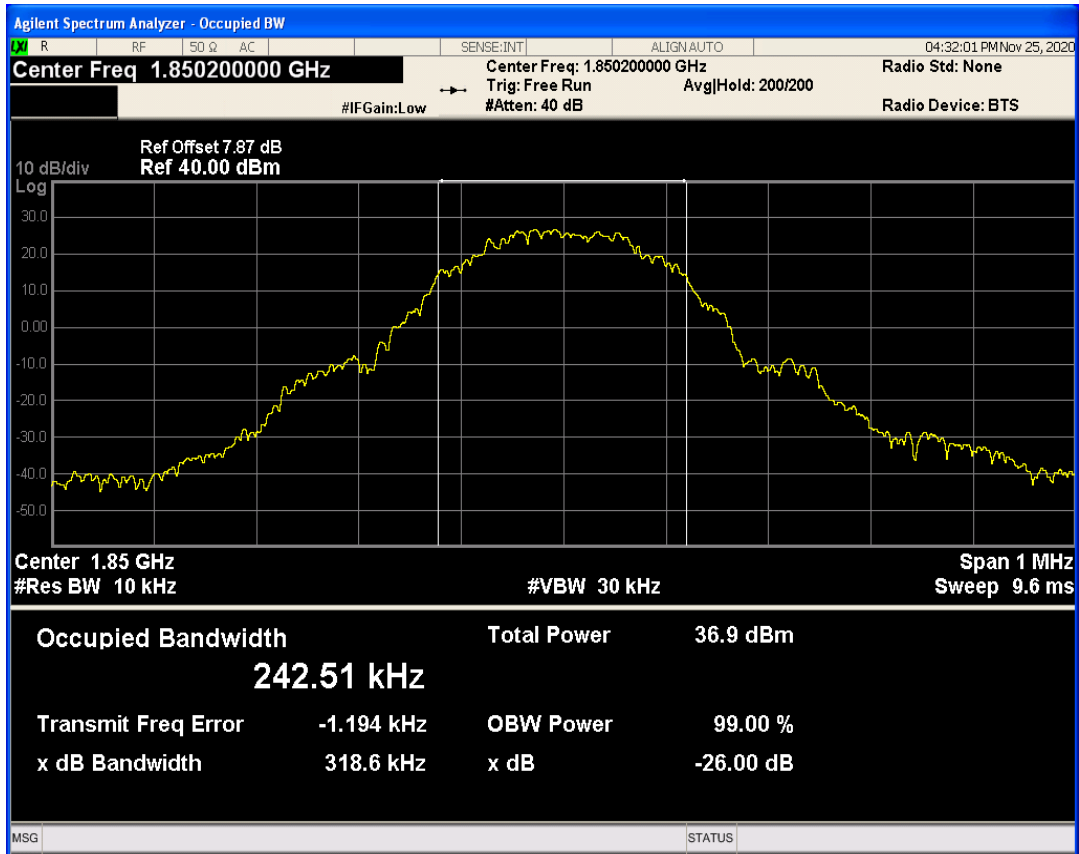


GSM1900 Channel=661

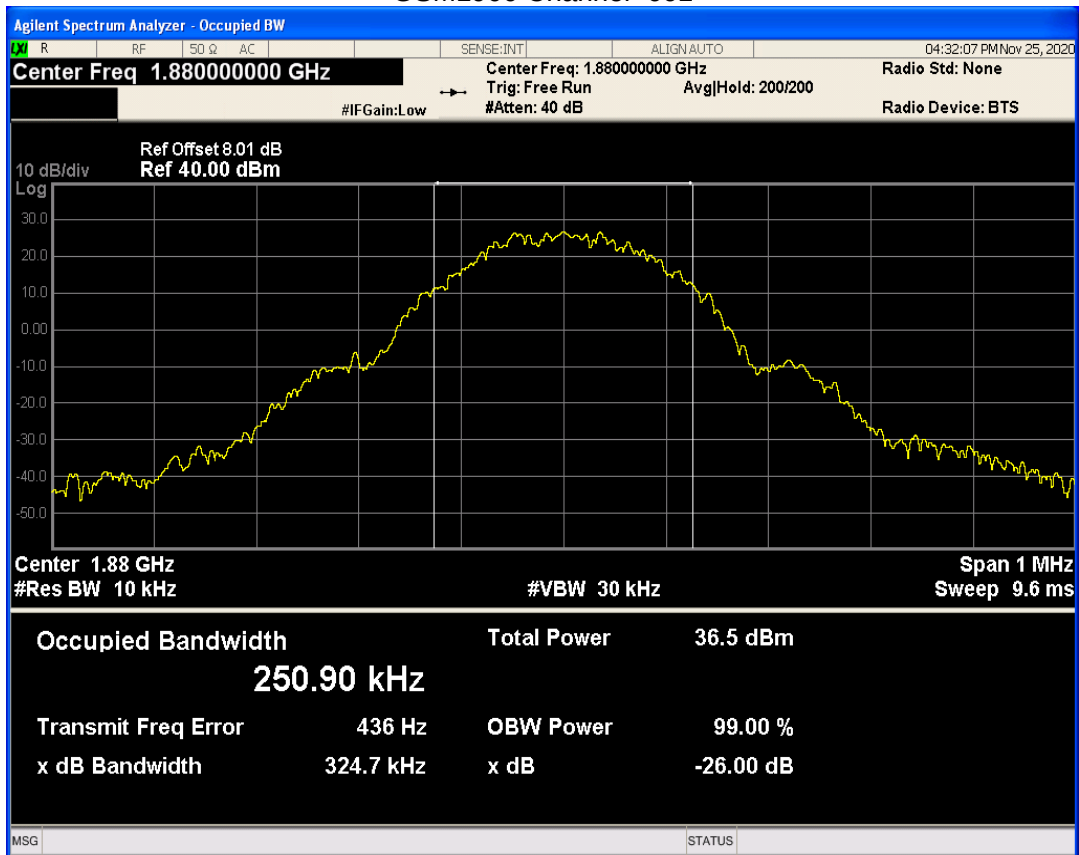


GSM1900 Channel=810

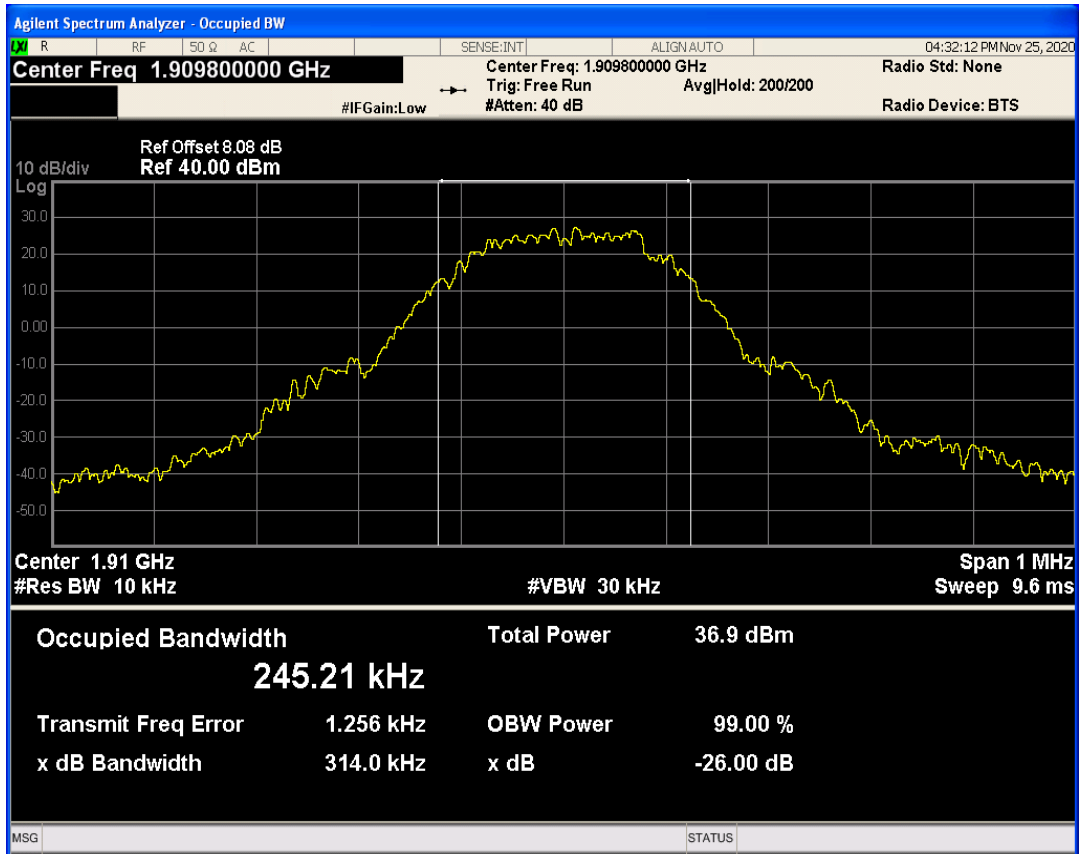


GSM850 Channel=190

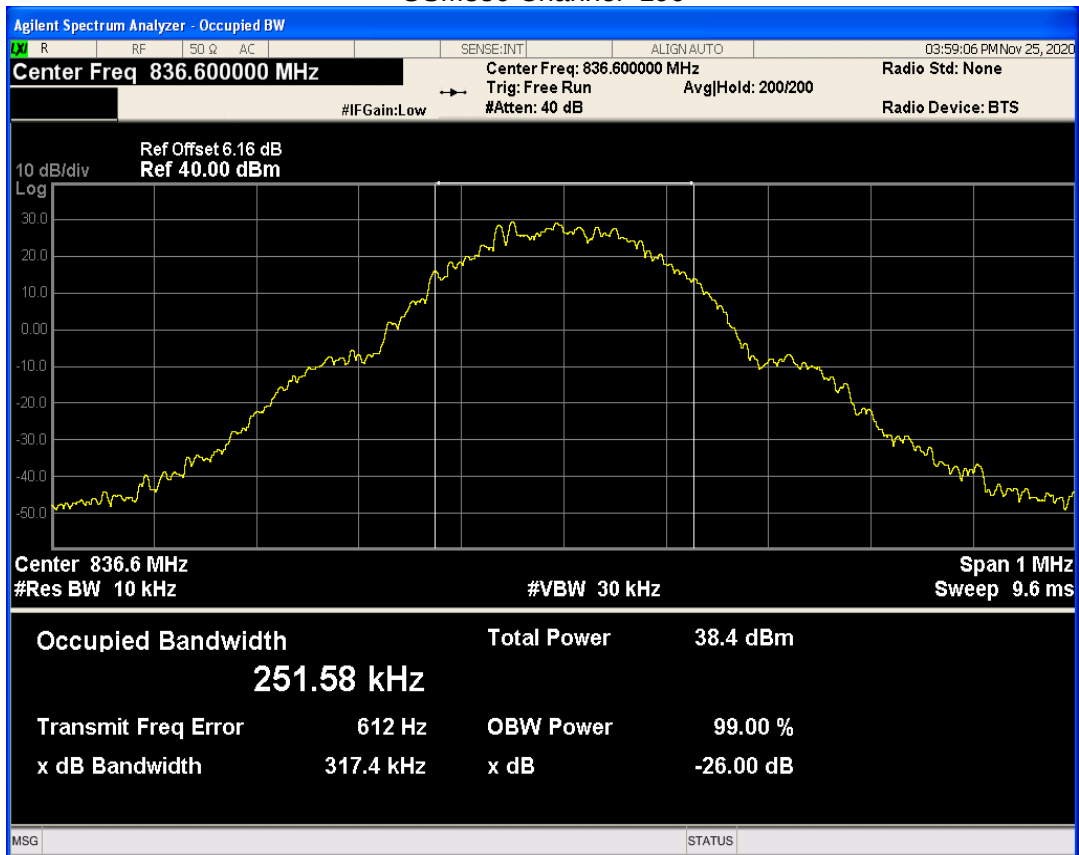

GSM850 Channel=128

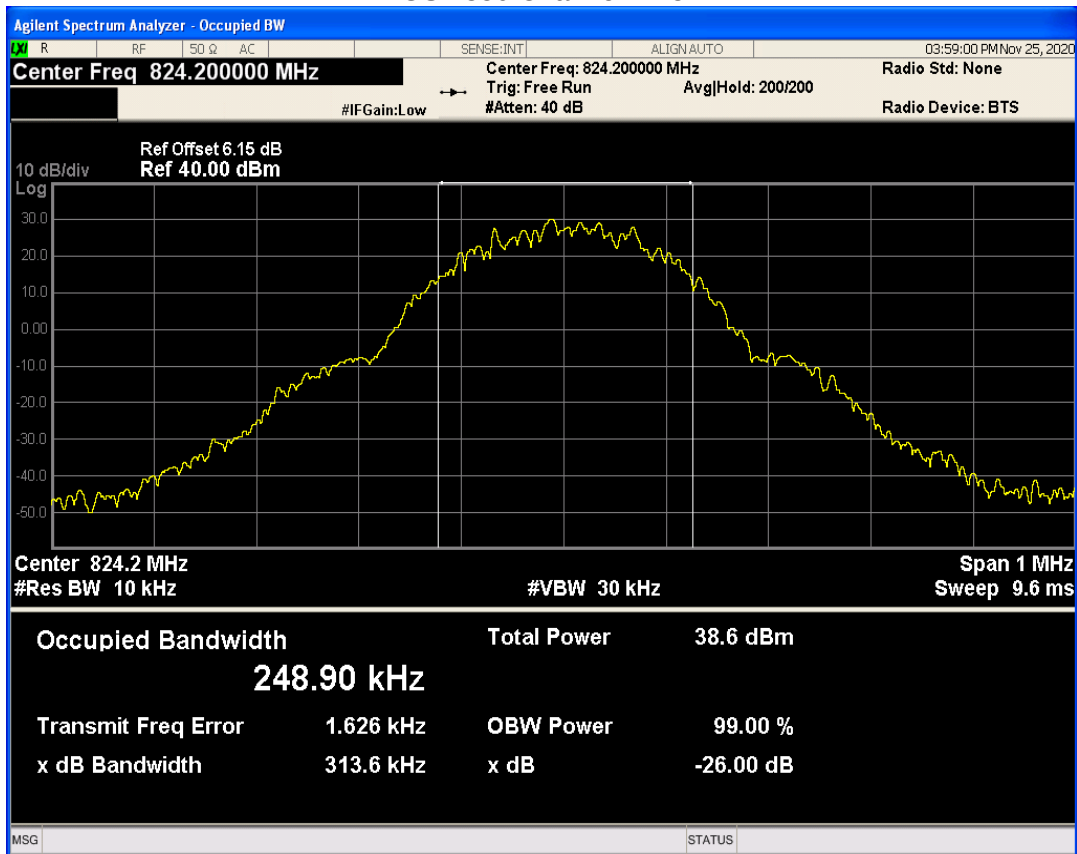


GSM850 Channel=251

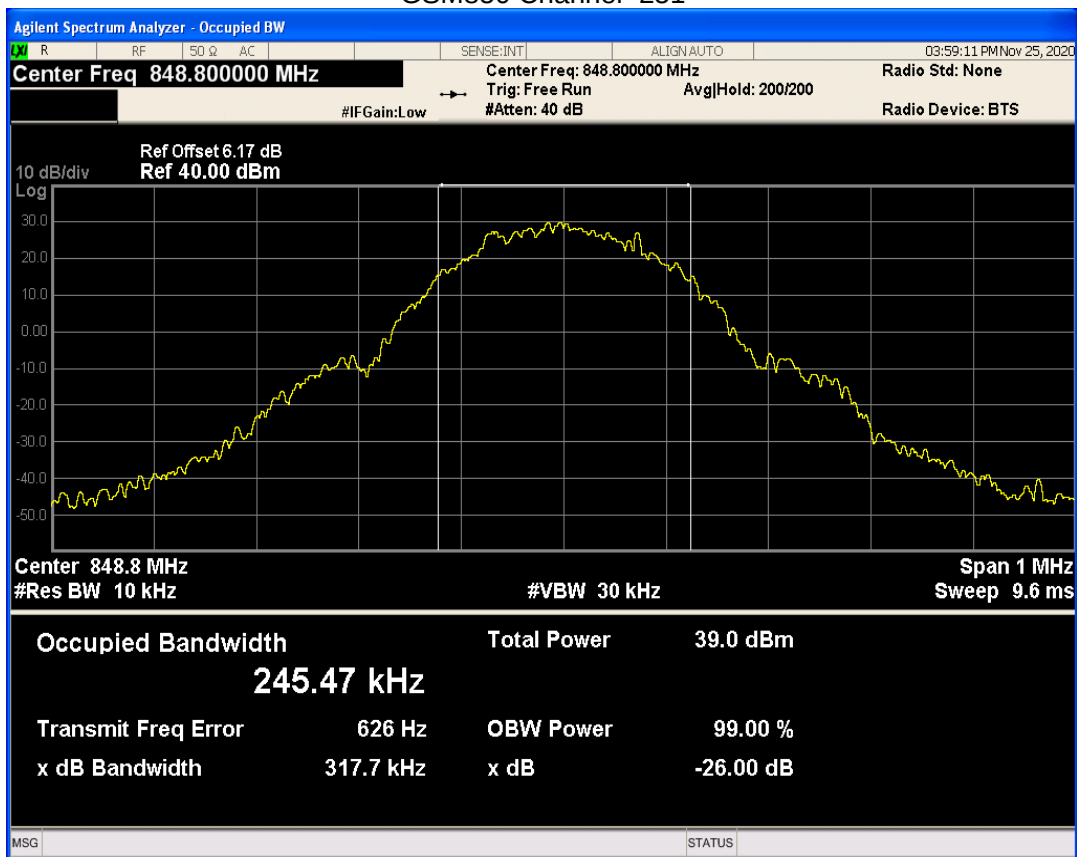

8.4 BAND EDGE

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
WCDMA Band2	9262	1852.4	1850.00	-25.69	-13	PASS
WCDMA Band2	9538	1907.6	1910.00	-24.29	-13	PASS
WCDMA Band4	1312	1712.4	1710.00	-26.97	-13	PASS
WCDMA Band4	1513	1752.6	1755.00	-26.82	-13	PASS
WCDMA Band5	4132	826.4	824.00	-25.86	-13	PASS
WCDMA Band5	4233	846.6	849.00	-24.91	-13	PASS
GSM1900	512	1850.2	1850.00	-25.68	-13	PASS
GSM1900	810	1909.8	1910.02	-27.21	-13	PASS
GSM850	128	824.2	823.99	-25.76	-13	PASS
GSM850	251	848.8	849.02	-24.74	-13	PASS


WCDMA Band2 Channel=9262

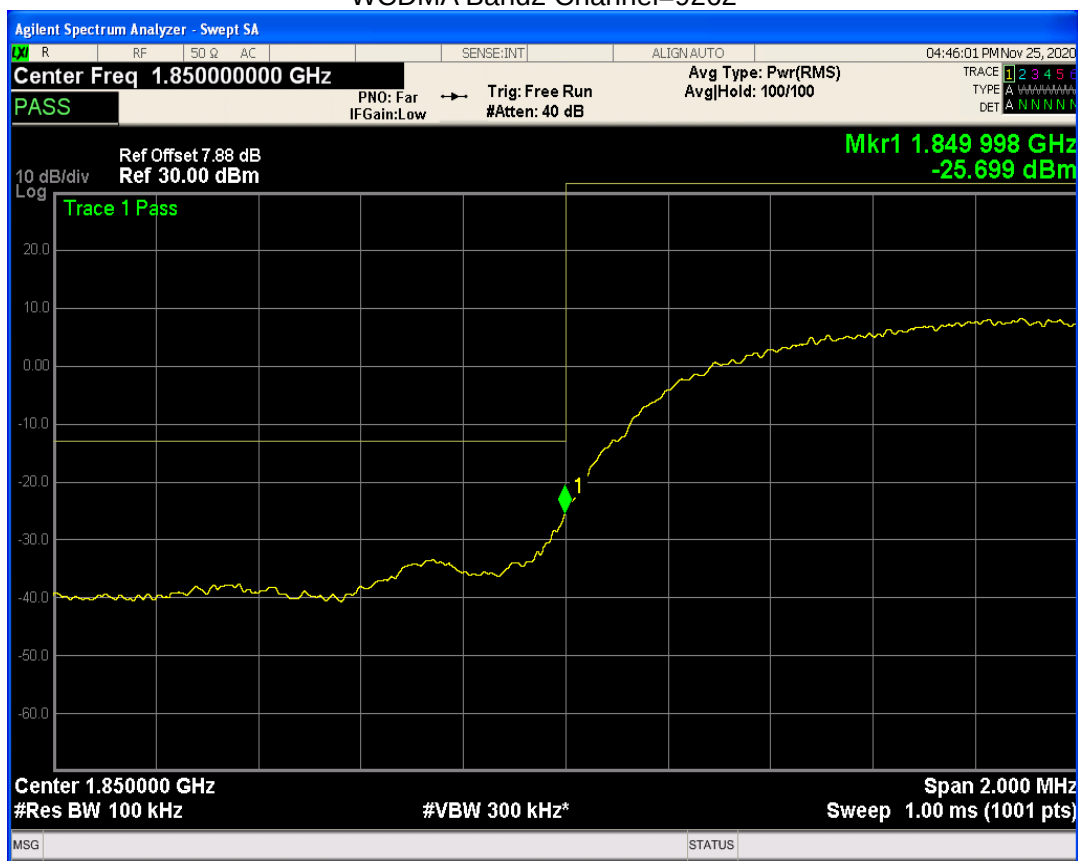


WCDMA Band2 Channel=9538




WCDMA Band4 Channel=1513

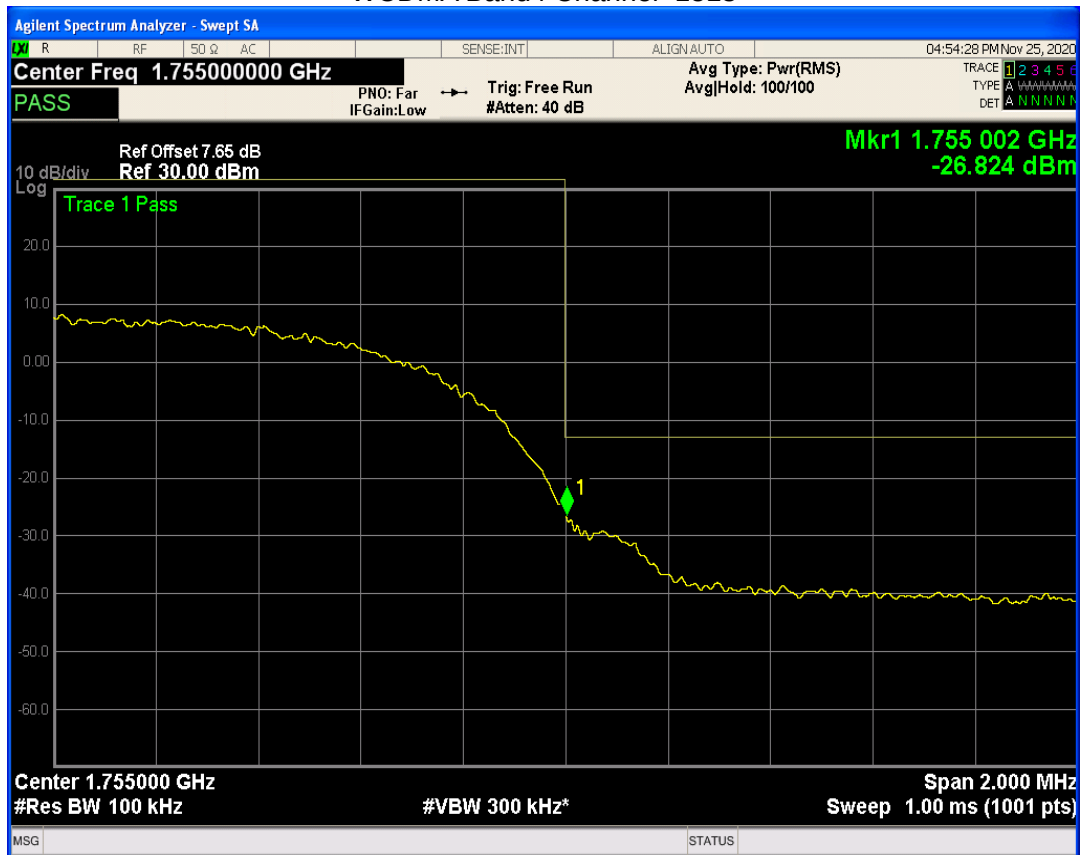


WCDMA Band4 Channel=1312

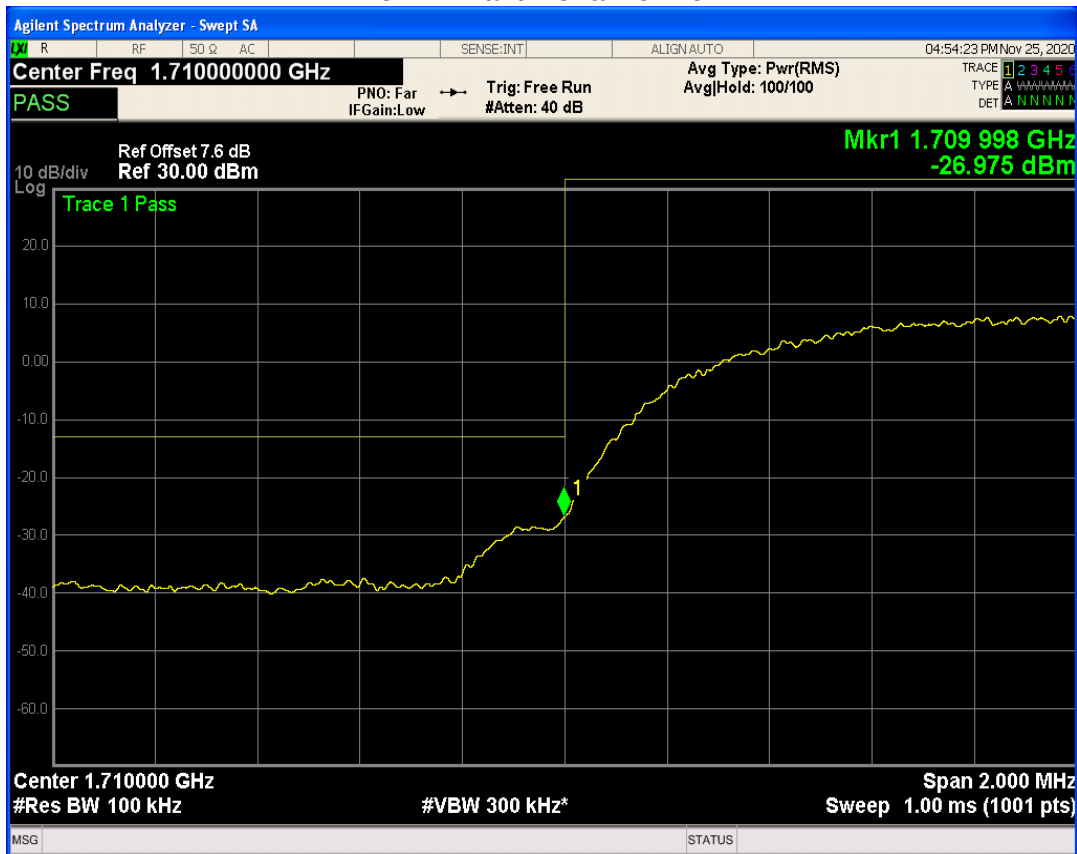


WCDMA Band5 Channel=4132

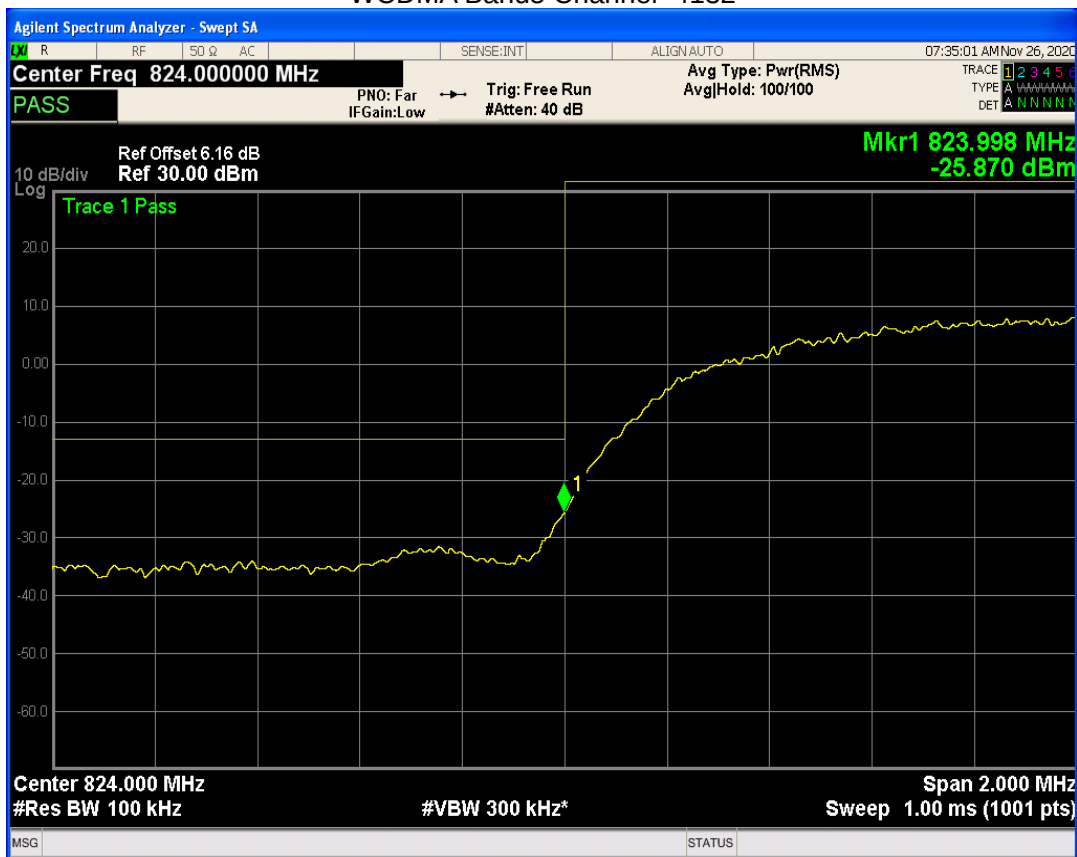


WCDMA Band5 Channel=4233

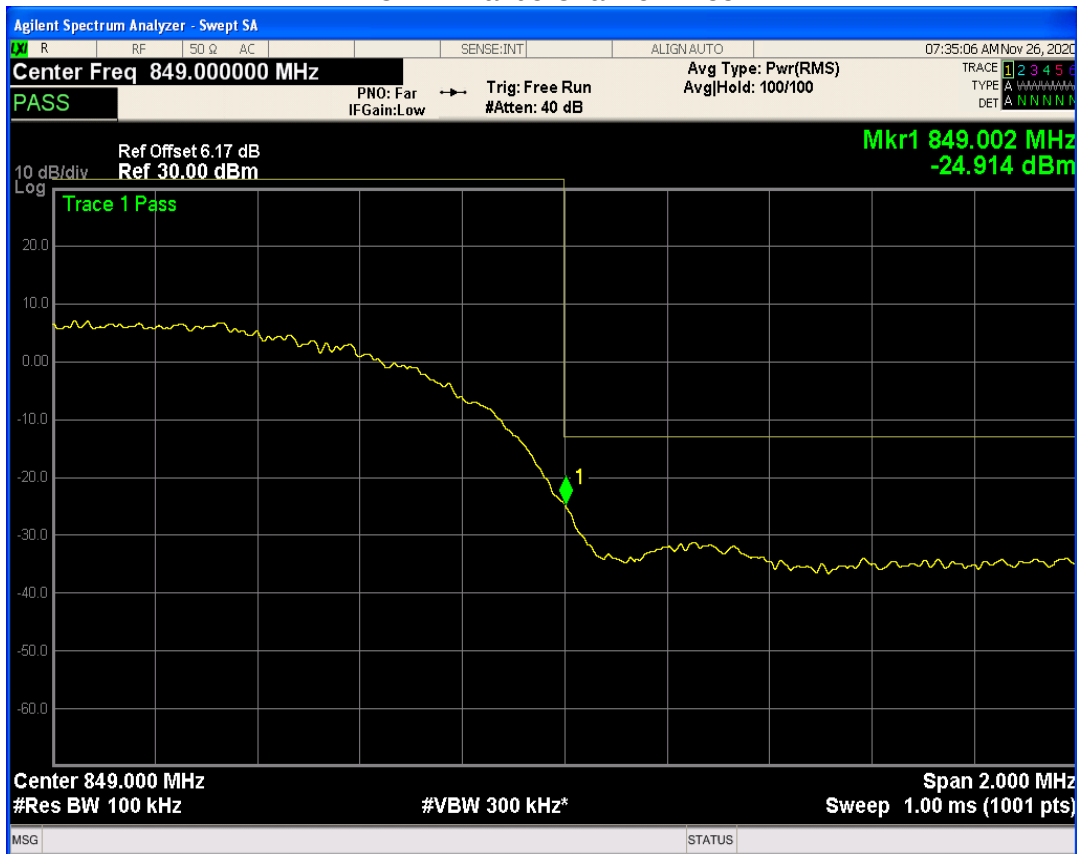


GSM1900 Channel=810

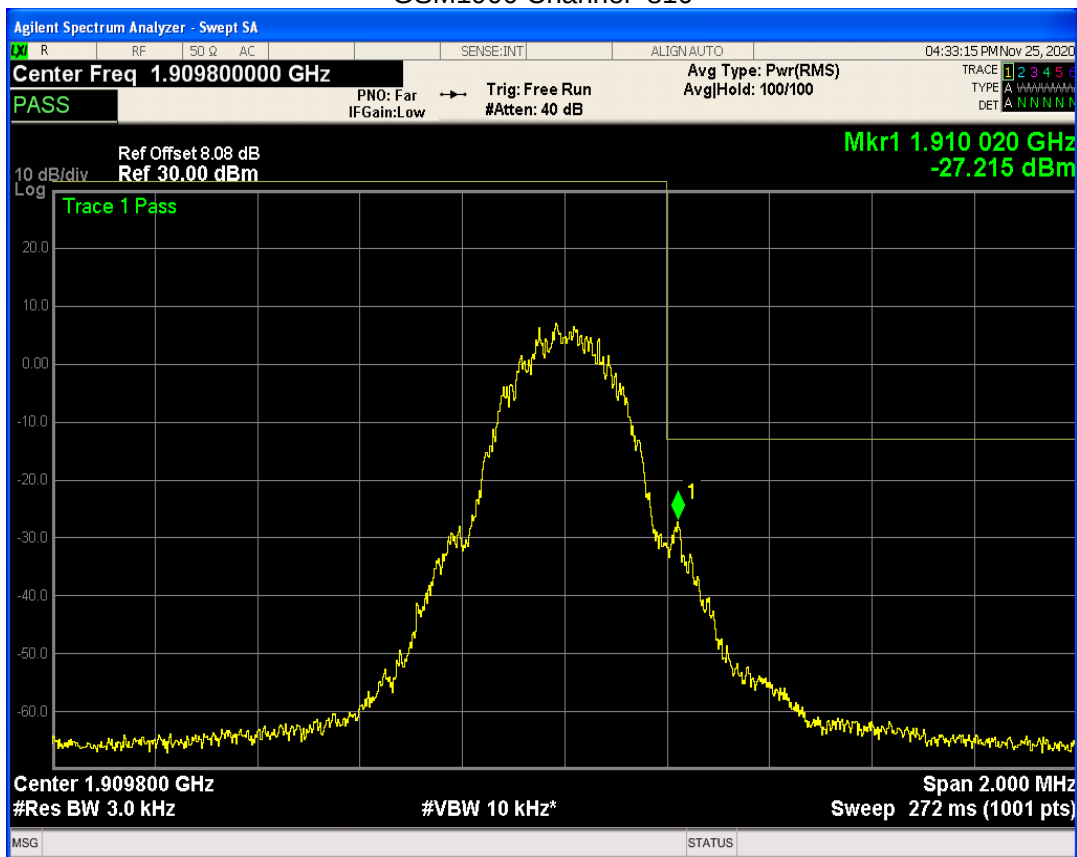


GSM1900 Channel=512

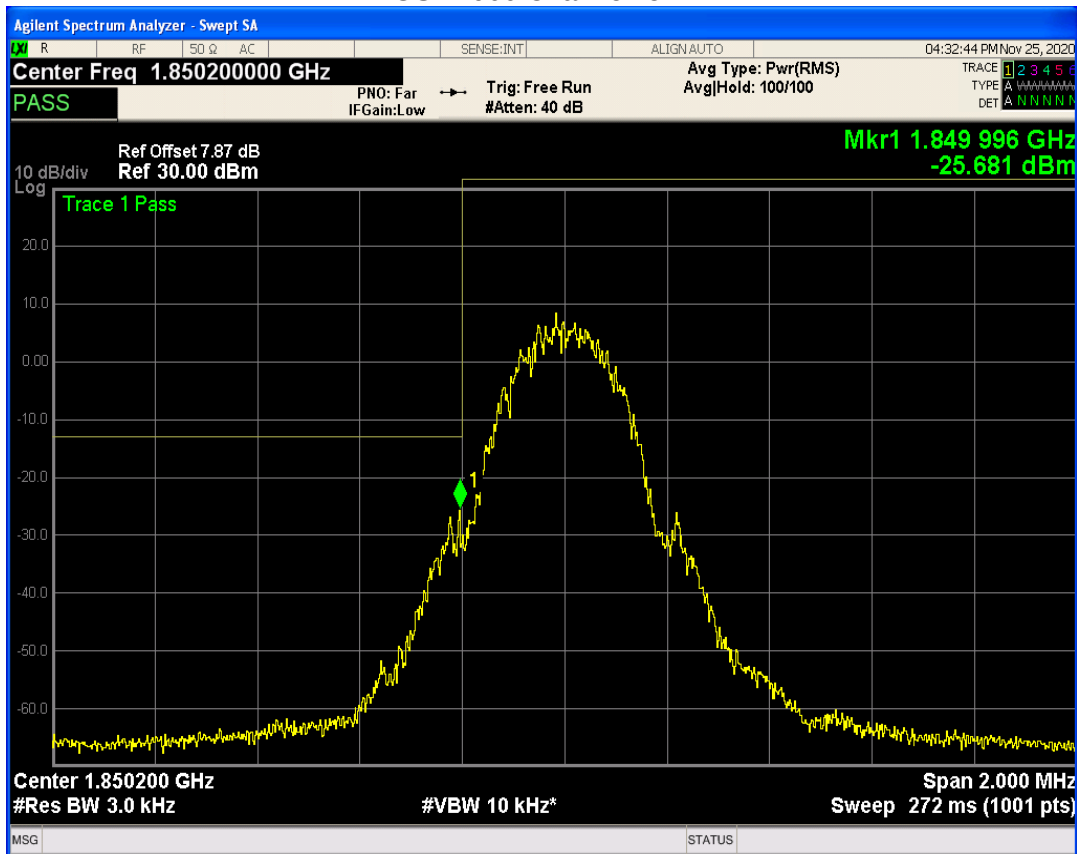

GSM850 Channel=128

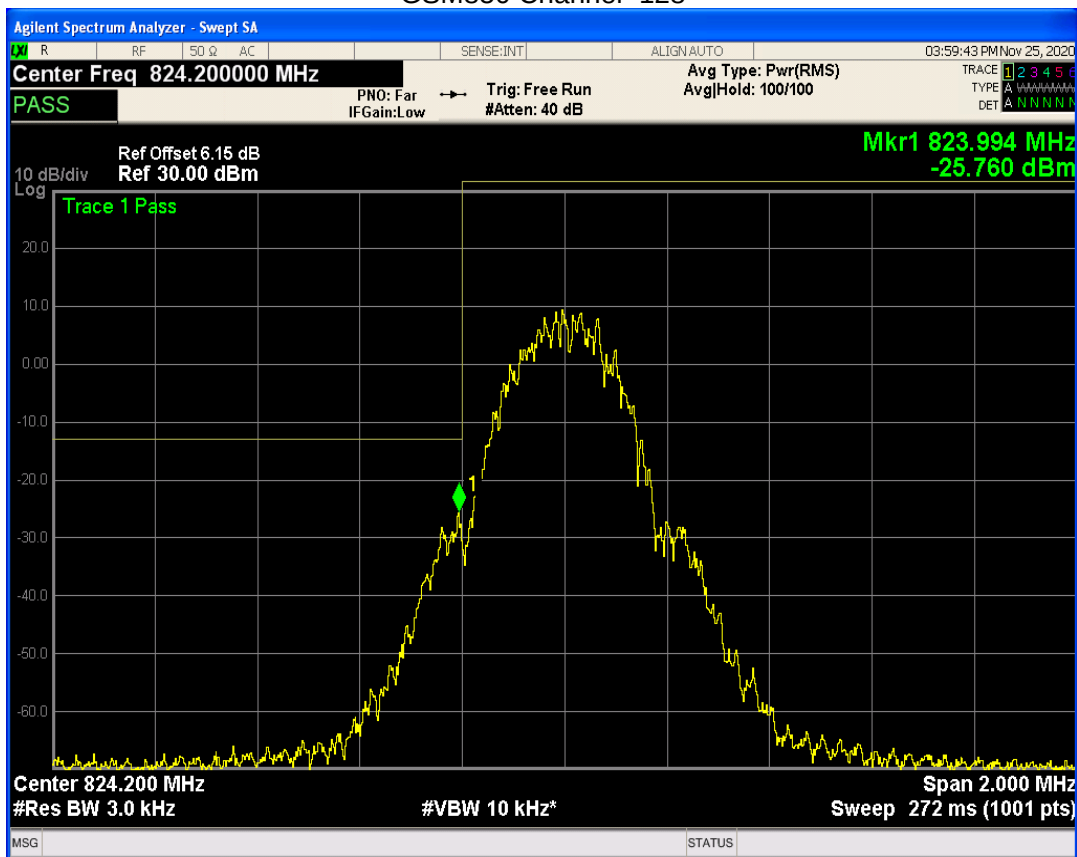


GSM850 Channel=251

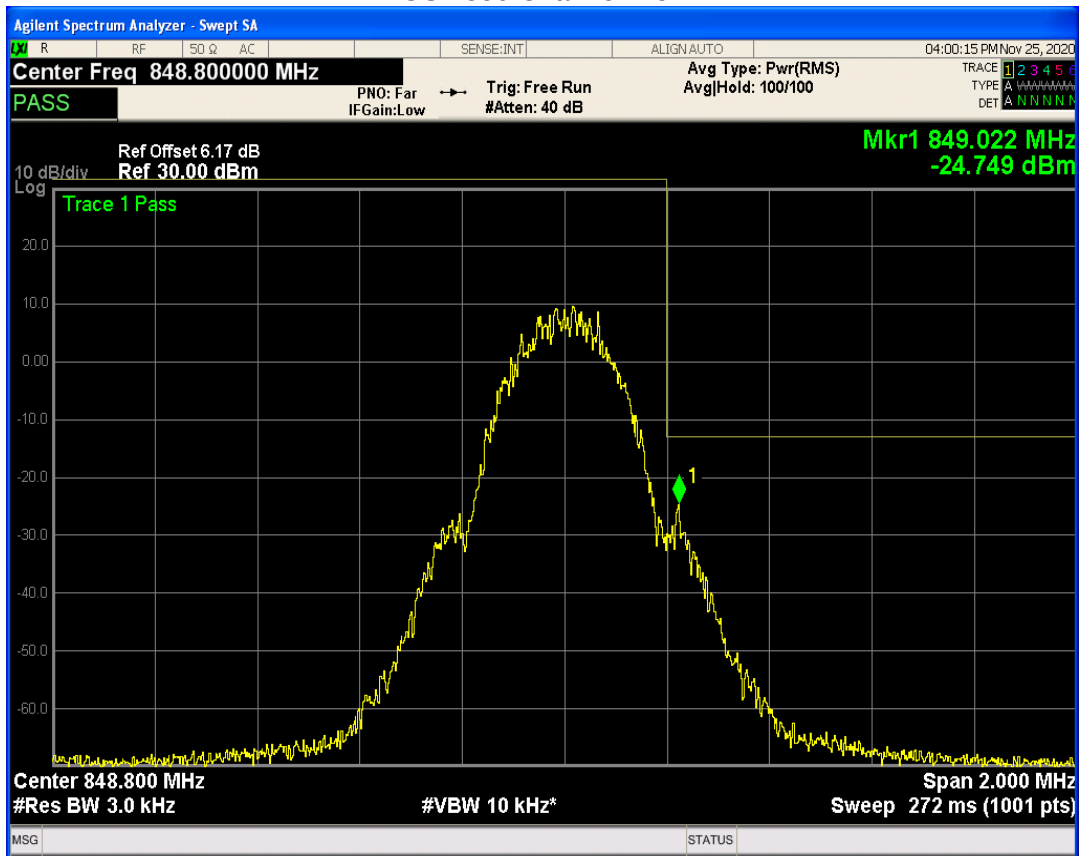


8.5 OUT-OF-BAND EMISSIONS

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
WCDMA Band2	9262	1852.4	19953.07	-23.49	-13	PASS
WCDMA Band2	9400	1880	17938.10	-23.52	-13	PASS
WCDMA Band2	9538	1907.6	17053.43	-23.45	-13	PASS
WCDMA Band4	1312	1712.4	17096.36	-24.06	-13	PASS
WCDMA Band4	1450	1740	19840.24	-24.16	-13	PASS
WCDMA Band4	1513	1752.6	19939.59	-23.71	-13	PASS
WCDMA Band5	4132	826.4	2659.59	-30.20	-13	PASS
WCDMA Band5	4182	836.4	2756.30	-30.69	-13	PASS
WCDMA Band5	4233	846.6	2648.62	-30.69	-13	PASS
GSM1900	512	1850.2	17919.13	-23.61	-13	PASS
GSM1900	661	1880	19819.27	-23.19	-13	PASS
GSM1900	810	1909.8	19051.92	-23.73	-13	PASS
GSM850	128	824.2	3012.03	-28.96	-13	PASS
GSM850	190	836.6	3309.88	-30.24	-13	PASS
GSM850	251	848.8	3192.98	-29.73	-13	PASS


WCDMA Band2 Channel=9262

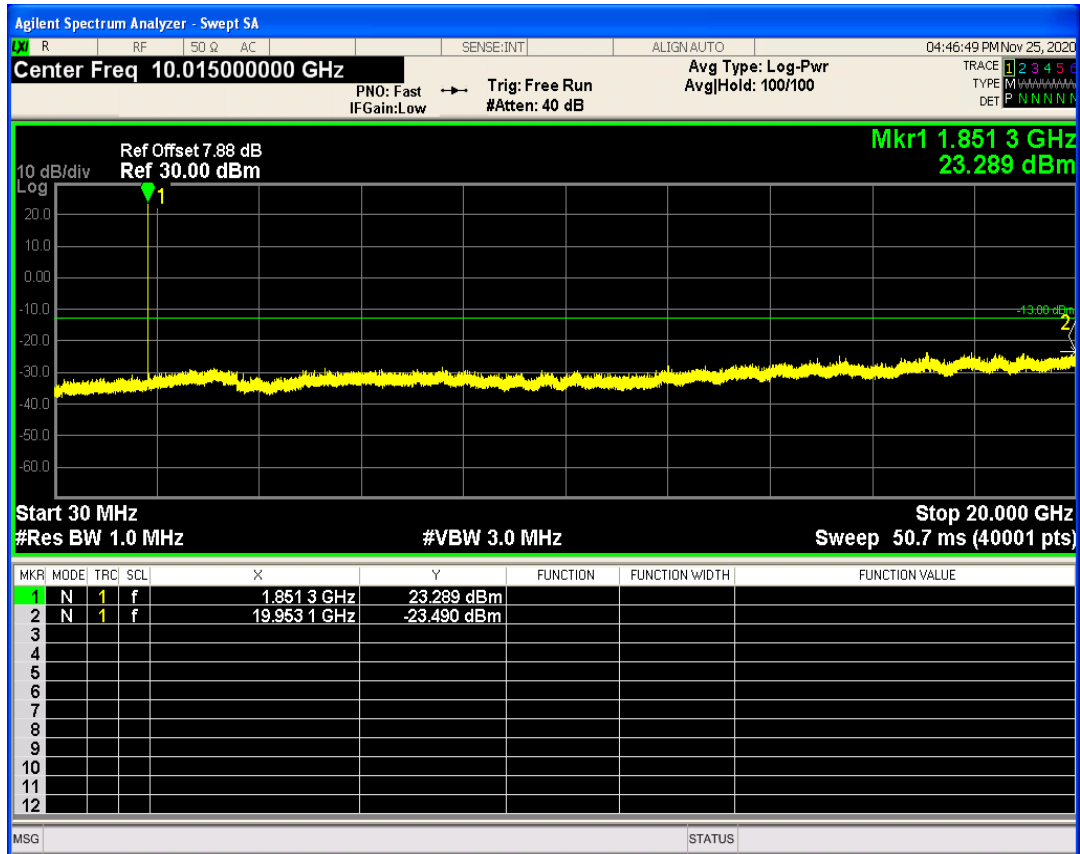


WCDMA Band2 Channel=9538

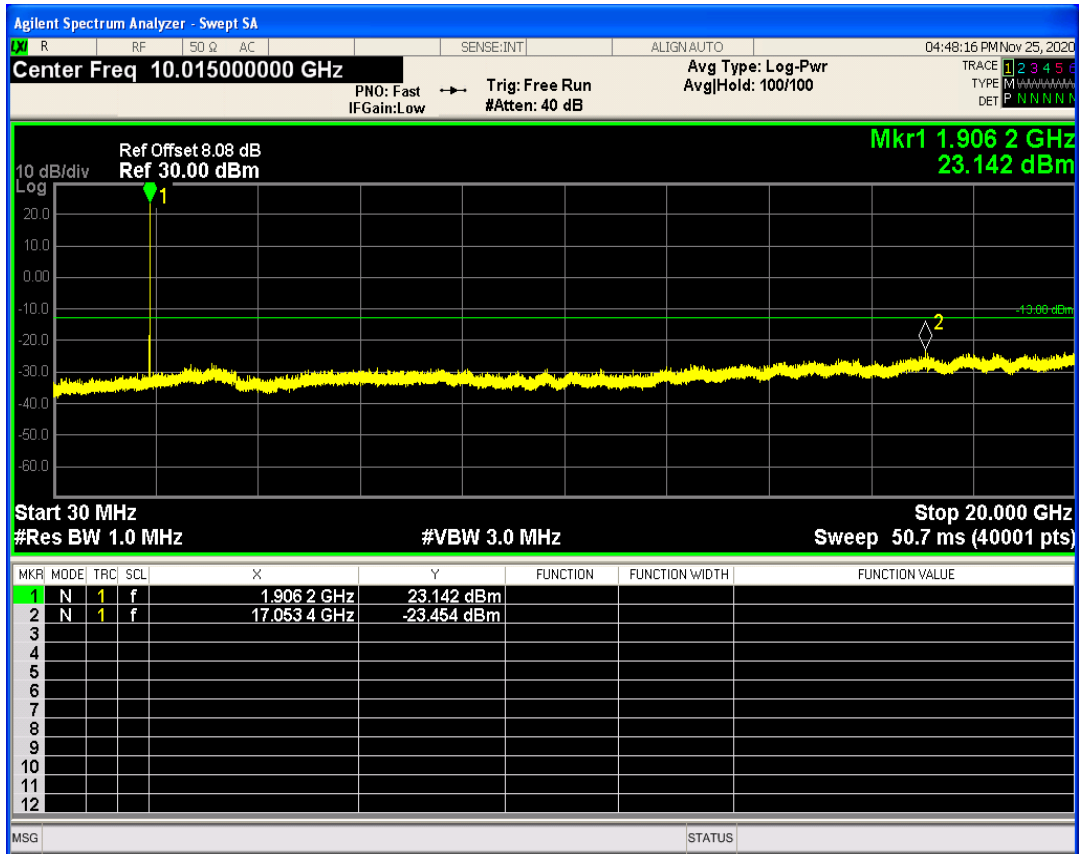


WCDMA Band2 Channel=9400

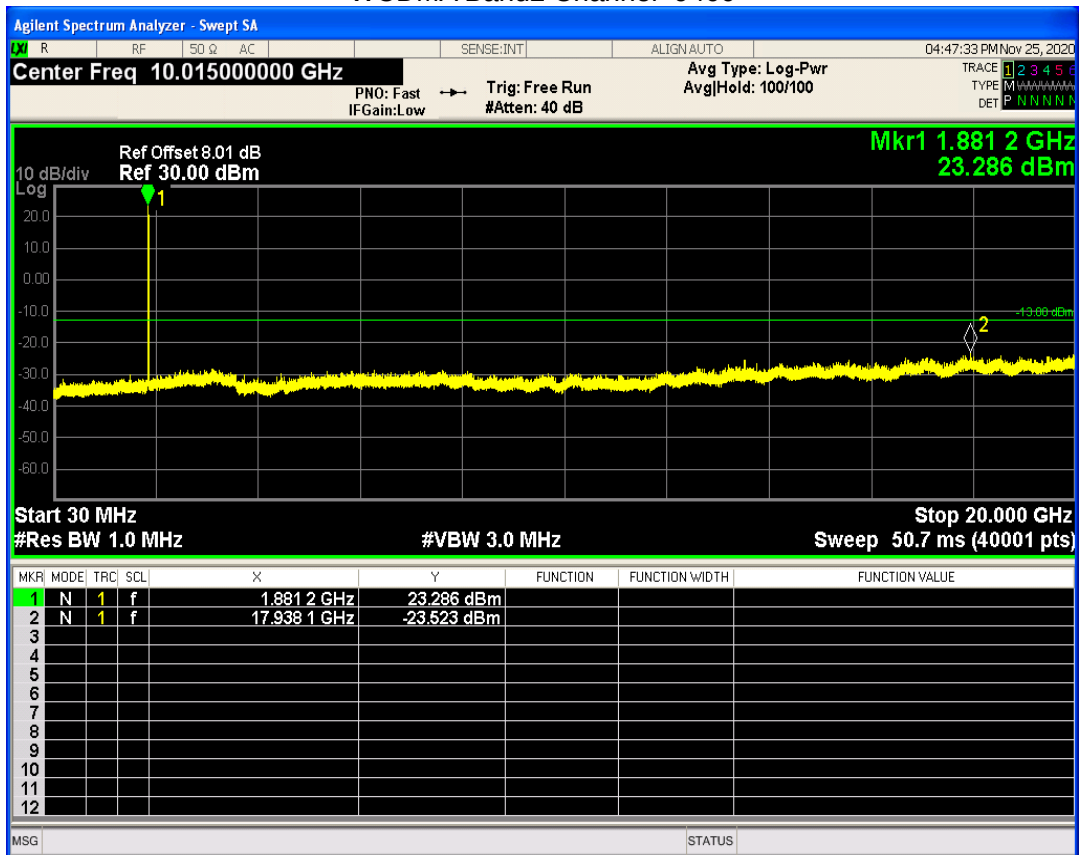


WCDMA Band4 Channel=1450

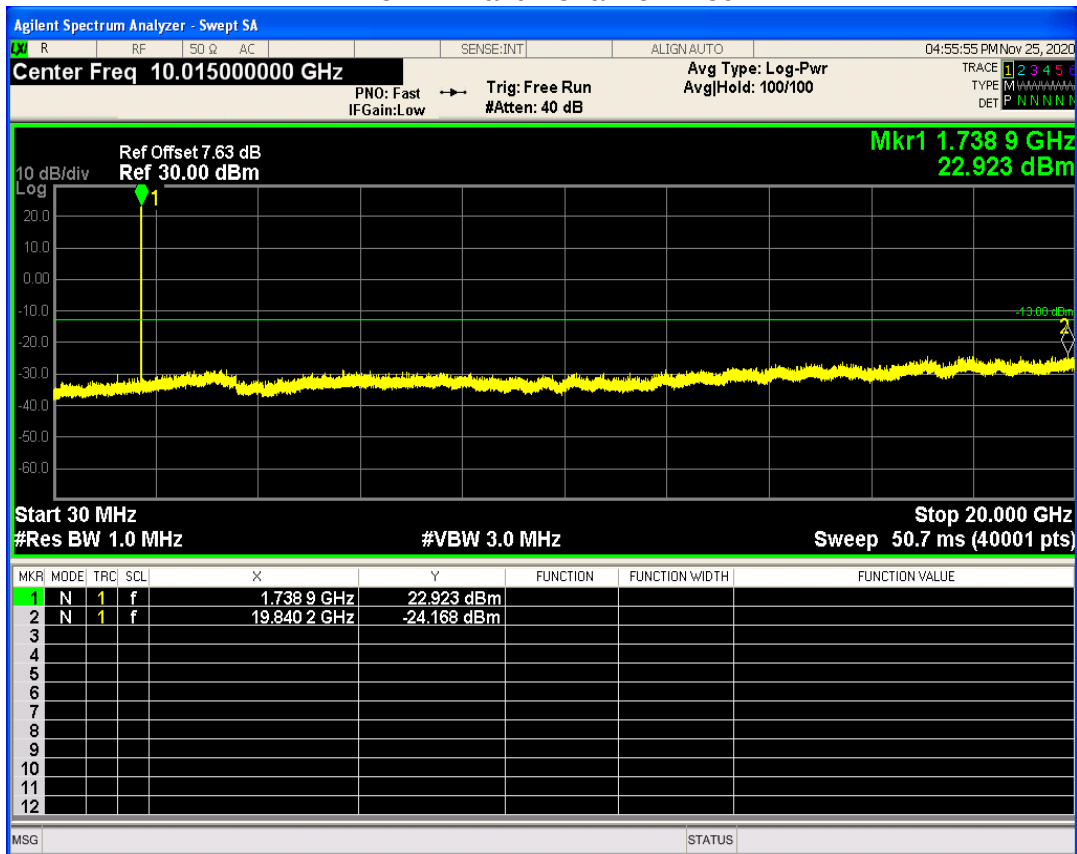


WCDMA Band4 Channel=1312

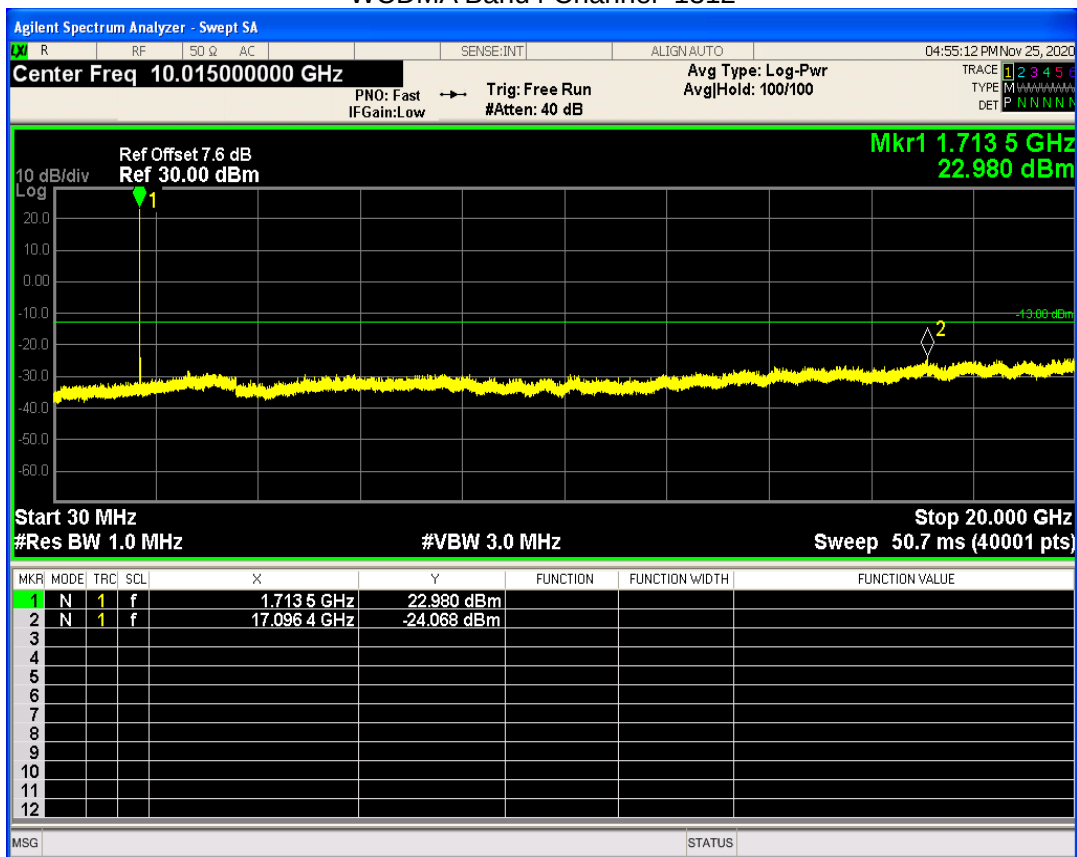


WCDMA Band4 Channel=1513

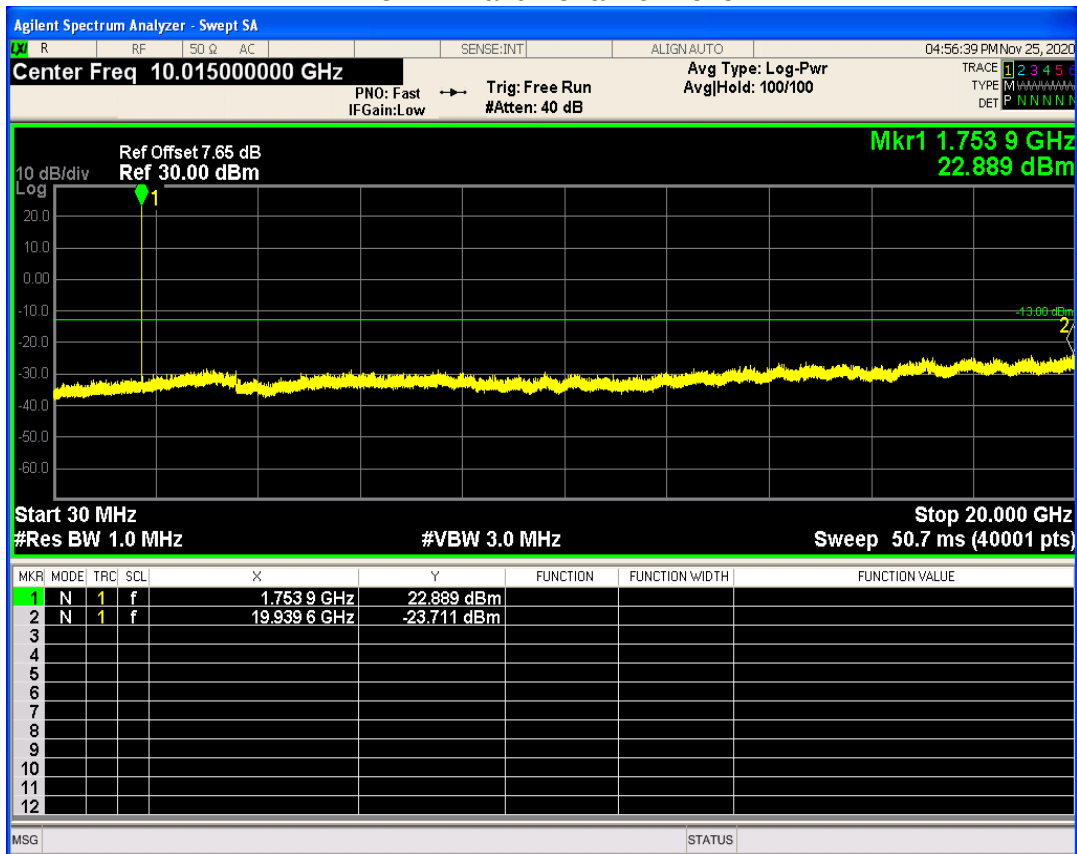


WCDMA Band5 Channel=4132

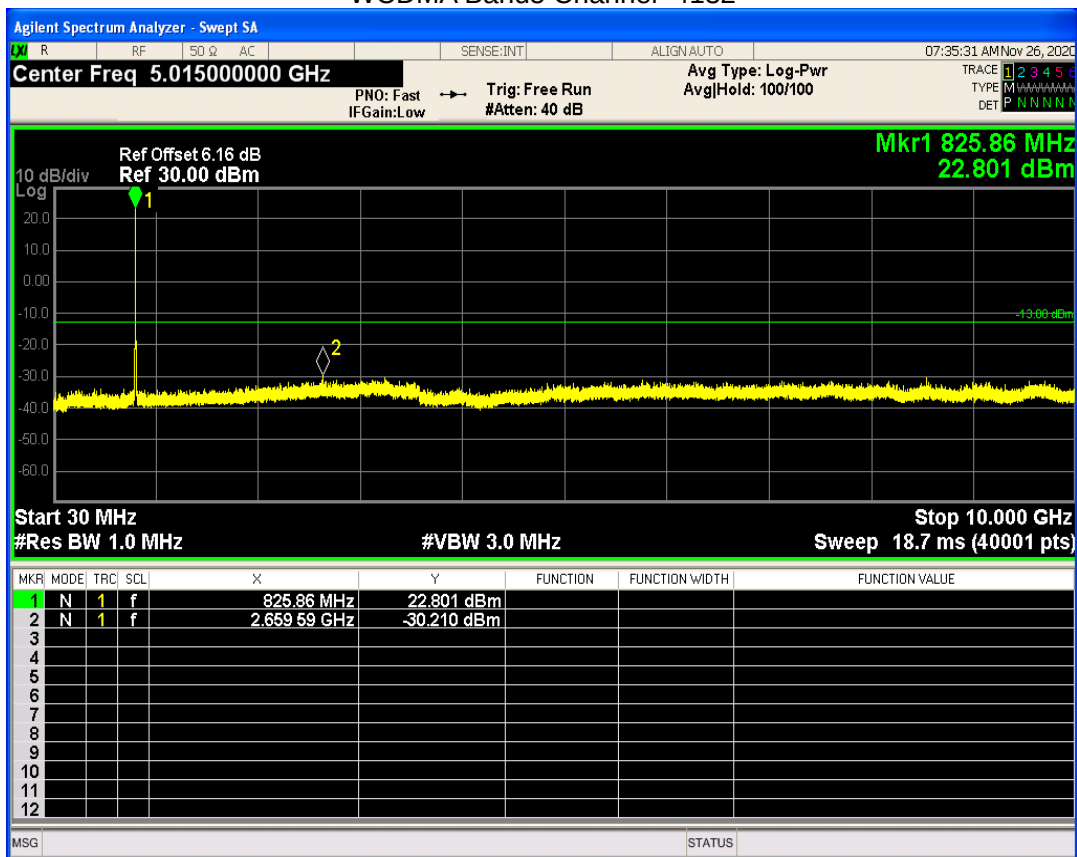


WCDMA Band5 Channel=4182

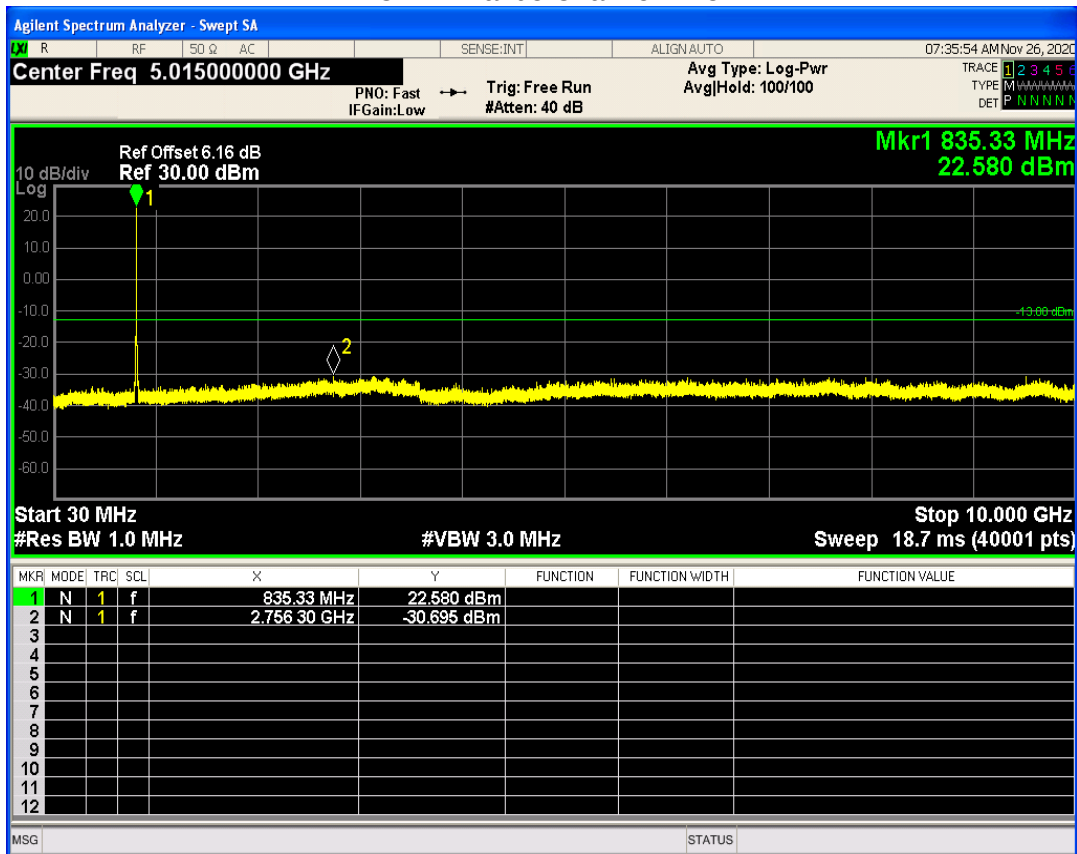


WCDMA Band5 Channel=4233

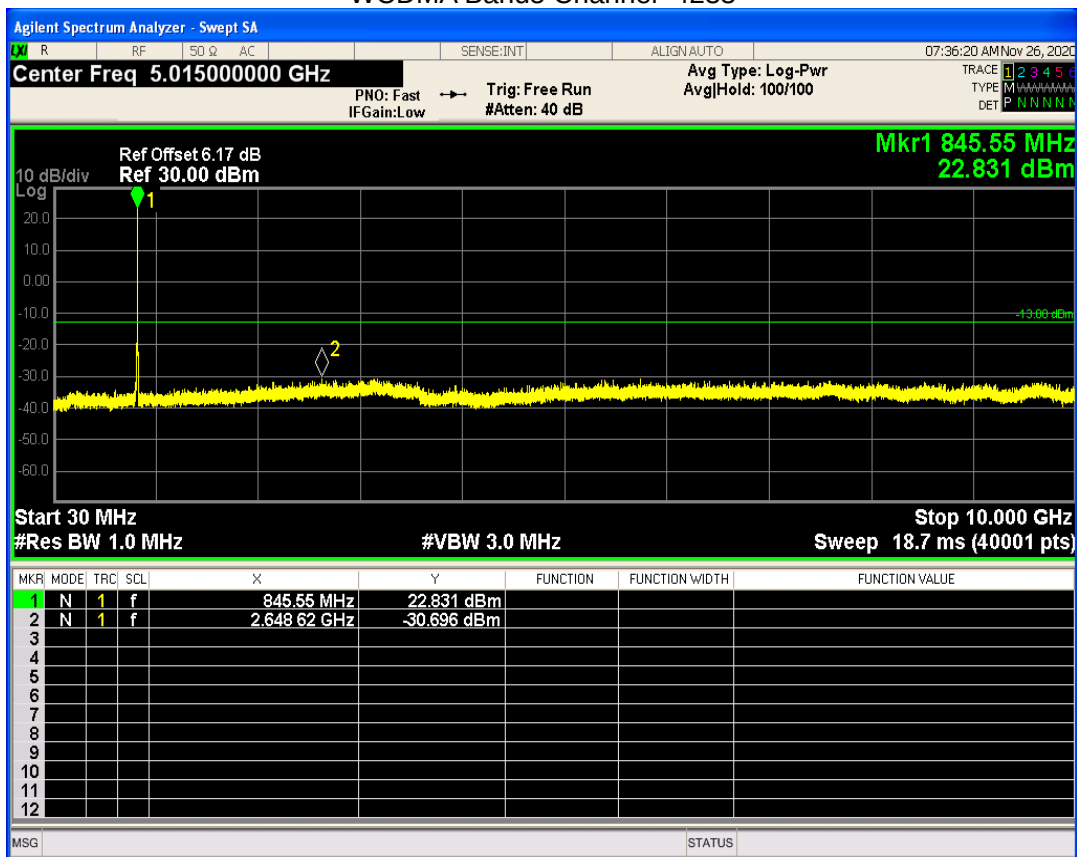


GSM1900 Channel=661

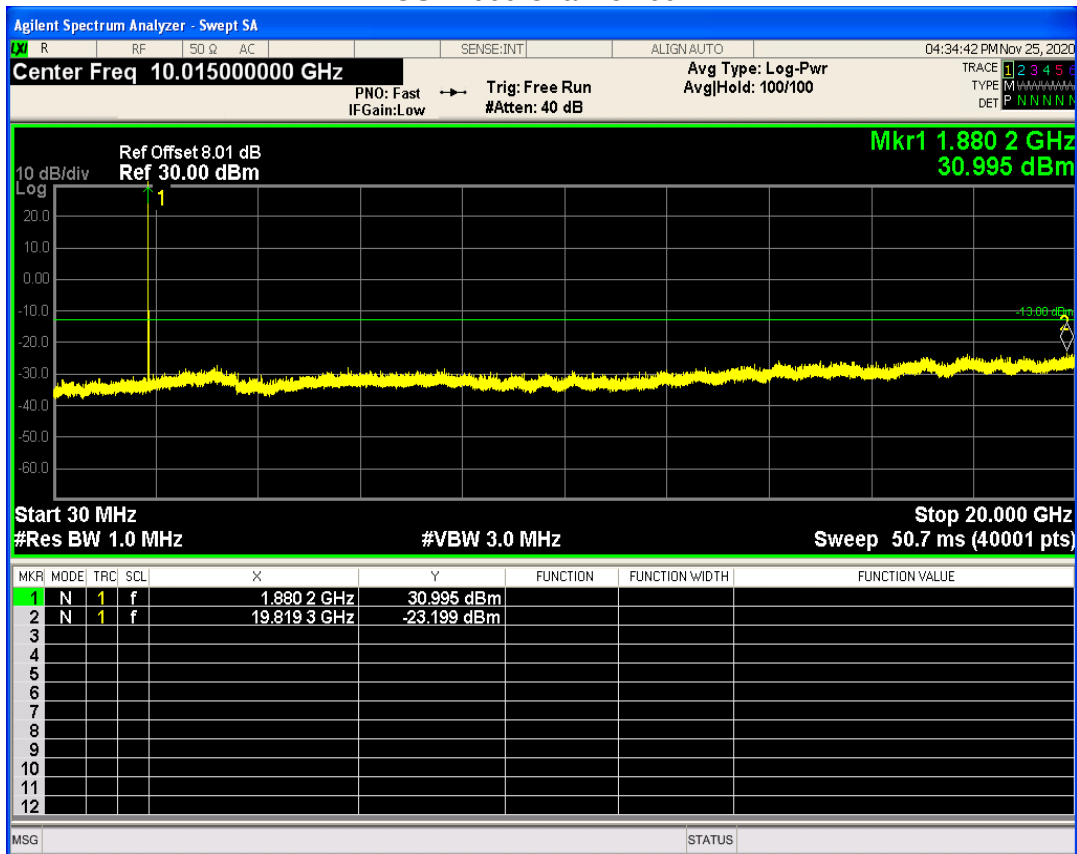


GSM1900 Channel=512

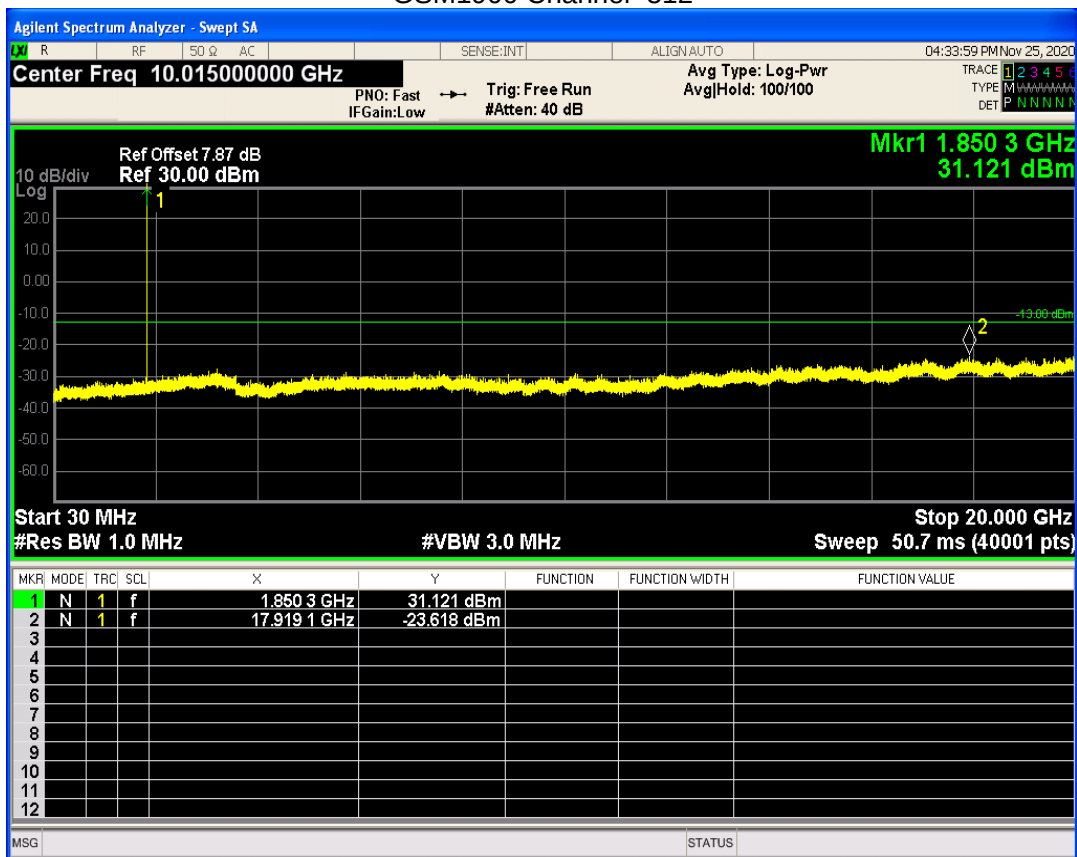


GSM1900 Channel=810

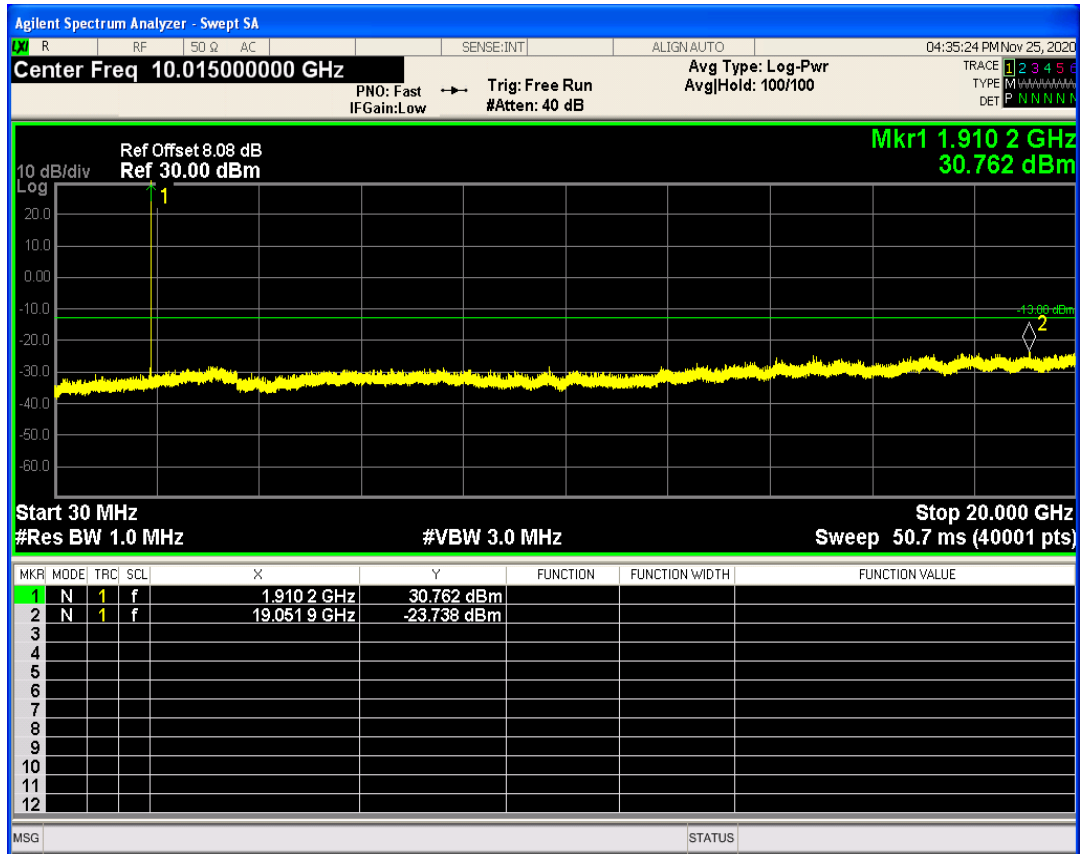


GSM850 Channel=128

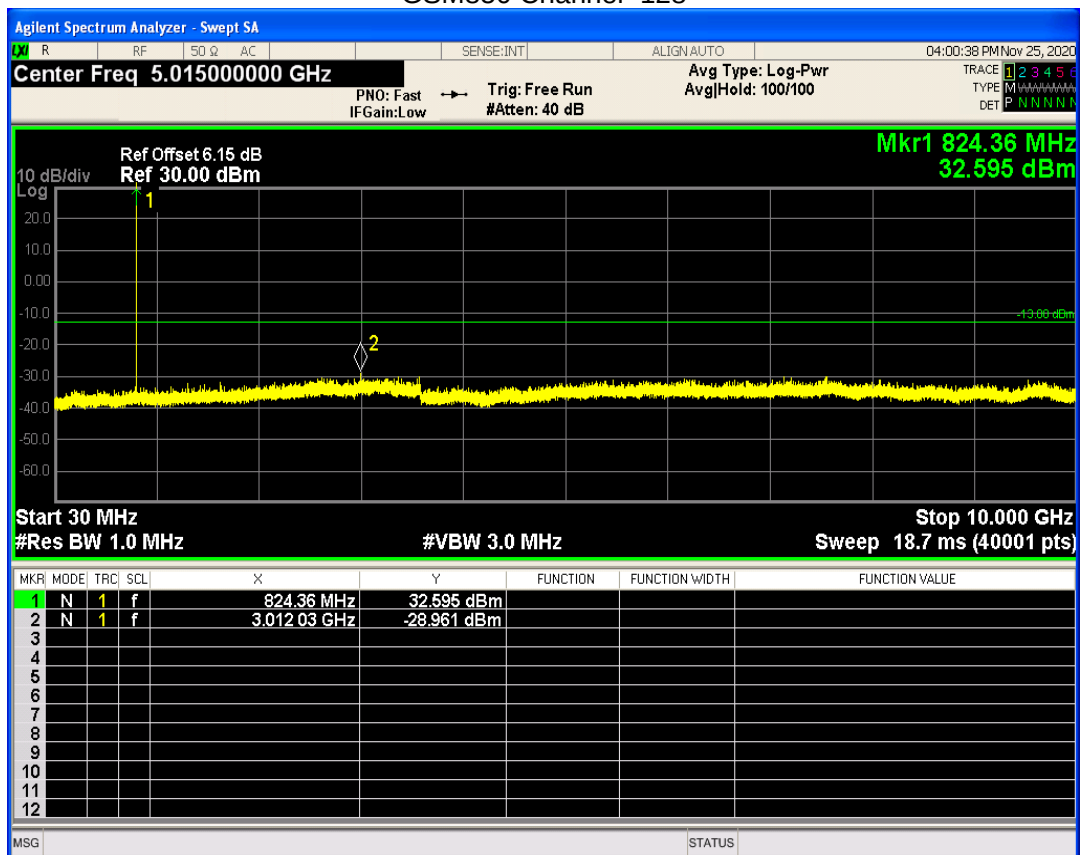

GSM850 Channel=251

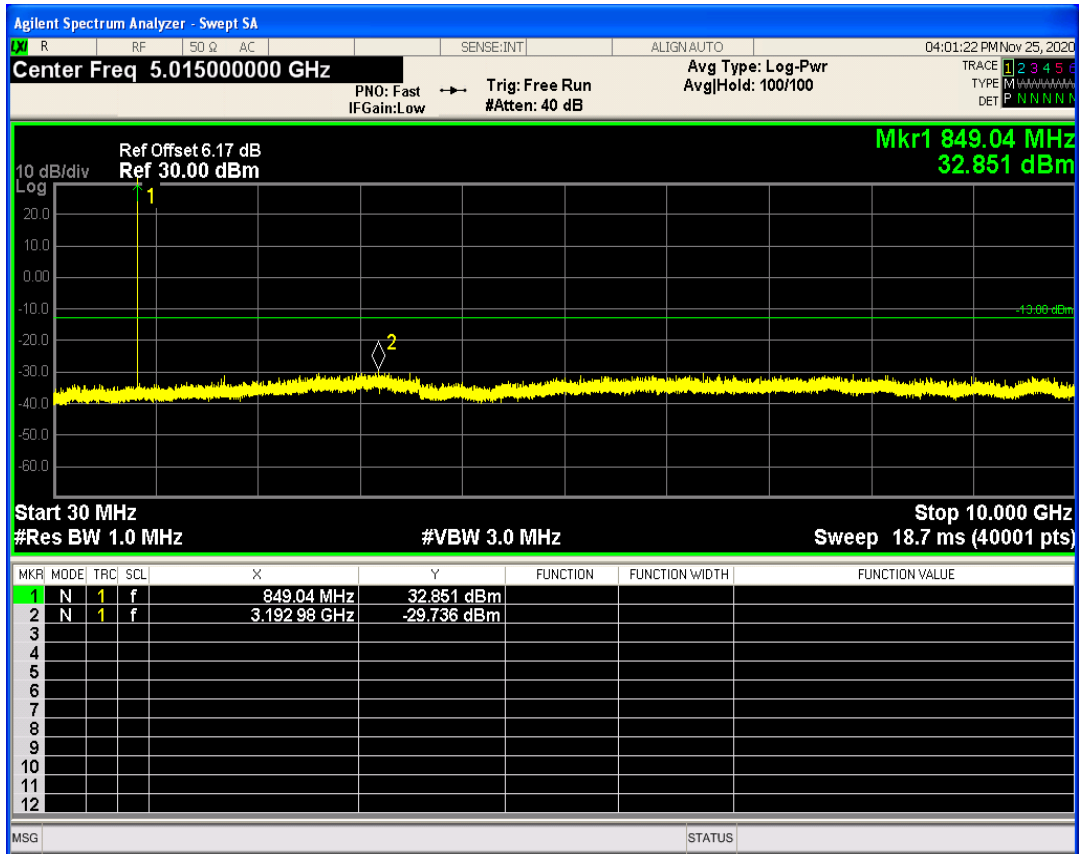

GSM850 Channel=190

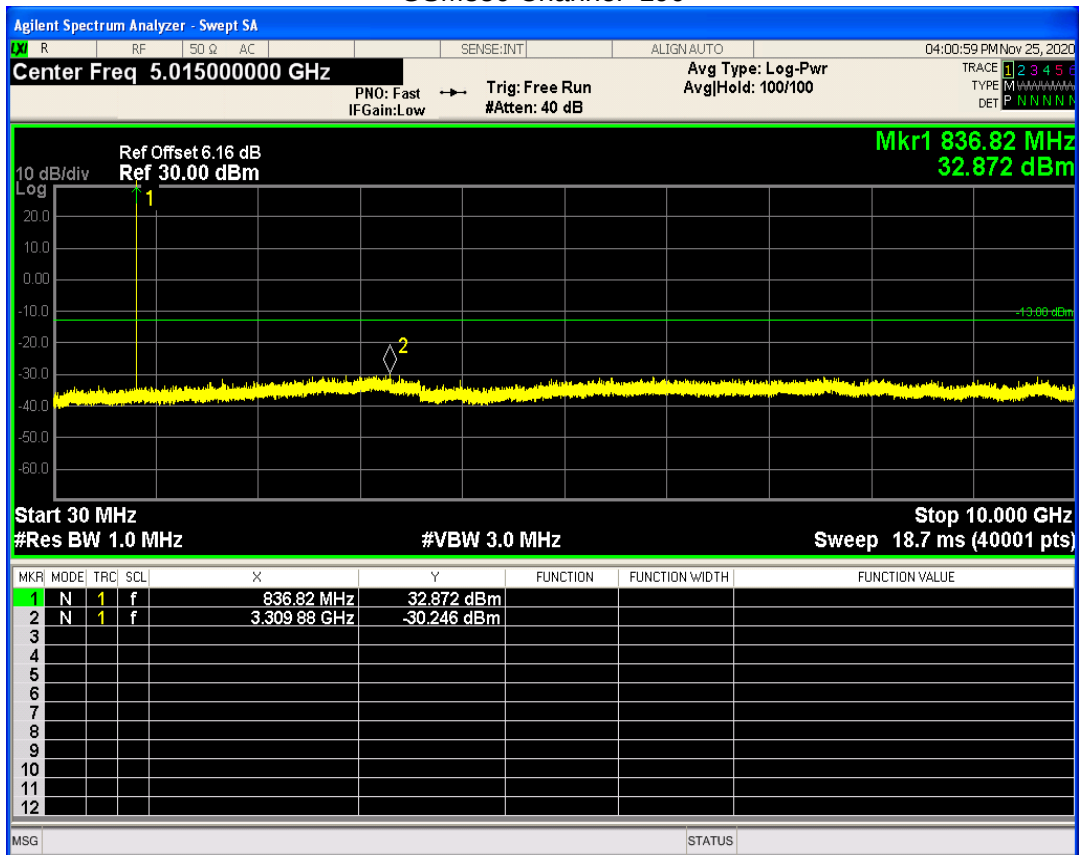

8.6 CONDUCTED OUTPUT POWER

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
HSDPA Band2 Subtest1	9262	1852.4	22.50	PASS
HSDPA Band2 Subtest2	9262	1852.4	22.07	PASS
HSDPA Band2 Subtest3	9262	1852.4	21.83	PASS
HSDPA Band2 Subtest4	9262	1852.4	21.59	PASS
HSDPA Band2 Subtest1	9400	1880	22.51	PASS
HSDPA Band2 Subtest2	9400	1880	22.24	PASS
HSDPA Band2 Subtest3	9400	1880	21.87	PASS
HSDPA Band2 Subtest4	9400	1880	21.64	PASS
HSDPA Band2 Subtest1	9538	1907.6	22.29	PASS
HSDPA Band2 Subtest2	9538	1907.6	21.99	PASS
HSDPA Band2 Subtest3	9538	1907.6	21.85	PASS
HSDPA Band2 Subtest4	9538	1907.6	21.74	PASS
HSDPA Band4 Subtest1	1312	1712.4	22.33	PASS
HSDPA Band4 Subtest2	1312	1712.4	21.84	PASS
HSDPA Band4 Subtest3	1312	1712.4	21.33	PASS
HSDPA Band4 Subtest4	1312	1712.4	21.40	PASS
HSDPA Band4 Subtest1	1450	1740	21.88	PASS
HSDPA Band4 Subtest2	1450	1740	21.75	PASS
HSDPA Band4 Subtest3	1450	1740	21.42	PASS
HSDPA Band4 Subtest4	1450	1740	21.40	PASS
HSDPA Band4 Subtest1	1513	1752.6	22.08	PASS
HSDPA Band4 Subtest2	1513	1752.6	21.92	PASS
HSDPA Band4 Subtest3	1513	1752.6	21.19	PASS
HSDPA Band4 Subtest4	1513	1752.6	21.58	PASS
HSDPA Band5 Subtest1	4132	826.4	22.34	PASS
HSDPA Band5 Subtest2	4132	826.4	21.95	PASS
HSDPA Band5 Subtest3	4132	826.4	21.64	PASS
HSDPA Band5 Subtest4	4132	826.4	21.53	PASS
HSDPA Band5 Subtest1	4182	836.4	22.14	PASS
HSDPA Band5 Subtest2	4182	836.4	21.81	PASS
HSDPA Band5 Subtest3	4182	836.4	21.70	PASS
HSDPA Band5 Subtest4	4182	836.4	21.43	PASS
HSDPA Band5 Subtest1	4233	846.6	22.13	PASS
HSDPA Band5 Subtest2	4233	846.6	21.99	PASS
HSDPA Band5 Subtest3	4233	846.6	21.76	PASS
HSDPA Band5 Subtest4	4233	846.6	21.48	PASS
GPRS1900 1 Slot	512	1850.2	30.66	PASS
GPRS1900 1 Slot	661	1880	30.53	PASS
GPRS1900 1 Slot	810	1909.8	30.36	PASS
GPRS1900 2 Slot	512	1850.2	28.52	PASS
GPRS1900 2 Slot	661	1880	28.18	PASS
GPRS1900 2 Slot	810	1909.8	27.69	PASS
GPRS1900 3 Slot	512	1850.2	26.92	PASS
GPRS1900 3 Slot	661	1880	26.49	PASS
GPRS1900 3 Slot	810	1909.8	25.99	PASS
GPRS1900 4 Slot	512	1850.2	24.74	PASS
GPRS1900 4 Slot	661	1880	24.26	PASS
GPRS1900 4 Slot	810	1909.8	23.74	PASS
GPRS850 1 Slot	128	824.2	32.34	PASS
GPRS850 1 Slot	190	836.6	32.44	PASS
GPRS850 1 Slot	251	848.8	32.50	PASS
GPRS850 2 Slot	128	824.2	30.36	PASS

GPRS850 2 Slot	190	836.6	30.33	PASS
GPRS850 2 Slot	251	848.8	30.33	PASS
GPRS850 3 Slot	128	824.2	28.40	PASS
GPRS850 3 Slot	190	836.6	28.42	PASS
GPRS850 3 Slot	251	848.8	28.41	PASS
GPRS850 4 Slot	128	824.2	26.25	PASS
GPRS850 4 Slot	190	836.6	26.20	PASS
GPRS850 4 Slot	251	848.8	26.28	PASS

8.7 CONDUCTED OUTPUT POWER


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.02	PASS
EGPRS1900 1 Slot	661	1880	26.56	PASS
EGPRS1900 1 Slot	810	1909.8	26.40	PASS
EGPRS1900 2 Slot	512	1850.2	24.35	PASS
EGPRS1900 2 Slot	661	1880	25.07	PASS
EGPRS1900 2 Slot	810	1909.8	25.03	PASS
EGPRS1900 3 Slot	512	1850.2	21.14	PASS
EGPRS1900 3 Slot	661	1880	22.01	PASS
EGPRS1900 3 Slot	810	1909.8	21.73	PASS
EGPRS1900 4 Slot	512	1850.2	19.20	PASS
EGPRS1900 4 Slot	661	1880	20.69	PASS
EGPRS1900 4 Slot	810	1909.8	19.71	PASS
EGPRS850 1 Slot	128	824.2	25.21	PASS
EGPRS850 1 Slot	190	836.6	25.13	PASS
EGPRS850 1 Slot	251	848.8	24.90	PASS
EGPRS850 2 Slot	128	824.2	24.50	PASS
EGPRS850 2 Slot	190	836.6	23.75	PASS
EGPRS850 2 Slot	251	848.8	23.15	PASS
EGPRS850 3 Slot	128	824.2	22.16	PASS
EGPRS850 3 Slot	190	836.6	21.51	PASS
EGPRS850 3 Slot	251	848.8	21.63	PASS
EGPRS850 4 Slot	128	824.2	19.57	PASS
EGPRS850 4 Slot	190	836.6	19.42	PASS
EGPRS850 4 Slot	251	848.8	19.24	PASS
HSUPA Band2 Subtest1	9262	1852.4	22.48	PASS
HSUPA Band2 Subtest2	9262	1852.4	22.36	PASS
HSUPA Band2 Subtest3	9262	1852.4	21.95	PASS
HSUPA Band2 Subtest4	9262	1852.4	22.30	PASS
HSUPA Band2 Subtest5	9262	1852.4	22.05	PASS
HSUPA Band2 Subtest1	9400	1880	22.38	PASS
HSUPA Band2 Subtest2	9400	1880	22.40	PASS
HSUPA Band2 Subtest3	9400	1880	22.21	PASS
HSUPA Band2 Subtest4	9400	1880	22.46	PASS
HSUPA Band2 Subtest5	9400	1880	22.36	PASS
HSUPA Band2 Subtest1	9538	1907.6	22.29	PASS
HSUPA Band2 Subtest2	9538	1907.6	22.26	PASS
HSUPA Band2 Subtest3	9538	1907.6	22.08	PASS
HSUPA Band2 Subtest4	9538	1907.6	22.25	PASS
HSUPA Band2 Subtest5	9538	1907.6	21.90	PASS
HSUPA Band4 Subtest1	1312	1712.4	22.13	PASS
HSUPA Band4 Subtest2	1312	1712.4	22.19	PASS
HSUPA Band4 Subtest3	1312	1712.4	21.71	PASS
HSUPA Band4 Subtest4	1312	1712.4	22.15	PASS
HSUPA Band4 Subtest5	1312	1712.4	22.08	PASS
HSUPA Band4 Subtest1	1450	1740	21.91	PASS
HSUPA Band4 Subtest2	1450	1740	21.84	PASS
HSUPA Band4 Subtest3	1450	1740	21.41	PASS
HSUPA Band4 Subtest4	1450	1740	21.93	PASS
HSUPA Band4 Subtest5	1450	1740	21.86	PASS
HSUPA Band4 Subtest1	1513	1752.6	21.85	PASS
HSUPA Band4 Subtest2	1513	1752.6	21.99	PASS

HSUPA Band4 Subtest3	1513	1752.6	21.97	PASS
HSUPA Band4 Subtest4	1513	1752.6	22.04	PASS
HSUPA Band4 Subtest5	1513	1752.6	21.94	PASS
HSUPA Band5 Subtest1	4132	826.4	22.23	PASS
HSUPA Band5 Subtest2	4132	826.4	22.16	PASS
HSUPA Band5 Subtest3	4132	826.4	21.81	PASS
HSUPA Band5 Subtest4	4132	826.4	22.14	PASS
HSUPA Band5 Subtest5	4132	826.4	21.88	PASS
HSUPA Band5 Subtest1	4182	836.4	21.91	PASS
HSUPA Band5 Subtest2	4182	836.4	22.04	PASS
HSUPA Band5 Subtest3	4182	836.4	21.50	PASS
HSUPA Band5 Subtest4	4182	836.4	22.02	PASS
HSUPA Band5 Subtest5	4182	836.4	21.72	PASS
HSUPA Band5 Subtest1	4233	846.6	21.87	PASS
HSUPA Band5 Subtest2	4233	846.6	22.07	PASS
HSUPA Band5 Subtest3	4233	846.6	21.75	PASS
HSUPA Band5 Subtest4	4233	846.6	22.07	PASS
HSUPA Band5 Subtest5	4233	846.6	21.87	PASS


8.8 PEAK-TO-AVERAGE RATIO

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	7.423571429	13.00	PASS
EGPRS1900	661	1880	6.848235294	13.00	PASS
EGPRS1900	810	1909.8	7.51960688	13.00	PASS
EGPRS850	128	824.2	9.974544592	13.00	PASS
EGPRS850	190	836.6	10.13786219	13.00	PASS
EGPRS850	251	848.8	9.818377724	13.00	PASS


EGPRS1900 Channel=512

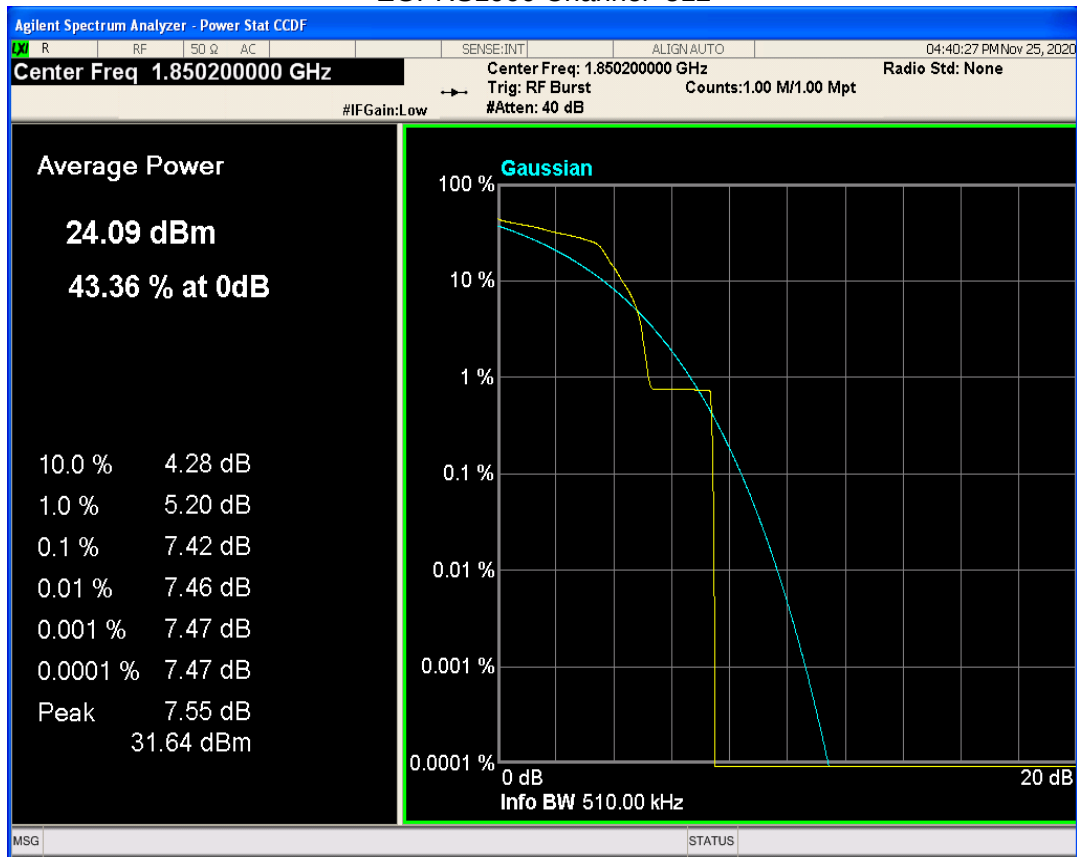


EGPRS1900 Channel=810

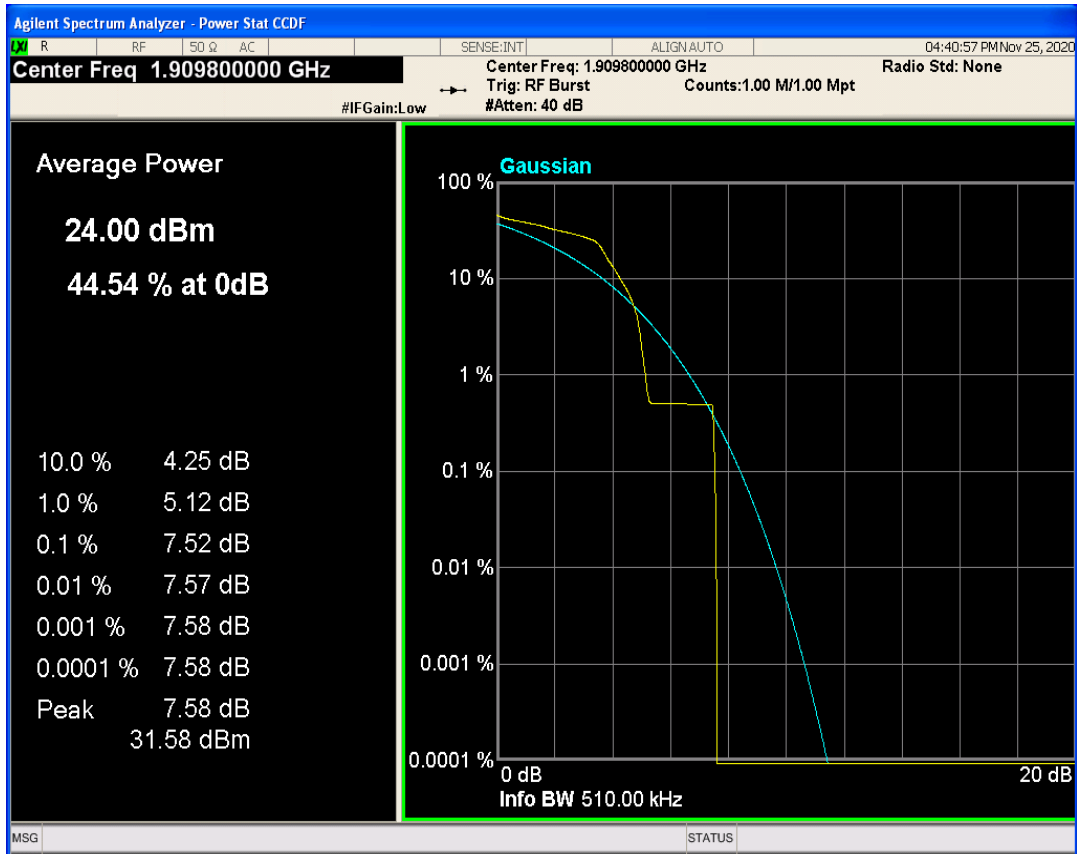


EGPRS1900 Channel=661

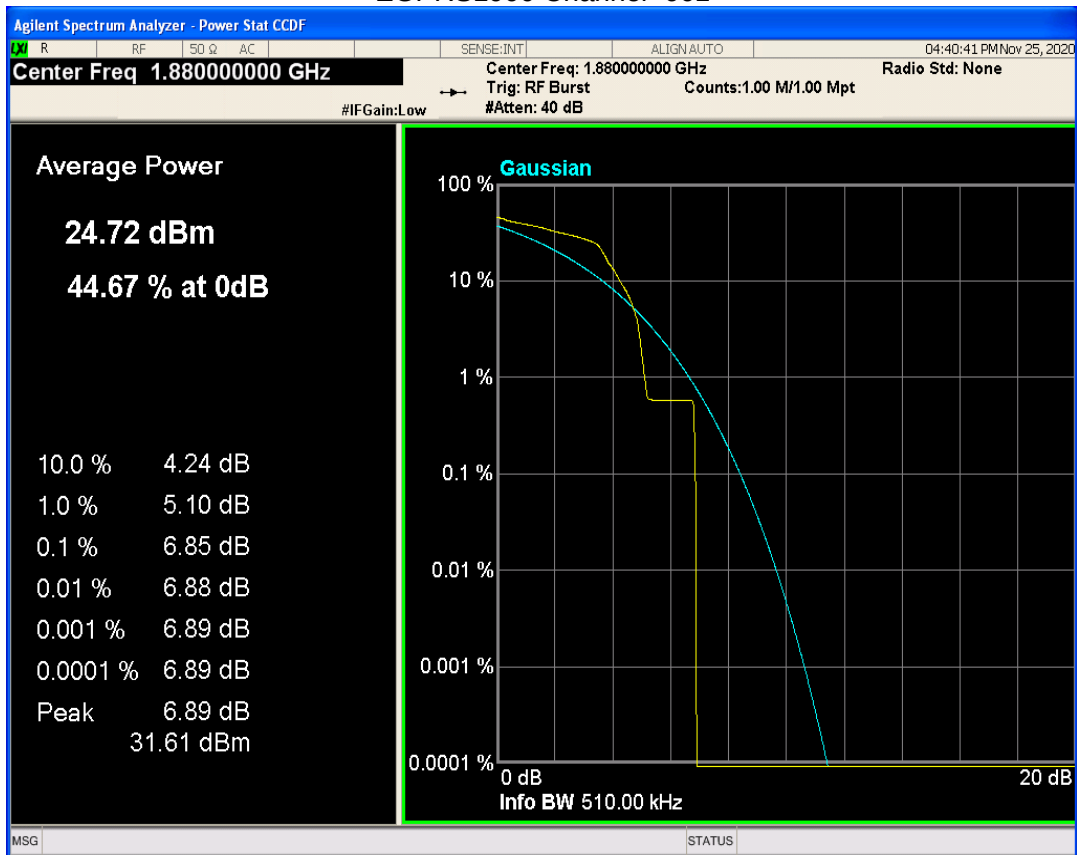


EGPRS850 Channel=128

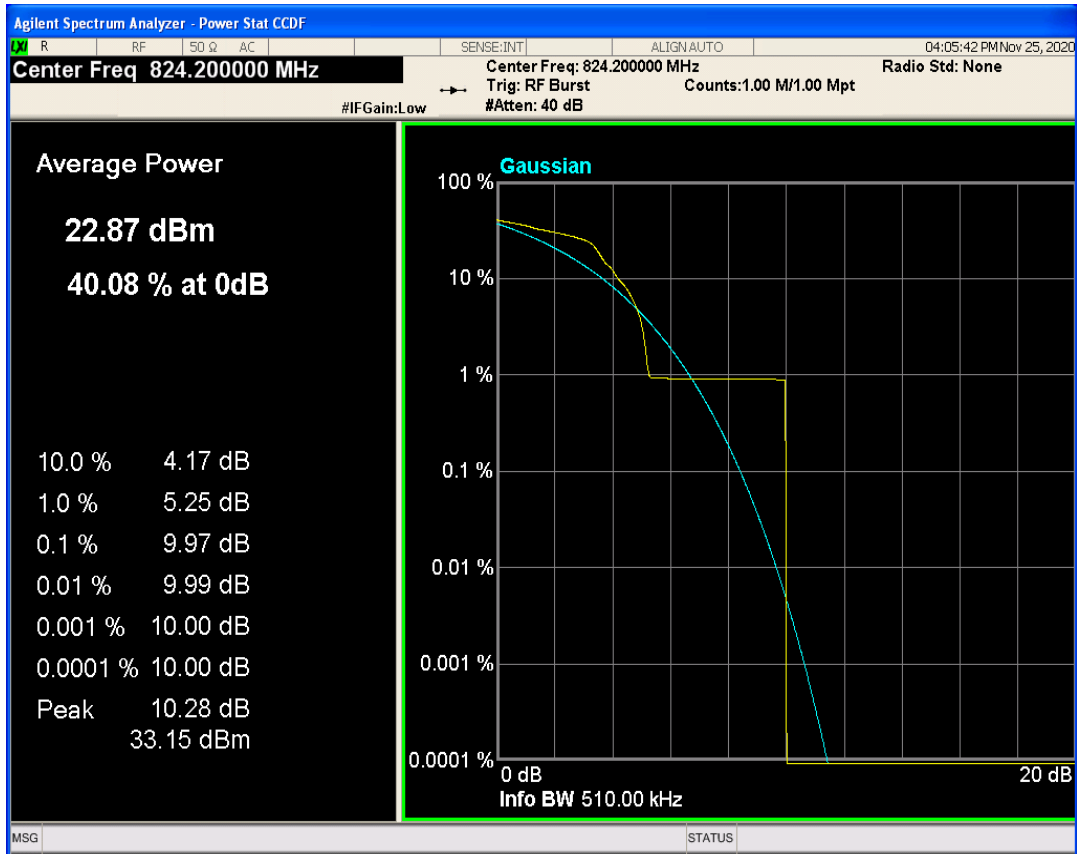

EGPRS850 Channel=190

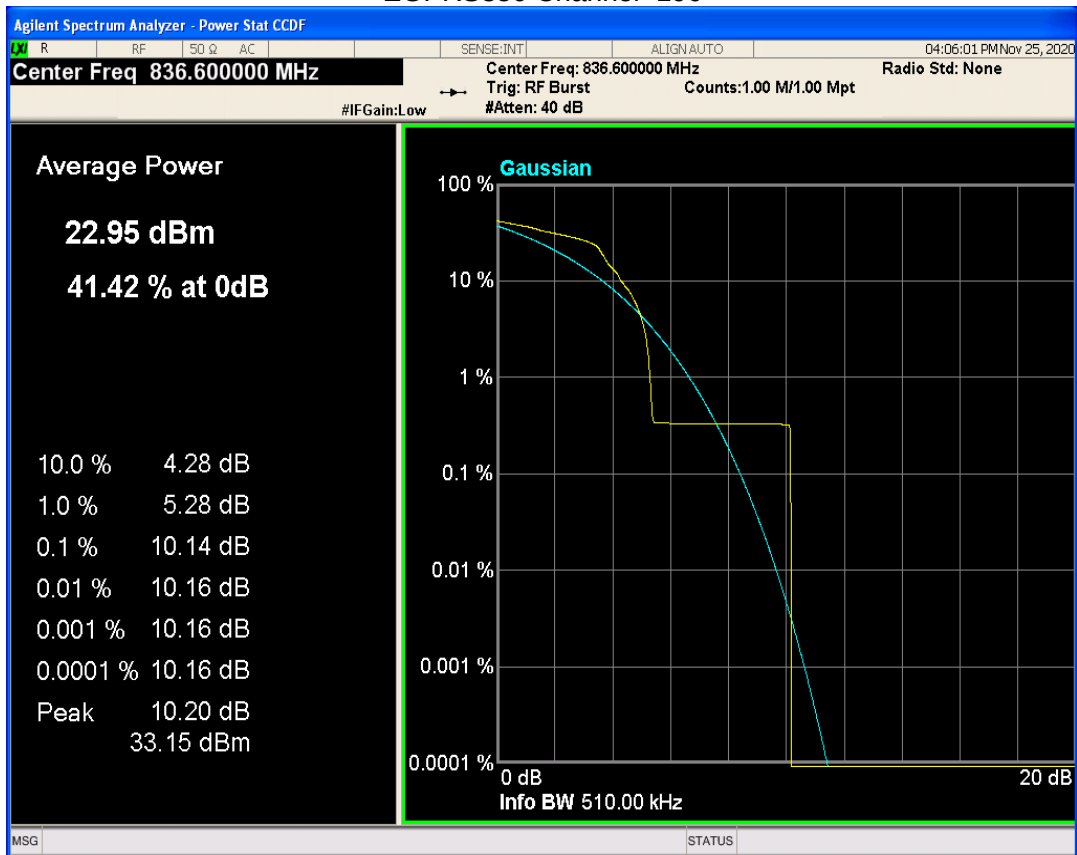


EGPRS850 Channel=251

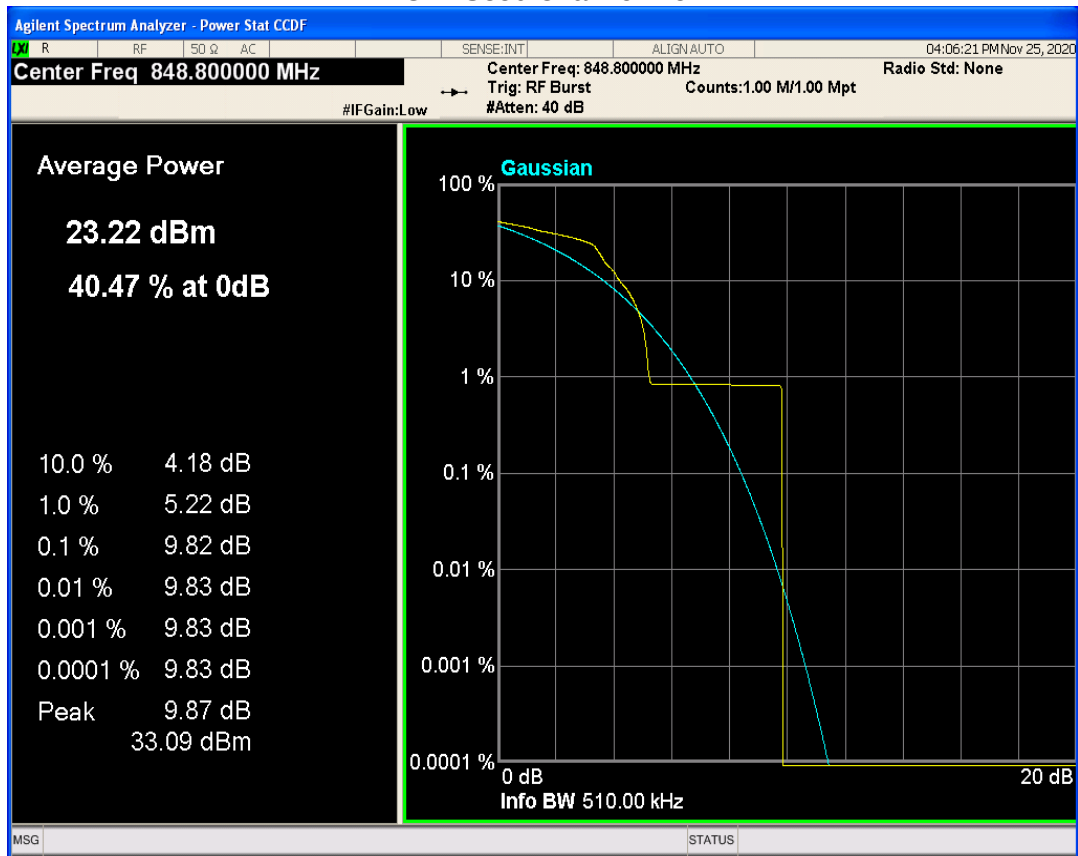


8.9 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	243.351	311.072	PASS
EGPRS1900	661	1880	253.863	308.276	PASS
EGPRS1900	810	1909.8	252.975	317.892	PASS
EGPRS850	128	824.2	255.188	324.130	PASS
EGPRS850	190	836.6	235.788	289.919	PASS
EGPRS850	251	848.8	236.497	295.657	PASS


EGPRS1900 Channel=512

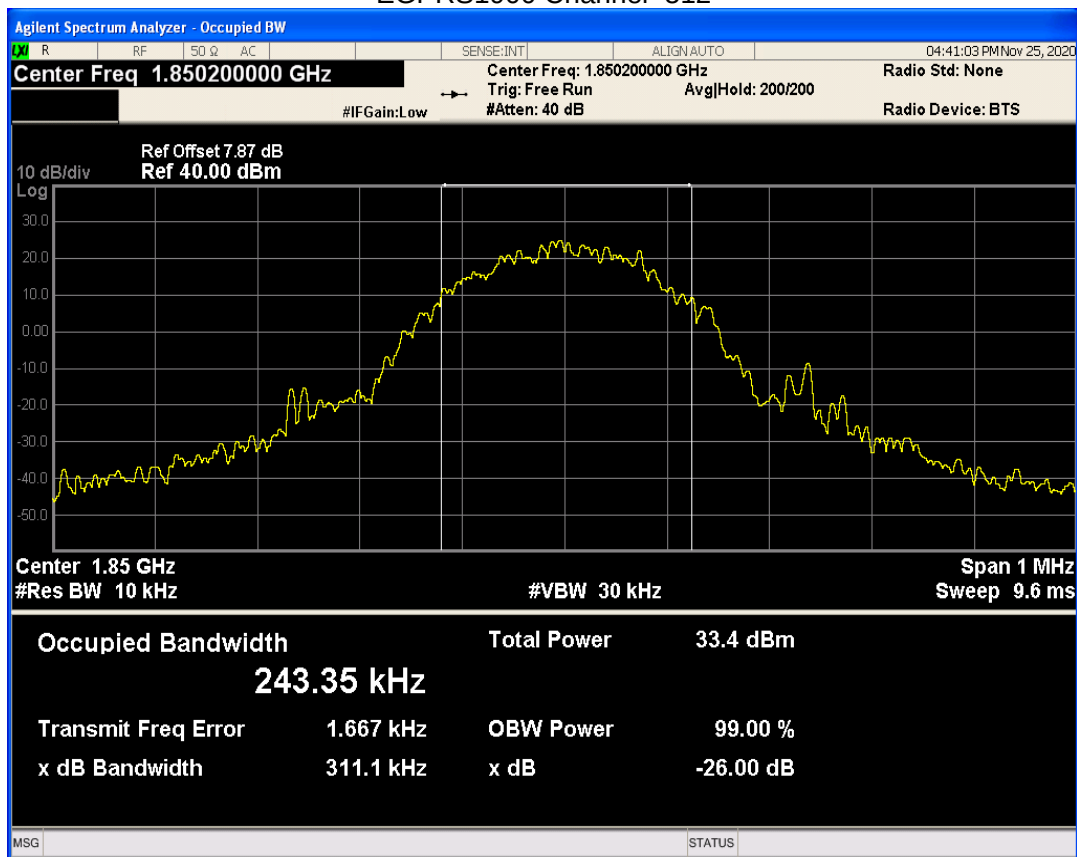


EGPRS1900 Channel=810

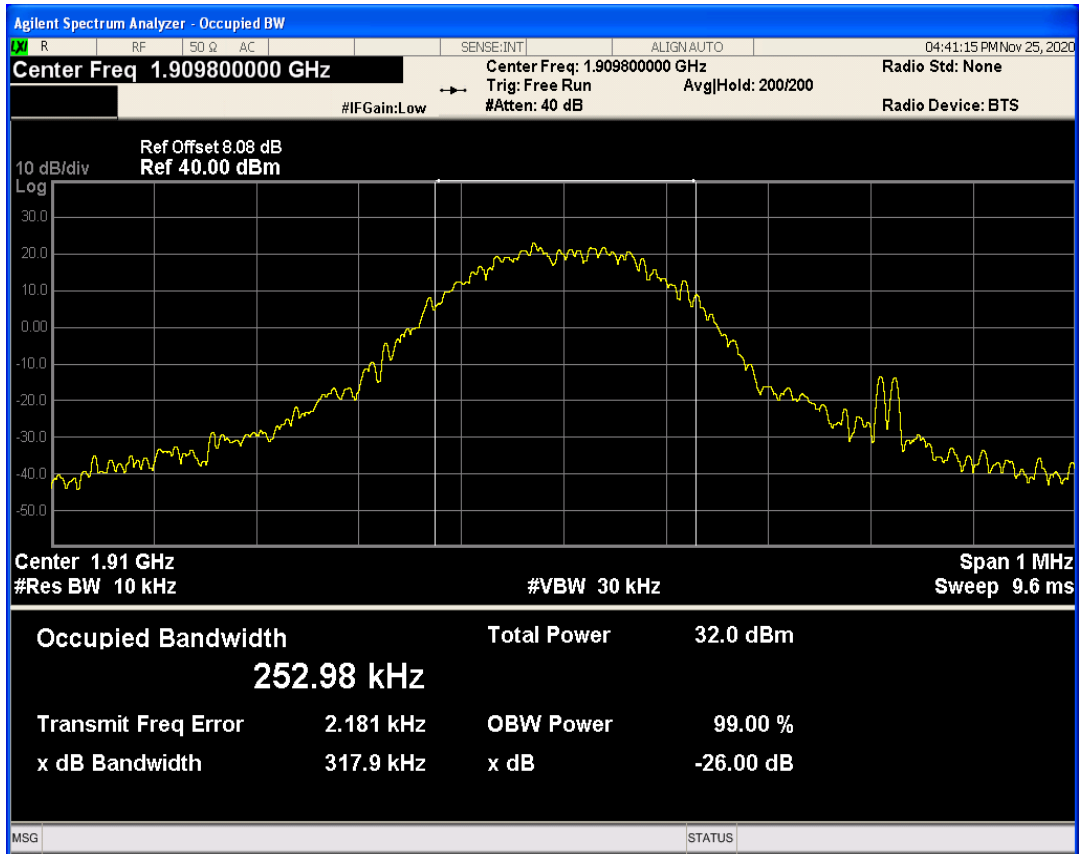


EGPRS1900 Channel=661

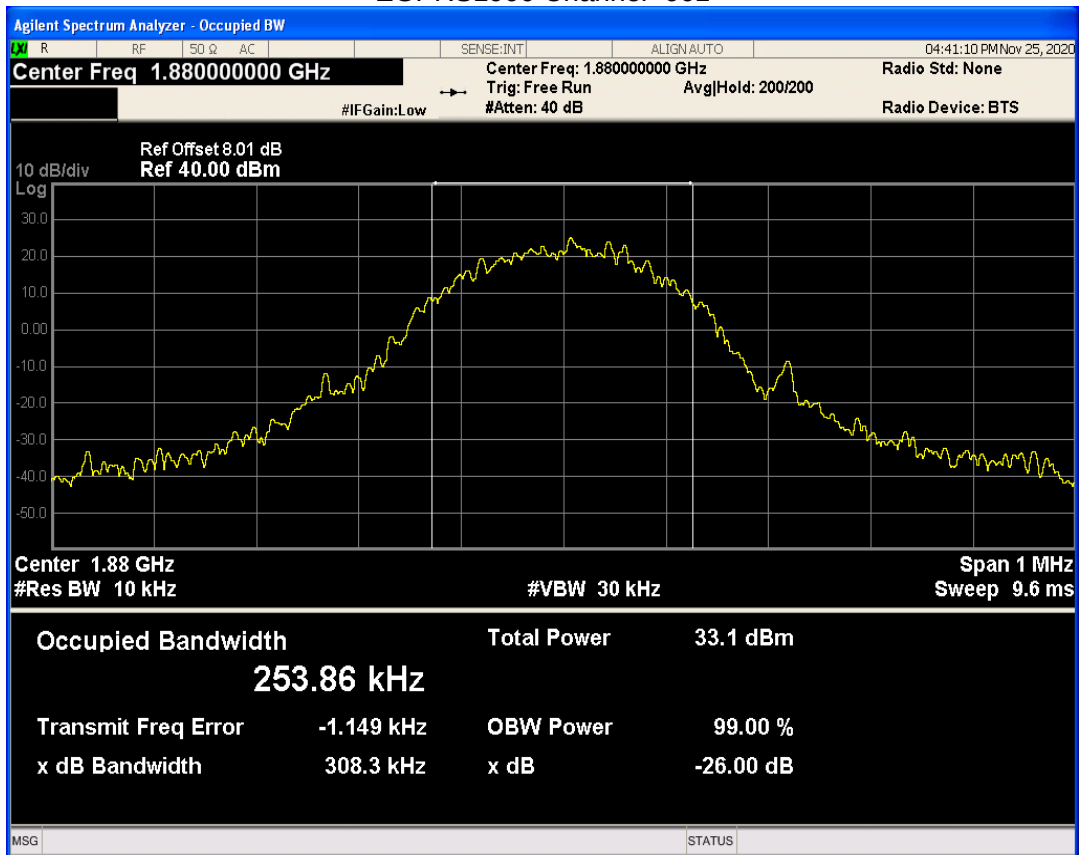


EGPRS850 Channel=128

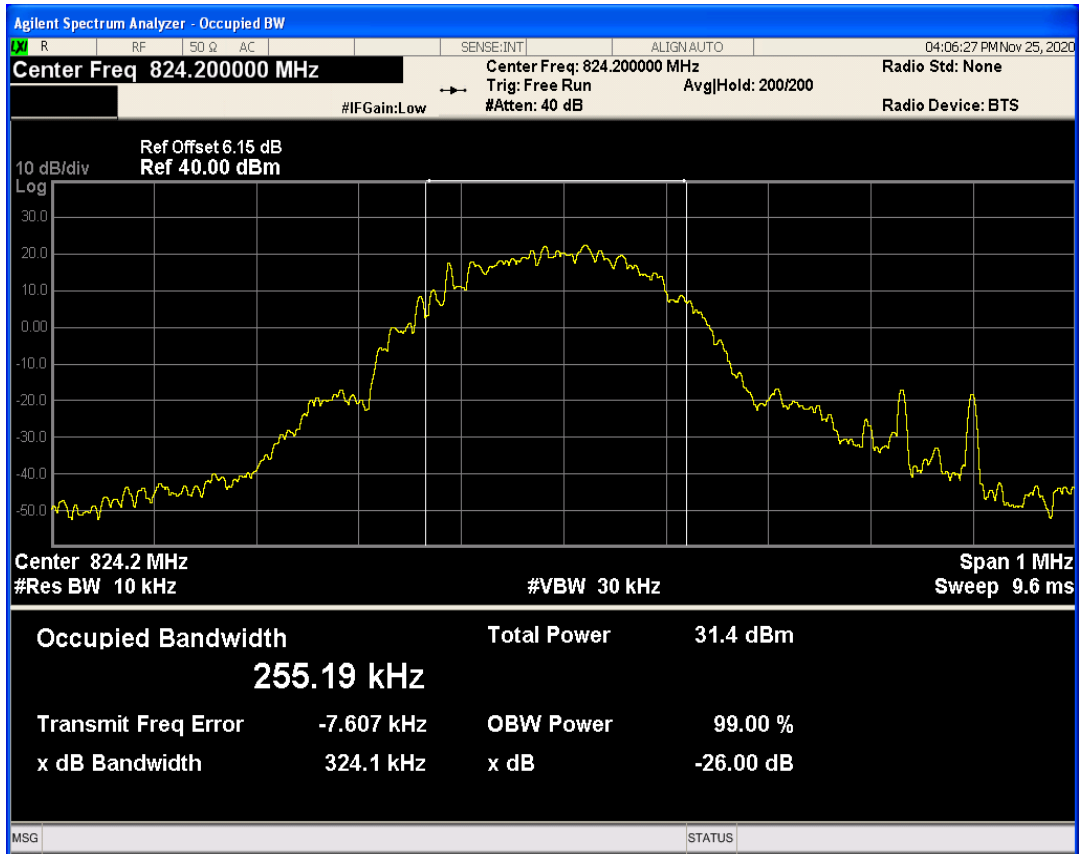

EGPRS850 Channel=190

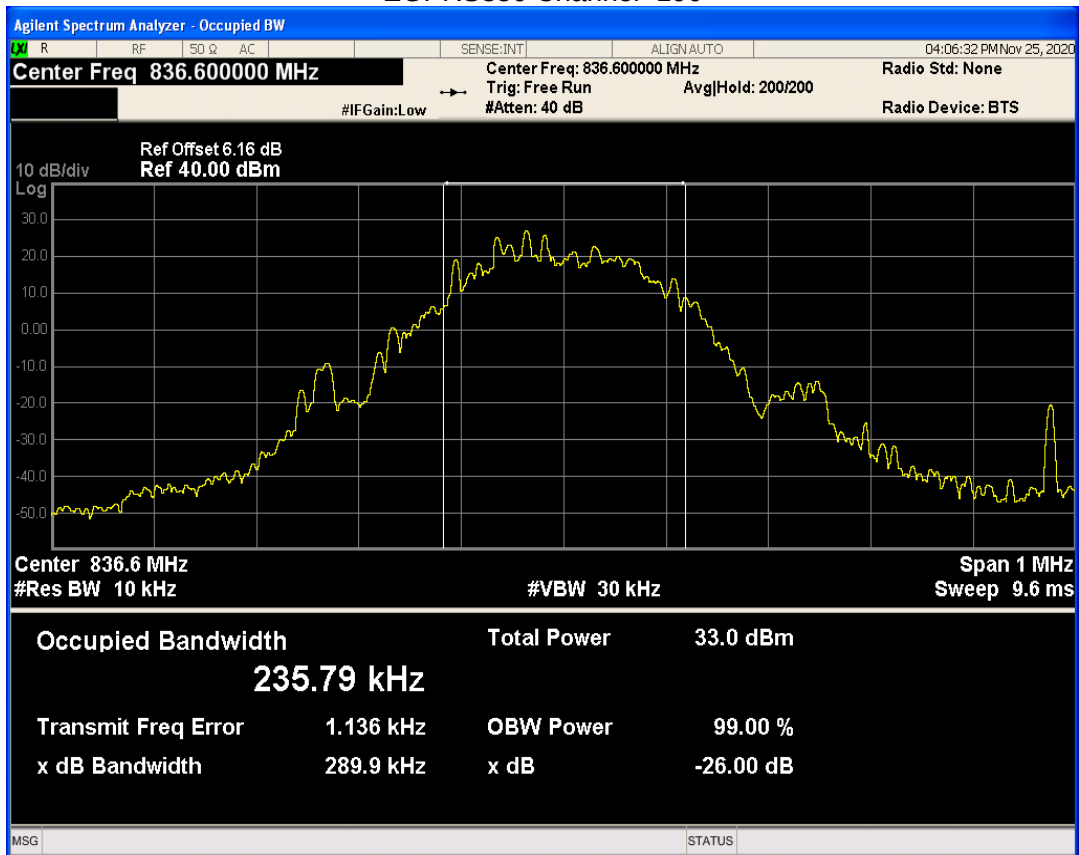


EGPRS850 Channel=251

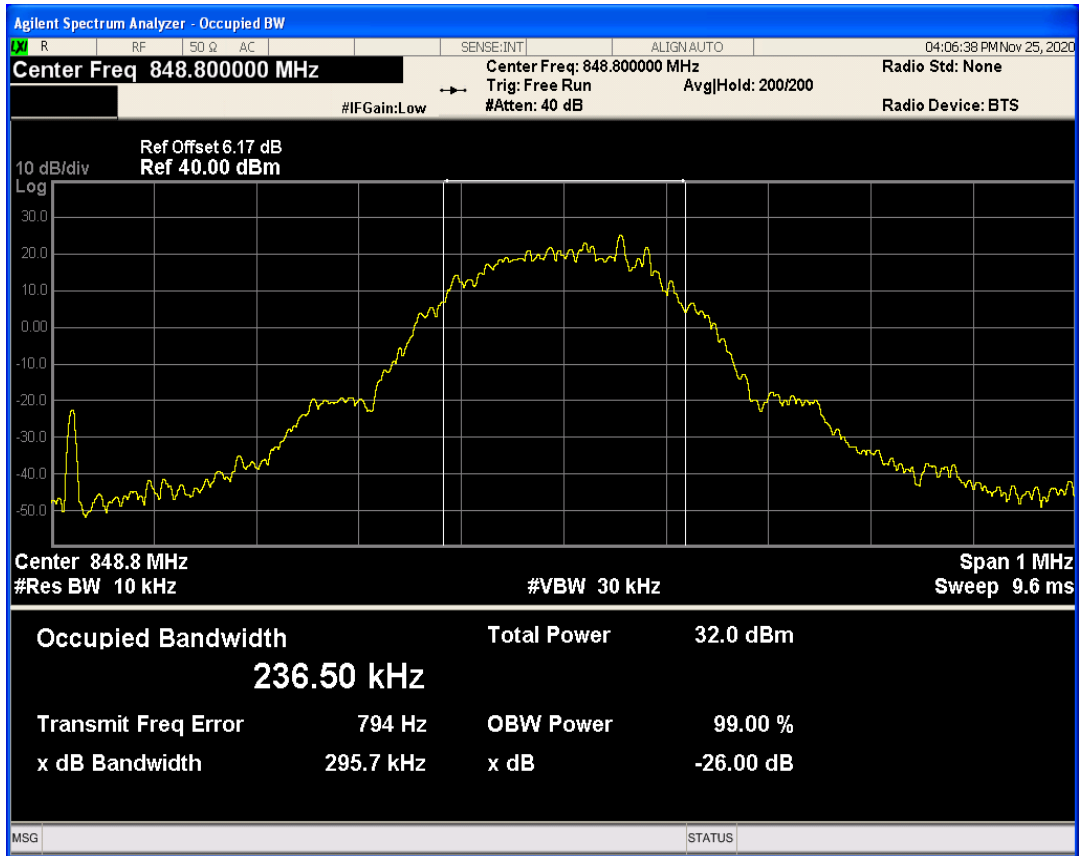


8.10 BAND EDGE

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1850.00	-37.23	-13	PASS
EGPRS1900	810	1909.8	1910.00	-36.46	-13	PASS
EGPRS850	128	824.2	823.99	-37.00	-13	PASS
EGPRS850	251	848.8	849.03	-36.70	-13	PASS


EGPRS1900 Channel=512

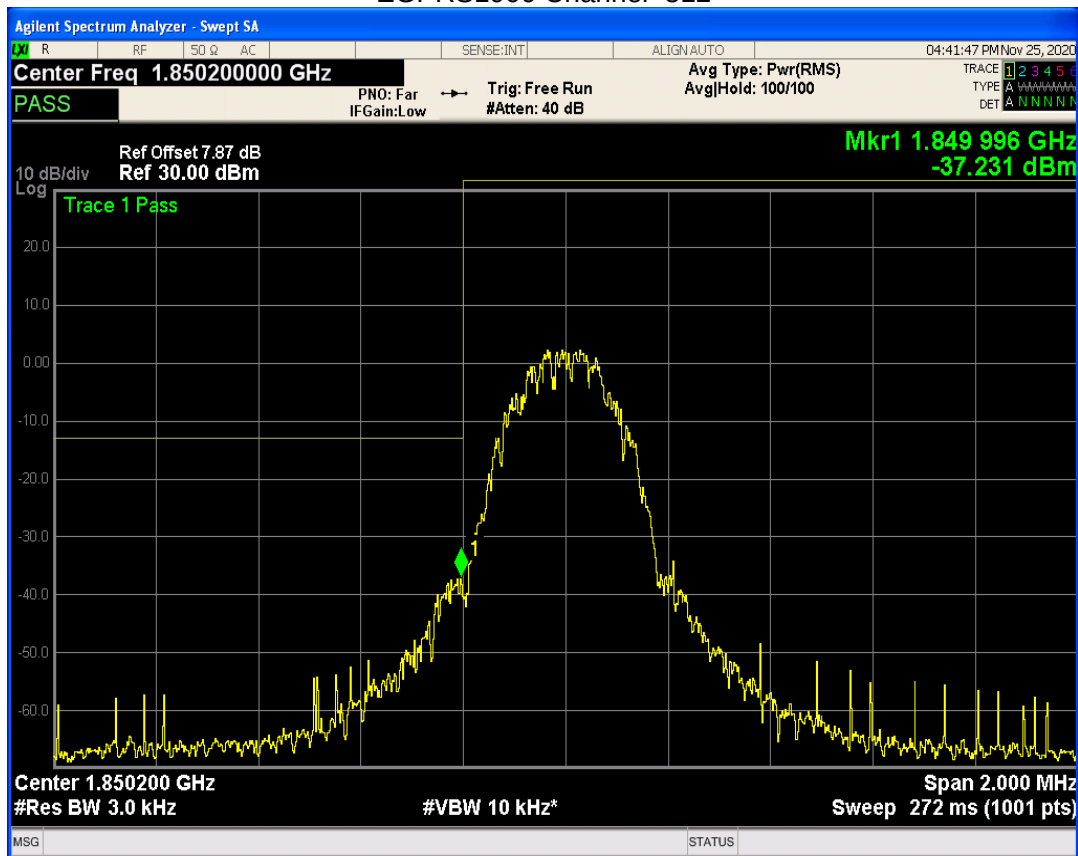


EGPRS1900 Channel=810

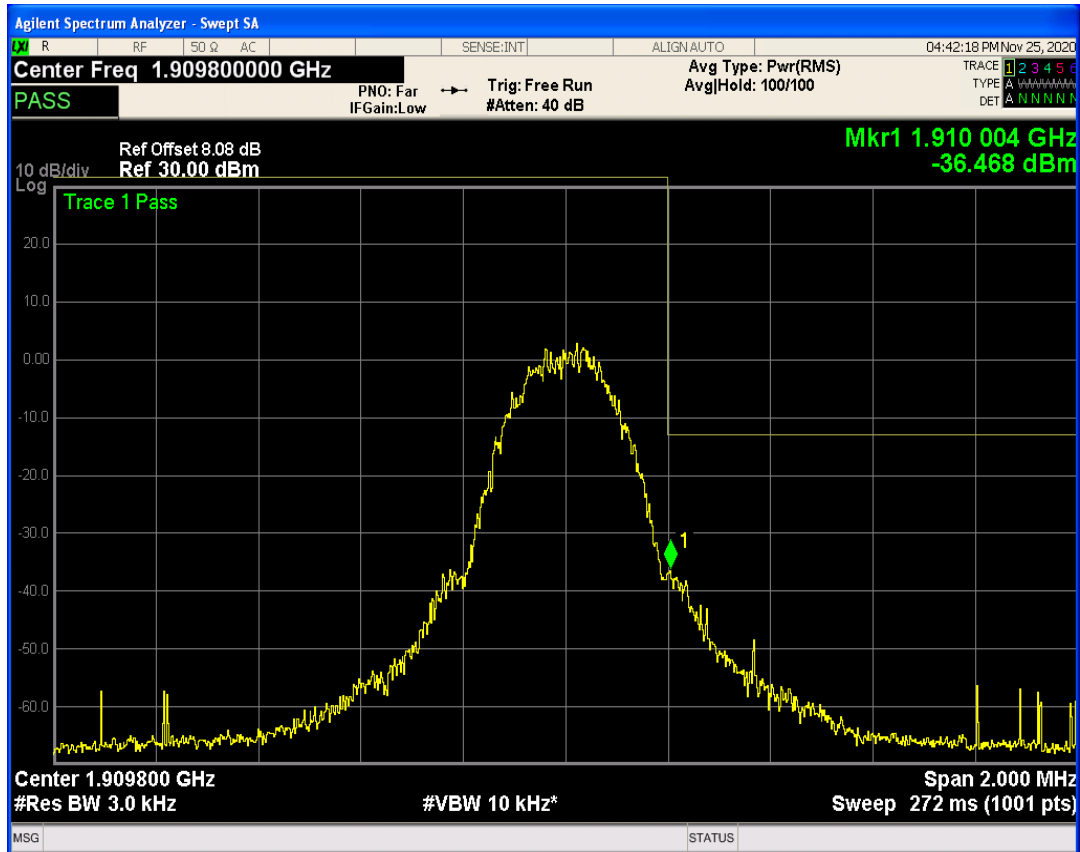

EGPRS850 Channel=251

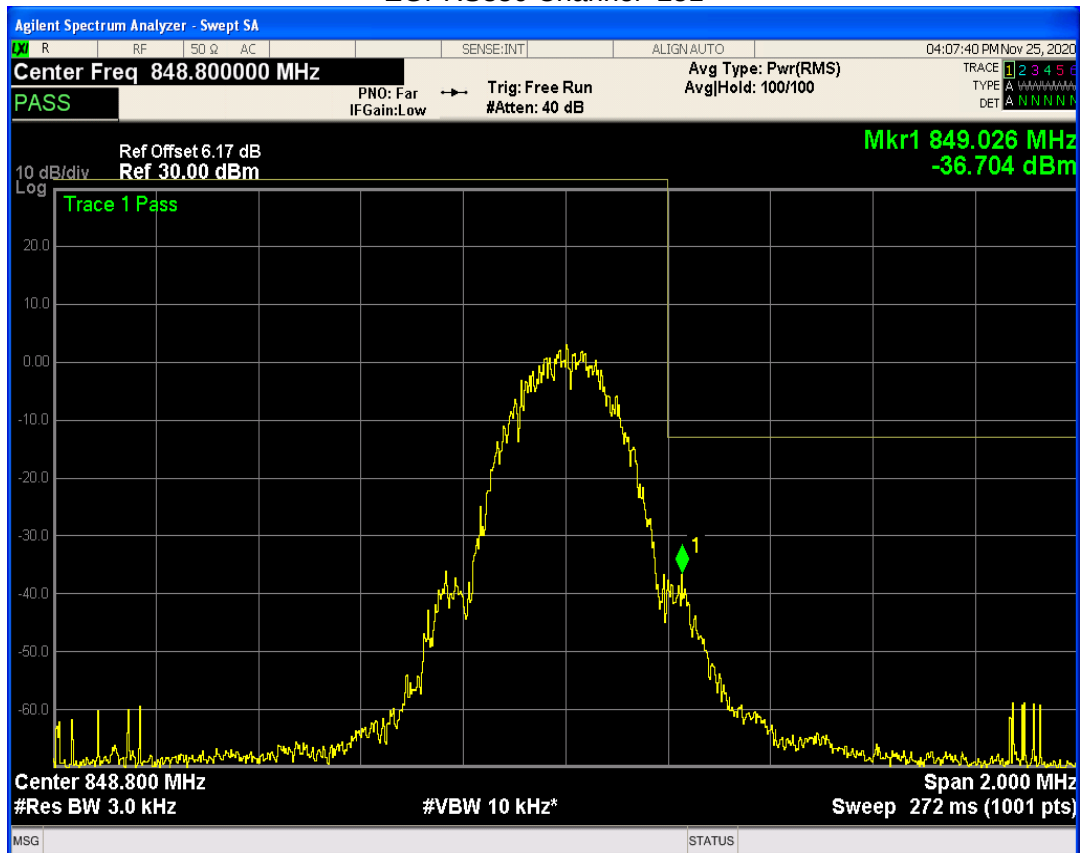


EGPRS850 Channel=128

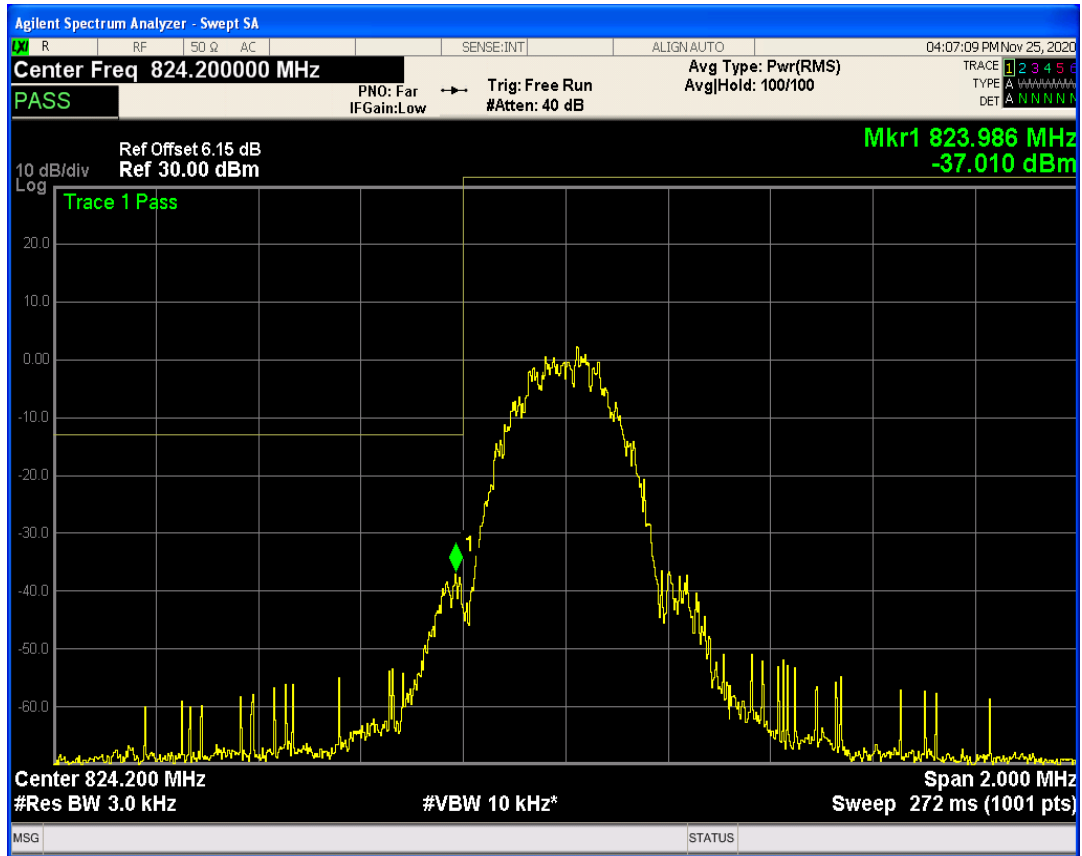


8.11 OUT-OF-BAND EMISSIONS

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	19803.30	-23.81	-13	PASS
EGPRS1900	661	1880	19637.54	-23.76	-13	PASS
EGPRS1900	810	1909.8	19774.84	-23.40	-13	PASS
EGPRS850	128	824.2	416.34	-26.95	-13	PASS
EGPRS850	190	836.6	416.34	-27.15	-13	PASS
EGPRS850	251	848.8	416.09	-26.49	-13	PASS


EGPRS1900 Channel=661

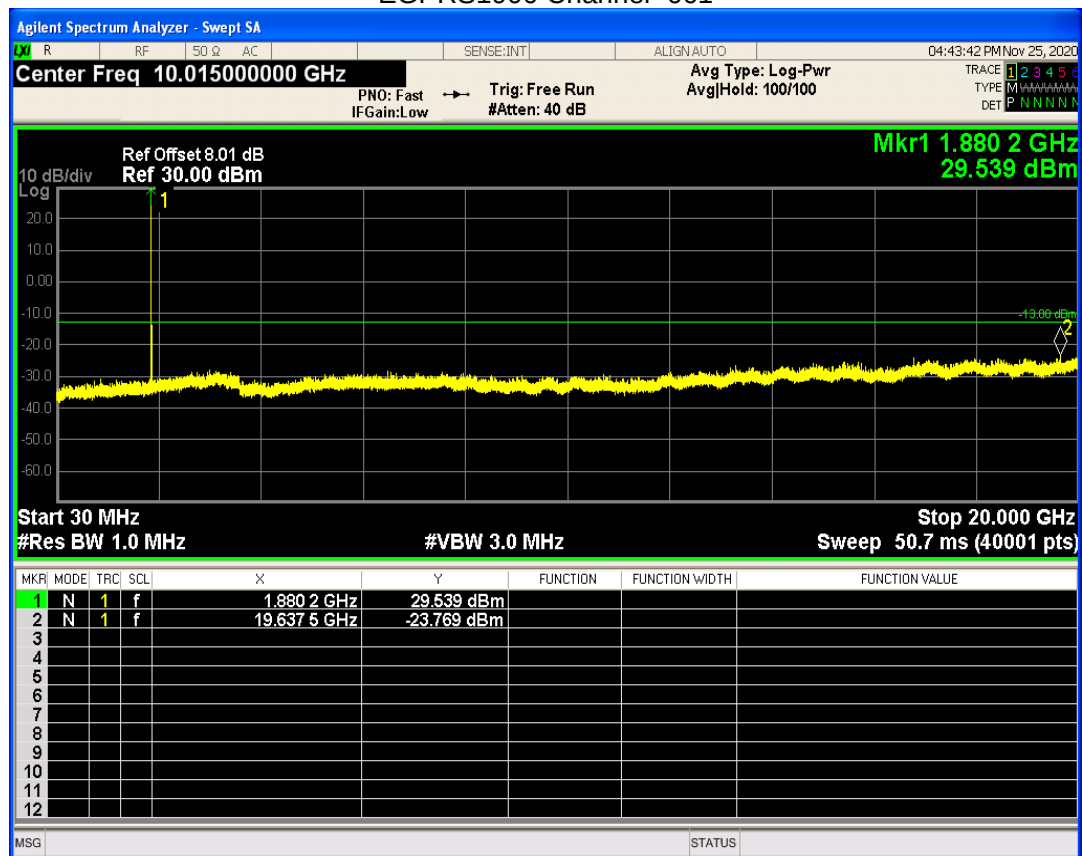


EGPRS1900 Channel=512

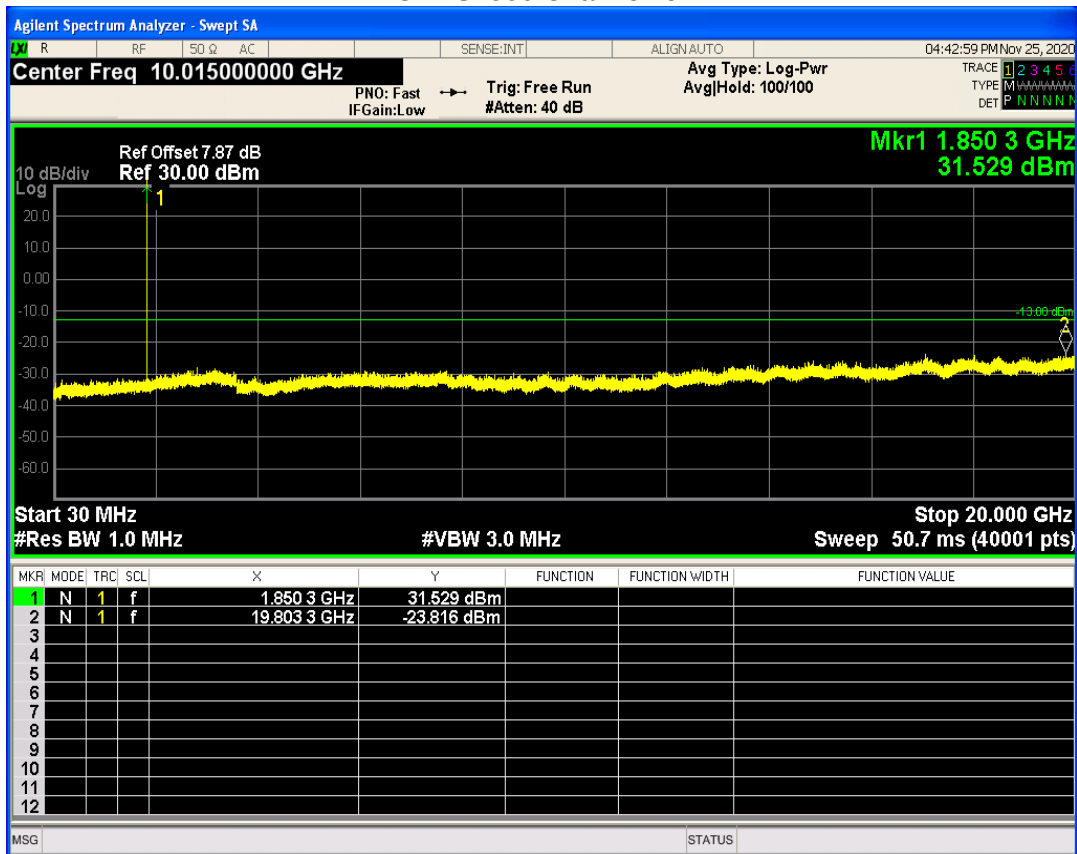


EGPRS1900 Channel=810

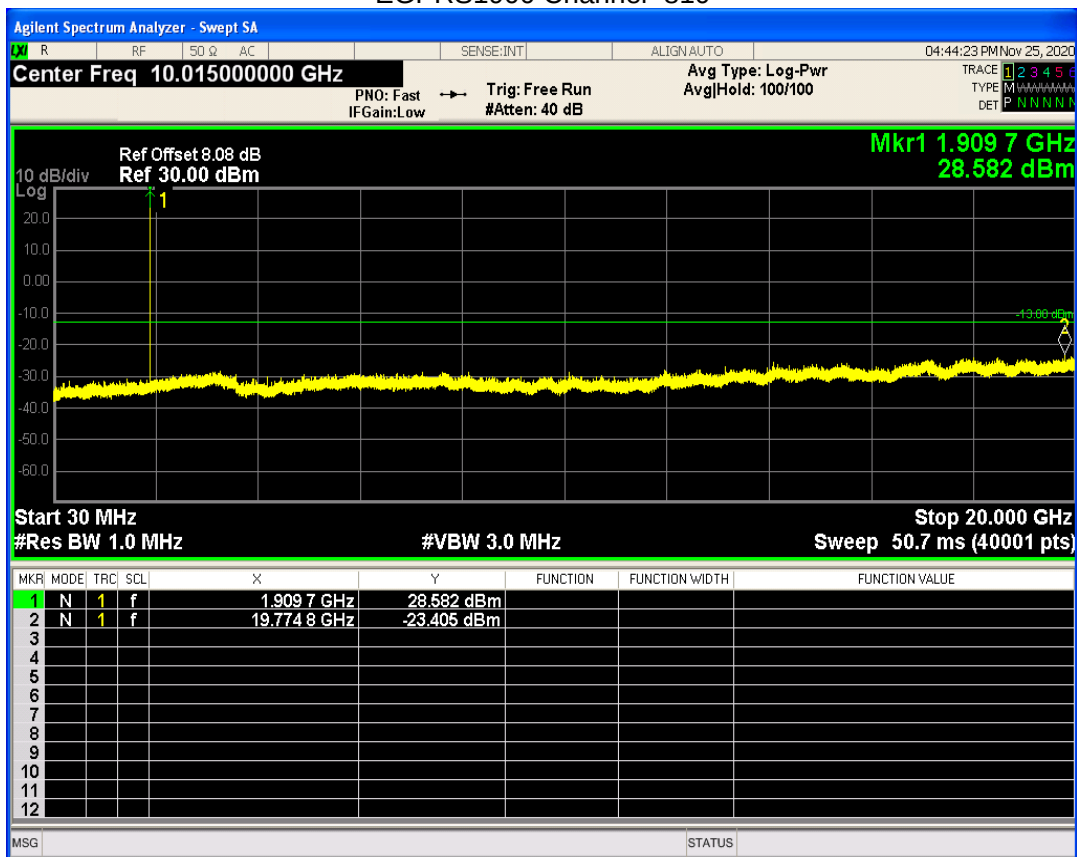


EGPRS850 Channel=128

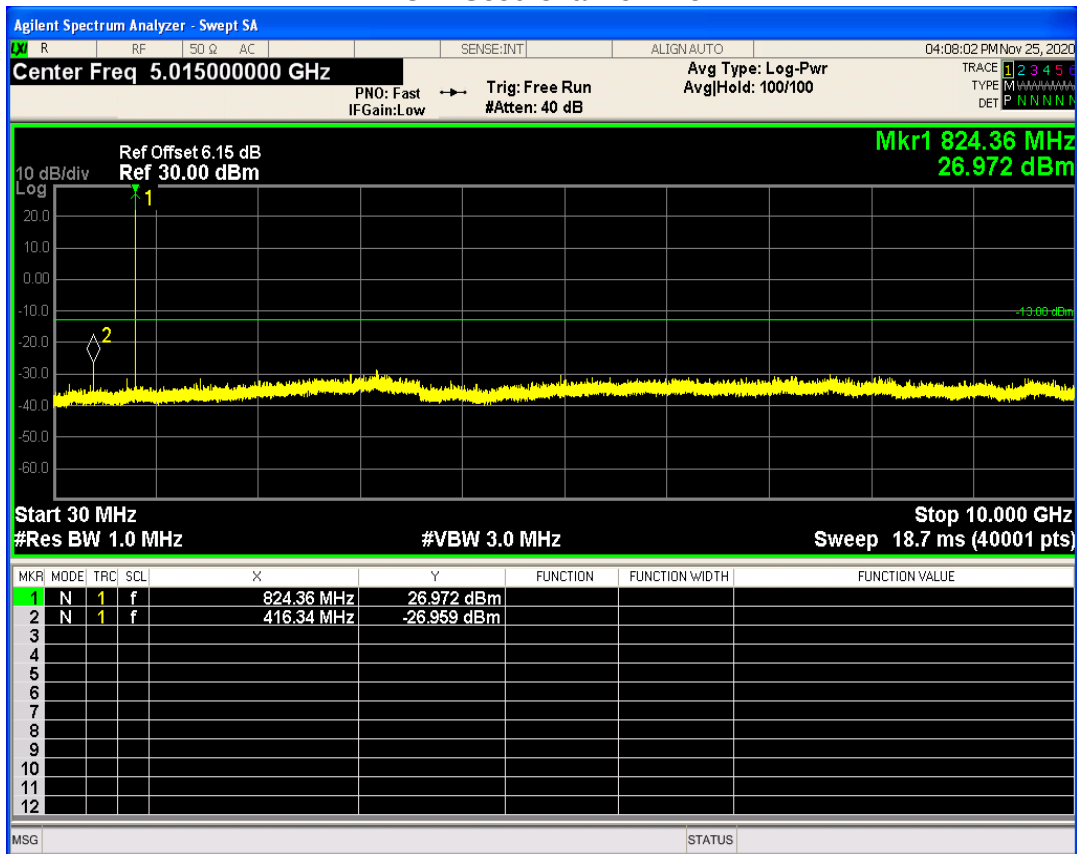

EGPRS850 Channel=251

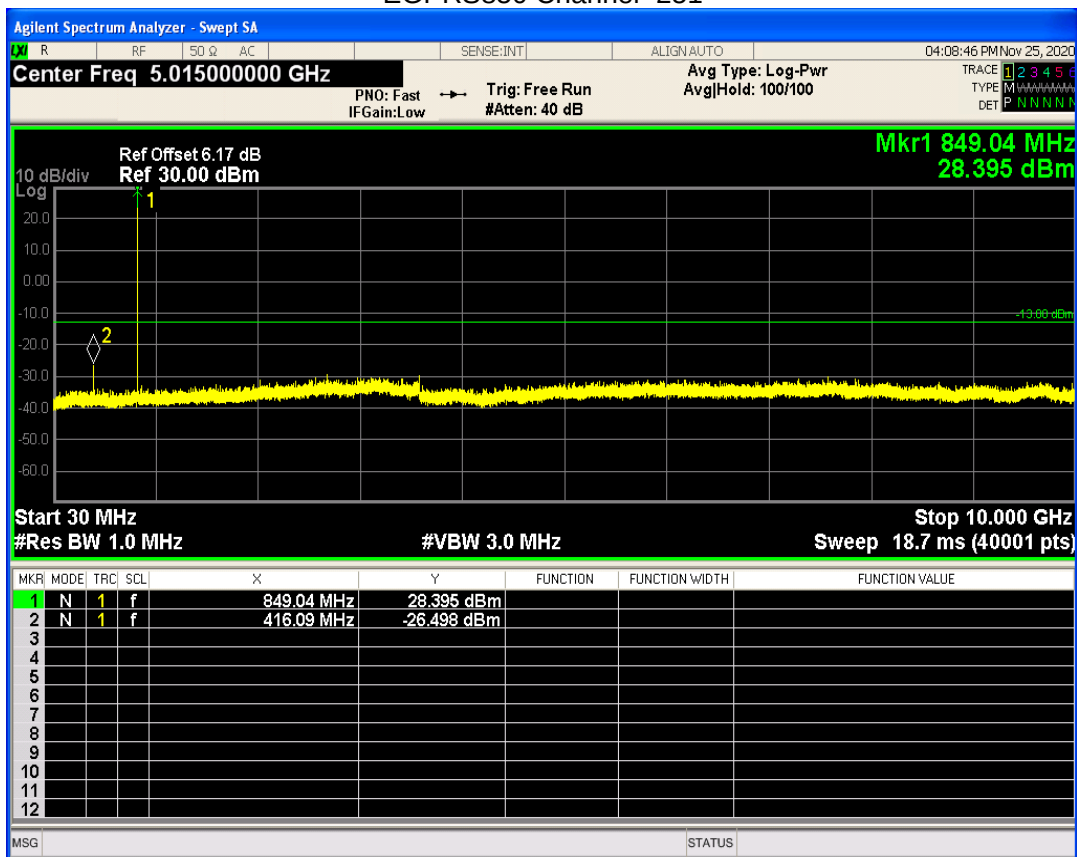


EGPRS850 Channel=190

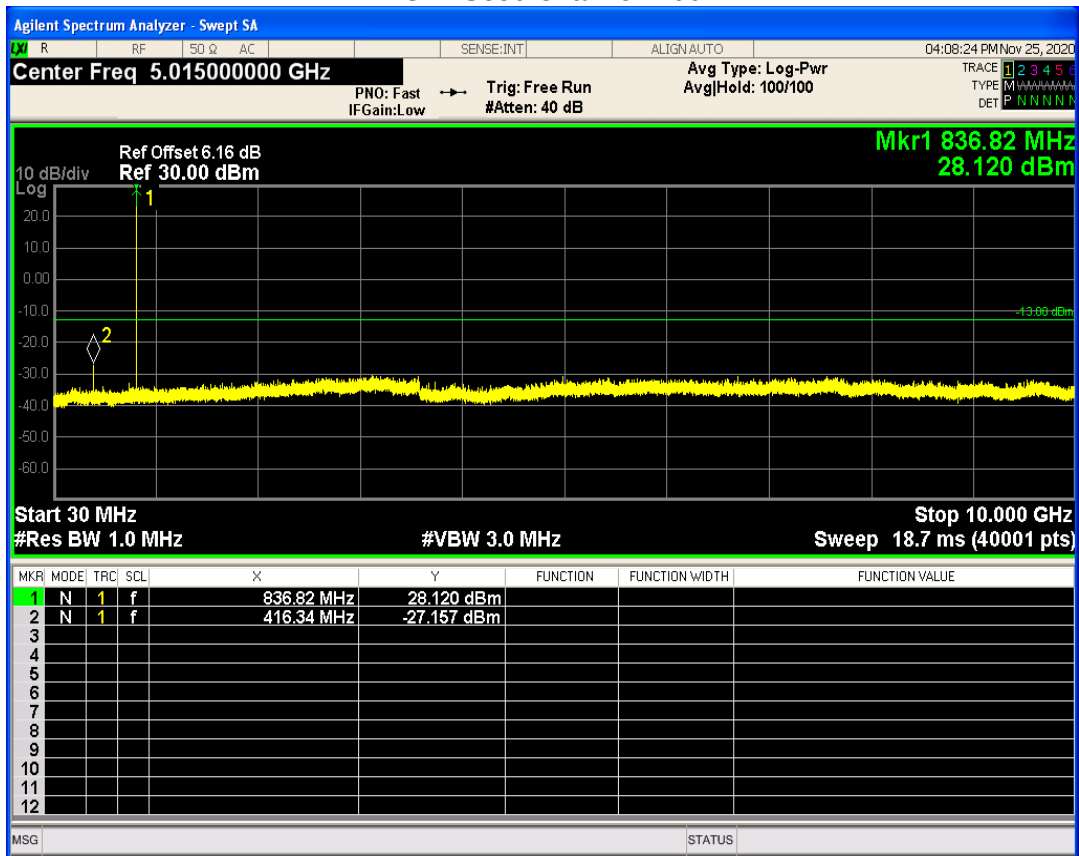


8.12 PEAK-TO-AVERAGE RATIO

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.678368316	13.00	PASS
GPRS1900	661	1880	2.659498165	13.00	PASS
GPRS1900	810	1909.8	2.688447266	13.00	PASS
GPRS850	128	824.2	2.680340557	13.00	PASS
GPRS850	190	836.6	2.668664901	13.00	PASS
GPRS850	251	848.8	2.667486764	13.00	PASS

GPRS1900 Channel=661

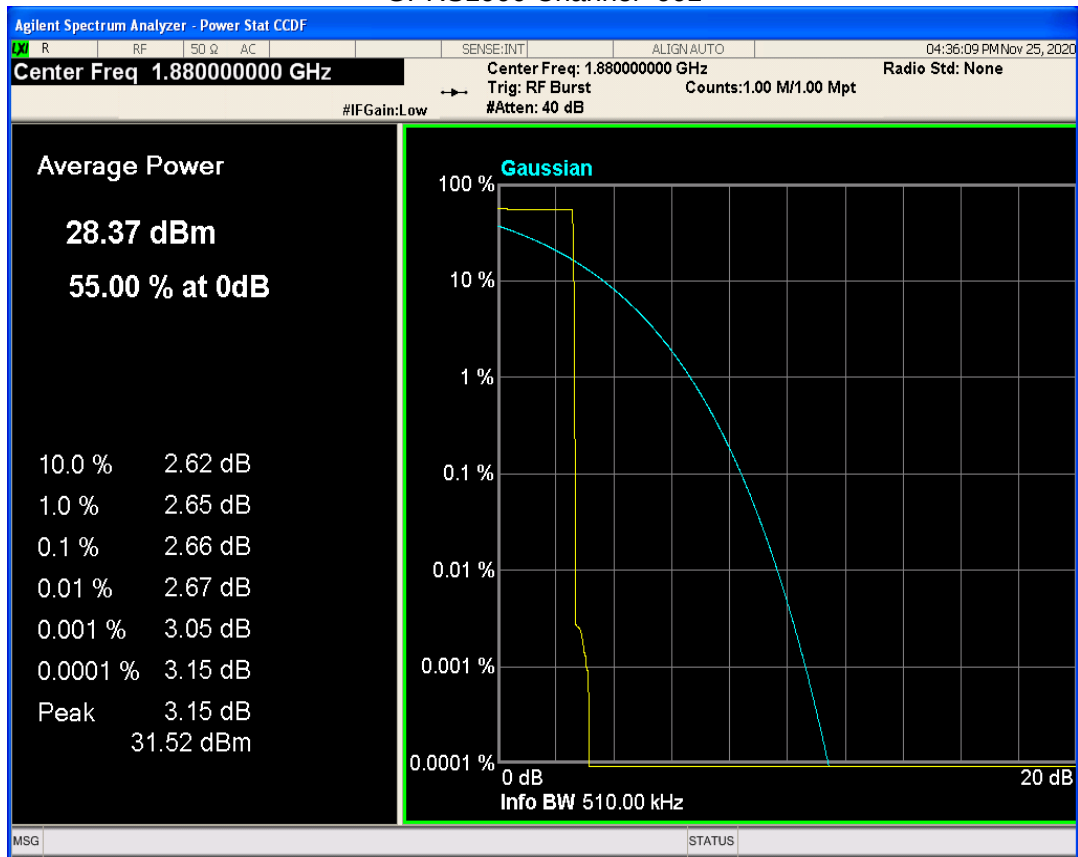


GPSS1900 Channel=512

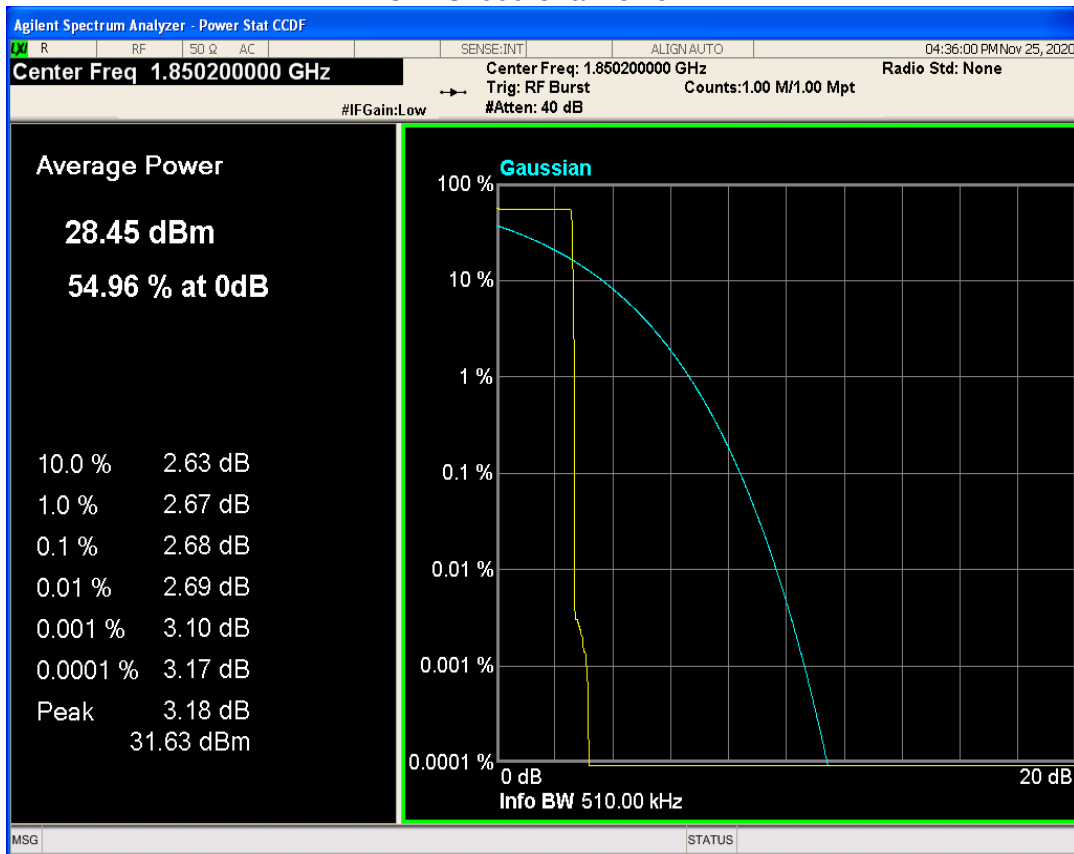


GPSS1900 Channel=810




GPRS850 Channel=128

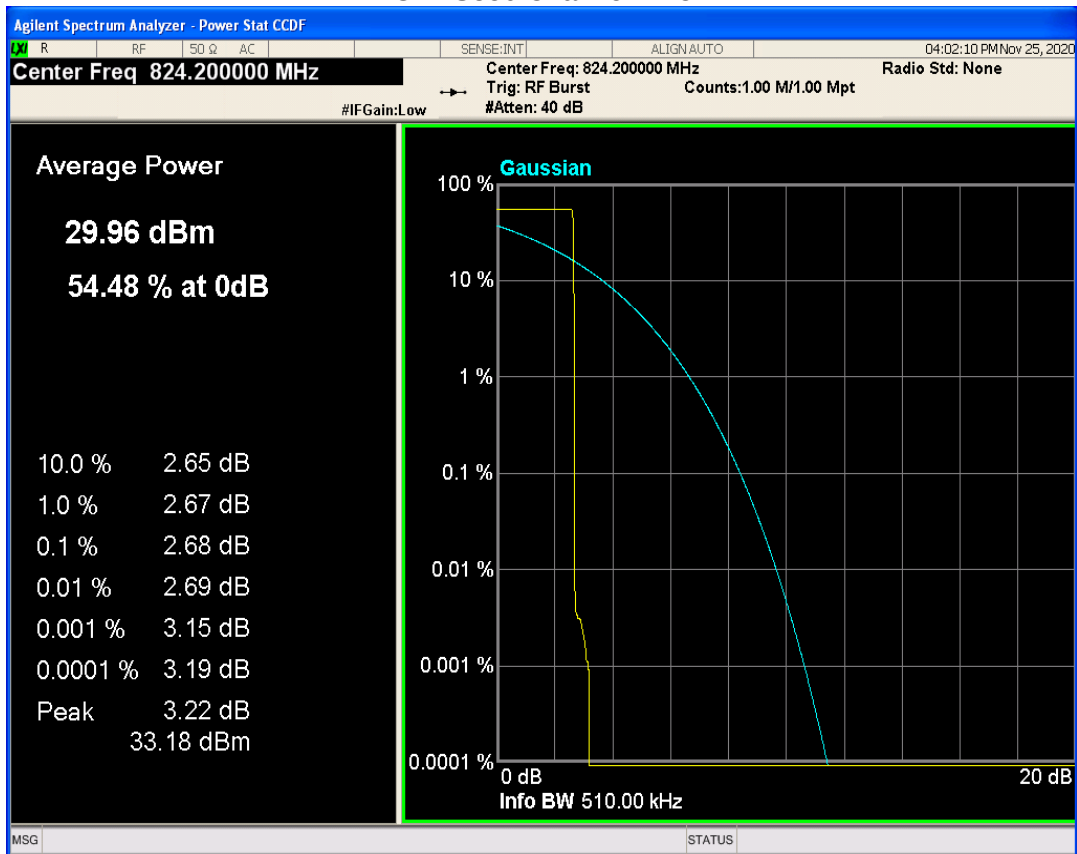

GPRS850 Channel=251

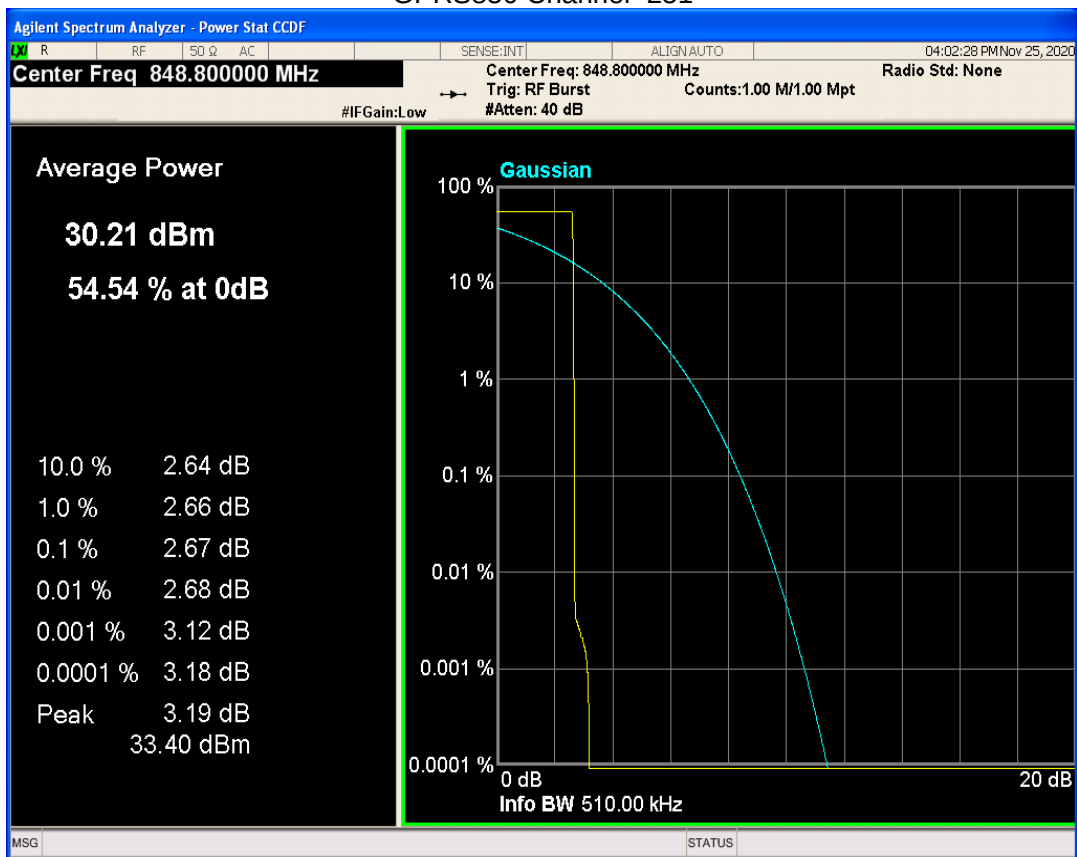


GPRS850 Channel=190

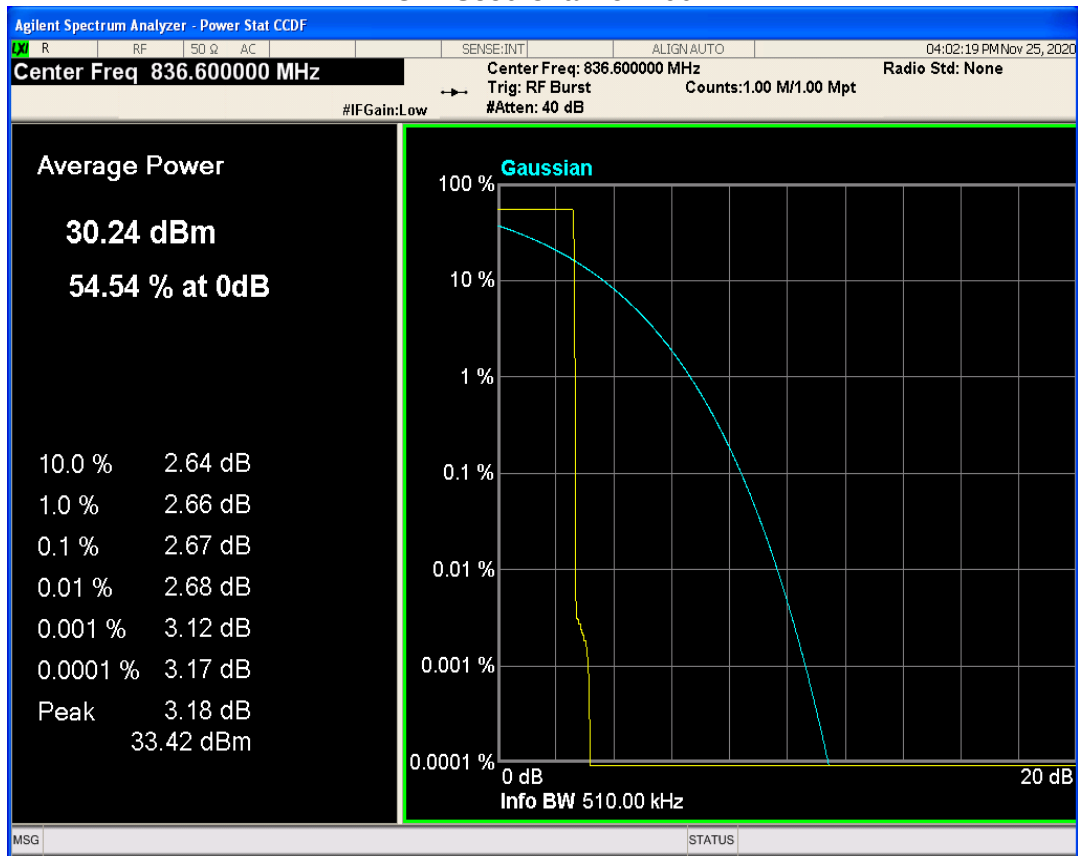


8.13 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	247.738	310.024	PASS
GPRS1900	661	1880	244.075	313.092	PASS
GPRS1900	810	1909.8	245.685	318.443	PASS
GPRS850	128	824.2	252.292	317.998	PASS
GPRS850	190	836.6	251.176	329.618	PASS
GPRS850	251	848.8	243.848	317.976	PASS


GPRS1900 Channel=512

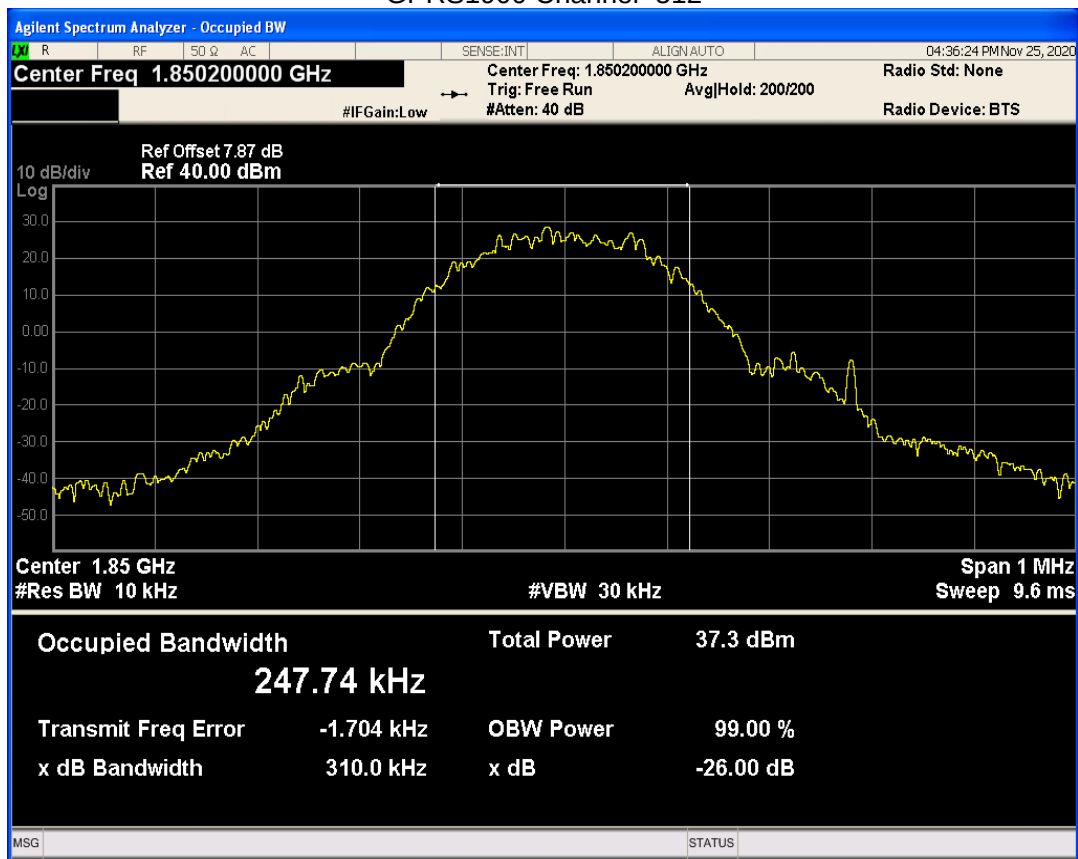


GPRS1900 Channel=810

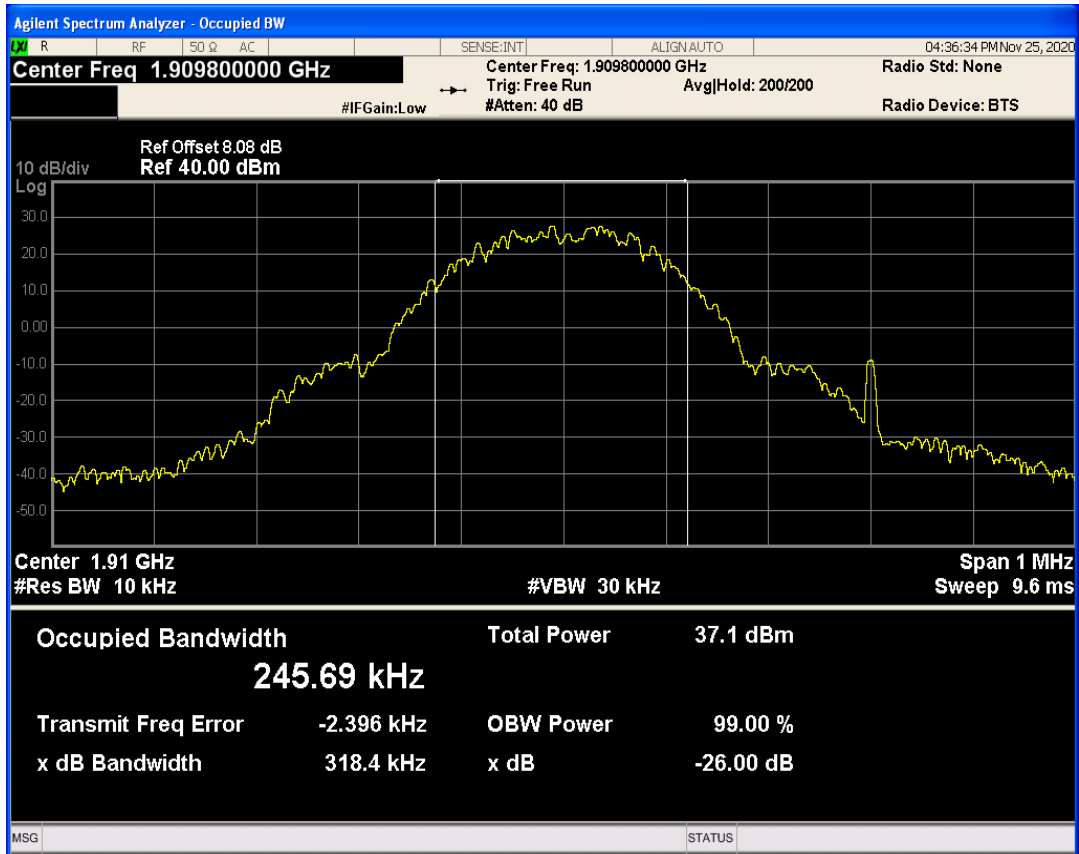


GPRS1900 Channel=661

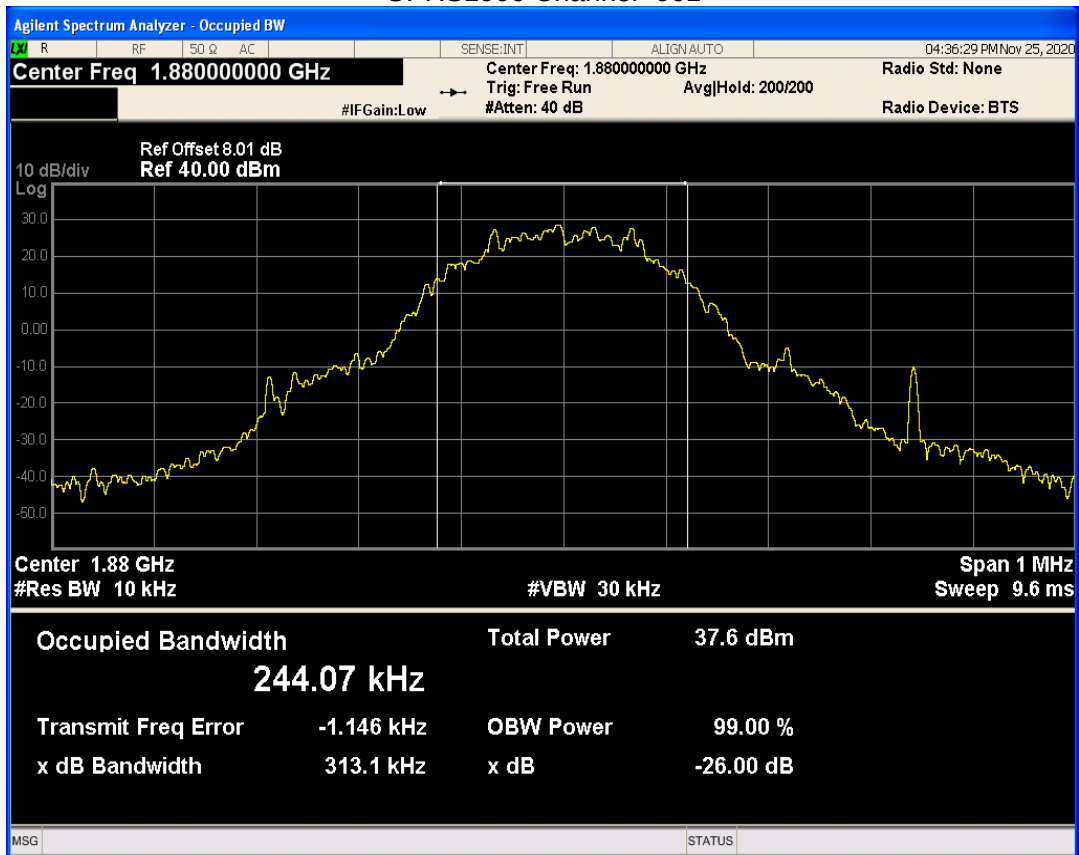


GPRS850 Channel=128

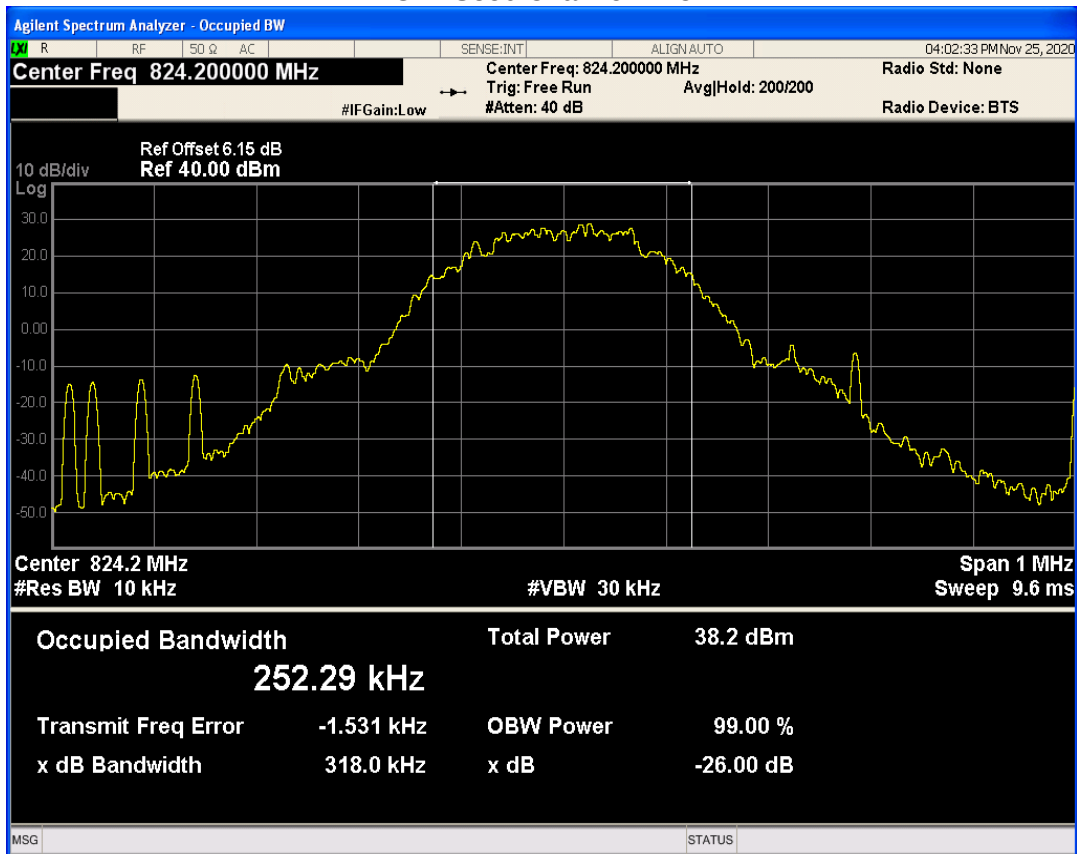

GPRS850 Channel=190

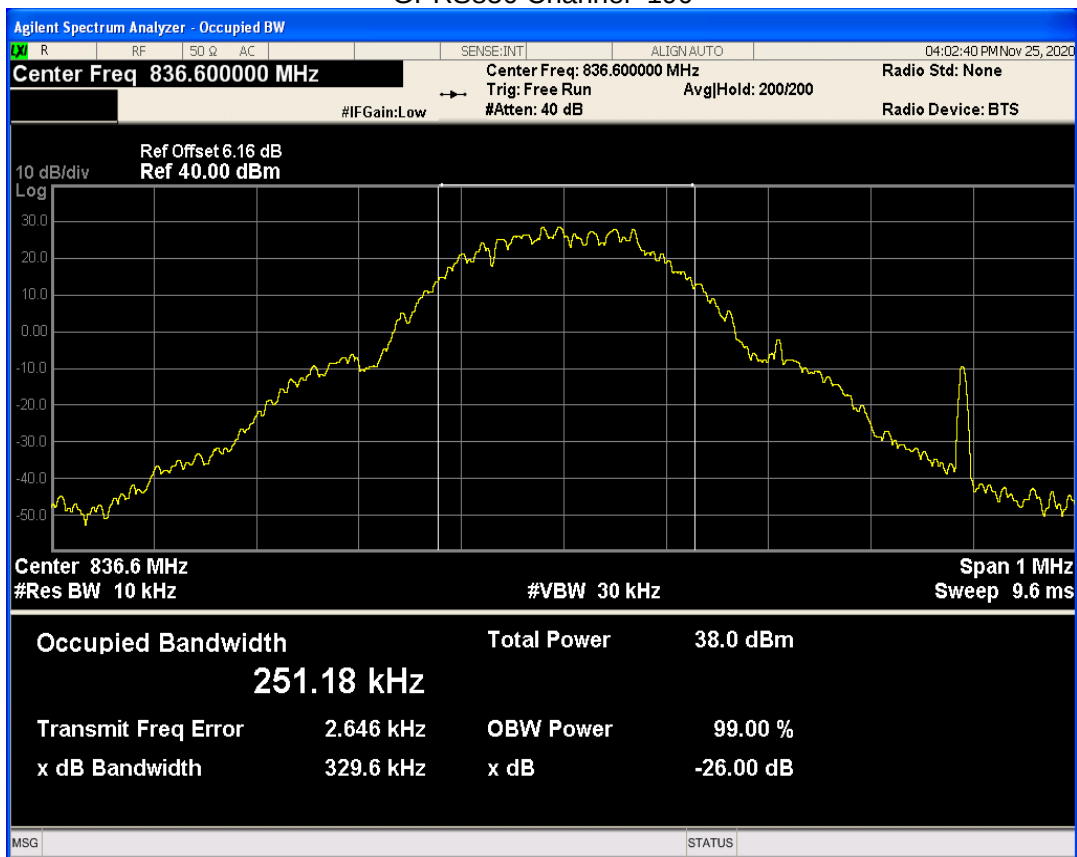


GPRS850 Channel=251

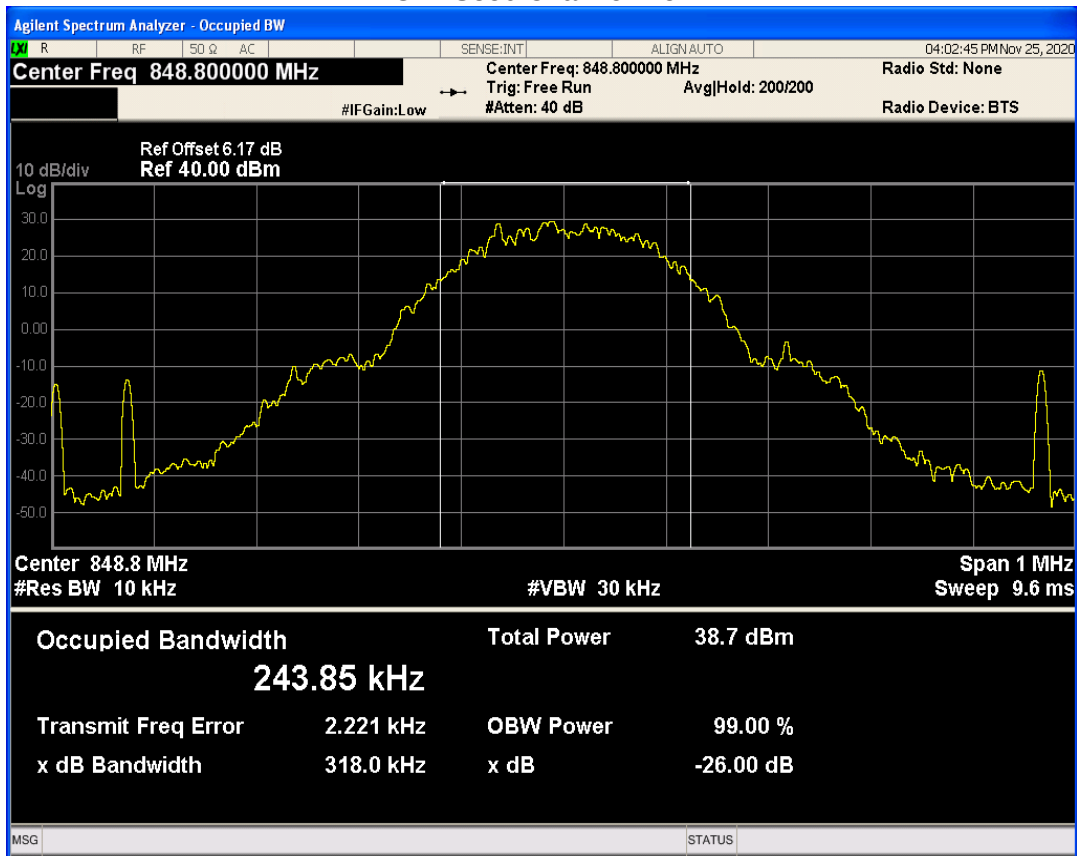


8.14 BAND EDGE

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1850.00	-26.91	-13	PASS
GPRS1900	810	1909.8	1910.02	-28.33	-13	PASS
GPRS850	128	824.2	823.98	-26.91	-13	PASS
GPRS850	251	848.8	849.02	-26.24	-13	PASS


GPRS1900 Channel=512

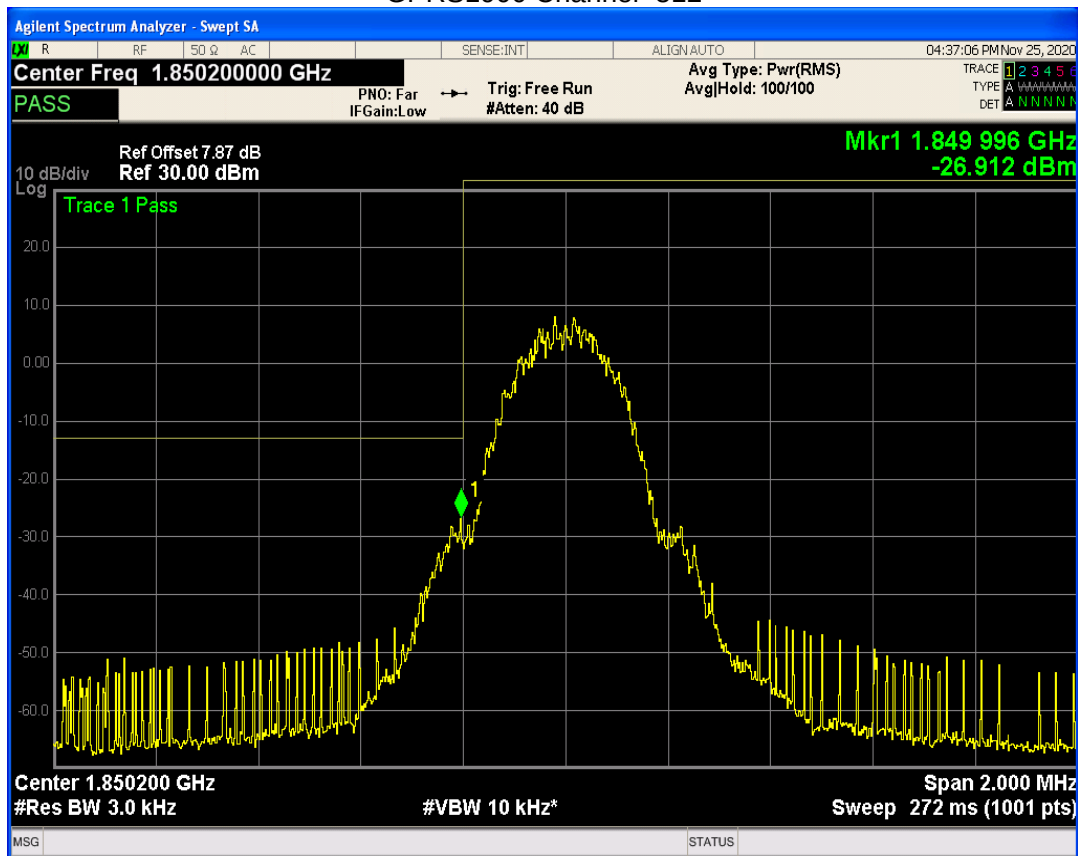


GPRS1900 Channel=810

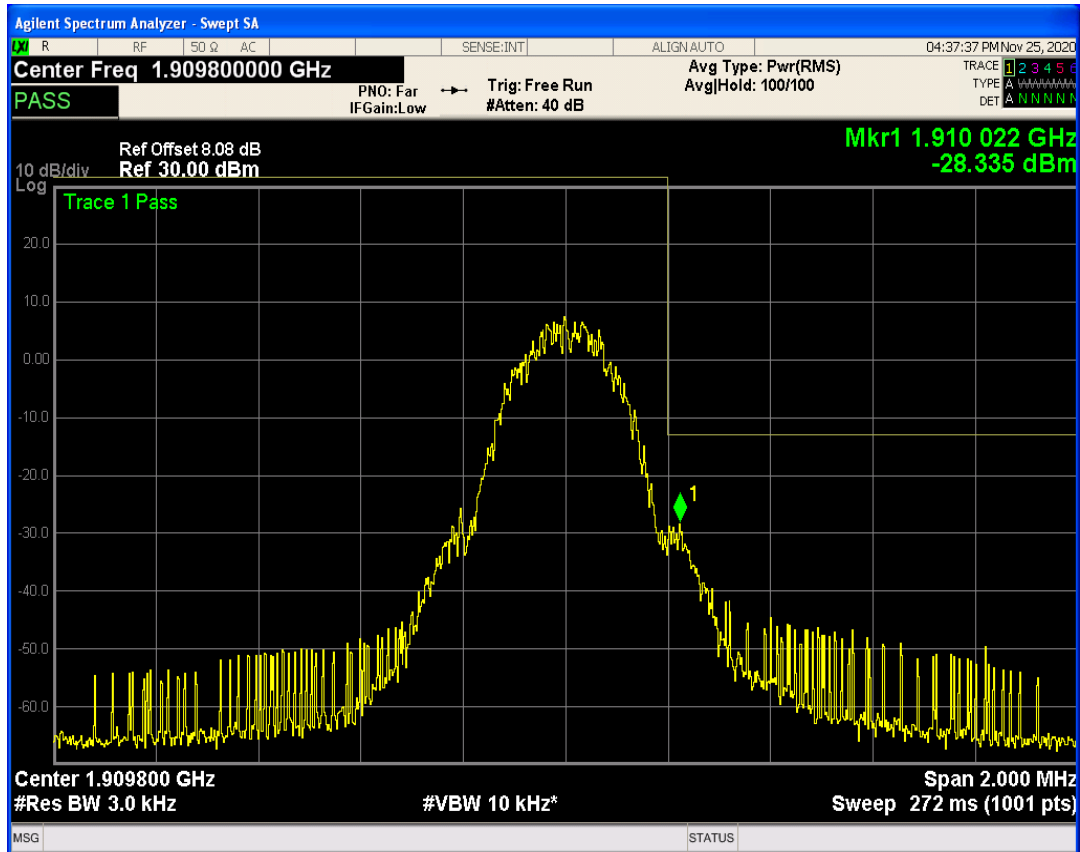

GPRS850 Channel=251

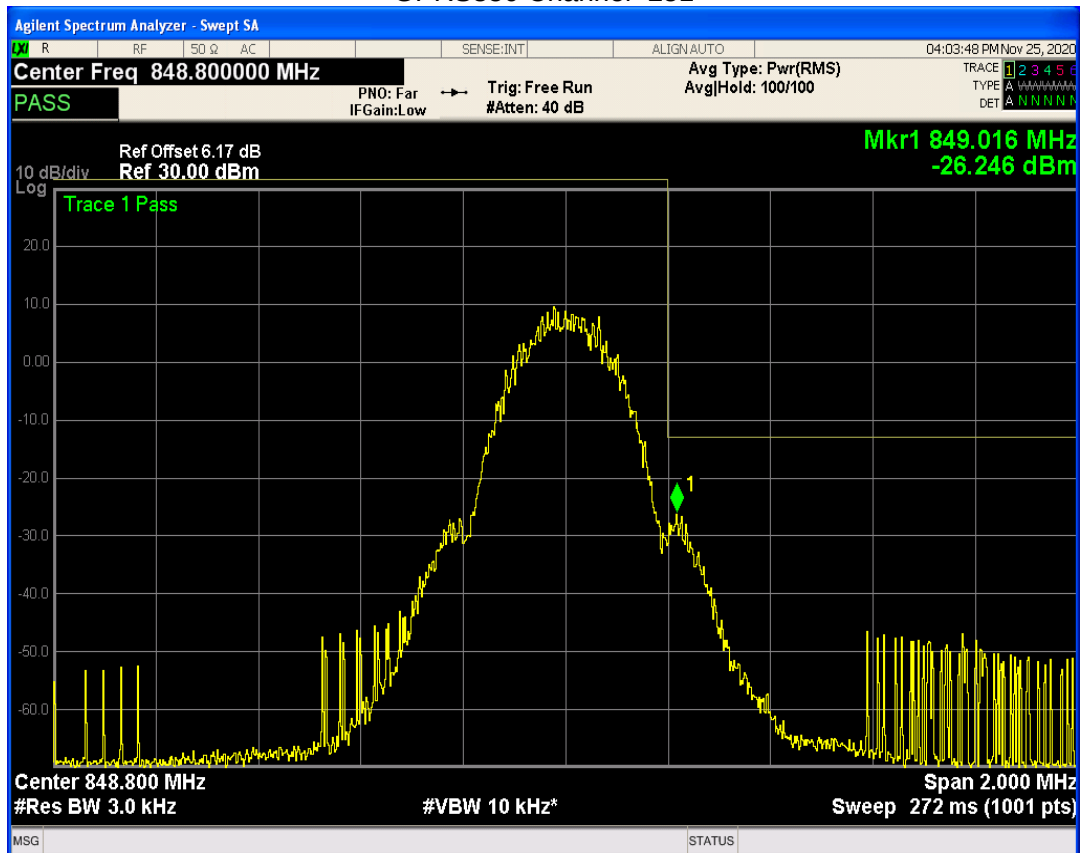


GPRS850 Channel=128

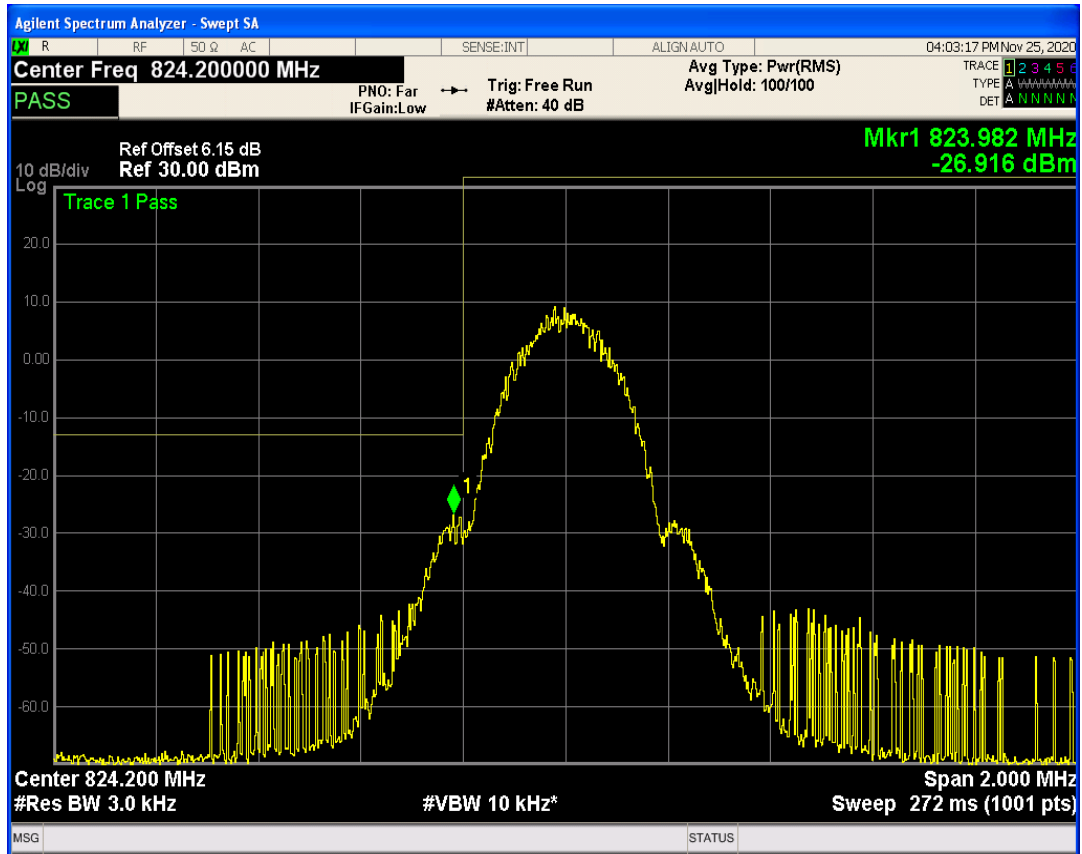


8.15 OUT-OF-BAND EMISSIONS

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	18515.23	-23.32	-13	PASS
GPRS1900	661	1880	19888.17	-23.09	-13	PASS
GPRS1900	810	1909.8	17197.21	-23.52	-13	PASS
GPRS850	128	824.2	7701.67	-29.17	-13	PASS
GPRS850	190	836.6	3175.78	-29.40	-13	PASS
GPRS850	251	848.8	803.17	-27.97	-13	PASS


GPRS1900 Channel=661

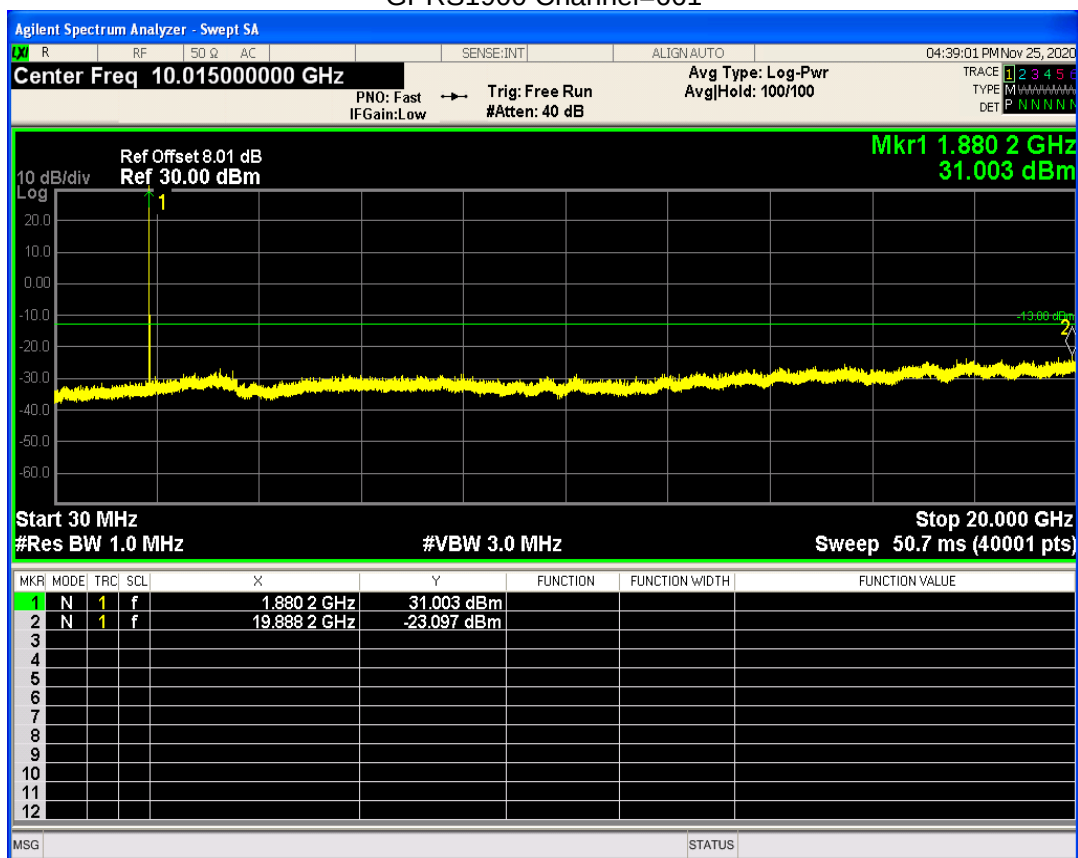


GPRS1900 Channel=512

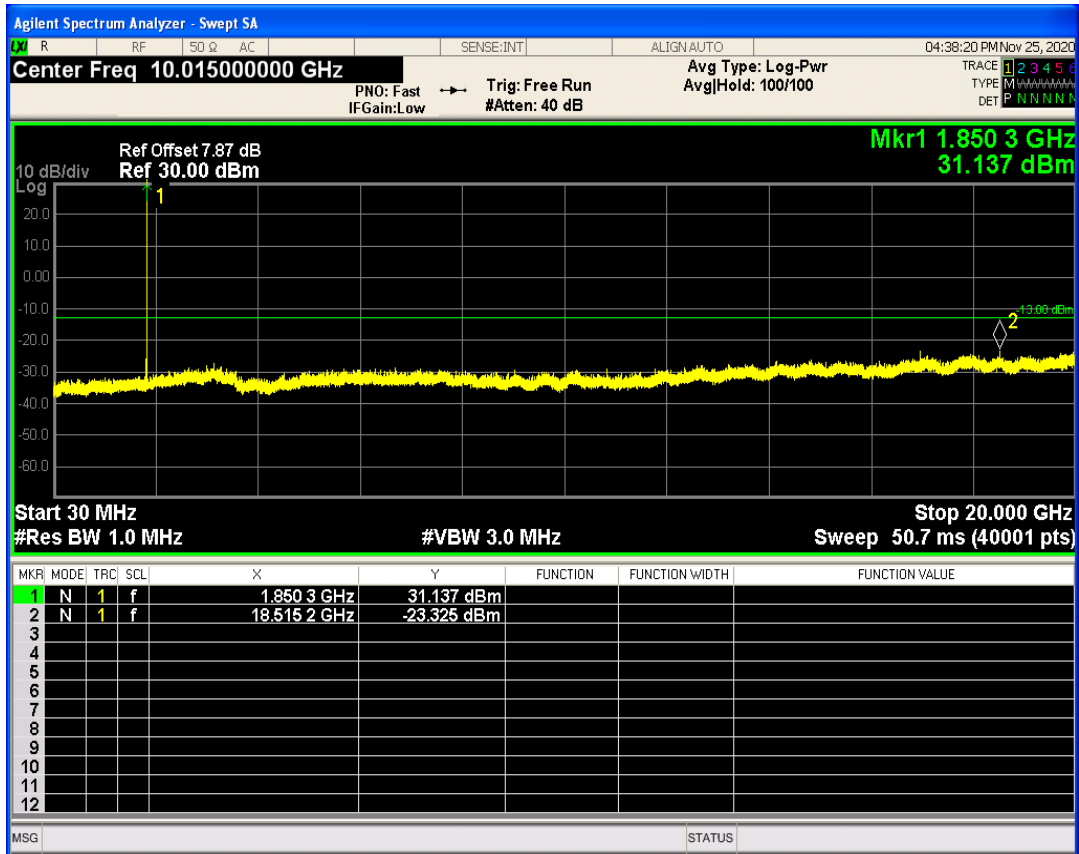


GPRS1900 Channel=810

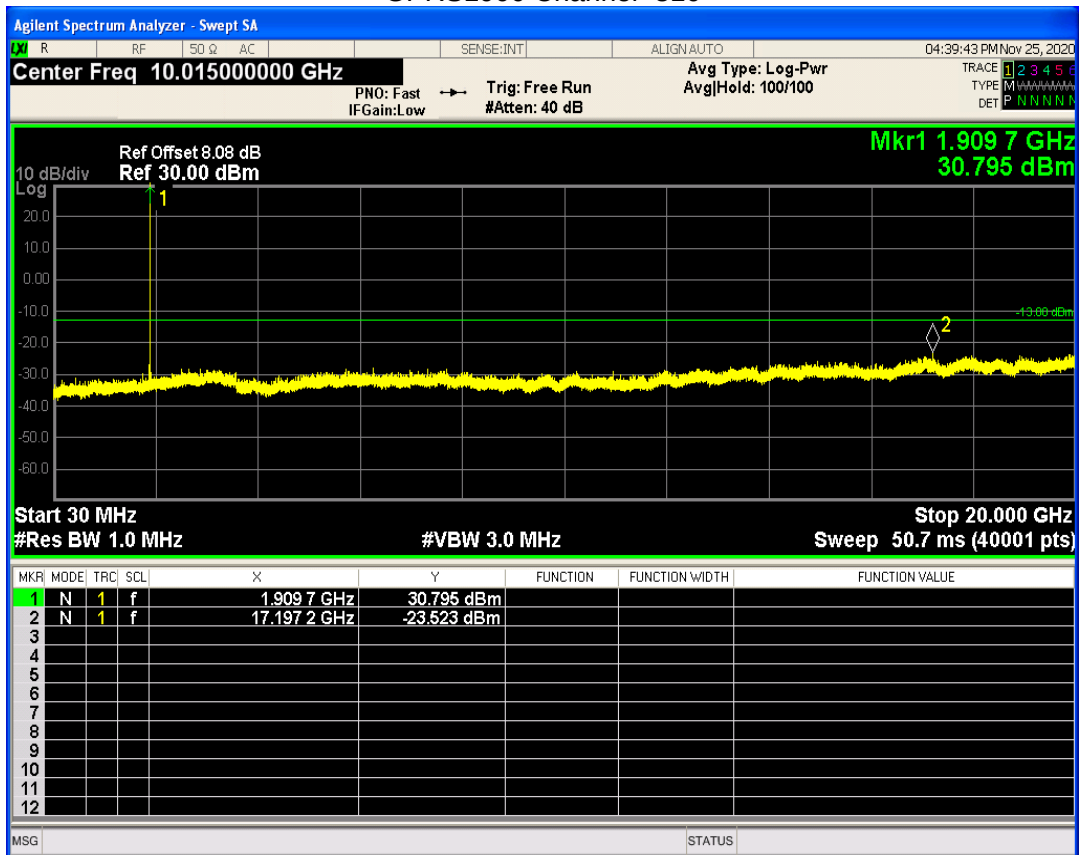


GPRS850 Channel=128

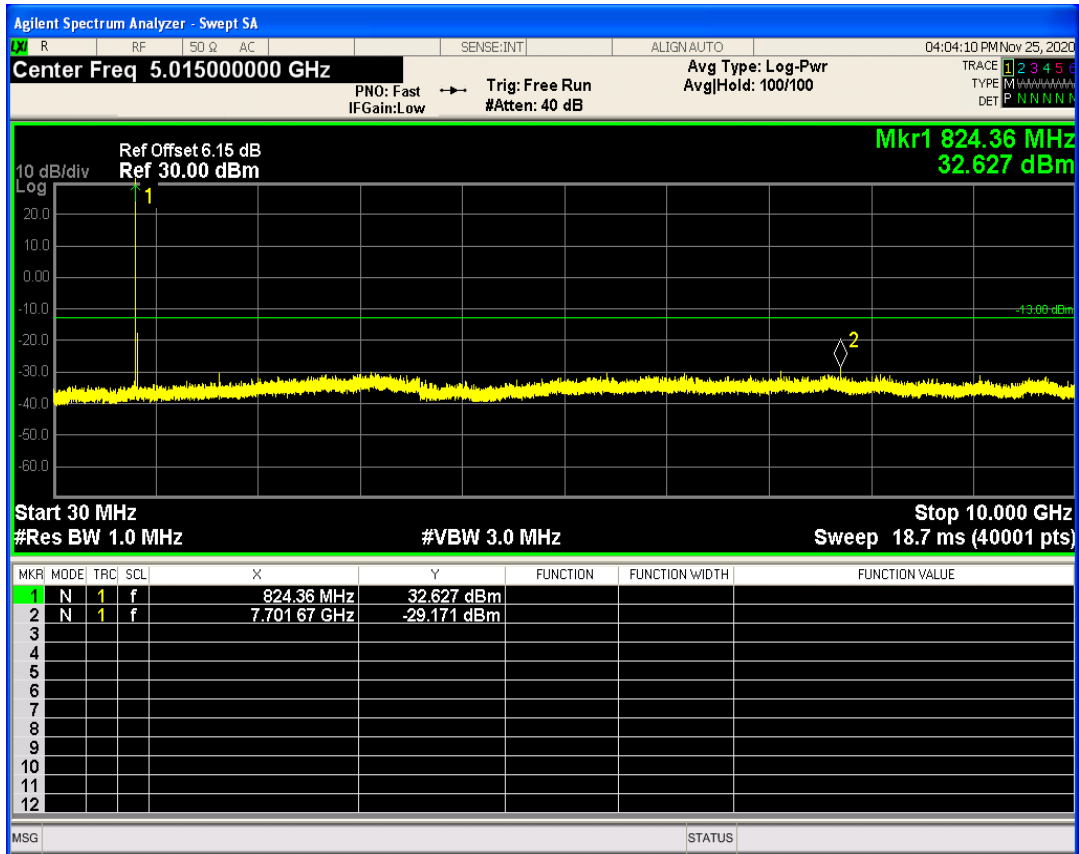

GPRS850 Channel=251

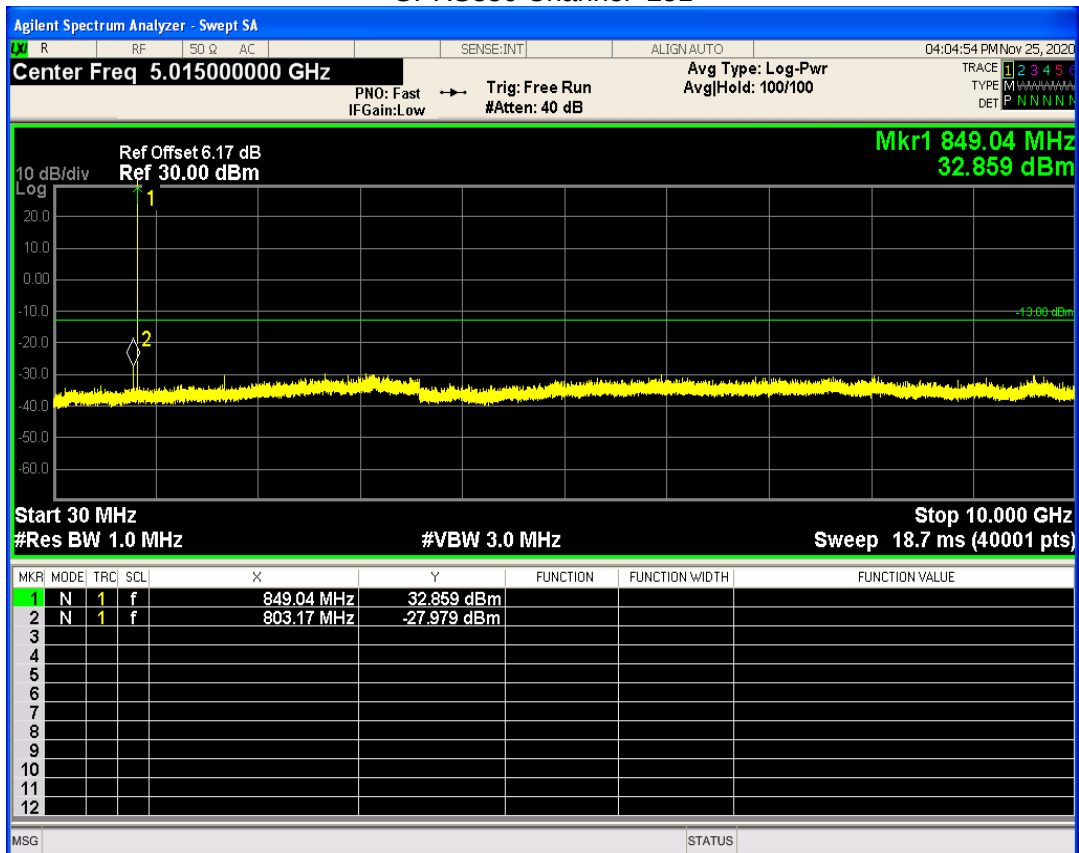

GPRS850 Channel=190

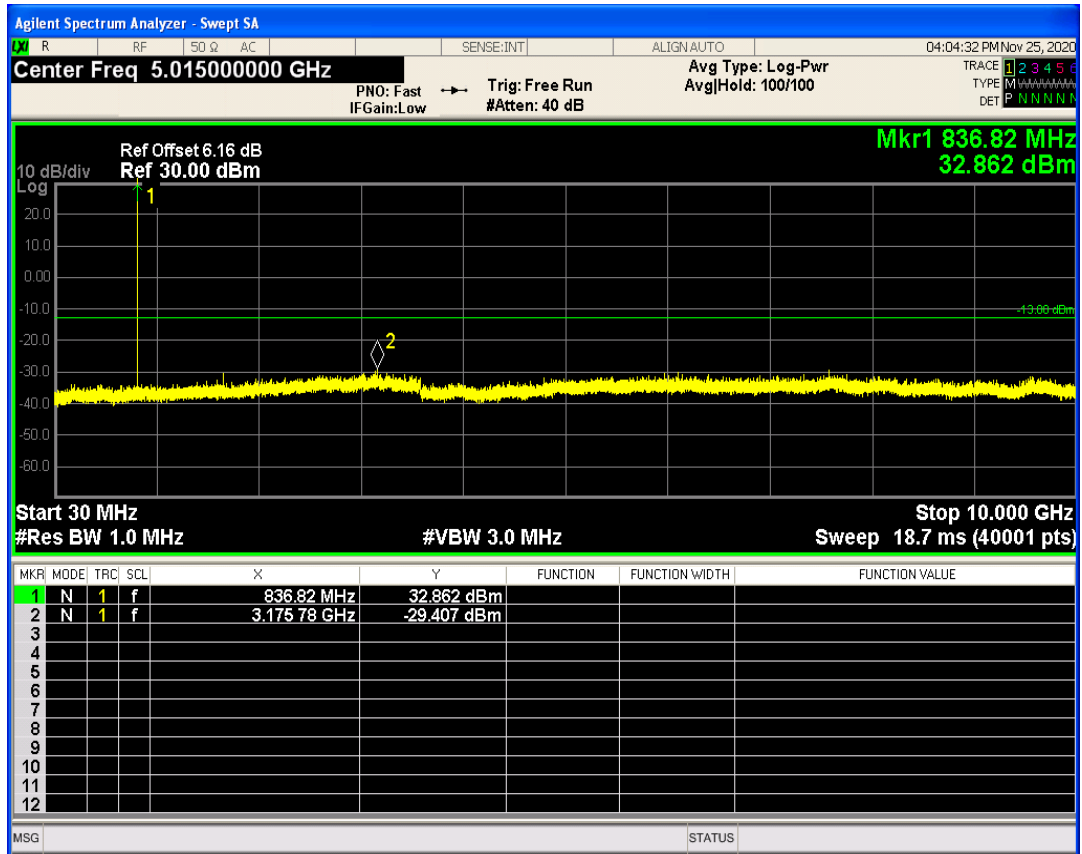

END OF REPORT