

FCC PART 18 TEST
MEASUREMENT AND TEST REPORT
For
GOLDPOINT INT’ L LIMITED

FLAT/RM A, 11/F, RITZ PLAZA, 122 AUSTIN RD, TSIMSHATSUI, KL, HONG KONG

FCC ID: QRZGPLEB226

November 6, 2003

| | |
|---|---|
| This Report Concerns: <input checked="" type="checkbox"/> Original Report | Equipment Type: Electronics Ballast |
| Test Engineer: <u>Jandy Su</u> | |
| Report Number <u>RSZ03101505</u> | |
| Test Date: <u>November 4,2003</u> | |
| Reviewed By: _____ | |
| Prepared By: Bay Area Compliance Lab Corp. ShenZhen Suite C, 41-D Electronics Science & Technology Building, No. 2070 Shennanzhong Rd ShenZhen, Guandong 518031, P.R. China Tel: (755) 83296449 Fax: (755) 83273756 | |

Note: This test report is specially limited to the use of the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

| | |
|--|----------|
| 1 - GENERAL INFORMATION..... | 3 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 3 |
| 1.2 OBJECTIVE | 3 |
| 1.3 RELATED SUBMITTAL(S)/GRANT(S)..... | 3 |
| 1.4 TEST METHODOLOGY | 3 |
| 1.5 TEST FACILITY | 3 |
| 1.6 TEST EQUIPMENT LIST AND DETAILS..... | 4 |
| 1.7 EXTERNAL I/O CABLING..... | 4 |
| 2 - SYSTEM TEST CONFIGURATION..... | 5 |
| 2.1 JUSTIFICATION | 5 |
| 2.2 EQUIPMENT MODIFICATIONS | 5 |
| 2.3 CONFIGURATION OF TEST SYSTEM..... | 5 |
| 2.4 TEST SETUP BLOCK DIAGRAM | 5 |
| 3 - CONDUCTED EMISSIONS TEST DATA..... | 6 |
| 3.1 MEASUREMENT UNCERTAINTY | 6 |
| 3.2 EUT SETUP | 6 |
| 3.3 SPECTRUM ANALYZER SETUP | 6 |
| 3.4 TEST PROCEDURE | 7 |
| 3.5 CONDUCTED EMISSIONS TEST DATA | 7 |
| 3.6 TEST RESULT | 7 |
| 3.7 PLOT(S) OF CONDUCTED EMISSIONS TEST DATA..... | 8 |

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *GOLDPOINT INT' L LIMITED.*'s model *EB-226-120-HPF, EB-218-120-HPF* or the "EUT" as referred to in this report is a *Electronics Ballast* which measures approximately 10.5cm L x 6cm W x 3cm H, rated input voltage: AC 120 V/60Hz.

The test data gathered are from the EUT described above, serial number 100111; 100112. This EUT was provided by the manufacturer as a representative manufacturing sample.

1.2 Objective

The following test report is prepared on behalf of *GOLDPOINT INT' L LIMITED* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B, and C of the Federal Communication Commissions rules and regulations.

The objective is to determine compliance with FCC rules.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted with MP-5 , FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 Meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at the back parking lot of the building at 230 Commercial Street, Sunnyvale, CA 94085 USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001 and FCC MP-5.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------------------------|-----------------------|----------------|------------------|----------------------|
| R/S | Spectrum Analyzer | FSEM | 849720/019 | 08/05/2003 | 1 year |
| HP | Amplifier | 8447D | 2944A0979 5 | 08/05/2003 | 1 year |
| ETS | Log Periodic Antenna | 3146 | 9603-4421 | 09/05/2003 | 1 year |
| ETS | Biconical Antenna | 3110B | 3360 | 08/05/2003 | 1 year |
| Solar Electronics | LISN | TYPE 8012-50-R-24-BNC | 21162 | 09/05/2003 | 1 year |
| Solar Electronics | LISN | TYPE 8012-50-R-25-BNC | 21163 | 10/05/2003 | 1 year |
| COM Power | LISN | LI-200 | 12208 | 10/30/2003 | 1 year |
| COM Power | LISN | LI-200 | 12005 | 10/30/2003 | 1 year |
| HP | Spectrum Analyzer | 8568B | 2517A0161 0 | 10/30/2003 | 1 year |
| HP | Spectrum Analyzer Display Unit | 8568B | 2517A1003 9 | 10/30/2003 | 1 year |
| HP | Quasi-Peak Adapter | 8565A | 3107A0157 2 | 10/30/2003 | 1 year |
| FCC | Absorbing Clamp | F-201-23mm | 90 | 10/30/2003 | 1 year |
| FLUKE | True RMS Multimeter | 187 | 78540402 | 03/24/2003 | 1 year |

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. Certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY.

1.7 External I/O Cabling

| Cable Description | Length (M) | From/Port | To |
|-------------------|------------|-----------|-----|
| AC Mains Cable | 1.3 | AC Mains | EUT |

2 - SYSTEM TEST CONFIGURATION


2.1 Justification

The EUT was tested under normal operating conditions stated in the instruction by the manufacturer.


2.2 Equipment Modifications

The EUT samples provided were reported by the manufacturer to be unmodified production samples.

2.3 Configuration of Test System

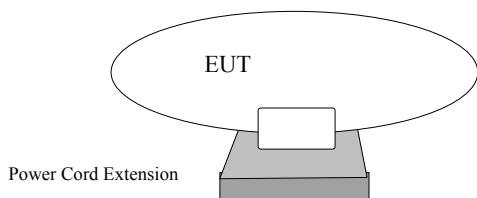

2.4 Test Setup Block Diagram

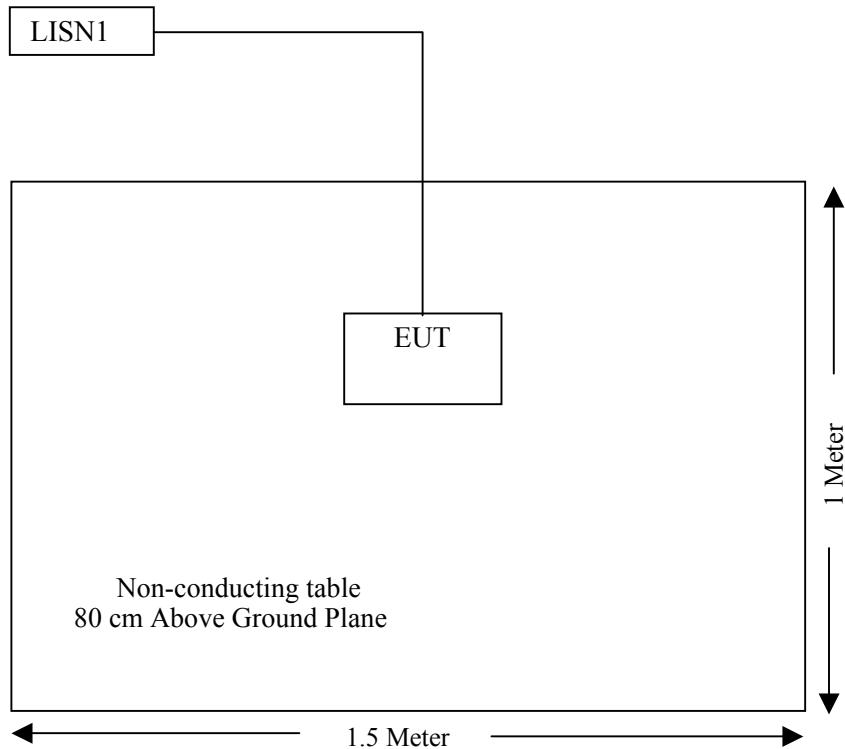

3 - CONDUCTED EMISSIONS TEST DATA

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

3.2 EUT Setup

The setup of EUT is according with MP-5 measurement procedure. The specification used was the FCC Part 18 limits.

The EUT was connected to the power cord extension and placed on the center of the back edge on the test table.

The power cord extension was connected with 120 VAC/60 Hz power source.

3.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configuration during the conduction test, Frequency investigated was from 450 KHz to 30MHz:

| | |
|----------------------|---------|
| Start Frequency..... | 450 kHz |
| Stop Frequency..... | 30 MHz |
| IF Bandwidth..... | 10 kHz |
| Video Bandwidth..... | 10 kHz |

3.4 Test Procedure

During the conducted emission test, the power cord of the power cord extension was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT is compliant with all installation combination.

The EUT was tested under the normal modes during the final qualification test to represent the worst case results.

3.5 Conducted Emissions Test Data

| | | | |
|----------------|-----------------------|------------------|----------|
| Date of Test : | November 4,2003 | Temperature : | 25°C |
| EUT : | Electronics Ballast | Humidity : | 70% |
| M/N : | <i>EB-226-120-HPF</i> | Operating Mode : | On |
| S/N : | 100111 | Test Engineer: | Jandy Su |

| LINE CONDUCTED EMISSIONS | | | | FCC PART 18 | |
|--------------------------|------------|-------------|--------------|-------------|--------|
| Frequency | Amplitude | Detector | Phase | Limit | Margin |
| MHz | dB μ V | Qp/Ave/Peak | Line/Neutral | dB μ V | dB |
| 0.75 | 46.1 | QP | Line | 56.00 | -9.90 |
| 3.17 | 44.71 | QP | Line | 56.00 | -11.29 |
| 30 | 44.05 | QP | Line | 60.00 | -15.95 |
| 19.4 | 42.99 | QP | Neutral | 60.00 | -17.01 |
| 0.45 | 39 | QP | Neutral | 56.88 | -17.88 |
| 3.11 | 36.48 | QP | Neutral | 56.00 | -19.52 |

| | | | |
|----------------|-----------------------|------------------|----------|
| Date of Test : | November 4,2003 | Temperature : | 25°C |
| EUT : | Electronics Ballast | Humidity : | 70% |
| M/N : | <i>EB-218-120-HPF</i> | Operating Mode : | On |
| S/N : | 100112 | Test Engineer: | Jandy Su |

| LINE CONDUCTED EMISSIONS | | | | FCC PART 18 | |
|--------------------------|------------|-------------|--------------|-------------|--------|
| Frequency | Amplitude | Detector | Phase | Limit | Margin |
| MHz | dB μ V | Qp/Ave/Peak | Line/Neutral | dB μ V | dB |
| 2.11 | 47.11 | QP | Line | 56.00 | -8.89 |
| 0.63 | 46.05 | QP | Line | 56.00 | -9.95 |
| 2.11 | 45.26 | QP | Neutral | 56.00 | -10.74 |
| 27.51 | 40.72 | QP | Neutral | 60.00 | -19.28 |
| 17.98 | 40.72 | QP | Line | 60.00 | -19.28 |
| 18.15 | 39.81 | QP | Neutral | 60.00 | -20.19 |

3.6 Test Result


PASS

3.7 Plot(s) of Conducted Emissions Test Data


Plot(s) of Conducted Emissions Test Data is presented hereinafter as reference.

The plots of conducted emission tested with Commercial Electric power cord extension, M/N: EB-226-120-HPF was presented hereinafter as reference.

Line:

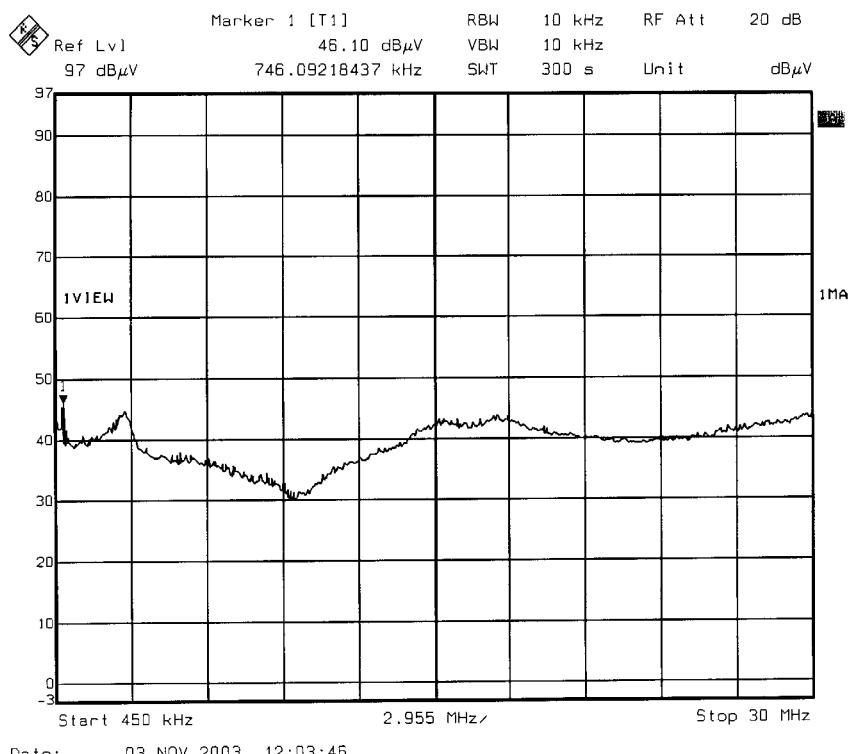


Neutral:

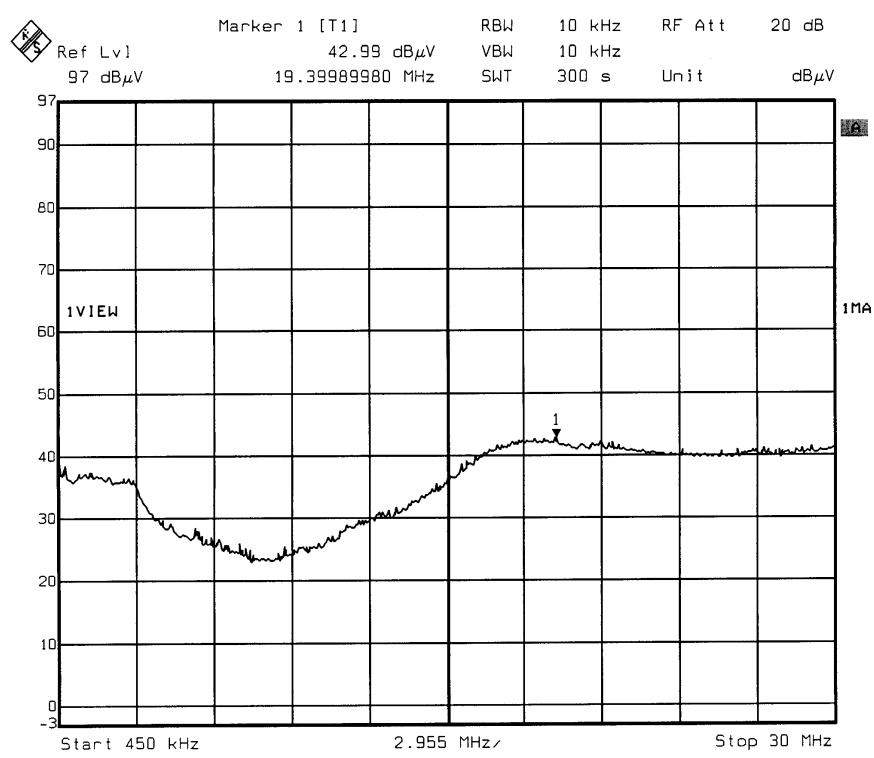

The plots of conducted emission tested with Commercial Electric power cord extension, M/N: EB-218-120-HPF was presented hereinafter as reference.

Line:

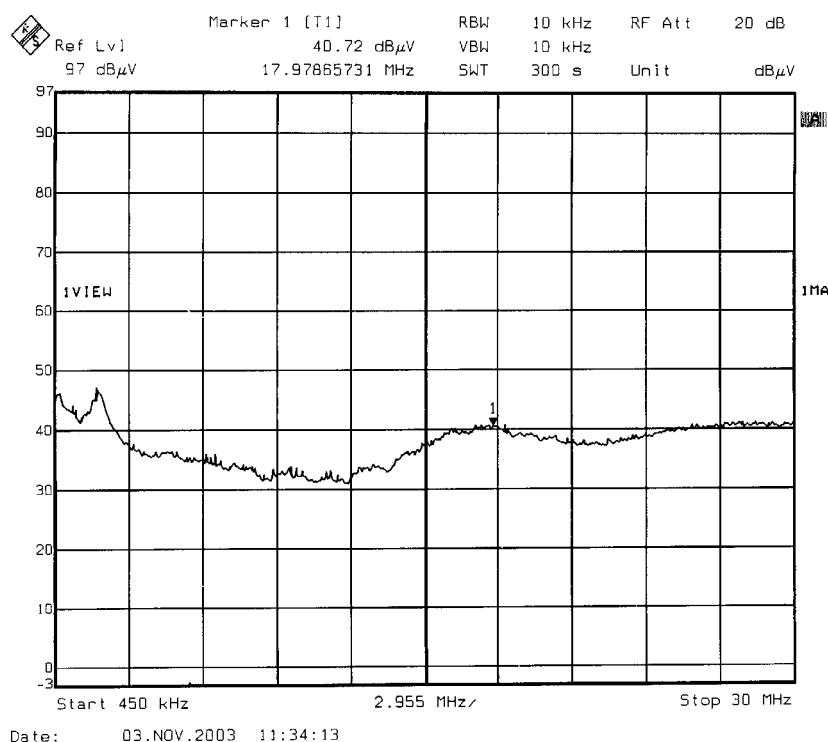

Neutral:

