



FCC LISTED,
REGISTRATION
NUMBER: 905266

IC LISTED,
REGISTRATION
NUMBER: IC 4621

CENTRO DE
TECNOLOGÍA DE LAS
COMUNICACIONES, S.A.

Parque Tecnológico de Andalucía,
c/Severo Ochoa nº 2
29590 Campanillas/ Málaga/ España
Tel. 952 61 91 00 - Fax 952 61 91 13
MÁLAGA, C.I.F. A29 507 456
Registro Mercantil Tomo 1169 Libro 82
Folio 133 Hoja MA3729

TEST REPORT

Report No.: 22281RET.101

TEST NAME: FCC PART 15.247 TESTING FOR BLUETOOTH RADIO DEVICE

Product : BLUETOOTH BARCODE SCANNER
Trade Mark : BARACODA
Model/type Ref. : BARACODA ROADRUNNERS
Manufacturer : BARACODA WIRELESS TECHNOLOGY
Requested by : BARACODA WIRELESS TECHNOLOGY
Other identification of the product : Versions: BBR-L, BRR-F
FCC ID: QSHAIRRBC
Standard(s) : USA FCC Part 15.247, 15.205, 15.209, 15.109, 15.207

This test report includes 2 annexes and therefore the total number of pages is 67.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, and must not be reproduced except in full without the written approval of Centro de Tecnología de las Comunicaciones, S.A. (CETECOM).

Date: 2005-06-21	Test operator A. Llamas 	Revised by: Date: 2005-06-21 J. C. Soler CENTRO DE TECNOLOGÍA DE LAS COMUNICACIONES, S.A. 	Approved by: Date: 22 June 2005 A. Rojas Technical Director 	Page: 1 of 8
------------------	--------------------------------	---	--	--------------

INDEX

1. COMPETENCE AND GUARANTEES	3
2. GENERAL CONDITIONS	3
3. CHARACTERISTICS OF THE TEST	3
3.1 TEST REQUESTED.....	3
3.2 REQUIREMENTS AND METHOD	3
4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT.....	4
4.1 APPLICANT.....	4
4.2 REPRESENTATIVE.....	4
4.3 TEST SAMPLES SUPPLIER.....	4
4.4 IDENTIFICATION OF ITEM/ITEMS TESTED	5
5. USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS	5
5.1 USAGE OF SAMPLES	5
5.2 PERIOD OF TESTING	6
5.3 ENVIROMENTAL CONDITIONS.....	6
6. TEST RESULTS	8
7. REMARKS AND COMMENTS.....	8
8. SUMMARY.....	8

ANNEXES

ANNEX A. TEST RESULTS

ANNEX B. PHOTOGRAPHS

Report No.: 22281RET.101		Page: 2 of 8
Date: 2005-06-21		

1. COMPETENCE AND GUARANTEES

Centro de Tecnología de las Comunicaciones (CETECOM), S.A. is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 905266.

Centro de Tecnología de las Comunicaciones (CETECOM), S.A. is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621.

In order to assure the traceability to other national and international laboratories, CETECOM has a calibration and maintenance programme for its measuring equipment.

CETECOM guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at CETECOM at the time of execution of the test.

CETECOM is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

2. GENERAL CONDITIONS

1. This report only refers to the item that has undergone the test.
2. This report does not constitute or imply by its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without written approval of CETECOM.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CETECOM and the Accreditation Bodies.

3. CHARACTERISTICS OF THE TEST

3.1 TEST REQUESTED

Measurements for frequency hopping spread spectrum equipment (Bluetooth) operating in the 2400 MHz -2483.5 MHz band and using, according to FCC Part 15.247.

3.2 REQUIREMENTS AND METHOD

The test has been carried out according to FCC parts 15.33, 15.35, 15.109, 15.207, 15.205, 15.209, 15.247 and the document DA 00-705:"Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems".

The testing was performed according to the procedure in ANSI C63.4. Radiated testing was performed in Cetecom's semi-anechoic chamber. This site has been fully described in a report submitted to the FCC and was accepted in a letter dated July 25, 2002.

Report No.: 22281RET.101		Page: 3 of 8
Date: 2005-06-21		

The instrumentation used to perform the testing is listed below:

1. Semianechoic Absorber Lined Chamber IR 11. BS.
2. Control Chamber IR 12.BC.
3. Antenna mast EM 1072 NMT.
4. Rotating table EM 1084-4. ON.
5. Multi device controller ETS 2090.
6. Bilog antenna CHASE CBL6111.
7. Antenna tripod EMCO 11968C.
8. Double-ridge Guide Horn antenna 1-18 GHz HP 11966E.
9. Double-ridge Guide Horn antenna 18-40 GHz Agilent 11966J.
10. RF pre-amplifier Miteq JS4-12002600-30-5A.
11. Semianechoic Absorber Lined Chamber IR 11. BS.
12. RF pre-amplifier Miteq AFS5-04001300-15-10P-6.
13. Spectrum analyzer R&S ESIB 26.
14. Spectrum analyzer R&S FSM.
15. Transient limiter. HP 11947^a
16. Line Impedance Stabilization Network (L.I.S.N.) R&S. ESH2-Z5

4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT

Identification data in this section has been supplied by the client.

4.1 APPLICANT

Name or Company: BARACODA WIRELESS TECHNOLOGY

V.A.T.: ---

Address: 30, Avenue de l'Amiral Lemonnier **City:** Marly le Roi

Postal code: 78160 **Country:** FRANCE

Telephone: +33 1 30088900 **Fax:** +33 1 30088998

4.2 REPRESENTATIVE

Name: Mr. Thierry Fortune

4.3 TEST SAMPLES SUPPLIER

Name or Company: Same as indicated in point 4.1.

Report No.: 22281RET.101		Page: 4 of 8
Date: 2005-06-21		

Samples undergoing test have been selected by: **the client**.

4.4 IDENTIFICATION OF ITEM/ITEMS TESTED

Product: BLUETOOTH BARCODE SCANNER

Trade mark: BARACODA

Model: BARACODA ROADRUNNERS

Versions: BRR-L, BRR-F

Manufacturer: BARACODA WIRELESS TECHNOLOGY

Country of manufacture: FRANCE

Manufacture site: Data not available

Description: Bluetooth barcode scanners, with two versions depending on the Scan engine (barcode reading module).

5. USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS

5.1 USAGE OF SAMPLES

Sample M/01 is formed by the following elements:

Control No.	Description	Model	Serial No.	Date of reception
22281/03	Bluetooth barcode scanner with integral antenna	Baracoda Roadrunners Version BRR-L	B400301051 0061	18/05/05

Sample M/02 is formed by the following elements:

Control No.	Description	Model	Serial No.	Date of reception
22281/16	Bluetooth barcode scanner with antenna connector	Baracoda Roadrunners Version BRR-L	B400302051 0077	10/06/05
22281/11	Test board	---	---	02/06/05
22281/12	AC adaptor for test board	---	---	02/06/05

Sample S/01 is composed of the following elements:

Control No.	Description	Model	Serial No.	Date of reception
22281/01	Bluetooth barcode scanner with integral antenna	Baracoda Roadrunners Version BRR-L	B400301051 0045	18/05/05
22281/07	Charger	---	---	18/05/05

During the tests were used next ancillary equipments:

Control No.	Description	Model	Serial No.	Date of arrival
22281/04	USB BT Dongle	BDC001	B110439551 7-03	18/05/05
22281/---	Auxiliary PC with Software of CETECOM	---	---	---

Report No.: 22281RET.101		Page: 5 of 8
Date: 2005-06-21		

The sample **S/02** is the sample S/01 but it is added the following element:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
22281/15	Serial cable	---	---	06/06/05

1. Sample M/01 has undergone following test(s).
Radiated measurements indicated in annex A.
2. Sample M/02 has undergone following test(s).
All tests indicated in annex A, except radiated measurements and AC Line conducted emissions.
3. Samples S/01 and S/02 has undergone to the following test(s):
AC Line continuous conducted emission, power leads in annex A.

5.2 PERIOD OF TESTING

The performed test started on 2005-05-23 and finished on 2005-06-13.

The tests as detailed in this report have been performed at CETECOM.

5.3 ENVIRONMENTAL CONDITIONS

In the control chamber the following limits were not exceeded during the test:

Temperature	Min. = 23 °C Max. = 24 °C
Relative humidity	Min. = 46 % Max. = 46 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Report No.: 22281RET.101		Page: 6 of 8
Date: 2005-06-21		

In the semianechoic chamber (21 meters x 11 meters x 8 meters) the following limits were not exceeded during the test.

Temperature	Min. = 23 °C Max. = 23 °C
Relative humidity	Min. = 52 % Max. = 52 %
Air pressure	Min. = 1019 mbar Max. = 1019 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 21 °C Max. = 22 °C
Relative humidity	Min. = 47 % Max. = 47 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Report No.: 22281RET.101		Page: 7 of 8
Date: 2005-06-21		

6. TEST RESULTS

Abbreviations used in the VERDICT column of the following tables are:

P Pass
F Fail
NA not applicable
NM not measured

FCC PART 15 PARAGRAPH	VERDICT			
	NA	P	F	NM
15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation	P			
15.247 Subclause (a) (1) (iii). Number of hopping channels	P			
15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time)	P			
15.247 Subclause (b). Maximum peak output power and antenna gain	P			
15.247 Subclause (d). Band-edge of conducted emissions (Transmitter)	P			
15.247 Subclause (d). Emission limitations conducted (Transmitter)	P			
15.247 Subclause (d). Emission limitations radiated (Transmitter)	P			
15.109. Receiver spurious radiation	P			
15.207. Continuous Conducted Emissions	P			

7. REMARKS AND COMMENTS

None.

8. SUMMARY

Based on the results of the performed test, stated in annex A the item under test is **IN COMPLIANCE** with the specifications listed in section 3.1 “TEST REQUESTED”.

NOTE: The results presented in this Test Report apply only to the particular item under test declared in section 4.4 “IDENTIFICATION OF ITEM/ITEMS TESTED” of this document, as presented for test on the date(s) declared in section 5, “USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS”.

Report No.: 22281RET.101		Page: 8 of 8
Date: 2005-06-21		

ANNEX A
TEST RESULTS

Report No: 22281RET.101

Report No: 22281RET.101		Page: 1 of 52
Date: 2005-06-23 FET45_00.DOC		Annex A

INDEX

	Page
TEST CONDITIONS	3
Section 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation.....	5
Section 15.247 Subclause (a) (1) (iii). Number of hopping channels	10
Section 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time).....	12
Section 15.247 Subclause (b). Maximum peak output power and antenna gain.....	15
Section 15.247 Subclause (d). Band-edge of conducted emissions (Transmitter)	22
Section 15.247 Subclause (d). Emission limitations conducted (Transmitter)	26
Section 15.247 Subclause (d). Emission limitations radiated (Transmitter).....	29
Section 15.109. Receiver spurious radiation	42
Section 15.207. Continuous Conducted Emission	48

Report No: 22281RET.101		Page: 2 of 52
Date: 2005-06-23 FET45_00.DOC		Annex A

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.7 \text{ Vdc}$$

Type of power supply = DC Voltage from rechargeable battery

Type of antenna = Integral antenna

Maximum Declared Gain for antenna= 2 dBi

Operating Temperature Range (°C):

$$T_n = -20 \text{ to } +55$$

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2441 MHz

Highest channel: 2480 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyser via the antenna connector (sma type) provided with the test sample. No coaxial low-loss connecting cable was necessary for such connection so no cable attenuation correction was made.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

AC LINE CONDUCTED MEASUREMENTS

The conducted disturbance at mains ports measurements are performed in a screen room using a (50 Ω / 50 µH) Line Impedance Stabilization Network (LISN).

Report No: 22281RET.101		Page: 3 of 52
Date: 2005-06-23		Annex A

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Report No: 22281RET.101		Page: 4 of 52
Date: 2005-06-23		Annex A

Section 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation**SPECIFICATION**

Frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

RESULTS


20 dB Bandwidth (see next 3 plots).

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	961.92	1022.04	1034.07
Measurement uncertainty (kHz)	± 11		

Report No: 22281RET.101		Page: 5 of 52
Date: 2005-06-23		Annex A

20 dB BANDWIDTH.

Lowest Channel: 2402 MHz.

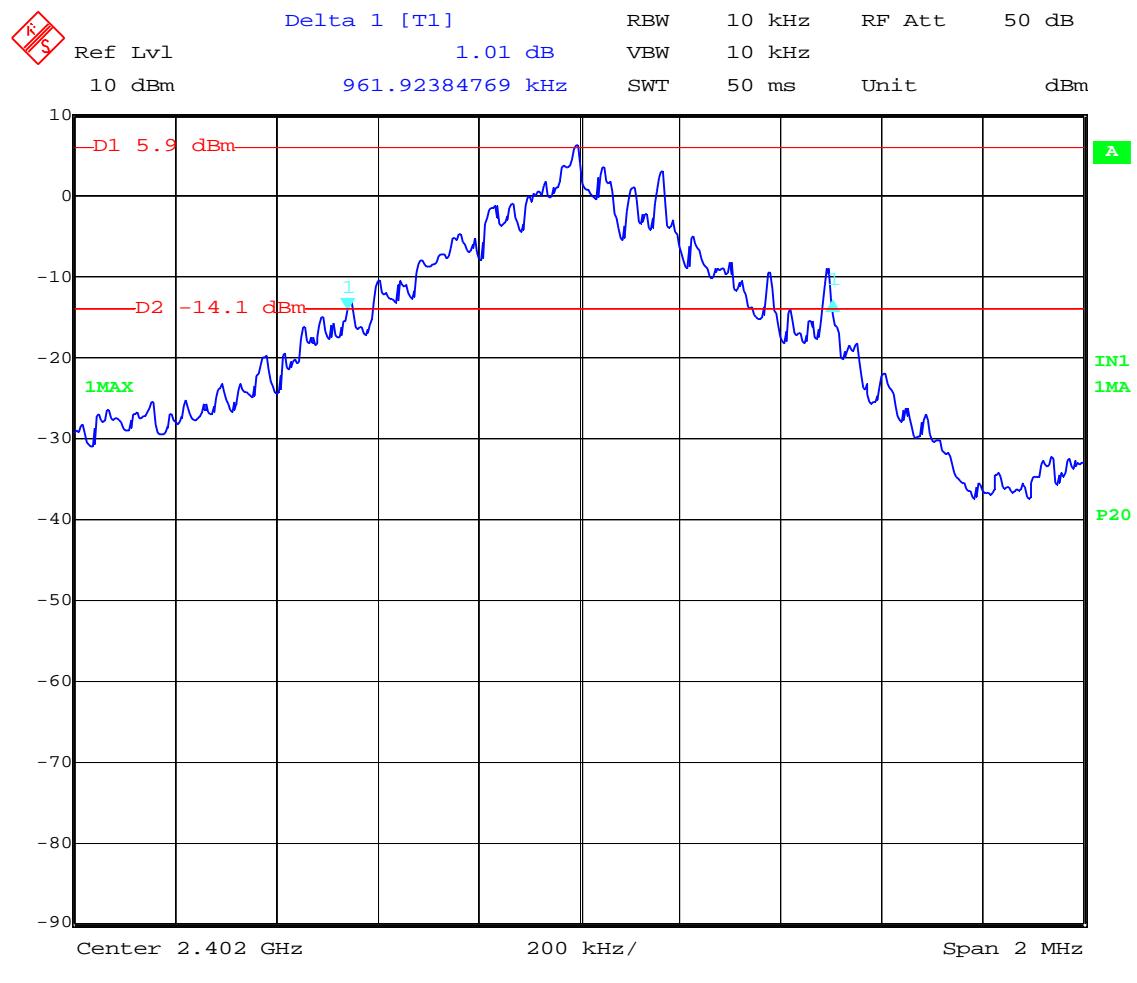

Report No:
22281RET.101

Page: 6 of 52

Date: 2005-06-23

Annex A

20 dB BANDWIDTH.

Middle Channel: 2441 MHz.



Report No:
22281RET.101

Page: 7 of 52

Date: 2005-06-23

Annex A

20 dB BANDWIDTH.

Highest Channel: 2480 MHz.




Report No:
22281RET.101

Page: 8 of 52

Date: 2005-06-23

Annex A

Carrier frequency separation (see next plot).

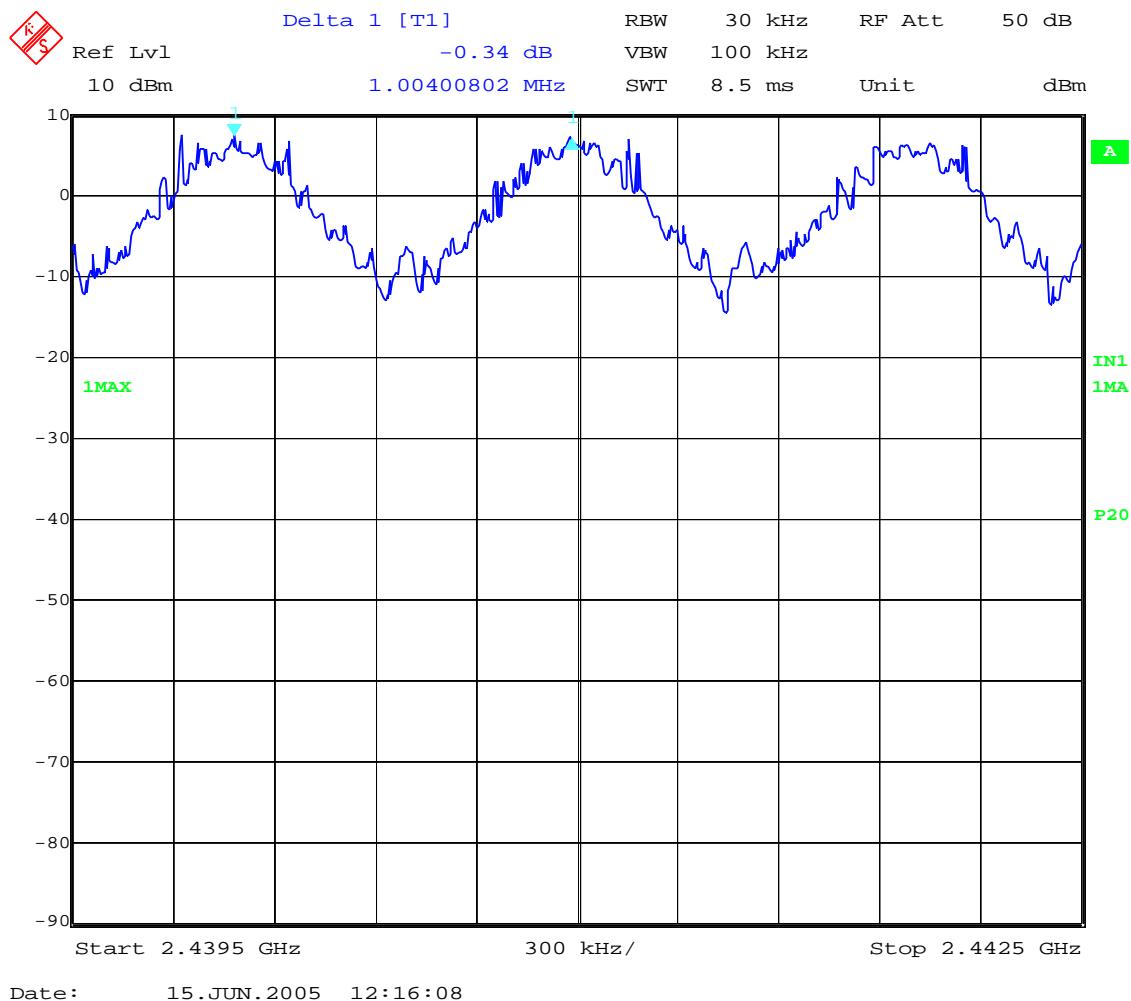

The hopping channel carrier frequencies are separated by a minimum of the 20 dB bandwidth of the hopping channel.

Verdict: PASS

Report No: 22281RET.101		Page: 9 of 52
Date: 2005-06-23		Annex A


Section 15.247 Subclause (a) (1) (iii). Number of hopping channels

SPECIFICATION

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.


RESULTS

The number of hopping channels is 79 (see next two plots).

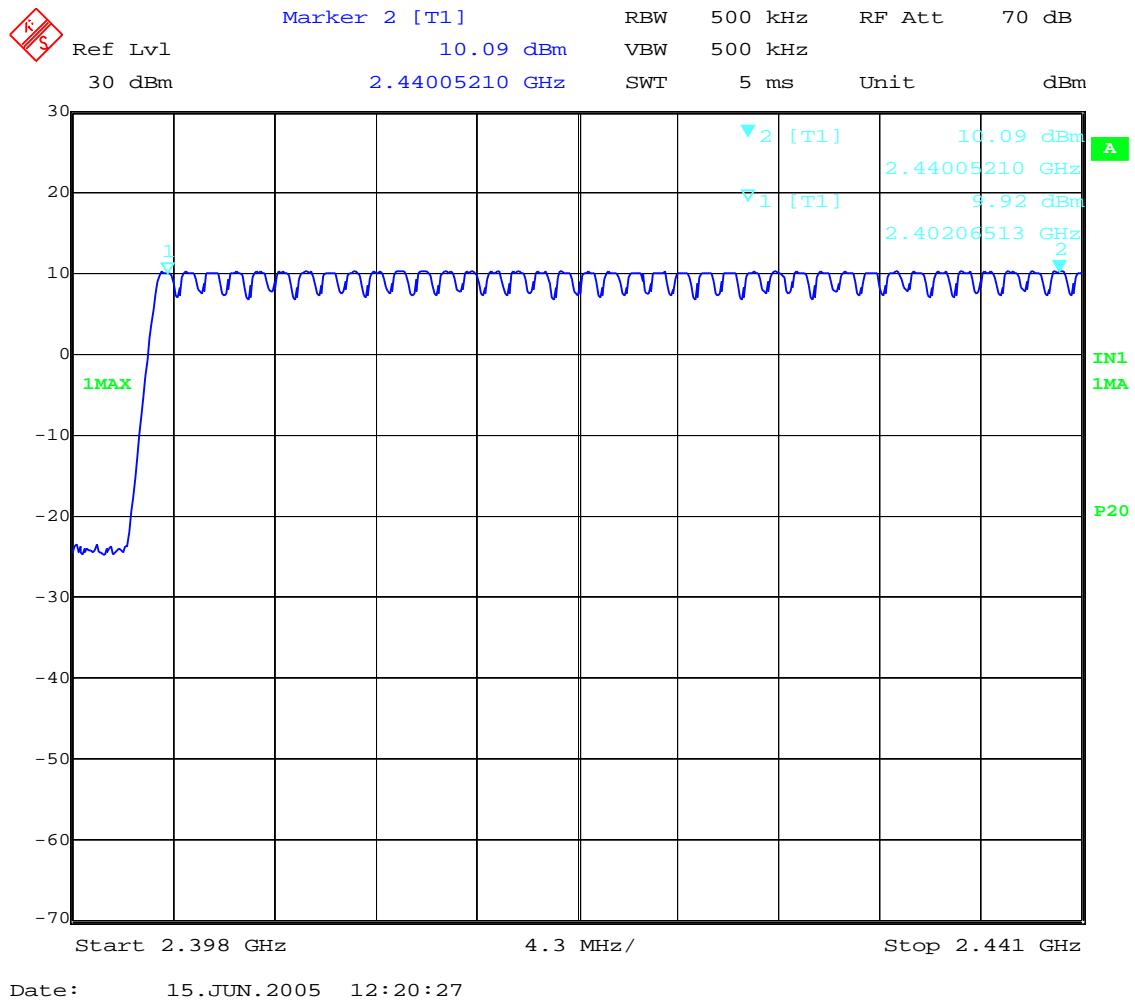

Number of hopping frequencies: 39

Report No: 22281RET.101		Page: 10 of 52
Date: 2005-06-23		Annex A

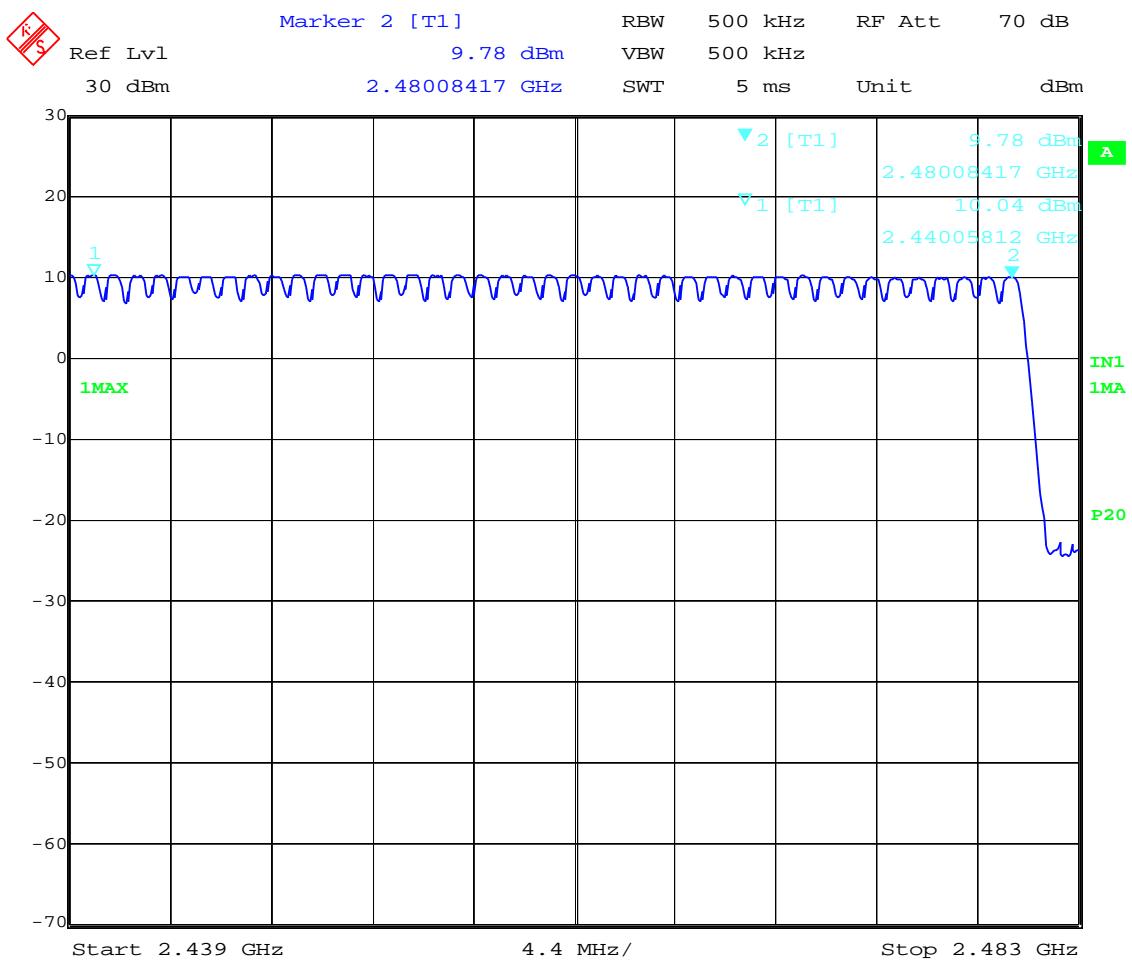

Number of hopping frequencies: 40

Total number of hopping frequencies: 79

Verdict: PASS

Section 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time)

SPECIFICATION

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.


RESULTS

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of $625\mu\text{s}$ with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance .

Each Tx-time per appearance is $440.88\mu\text{s}$ (see next plot).

So we have $320.11 \times 440.88\mu\text{s} = 141.13\text{ ms}$ per 31.6 seconds.

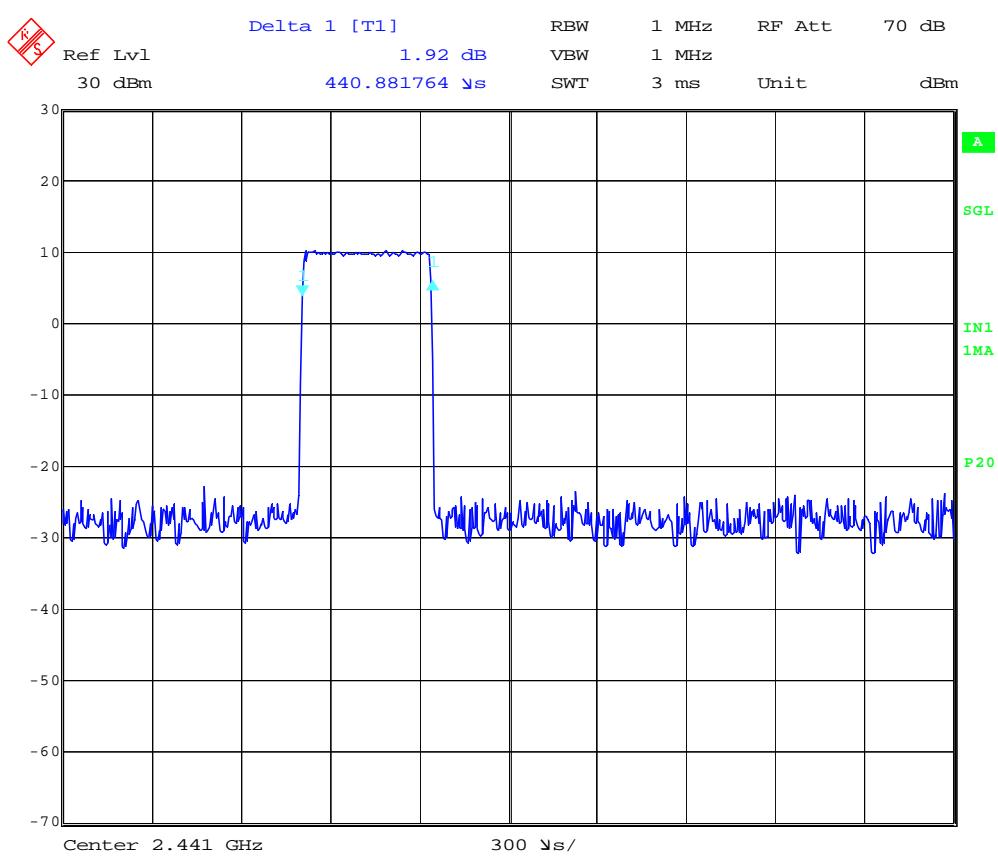

Date: 15.JUN.2005 12:31:38

Verdict: PASS


Report No: 22281RET.101		Page: 12 of 52
Date: 2005-06-23 FET45_00.DOC		Annex A

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet need 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance .

Each Tx-time per appearance is 1.70 ms (see next plot).

So we have 161.16×1.70 ms = 273.97 ms per 31.6 seconds.

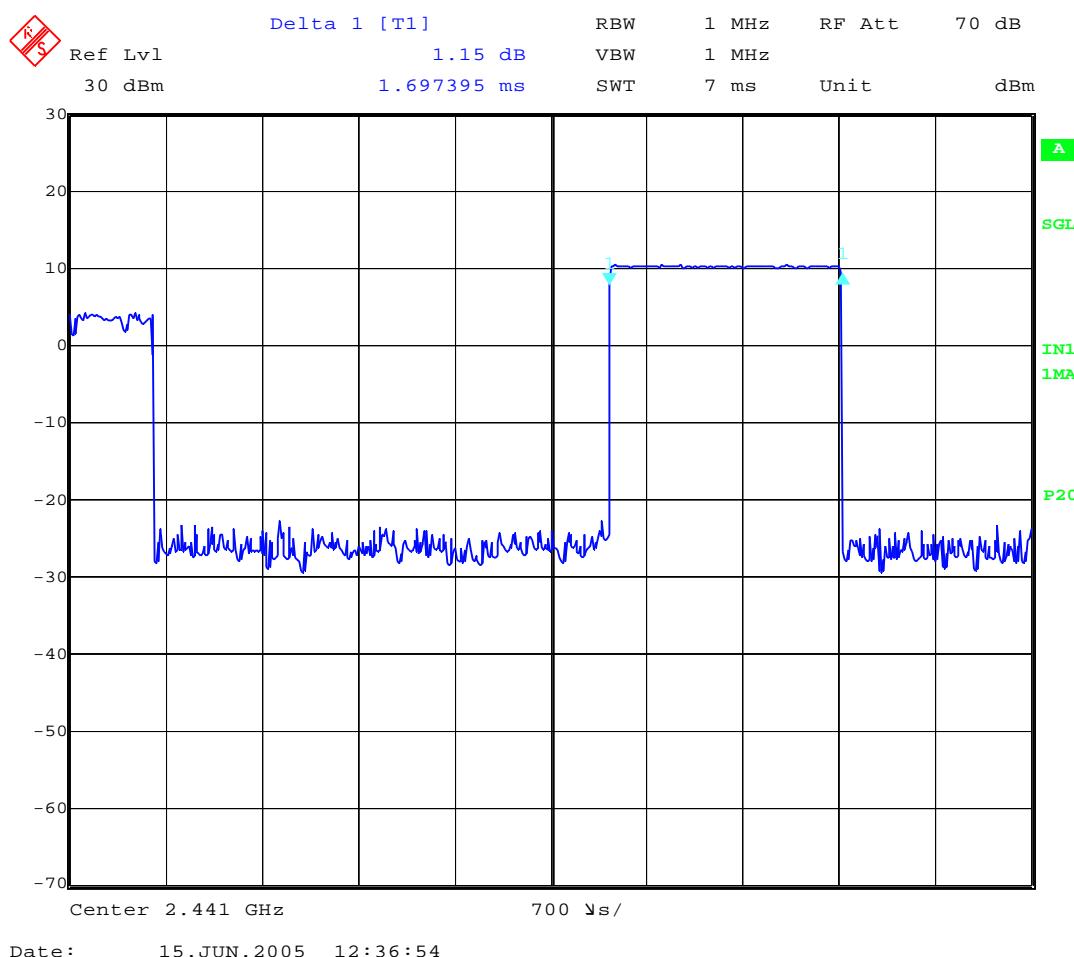

Verdict: PASS


Report No: 22281RET.101		Page: 13 of 52
Date: 2005-06-23		Annex A

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet need 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance .

Each Tx-time per appearance is 2.97 ms (see next plot).

So we have 106.49×2.97 ms = 316.27 ms per 31.6 seconds.

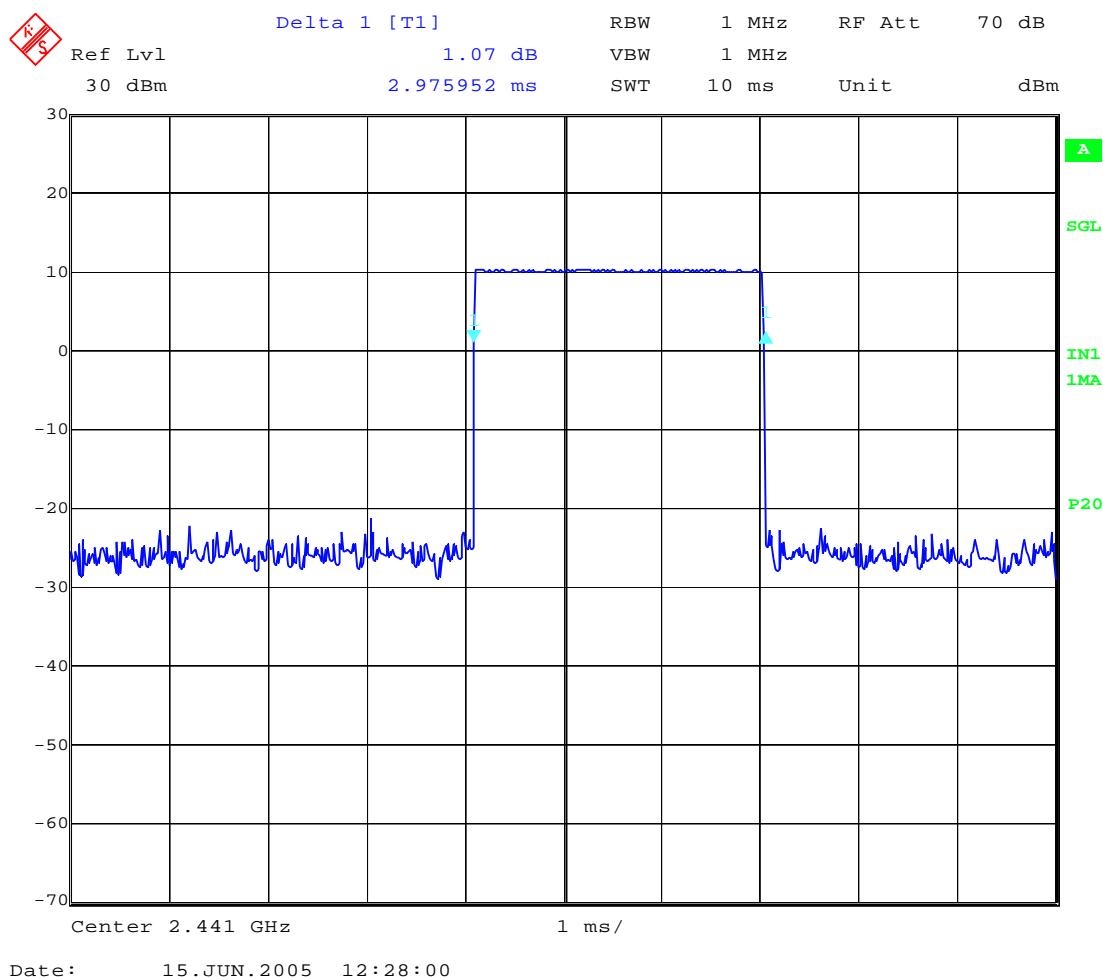

Verdict: PASS

Report No: 22281RET.101		Page: 14 of 52
Date: 2005-06-23		Annex A

Section 15.247 Subclause (b). Maximum peak output power and antenna gain**SPECIFICATION**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

RESULTS

MAXIMUM PEAK OUTPUT POWER (CONDUCTED). See next plots.

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	10.28	10.39	10.27
Measurement uncertainty (dB)	± 1.5		

The maximum declared antenna gain for this device is 2 dBi, therefore the maximum theoretical peak radiated power (EIRP) in the three measurement channels for this device is 12.39 dBm or 17.33 mW.

The actual peak radiated power (EIRP) was measured for the lowest, middle and highest frequency (see next plots):

MAXIMUM PEAK OUTPUT POWER (RADIATED).

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Correction Factor (dB)	34.96	35.10	35.24
Maximum EIRP peak power (dBm)	10.94	11.77	15.30
Measurement uncertainty (dB)	$+1.98 / -1.75$		

Declared peak gain: 2 dBi


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS

Report No: 22281RET.101		Page: 15 of 52
Date: 2005-06-23		Annex A

PEAK OUTPUT POWER (CONDUCTED).

Lowest Channel: 2402 MHz.

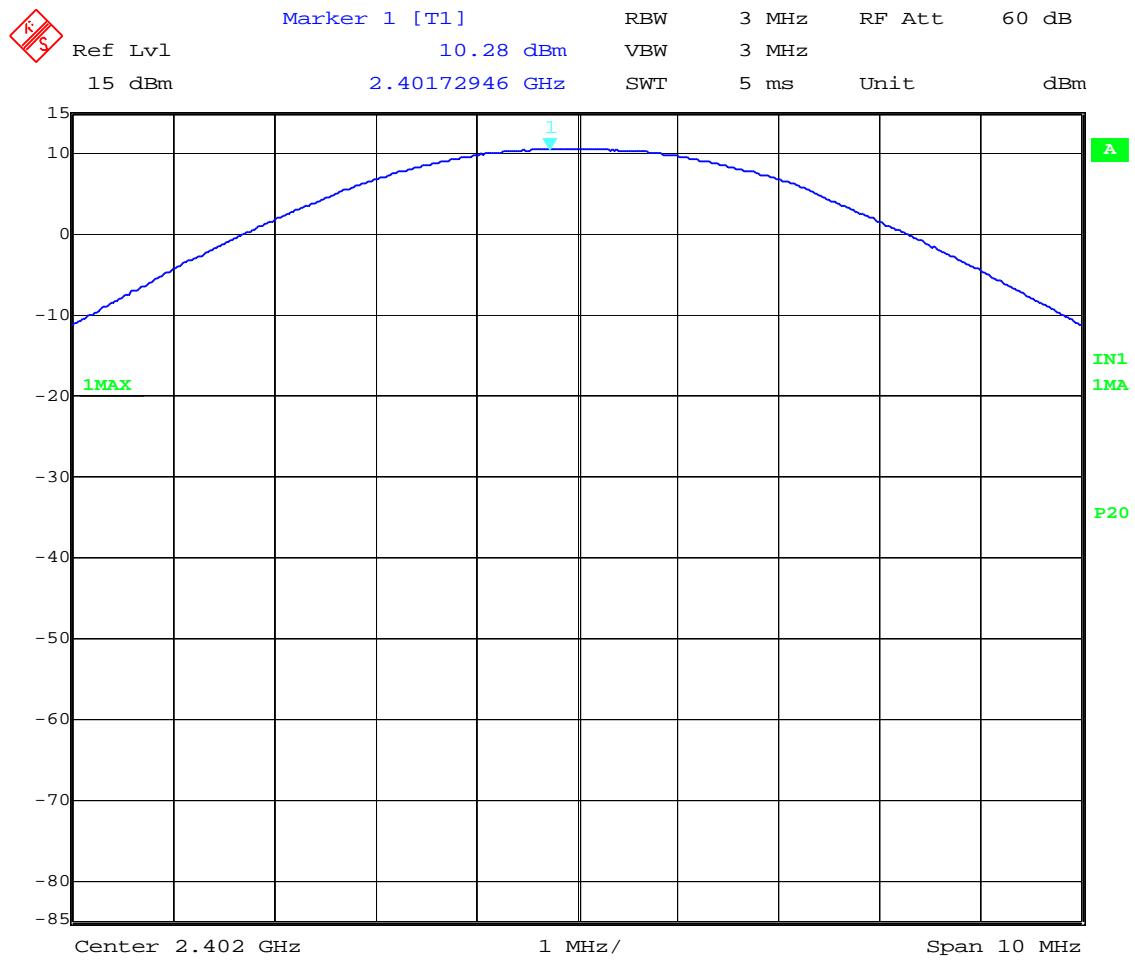


Date: 15.JUN.2005 12:40:07

Report No: 22281RET.101		Page: 16 of 52
Date: 2005-06-23		Annex A

PEAK OUTPUT POWER (CONDUCTED).

Middle Channel: 2441 MHz.

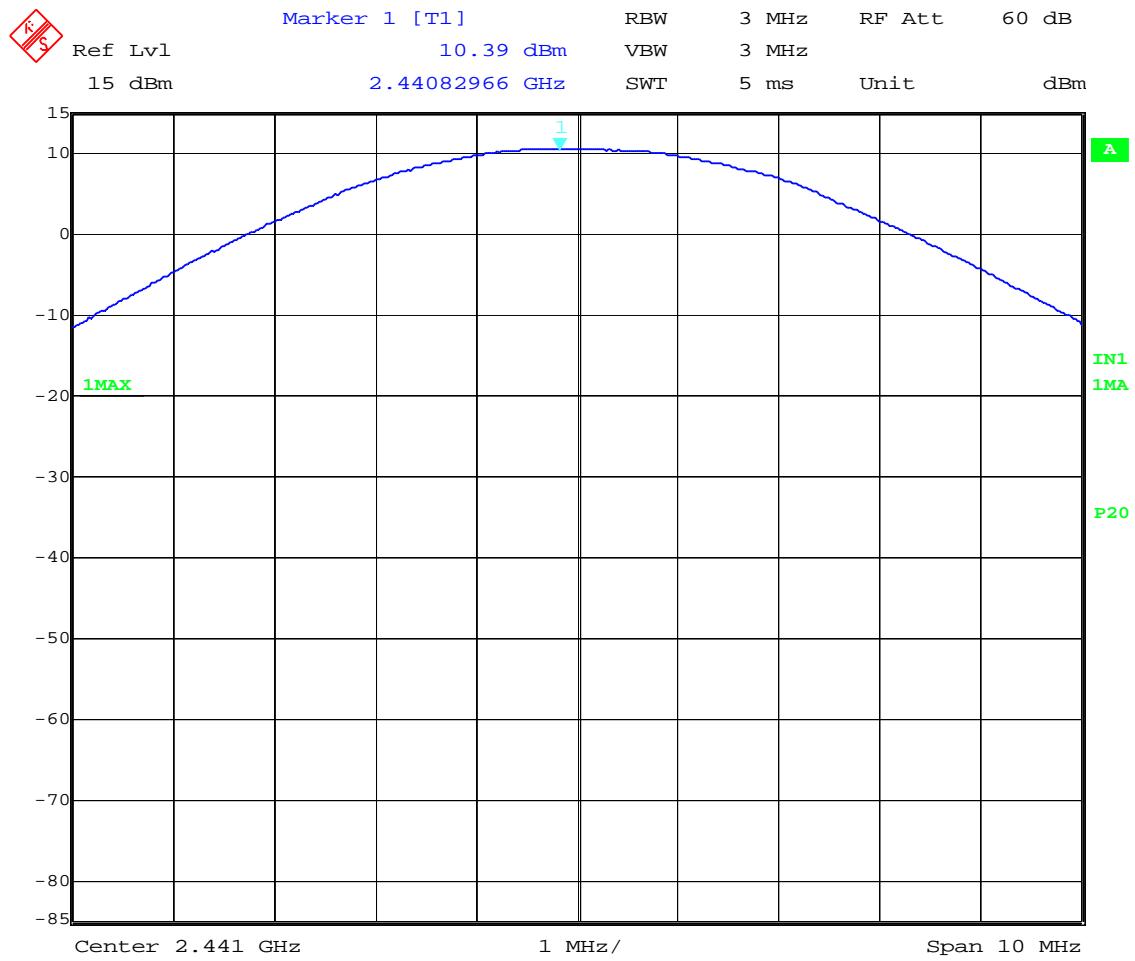


Date: 15.JUN.2005 12:41:42

Report No: 22281RET.101		Page: 17 of 52
Date: 2005-06-23		Annex A

PEAK OUTPUT POWER (CONDUCTED).

Highest Channel: 2480 MHz.

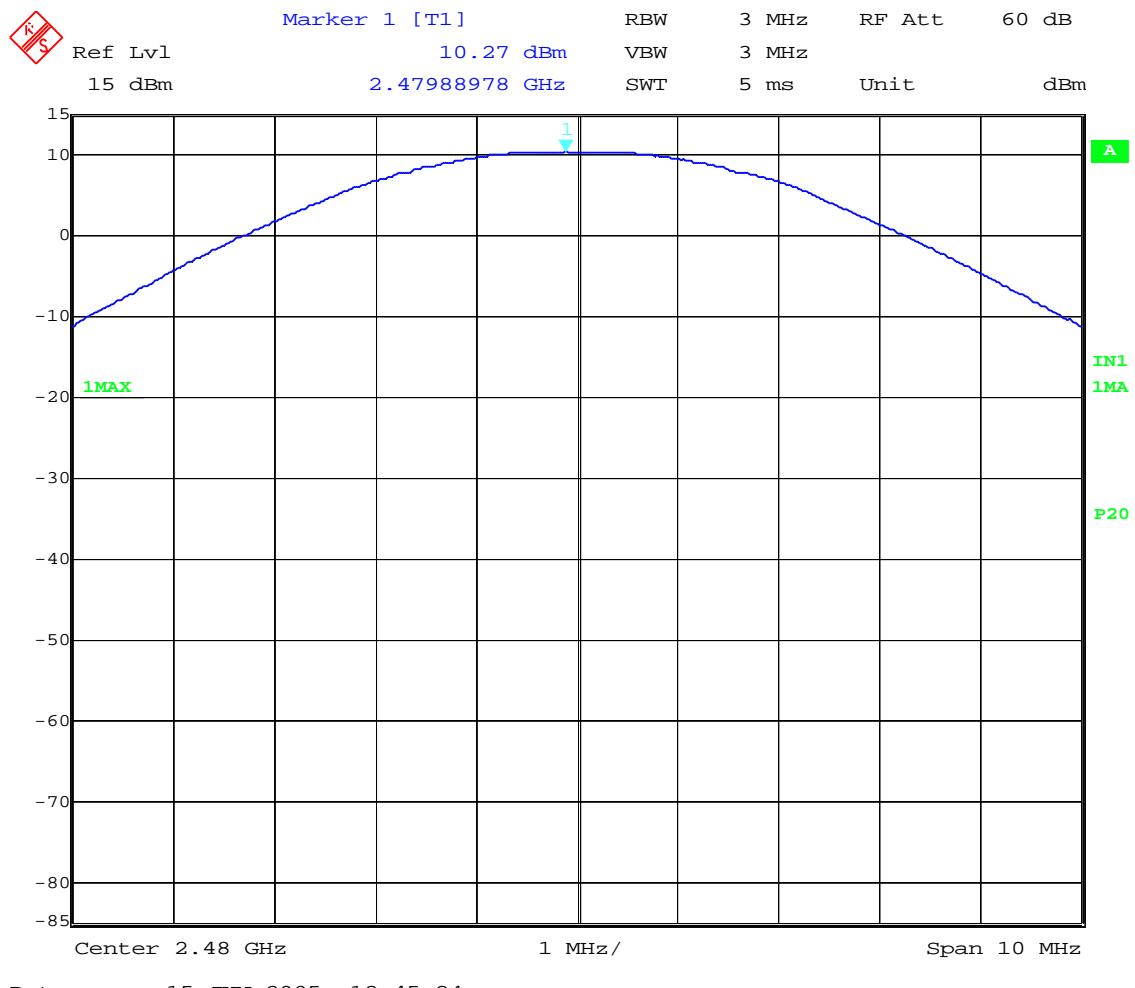


Date: 15.08.2005 12:45:24

Report No: 22281RET.101		Page: 18 of 52
Date: 2005-06-23		Annex A

PEAK OUTPUT POWER (RADIATED).


Lowest Channel: 2402 MHz.

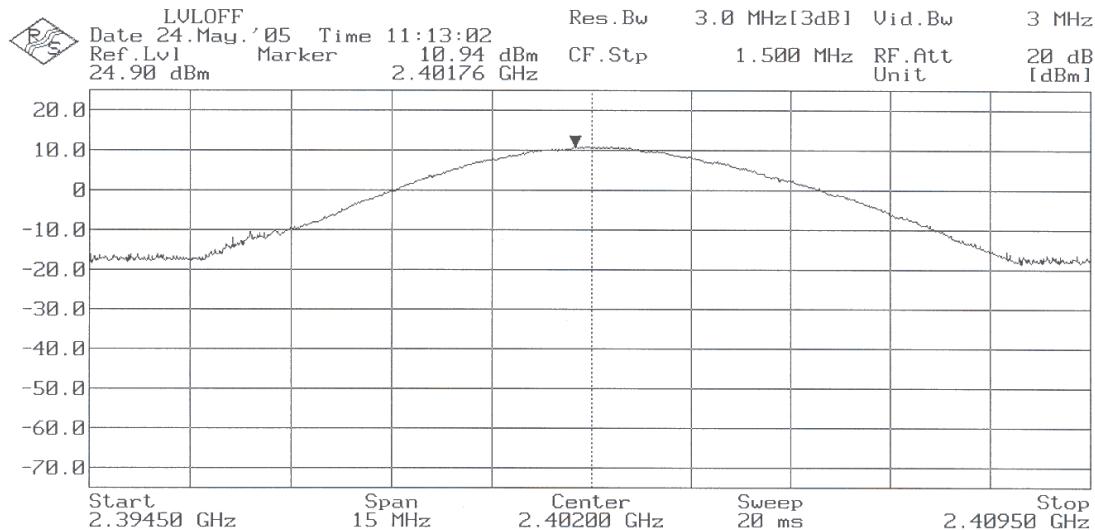

Report No: 22281RET.101		Page: 19 of 52
Date: 2005-06-23		Annex A

PEAK OUTPUT POWER (RADIATED).


Middle Channel: 2441 MHz.

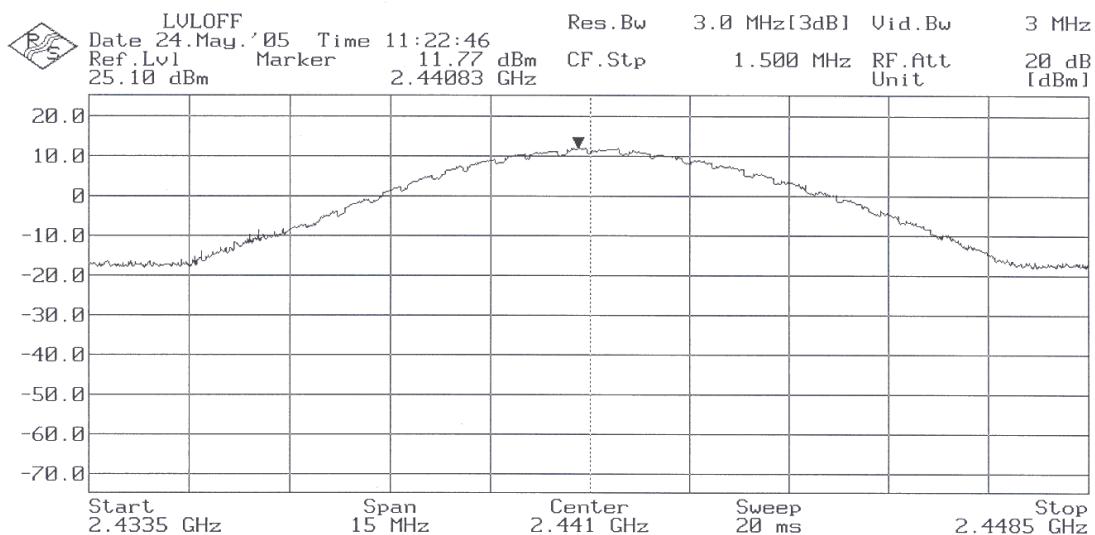

Report No: 22281RET.101		Page: 20 of 52
Date: 2005-06-23		Annex A

PEAK OUTPUT POWER (RADIATED).

Highest Channel: 2480 MHz.

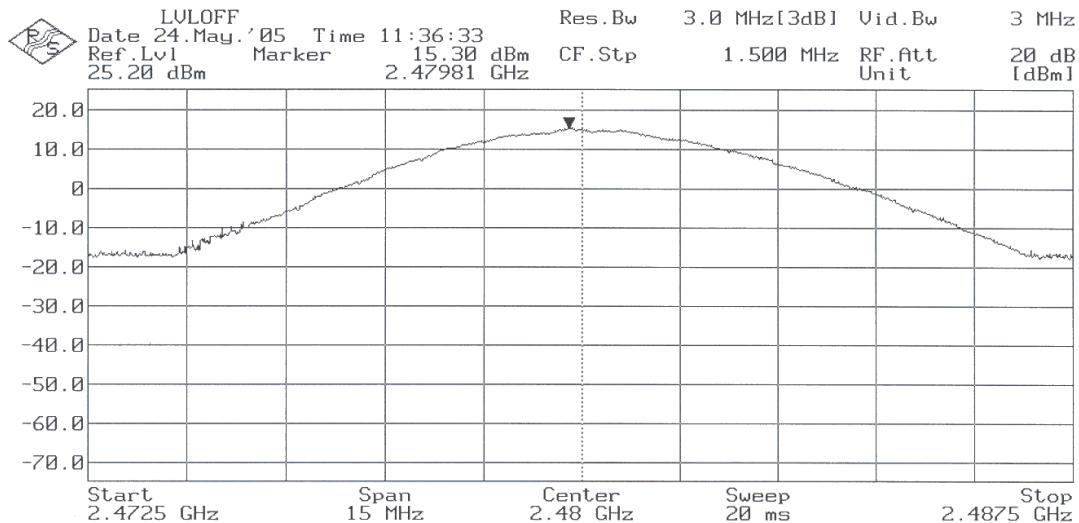

Report No: 22281RET.101		Page: 21 of 52
Date: 2005-06-23		Annex A


Section 15.247 Subclause (d). Band-edge of conducted emissions (Transmitter)

SPECIFICATION

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

RESULTS:


1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

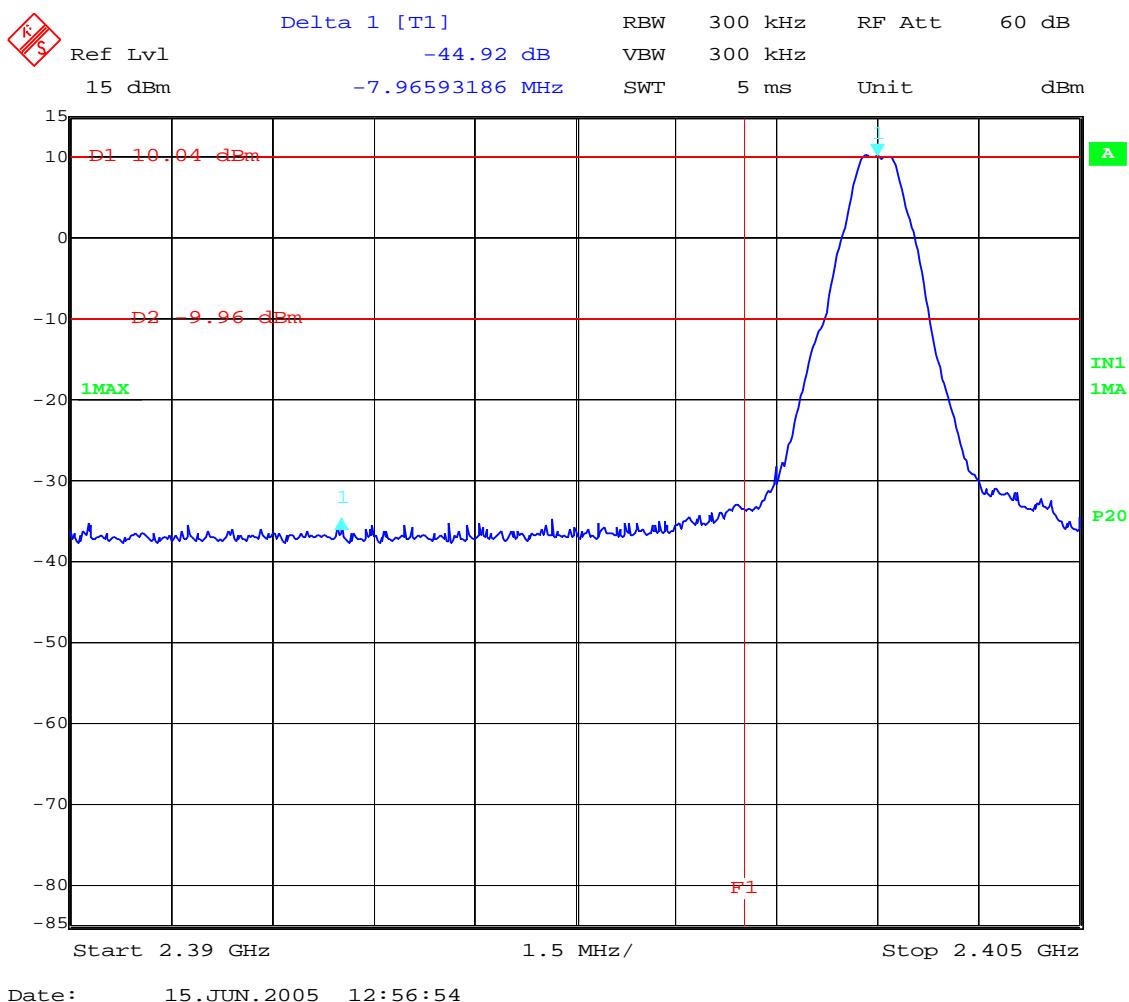

Verdict: PASS

Report No: 22281RET.101		Page: 22 of 52
Date: 2005-06-23 FET45_00.DOC		Annex A


2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

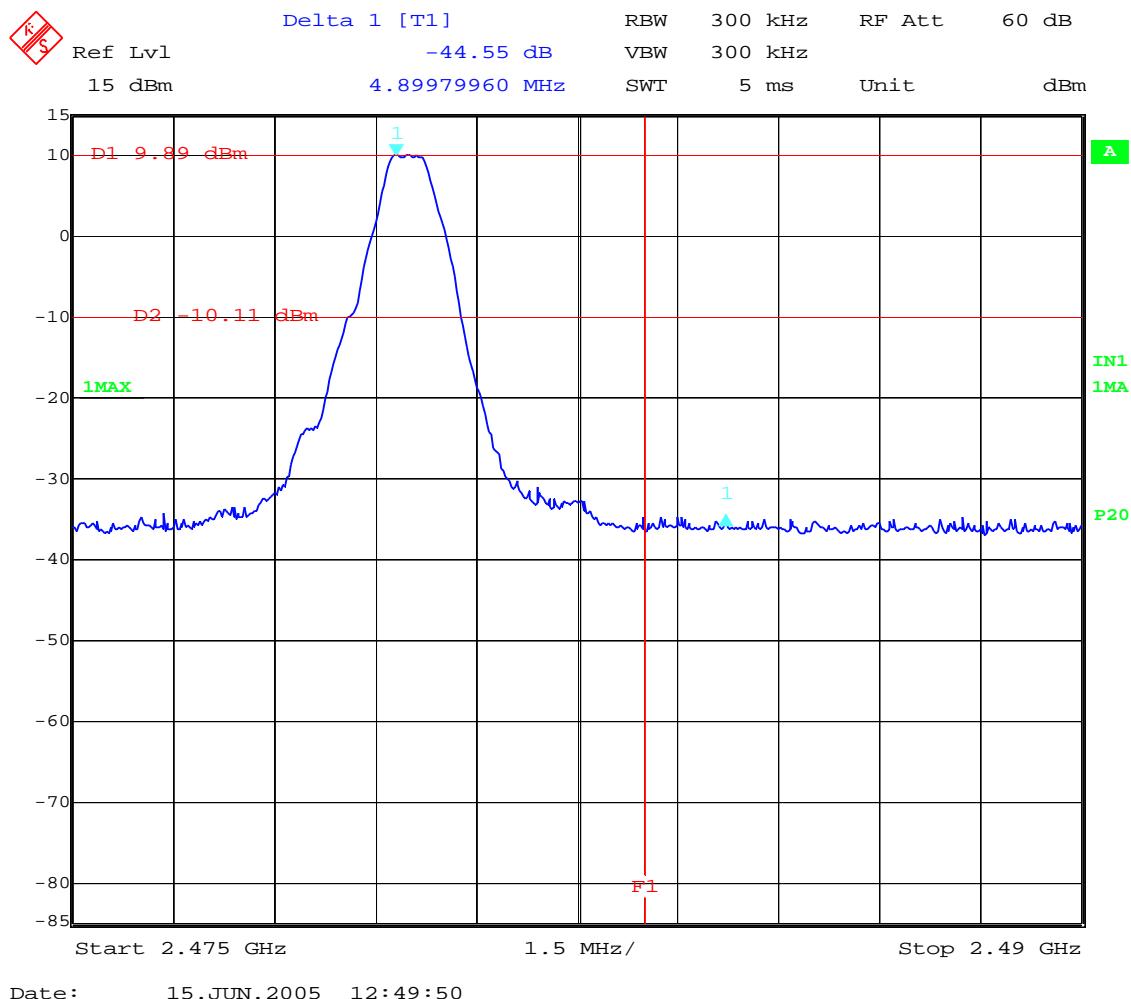

Verdict: PASS

Report No: 22281RET.101		Page: 23 of 52
Date: 2005-06-23		Annex A


3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

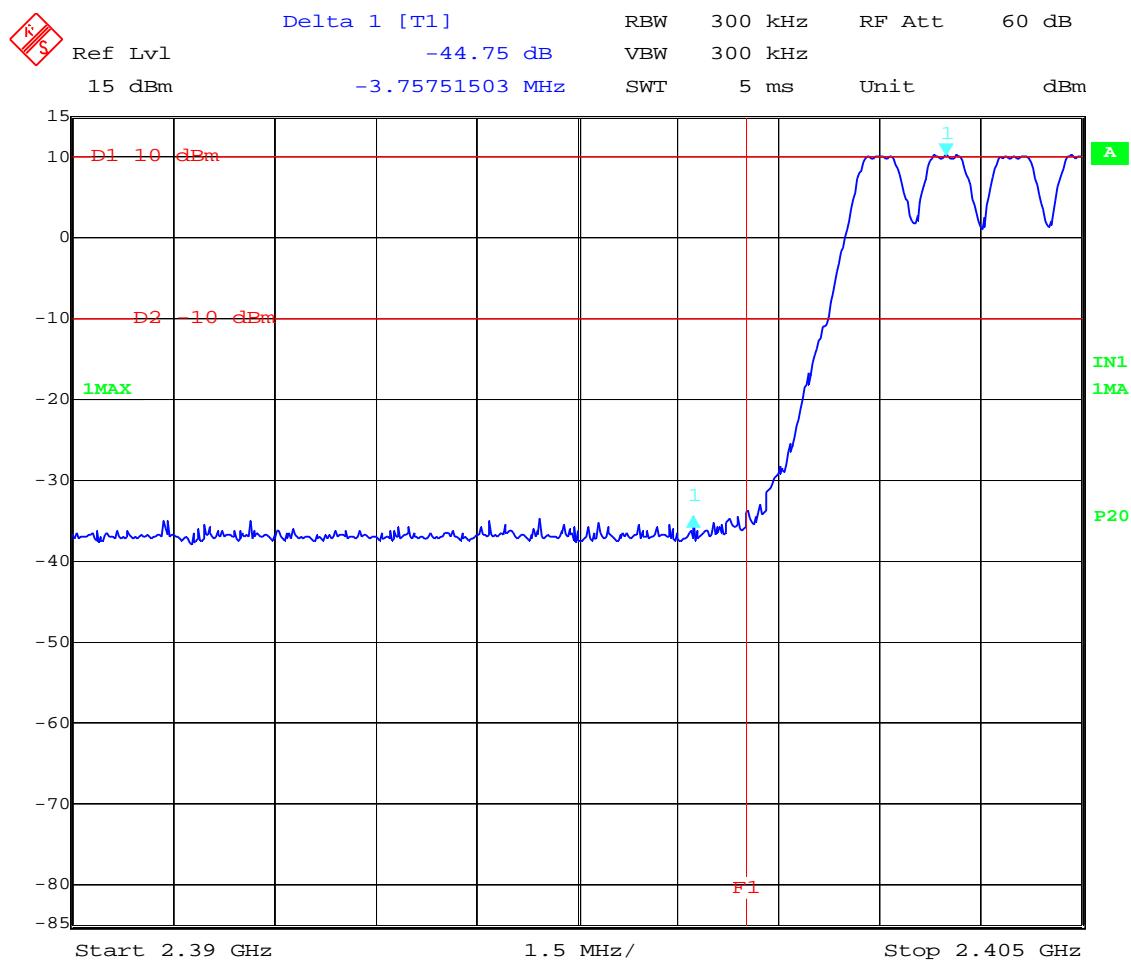

Verdict: PASS

Report No: 22281RET.101		Page: 24 of 52
Date: 2005-06-23		Annex A

4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

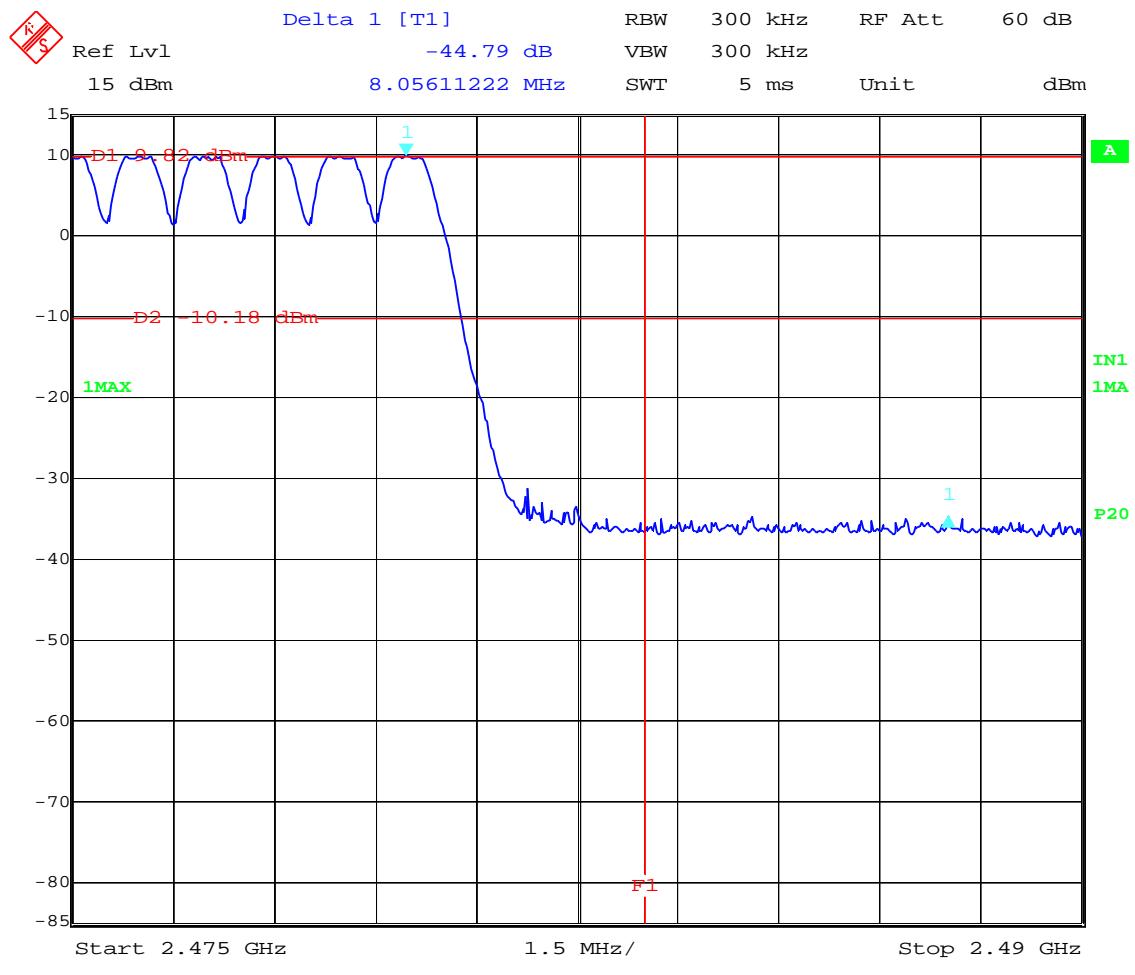

Verdict: PASS

Report No: 22281RET.101		Page: 25 of 52
Date: 2005-06-23		Annex A


Section 15.247 Subclause (d). Emission limitations conducted (Transmitter)

SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

RESULTS:

1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

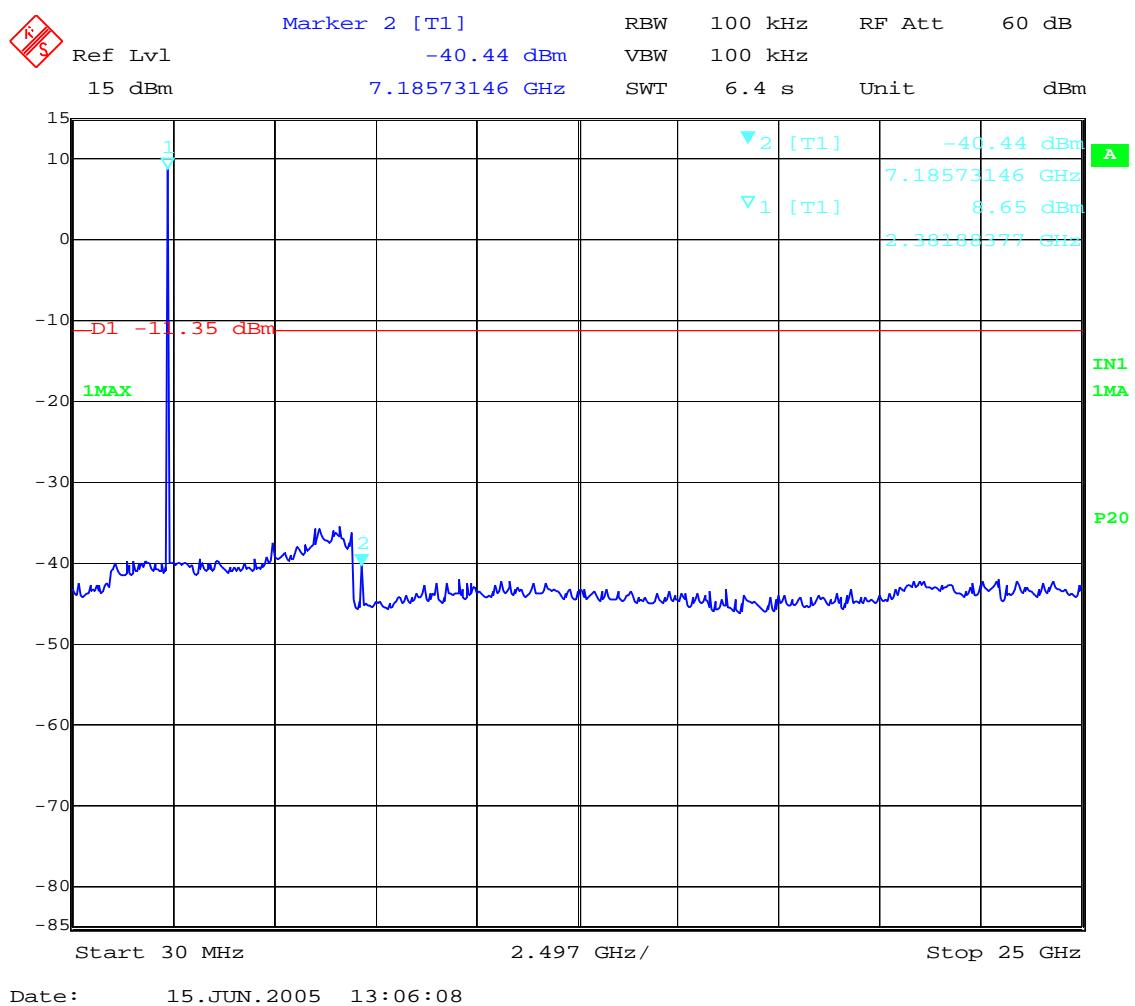


Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Report No: 22281RET.101		Page: 26 of 52
Date: 2005-06-23		Annex A


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

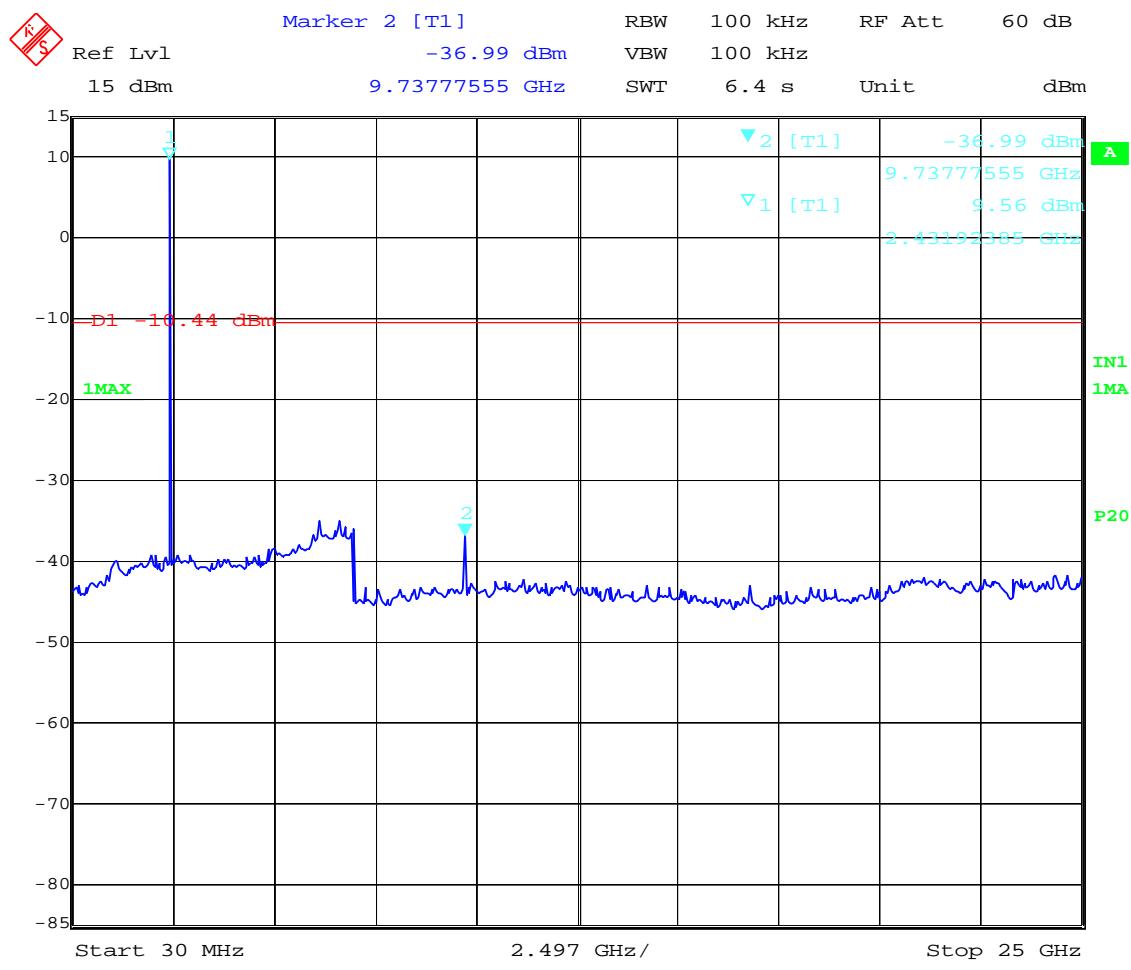

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

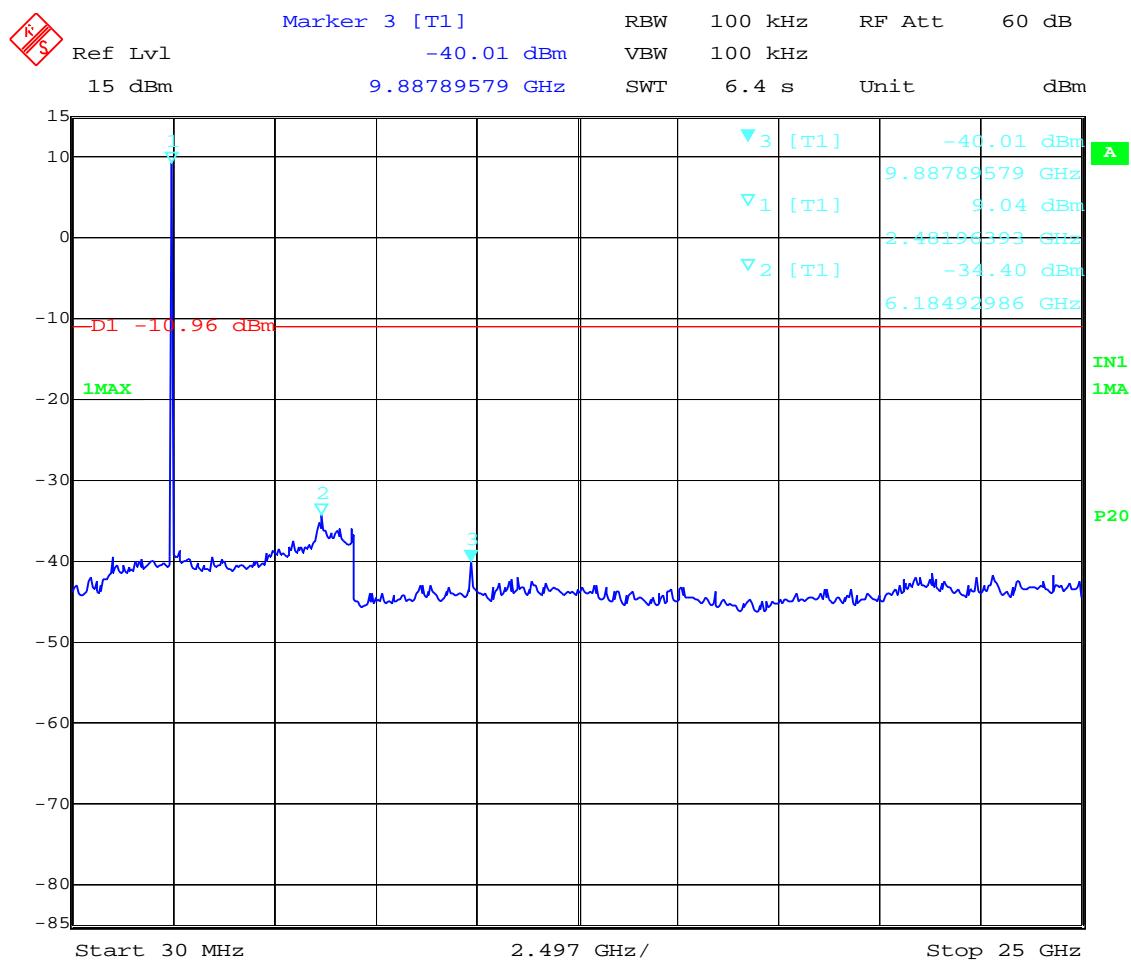

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Report No: 22281RET.101		Page: 28 of 52
Date: 2005-06-23		Annex A

Section 15.247 Subclause (d). Emission limitations radiated (Transmitter)**SPECIFICATION**

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The equipment transmits continuously in the selected channel so it is not necessary a duty cycle correction factor.

Report No: 22281RET.101		Page: 29 of 52
Date: 2005-06-23		Annex A

1. CHANNEL: LOWEST (2402 MHz).

Frequency range 30 MHz-1000 MHz. Spurious levels (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Uncertainty (dB)
222.4449	V	Quasi-peak	20.69	±3.8 dB
239.9398	V	Quasi-peak	23.96	±3.8 dB
255.4909	V	Quasi-peak	28.74	±3.8 dB
288.5371	V	Quasi-peak	25.37	±3.8 dB
354.6293	V	Quasi-peak	27.15	±3.8 dB
447.9359	V	Quasi-peak	27.64	±3.8 dB

Frequency range 1 GHz-25 GHz.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
4804.3100	V	Peak	53.05	± 4.0
4804.3100	V	Average	31.82	± 4.0
7206.6300	V	Peak	61.84	± 4.0
7206.6300	V	Average	39.44	± 4.0
9608.5100	V	Peak	51.99	± 4.0
9608.5100	V	Average	35.68	± 4.0

Additionally, no spurious signals were found inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz.

Report No: 22281RET.101		Page: 30 of 52
Date: 2005-06-23		Annex A

2. CHANNEL: MIDDLE (2441 MHz).

Frequency range 30 MHz-1000 MHz. Spurious levels (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Uncertainty (dB)
222.4449	V	Quasi-peak	21.96	±3.8 dB
239.9399	V	Quasi-peak	26.02	±3.8 dB
255.4910	V	Quasi-peak	30.93	±3.8 dB
263.2665	V	Quasi-peak	24.18	±3.8 dB
286.5932	V	Quasi-peak	26.85	±3.8 dB
319.6393	V	Quasi-peak	28.39	±3.8 dB
350.7415	V	Quasi-peak	26.14	±3.8 dB
447.9359	V	Quasi-peak	27.50	±3.8 dB

Frequency range 1 GHz-25 GHz.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
4888.2120	V	Peak	49.91	± 4.0
4888.2120	V	Average	31.02	± 4.0
7323.0500	V	Peak	63.37	± 4.0
7323.0500	V	Average	40.69	± 4.0
9762.1000	V	Peak	57.45	± 4.0
9762.1000	V	Average	39.52	± 4.0

Additionally, no spurious signals were found inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz.

Report No: 22281RET.101		Page: 31 of 52
Date: 2005-06-23		Annex A

3. CHANNEL: HIGHEST (2480 MHz).**Frequency range 30 MHz-1000 MHz. Spurious levels (radiated) closest to limit.**

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Uncertainty (dB)
224.3888	V	Quasi-peak	21.99	±3.8 dB
239.9339	V	Quasi-peak	23.49	±3.8 dB
255.4910	V	Quasi-peak	29.51	±3.8 dB
286.5932	V	Quasi-peak	25.39	±3.8 dB
352.6854	V	Quasi-peak	26.54	±3.8 dB
447.9359	V	Quasi-peak	28.37	±3.8 dB

Frequency range 1 GHz-25 GHz.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
4960.4400	V	Peak	50.87	± 4.0
4960.4400	V	Average	32.46	± 4.0
7440.0800	V	Peak	66.13	± 4.0
7440.0800	V	Average	42.79	± 4.0
9919.200	V	Peak	61.28	± 4.0
9919.200	V	Average	39.29	± 4.0


Additionally, no spurious signals were found inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz.

Verdict: PASS

Report No: 22281RET.101		Page: 32 of 52
Date: 2005-06-23		Annex A

FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: LOWEST (2402 MHz).

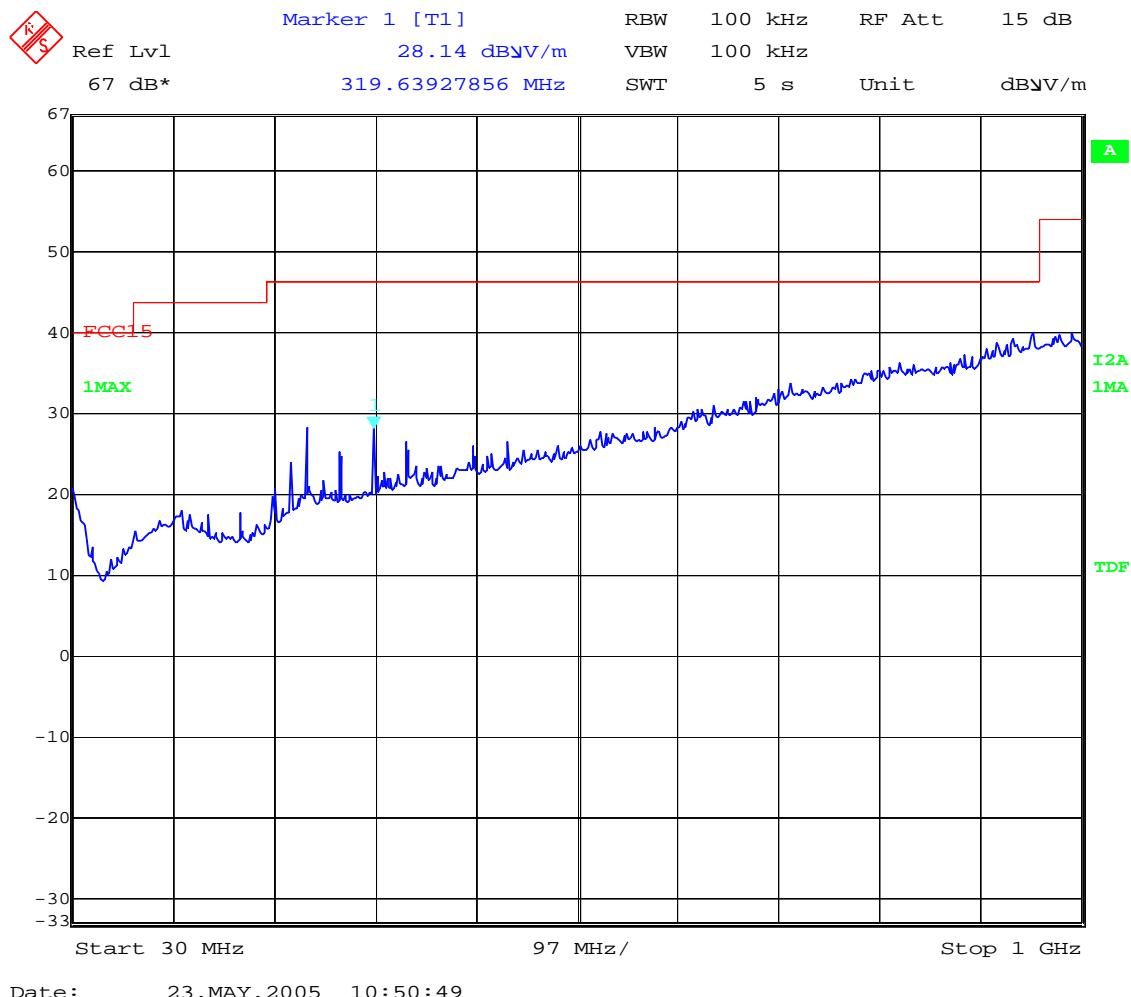
Report No:
22281RET.101

Page: 33 of 52

Date: 2005-06-23

Annex A


CHANNEL: MIDDLE (2441 MHz).

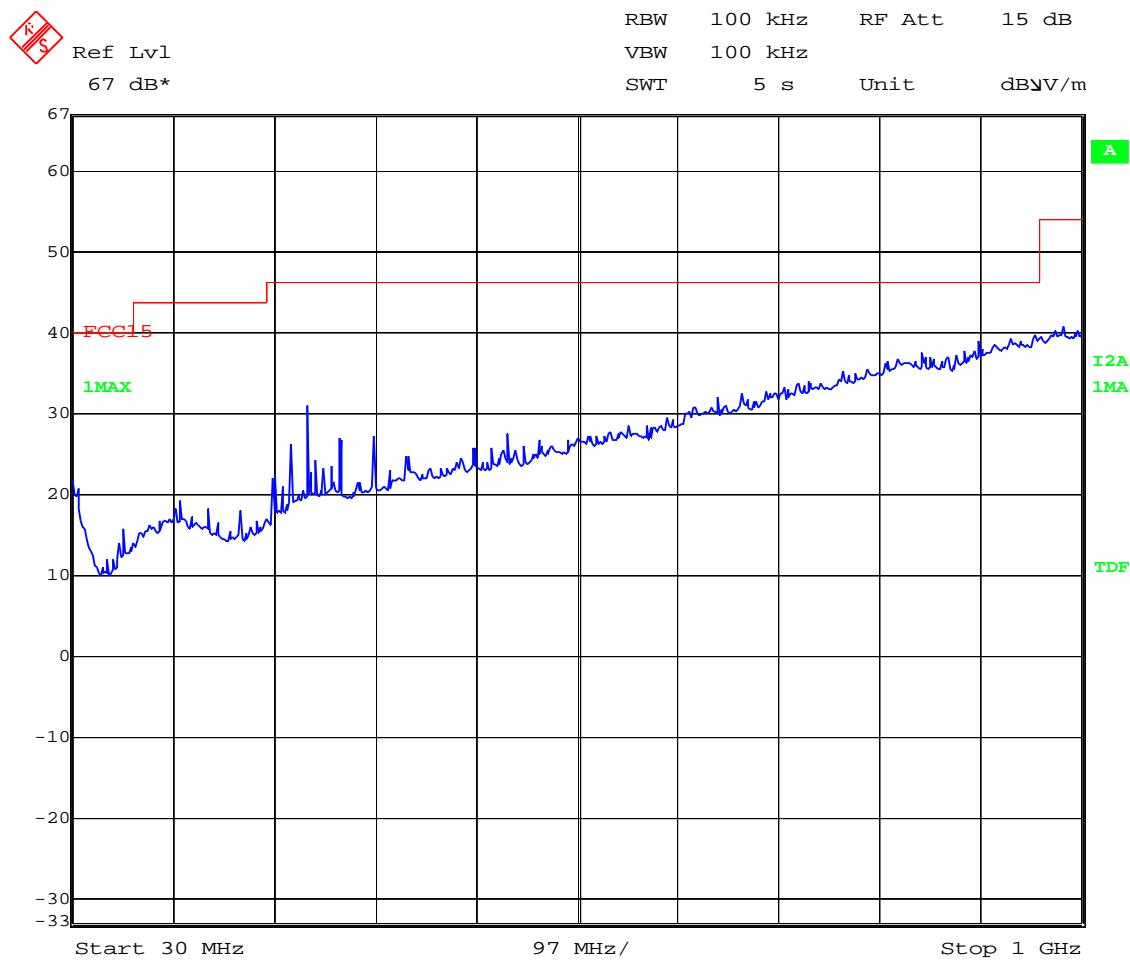

Date: 23.MAY.2005 09:51:37

Report No: 22281RET.101		Page: 34 of 52
Date: 2005-06-23		Annex A

CHANNEL: HIGHEST (2480 MHz).

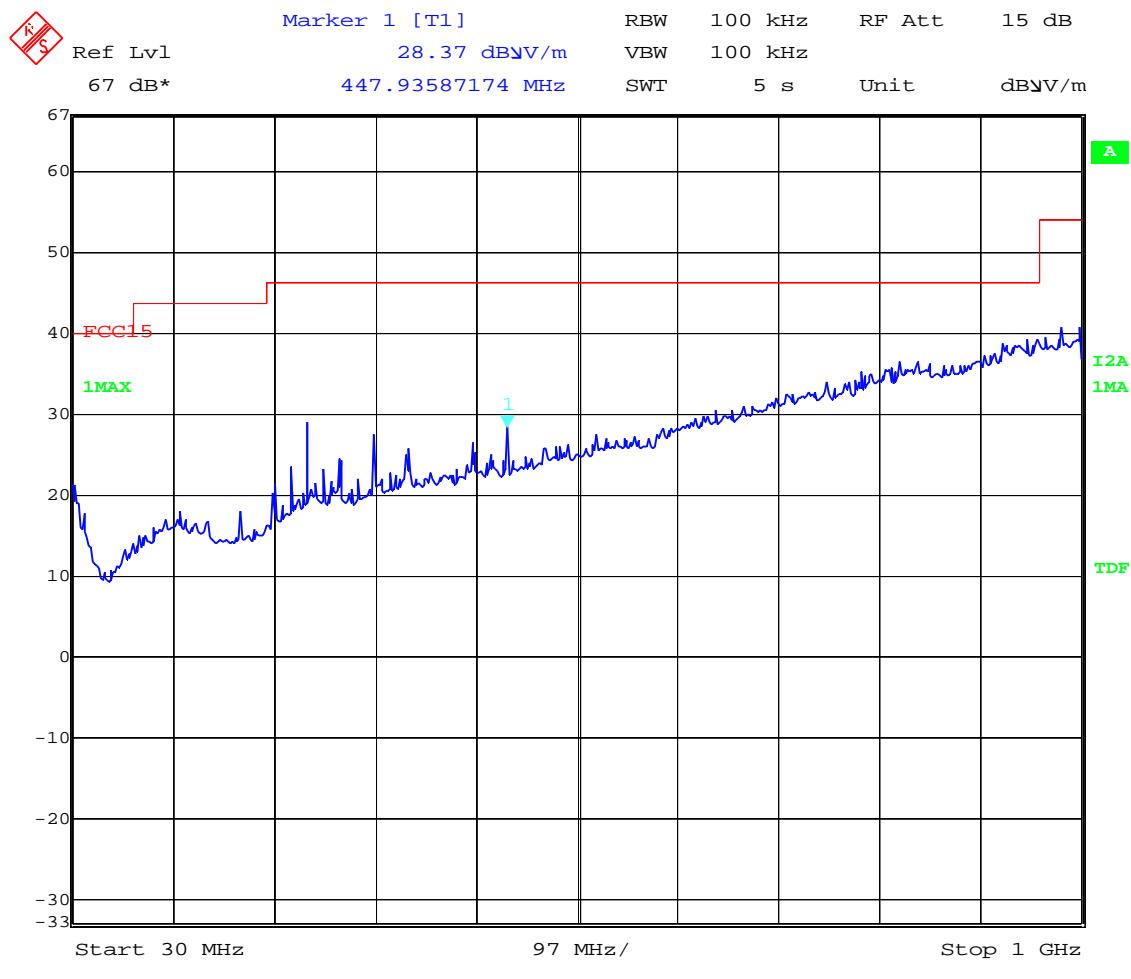Report No:
22281RET.101


Page: 35 of 52

Date: 2005-06-23

Annex A


FREQUENCY RANGE 1 GHz to 2.9 GHz.

CHANNEL: Lowest (2402 MHz).

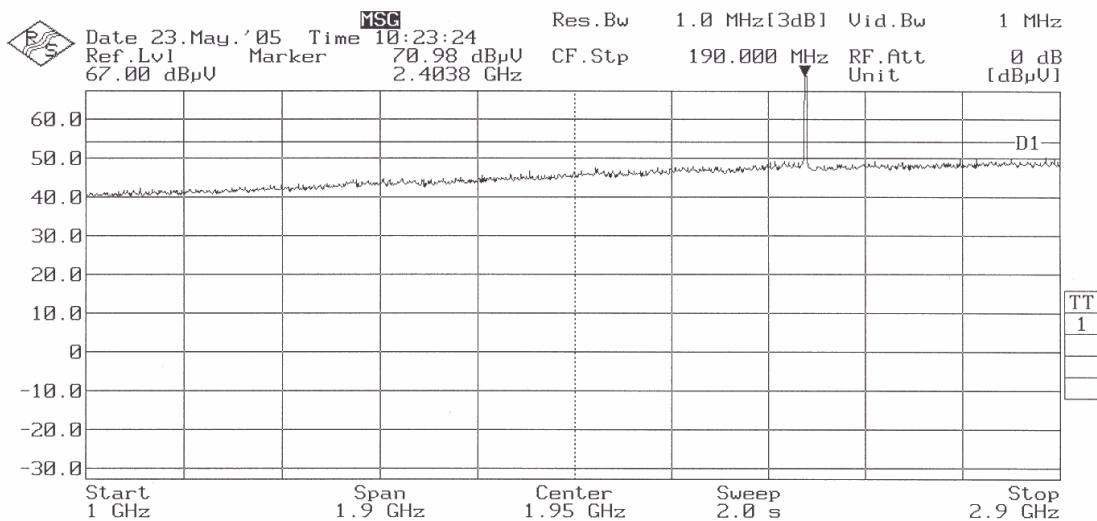


Note: The peak above the limit is the carrier frequency.

CHANNEL: Middle (2441 MHz).

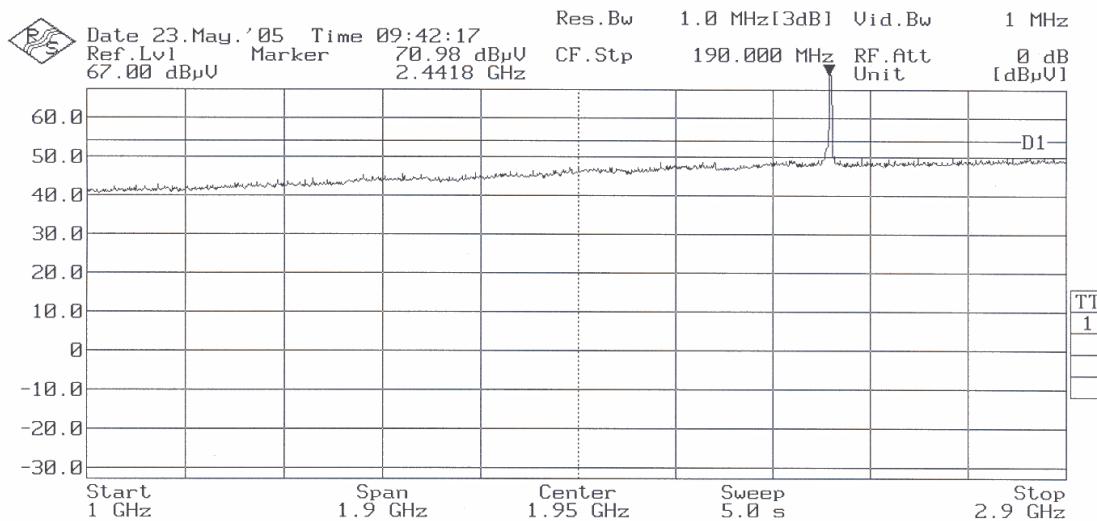

Note: The peak above the limit is the carrier frequency.

Report No: 22281RET.101		Page: 36 of 52
Date: 2005-06-23		Annex A

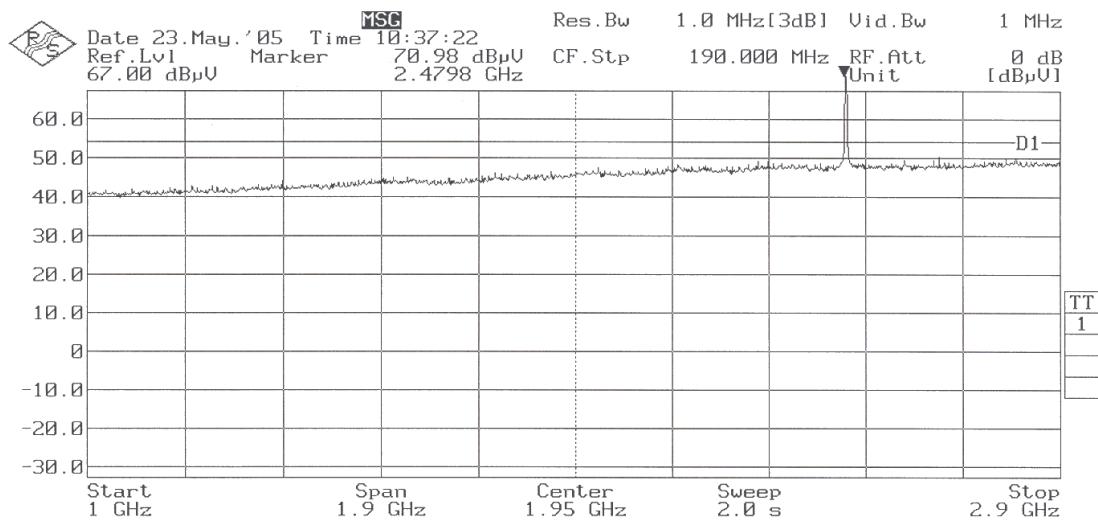
CHANNEL: Highest (2480 MHz).

Note: The peak above the limit is the carrier frequency.


Report No: 22281RET.101		Page: 37 of 52
Date: 2005-06-23		Annex A

FREQUENCY RANGE 2.9 GHz to 12.75 GHz.


CHANNEL: Lowest (2402 MHz).

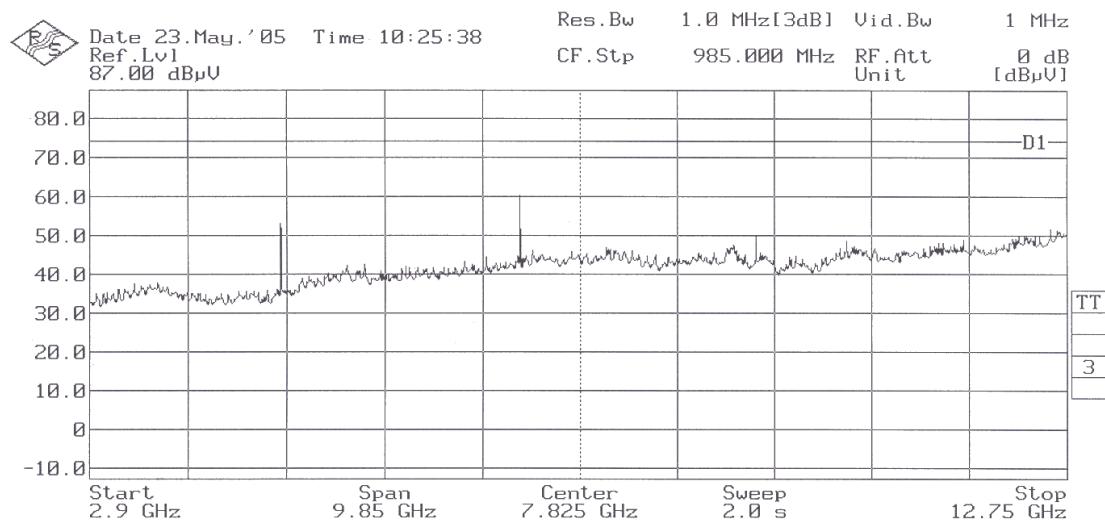

CHANNEL: Middle (2441 MHz).

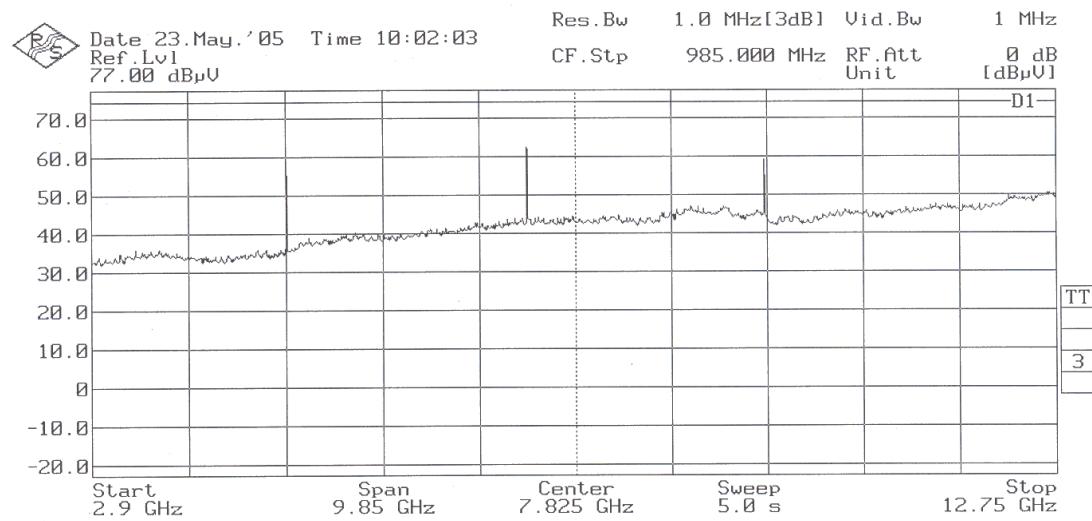


Report No: 22281RET.101		Page: 38 of 52
Date: 2005-06-23		Annex A

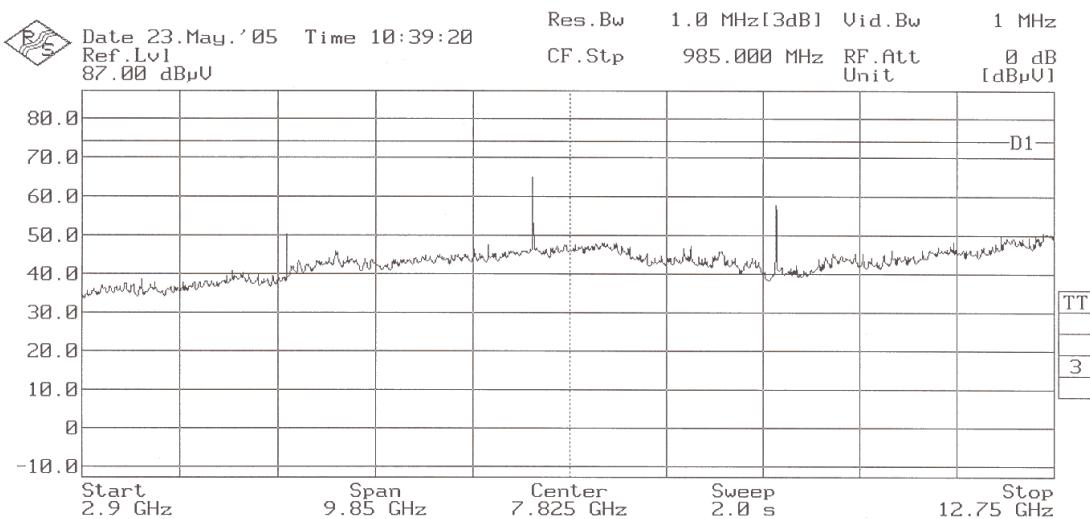CHANNEL: Highest (2480 MHz).

Report No: 22281RET.101		Page: 39 of 52
Date: 2005-06-23		Annex A


FREQUENCY RANGE 12.75 GHz to 18 GHz.

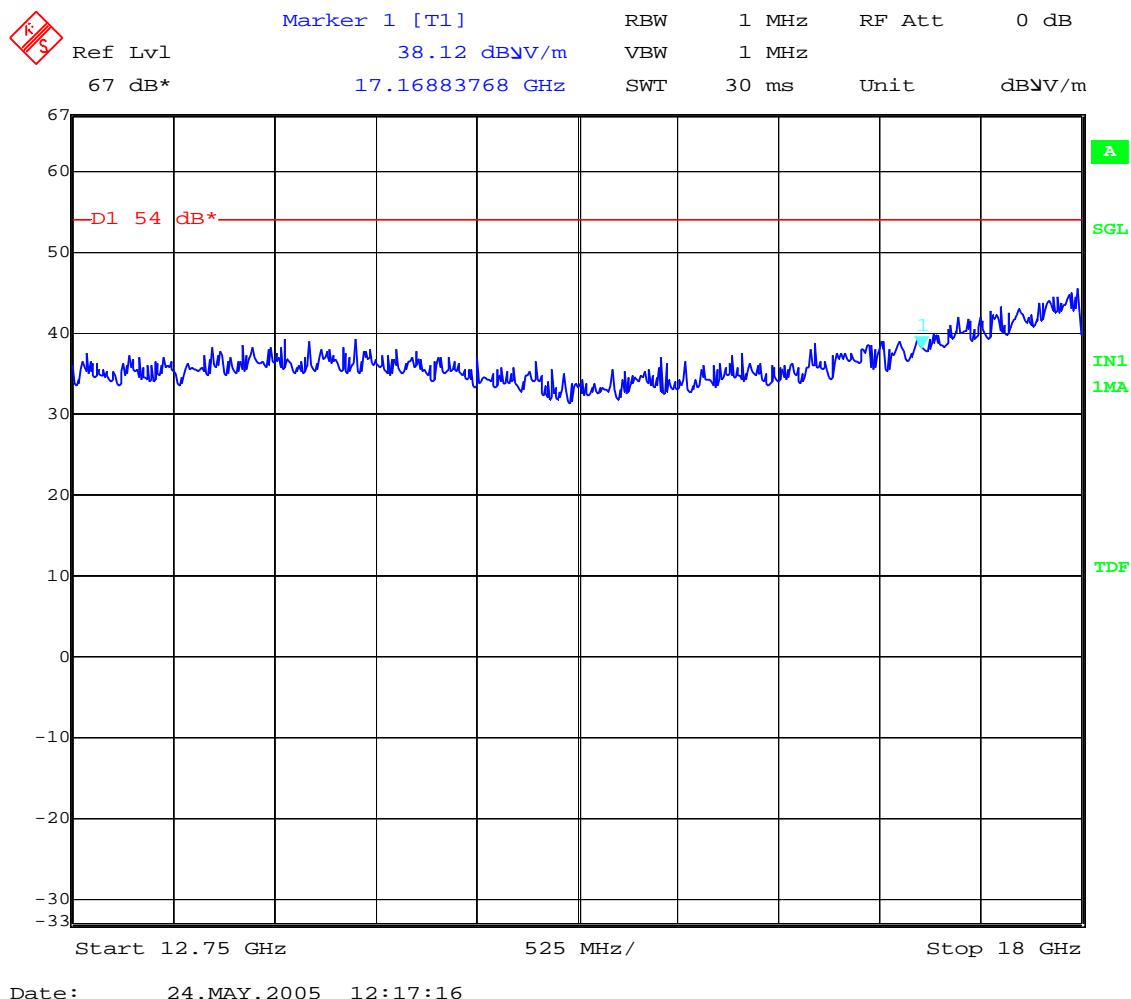

(This plot is valid for all three channels).

Report No: 22281RET.101		Page: 40 of 52
Date: 2005-06-23		Annex A

FREQUENCY RANGE 18 GHz to 25 GHz.

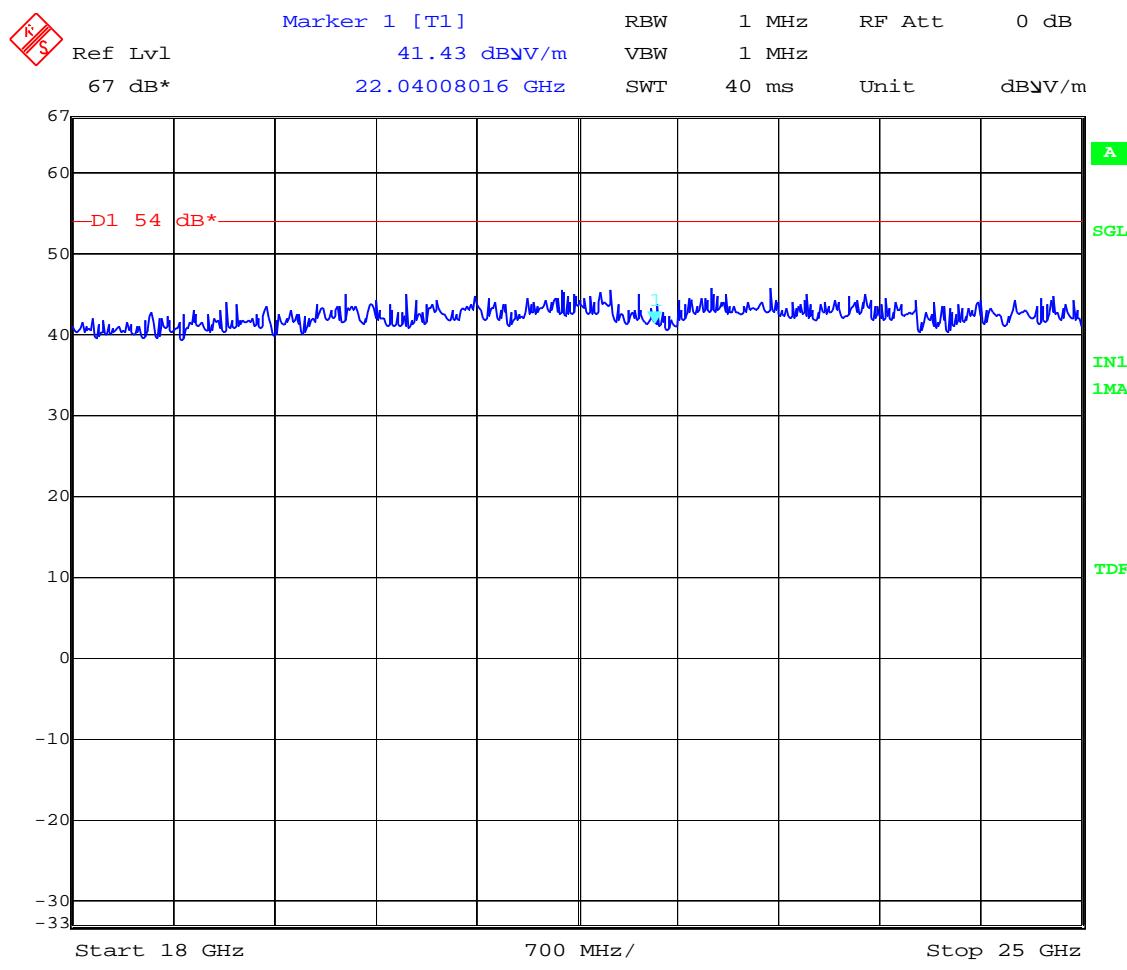

(This plot is valid for all three channels).

Report No: 22281RET.101		Page: 41 of 52
Date: 2005-06-23		Annex A

Section 15.109. Receiver spurious radiation

SPECIFICATION

The field strength shall not exceed the following values:

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Report No: 22281RET.101		Page: 42 of 52
Date: 2005-06-23 FET45_00.DOC		Annex A

Frequency range 30 MHz-1000 MHz. Spurious levels (radiated) closest to limit.

All emissions inside this range do not depend on the receiving channel selected in the equipment under test.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Uncertainty (dB)
224.3888	V	Quasi-peak	22.83	± 3.8 dB
239.9399	V	Quasi-peak	26.05	± 3.8 dB
255.4910	V	Quasi-peak	31.17	± 3.8 dB
319.6393	V	Quasi-peak	28.19	± 3.8 dB
416.8337	V	Quasi-peak	29.16	± 3.8 dB

Frequency range 1 GHz-25 GHz.


No spurious signals were found in all the range.

Additionally, no spurious signals were found inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz.

Verdict: PASS.

Report No: 22281RET.101		Page: 43 of 52
Date: 2005-06-23		Annex A

FREQUENCY RANGE 30 MHz-1000 MHz.

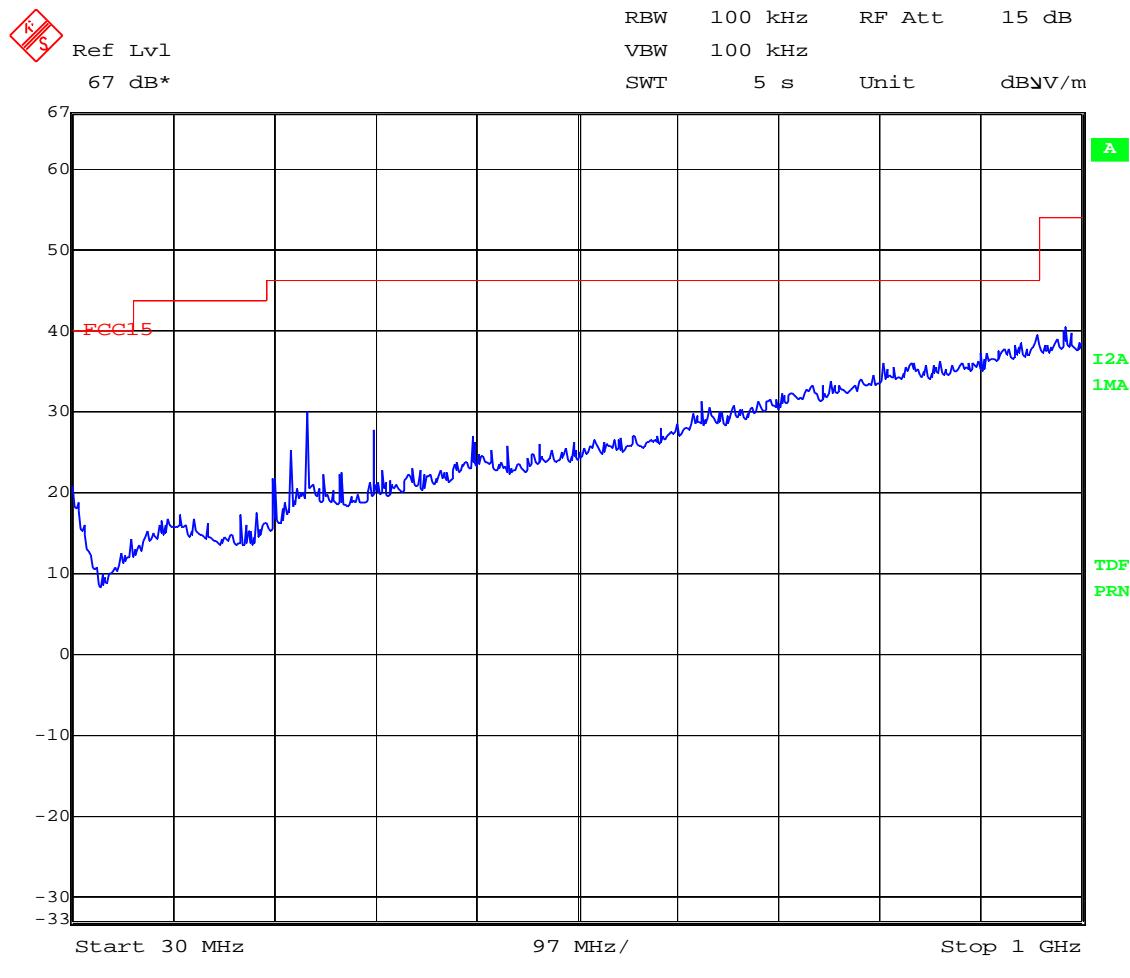

(This plot is valid for all three channels).


Report No:
22281RET.101

Page: 44 of 52

Date: 2005-06-23

Annex A


FREQUENCY RANGE 1 GHz-12.75 GHz.

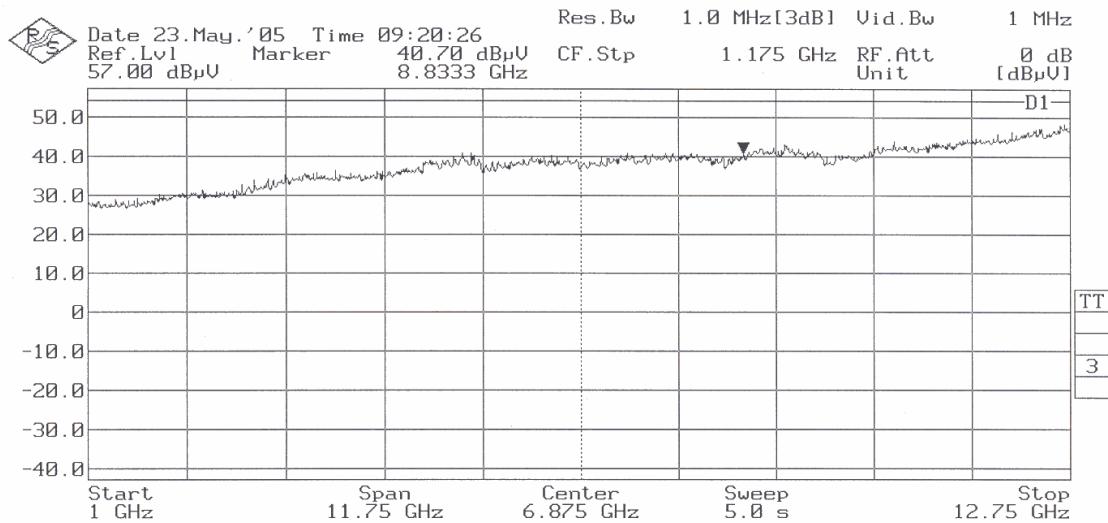

(This plot is valid for all three channels).

Report No: 22281RET.101		Page: 45 of 52
Date: 2005-06-23		Annex A


FREQUENCY RANGE 12.75 GHz-18 GHz.

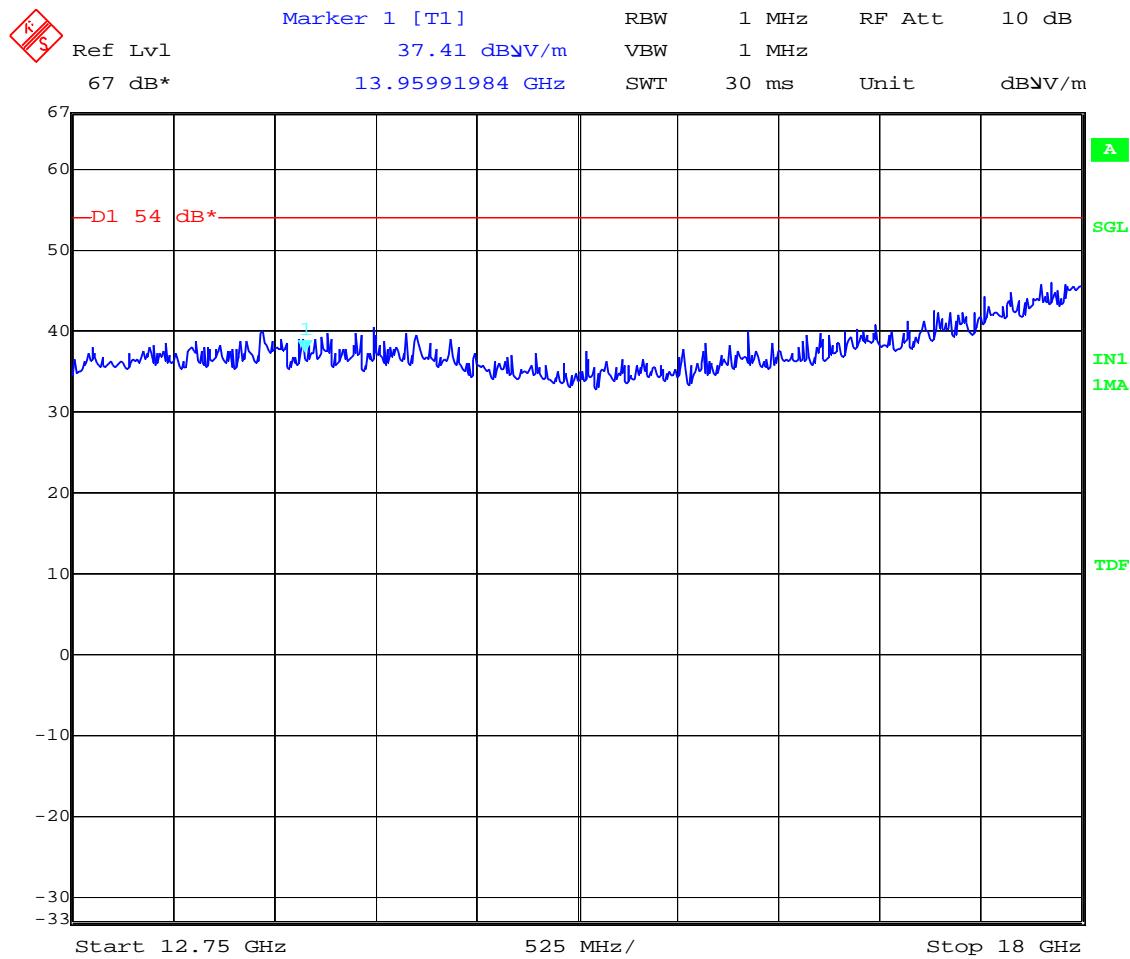

(This plot is valid for all three channels).

Report No: 22281RET.101		Page: 46 of 52
Date: 2005-06-23		Annex A

FREQUENCY RANGE 18 GHz-25 GHz.

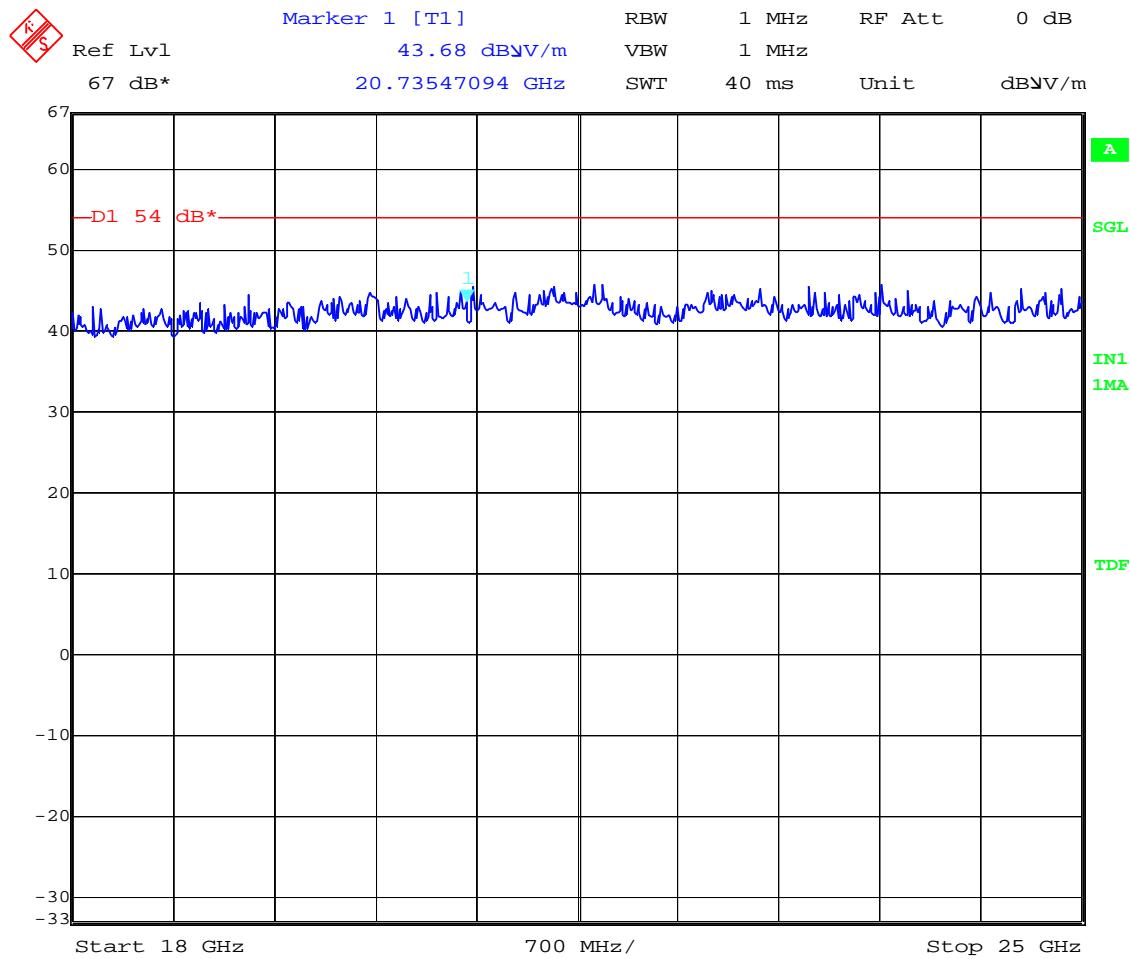

(This plot is valid for all three channels).

Report No: 22281RET.101		Page: 47 of 52
Date: 2005-06-23		Annex A

Section 15.207. Continuous Conducted Emission

SPECIFICATION

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table:

Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0,15 to 0,5	66-56	56-46
0,5 to 5	56	46
5 to 30	60	50

OPERATING MODES OF EUT

Different tested operating modes (OM)

- OM#01: EUT ON. Stand by. Charging batteries. Linked to realise read of the bar code.
- OM#03: EUT ON. Tx continue mode by serial port PC.

TEST RESULTS

CCmmnnxx: CC, Conduction condition^o; mm: sample number; nn: operation mode; xx: wire.

On the sample S/01:

- OM#01.

CDmmnnxx	Description	Result
CC01010N	Interference voltage on Neutral wire	PASS
CC0101L1	Interference voltage on phase wire	PASS

On the sample S/02:

- OM#03.

CDmmnnxx	Description	Result
CC02030N	Interference voltage on Neutral wire	PASS
CC0203L1	Interference voltage on phase wire	PASS

Report No: 22281RET.101		Page: 48 of 52
Date: 2005-06-23		Annex A


Continuous conducted emission: CC01010N (Peak and average)

EMC32 Report

Test Information

Proyecto: 22281IEM.001
Empresa: BARACODA WIRELESS TECHNOLOGY
Muestra: M/01
Modo operacion: MO#01
Fecha: 2005-05-27 16:25
Setup: EMI conducted
Mode: EUT ON. Stand by mode. Charging mode. Neutral noise.

EC FCC Clase B ESIB26 CC

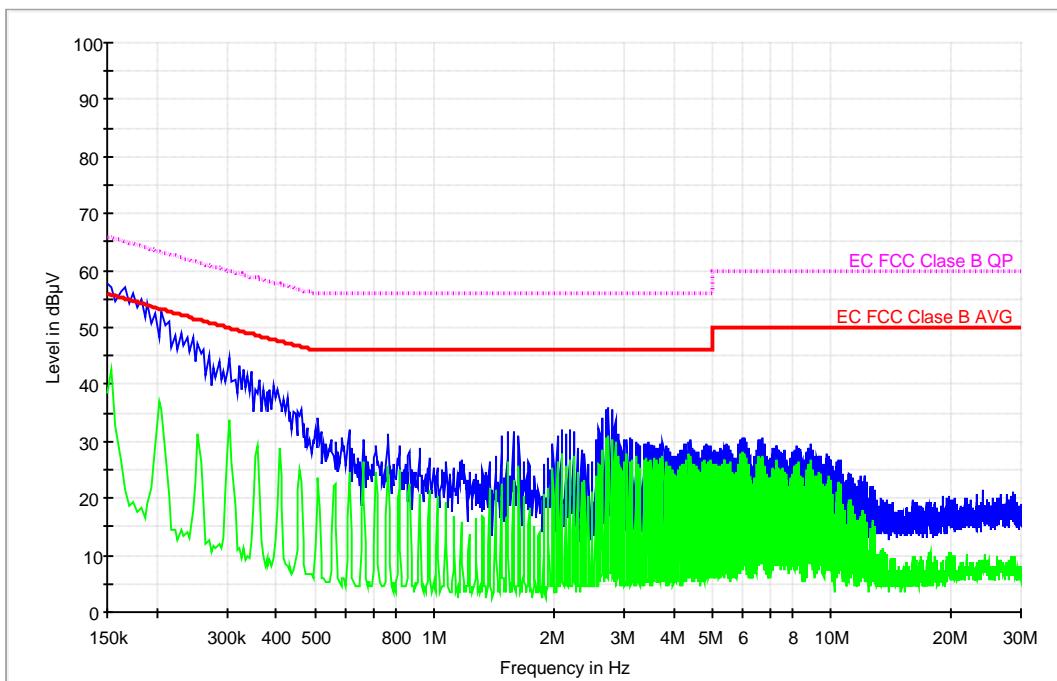

Acceptance Analysis

Frequency (MHz)	MaxPeak-ClearWrite (dB μ V)	Average-ClearWrite (dB μ V)
0.150000	57.7	38.4
2.750000	36.0	29.0

Report No: 22281RET.101		Page: 49 of 52
Date: 2005-06-23		Annex A


Continuous conducted emission: CC0101L1 (Peak and average)

EMC32 Report

Test Information

Proyecto: 22281IEM.001
Empresa: BARACODA WIRELESS TECHNOLOGY
Muestra: M/01
Modo operacion: MO#01
Fecha: 2005-05-27 16:29
Setup: EMI conducted
Mode: EUT ON. Stand by mode. Charging batteries. Phase noise.

EC FCC Clase B ESIB26 CC

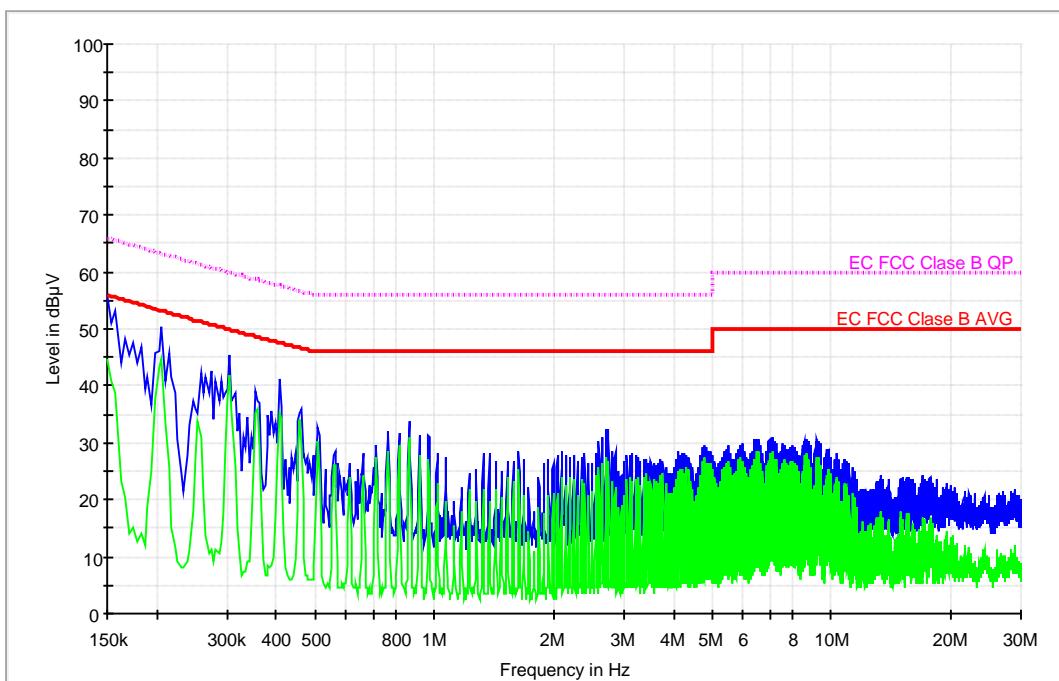

Acceptance Analysis

Frequency (MHz)	MaxPeak-ClearWrite (dB μ V)	Average-ClearWrite (dB μ V)
0.150000	55.9	44.6
0.206000	50.3	44.7
0.274000	42.5	11.3
0.306000	45.4	42.0
0.354000	38.9	35.2
0.406000	41.1	35.3

Report No: 22281RET.101		Page: 50 of 52
Date: 2005-06-23		Annex A


Continuous conducted emission: CC02030N (Peak and average)

EMC32 Report

Test Information

Proyecto: 22281IEM.001
Empresa: BARACODA WIRELESS TECHNOLOGY
Muestra: M/02
Modo operacion: MO#03
Fecha: 2005-06-22 11:38
Setup: EMI conducted
Mode: EBP ON. Transmiting data continuosly. Neutral noise.

EC FCC Clase B ESIB26 CC

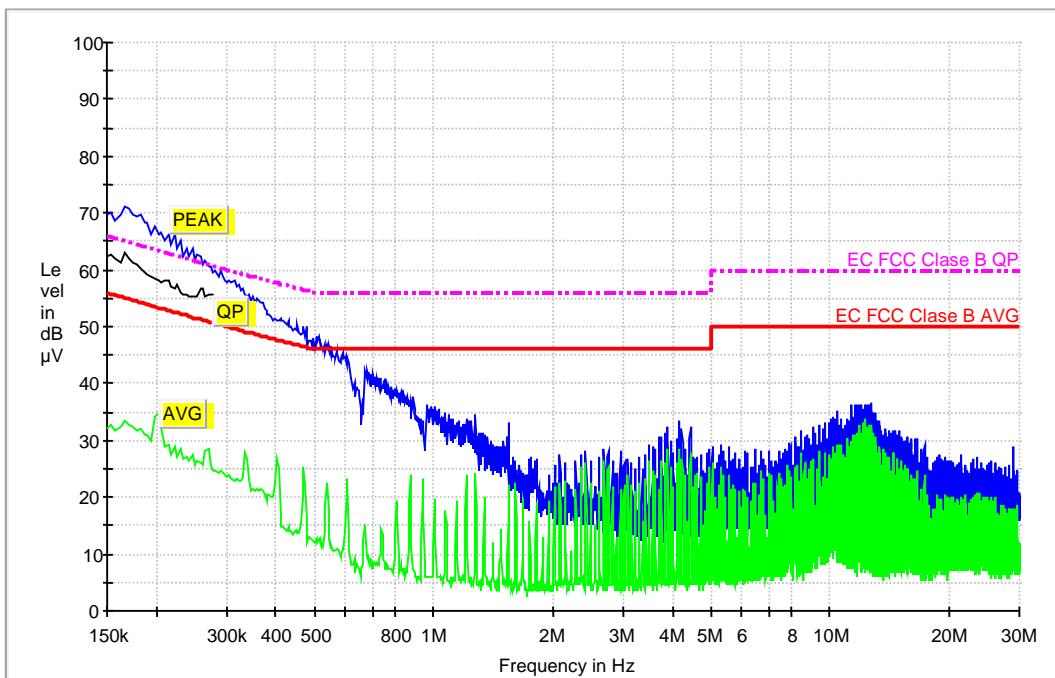


Continuous conducted emission: CC0203L1 (Peak and average)

EMC32 Report

Test Information

Proyecto: 22281iem.001
Empresa: BARACODA WIRELESS TECHNOLOGY
Muestra: M/02
Modo operacion: MO#03
Fecha: 2005-06-22 11:35
Setup: EMI conducted
Mode: EUT ON. Transmiting data continuosly. Phase noise.

EC FCC Clase B ESIB26 CC

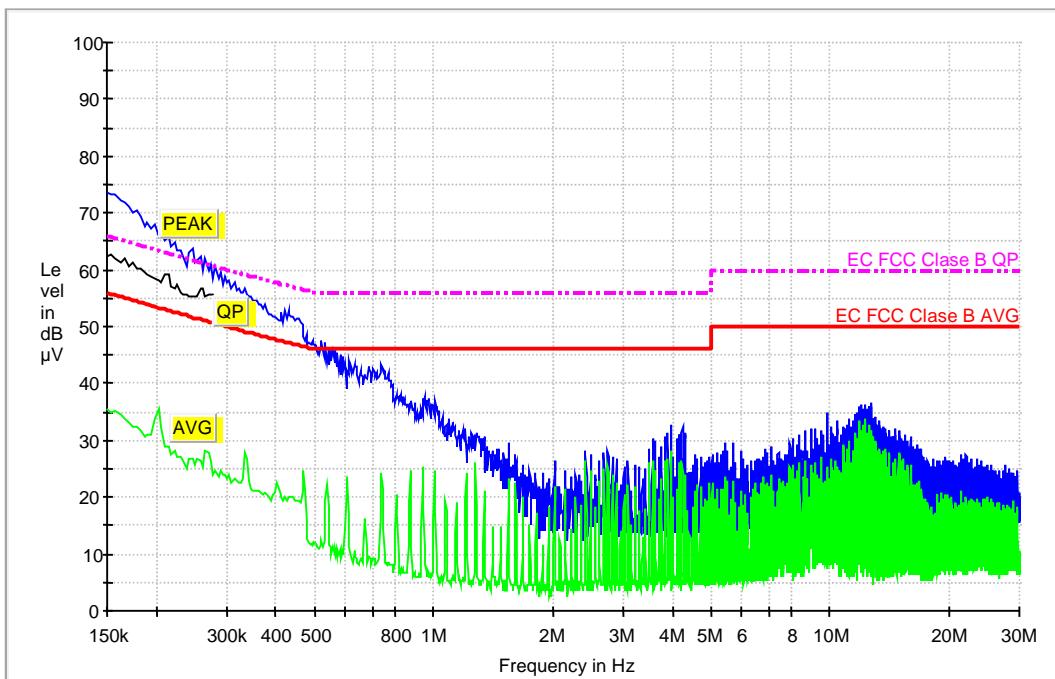

Report No:
22281RET.101

Date: 2005-06-23

FET45_00.DOC

Page: 52 of 52

Annex A

ANNEX B

PHOTOGRAPHS

(Number of photographs: 6)

Report No.: 22281RET.101

Report No.: 22281RET.101		Page: 1 of 7
Date: 2005-06-21		Annex B

1. Equipment (external view)



Report No.:	
22281RET.101	
Date: 2005-06-21	

Page: 2 of 7

Annex B

2. Equipment for conducted measurements.




Report No.: 22281RET.101		Page: 3 of 7
Date: 2005-06-21		Annex B

3. General test set-up for radiated measurements.




Report No.: 22281RET.101		Page: 4 of 7
Date: 2005-06-21		Annex B

4. Test set-up for radiated measurements below 1 GHz.

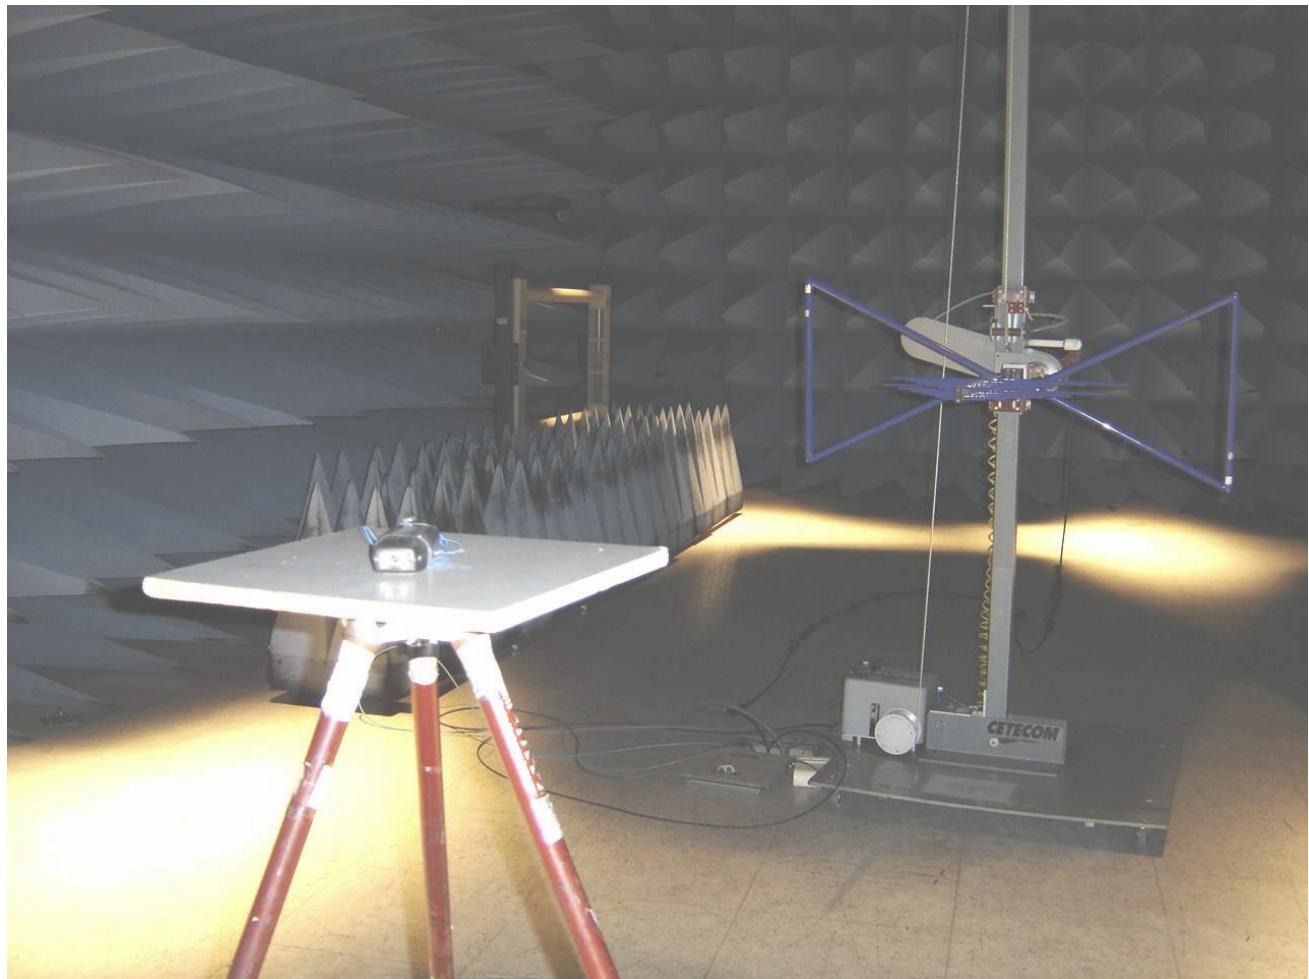


Report No.: 22281RET.101		Page: 5 of 7
Date: 2005-06-21		Annex B

5. Test set-up for radiated measurements above 1 GHz.

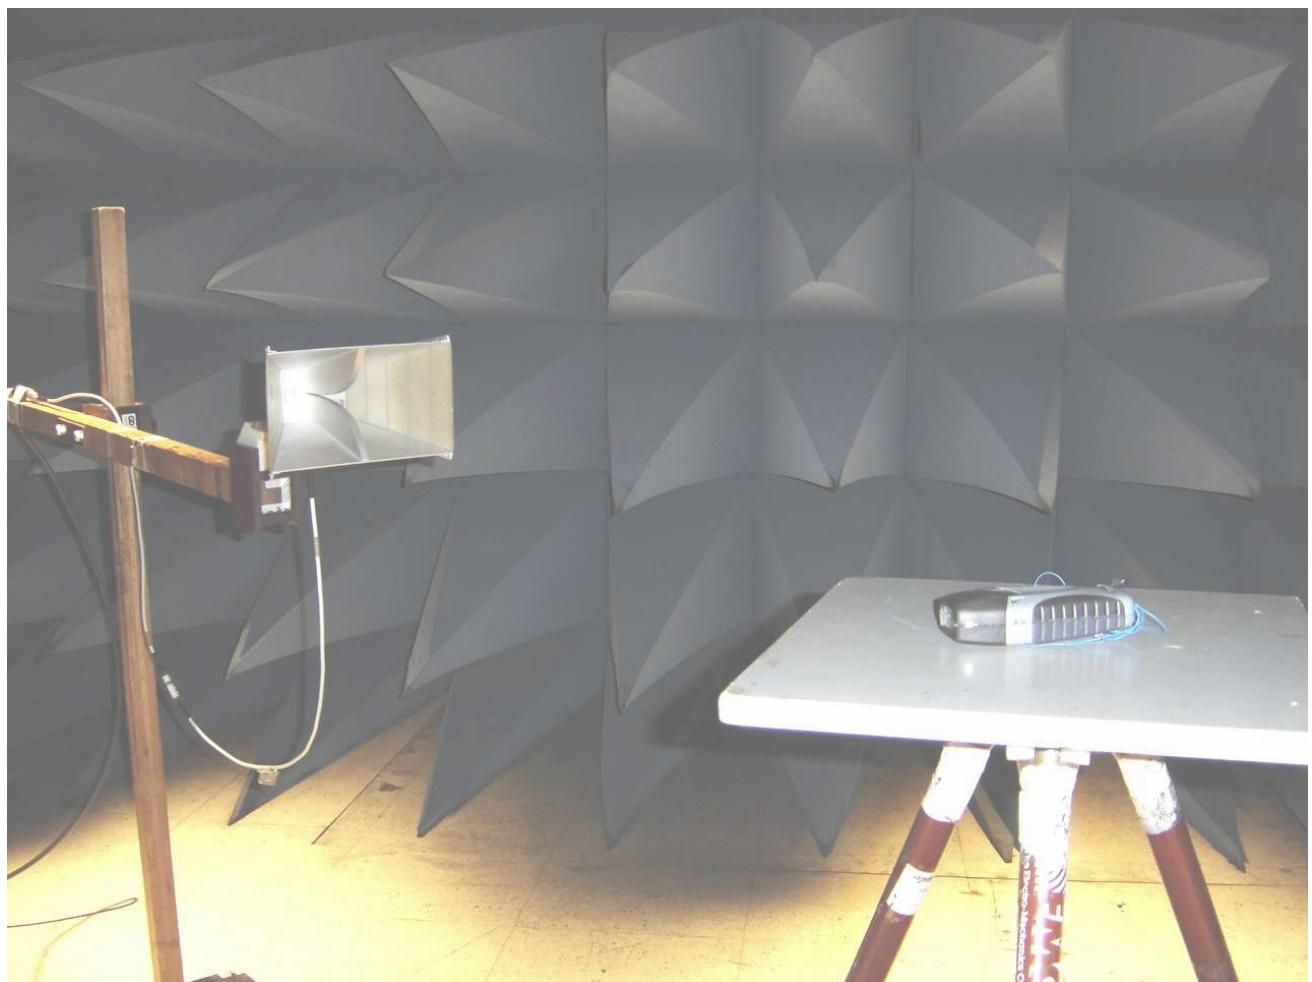

Report No.: 22281RET.101		Page: 6 of 7
Date: 2005-06-21		Annex B

6. Test set-up for RF conducted measurements.

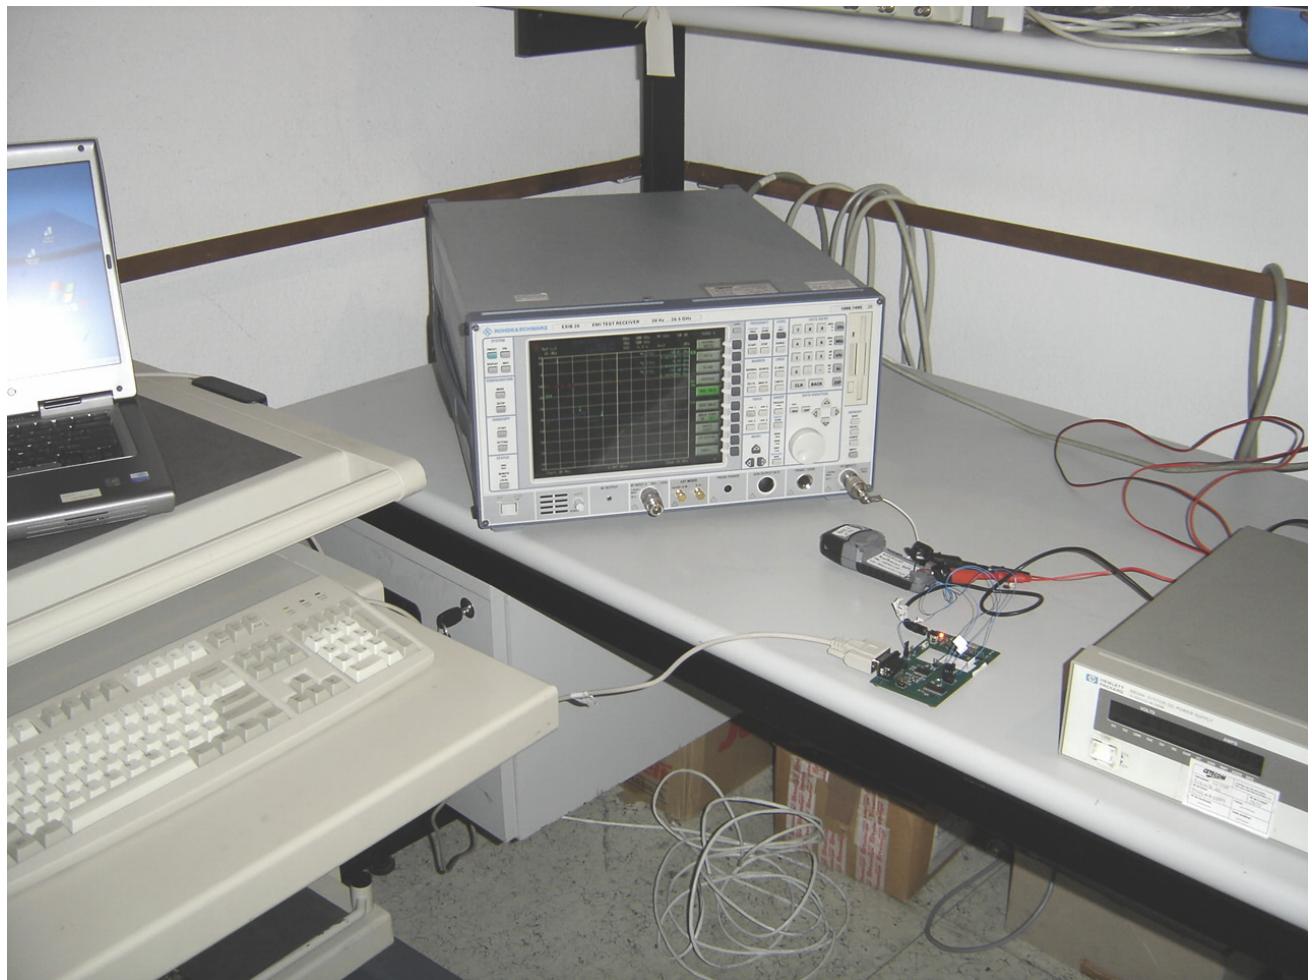

Report No.:
22281RET.101

Date: 2005-06-21

FET18_00.DOC

Page: 7 of 7

Annex B