

FCC LISTED, REGISTRATION NUMBER: 905266

**IC LISTED REGISTRATION NUMBER
IC 4621**

AT4 wireless, S.A.

Parque Tecnológico de Andalucía,
c/ Severo Ochoa nº 2
29590 Campanillas/ Málaga/ España
Tel. 952 61 91 00 - Fax 952 61 91 13
MÁLAGA, C.I.F. A29 507 456
Registro Mercantil de Málaga, Tomo 1169,
Libro 82, Folio 133, Hoja MA3729

TEST REPORT

REFERENCE STANDARD:

USA FCC Part 15.247, 15.207 and 15.109

NIE : 28384RET.002

Approved by : A. Llamas / RF Lab. Manager
(name / position & signature)

Elaboration date : 2009-06-10

Identification of item tested : BLUETOOTH BARCODE READER

Trademark : BARACODA

Model and/or type reference : BRR-L, BRR-LA, BRR-LE, BRR-FS, BRR-FE
BRRT

BDR-L, BDR-LA, BDR-FS, BDR-FE

Serial number : PROTOTYPE

Other identification of the product : Commercial name: ROADRUNNERS EVOLUTION / FCC ID: QSHAIRRNA (For models BRR-L, BRR-LA, BRR-LE, BRR-FS, BRR-FE)
Commercial name: TAGRUNNERS / FCC ID: QSHAIRRFI (For model BRRT)

Commercial name: DUALRUNNERS / FCC ID: QSHAIRRFI (For models BDR-L, BDR-LA, BDR-FS, BDR-FE)

HW version: 2.4 / SW version: 1.37 (for models BRR-L, BRR-LA, BRR-LE, BRR-FS, BRR-FE)

HW version: 3.1 / SW version: 1.37 (for models BRRT, BDR-L, BDR-LA, BDR-FS, BDR-FE)

Features : 3.7 V Rechargeable Li-ion battery, SPP, Bluetooth EDR

Description : BLUETOOTH BARCODE READER

Applicant : BARACODA

Address : 36 rue de Turin, 75008 Paris, FRANCE

CIF/NIF/Passport : 42876860000051

Contact person: Thierry Fortune

Telephone / Fax : +33 1 30 08 89 00

e-mail: : thierry.fortune@baracoda.com

Test samples supplier : Same as applicant

Manufacturer : Same as applicant

Test method requested	See Standard			
Standard	USA FCC Part 15.247: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.109: Receiver radiated emission. FCC part 15.247 and Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum System DA 00-705 Released March 30, 2000. USA FCC Part 15.207: Conducted limits.			
Test procedure	PEET034: Medidas radioeléctricas a equipos de radio de espectro ensanchado en la banda de 2,4 GHz. PEEM002: Medida de la emisión conducida según EN55022			
Non-standardized test method	N/A			
Used instrumentation	<u>Conducted Measurements</u>			
			Last Cal. date	Cal. due date
1.	Spectrum analyser Agilent PSA E4440A		2008/01	2010/01
2.	Spectrum analyser R&S ESU 40		2007/11	2009/11
3.	Bluetooth test set Anritsu MT8852A		N.A.	N.A.
4.	DC power supply R&S NGPE 40/40		2008/11	2011/11
5.	EMI Test Receiver R&S ESIB26		2007/08	2009/08
6.	Transient limiter. HP 11947A		2007/01	2010/01
7.	Line Impedance Stabilization Network (L.I.S.N.) R&S. ESH2-Z5		2008/01	2010/01
	<u>Radiated Measurements</u>			
			Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber IR 11. BS		N.A.	N.A.
2.	Control Chamber IR 12.BC		N.A.	N.A.
3.	Bilog antenna CHASE CBL6111		2009/03	2012/03
4.	Antenna mast EM 1072 NMT		N.A.	N.A.
5.	Rotating table EM 1084-4. ON		N.A.	N.A.
6.	Double-ridge Guide Horn antenna 1-18 GHz HP 11966E		2008/03	2011/03
7.	Double-ridge Guide Horn antenna 18-40 GHz Agilent 119665J		2008/09	2011/09
8.	EMI Test Receiver R&S ESIB26		2007/08	2009/08
9.	RF pre-amplifier Miteq JS4-12002600-30-5A.		2008/07	2010/07
10.	Multi Device Controller EMCO 2090		N.A.	N.A.
11.	Spectrum Analyzer R&S ESU40		2007/11	2009/11
12.	Spectrum Analyzer Agilent E4440A		2008/01	2010/01
13.	RF pre-amplifier Miteq AFS5-04001300-15-10P-6.		2008/07	2010/07
14.	RF pre-amplifier Schaffner CPA 9231.		2009/03	2011/03
15.	Bluetooth test set Anritsu MT8852A.		N.A.	N.A.
16.	Antenna tripod EMCO 11968C.		N.A.	N.A.

Report template No.: FDT08_11

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.

INDEX

Competences and guarantees	4
General conditions	4
Uncertainty	4
Usage of samples	5
Testing period	5
Environmental conditions	6
Summary	6
Remarks and comments	7
Testing verdicts	7
APPENDIX A: Test result	8
APPENDIX B: Measuring results for electromagnetic conducted emission	107
APPENDIX C: Photographs	113

Competences and guarantees

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 905266.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance programme for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the AT4 wireless internal document:

PODT000: Procedimiento para el cálculo de incertidumbres de medida.

Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements:

<u>Control Nº</u>	<u>Description</u>	<u>Model</u>	<u>Serial Nº</u>	<u>Date of reception</u>
28384/63	Bluetooth device with integral antenna	BRR-LE	Prototype	04/02/2009

Sample M/02 is composed of the following elements:

<u>Control Nº</u>	<u>Description</u>	<u>Model</u>	<u>Serial Nº</u>	<u>Date of reception</u>
28384/91	Bluetooth device with antenna connector	BRR-LE	Prototype	05/03/2009

Sample S/01 is composed of the following elements:

<u>Control Nº</u>	<u>Description</u>	<u>Model</u>	<u>Serial Nº</u>	<u>Date of reception</u>
28384/101	Bluetooth device with integral antenna	BRR-LE	Prototype	05/03/2009
28384/47	Power Supply	Iu15-2050050-wp	0751	25/11/2008

1. Sample M/01 has undergone following test(s).
Radiated tests indicated in appendix A.
2. Sample M/02 has undergone following test(s).
Conducted tests indicated in appendix A.
3. Samples S/01 has undergone the next test(s):
Continuous conducted emission, power leads, in appendix B

Testing period

The performed test started on 2009-02-09 and finished on 2009-03-27.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 19 °C Max. = 21 °C
Relative humidity	Min. = 50 % Max. = 61 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber (21 meters x 11 meters x 8 meters), the following limits were not exceeded during the test.

Temperature	Min. = 19 °C Max. = 21 °C
Relative humidity	Min. = 50 % Max. = 61 %
Air pressure	Min. = 1015 mbar Max. = 1015 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 23 °C Max. = 24 °C
Relative humidity	Min. = 51 % Max. = 52 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Summary

Considering the results of the performed test according to standard USA FCC Parts 15.247, 15.207 and 15.109, the item under test is **IN COMPLIANCE** with the requested specifications specified in the standard.

NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, "USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS".

Remarks and comments

None.

Testing verdicts

Not applicable: NA
 Pass.....: P
 Fail: F
 Not measured.....: NM

FCC PART 15 PARAGRAPH	VERDICT			
	NA	P	F	NM
15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation		P		
15.247 Subclause (a) (1) (iii). Number of hopping channels		P		
15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time)		P		
15.247 Subclause (b). Maximum peak output power (radiated) and antenna gain		P		
15.247 Subclause (c). Band-edge of radiated emissions (Transmitter)		P		
15.247 Subclause (c). Emission limitations conducted (Transmitter)		P		
15.247 Subclause (c). Emission limitations radiated (Transmitter)		P		
15.109. Radiated emission limits for receiver		P		
15.207. Conducted limits		P		

APPENDIX A: Test result

INDEX

TEST CONDITIONS	10
Section 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation	11
Section 15.247 Subclause (a) (1) (iii). Number of hopping channels.....	18
Section 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time)	24
Section 15.247 Subclause (b). Maximum peak output power and antenna gain	33
Section 15.247 Subclause (d). Band-edge compliance of conducted emissions (Transmitter)	45
Section 15.247 Subclause (d). Band-edge compliance of radiated emissions (Transmitter).....	52
Section 15.247 Subclause (d). Emission limitations conducted (Transmitter).....	62
Section 15.247 Subclause (d). Emission limitations radiated (Transmitter)	68
Section 15.109. Receiver spurious radiation.....	101

TEST CONDITIONS

Power supply (V):

$V_{nominal} = 3.7 \text{ Vdc}$

Type of power supply = DC voltage from rechargeable Li-Ion battery.

Type of antenna = Integral antenna.

Declared Gain for antenna = 4.4 dBi

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2441 MHz

Highest channel: 2480 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4: 2003.

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to a Bluetooth signalling unit (Bluetooth test set) and to the spectrum analyser using a 6 dB power splitter. The reading in the spectrum analyser is corrected taking into account the power splitter loss.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

An additional horn antenna is used to control the equipment under test with the Bluetooth signalling unit (Bluetooth test set).

Section 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation

SPECIFICATION

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

RESULTS

(See next plots)

Modulation: GFSK

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	932.69	932.69	935.90
Measurement uncertainty (kHz)	± 11		

Modulation: $\Pi/4$ -DQPSK (2Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	1323.72	1323.72	1317.31
Measurement uncertainty (kHz)	± 11		


Modulation: 8-DPSK (3Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	1307.69	1304.49	1301.28
Measurement uncertainty (kHz)	± 11		

Modulation: GFSK


20 dB BANDWIDTH.

Lowest Channel: 2402 MHz.

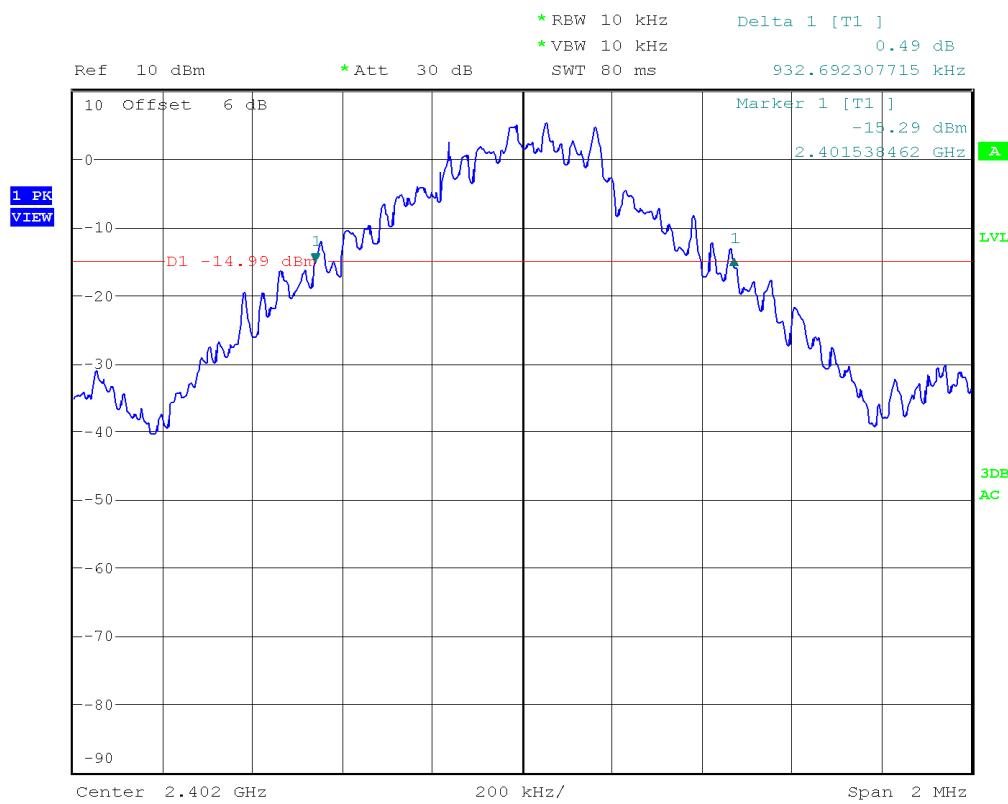


20 dB BANDWIDTH

Middle Channel: 2441 MHz.

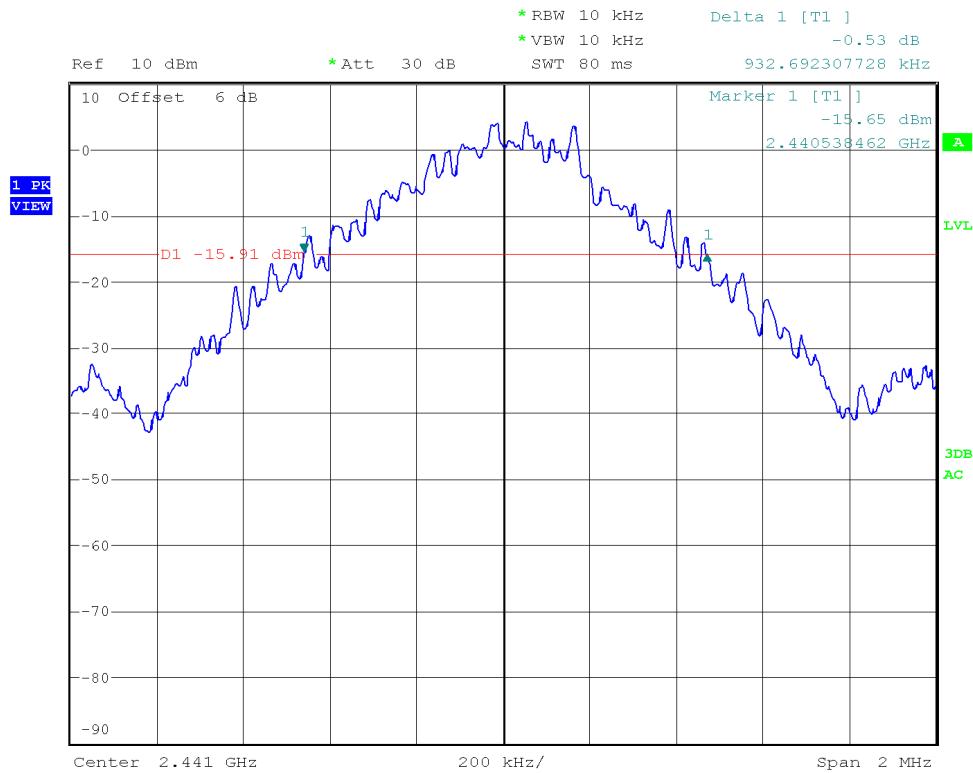


20 dB BANDWIDTH

Highest Channel: 2480 MHz.

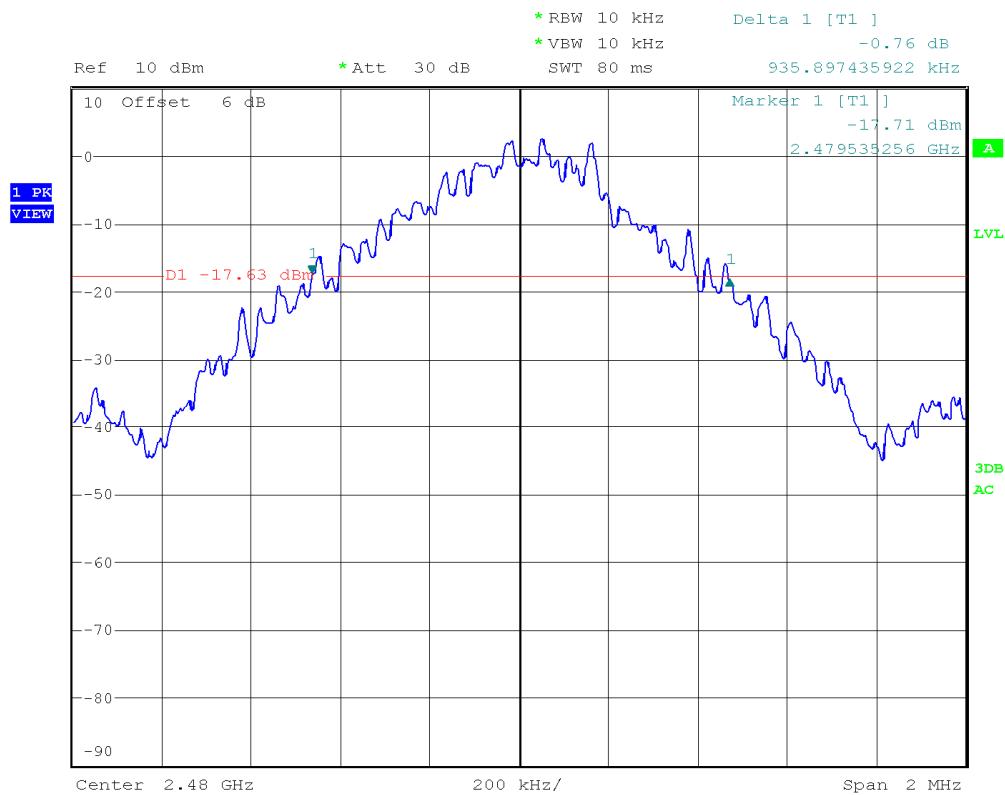

Carrier frequency separation

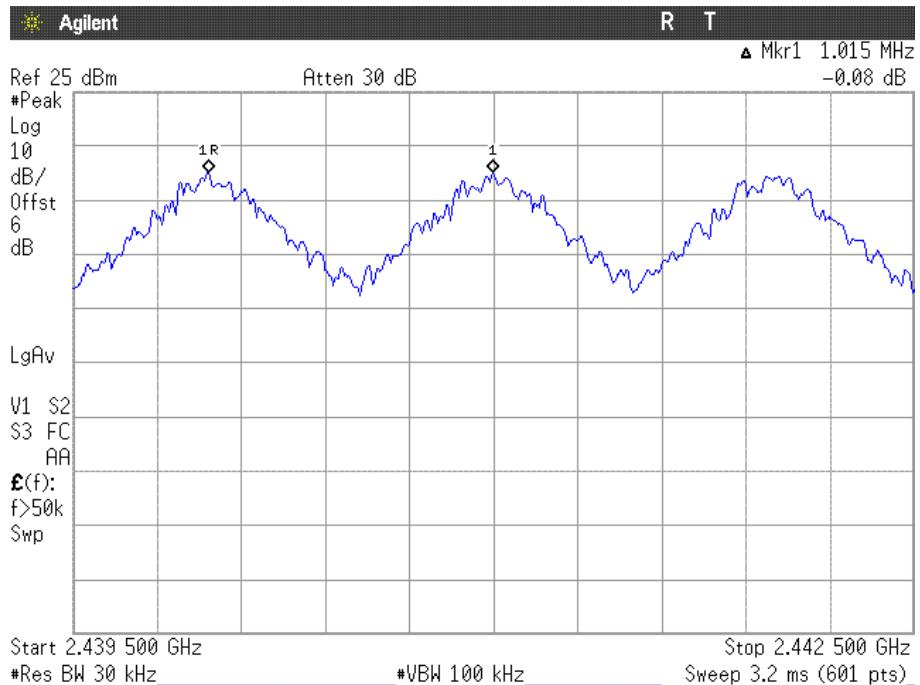


The hopping channel carrier frequencies are separated by a minimum of the 20 dB bandwidth of the hopping channel.

Verdict: PASS

Modulation: $\Pi/4$ -DQPSK


20 dB BANDWIDTH.

Lowest Channel: 2402 MHz.

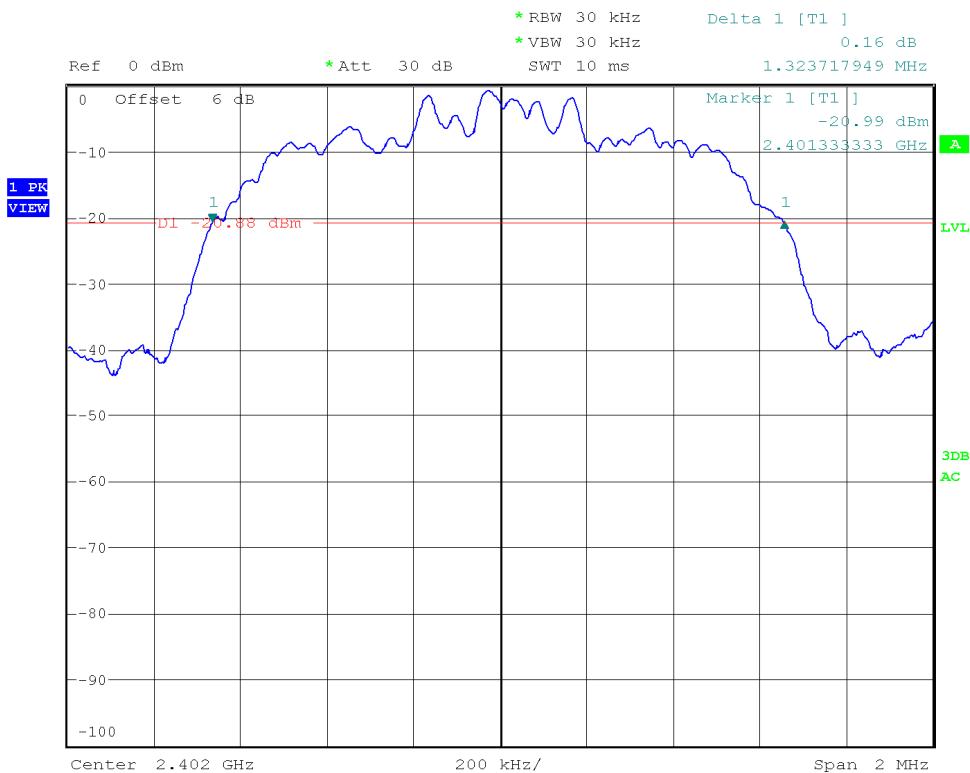


20 dB BANDWIDTH

Middle Channel: 2441 MHz.

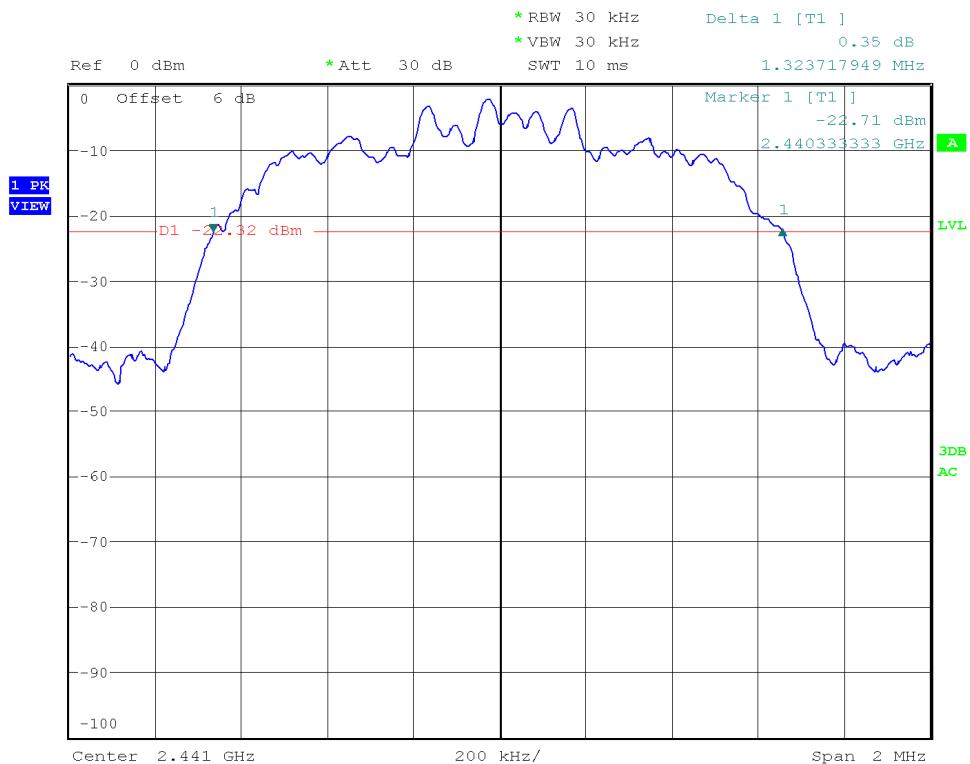


20 dB BANDWIDTH

Highest Channel: 2480 MHz.

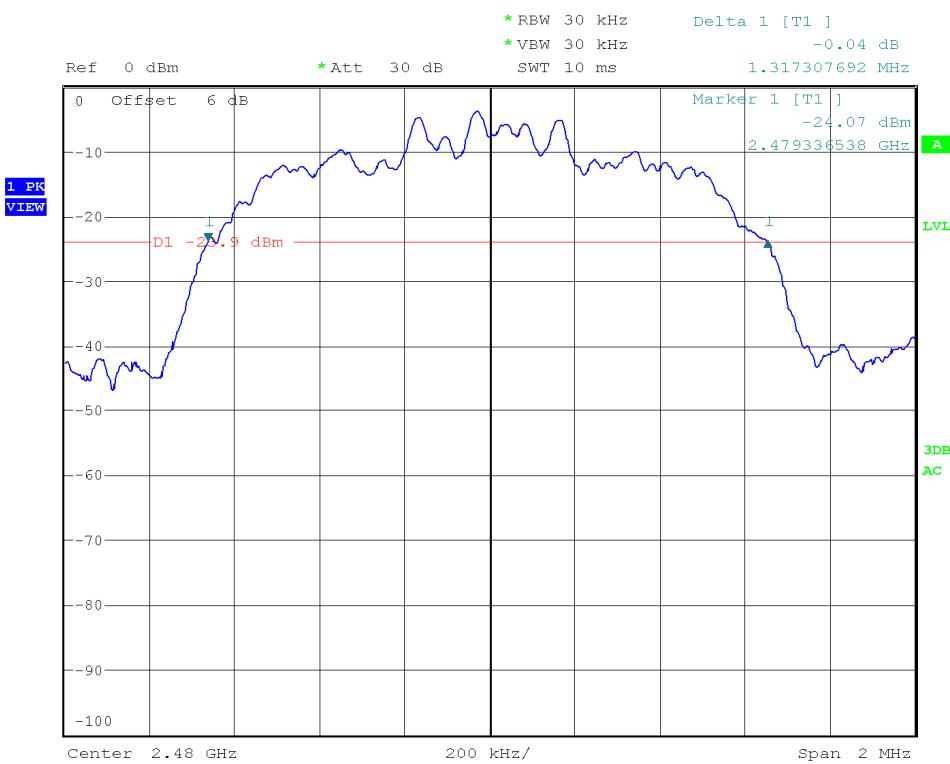

Carrier frequency separation

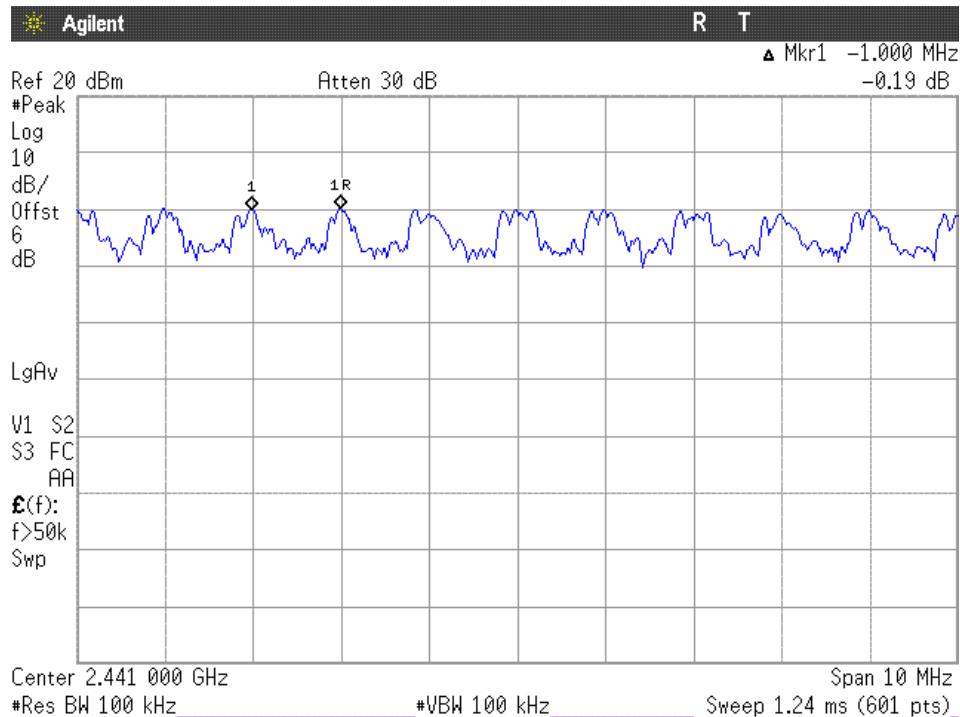


The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel

Verdict: PASS

Modulation: 8-DPSK


20 dB BANDWIDTH

Lowest Channel: 2402 MHz.

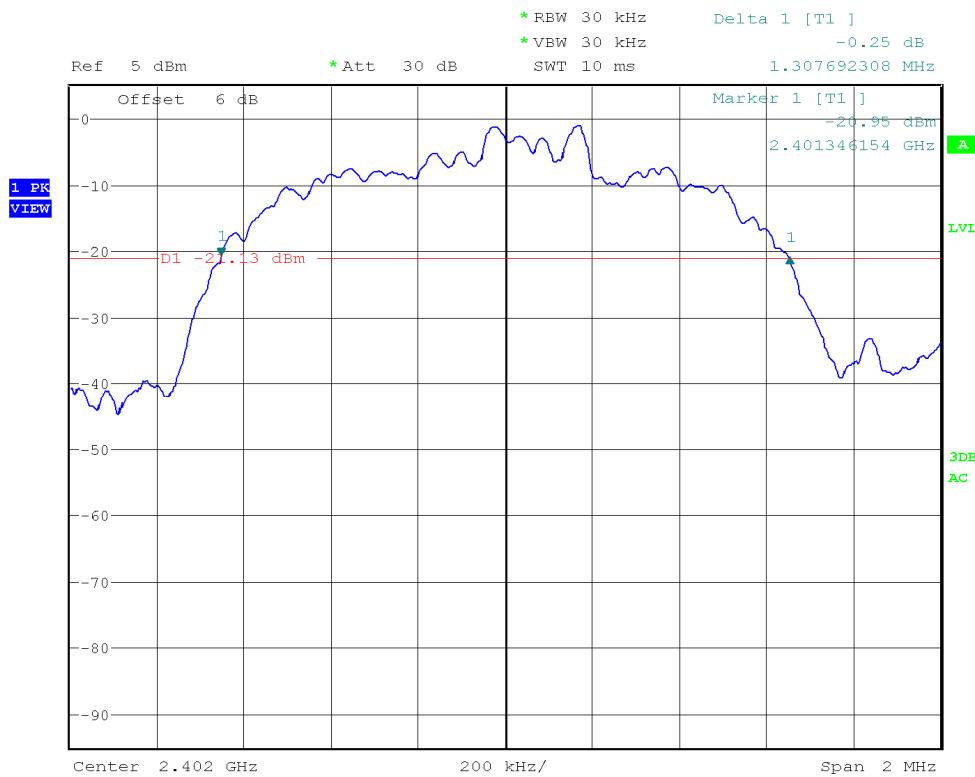


20 dB BANDWIDTH

Middle Channel: 2441 MHz.

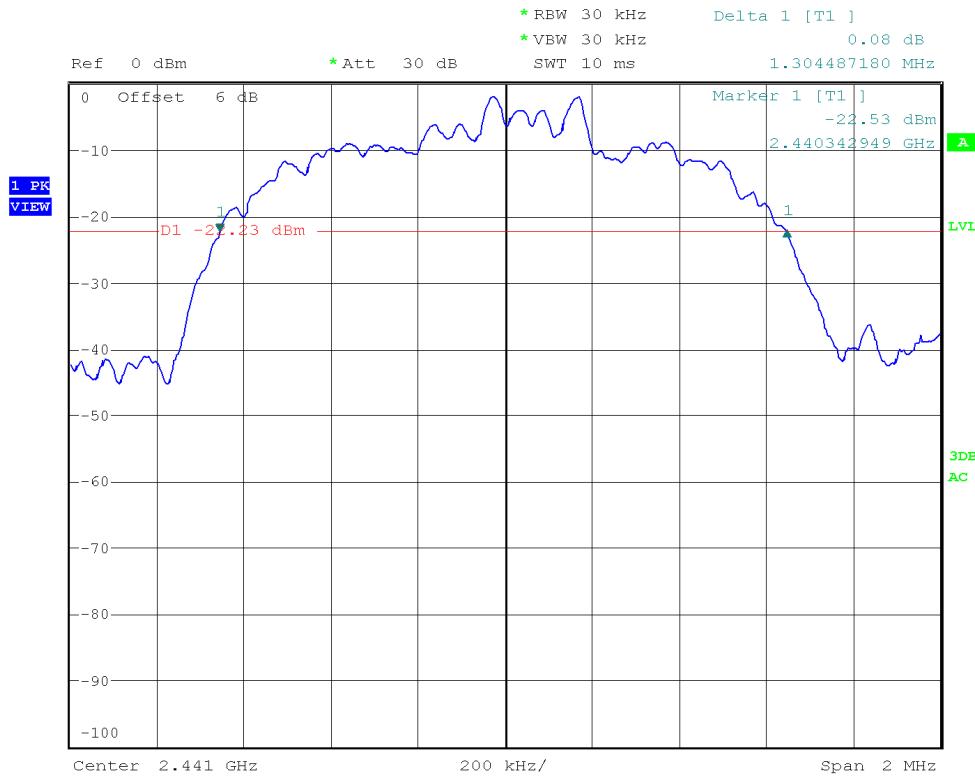


20 dB BANDWIDTH

Highest Channel: 2480 MHz.

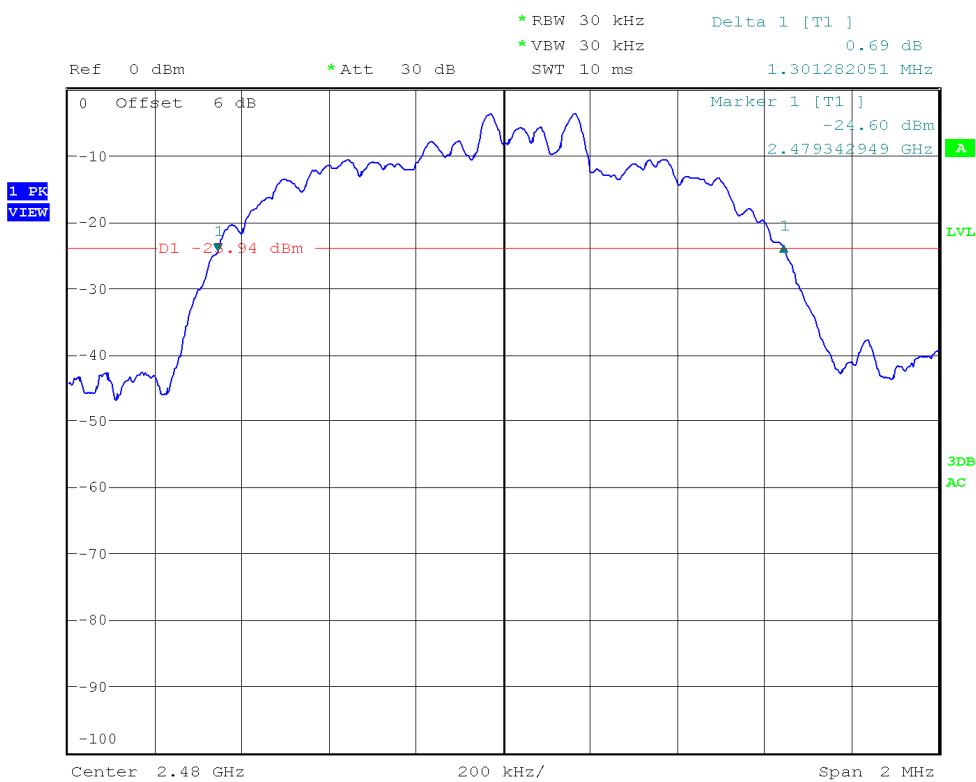

Carrier frequency separation

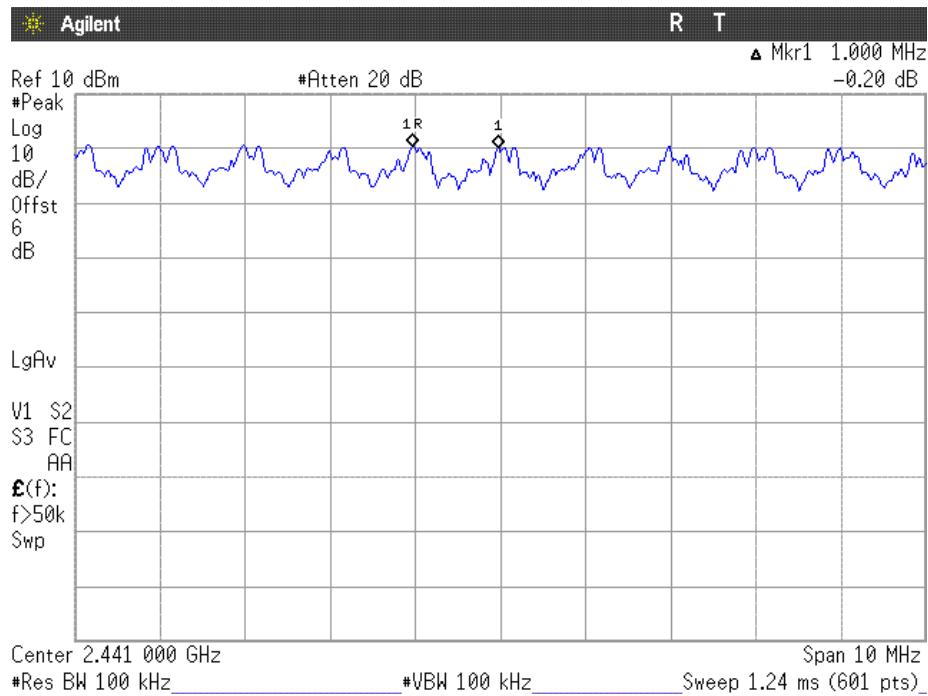

The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel.

Verdict: PASS

Section 15.247 Subclause (a) (1) (iii). Number of hopping channels

SPECIFICATION


Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

RESULTS


The number of hopping channels is 79 for all three modes (see next plots).

Modulation: GFSK

Number of hopping frequencies: 39

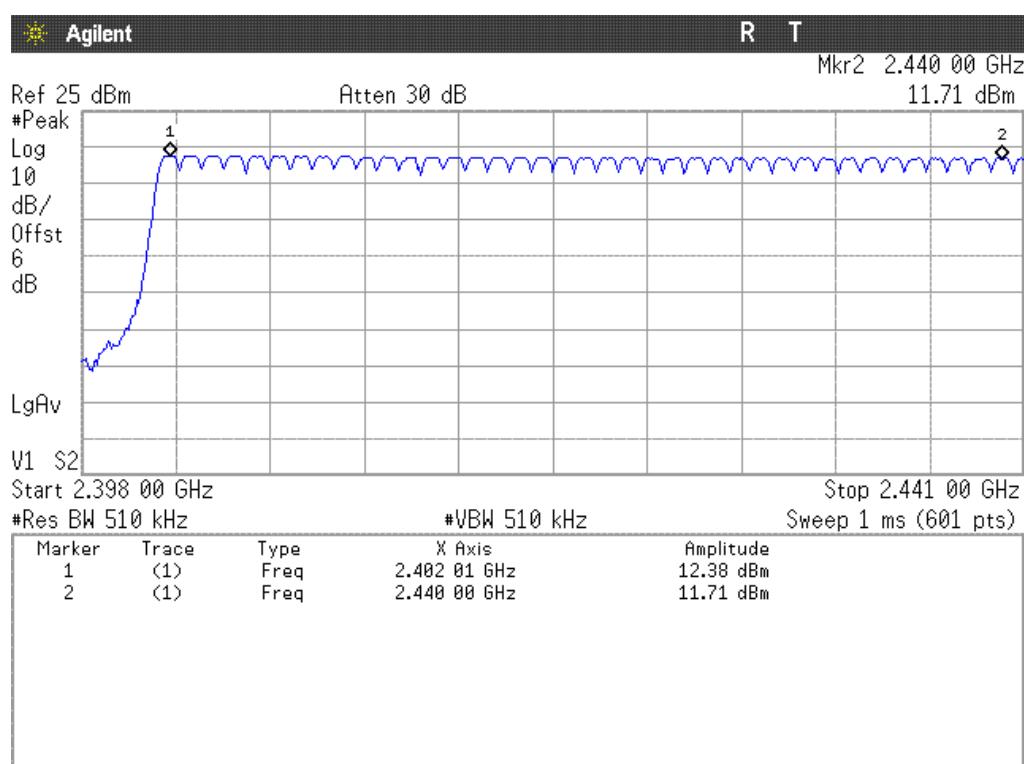

Number of hopping frequencies: 40

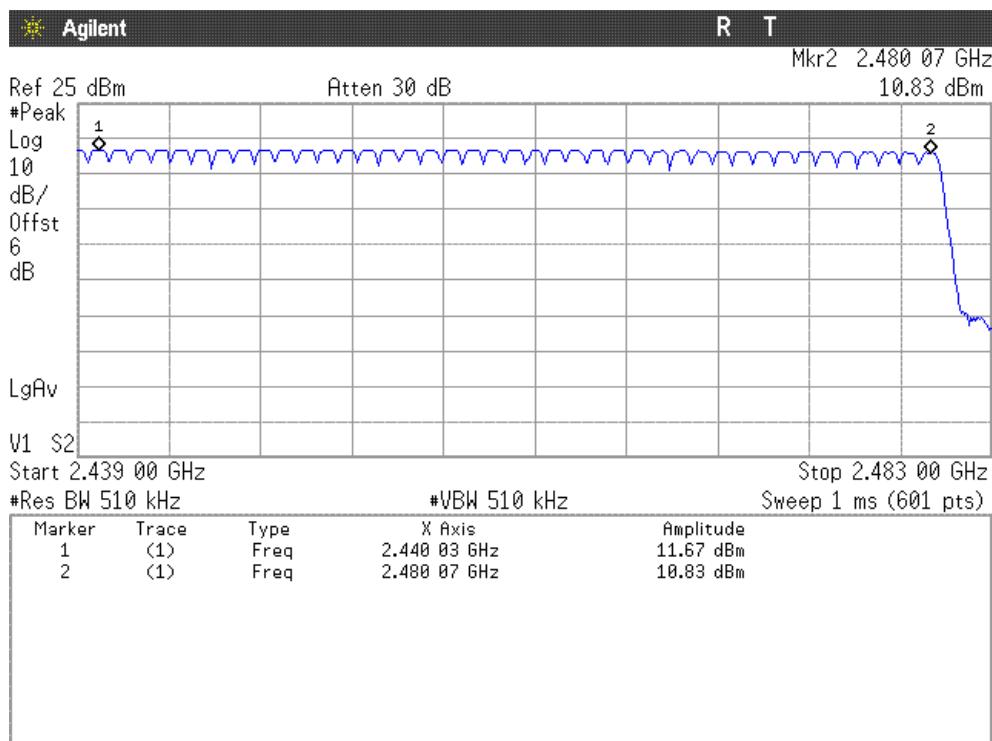


Total number of hopping frequencies: 79


Verdict: PASS

Modulation: $\Pi/4$ -DQPSK

Number of hopping frequencies: 39

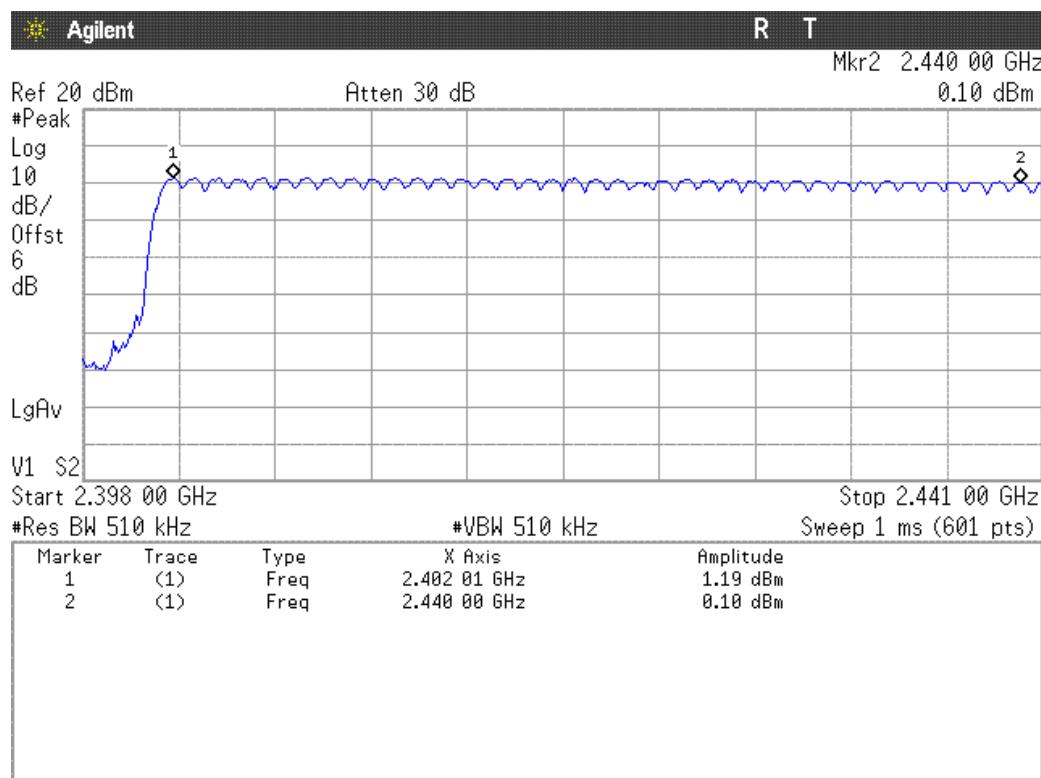

Number of hopping frequencies: 40

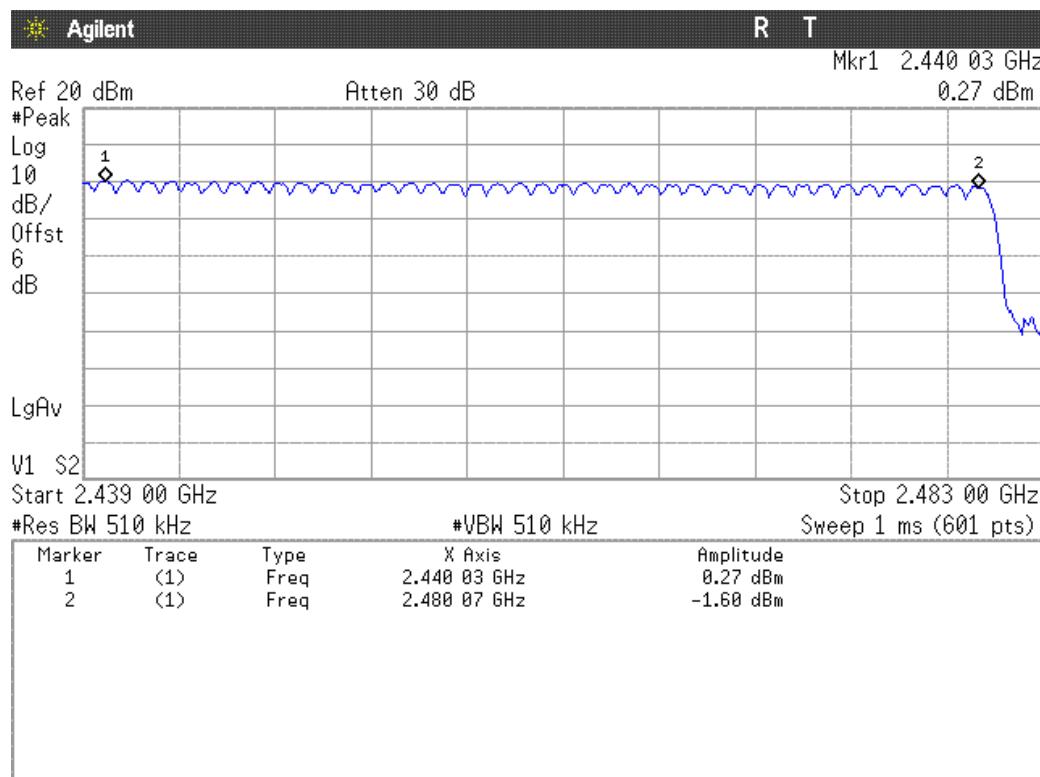


Total number of hopping frequencies: 79


Verdict: PASS

Modulation: 8-DPSK

Number of hopping frequencies: 39

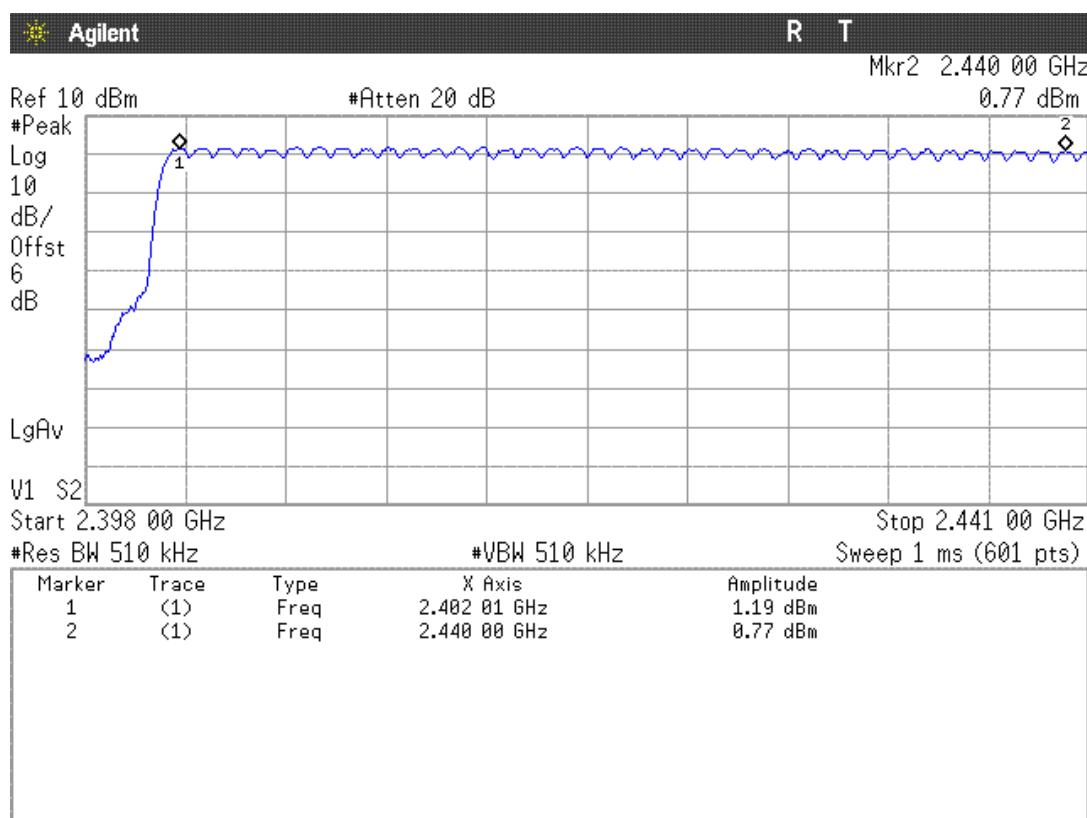

Number of hopping frequencies: 40

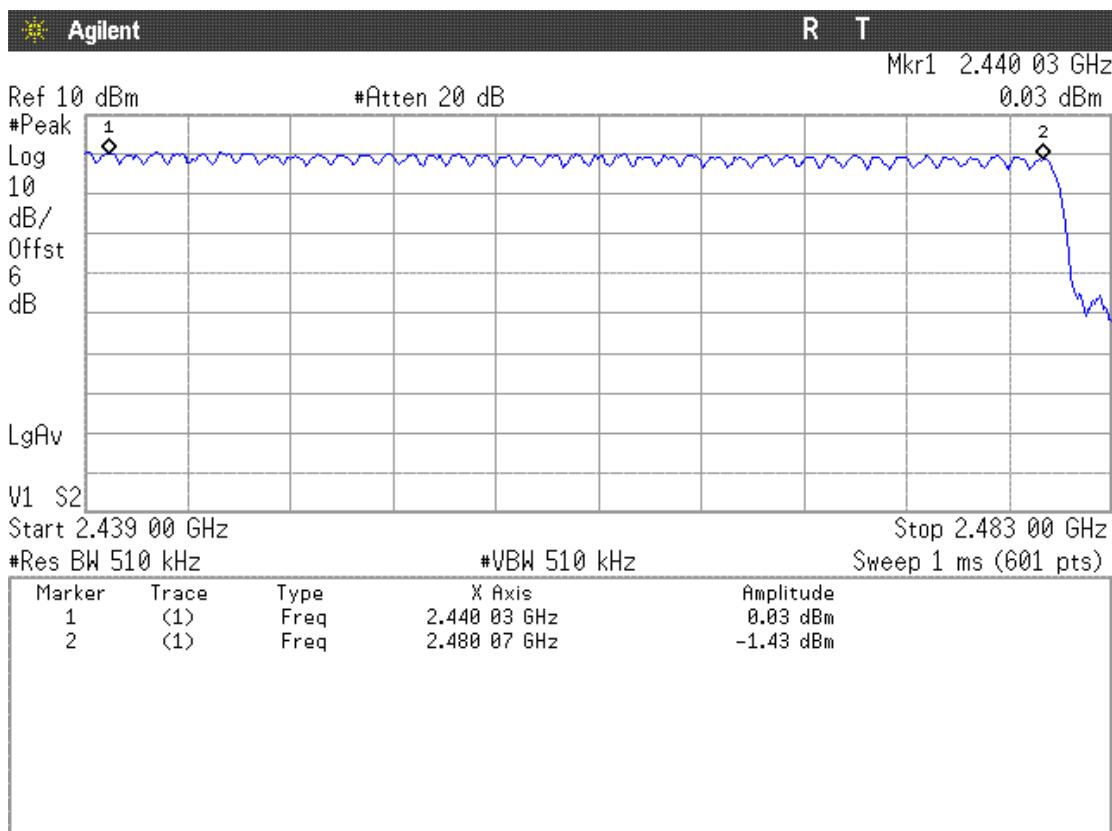

Total number of hopping frequencies: 79

Verdict: PASS

Section 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time)

SPECIFICATION

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.

RESULTS


Modulation: GFSK

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance.

Each Tx-time per appearance is 401.5 μ s (see next plot).

So we have $320.11 \times 401.5 \mu$ s = 128.52 ms per 31.6 seconds.

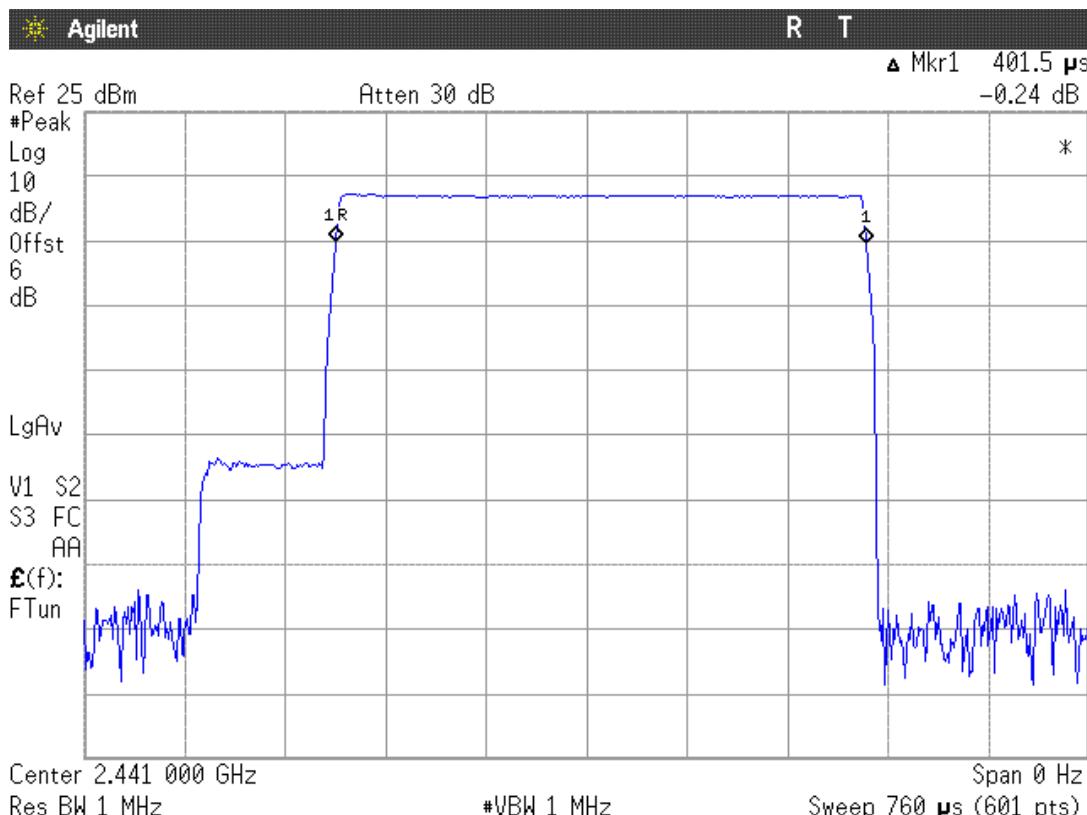


Verdict: PASS

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet needs 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance.

Each Tx-time per appearance is 1.665 ms (see next plot).

So we have $161.16 \times 1.665 \text{ ms} = 268.33 \text{ ms}$ per 31.6 seconds.

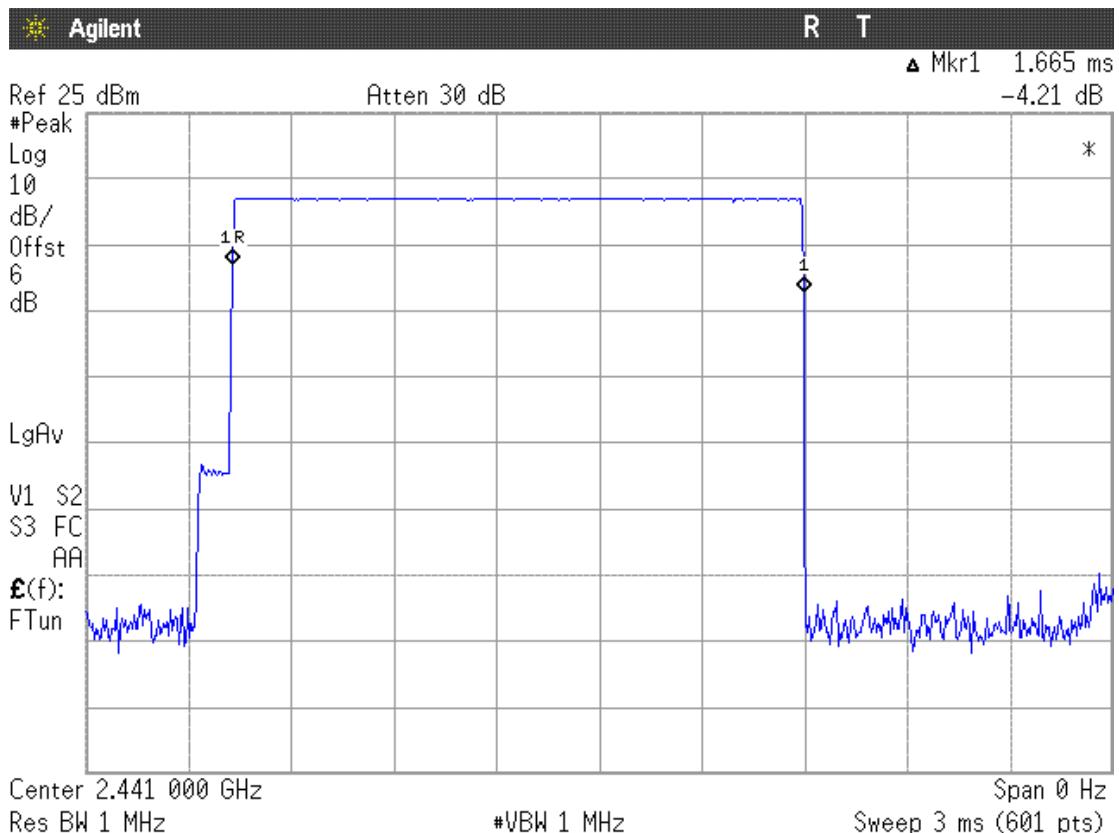


Verdict: PASS

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet needs 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance.

Each Tx-time per appearance is 2.913 ms (see next plot).

So we have 106.49×2.913 ms = 310.20 ms per 31.6 seconds.

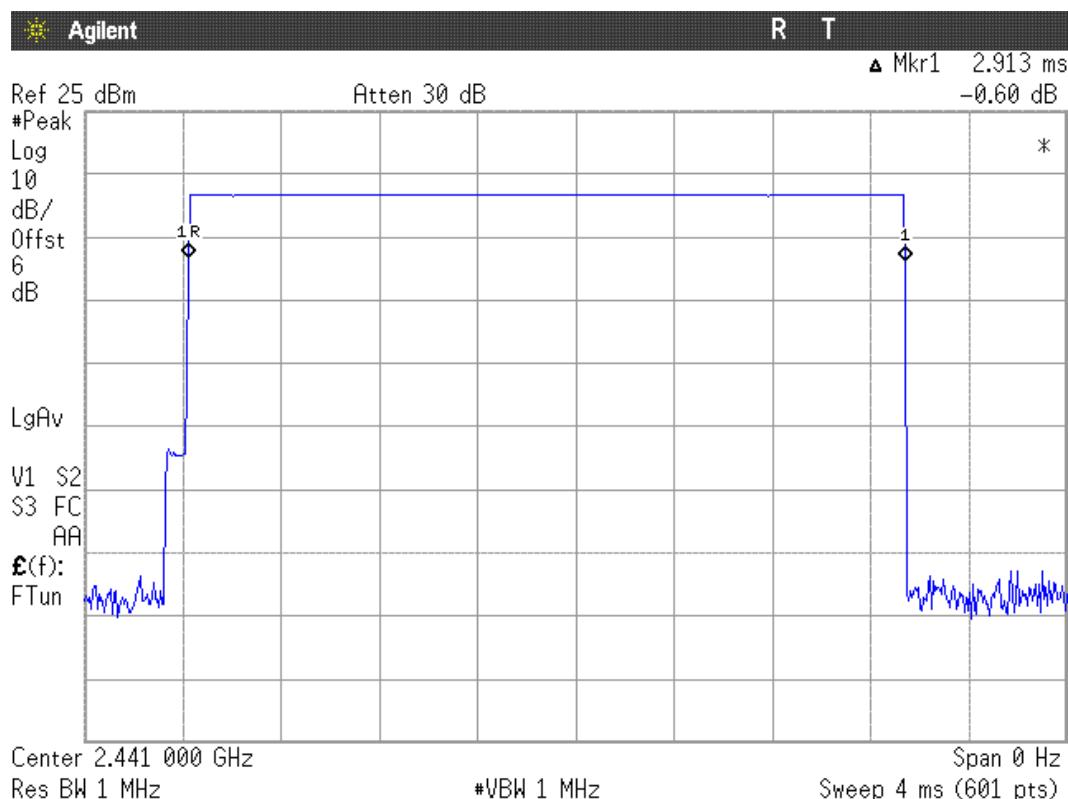


Verdict: PASS

Modulation: II/4-DQPSK

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance.

Each Tx-time per appearance is 412.9 μ s (see next plot).
So we have $320.11 \times 412.9 \mu\text{s} = 132.17 \text{ ms}$ per 31.6 seconds.

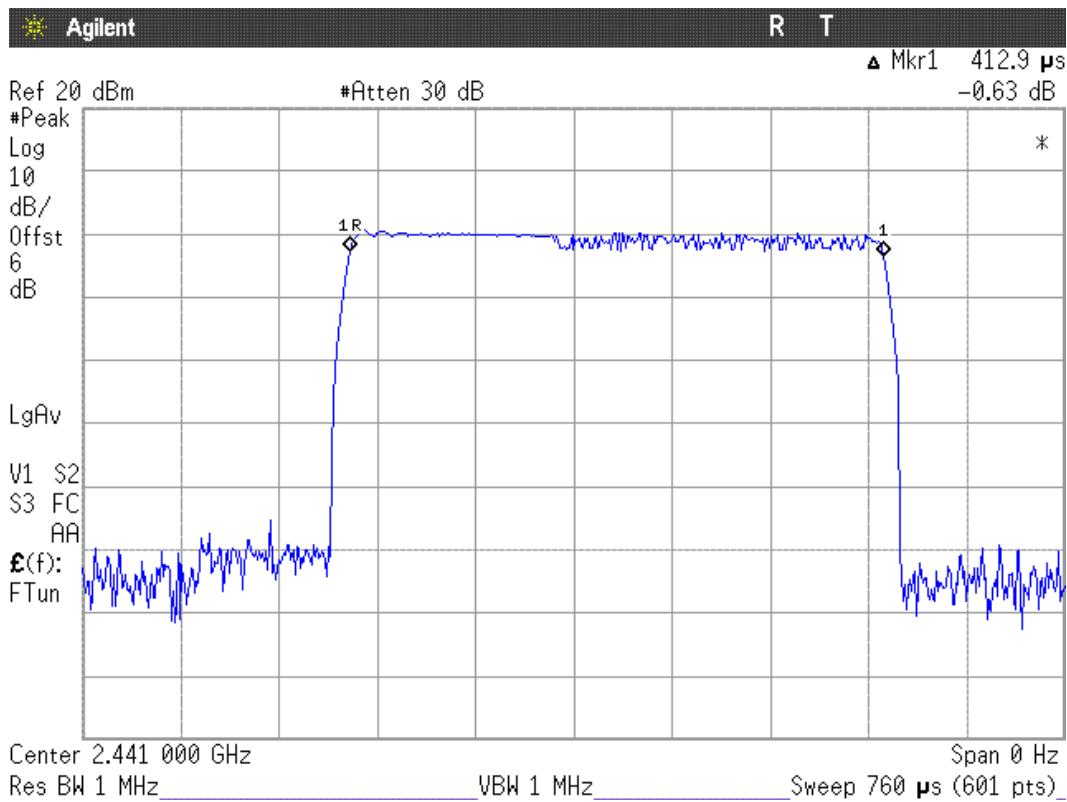


Verdict: PASS

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet needs 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance.

Each Tx-time per appearance is 1.67 ms (see next plot).
So we have 161.16×1.67 ms = 269.14 ms per 31.6 seconds.

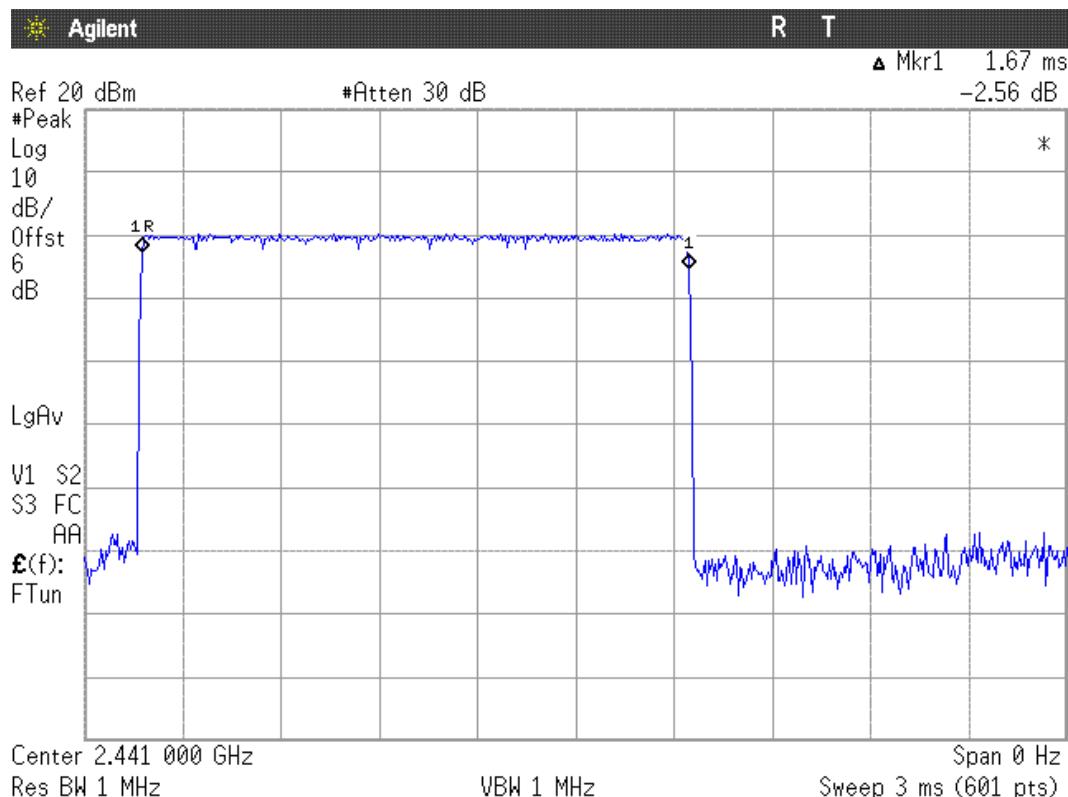


Verdict: PASS

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet needs 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance.

Each Tx-time per appearance is 2.92 ms (see next plot).
So we have 106.49×2.92 ms = 310.95 ms per 31.6 seconds.

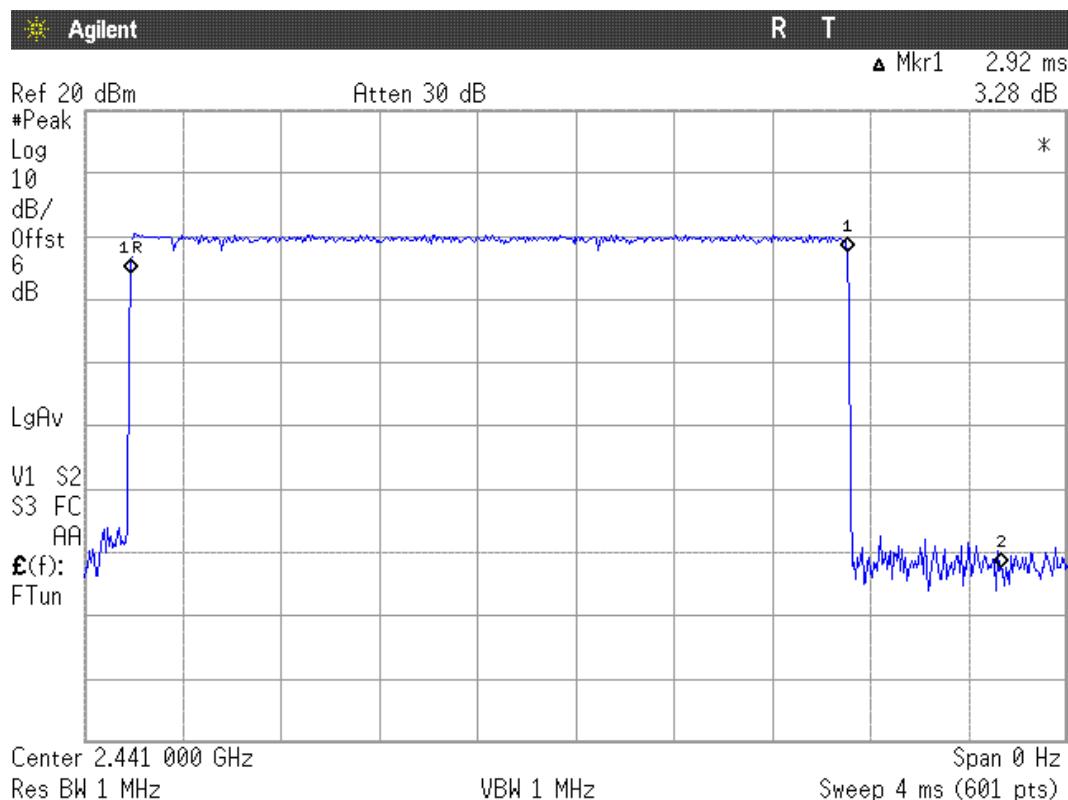


Verdict: PASS

Modulation: 8-DPSK

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance.

Each Tx-time per appearance is 411.7 μ s (see next plot).
So we have $320.11 \times 411.7 \mu\text{s} = 131.79 \text{ ms}$ per 31.6 seconds.

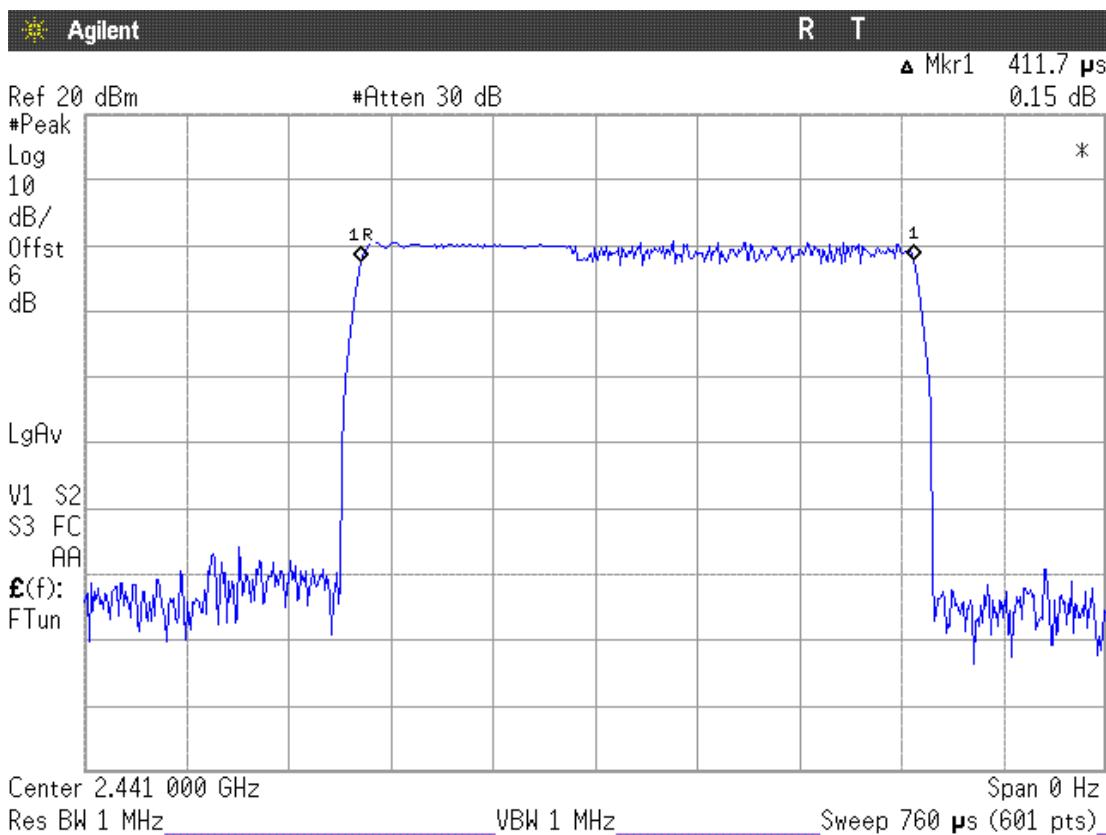


Verdict: PASS

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet needs 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance.

Each Tx-time per appearance is 1.67 ms (see next plot).
So we have 161.16×1.67 ms = 269.14 ms per 31.6 seconds.

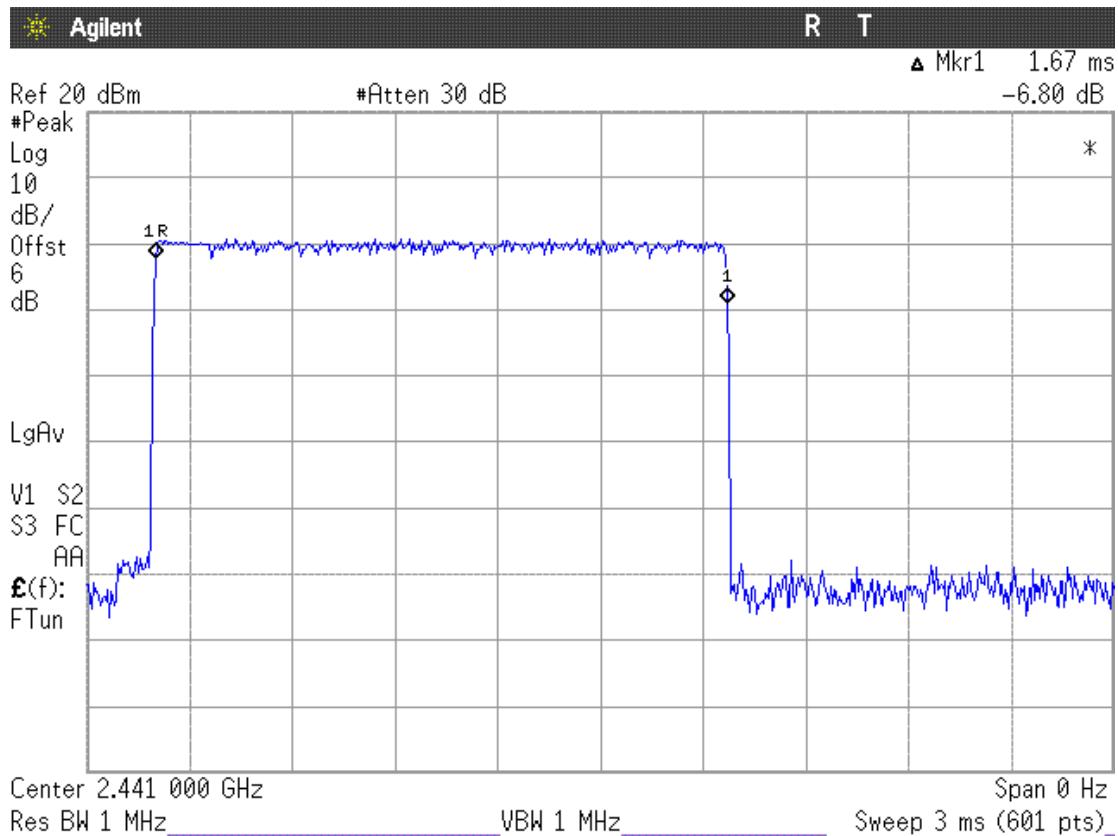


Verdict: PASS

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet needs 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance.

Each Tx-time per appearance is 2.927 ms (see next plot).

So we have 106.49×2.927 ms = 311.70 ms per 31.6 seconds.

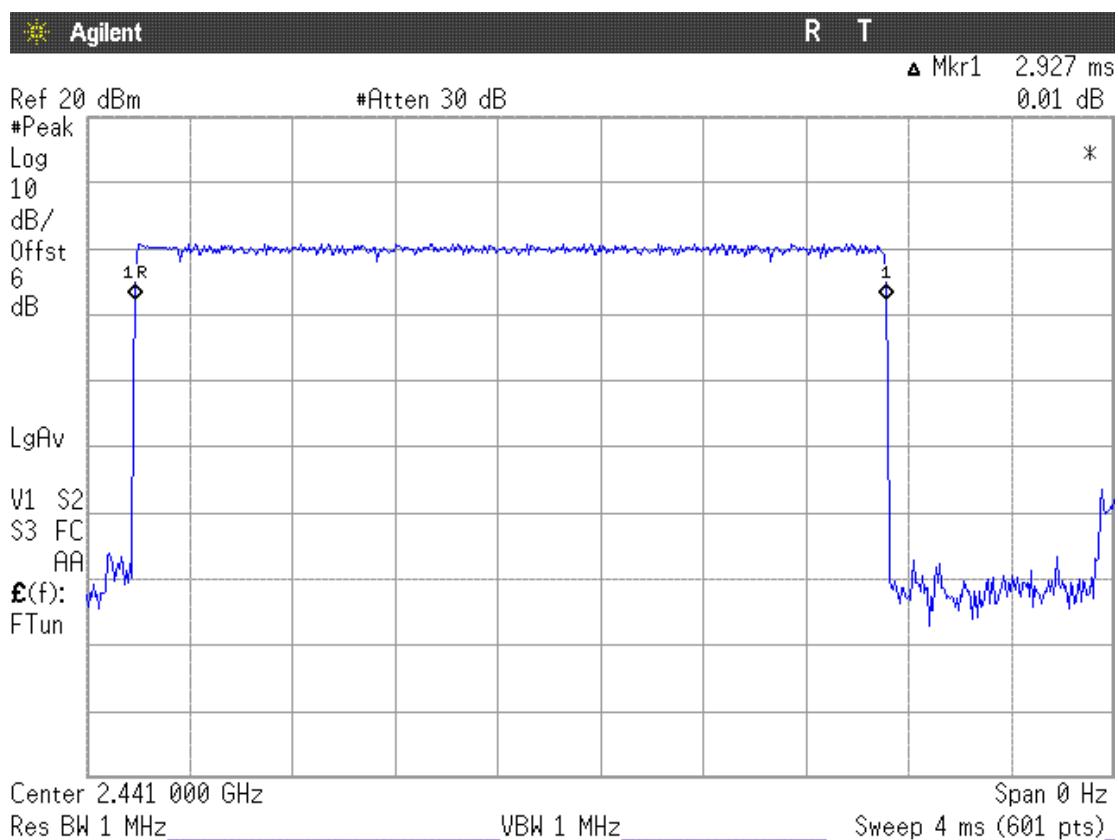

Verdict: PASS

Section 15.247 Subclause (b). Maximum peak output power and antenna gain

SPECIFICATION

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

RESULTS

MAXIMUM PEAK OUTPUT POWER (CONDUCTED). See next plots.

Modulation: GFSK

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	10.98	9.98	8.29
Measurement uncertainty (dB)	± 1.5		

The maximum declared antenna gain for this device is 4.4 dBi, therefore the maximum theoretical peak radiated power (EIRP) in the three measurement channels for this device is 15.38 dBm or 34.51 mW.

The actual peak radiated power (EIRP) was measured for the lowest, middle and highest frequency (see next plots).

Modulation: $\Pi/4$ -DQPSK (2Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	2.76	1.08	-0.67
Measurement uncertainty (dB)	± 1.5		

The maximum declared antenna gain for this device is 4.4 dBi, therefore the maximum theoretical peak radiated power (EIRP) in the three measurement channels for this device is 7.16 dBm or 5.20 mW.

The actual peak radiated power (EIRP) was measured for the lowest, middle and highest frequency (see next plots).

Modulation: 8-DPSK (3Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	3.00	1.26	-0.36
Measurement uncertainty (dB)	± 1.5		

The maximum declared antenna gain for this device is 4.4 dBi, therefore the maximum theoretical peak radiated power (EIRP) in the three measurement channels for this device is 7.40 dBm or 5.49 mW.

The actual peak radiated power (EIRP) was measured for the lowest, middle and highest frequency (see next plots).

MAXIMUM PEAK OUTPUT POWER (RADIATED).

Modulation: GFSK

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Correction Factor (dB)	35.0	35.1	35.2
Maximum EIRP peak power (dBm)	18.21	17.68	16.49
Measurement uncertainty (dB)	± 4.0		

Modulation: $\Pi/4$ -DQPSK (2 Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Correction Factor (dB)	35.0	35.1	35.2
Maximum EIRP peak power (dBm)	6.79	6.81	5.84
Measurement uncertainty (dB)	± 4.0		

Modulation: 8-DPSK (3Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Correction Factor (dB)	35.0	35.1	35.2
Maximum EIRP peak power (dBm)	7.05	7.13	6.16
Measurement uncertainty (dB)	± 4.0		

Declared peak gain: 4.4 dBi


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS

PEAK OUTPUT POWER (CONDUCTED).


Modulation: GFSK

Lowest Channel: 2402 MHz.

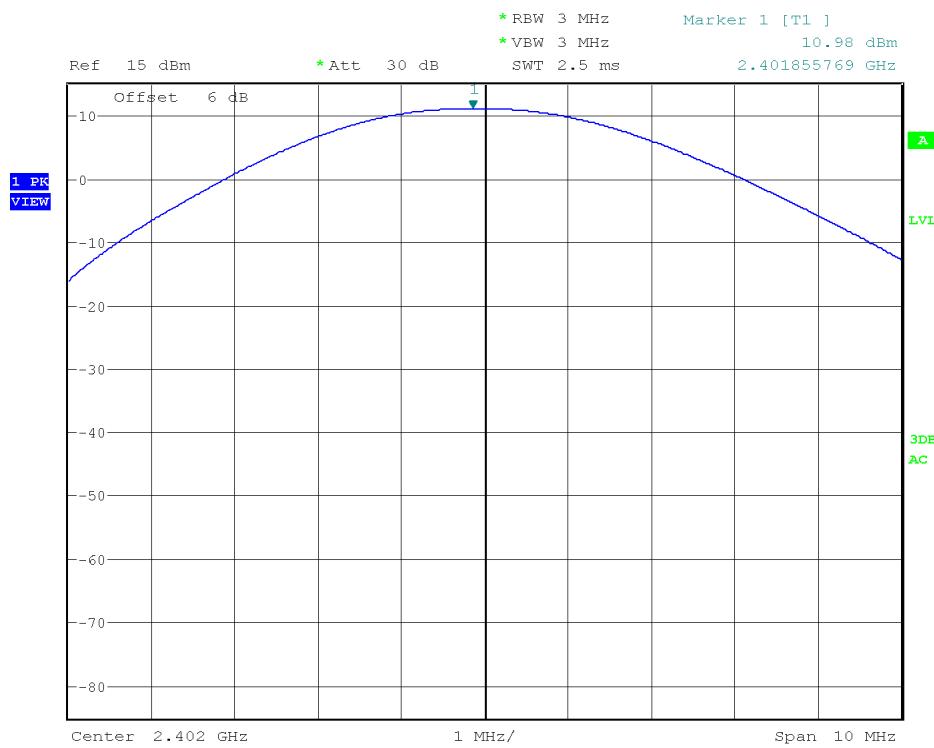

Modulation: GFSK


Middle Channel: 2441 MHz.

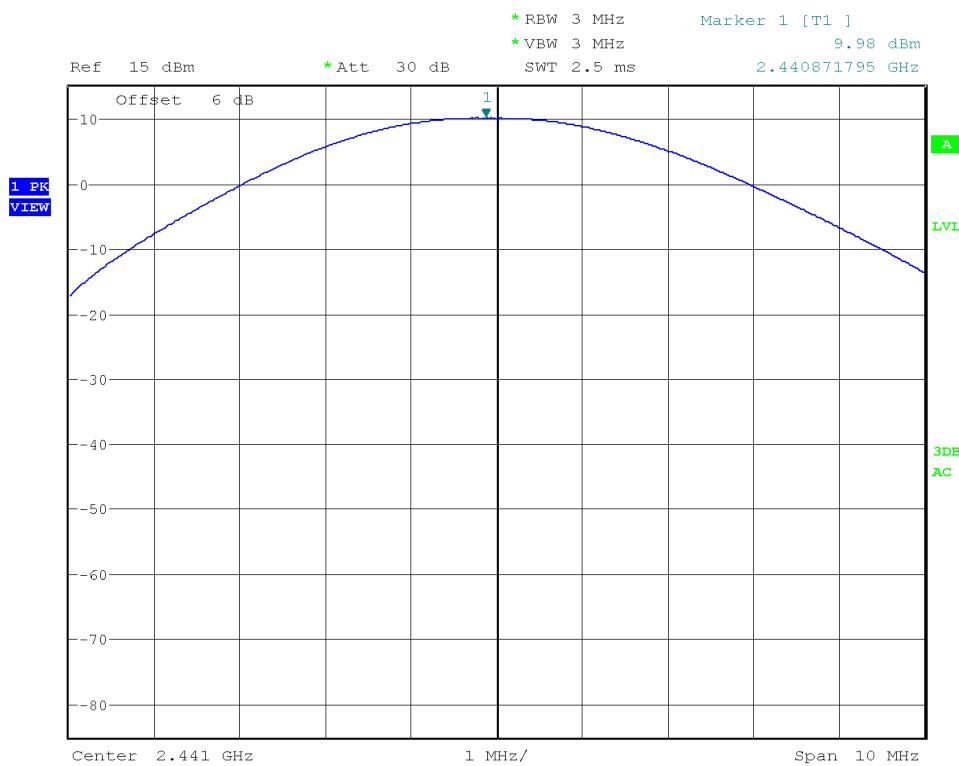

PEAK OUTPUT POWER (CONDUCTED).


Modulation: GFSK

Highest Channel: 2480 MHz.

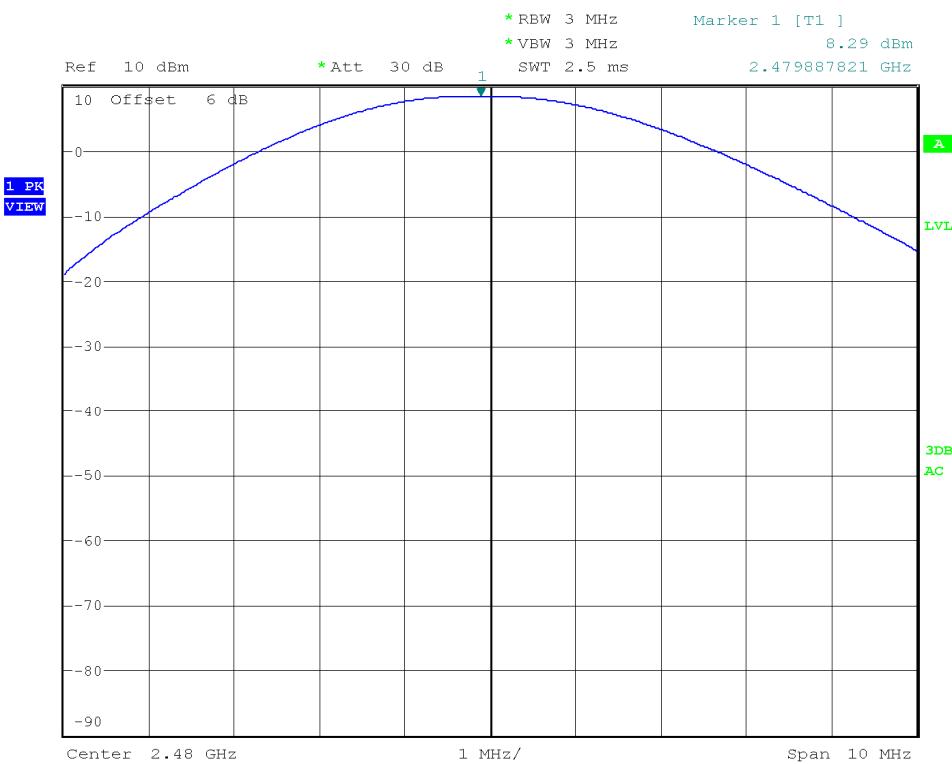

Modulation: Π/4-DQPSK


Lowest Channel: 2402 MHz

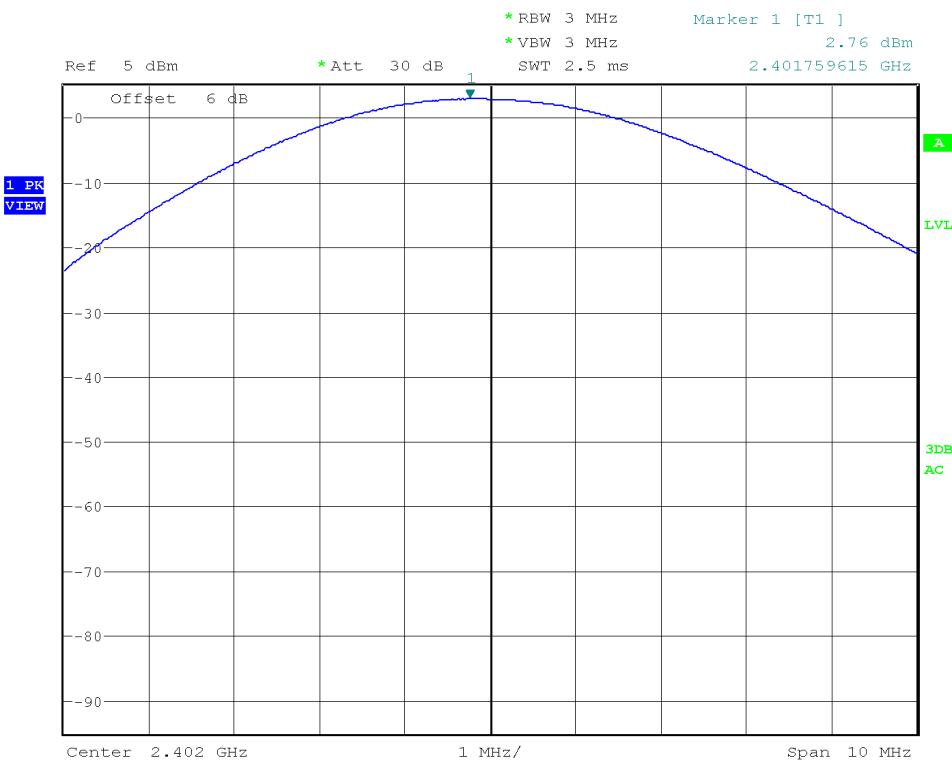

PEAK OUTPUT POWER (CONDUCTED)


Modulation: $\Pi/4$ -DQPSK

Middle Channel: 2441 MHz.

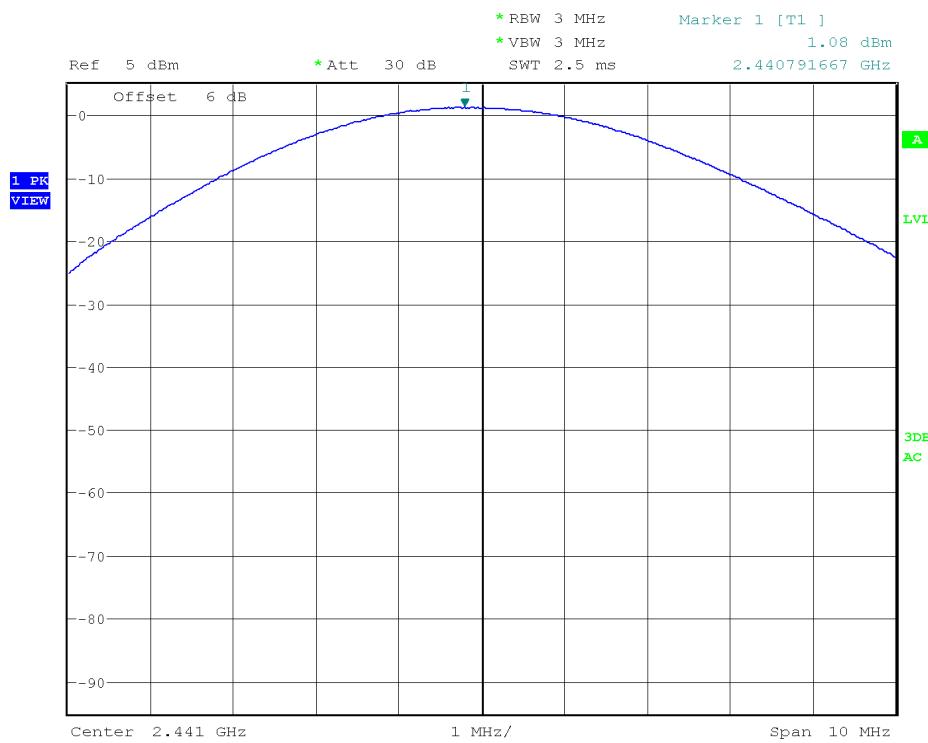

Modulation: $\Pi/4$ -DQPSK


Highest Channel: 2480 MHz.

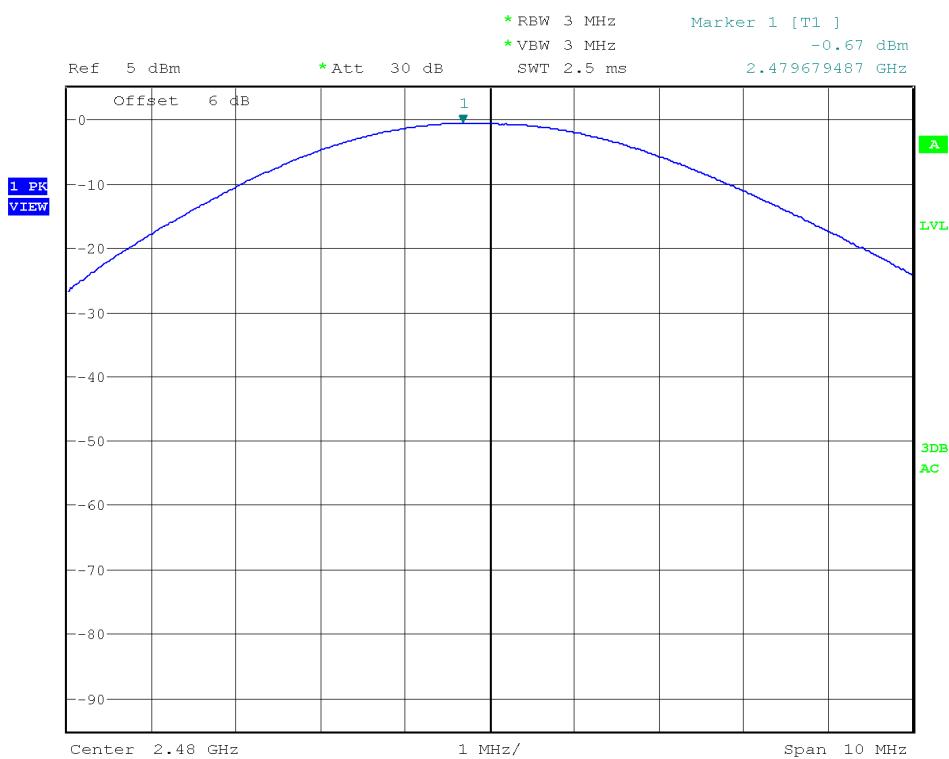

PEAK OUTPUT POWER (CONDUCTED).


Modulation: 8-DPSK

Lowest Channel: 2402 MHz

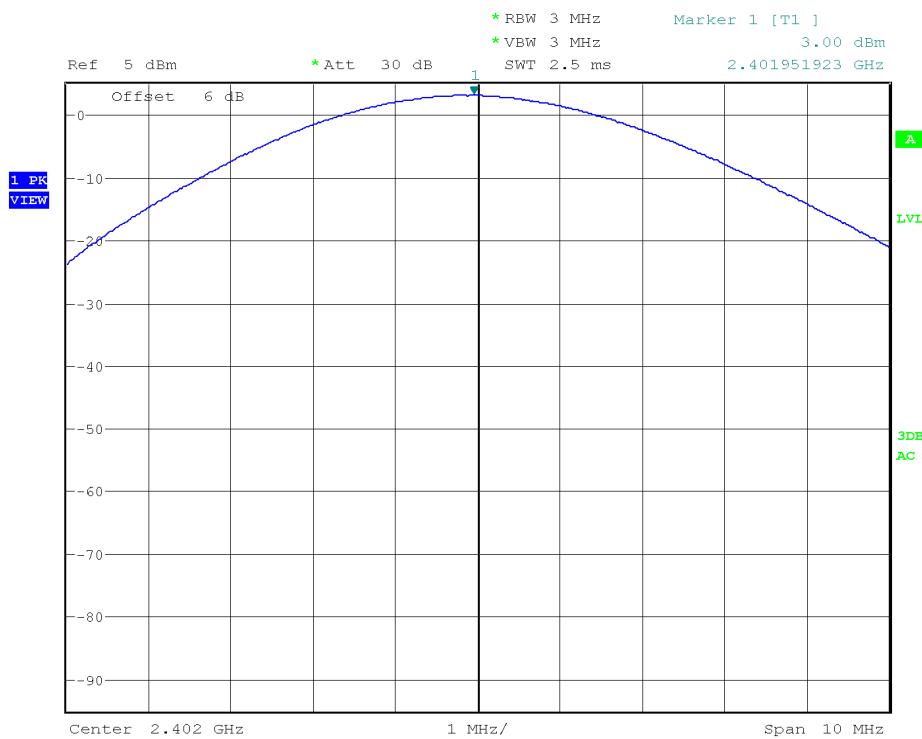


Modulation: 8-DPSK

Middle Channel: 2441 MHz.

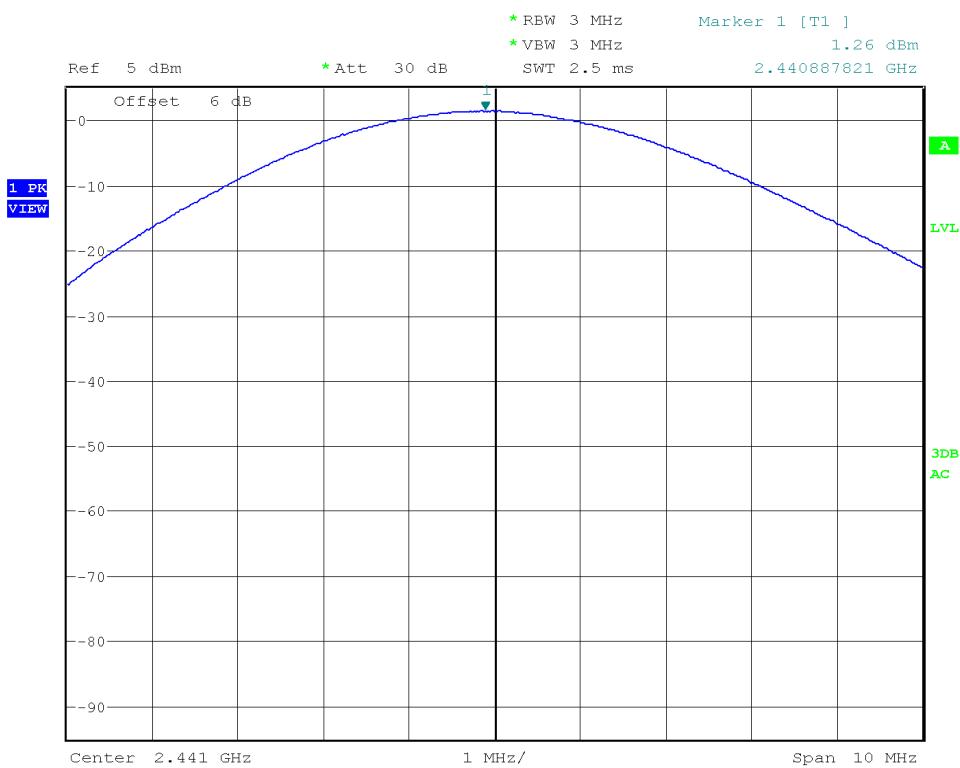

PEAK OUTPUT POWER (CONDUCTED).


Modulation: 8-DPSK Highest Channel: 2480 MHz.

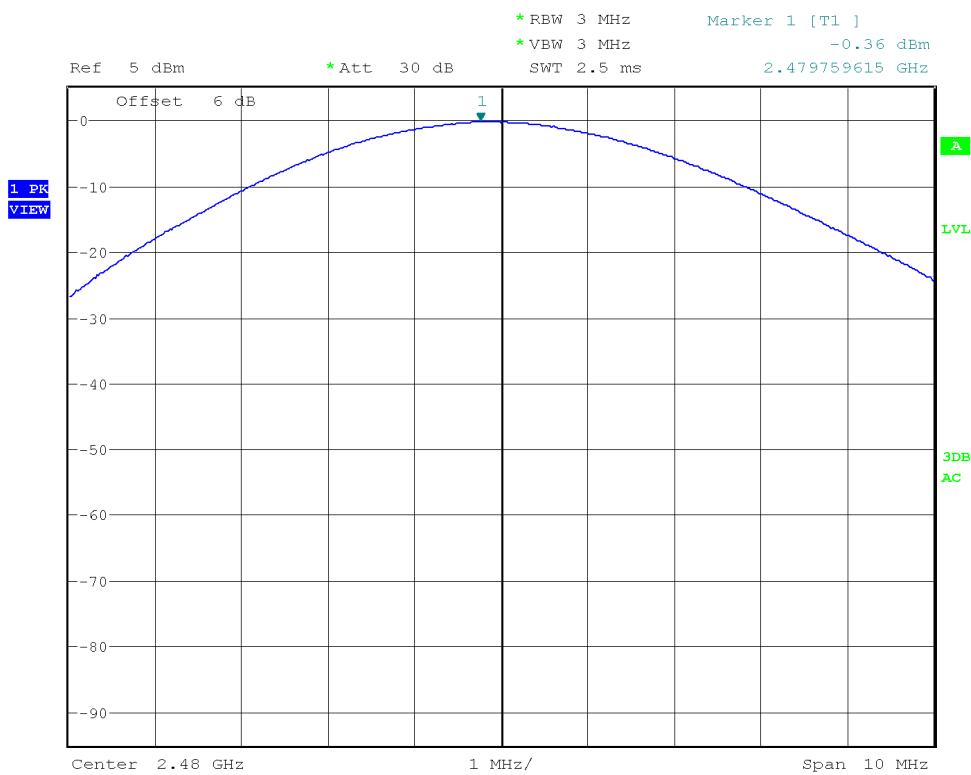

PEAK OUTPUT POWER (RADIATED).


Modulation: GFSK

Lowest Channel: 2402 MHz.

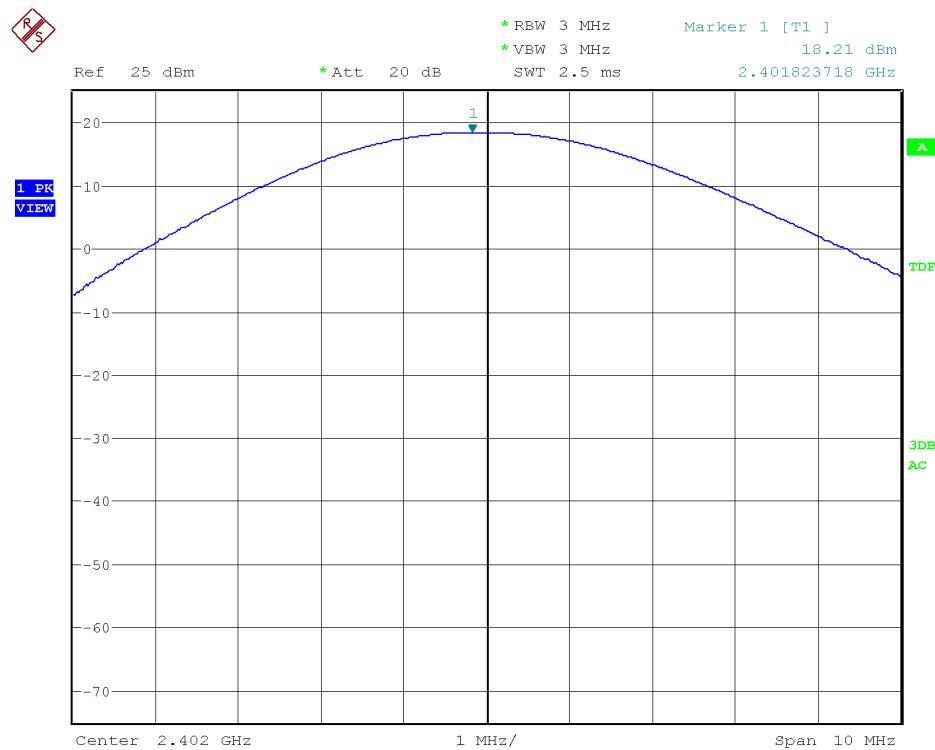

Modulation: GFSK


Middle Channel: 2441 MHz.

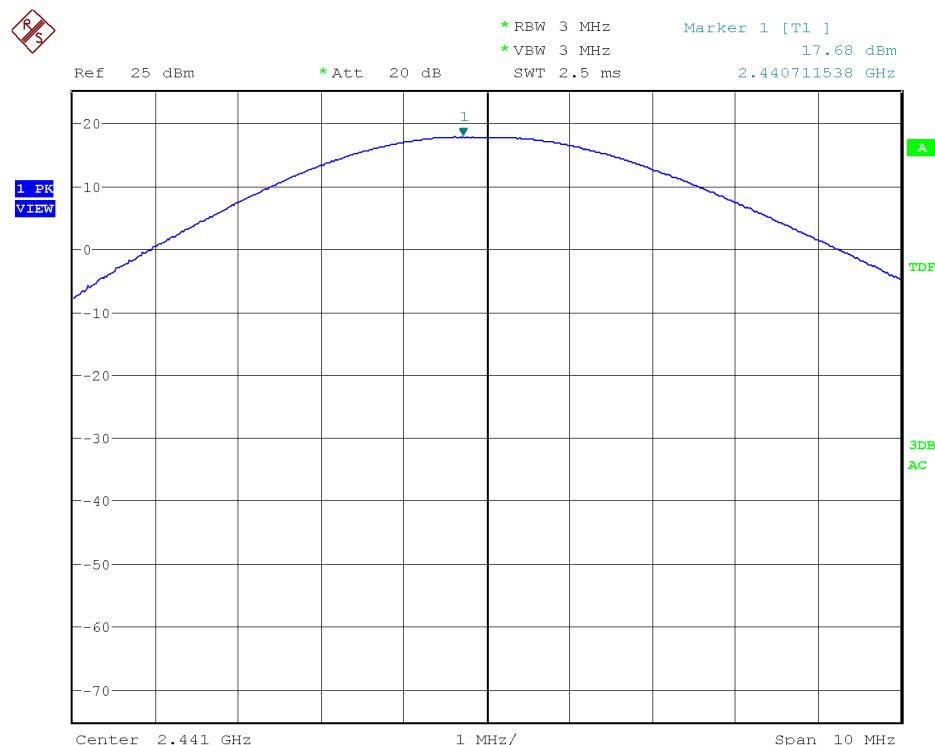

PEAK OUTPUT POWER (RADIATED).


Modulation: GFSK

Highest Channel: 2480 MHz.

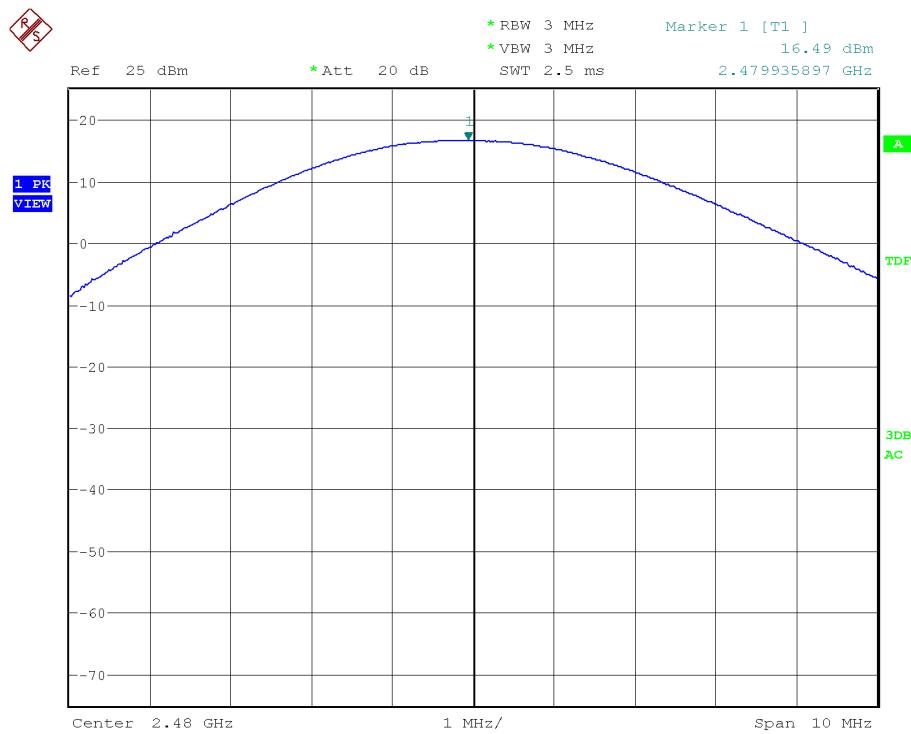

Modulation: $\Pi/4$ -DQPSK


Lowest Channel: 2402 MHz.

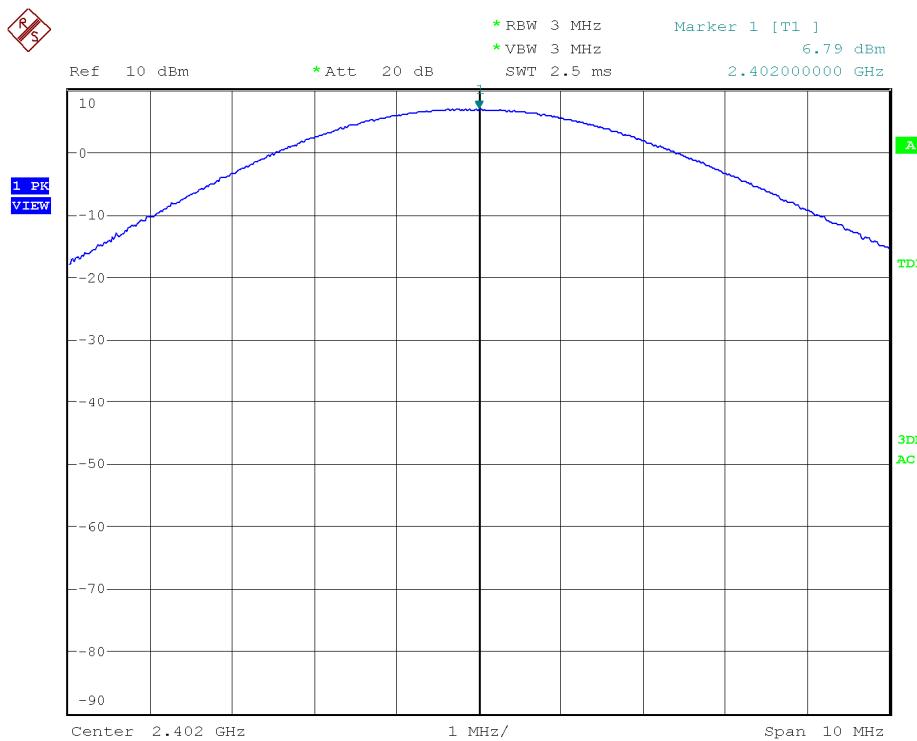

PEAK OUTPUT POWER (RADIATED).

Modulation: $\Pi/4$ -DQPSK


Middle Channel: 2441 MHz.

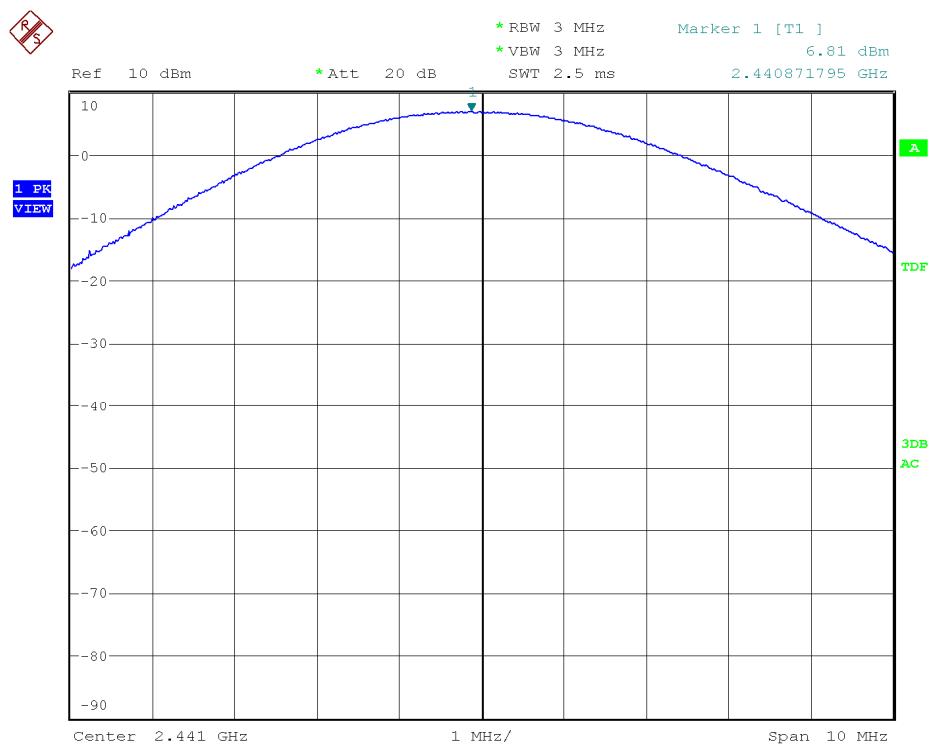

PEAK OUTPUT POWER (RADIATED).

Modulation: $\Pi/4$ -DQPSK


Highest Channel: 2480 MHz.

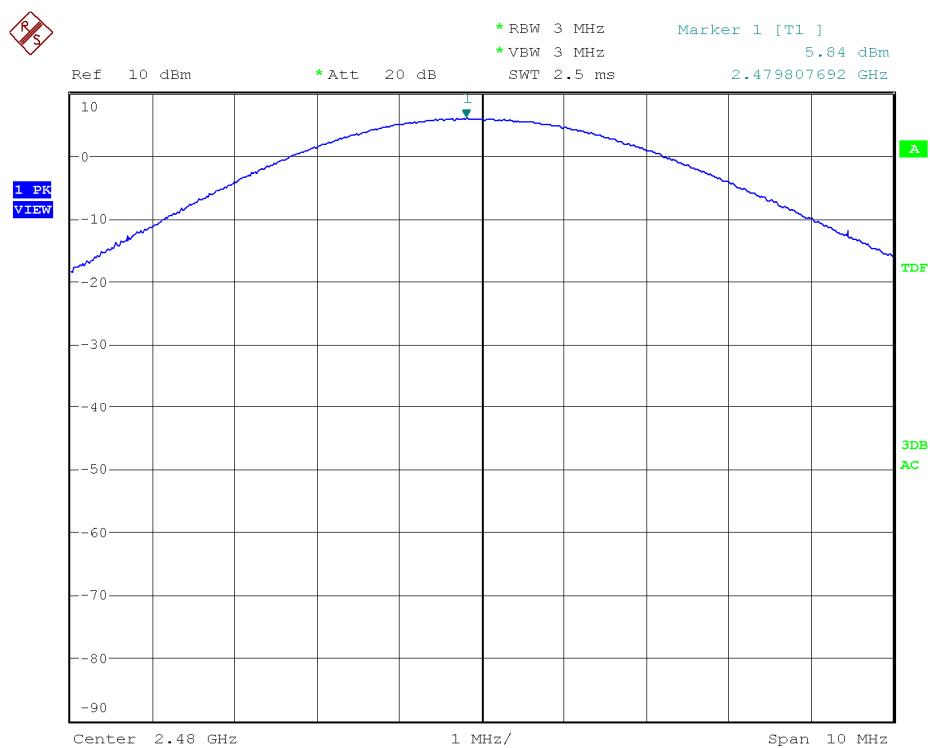

PEAK OUTPUT POWER (RADIATED).


Modulation: 8-DPSK

Lowest Channel: 2402 MHz.

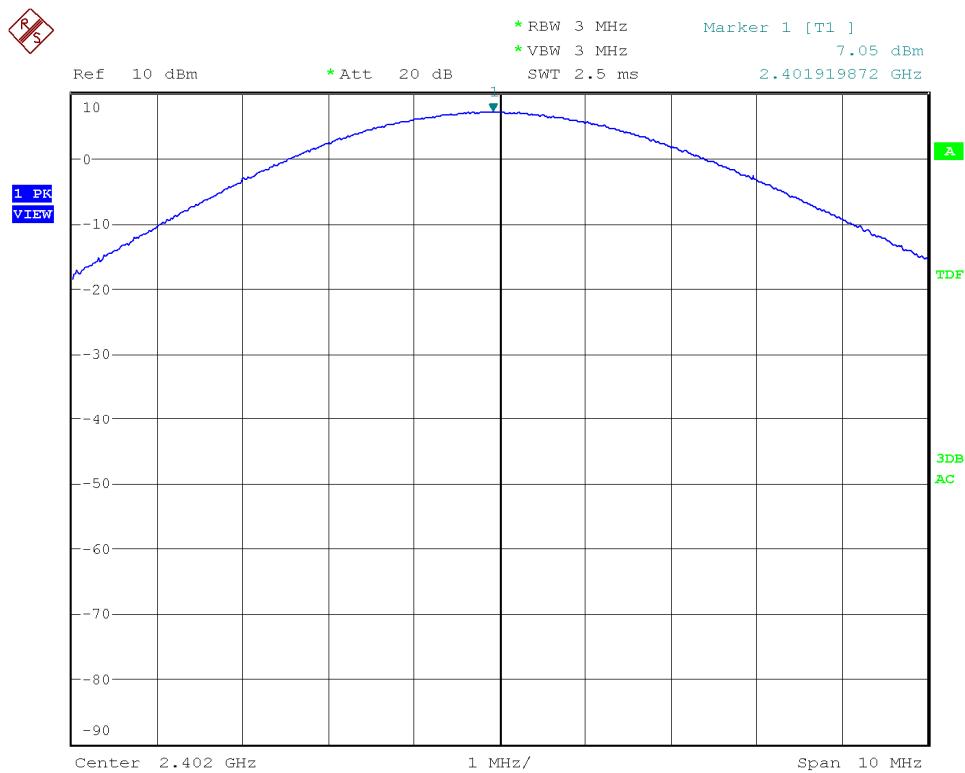

Modulation: 8-DPSK


Middle Channel: 2441 MHz.

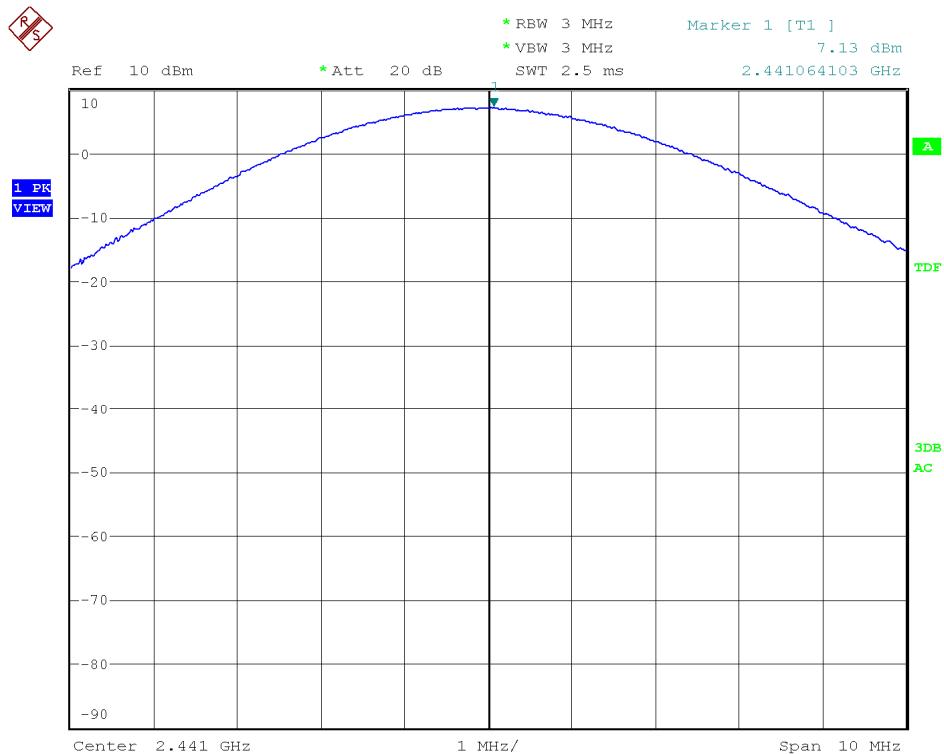

PEAK OUTPUT POWER (RADIATED).

Modulation: 8-DPSK

Highest Channel: 2480 MHz.

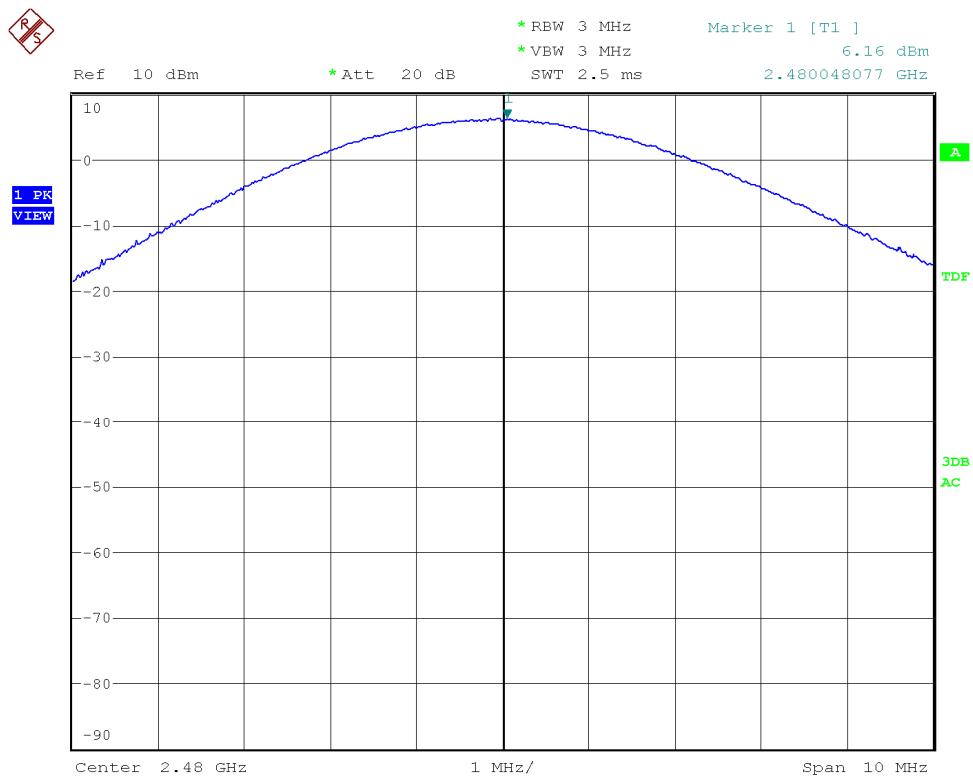

Section 15.247 Subclause (d). Band-edge compliance of conducted emissions (Transmitter)


SPECIFICATION

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

RESULTS:


Modulation: GFSK

1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

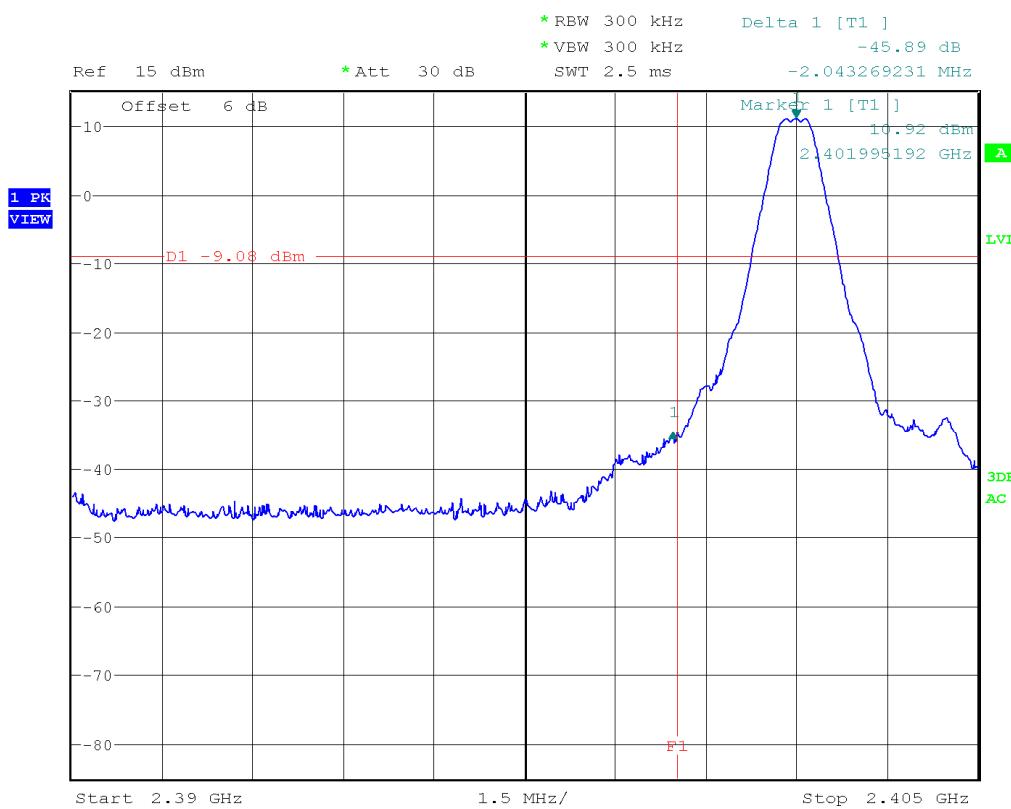


Verdict: PASS

2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

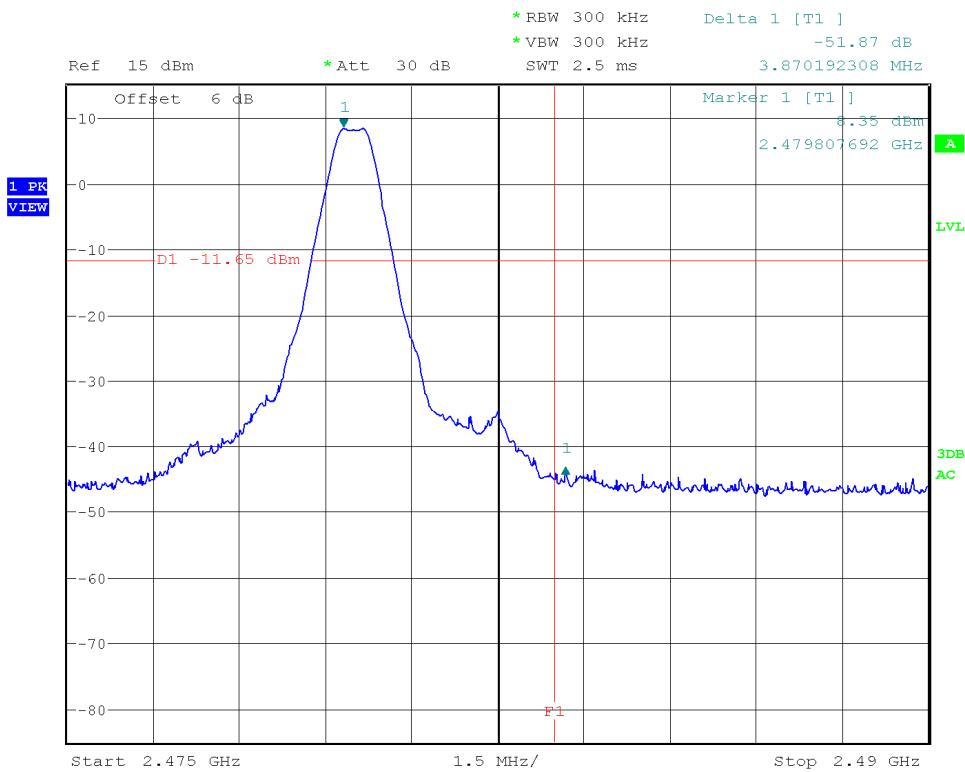


Verdict: PASS

3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

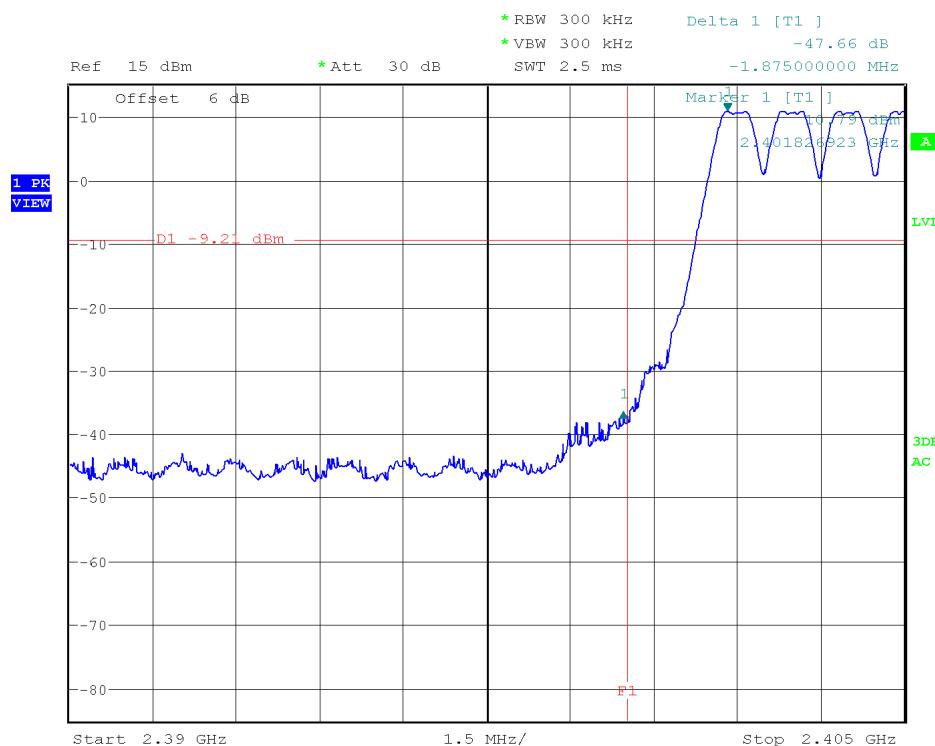

Verdict: PASS


4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

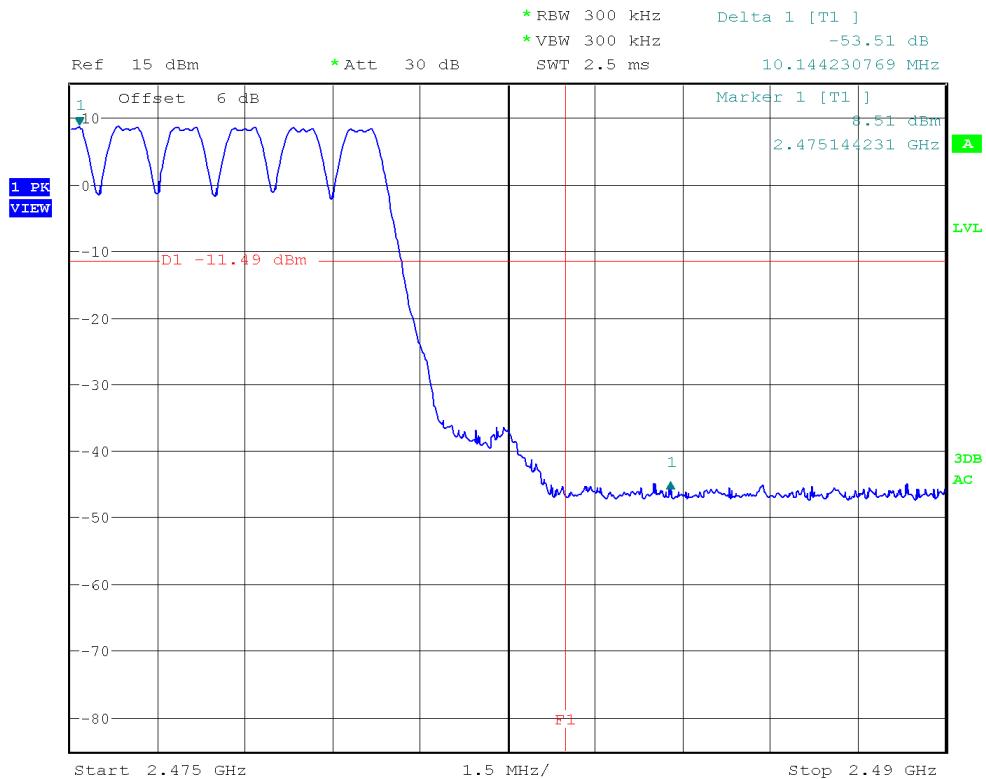

Verdict: PASS


Modulation: $\Pi/4$ -DQPSK

1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

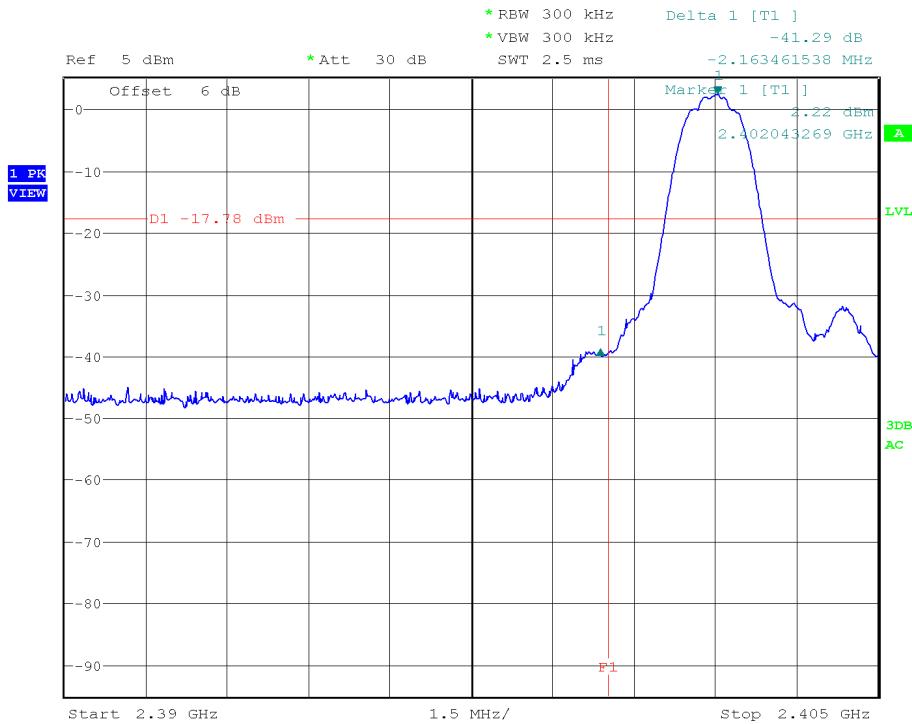


Verdict: PASS

2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

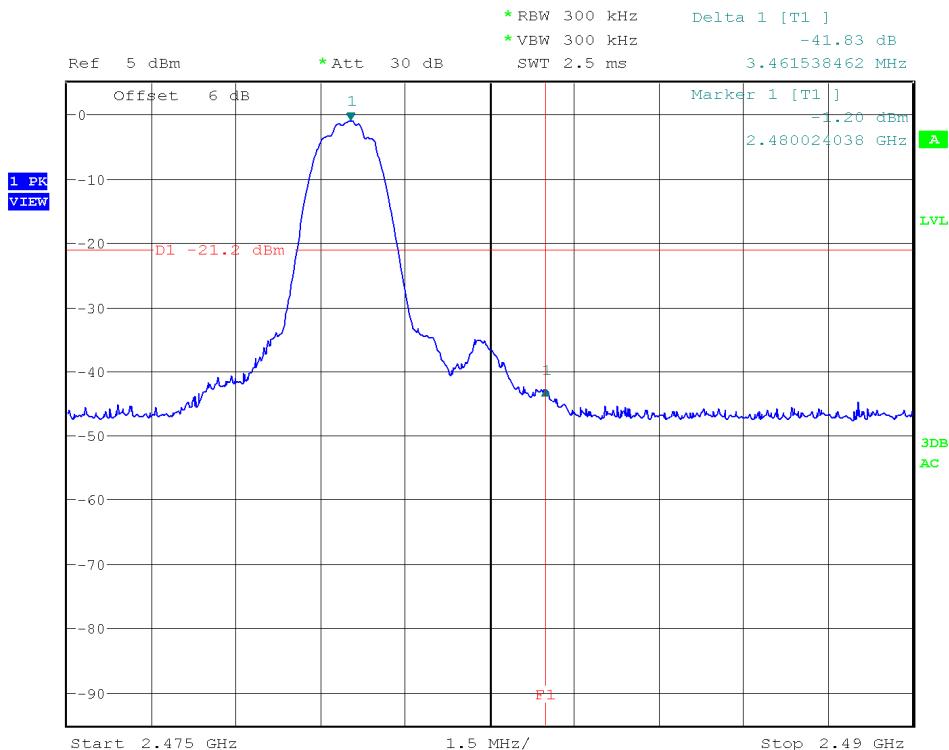


Verdict: PASS

3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

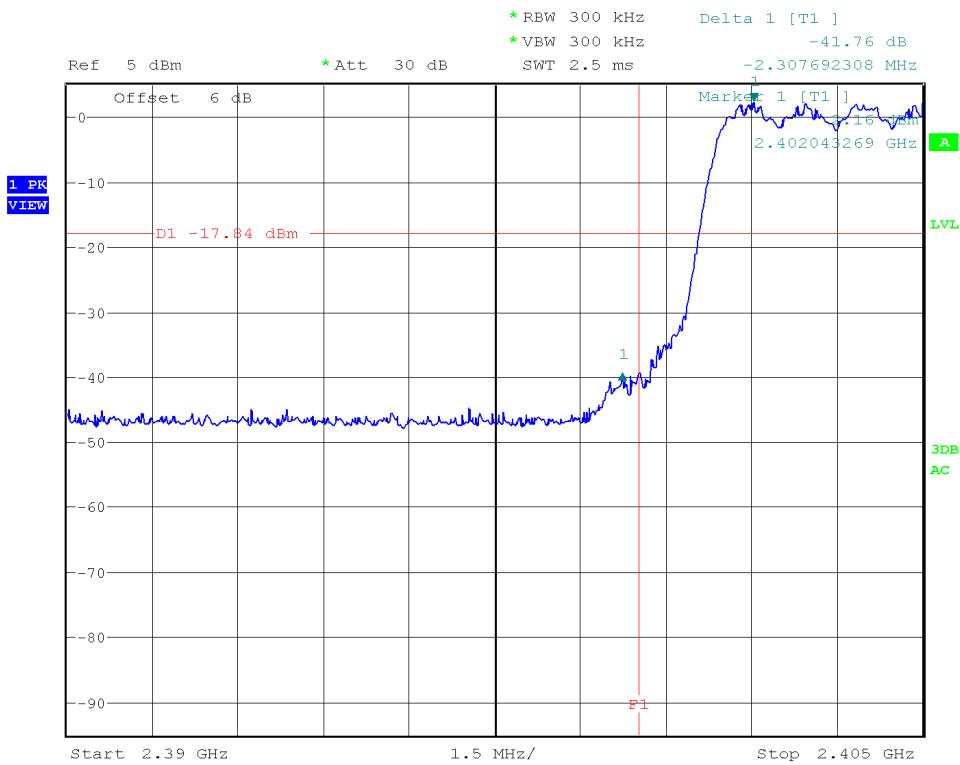

Verdict: PASS


4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

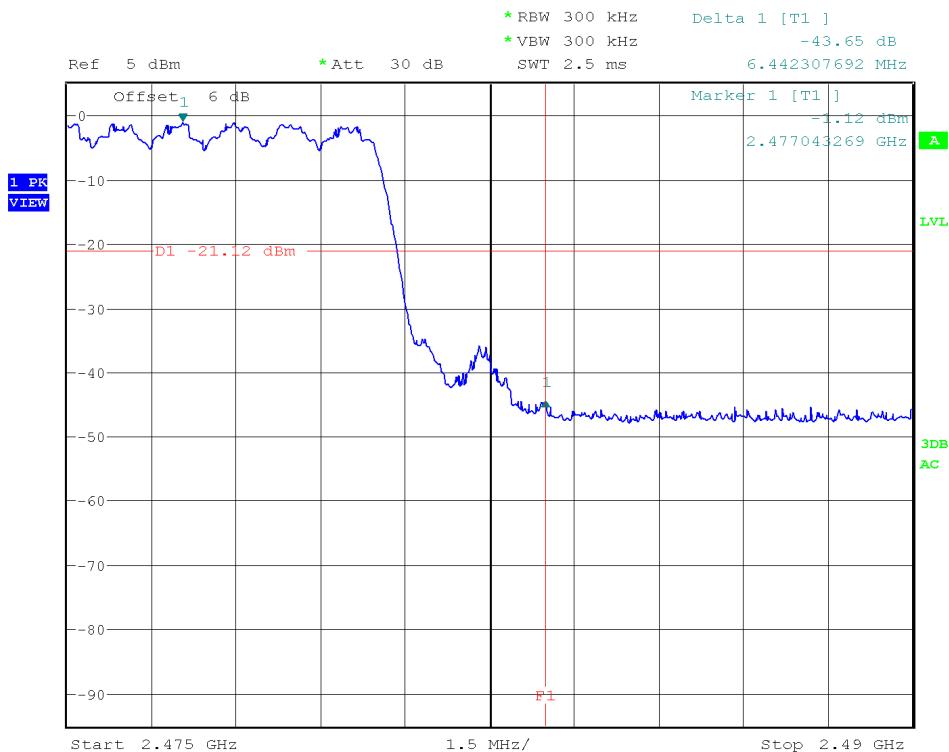

Verdict: PASS


Modulation: 8-DPSK

1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

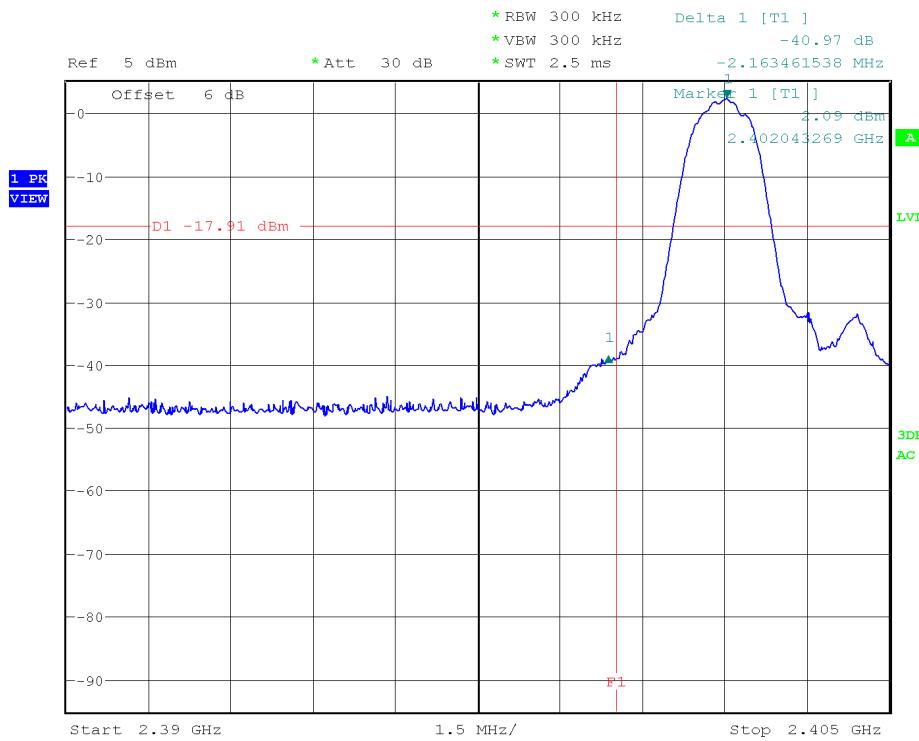


Verdict: PASS

2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

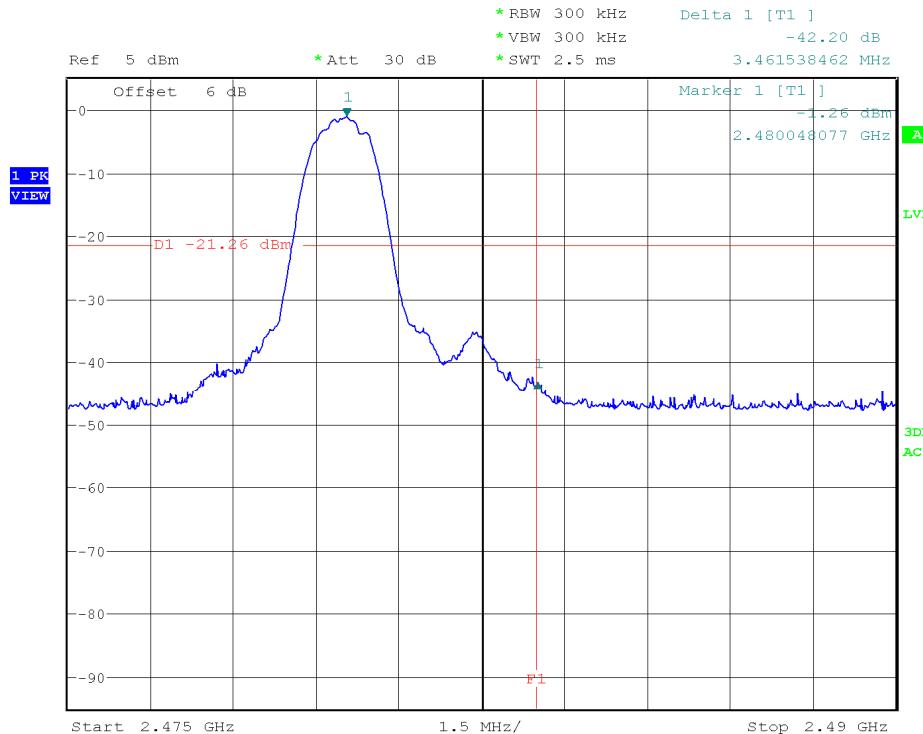


Verdict: PASS

3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

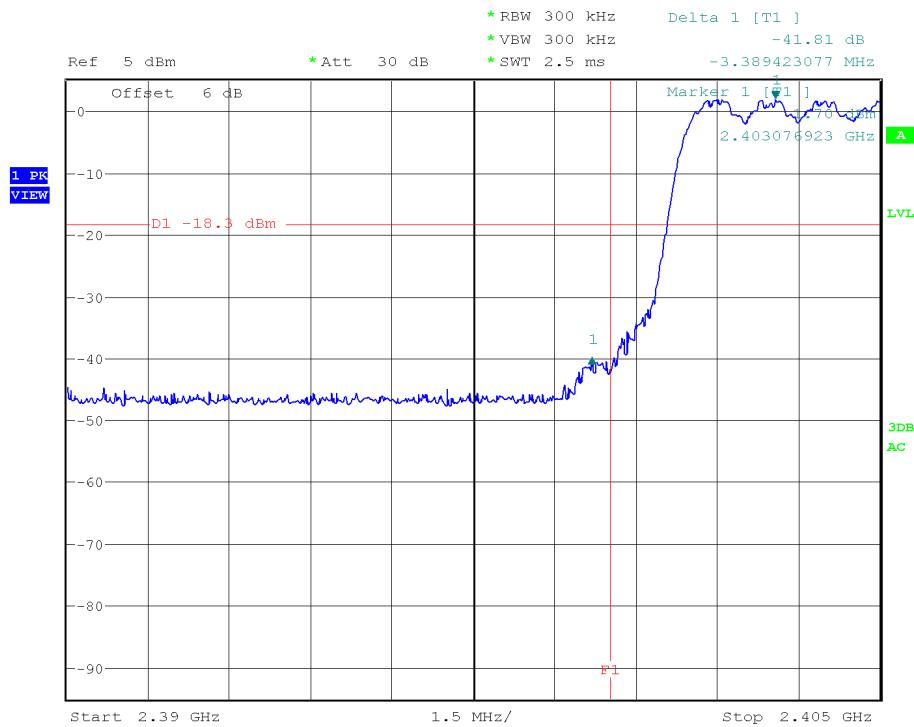

Verdict: PASS

4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

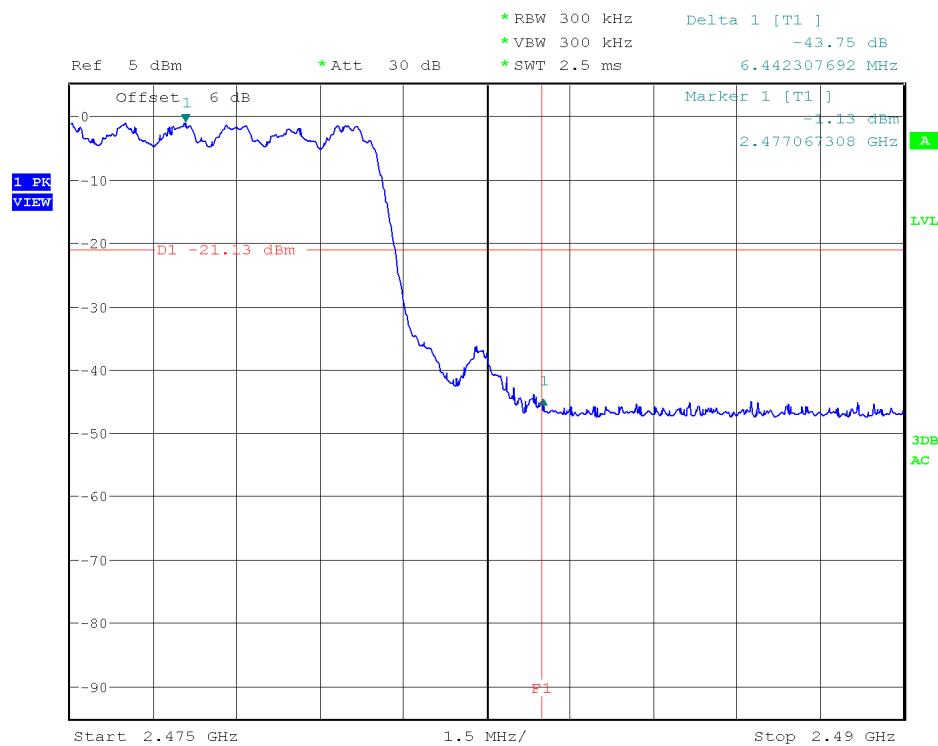

Verdict: PASS

Section 15.247 Subclause (d). Band-edge compliance of radiated emissions (Transmitter)

SPECIFICATION:

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20 dB below the highest level of the desired power.

RESULTS:


Band-edge compliance of radiated emissions

Maximum peak and average field strength of fundamental emission at 3 m distance

HIGHEST CHANNEL (2480 MHz):


Modulation: GFSK

Maximum field strength at 3 m. Peak value.

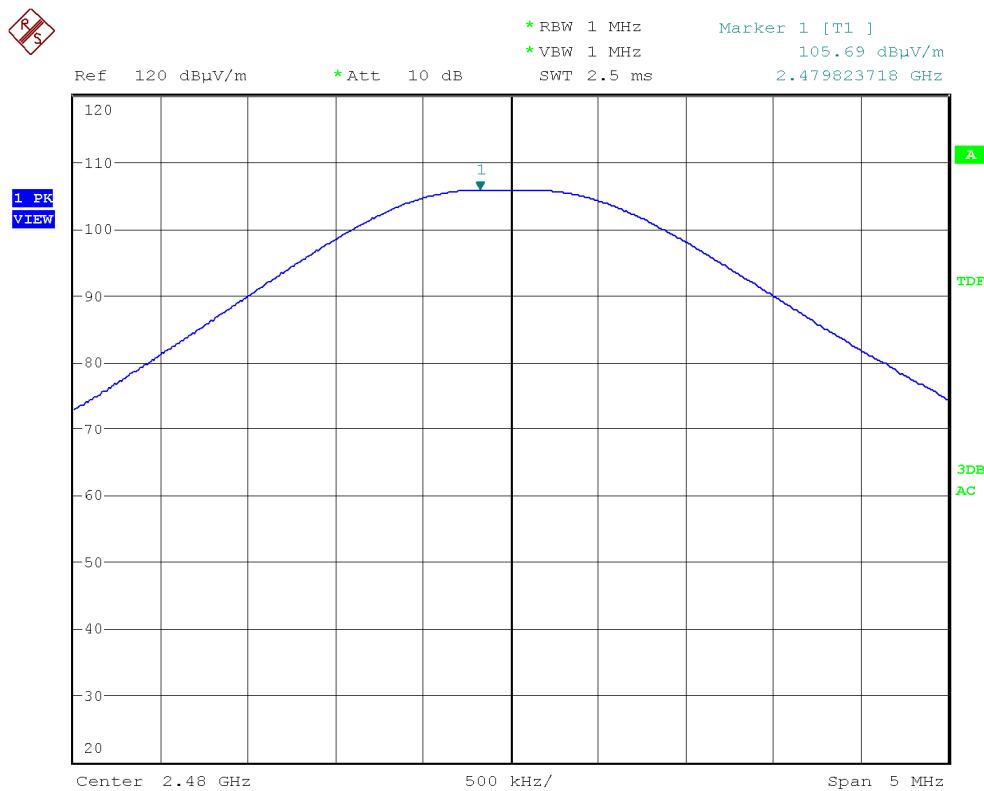

Note: The correction factor is already included in the spectrum analyzer as a transducer factor so that the marker shows directly the field strength level.


Maximum field strength at 3 m. Average value.

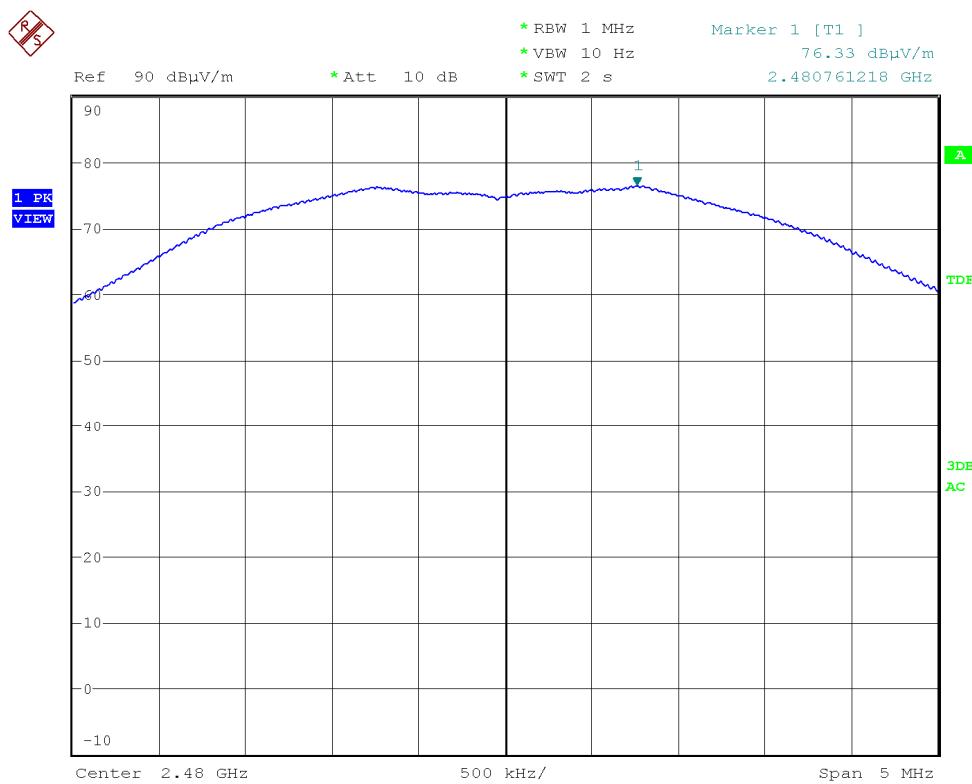


Note: The correction factor is already included in the spectrum analyzer as a transducer factor so that the marker shows directly the field strength level.

BAND-EDGE COMPLIANCE. RADIATED. Marker-Delta Method.

Single carrier

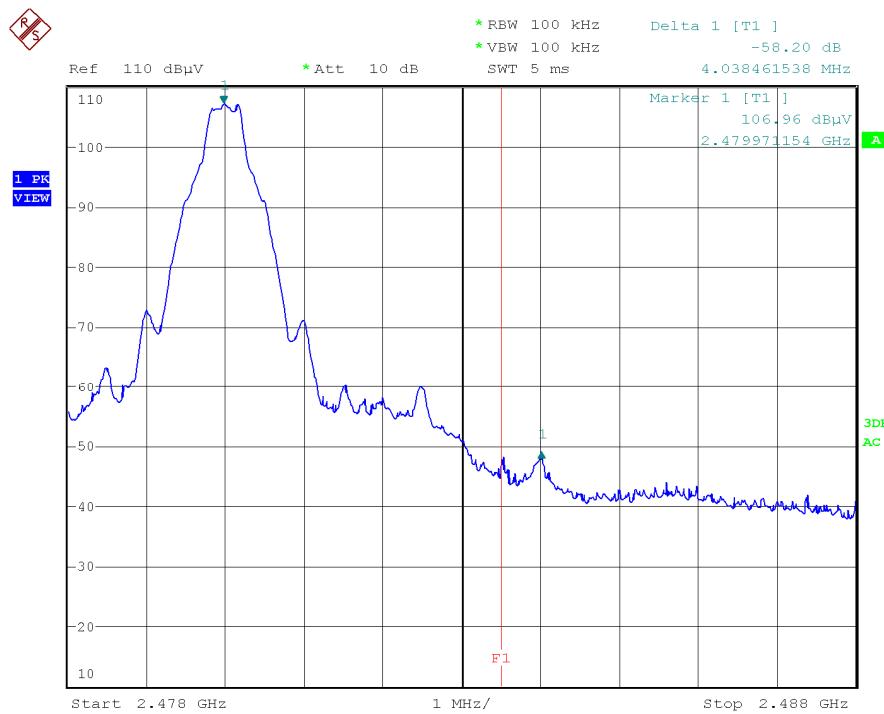

Hopping mode

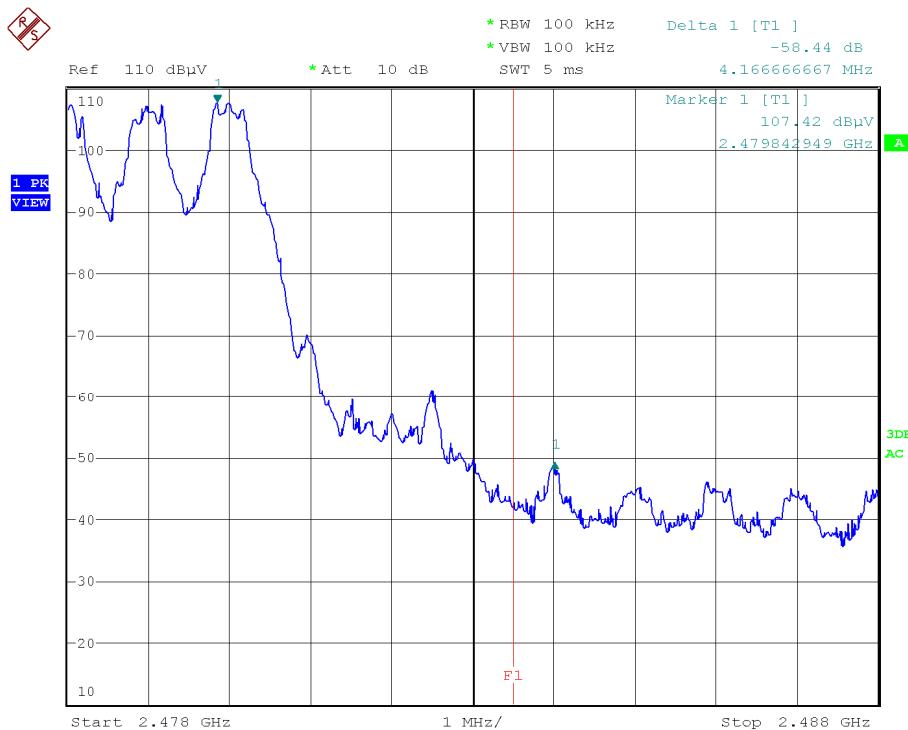

Note: No correction is applied for this relative measurement.


Fundamental max. average value 3 m	Delta value	Calculated value 3 m	Limit
76.33 dB μ V/m	58.20 dB (single carrier) 58.44 dB (hopping mode)	18.13 dB μ V/m (single carrier) 17.89 dB μ V/m (hopping mode)	54 dB μ V/m

Fundamental max. Peak value 3 m	Delta value	Calculated value 3 m	Limit
105.69 dB μ V/m	58.20 dB (single carrier) 58.44 dB (hopping mode)	47.49 dB μ V/m (single carrier) 47.25 dB μ V/m (hopping mode)	74 dB μ V/m


Verdict: PASS

Modulation: $\Pi/4$ -DQPSK

Maximum field strength at 3 m. Peak value.

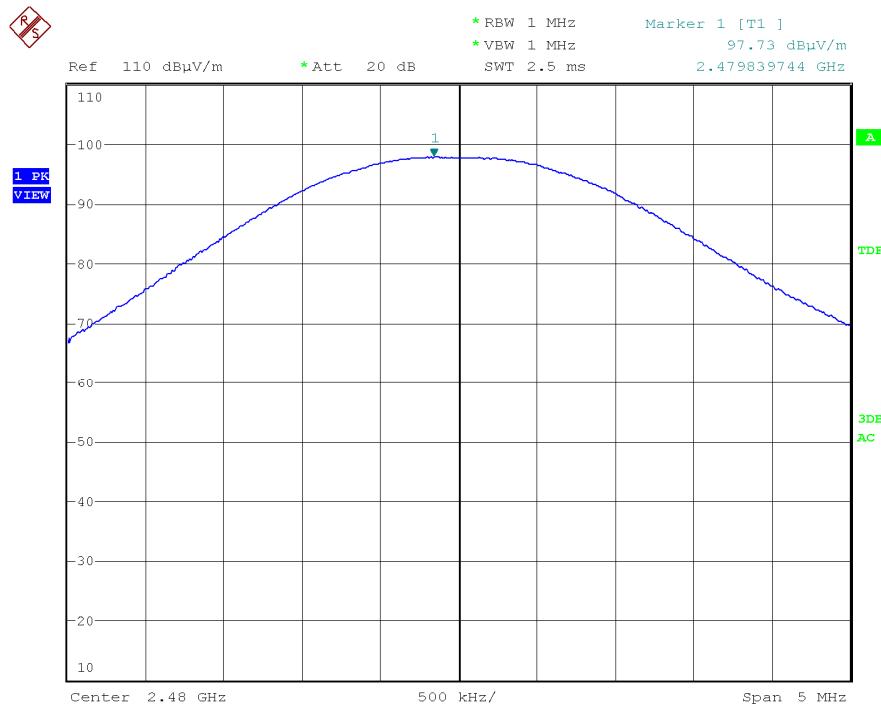


Maximum field strength at 3 m. Average value.

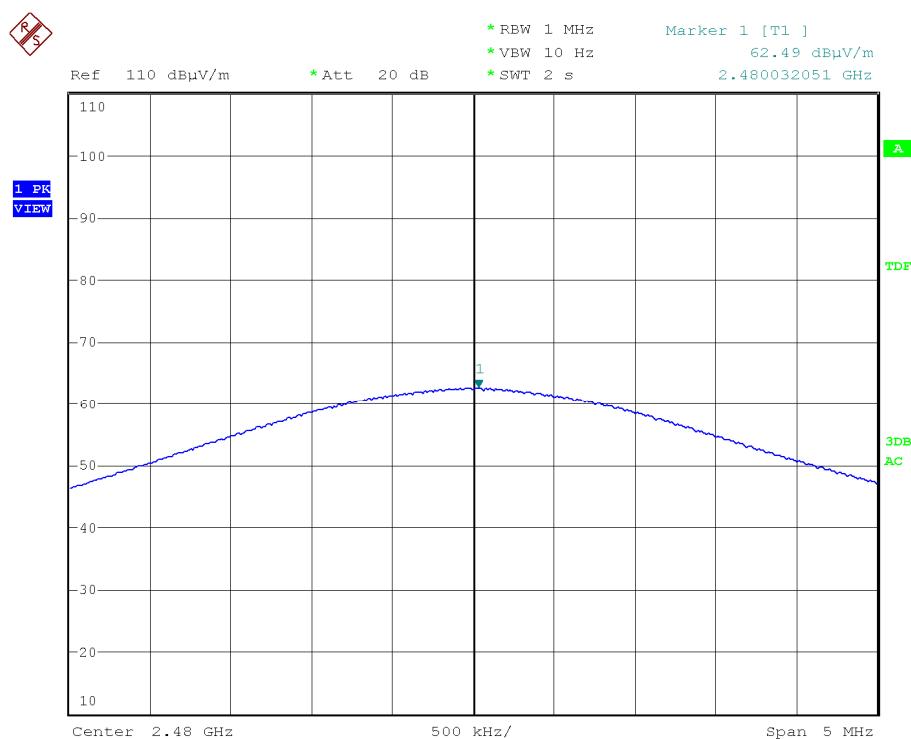


Note: The correction factor is already included in the spectrum analyzer as a transducer factor so that the marker shows directly the field strength level.

BAND-EDGE COMPLIANCE. RADIATED. Marker-Delta Method.

Single carrier

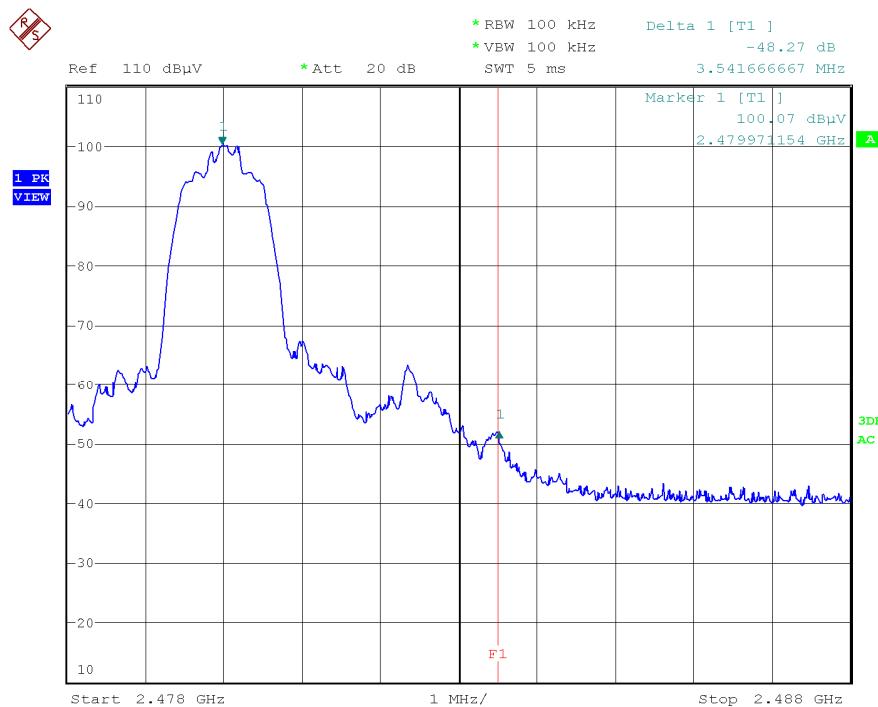

Hopping mode

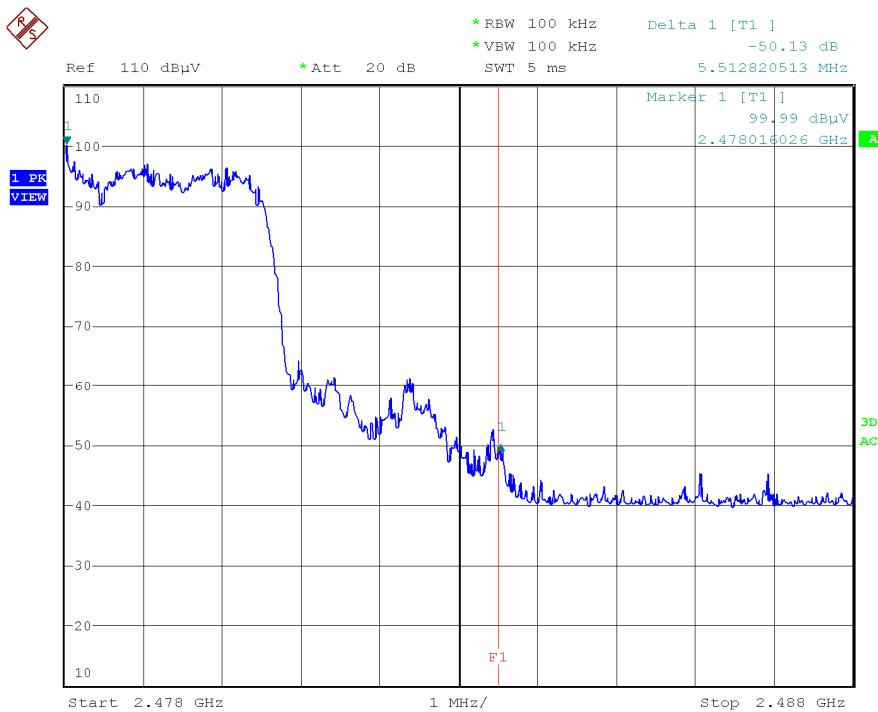

Note: No correction is applied for this relative measurement.


Fundamental max. average value 3 m	Delta value	Calculated value 3 m	Limit
62.49 dB μ V/m	48.27 dB (single carrier) 50.13 dB (hopping mode)	14.22 dB μ V/m (single carrier) 12.36 dB μ V/m (hopping mode)	54 dB μ V/m

Fundamental max. Peak value 3 m	Delta value	Calculated value 3 m	Limit
97.73 dB μ V/m	48.27 dB (single carrier) 50.13 dB (hopping mode)	49.46 dB μ V/m (single carrier) 47.60 dB μ V/m (hopping mode)	74 dB μ V/m


Verdict: PASS

Modulation: 8-DPSK

Maximum field strength at 3 m. Peak value.

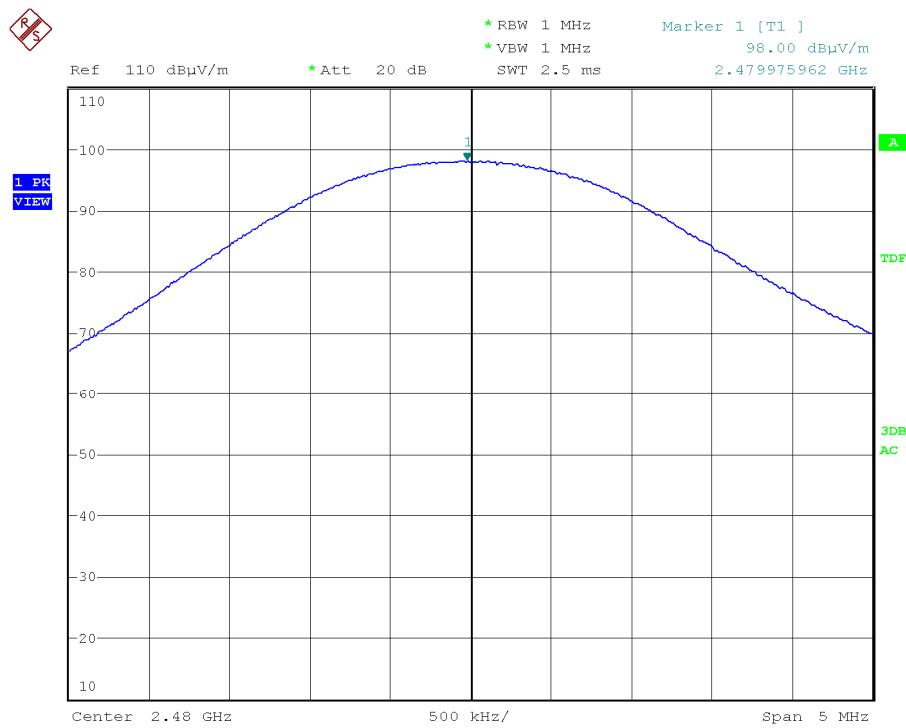


Maximum field strength at 3 m. Average value.

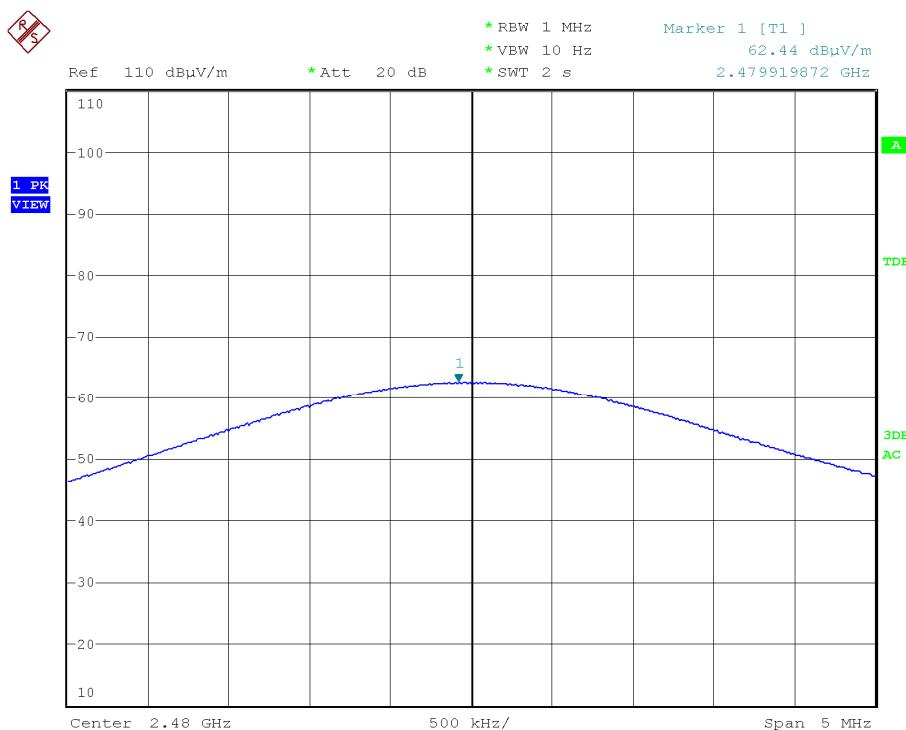


Note: The correction factor is already included in the spectrum analyzer as a transducer factor so that the marker shows directly the field strength level.

BAND-EDGE COMPLIANCE. RADIATED. Marker-Delta Method.

Single carrier

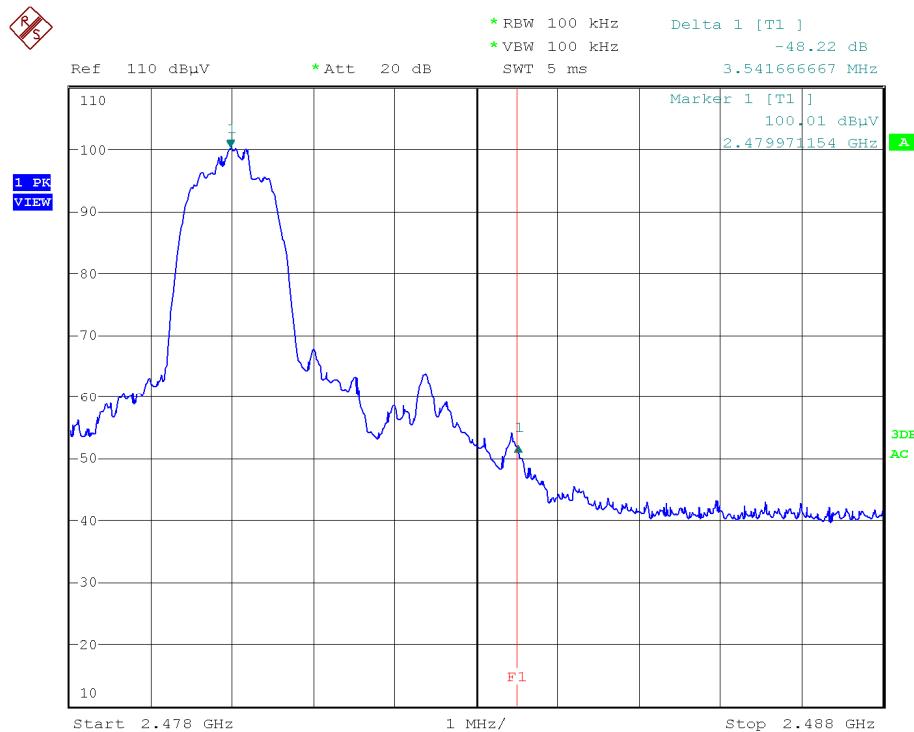

Hopping mode

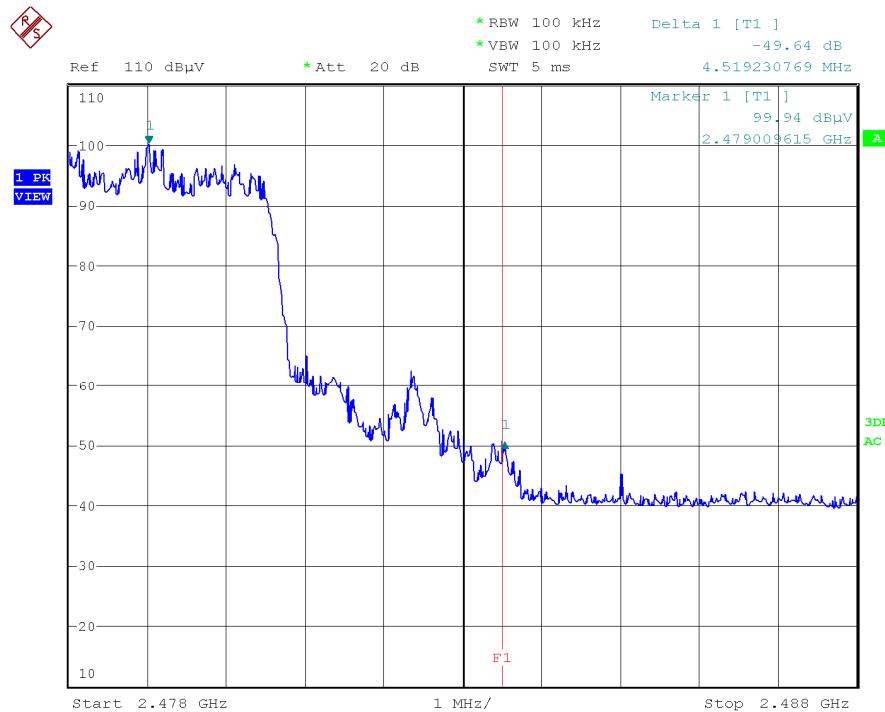

Note: No correction is applied for this relative measurement.

Fundamental max. average value 3 m	Delta value	Calculated value 3 m	Limit
62.44 dB μ V/m	48.22 dB (single carrier) 49.64 dB (hopping mode)	14.22 dB μ V/m (single carrier) 12.80 dB μ V/m (hopping mode)	54 dB μ V/m

Fundamental max. Peak value 3 m	Delta value	Calculated value 3 m	Limit
98.00 dB μ V/m	48.22 dB (single carrier) 49.64 dB (hopping mode)	49.78 dB μ V/m (single carrier) 48.36 dB μ V/m (hopping mode)	74 dB μ V/m

Verdict: PASS

Section 15.247 Subclause (d). Emission limitations conducted (Transmitter)


SPECIFICATION

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

RESULTS:

Modulation: GFSK


1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

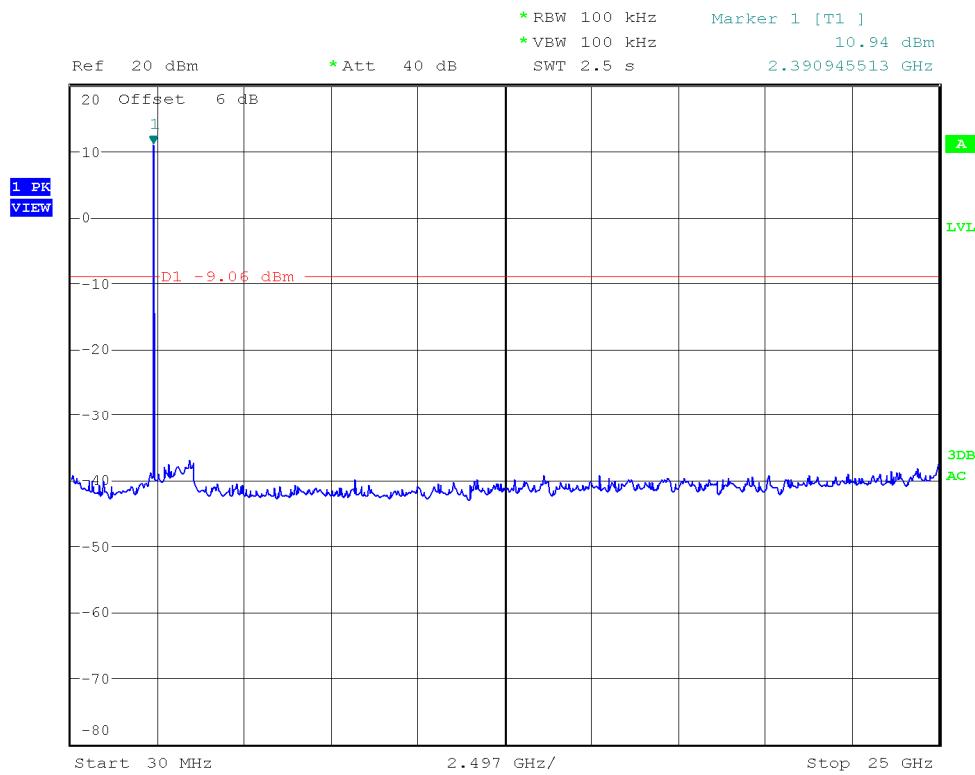

Note: The peak above the limit is the carrier frequency.

Verdict: PASS


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

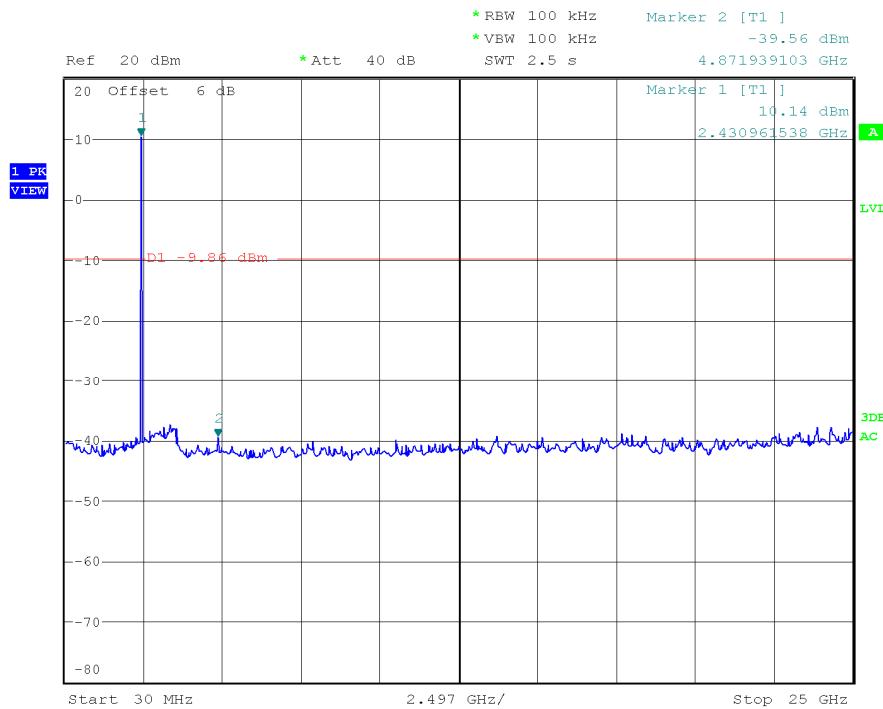

Note: The peak above the limits is the carrier frequency.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

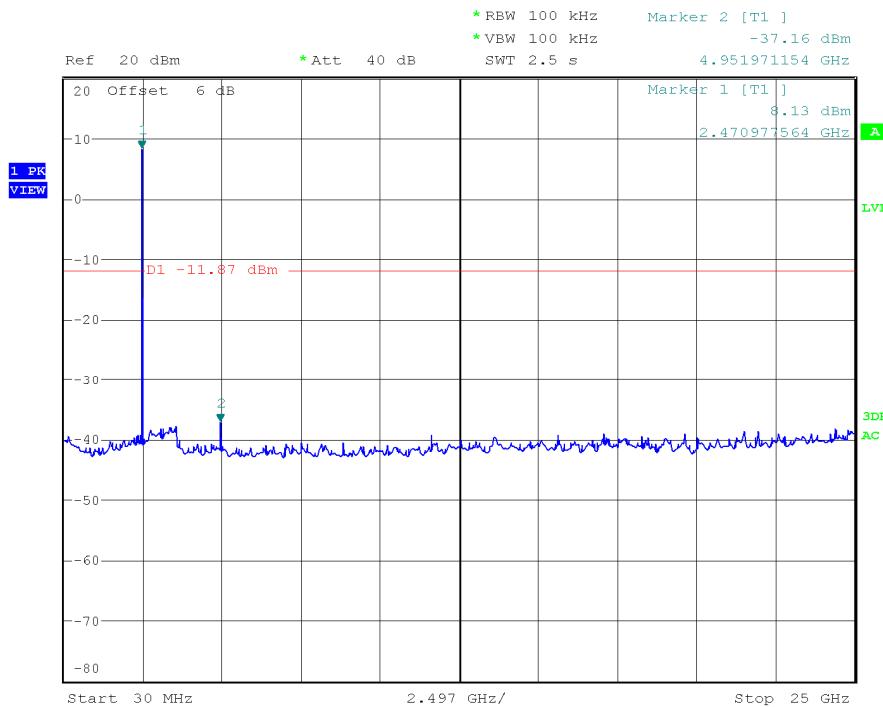


Note: The peak above the limits is the carrier frequency.

Verdict: PASS

Modulation: Π/4-DQPSK


1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

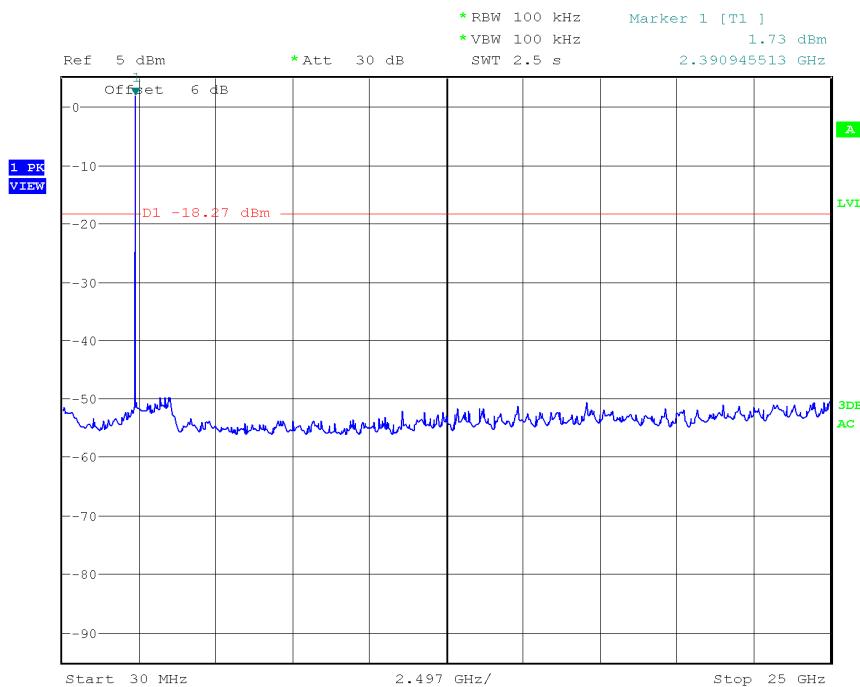

Note: The peak above the limits is the carrier frequency.

Verdict: PASS


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

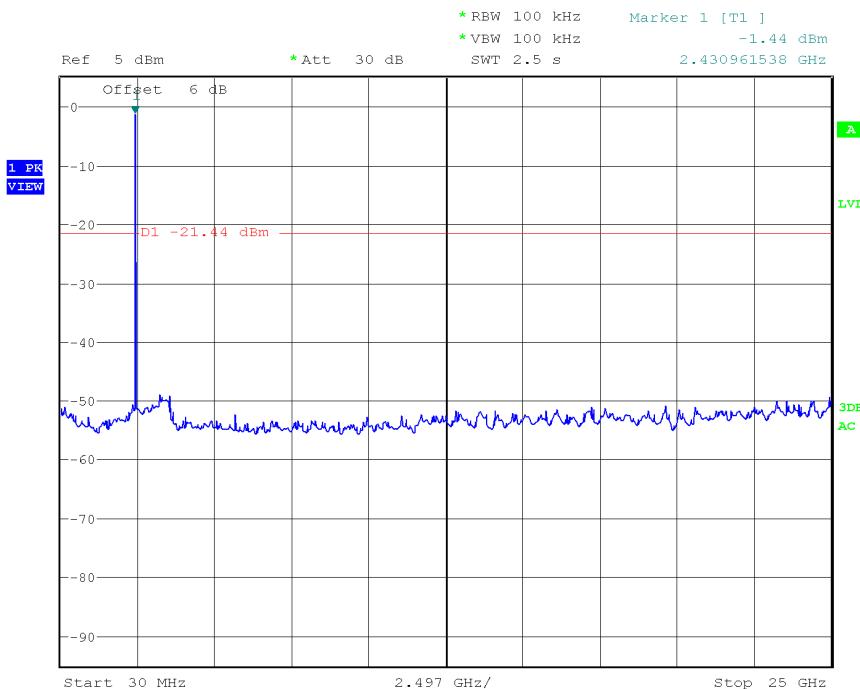

Note: The peaks above the limits are the carrier frequencies.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

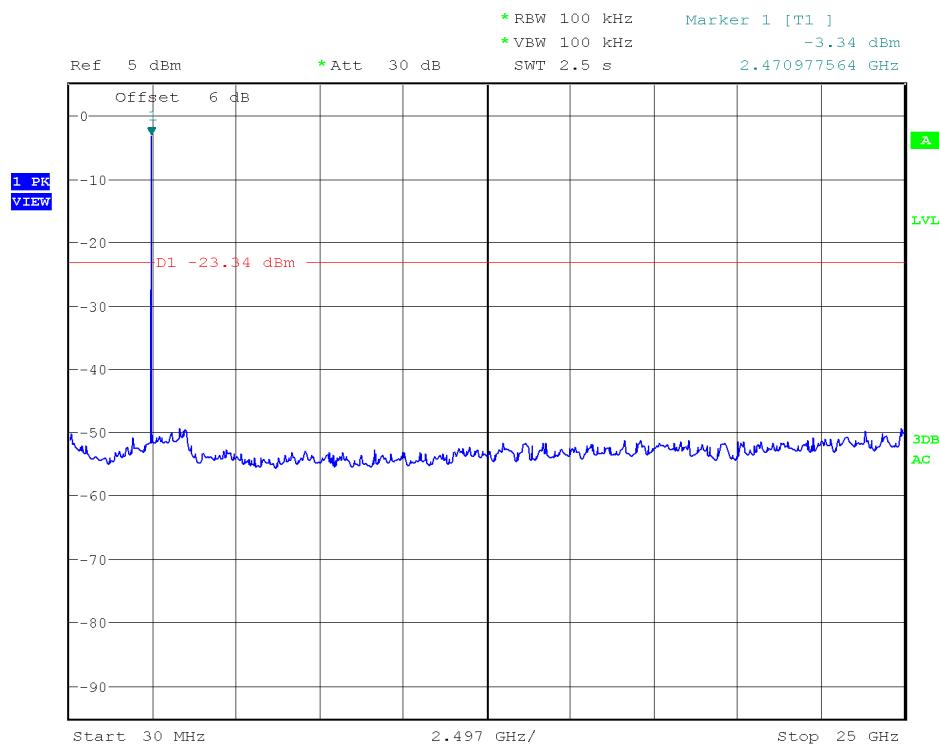


Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Modulation: 8-DPSK


1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

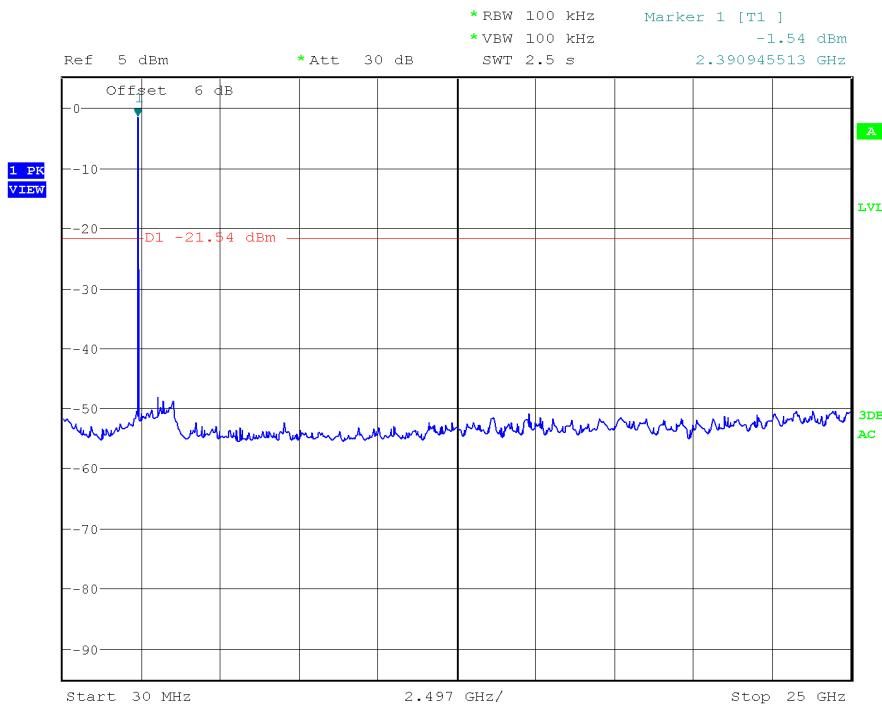

Note: The peak above the limits is the carrier frequency.

Verdict: PASS


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

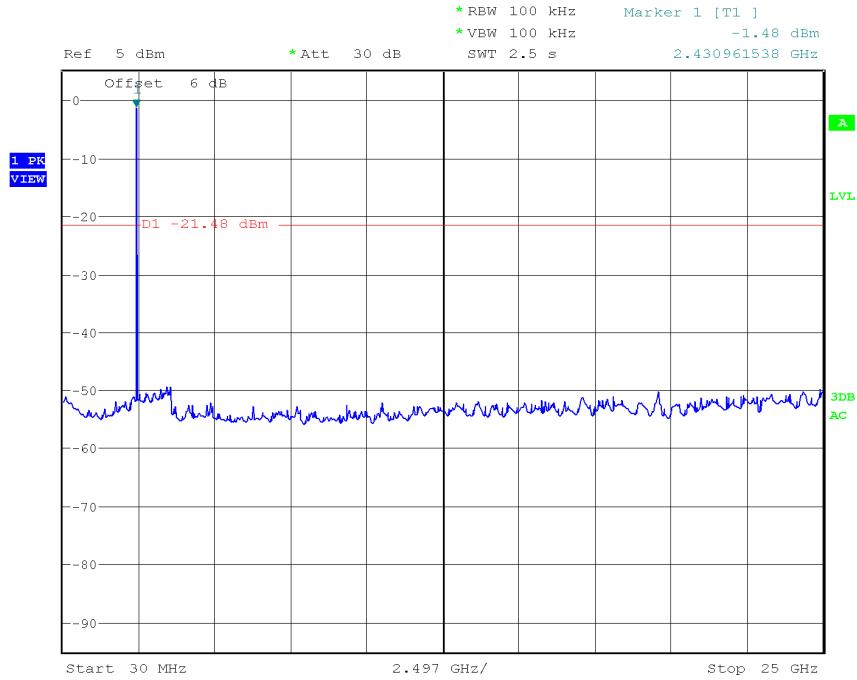

Note: The peaks above the limit are the carrier frequencies.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

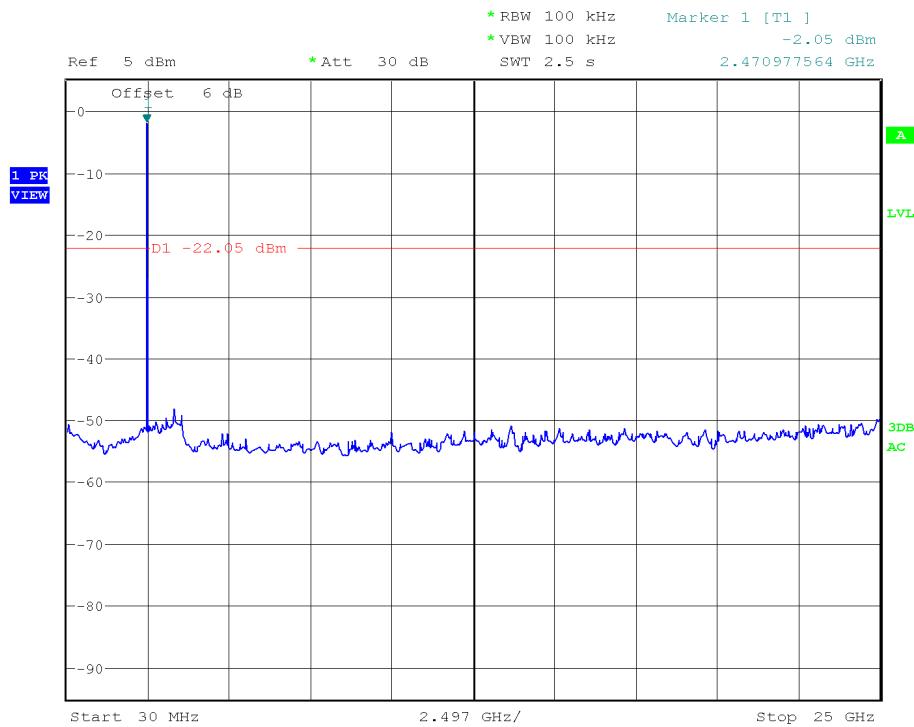

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Section 15.247 Subclause (d). Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The equipment transmits continuously in the selected channel so it is not necessary a duty cycle correction factor.

Frequency range 30 MHz-1000 MHz.

No spurious signals found in all the range for all modulation modes.

Frequency range 1 GHz-25 GHz

Modulation: GFSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2337.821	V	Peak	43.18	± 4.0
2337.821	V	Average	33.83	± 4.0
2358.333	V	Peak	43.81	± 4.0
2358.333	V	Average	31.20	± 4.0
2365.769	V	Peak	46.61	± 4.0
2365.769	V	Average	33.77	± 4.0
2369.744	V	Peak	47.45	± 4.0
2369.744	V	Average	35.00	± 4.0
2376.026	V	Peak	52.05	± 4.0
2376.026	V	Average	42.29	± 4.0
2381.923	V	Peak	50.57	± 4.0
2381.923	V	Average	38.30	± 4.0
2386.025	V	Peak	50.11	± 4.0
2386.025	V	Average	37.58	± 4.0
2390.000	V	Peak	50.89	± 4.0
2390.000	V	Average	37.27	± 4.0
2497.792	V	Peak	42.55	± 4.0
2497.792	V	Average	33.15	± 4.0
3203.317	V	Peak	45.40	± 4.0
3203.317	V	Average	28.63	± 4.0
4002.980	V	Peak	28.65	± 4.0
4002.980	V	Average	24.83	± 4.0
4803.904	V	Peak	57.36	± 4.0
4803.904	V	Average	50.01	± 4.0
7205.897	V	Peak	46.86	± 4.0
7205.897	V	Average	32.34	± 4.0

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2312.949	V	Peak	44.42	\pm 4.0
2312.949	V	Average	36.33	\pm 4.0
2345.000	V	Peak	44.87	\pm 4.0
2345.000	V	Average	36.58	\pm 4.0
2377.180	V	Peak	45.12	\pm 4.0
2377.180	V	Average	35.43	\pm 4.0
2485.192	V	Peak	42.54	\pm 4.0
2485.192	V	Average	29.90	\pm 4.0
2489.000	V	Peak	38.85	\pm 4.0
2489.000	V	Average	26.02	\pm 4.0
2492.702	V	Peak	40.64	\pm 4.0
2492.702	V	Average	27.57	\pm 4.0
3255.353	V	Peak	40.27	\pm 4.0
3255.353	V	Average	25.96	\pm 4.0
4068.237	V	Peak	38.05	\pm 4.0
4068.237	V	Average	24.78	\pm 4.0
4881.939	V	Peak	55.34	\pm 4.0
4881.939	V	Average	37.23	\pm 4.0
7322.837	V	Peak	46.57	\pm 4.0
7322.837	V	Average	32.54	\pm 4.0

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2319.872	V	Peak	44.95	± 4.0
2319.872	V	Average	36.17	± 4.0
2323.846	V	Peak	37.95	± 4.0
2323.846	V	Average	26.26	± 4.0
2351.923	V	Peak	47.35	± 4.0
2351.923	V	Average	39.43	± 4.0
2376.154	V	Peak	42.18	± 4.0
2376.154	V	Average	30.05	± 4.0
2384.231	V	Peak	46.99	± 4.0
2384.231	V	Average	38.47	± 4.0
2483.500	V	Peak	55.45	± 4.0
2483.500	V	Average	45.98	± 4.0
2491.988	V	Peak	48.24	± 4.0
2491.988	V	Average	35.94	± 4.0
2495.981	V	Peak	47.59	± 4.0
2495.981	V	Average	32.37	± 4.0
2499.974	V	Peak	46.78	± 4.0
2499.974	V	Average	34.00	± 4.0
3397.260	V	Peak	39.10	± 4.0
3397.260	V	Average	24.89	± 4.0
4959.904	V	Peak	55.01	± 4.0
4959.904	V	Average	36.85	± 4.0
7439.885	V	Peak	43.93	± 4.0
7439.885	V	Average	31.56	± 4.0

Verdict: PASS

Modulation: $\Pi/4$ -DQPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2337.949	V	Peak	37.84	± 4.0
2337.949	V	Average	27.83	± 4.0
2370.1282	V	Peak	42.59	± 4.0
2370.1282	V	Average	33.25	± 4.0
2376.026	V	Peak	45.10	± 4.0
2376.026	V	Average	37.02	± 4.0
2386.026	V	Peak	47.92	± 4.0
2386.026	V	Average	40.42	± 4.0
2497.911	V	Peak	34.30	± 4.0
2497.911	V	Average	24.69	± 4.0
3203.125	V	Peak	39.30	± 4.0
3203.125	V	Average	24.80	± 4.0
4796.875	V	Peak	45.09	± 4.0
4796.875	V	Average	29.10	± 4.0
9687.500	V	Peak	48.58	± 4.0
9687.500	V	Average	36.03	± 4.0

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2313.205	V	Peak	37.13	± 4.0
2313.205	V	Average	28.98	± 4.0
2344.872	V	Peak	37.74	± 4.0
2344.872	V	Average	28.01	± 4.0
2377.051	V	Peak	38.63	± 4.0
2377.051	V	Average	28.30	± 4.0
2488.868	V	Peak	36.81	± 4.0
2488.868	V	Average	26.30	± 4.0
3250.000	V	Peak	37.51	± 4.0
3250.000	V	Average	24.67	± 4.0
4875.000	V	Peak	42.35	± 4.0
4875.000	V	Average	27.68	± 4.0
9687.500	V	Peak	50.30	± 4.0
9687.500	V	Average	36.26	± 4.0

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2320.000	V	Peak	37.37	± 4.0
2320.000	V	Average	28.30	± 4.0
2352.051	V	Peak	38.85	± 4.0
2352.051	V	Average	30.48	± 4.0
2384.103	V	Peak	37.46	± 4.0
2384.103	V	Average	28.97	± 4.0
2496.060	V	Peak	40.99	± 4.0
2496.060	V	Average	28.87	± 4.0
3396.875	V	Peak	37.88	± 4.0
3396.875	V	Average	24.36	± 4.0
4958.125	V	Peak	41.17	± 4.0
4958.125	V	Average	27.18	± 4.0
9687.500	V	Peak	49.13	± 4.0
9687.500	V	Average	36.02	± 4.0

Verdict: PASS

Modulation: 8-DPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2337.949	V	Peak	36.95	± 4.0
2337.949	V	Average	27.88	± 4.0
2370.000	V	Peak	42.99	± 4.0
2370.000	V	Average	33.41	± 4.0
2376.026	V	Peak	44.88	± 4.0
2376.026	V	Average	37.08	± 4.0
2497.964	V	Peak	34.66	± 4.0
2497.964	V	Average	24.80	± 4.0
3203.125	V	Peak	37.45	± 4.0
3203.125	V	Average	25.07	± 4.0
4796.875	V	Peak	44.60	± 4.0
4796.875	V	Average	29.26	± 4.0
9687.500	V	Peak	48.88	± 4.0
9687.500	V	Average	36.04	± 4.0

2. CHANNEL: MIDDLE (2441 MHz).


Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2312.821	V	Peak	37.08	± 4.0
2312.821	V	Average	28.90	± 4.0
2376.923	V	Peak	37.53	± 4.0
2376.923	V	Average	28.08	± 4.0
2345.000	V	Peak	36.52	± 4.0
2345.000	V	Average	28.04	± 4.0
2488.947	V	Peak	36.76	± 4.0
2488.947	V	Average	26.11	± 4.0
3250.000	V	Peak	37.54	± 4.0
3250.000	V	Average	24.71	± 4.0
4875.000	V	Peak	41.80	± 4.0
4875.000	V	Average	27.83	± 4.0
9687.500	V	Peak	48.50	± 4.0
9687.500	V	Average	35.48	± 4.0

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2319.744	V	Peak	37.10	\pm 4.0
2319.744	V	Average	28.43	\pm 4.0
2351.923	V	Peak	38.29	\pm 4.0
2351.923	V	Average	30.56	\pm 4.0
2384.231	V	Peak	37.93	\pm 4.0
2384.231	V	Average	28.71	\pm 4.0
2495.981	V	Peak	41.34	\pm 4.0
2495.981	V	Average	28.90	\pm 4.0
3296.875	V	Peak	36.94	\pm 4.0
3296.875	V	Average	24.22	\pm 4.0
4953.125	V	Peak	40.63	\pm 4.0
4953.125	V	Average	26.97	\pm 4.0
9687.500	V	Peak	49.19	\pm 4.0
9687.500	V	Average	35.50	\pm 4.0

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

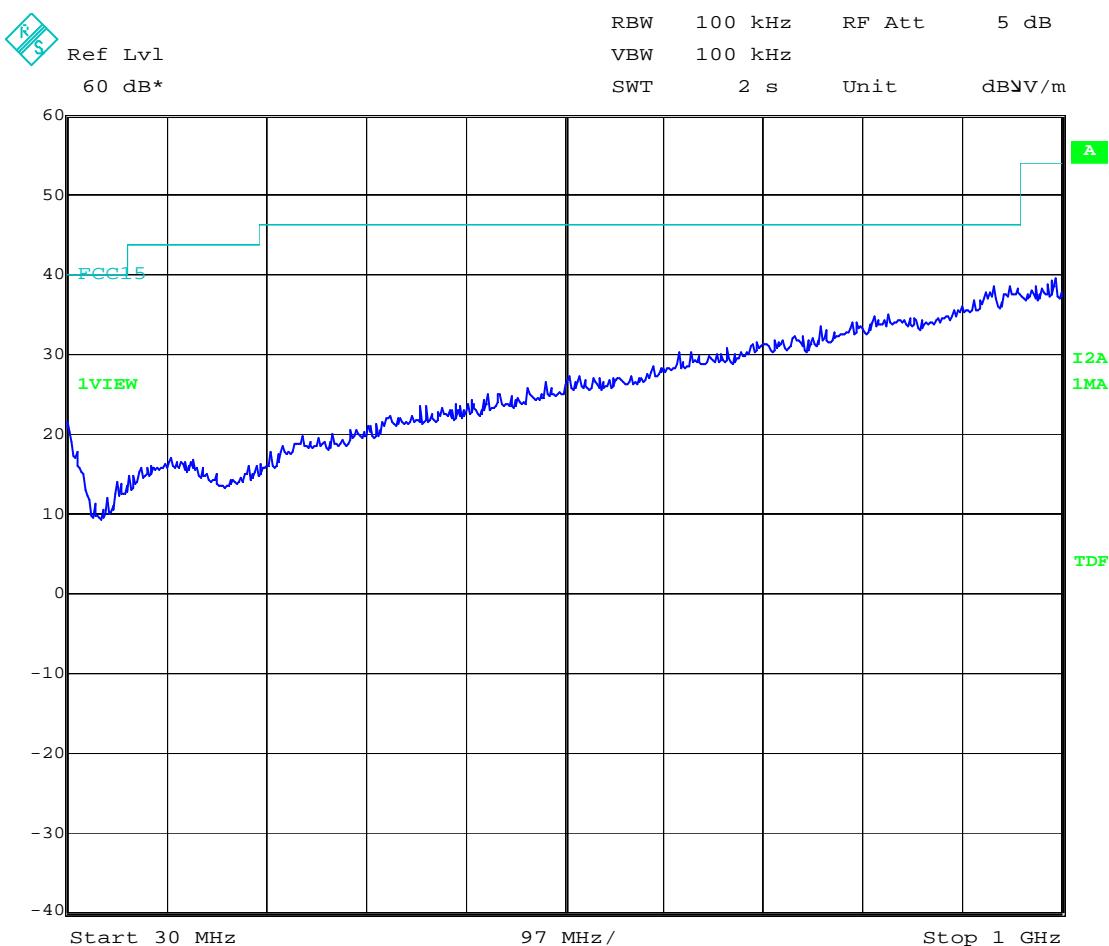


(This plot is valid for all three channels and all modulation modes).

FREQUENCY RANGE 1 GHz to 3 GHz.


Modulation: GFSK

CHANNEL: Lowest (2402 MHz).

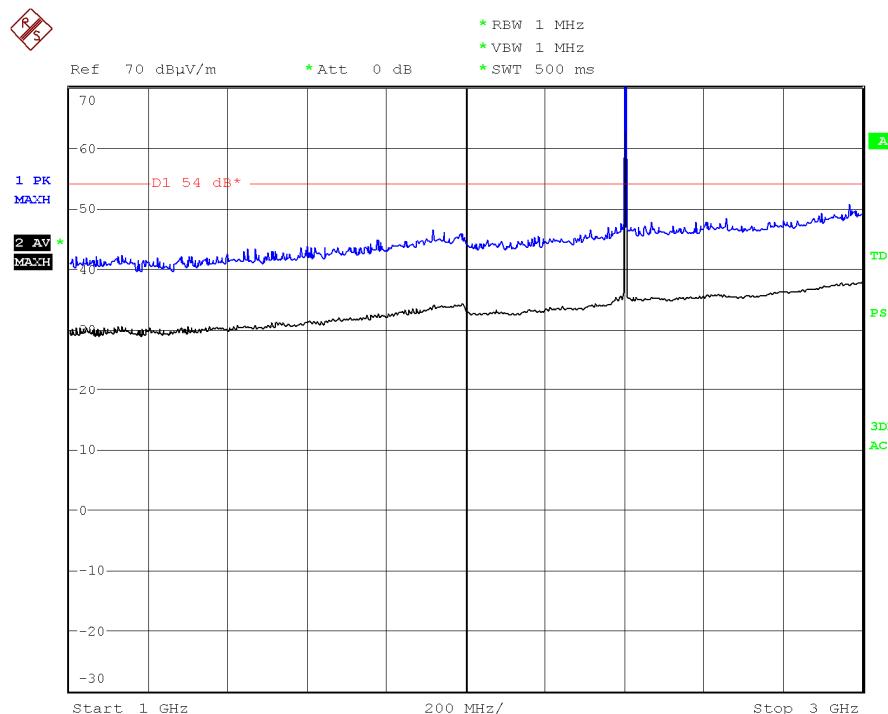


Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Middle (2441 MHz).

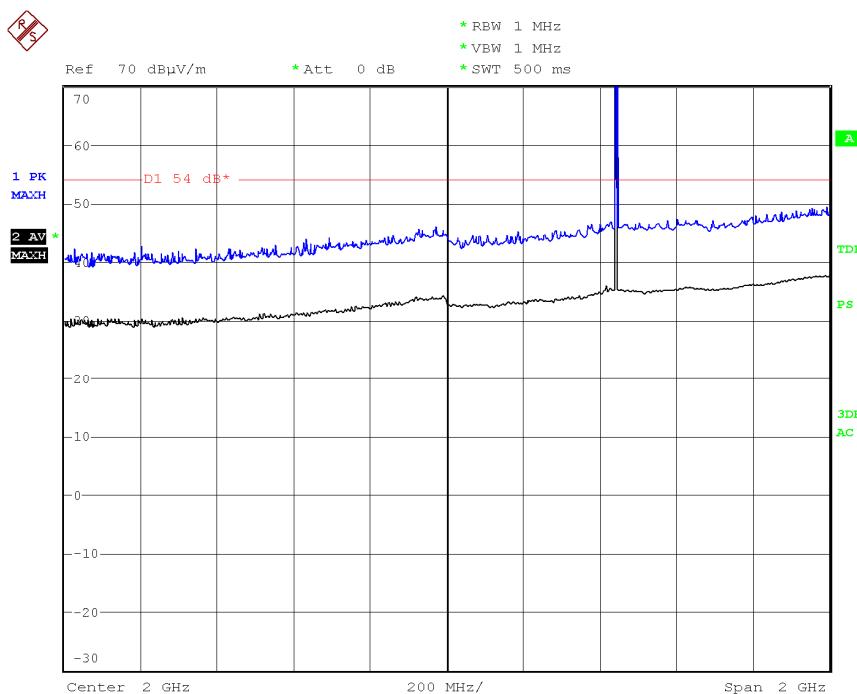

Note: The peak shown in the plot is the carrier frequency.


CHANNEL: Highest (2480 MHz).

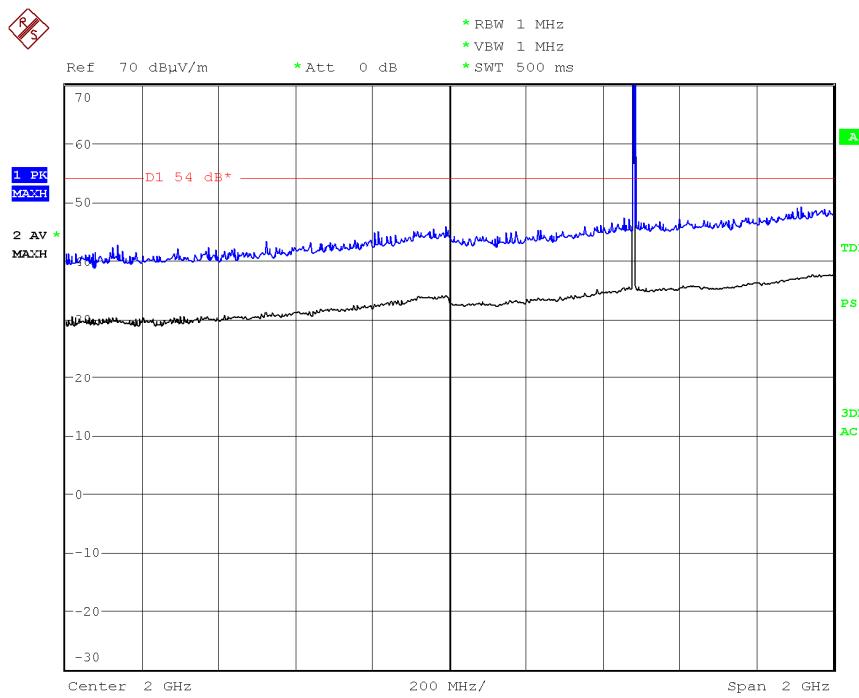

Note: The peak shown in the plot is the carrier frequency.


Modulation: II/4-DQPSK

CHANNEL: Lowest (2402 MHz).

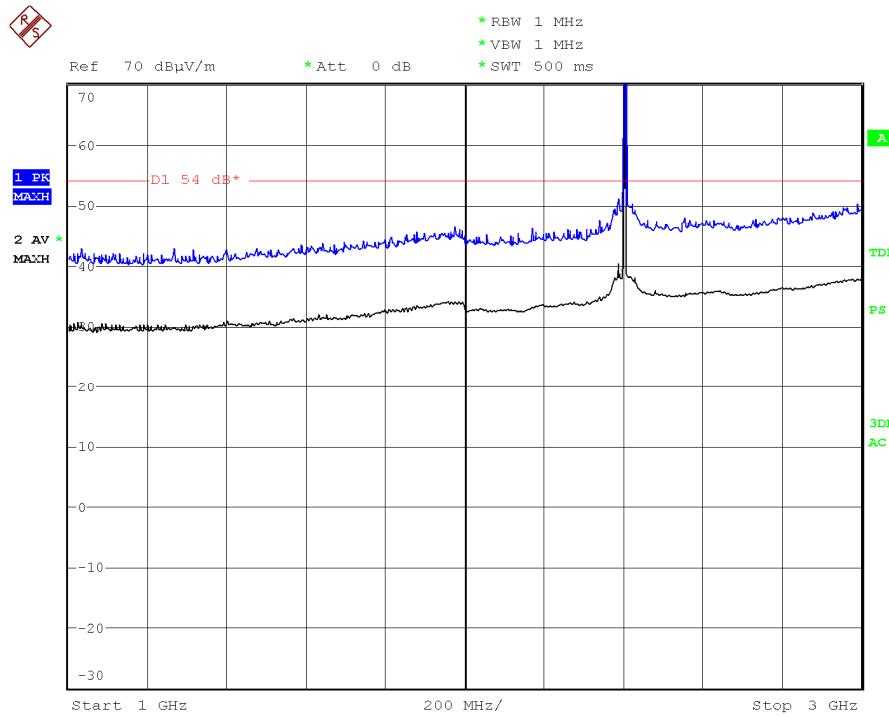


Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Middle (2441 MHz).

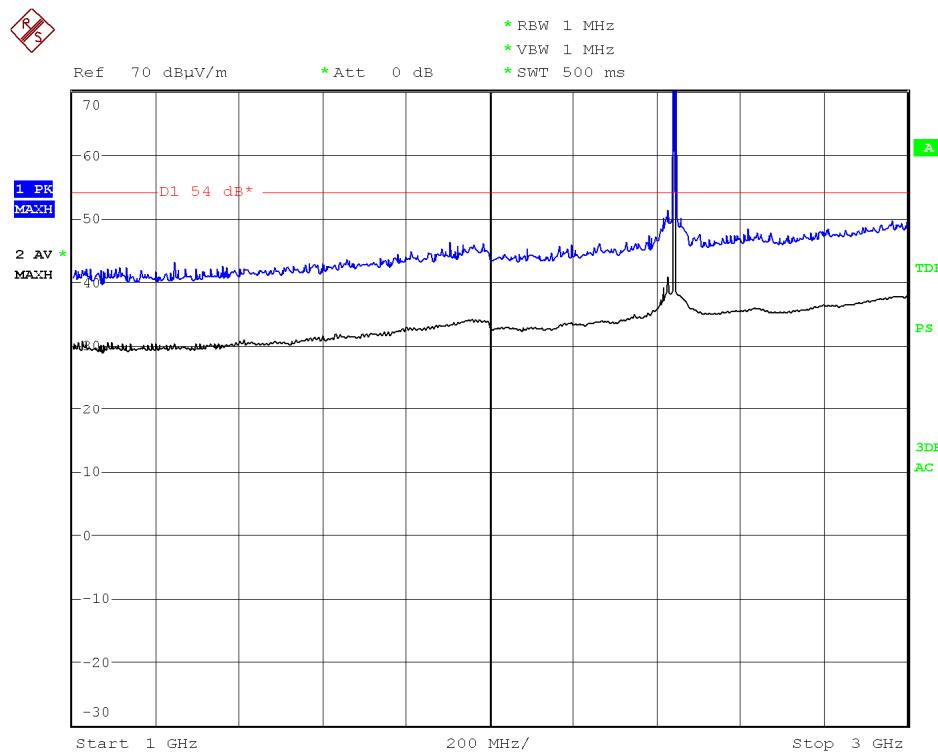

Note: The peak shown in the plot is the carrier frequency.


CHANNEL: Highest (2480 MHz).

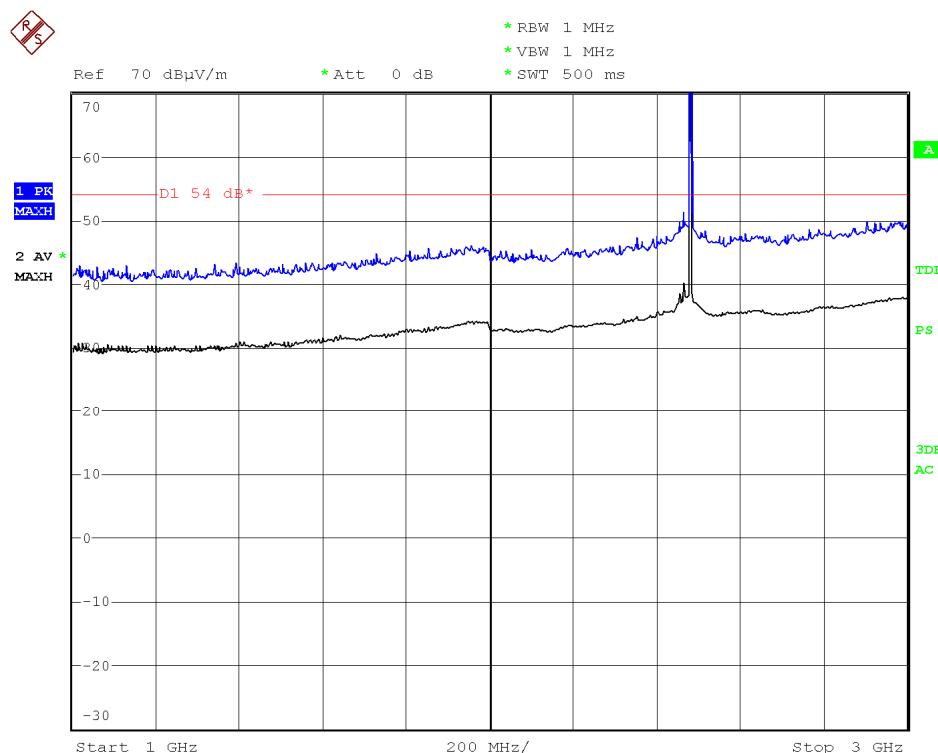

Note: The peak shown in the plot is the carrier frequency.


Modulation: 8-DPSK

CHANNEL: Lowest (2402 MHz).

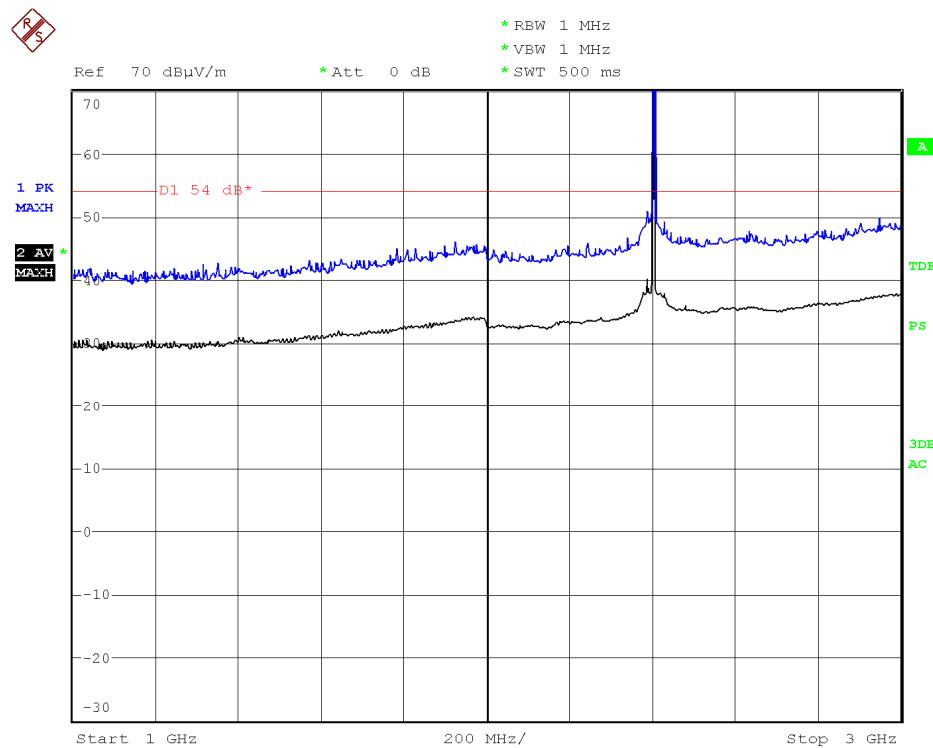


Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Middle (2441 MHz).

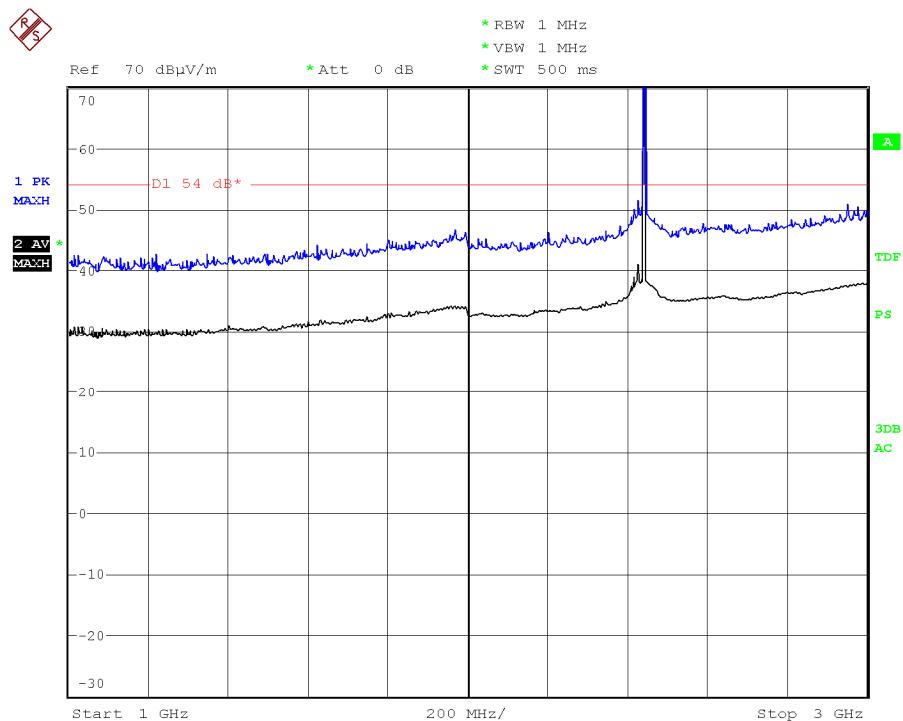

Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Highest (2480 MHz).

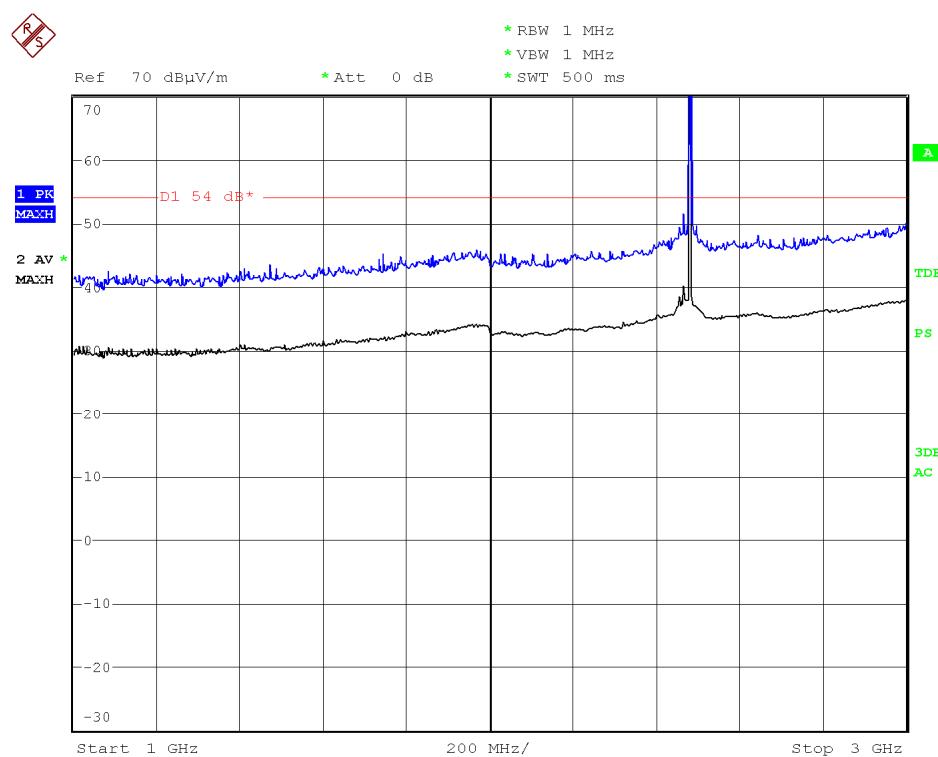


Note: The peak shown in the plot is the carrier frequency.


FREQUENCY RANGE 3 GHz to 12.75 GHz.

Modulation: GFSK


CHANNEL: Lowest (2402 MHz).

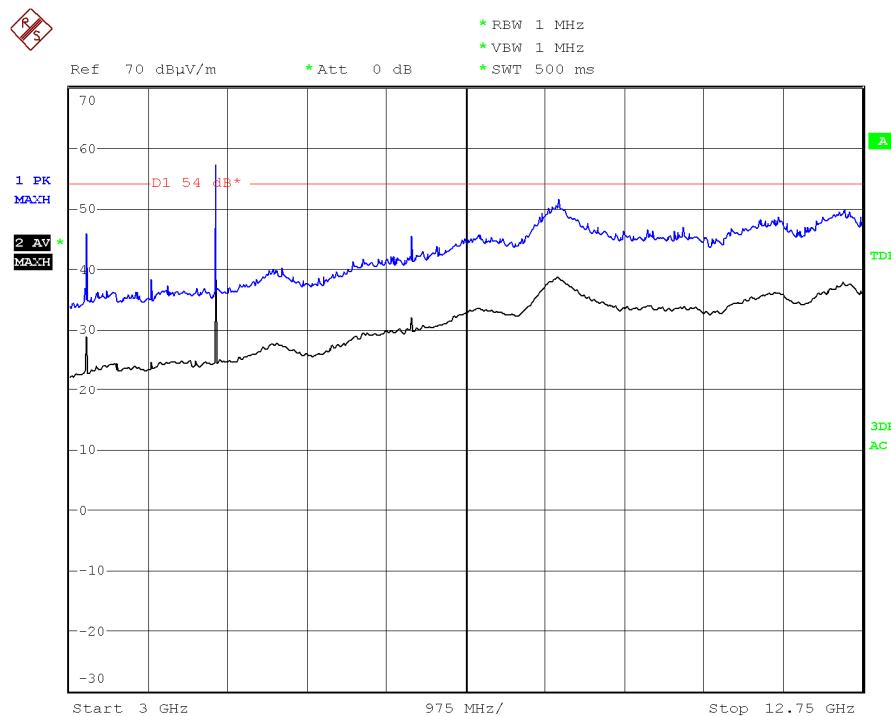

CHANNEL: Middle (2441 MHz).

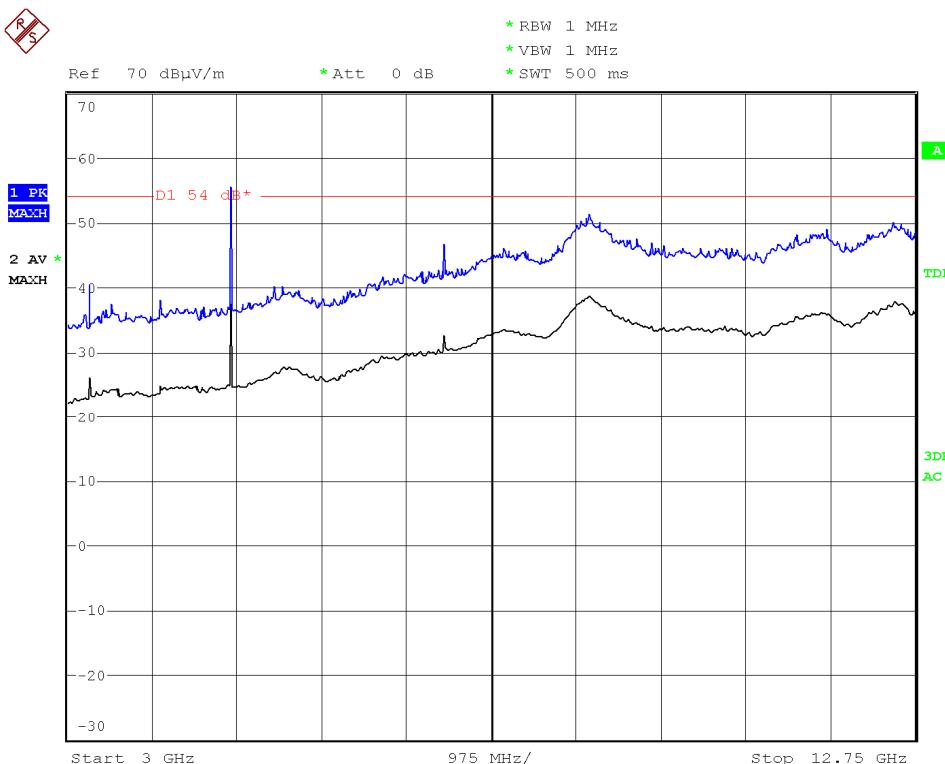


CHANNEL: Highest (2480 MHz).

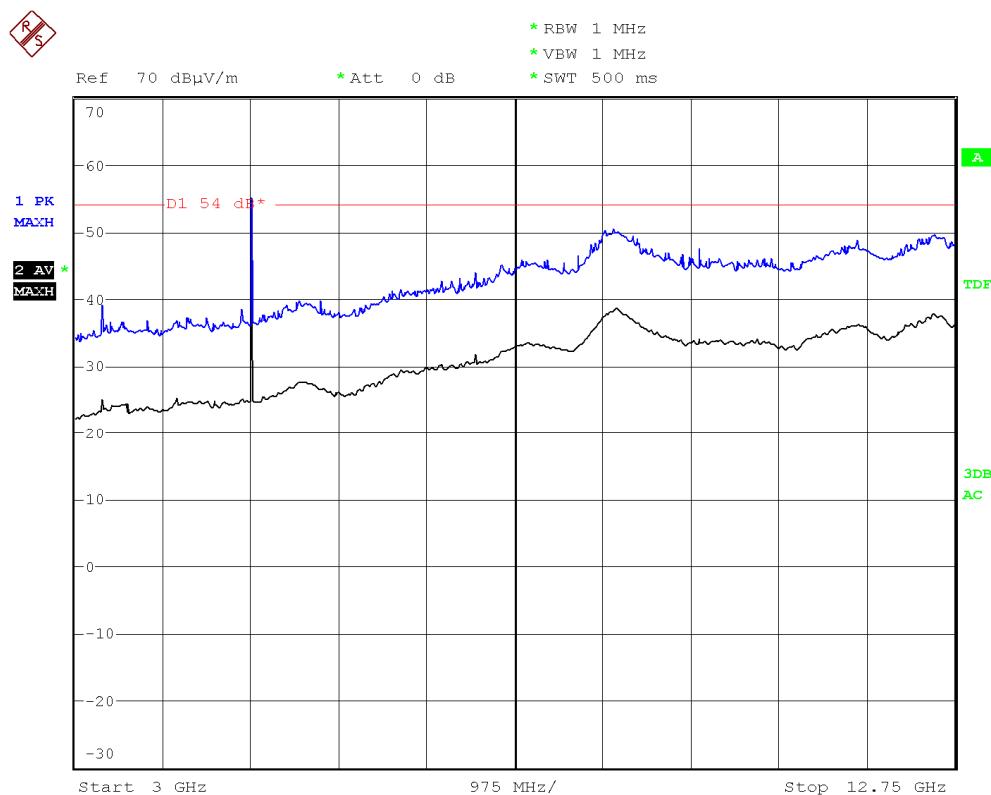


Modulation: $\Pi/4$ -DQPSK


CHANNEL: Lowest (2402 MHz).


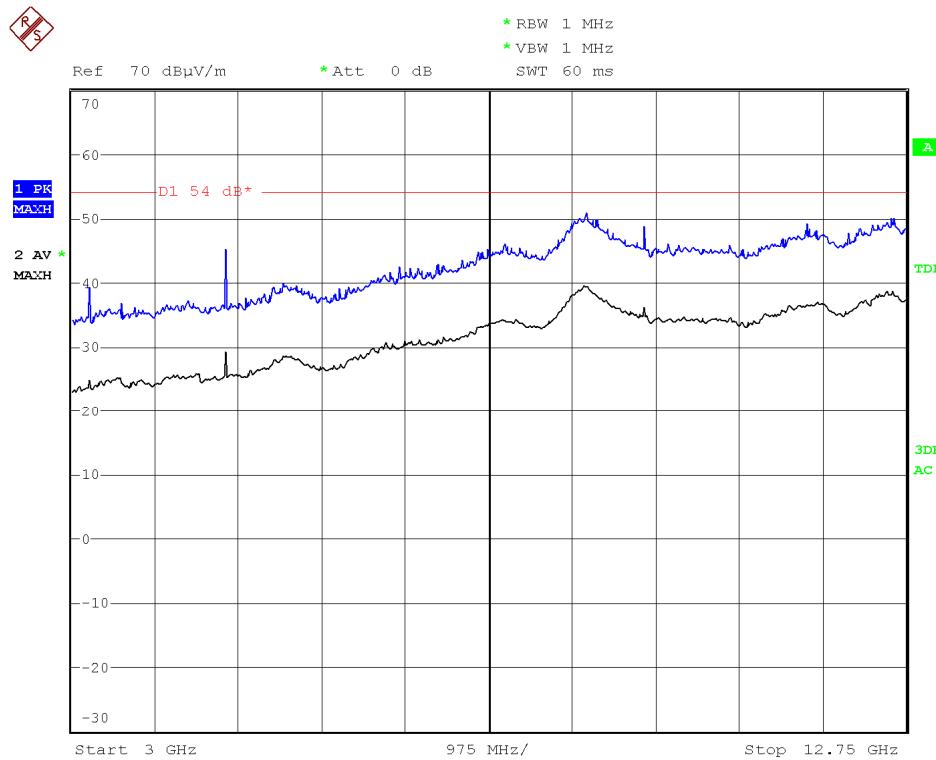


CHANNEL: Middle (2441 MHz).

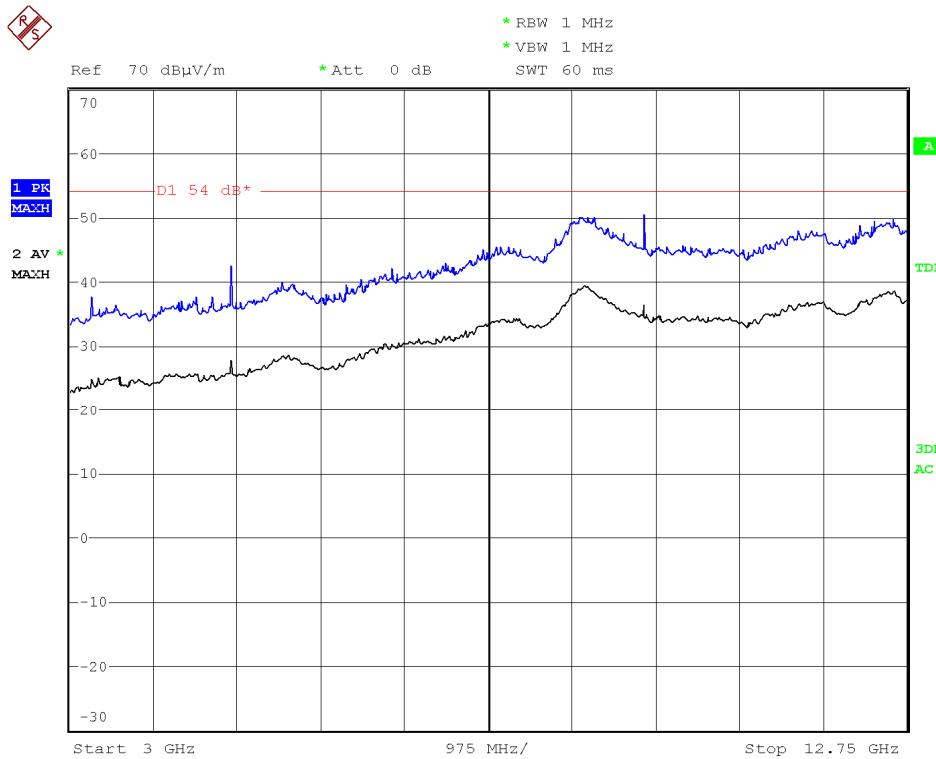


CHANNEL: Highest (2480 MHz).

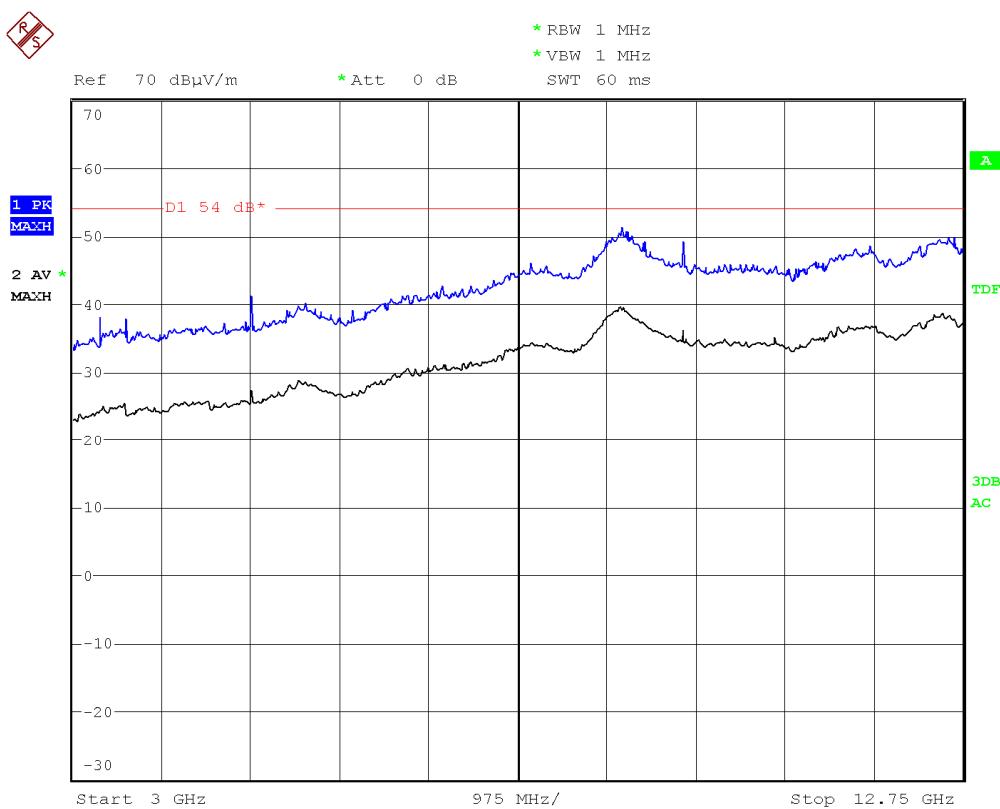


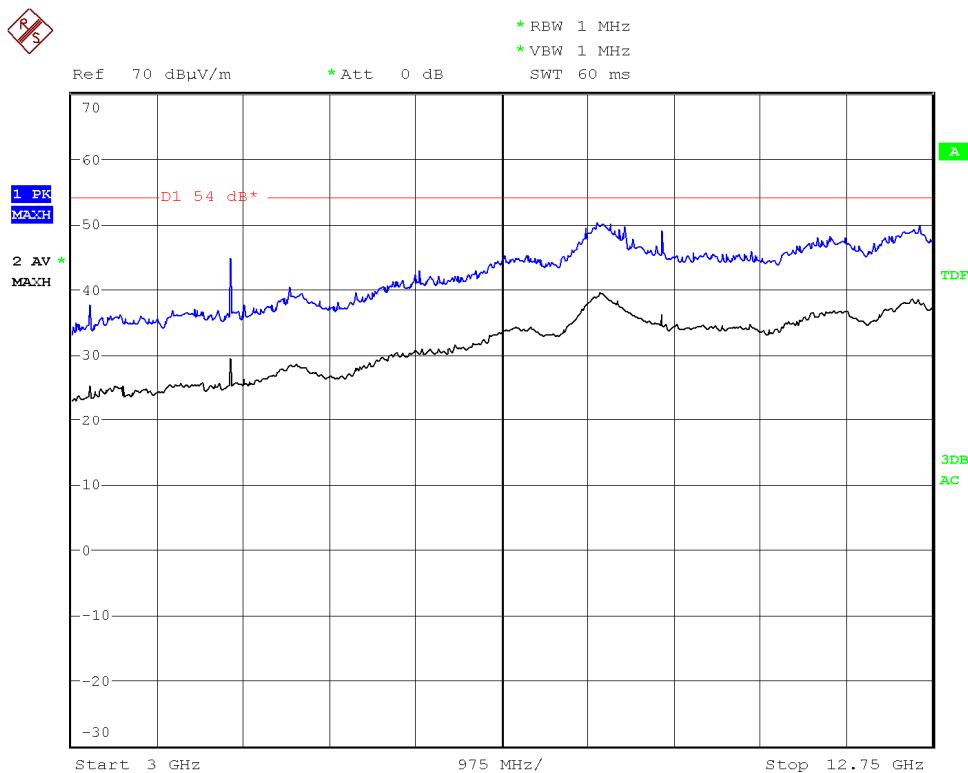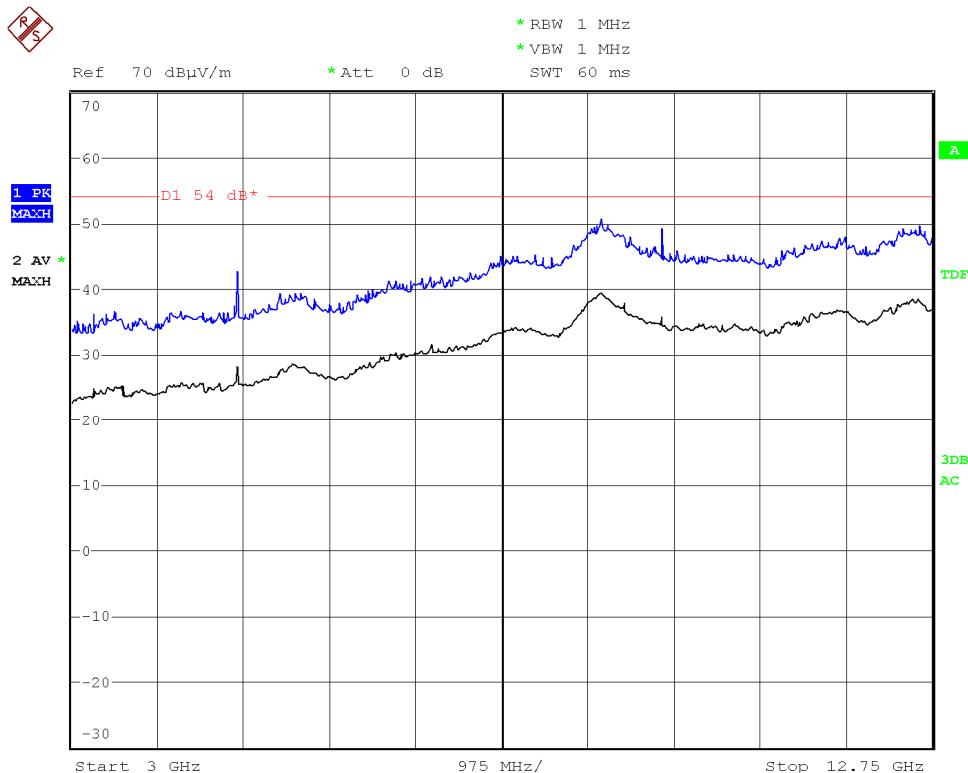Modulation: 8-DPSK
CHANNEL: Lowest (2402 MHz).

CHANNEL: Middle (2441 MHz).

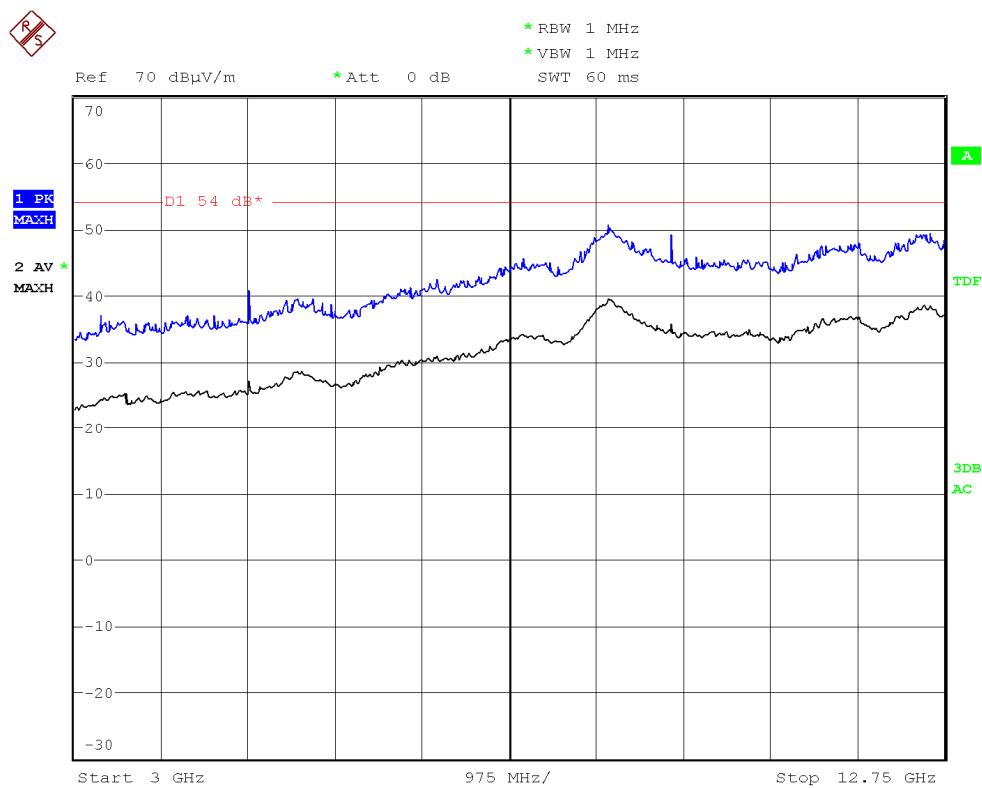
CHANNEL: Highest (2480 MHz).

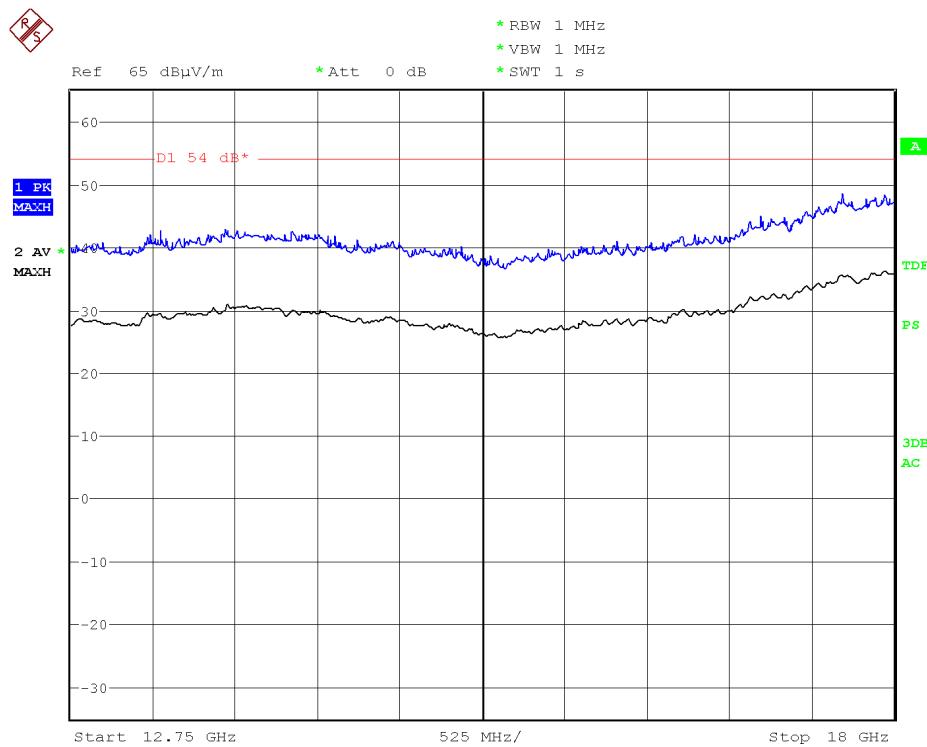


FREQUENCY RANGE 12.75 GHz to 18 GHz.



(This plot is valid for all three channels and all modulation modes).

FREQUENCY RANGE 18 GHz to 25 GHz.

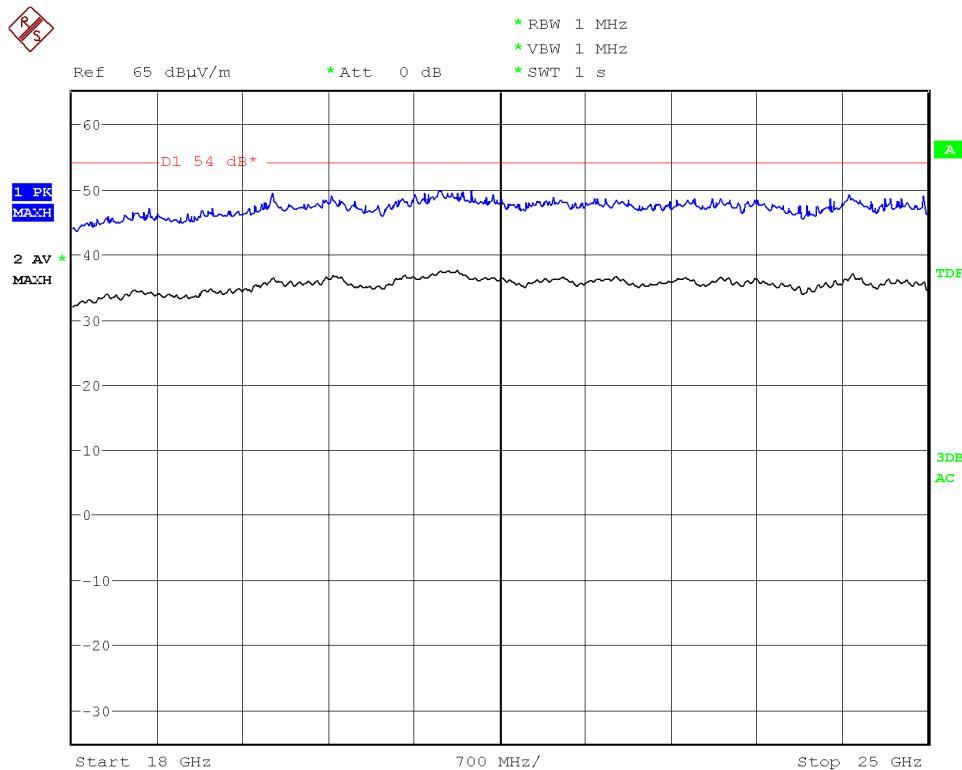


(This plot is valid for all three channels and all modulation modes).


FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

Modulation: GFSK


CHANNEL: Lowest (2402 MHz).

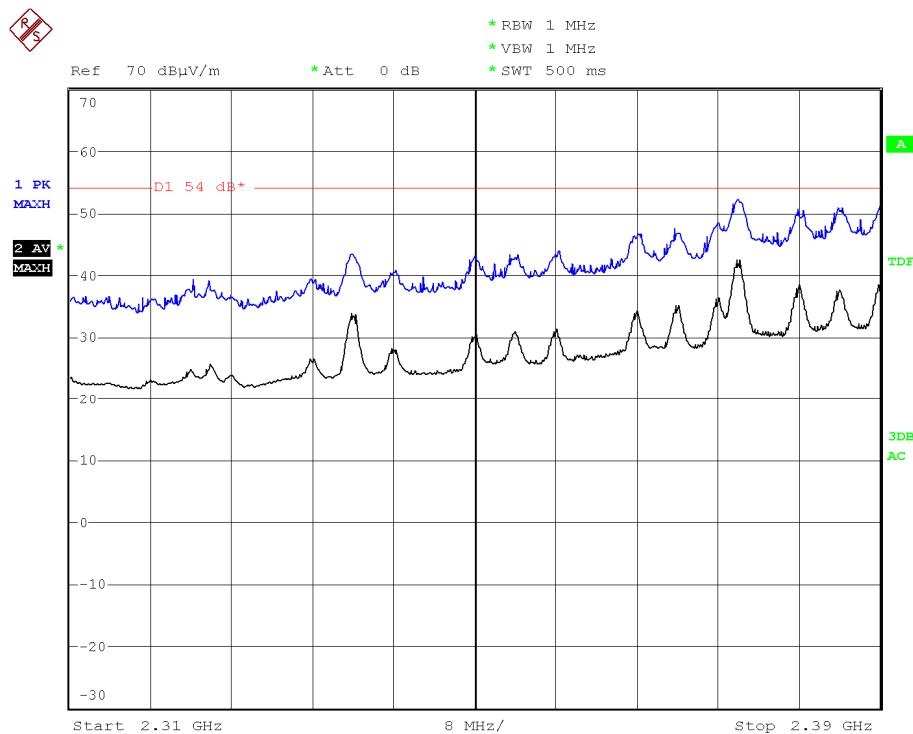

CHANNEL: Middle (2441 MHz).

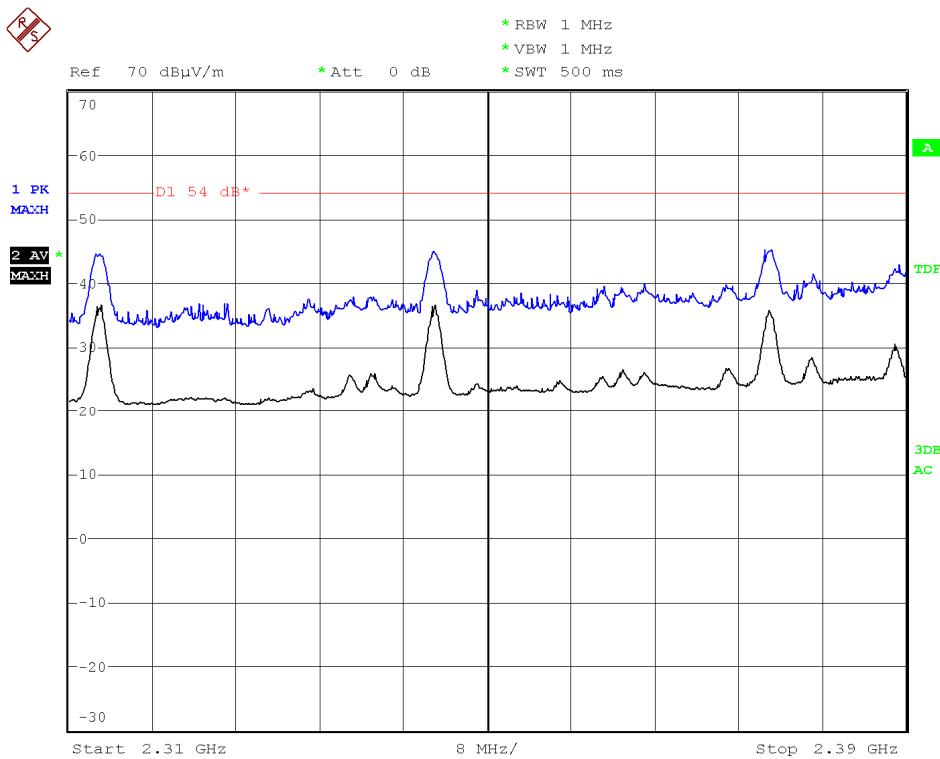


CHANNEL: Highest (2480 MHz).

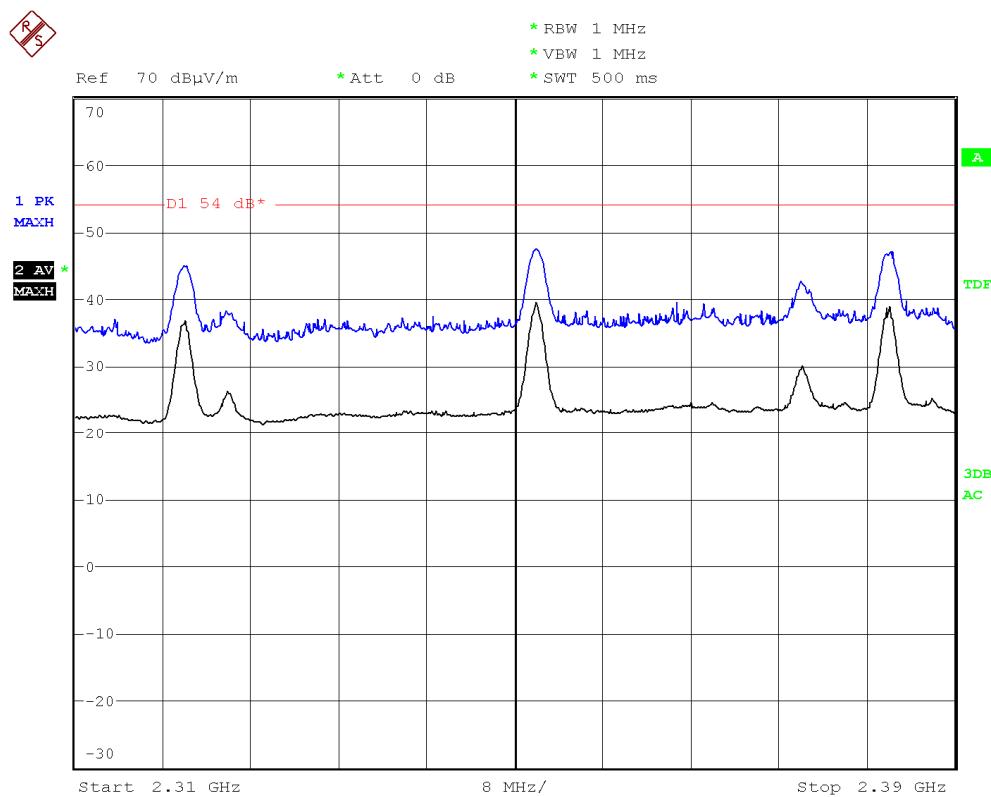


Modulation: $\Pi/4$ -DQPSK


CHANNEL: Lowest (2402 MHz).

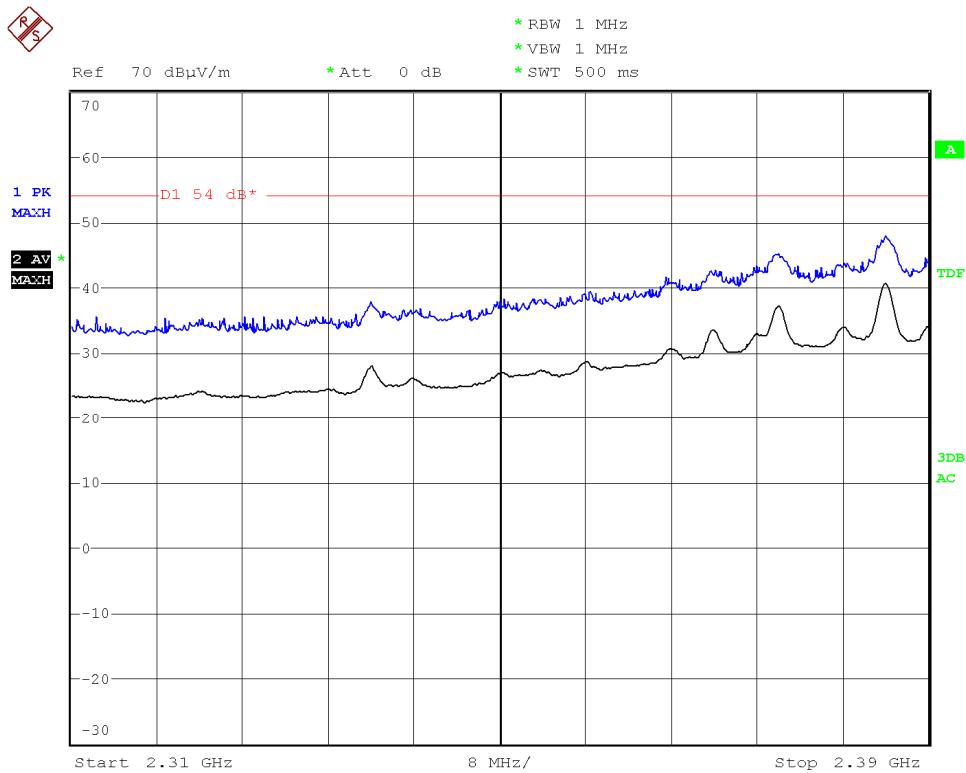

CHANNEL: Middle (2441 MHz).

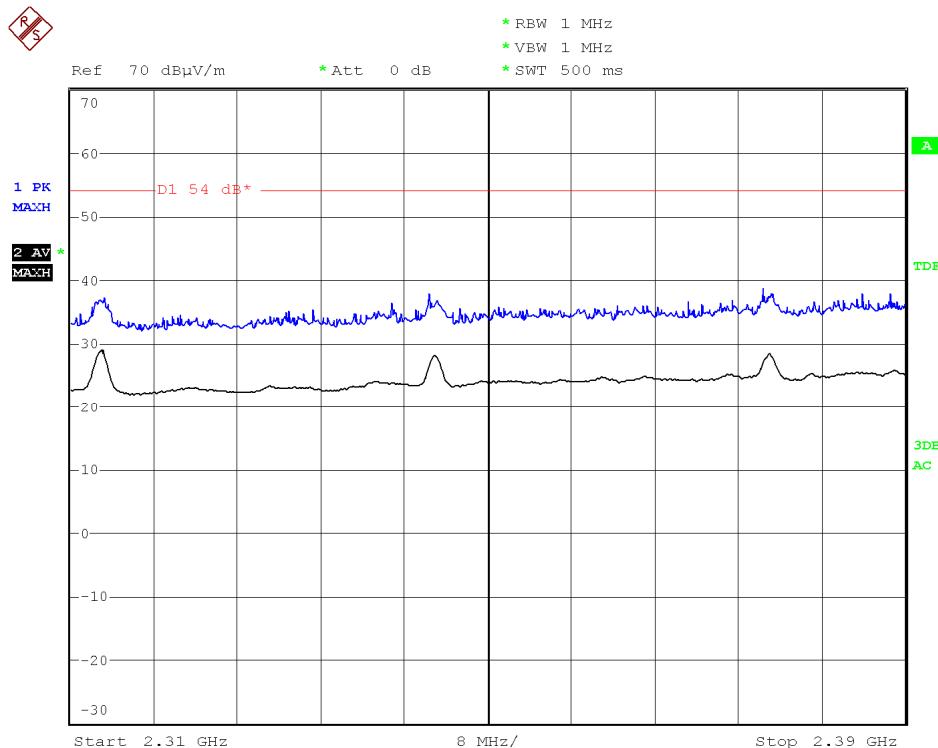


CHANNEL: Highest (2480 MHz).

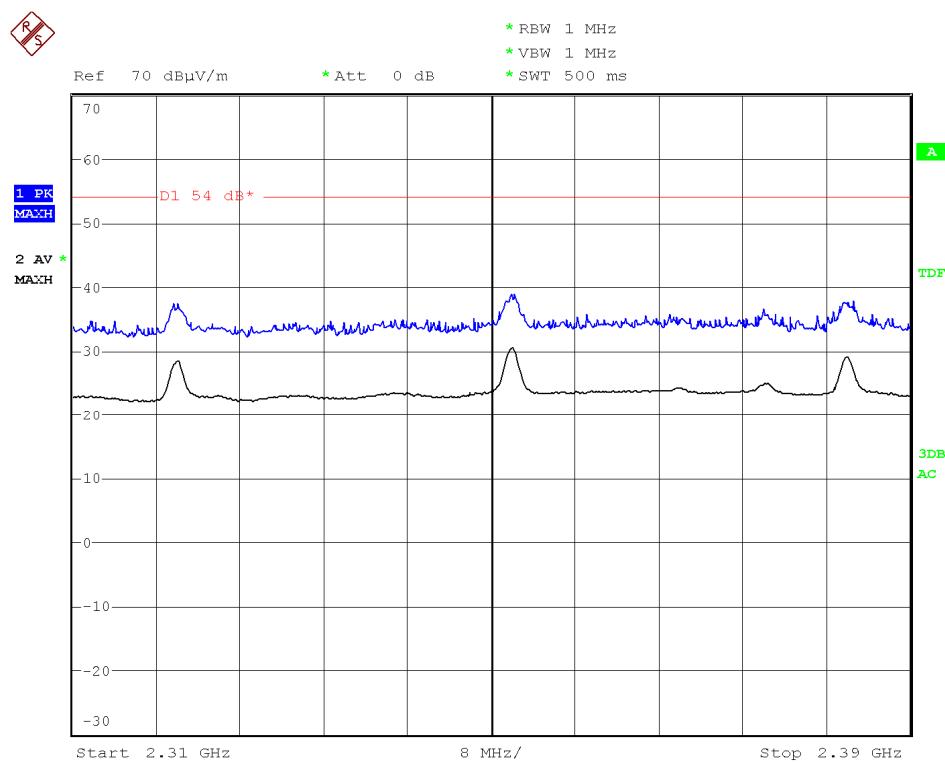


Modulation: 8-DPSK


CHANNEL: Lowest (2402 MHz).

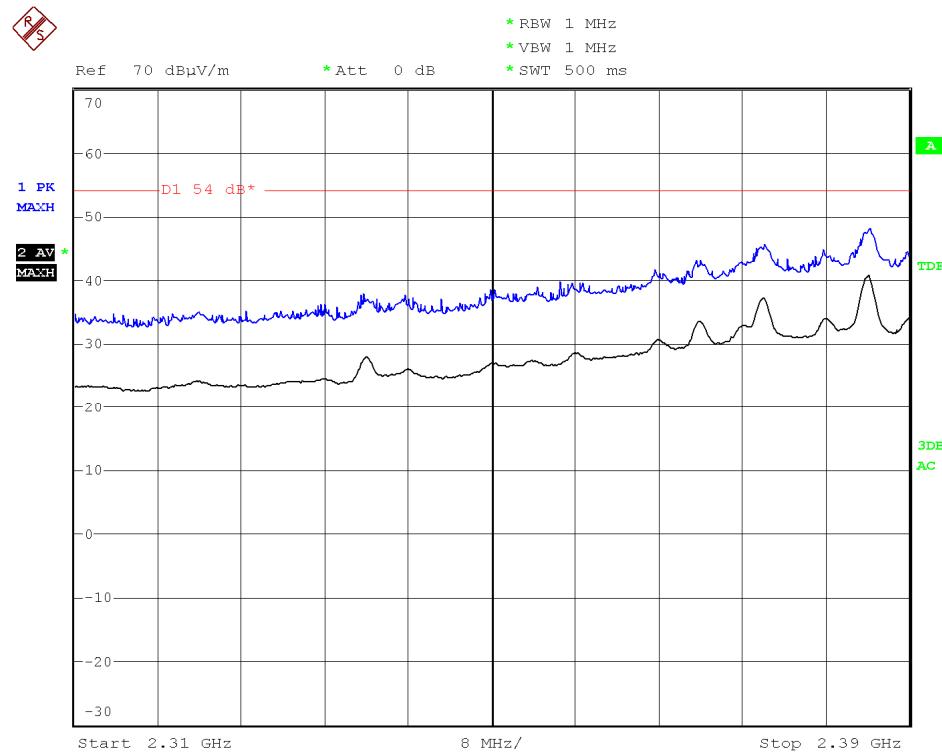

CHANNEL: Middle (2441 MHz).

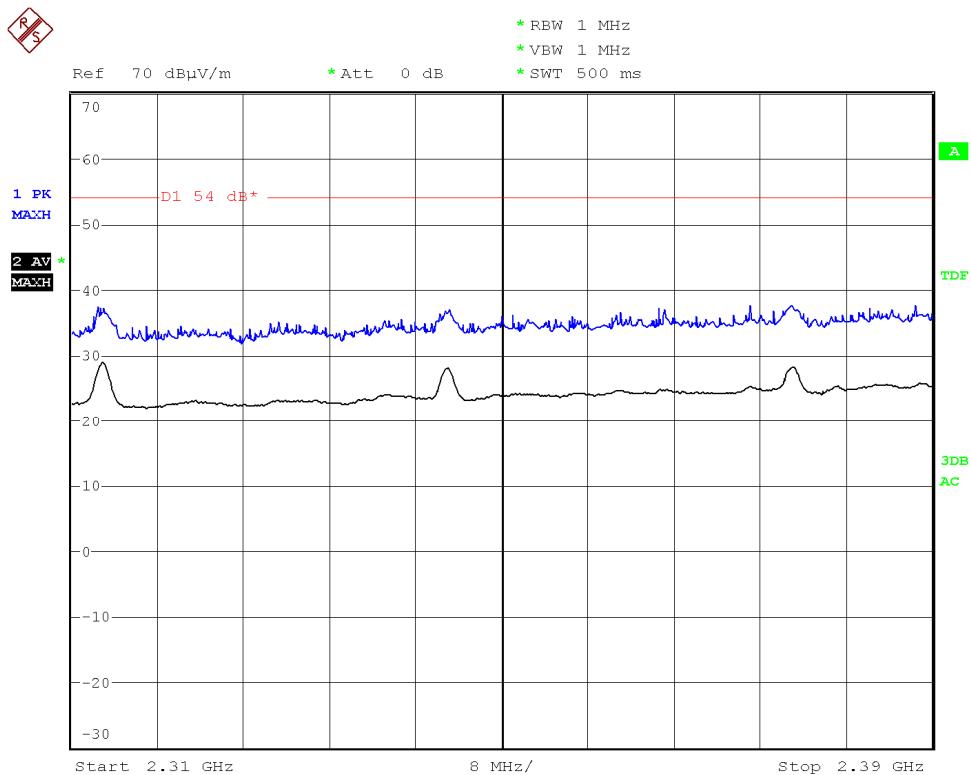


CHANNEL: Highest (2480 MHz).

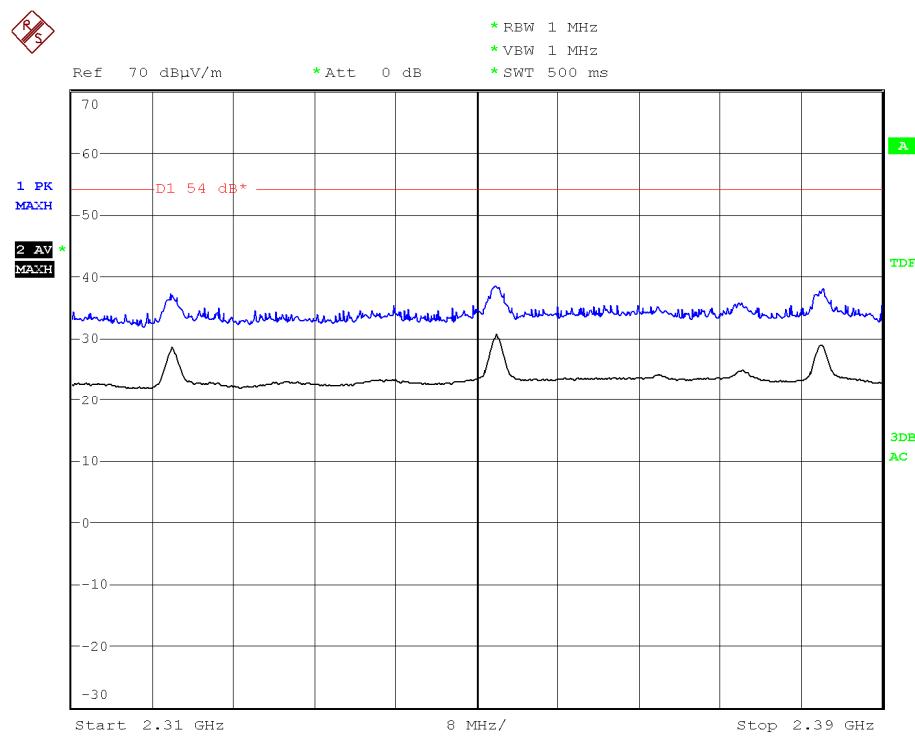


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

Modulation: GFSK


CHANNEL: Lowest (2402 MHz).

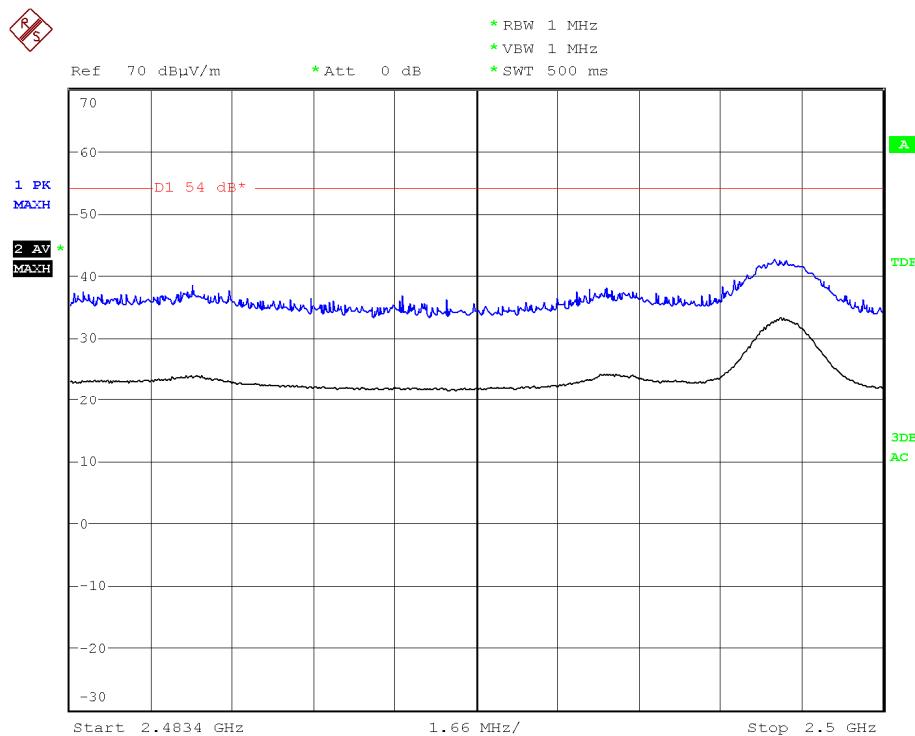

CHANNEL: Middle (2441 MHz).

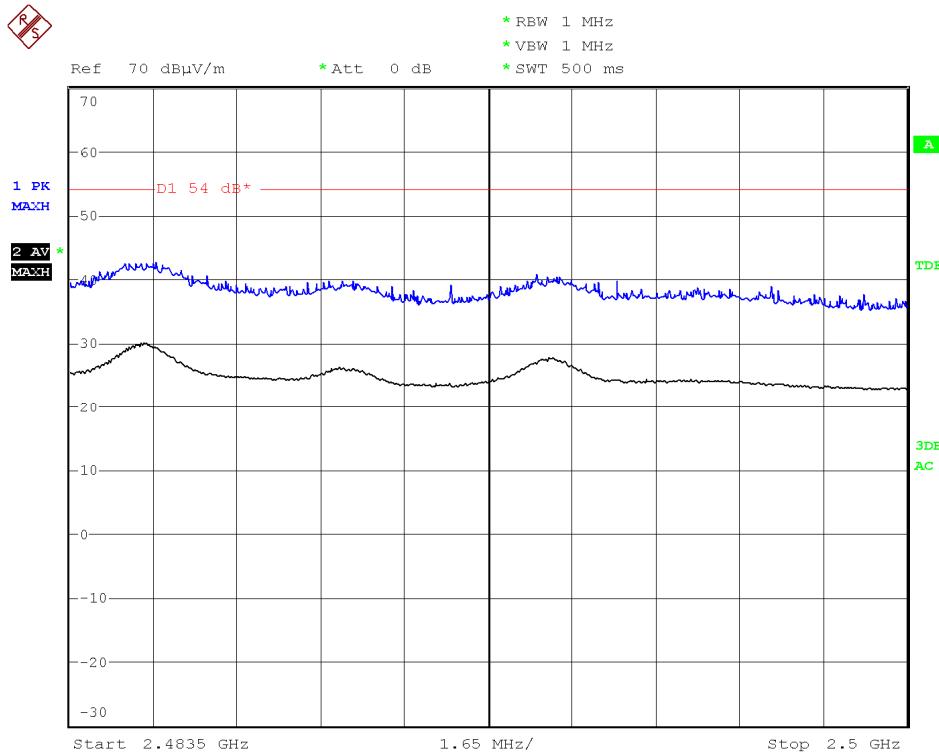


CHANNEL: Highest (2480 MHz).

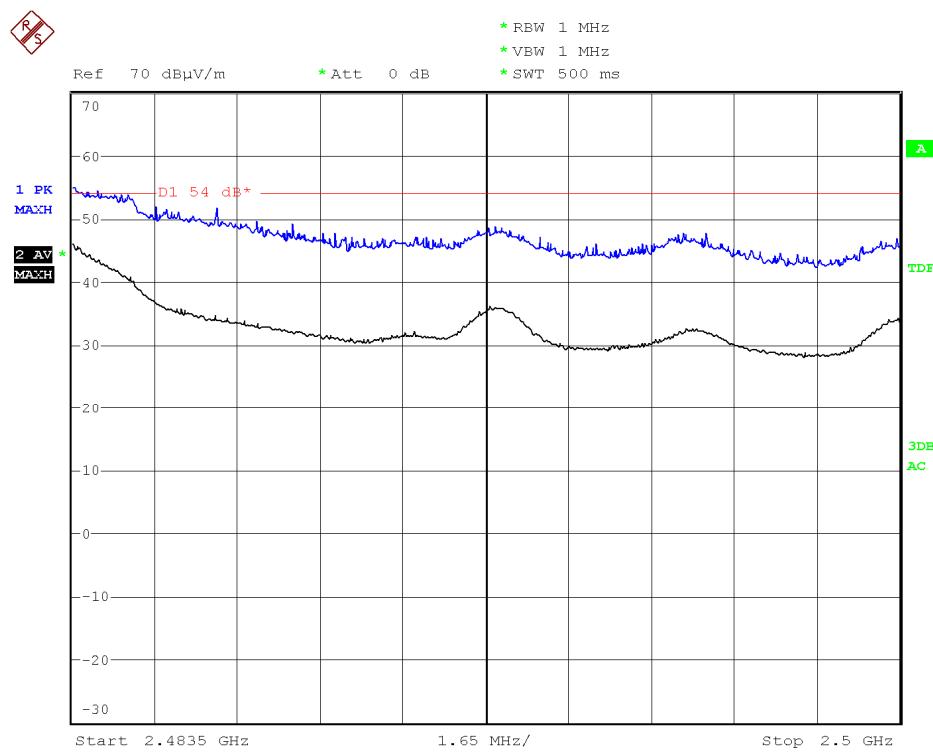


Modulation: $\Pi/4$ -DQPSK


CHANNEL: Lowest (2402 MHz).

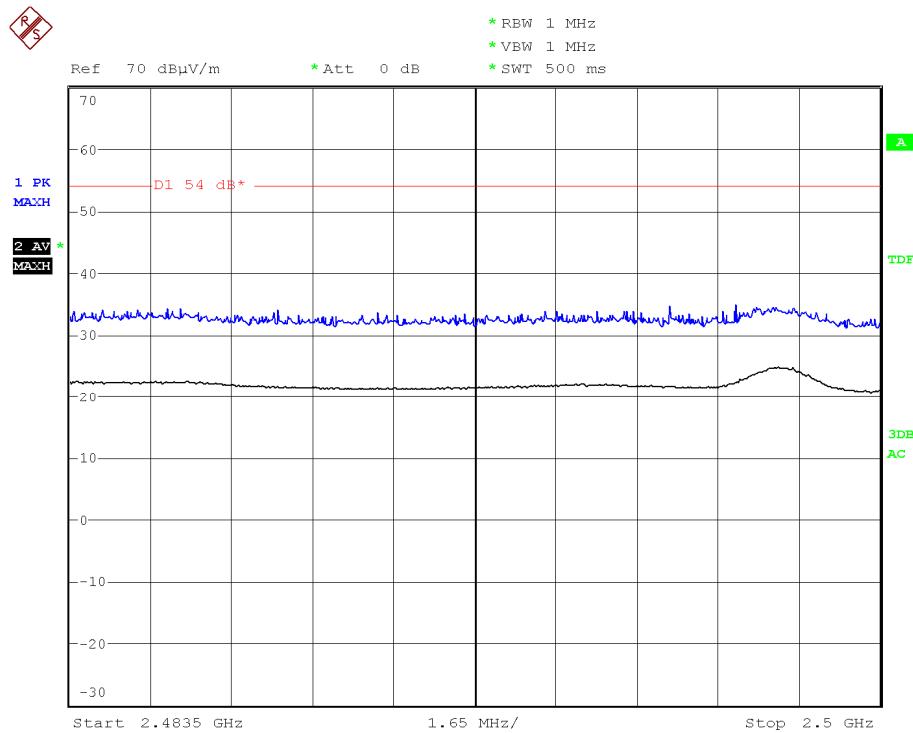

CHANNEL: Middle (2441 MHz).

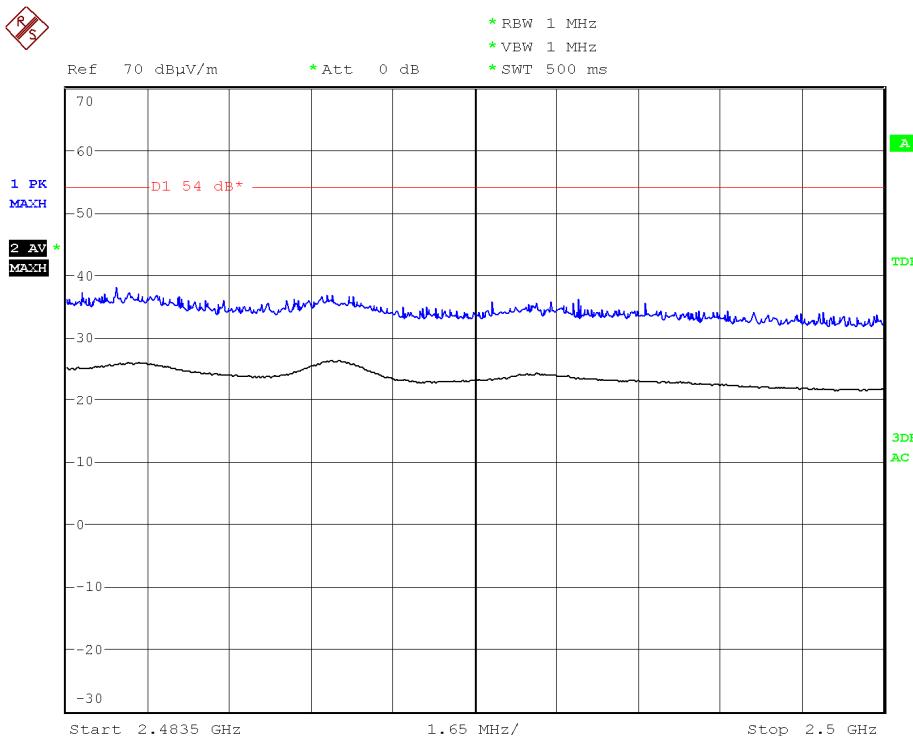


CHANNEL: Highest (2480 MHz).

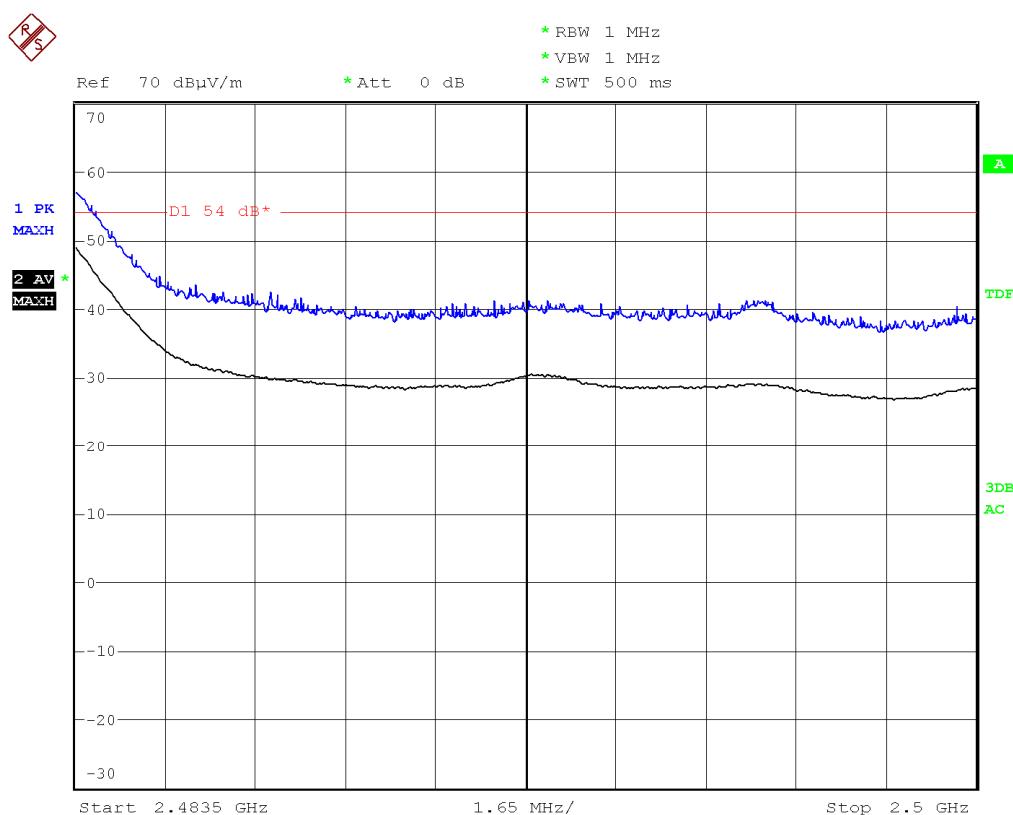


Modulation: 8-DPSK


CHANNEL: Lowest (2402 MHz).

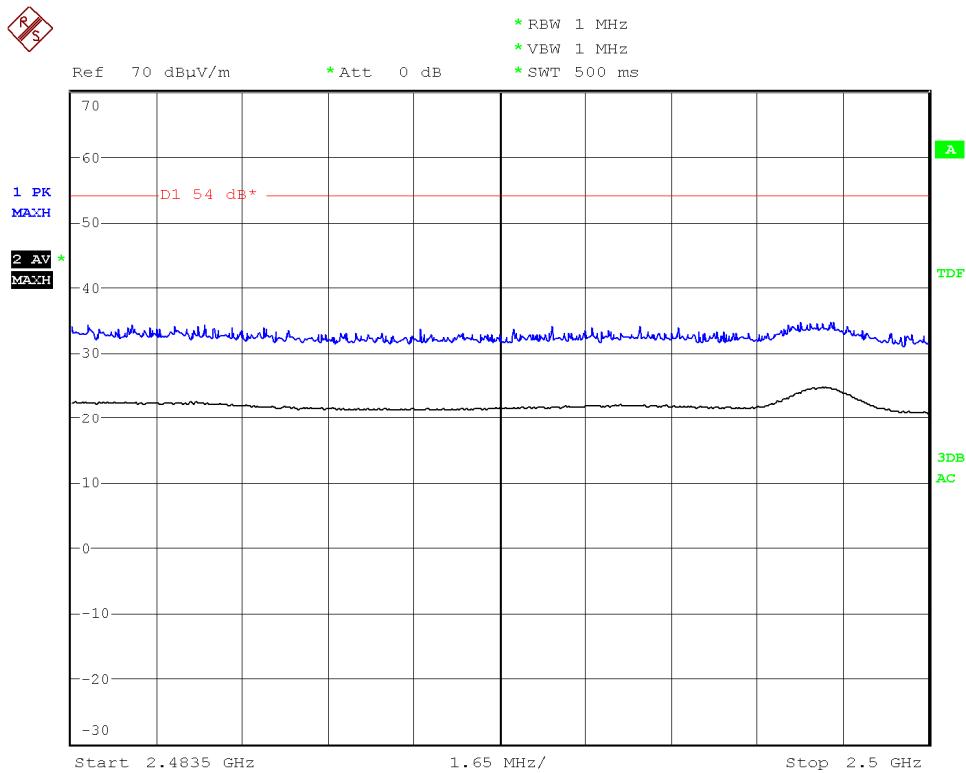

CHANNEL: Middle (2441 MHz).

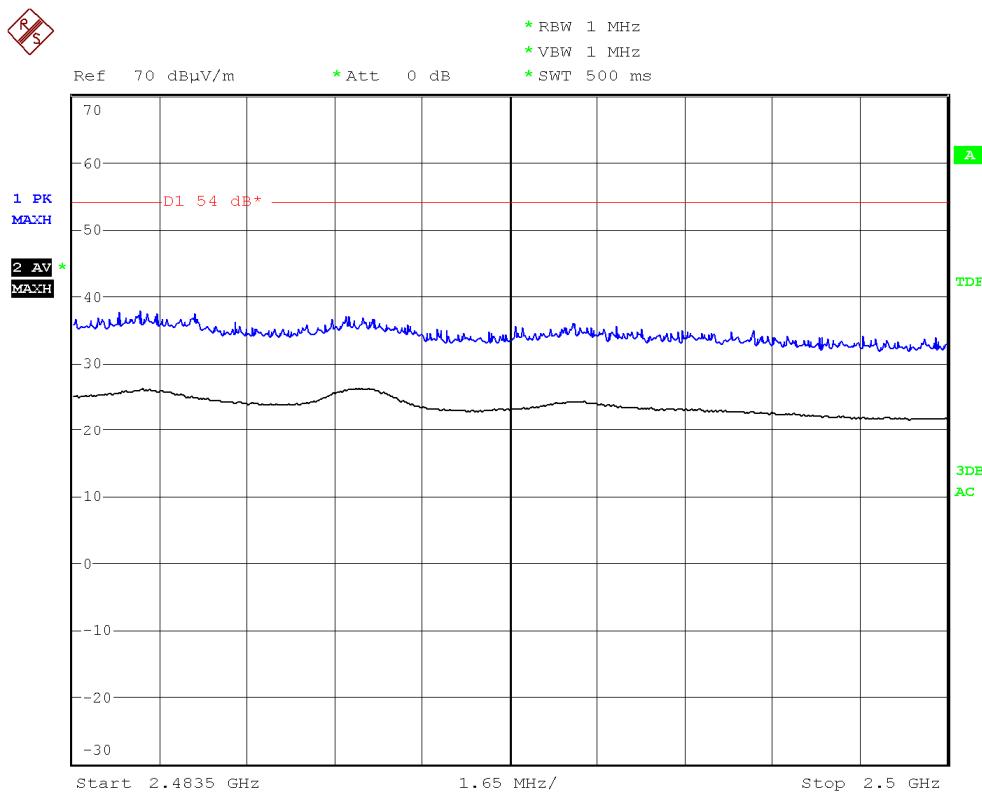

CHANNEL: Highest (2480 MHz).

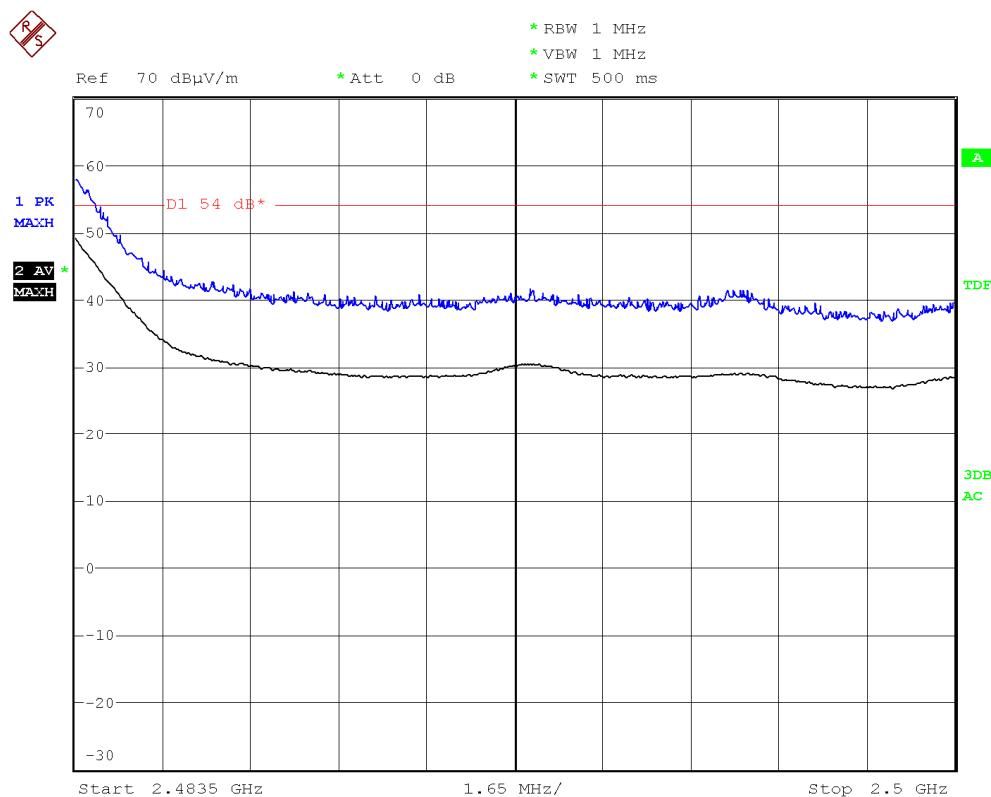

Section 15.109. Receiver spurious radiation

SPECIFICATION

The field strength shall not exceed the following values:

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Note: It is not possible to select individual receiving channels in the equipment under test. The equipment under test is set in inquiry scan mode with the receiver open and scanning through receiving channels.

Frequency range 30 MHz-1000 MHz.


No spurious signals were detected in all the range.

Frequency range 1 GHz-25 GHz.


Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1645.564	V	Peak	37.12	\pm 4.0
1645.564	V	Average	20.78	\pm 4.0
2417.372	V	Peak	35.15	\pm 4.0
2417.372	V	Average	20.82	\pm 4.0

Verdict: PASS.


FREQUENCY RANGE 30 MHz-1000 MHz.

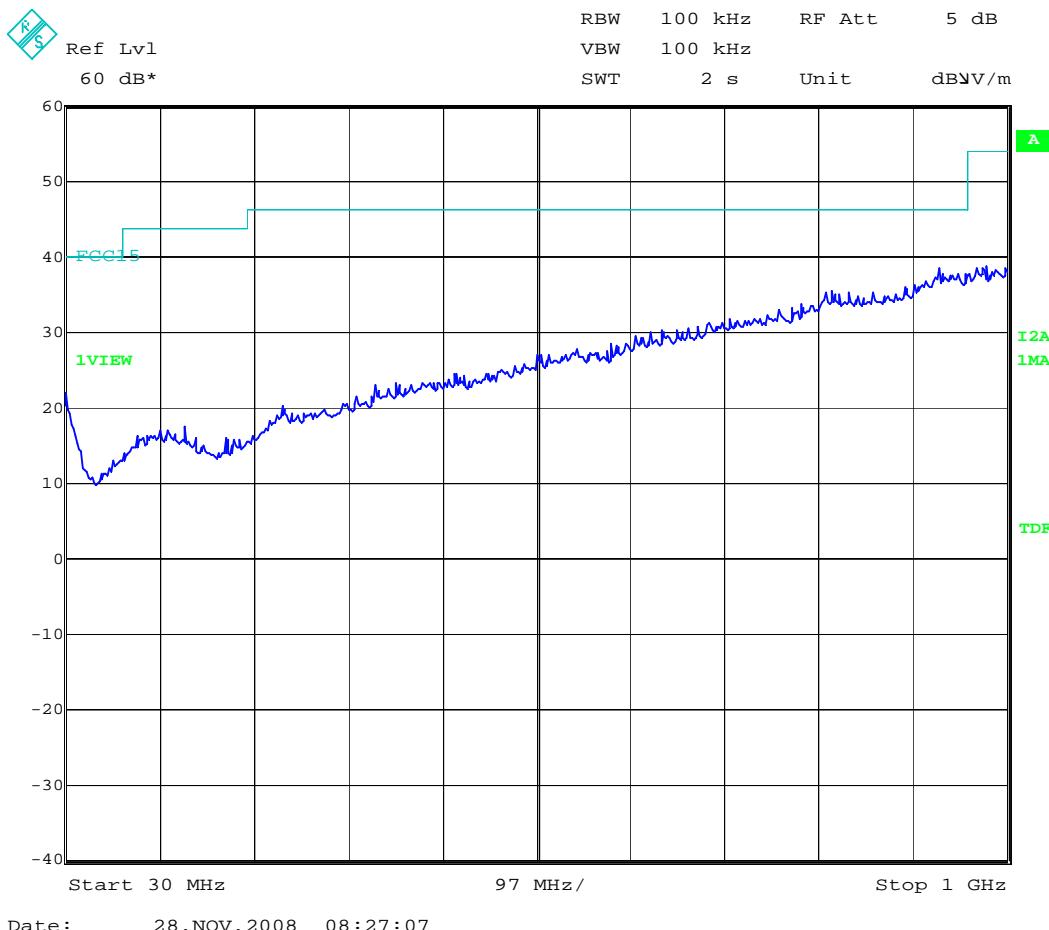


FREQUENCY RANGE 1 GHz-12.75 GHz.

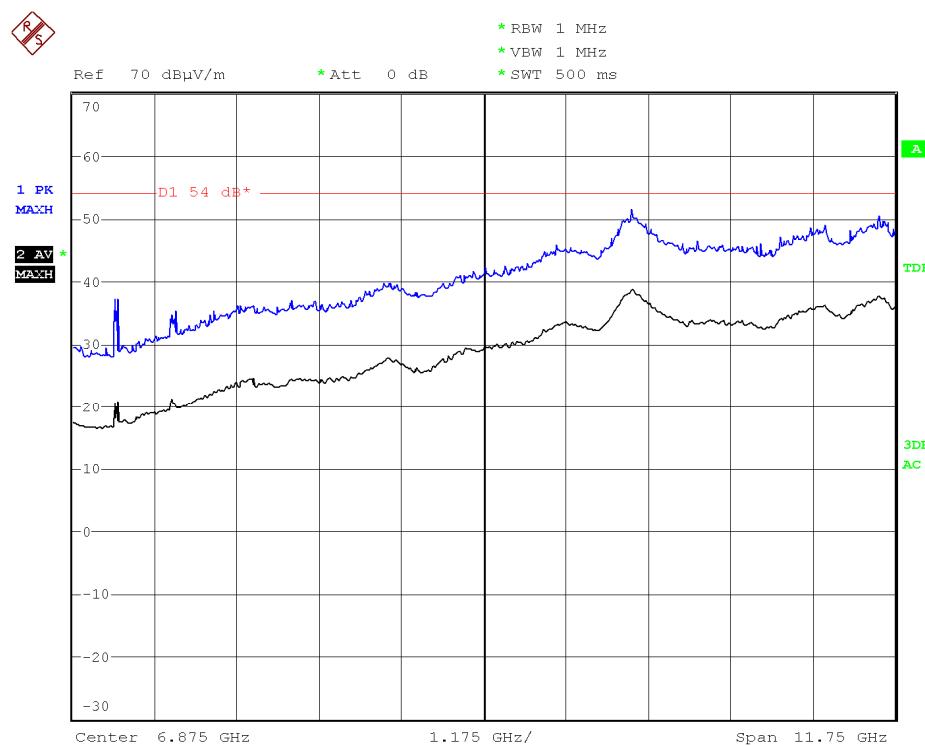


FREQUENCY RANGE 12.75 GHz-18 GHz.

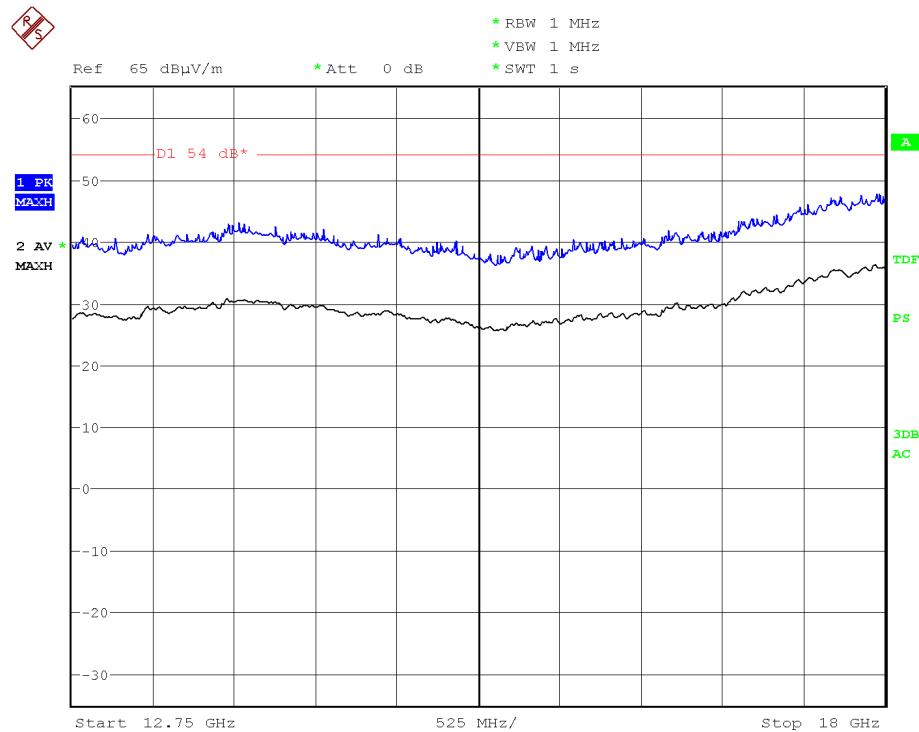


FREQUENCY RANGE 18 GHz-25 GHz.

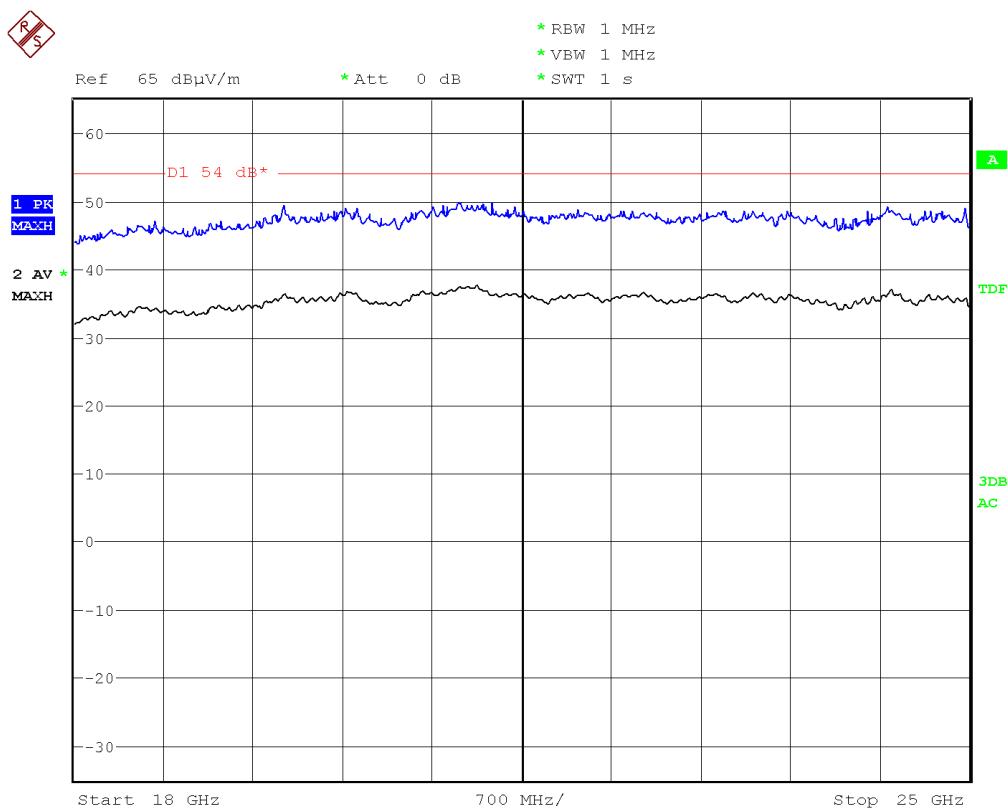

FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

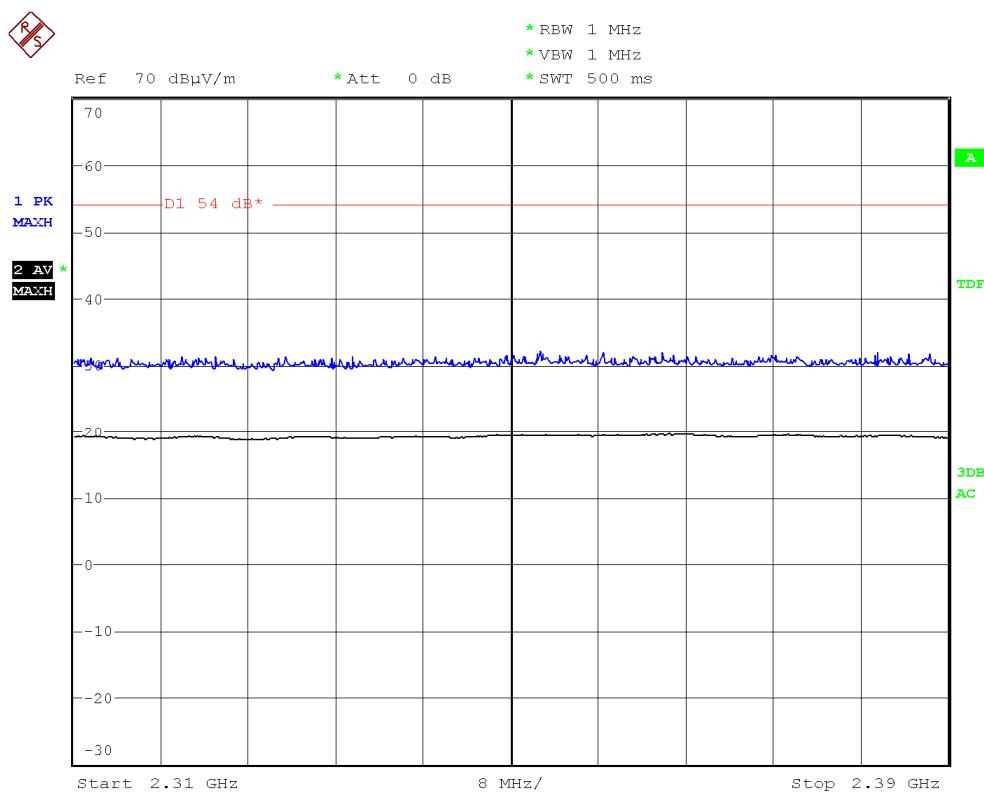

FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

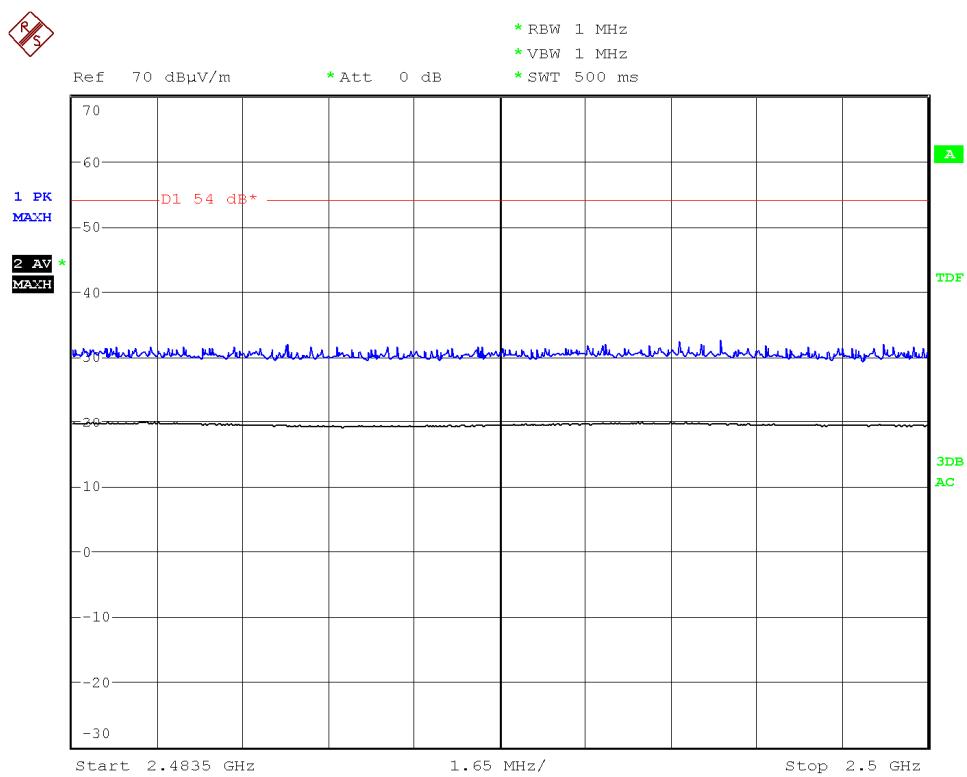

APPENDIX B: Measuring results for electromagnetic conducted emission

CONTENT:

DESCRIPTION OF THE OPERATION MODES.....	109
CONTINUOUS CONDUCTED EMISSION ON POWER LEADS	110

Description of the operation modes

The operation modes described in this paragraph constitute a functionality of the sample under test for itself. Every operation mode takes a failure criteria for the immunity test that they were applying to it and a monitoring to guarantee performance of the same ones.

In the following table appears the operation modes used by the samples tested to that it refers the present test report.

OPERATION MODE	DESCRIPTION
OM#02	EUT ON. Bluetooth communication mode. Charging Batteries.

CONTINUOUS CONDUCTED EMISSION ON POWER LEADS

LIMITS:	Product standard :	FCC RULES AND REGULATIONS 47 CFR PART 15, SUBPART C.
	Test standard :	Part 15, Subpart C, section 15.207 of FCC Rules

CLASS B

The applied limit for continuous conducted emissions in power leads, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart C, section 15.207 in the frequency range 0,15 to 30 MHz, for Class B equipment was:

Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0,15 to 0,5	66-56	56-46
0,5 to 5	56	46
5 to 30	60	50

TESTED SAMPLES:	S/01
TESTED OPERATION MODES:	OM#02
TEST RESULTS :	CCmmnnhh: CC, Conducted Condition; mm: Sample number; nn: Operation mode; hh: wire


CCmmnnhh	Description	Result
CC0102L1	Positive wire noise	P
CC01020N	Negative wire noise	P

Continuous Conducted emission : CC0102L1

Detector : Peak / Average / Quasi-peak

Project: 28384iem.005
 Company: BARACODA
 Sample: S/01
 Operation Mode: OM#02
 Date: 2009-03-27 14:14
 Setup: EMI conducted
 Mode: EUT ON. BT communication mode. Phase noise.

EC FCC Clase B ESPI CC

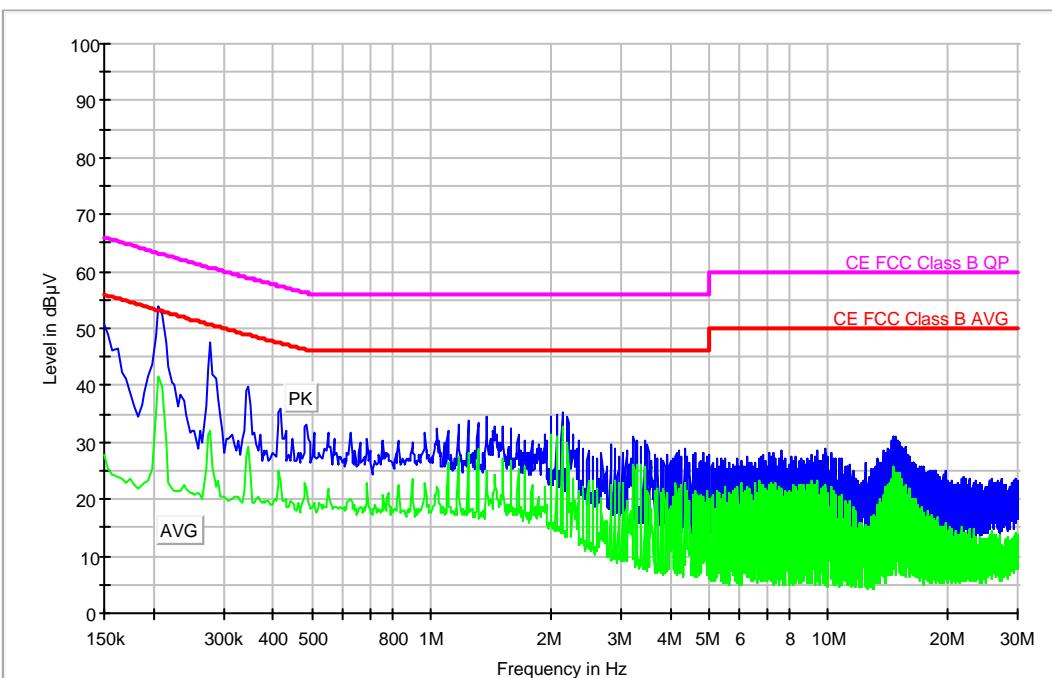

Max PK-AVG


Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.150000	50.8	27.9
0.154000	48.8	25.3
0.158000	46.1	24.1
0.162000	46.3	23.8
0.198000	43.6	25.2
0.202000	48.5	35.1
0.206000	53.8	41.4
0.210000	52.3	39.9
0.214000	47.5	30.4
0.218000	43.2	22.9
0.274000	42.9	31.4
0.278000	47.5	32.1

Continuous Conducted emission : CC01020N

Detector : Peak / Average / Quasi-peak

Project: 28384iem.005
 Company: BARACODA
 Sample: S/01
 Operation Mode: OM#02
 Date: 2009-03-27 14:11
 Setup: EMI conducted
 Mode: EUT ON. BT communication mode. Neutral noise.

EC FCC Clase B ESPI CC

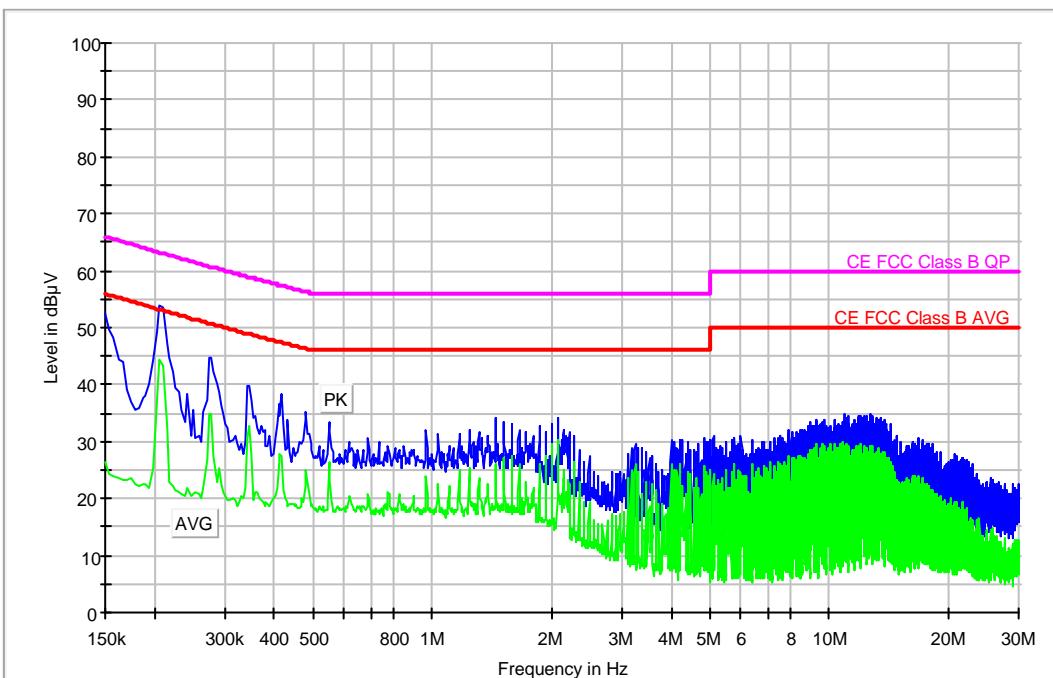

Max PK-AVG


Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.150000	52.6	26.3
0.154000	49.6	24.4
0.158000	48.3	23.8
0.162000	44.4	23.6
0.198000	44.3	25.5
0.202000	49.2	37.5
0.206000	53.7	44.2
0.210000	53.4	43.1
0.214000	47.2	32.3
0.218000	44.7	23.0
0.274000	44.6	34.9
0.278000	44.7	34.8

APPENDIX C: Photographs







GENERAL SET-UP FOR RADIATED MEASUREMENTS

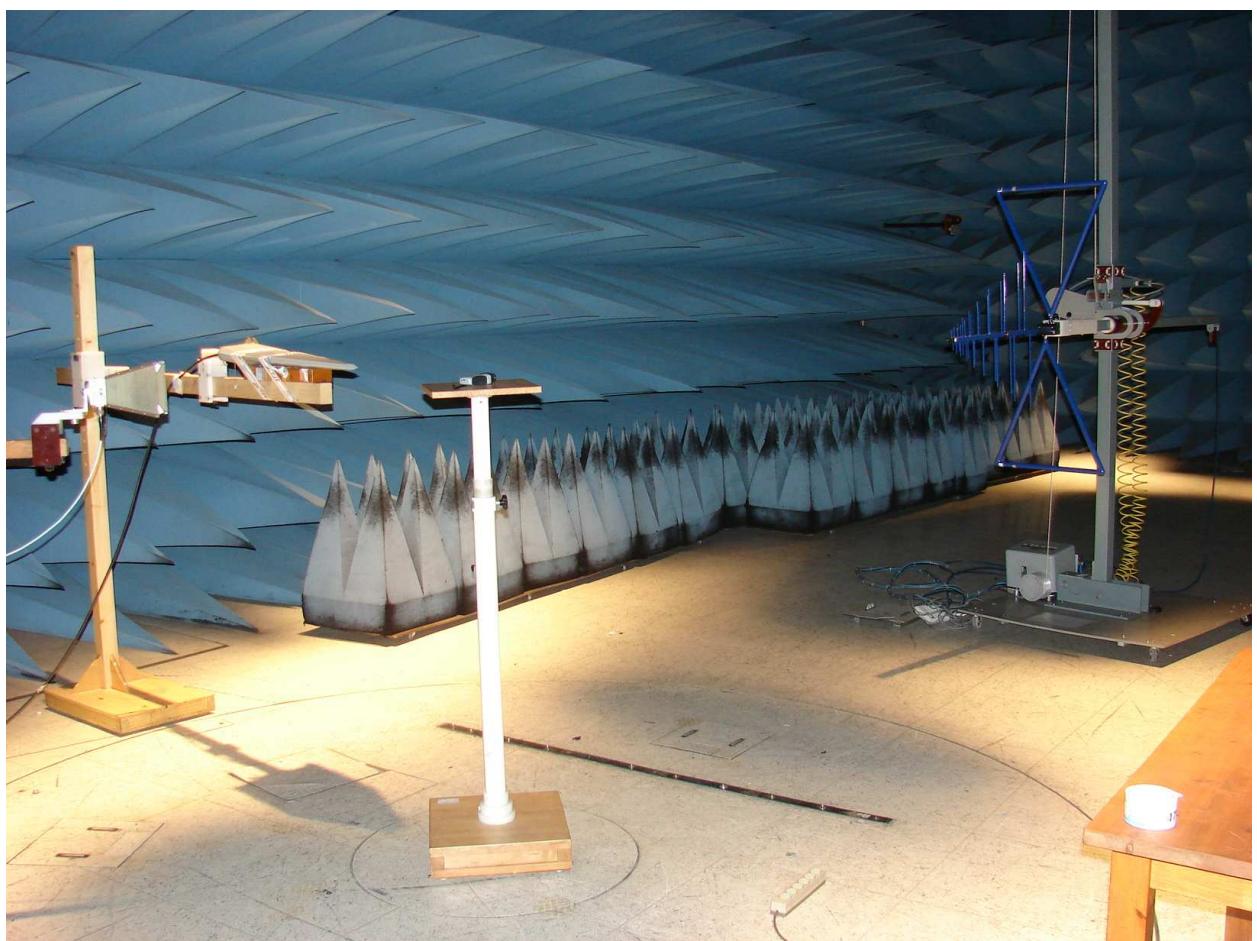

TEST SET-UP FOR RADIATED MEASUREMENTS BELOW 1 GHz

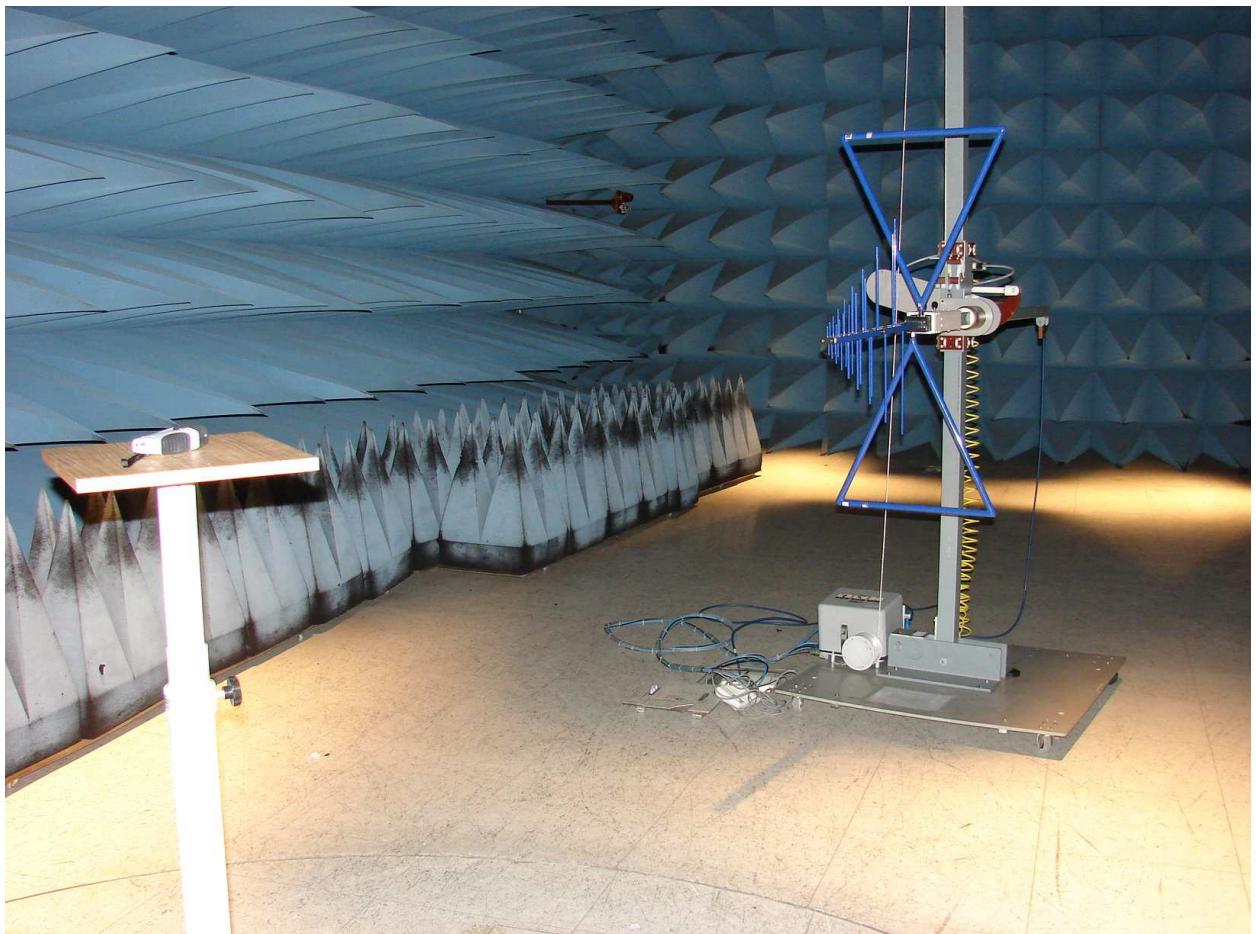

TEST SET-UP FOR RADIATED MEASUREMENTS ABOVE 1GHz

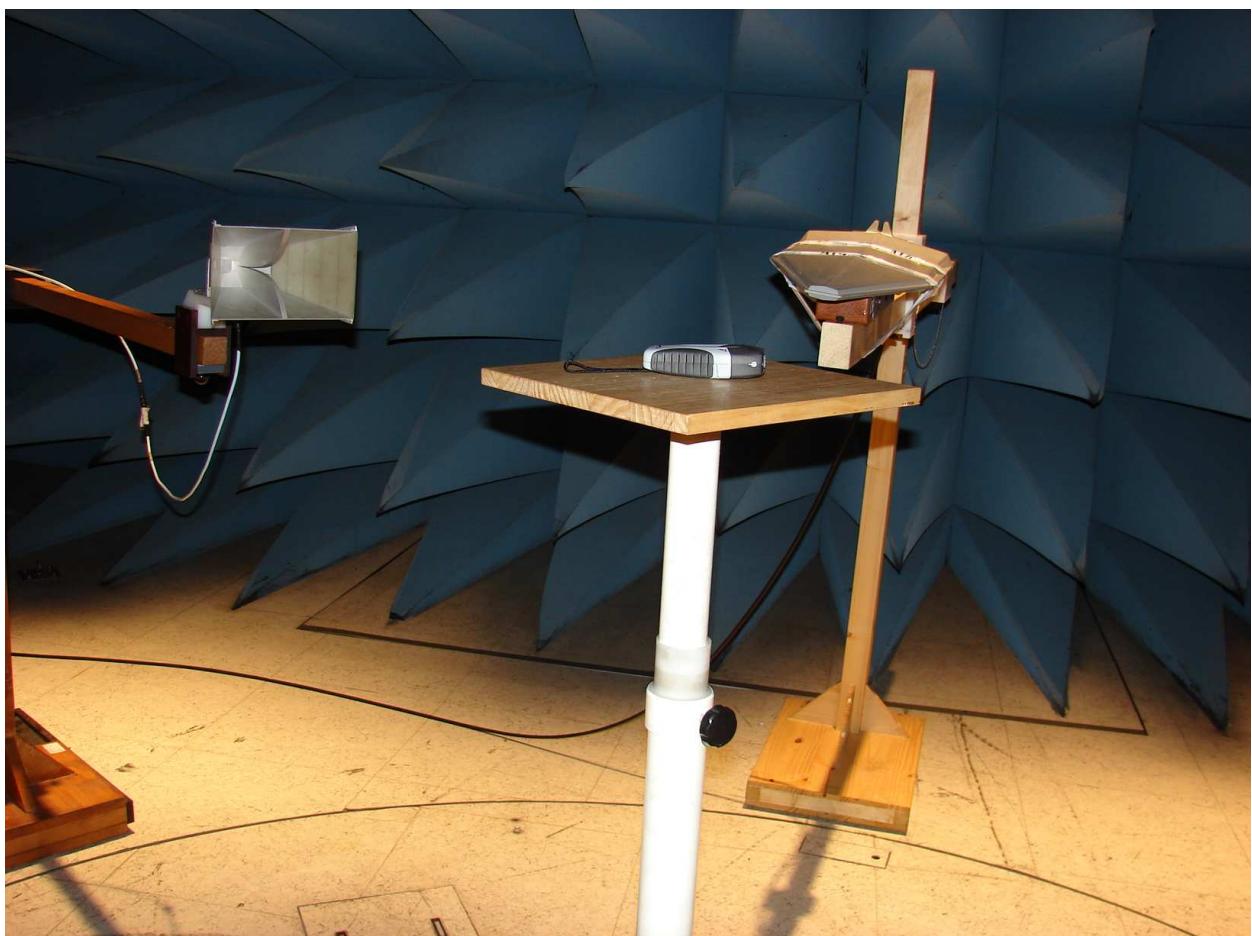

TEST SET-UP FOR CONDUCTED MEASUREMENTS

