



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands

Part 15, Subpart C, Section 15.247

THE FOLLOWING MEETS THE ABOVE TEST SPECIFICATION

Formal Name: OFDM Access Point - CAP58430
Kind of Equipment: Digital Transmission Transceiver
Frequency Range: 5730 MHz - 5845 MHz
Test Configuration: Stand-alone (Tested at 120 vac, 60 Hz)
Model Number(s): 5780APUS & 5781APUS
Model(s) Tested: 5780APUS
Serial Number(s): 0A003E37A00D
Date of Tests: October 19, 20, 21, 22, 2009
Test Conducted For: Motorola
1299 E. Algonquin Road
Schaumburg, IL 60193

NOTICE: "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report.

© Copyright 1983-2009 D.L.S. Electronic Systems, Inc

COPYRIGHT NOTICE

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

SIGNATURE PAGE

Report By:

Aronom C. Rowe
Test Engineer
EMC-001375-NE

Reviewed By:

William Stumpf
OATS Manager

Approved By:

Brian Mattson
General Manager



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

TABLE OF CONTENTS

i.	Cover Page	1
ii.	Signature Page	2
iii.	Table of Contents	3
iv.	NVLAP Certificate of Accreditation	5
1.0	Summary of Test Report	6
2.0	Introduction	6
3.0	Object	6
4.0	Test Set-Up	7
5.0	Test Equipment	8
6.0	Ambient Measurements	9
7.0	Description of Test Sample	10
8.0	Additional Description of Test Sample	11
9.0	Photo Information and Test Set-Up	11
10.0	Radiated Photos Taken During Testing	12
10.0	Conducted Photos Taken During Testing	16
11.0	Results of Tests	19
12.0	Conclusion	19
	TABLE 1 – EQUIPMENT LIST	20
	Appendix A – AC Power Line Conducted Emissions Test	21
1.0	AC Power Line Conducted Emission Measurements	22
	Appendix A AC Power Line Conducted Data and Graph(s) taken during testing	23



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

TABLE OF CONTENTS

Appendix B – Electric Field Radiated Emissions Tests	28
1.0 Spurious Emissions at the Antenna Terminals/Antenna Connector	29
1.0 Low CHN QPSK RF Conducted Emission made at the Antenna Terminals	30
1.0 Mid CHN QPSK RF Conducted Emission made at the Antenna Terminals	36
1.0 High CHN QPSK RF Conducted Emission made at the Antenna Terminals.....	42
1.0 Low CHN 16QAM RF Conducted Emission made at the Antenna Terminals	48
1.0 Mid CHN 16QAM RF Conducted Emission made at the Antenna Terminals.....	54
1.0 High CHN 16QAM RF Conducted Emission made at the Antenna Terminals	60
1.0 Low CHN 64QAM RF Conducted Emission made at the Antenna Terminals	66
1.0 Mid CHN 64QAM RF Conducted Emission made at the Antenna Terminals.....	72
1.0 High CHN 64QAM RF Conducted Emission made at the Antenna Terminals	78
2.0 RF Conducted Emissions Photos Taken During Testing.....	84
3.0 Restricted Bands	85
4.0 Restricted Band and Band Edge Compliance	85
4.0 Data and Graph(s) taken showing the Restricted Band Compliance	86
4.0 QPSK Data and Graph(s) taken showing the Band Edge Conducted Compliance	90
4.0 16QAM Data and Graph(s) taken showing the Band Edge Conducted Compliance	93
4.0 64QAM Data and Graph(s) taken showing the Band Edge Conducted Compliance	96
5.0 Field Strength of Fundamental and Spurious Emission Measurements	99
5.0 30 – 1000 MHz Radiated Data and Charts taken for Spurious Emissions	101
6.0 Transmitter Duty Cycle Graphs Taken During testing	108
6.0 QPSK 6 dB Bandwidth Graphs taken during testing.....	112
6.0 16QAM 6 dB Bandwidth Graphs taken during testing.....	116
6.0 64QAM 6 dB Bandwidth Graphs taken during testing.....	120
6.0 QPSK Conducted Peak Output Power Graphs Taken During testing	124
6.0 16QAM Conducted Peak Output Power Graphs Taken During testing	128
6.0 64QAM Conducted Peak Output Power Graphs Taken During testing	132
6.0 QPSK Peak Power Spectral Density Graphs Taken During testing	136
6.0 16QAM Peak Power Spectral Density Graphs Taken During testing	140
6.0 64QAM Peak Power Spectral Density Graphs Taken During testing	144



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO/ILAC/JAF Communiqué dated 18 June 2005).



2008-10-01 through 2009-09-30

Effective dates

Dally S. Bruce
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1.0 SUMMARY OF TEST REPORT

It was found that the OFDM Access Point - CAP58430, Model Number(s) 5780APUS **meets** the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.247 for operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands.

2.0 INTRODUCTION

On October 19, 20, 21, 22, 2009, a series of radio frequency interference measurements was performed on OFDM Access Point - CAP58430, Model Number(s) 5780APUS, Serial Number: 0A003E37A00D. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003 & the FCC guidance document "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005". Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

Main Test Facility:

D.L.S. Electronic Systems, Inc.
1250 Peterson Drive
Wheeling, Illinois 60090

O.A.T.S. Test Facility:

D.L.S. Electronic Systems, Inc.
166 S. Carter Street
Genoa City, Wisconsin 53128
FCC Registration Number: 334127

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.205, 15.209 & 15.247 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the ANSI C63.4-2003, Annex H or following the guidelines in the FCC's "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005". The conducted tests were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the ANSI C63.4-2003, Annex H.

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8 or following the guidelines in the FCC's "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005", as indicated in the test data section of this test report..



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in ANSI C63.4-2003.



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

7.1 Description:

5.7GHz ISM transciever Motorola OFDM Access Point

7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Length: 14 in x Width: 9 in x Height: 3 in

7.3 LINE FILTER USED:

N/A

7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

150 kHz, 75 kHz

Clock Frequencies:

25 MHz, 20 MHz

7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. Gen 2 HP PC Board	PN: 8401008001p3 Issue A
2. 17 dBi Antenna	PN: 8514724E01 antenna sector AP
3. Connector	PN: 09010084001
4. Cable for Connectorized Antenna	PN: 3001D132J01/B



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

NOTE:

The unit was tested while transmitting continuously. The unit was tested using 64-QAM, 16-QAM and QPSK type modulations.

The unit was powered from a CMM4 (model 1090CK, SN: 0A003EE8055F), which was powered from an external 56 VDC DIN rail power supply (Power-One Convert Select model # LXR 1740-6M1).

The AC line conducted emissions test was done using the Class A limits of FCC Part 15.107 because the EUT gets its power over the Ethernet cable from the CMM4 and DIN rail power supply which is a Class A rated device.

The unit was tested with an external 16 dBi gain antenna.

9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 OFDM Access Point - CAP58430
Model Number: 5780APUS; Serial Number: 0A003E37A00D

Item 1 15 meter non-shielded Power/Ethernet CAT 5e communications cable.


Item 2 1 inch wide, 2 meter long, ground braid from ground connector of EUT to ground plane of test site.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING

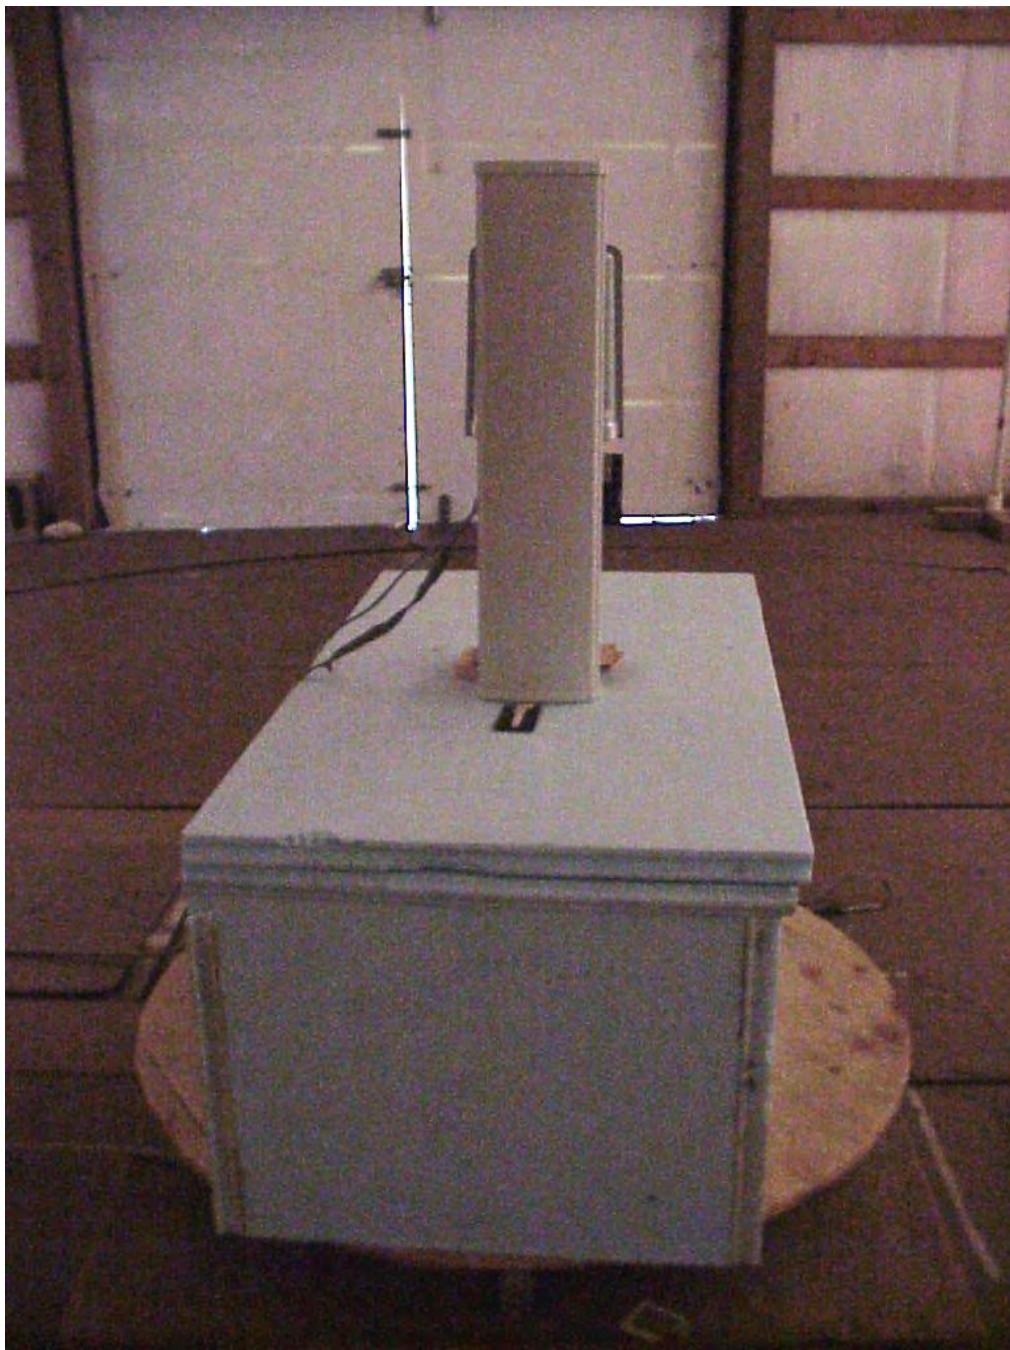

Radiated Front



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T)




Radiated Side



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T)

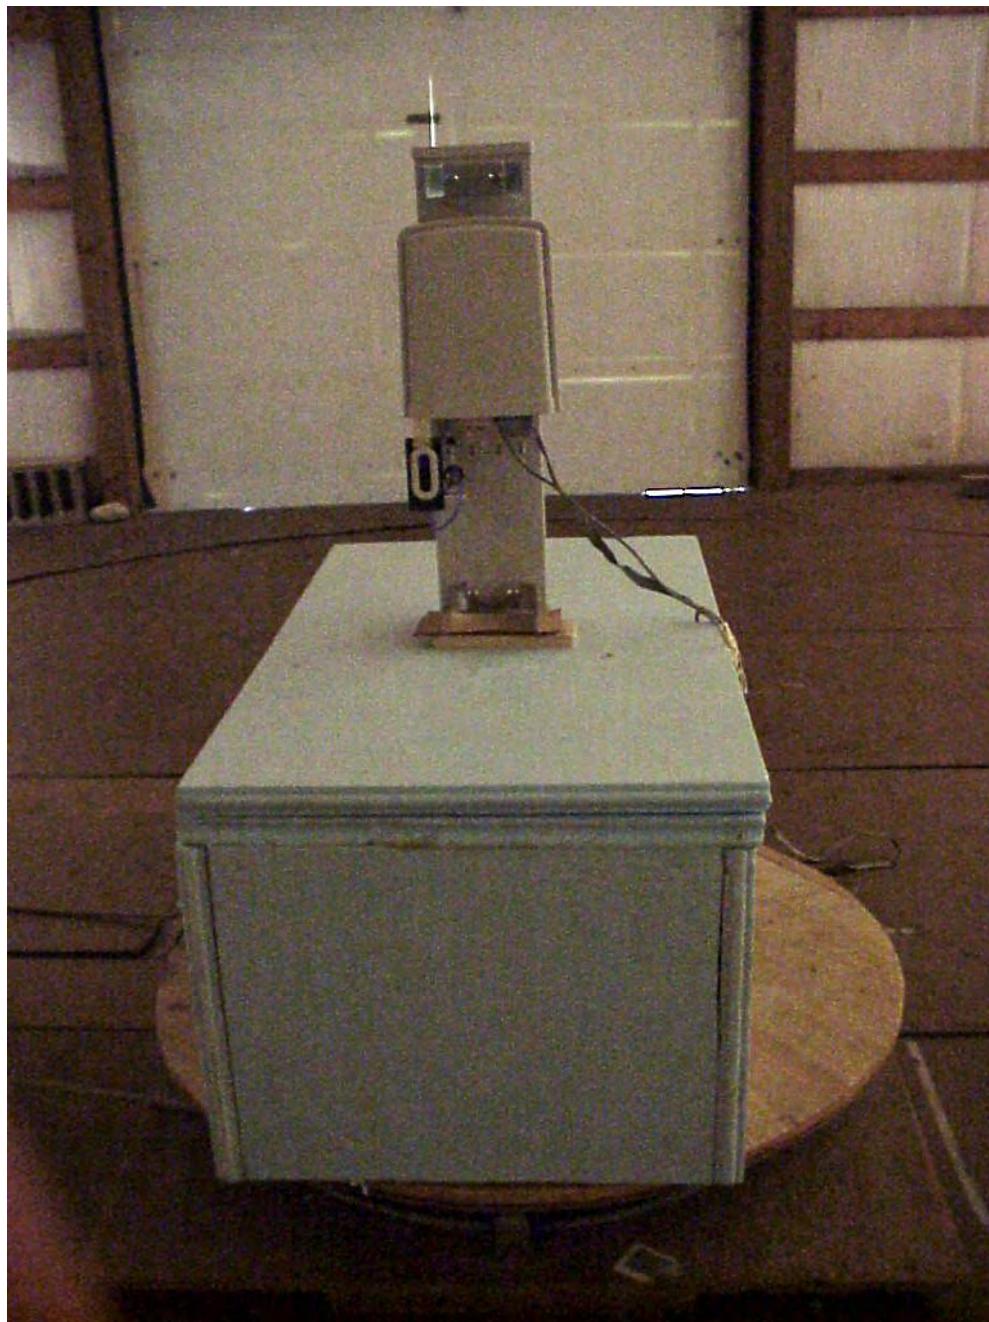

Radiated Side



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T)



RF Conducted



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 CONDUCTED PHOTOS TAKEN DURING TESTING



AC line Conduct front



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 CONDUCTED PHOTOS TAKEN DURING TESTING (CON'T)



AC line Conduct Back 1



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

10.0 CONDUCTED PHOTOS TAKEN DURING TESTING (CON'T)



AC line Conduct Back 2



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

11.0 RESULTS OF TESTS

The radio interference emission charts can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report.

12.0 CONCLUSION

It was found that the OFDM Access Point - CAP58430, Model Number(s) 5780APUS **meets** the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.247 for operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Description	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	7/10
LISN	Solar	9252-50-R-24-BNC	961019	10 kHz – 30 MHz	7/10
Filter- High-Pass	SOLAR	7930-120	090702	120 kHz	2/10
Limiter	Electro-Metrics	EM-7600	706	10 kHz – 30 MHz	1/10
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	7/10
Preamplifier	Rohde & Schwarz	TS-PR10	032001/004	9 kHz – 1 GHz	1/10
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	4/10
Antenna	EMCO	3146	1205	200 MHz – 1 GHz	4/10
Preamp	Ciao	CA118-4010	101	1GHz-18 GHz	1/10
Horn Antenna	EMCO	3115	9903-5731	1-18 GHz	6/11
High Pass Filter	Planar	HP8G-7G8-CD-SFF	PF1225/0728	7-26 GHz	7/10
Preamp	Miteq	AMF-8B-180265-40-10P-H/S	438727	18 GHz-26 GHz	8/10
Horn Antenna	EMCO	3116	2549	18 – 40 GHz	8/10
High Pass Filter	Planar	CL22500-9000-CD-SS	PF1229/0728	15-40 GHz	7/10
Preamp	Rohde & Schwarz	TS-PR40	052002/025	26 GHz-40 GHz	8/10
Power Meter	Anritsu	ML2487A	6K00002069	NA	2/10
Power Sensor	Anritsu	MA2491A	031650	50 MHz-18 GHz	12/09

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

Part 15, Subpart C, Section 15.207

ANSI C63.4-2003



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

1.0 AC POWER LINE CONDUCTED EMISSION MEASUREMENTS

If applicable, the conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in the American National Standards Institute, ANSI C63.4-2003, Section 12. Since the device is operated from the public utility lines, the 115 Vac 60 Hz power leads, high and low sides, were to be measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. All signals were then recorded. The allowed levels for Intentional Radiators cannot exceed the following:

Frequency of Emissions (MHz)	Conducted Limits (dBuV)	
	Quasi Peak	Average
.15 to .5	66 to 56	56 to 46
.5 to 5	56	46
5 to 30	60	50

All conducted emissions measurements were made at a test room temperature of **68°F** at **46%** relative humidity.

NOTE:

The AC line conducted emissions test was done using the Class A limits of FCC Part 15.107 because the EUT gets its power over the Ethernet cable from the CMM4 and DIN rail power supply which is a Class A rated device.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

APPENDIX A

Part 15, Subpart C, Section 15.207

AC POWER LINE DATA AND GRAPH(S)

TAKEN DURING TESTING

NOTE:


The AC line conducted emissions test was done using the Class A limits of FCC Part 15.107 because the EUT gets its power over the Ethernet cable from the CMM4 and DIN rail power supply which is a Class A rated device.

Voltage Mains Test

EUT: OFDM Access Point CAP 58430 Model: 5780APUS
 Manufacturer: Motorola
 Operating Condition: 68 deg F, 46% R.H.
 Test Site: DLS O.F. Screen Room
 Operator: Craig B
 Test Specification: 120 V 60 Hz
 Comment: Line 1; Tx at 5775 MHz, 64QAM
 Date: 10-22-2009

SCAN TABLE: "Line Cond Scrn RmFin"

Short Description:		Line Conducted Emissions				
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	2.0 s	9 kHz	LISN DLS#128
CISPR AV						

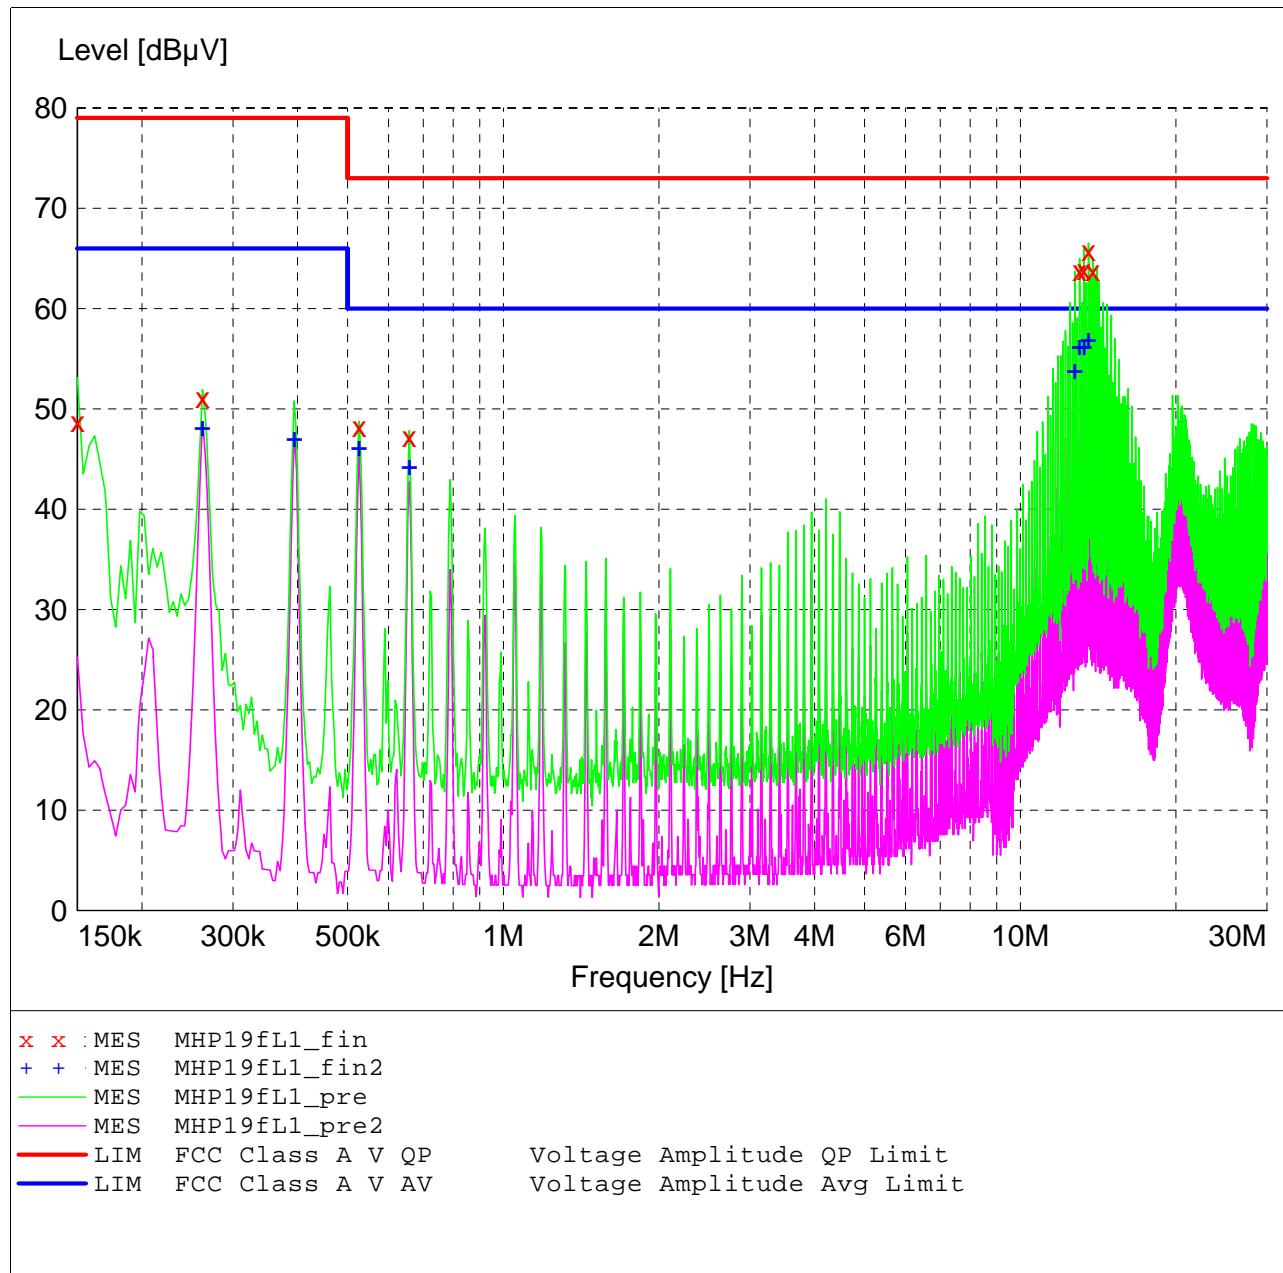

MEASUREMENT RESULT: "MHP19fL1_fin"

10/22/2009 10:14AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	48.70	12.8	79	30.3	QP	---	---
0.262000	51.10	10.9	79	27.9	QP	---	---
0.526000	48.20	10.5	73	24.8	QP	---	---
0.658000	47.20	10.3	73	25.8	QP	---	---
13.022000	63.80	10.5	73	9.2	QP	---	---
13.286000	63.90	10.5	73	9.1	QP	---	---
13.546000	65.80	10.5	73	7.2	QP	---	---
13.810000	63.80	10.5	73	9.2	QP	---	---

MEASUREMENT RESULT: "MHP19fL1_fin2"

10/22/2009 10:14AM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.262000	48.20	10.9	66	17.8	CAV	---	---
0.394000	47.10	10.3	66	18.9	CAV	---	---
0.526000	46.20	10.5	60	13.8	CAV	---	---
0.658000	44.30	10.3	60	15.7	CAV	---	---
12.758000	53.90	10.4	60	6.1	CAV	---	---
13.022000	56.30	10.5	60	3.7	CAV	---	---
13.286000	56.30	10.5	60	3.7	CAV	---	---
13.550000	57.00	10.5	60	3.0	CAV	---	---

Voltage Mains Test

EUT: OFDM Access Point CAP 58430 Model: 5780APUS
 Manufacturer: Motorola
 Operating Condition: 68 deg F, 46% R.H.
 Test Site: DLS O.F. Screen Room
 Operator: Craig B
 Test Specification: 120 V 60 Hz
 Comment: Line 2; Tx at 5775 MHz, 64QAM
 Date: 10-22-2009

SCAN TABLE: "Line Cond Scrn RmFin"

Line Conducted Emissions					
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time Bandw.
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	2.0 s	9 kHz CISPR AV

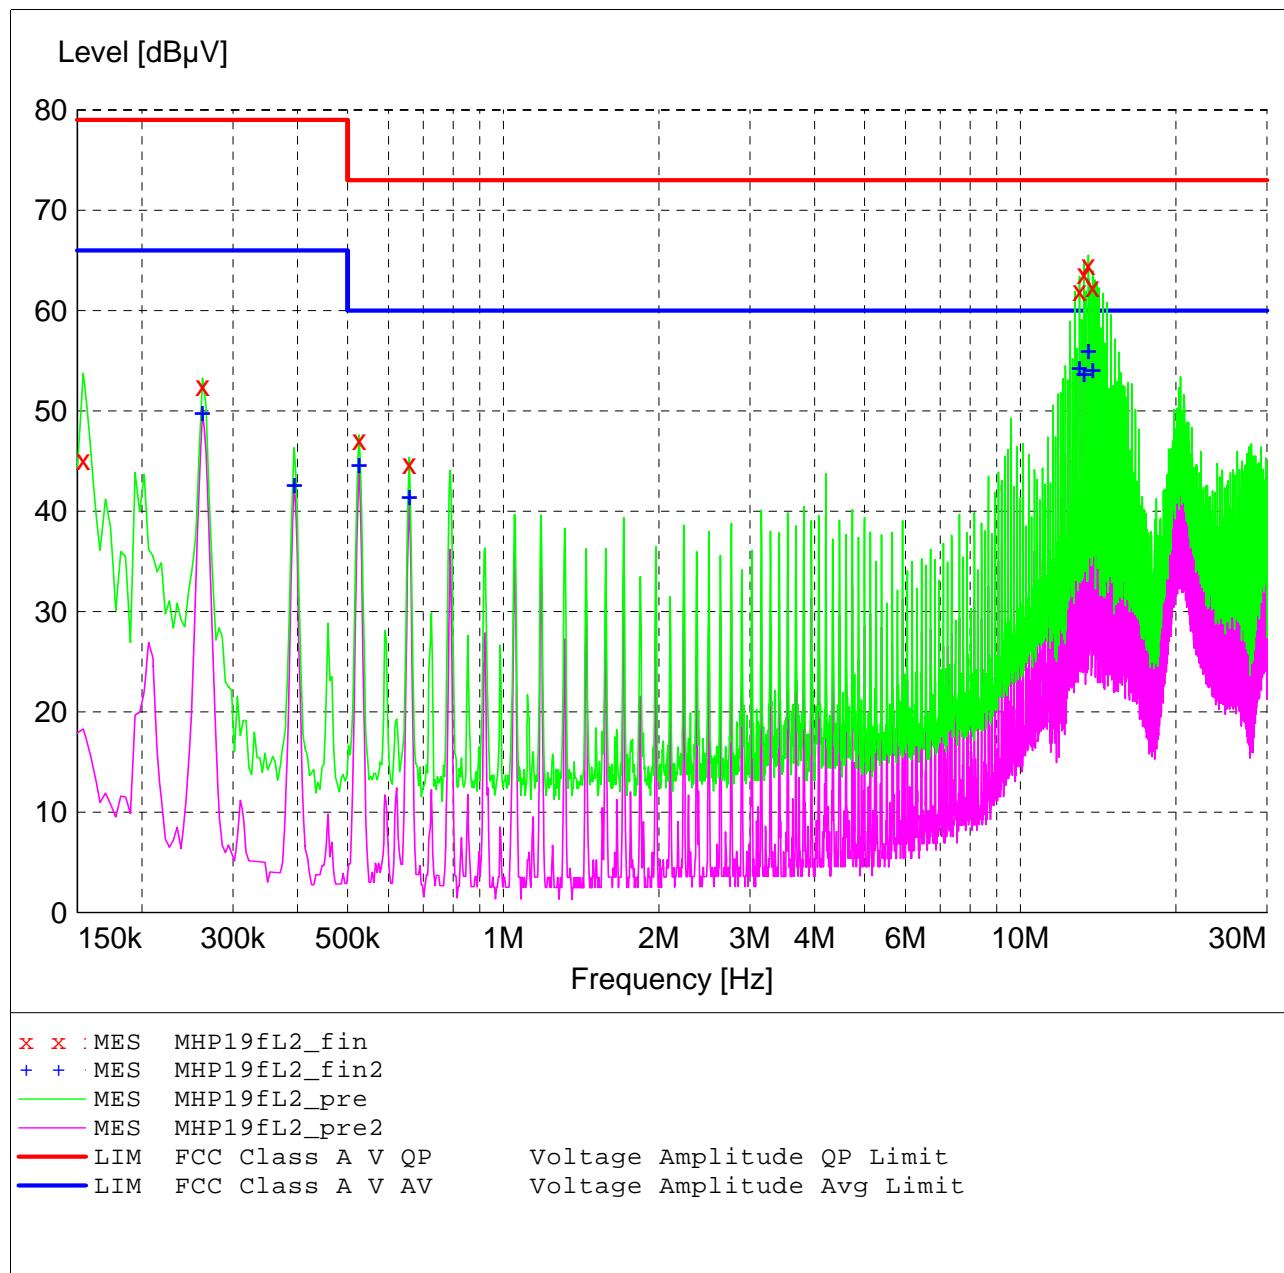

MEASUREMENT RESULT: "MHP19fL2_fin"

10/22/2009 10:26AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.154000	45.10	12.7	79	33.9	QP	---	---
0.262000	52.50	10.9	79	26.5	QP	---	---
0.526000	47.10	10.5	73	25.9	QP	---	---
0.658000	44.70	10.3	73	28.3	QP	---	---
13.018000	62.00	10.5	73	11.0	QP	---	---
13.278000	63.70	10.5	73	9.3	QP	---	---
13.542000	64.60	10.5	73	8.4	QP	---	---
13.806000	62.40	10.5	73	10.6	QP	---	---

MEASUREMENT RESULT: "MHP19fL2_fin2"

10/22/2009 10:26AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.262000	49.90	10.9	66	16.1	CAV	---	---
0.394000	42.70	10.3	66	23.3	CAV	---	---
0.526000	44.70	10.5	60	15.3	CAV	---	---
0.658000	41.50	10.3	60	18.5	CAV	---	---
13.018000	54.40	10.5	60	5.6	CAV	---	---
13.282000	53.80	10.5	60	6.2	CAV	---	---
13.542000	56.10	10.5	60	3.9	CAV	---	---
13.806000	54.20	10.5	60	5.8	CAV	---	---



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

APPENDIX B

TEST PROCEDURE

Part 15, Subpart C, Section 15.247 (a-h)

OPERATION WITHIN THE BAND 902-928 MHz,

2400-2483.5 MHz AND 5725-5857 MHz

ANSI C63.4-2003

AND

KDB Publication No. 558074 (DTS)

NOTE:

Per the FCC's guidance document "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005", as indicated in the test data section of this test report.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

1.0 SPURIOUS EMISSIONS AT ANTENNA TERMINALS – PART 15.247(d), 15.203 & FCC Guidance Document "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005".

Spurious conducted emissions were measured at the antenna terminals. Plots were made showing the amplitude of each harmonic emission with the equipment operated. As shown by the radiated charts there was no reason to believe that there were any spurious emissions other than the harmonics that were than individually investigated when doing the conducted test at the antenna terminals. Measurements were made up to the 10th harmonic of the fundamental.

As stated in 15.203 the OFDM Access Point - CAP58430 was designed to ensure that no antenna other than that furnished by Motorola Inc. will be used with the EUT. The use of a permanently attached antenna or antenna that uses an unique coupling to the intentional radiator was considered to comply with section 15.203.

The allowed emissions for transmitters operating in the 5725 MHz - 5850 MHz bands for OFDM Access Point - CAP58430 equipment are found under Part 15, Section 15.247(d). This paragraph states that in any 100 kHz bandwidth outside the frequency band which the spread spectrum intentional radiator is operating, the radio frequency power produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

NOTE: See the following pages for the data and graphs of the actual measurements made:



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

LOW CHN QPSK



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: QPSK

Frequency Range: 30 to 1000 MHz
Limit = -18.96 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

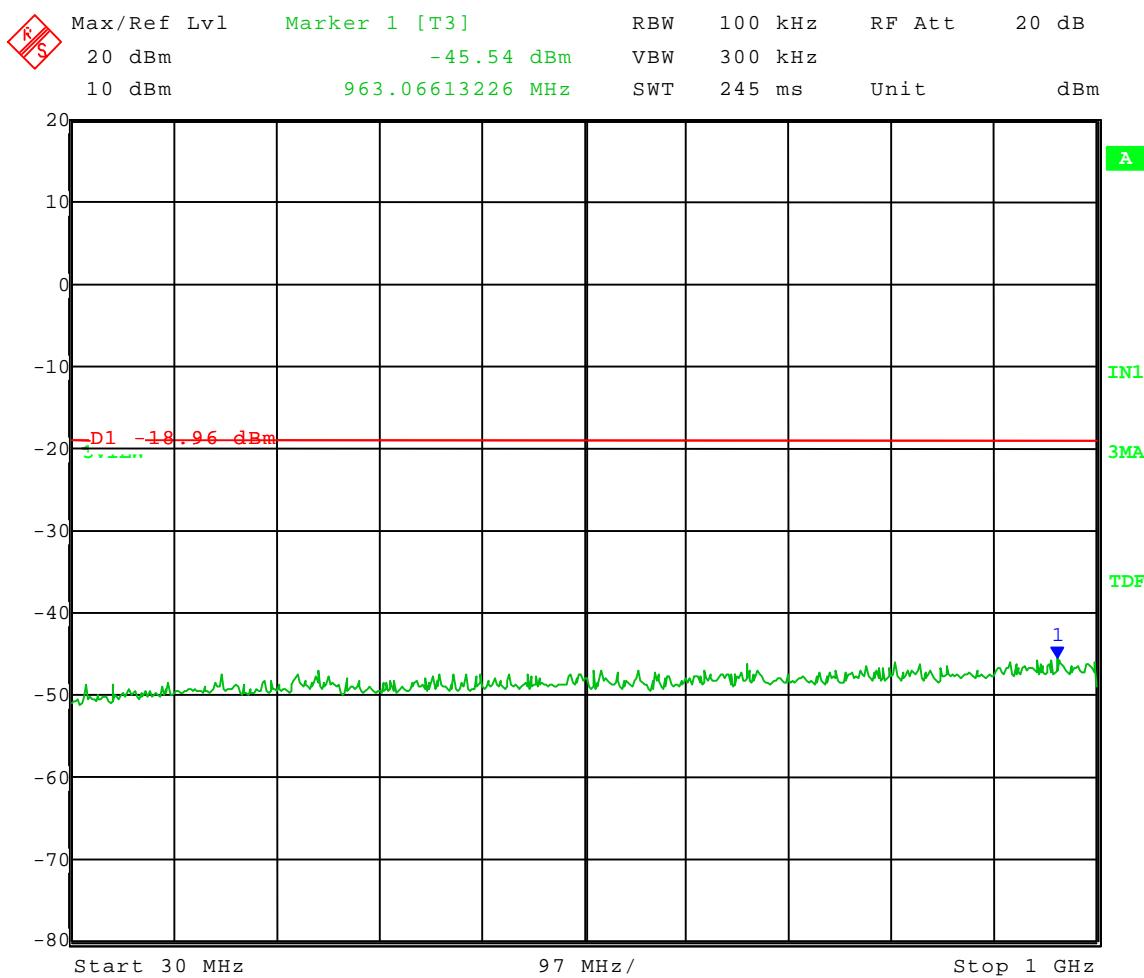

Date: 19.OCT.2009 14:53:38



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: QPSK

Frequency Range: 1 to 10 GHz
Limit = -18.96 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

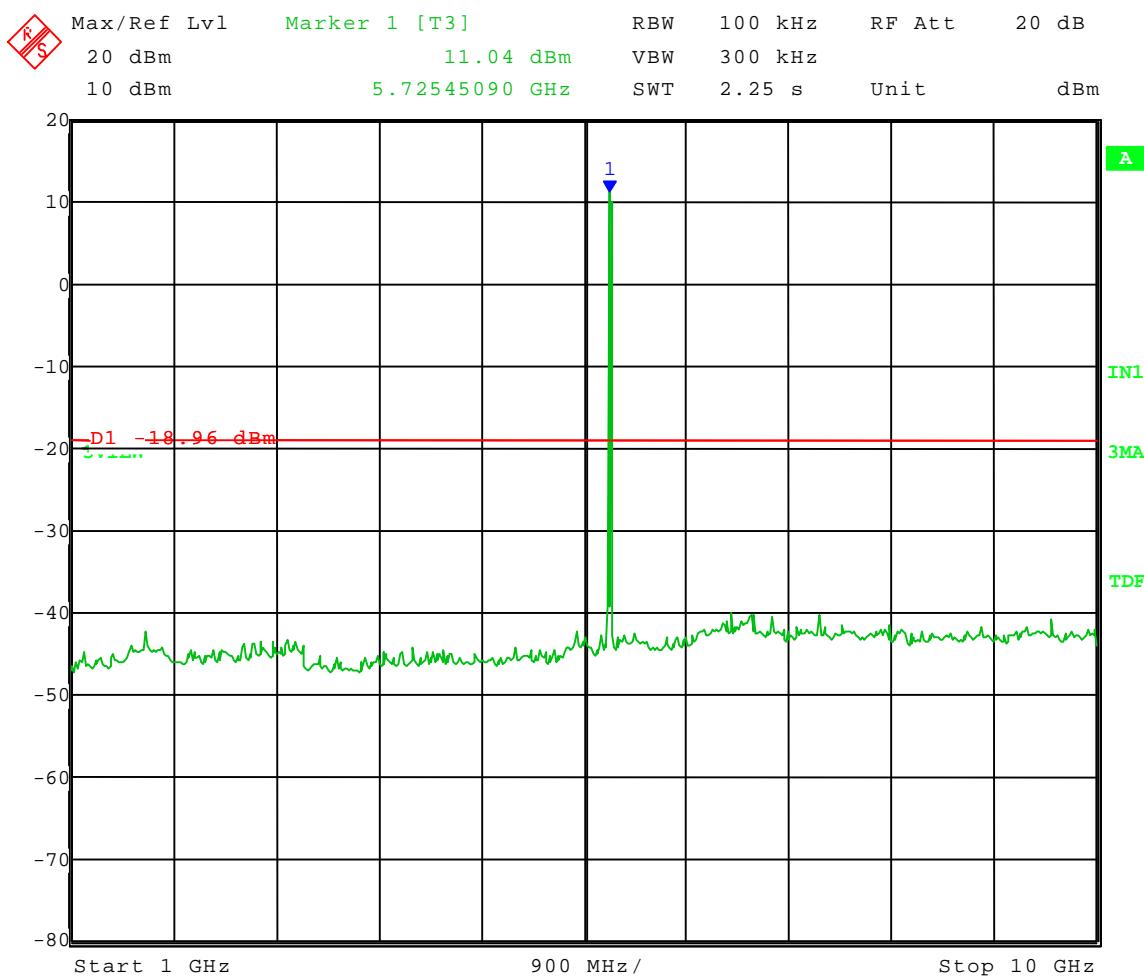

Date: 19.OCT.2009 14:48:14



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: QPSK

Frequency Range: 10 to 18 GHz
Limit = -18.96 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

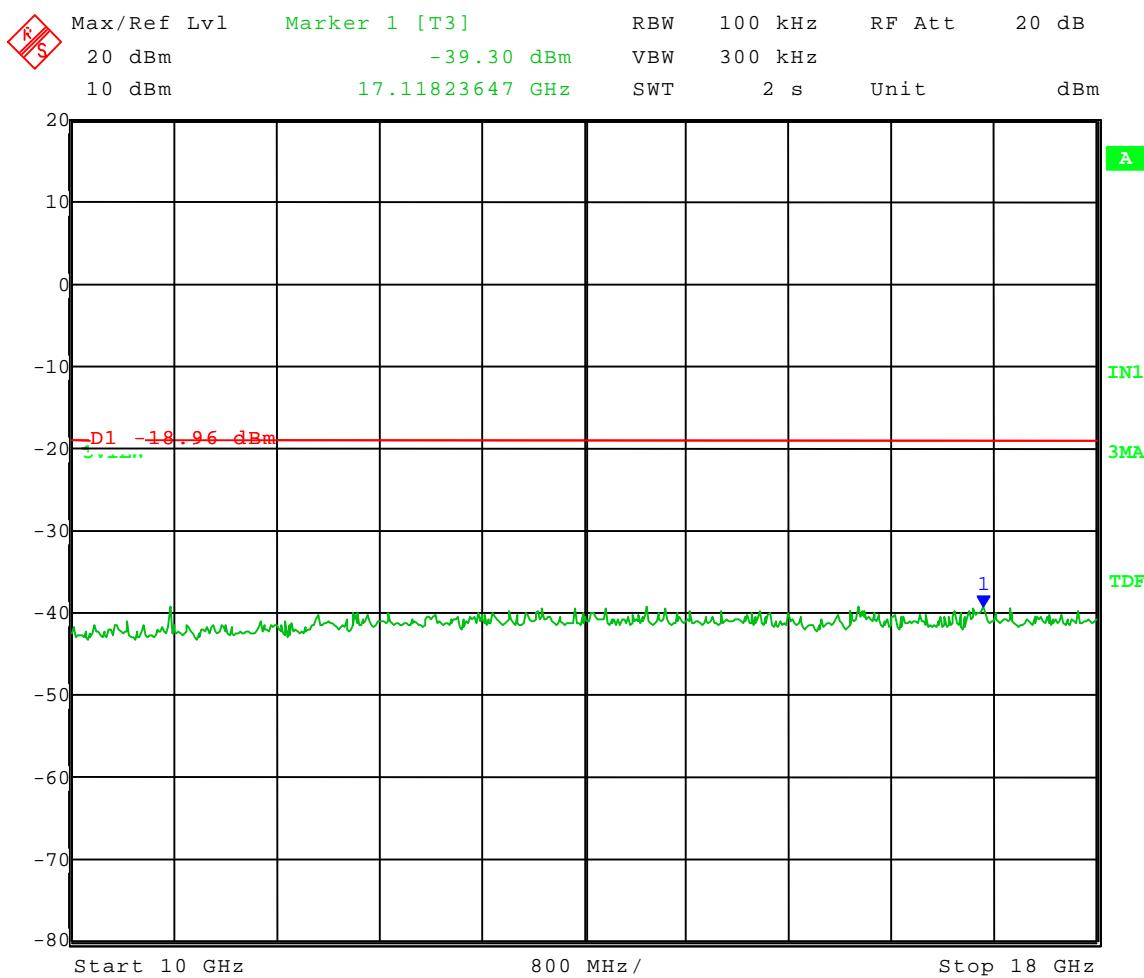

Date: 19.OCT.2009 14:49:26



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: QPSK

Frequency Range: 18 to 26 GHz
Limit = -18.96 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

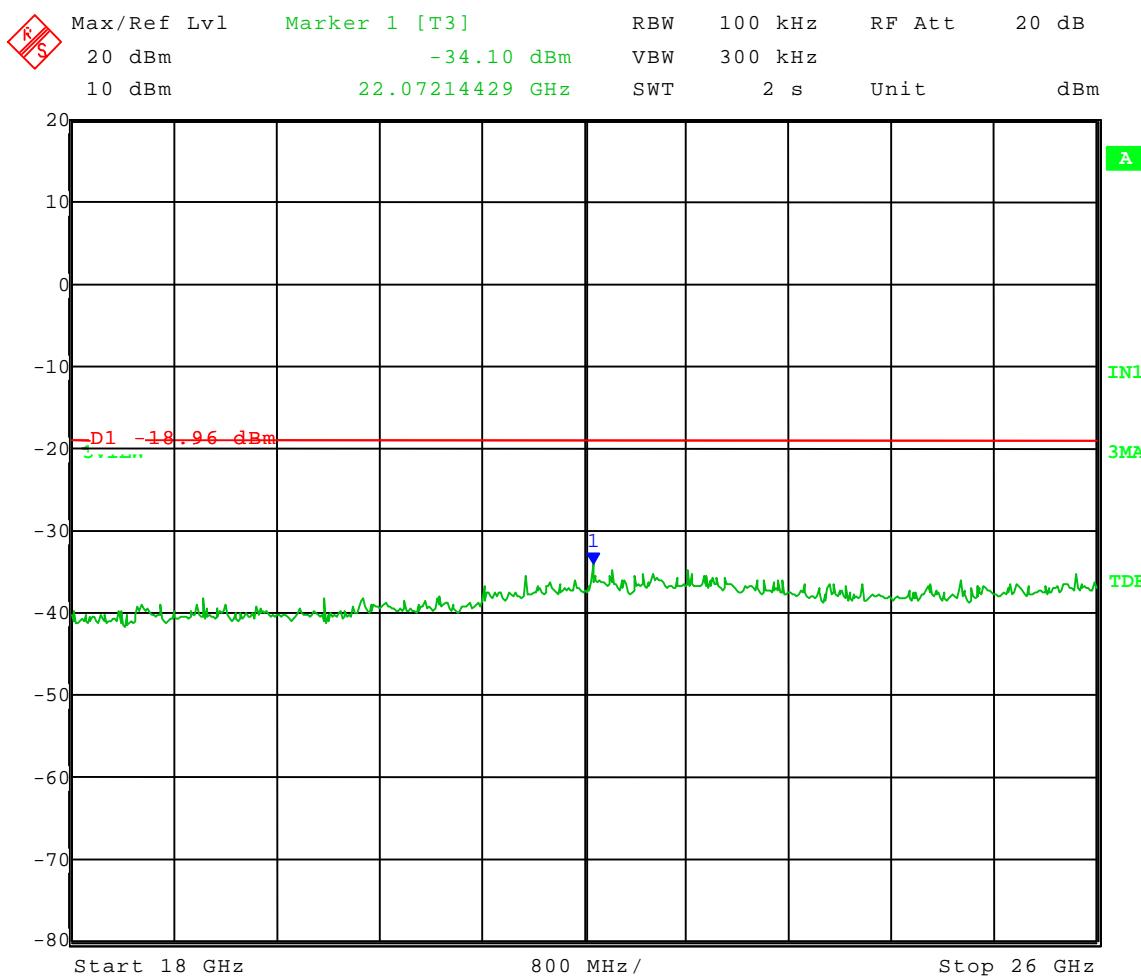

Date: 19.OCT.2009 14:50:36



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: QPSK

Frequency Range: 26 to 40 GHz
Limit = -18.96 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

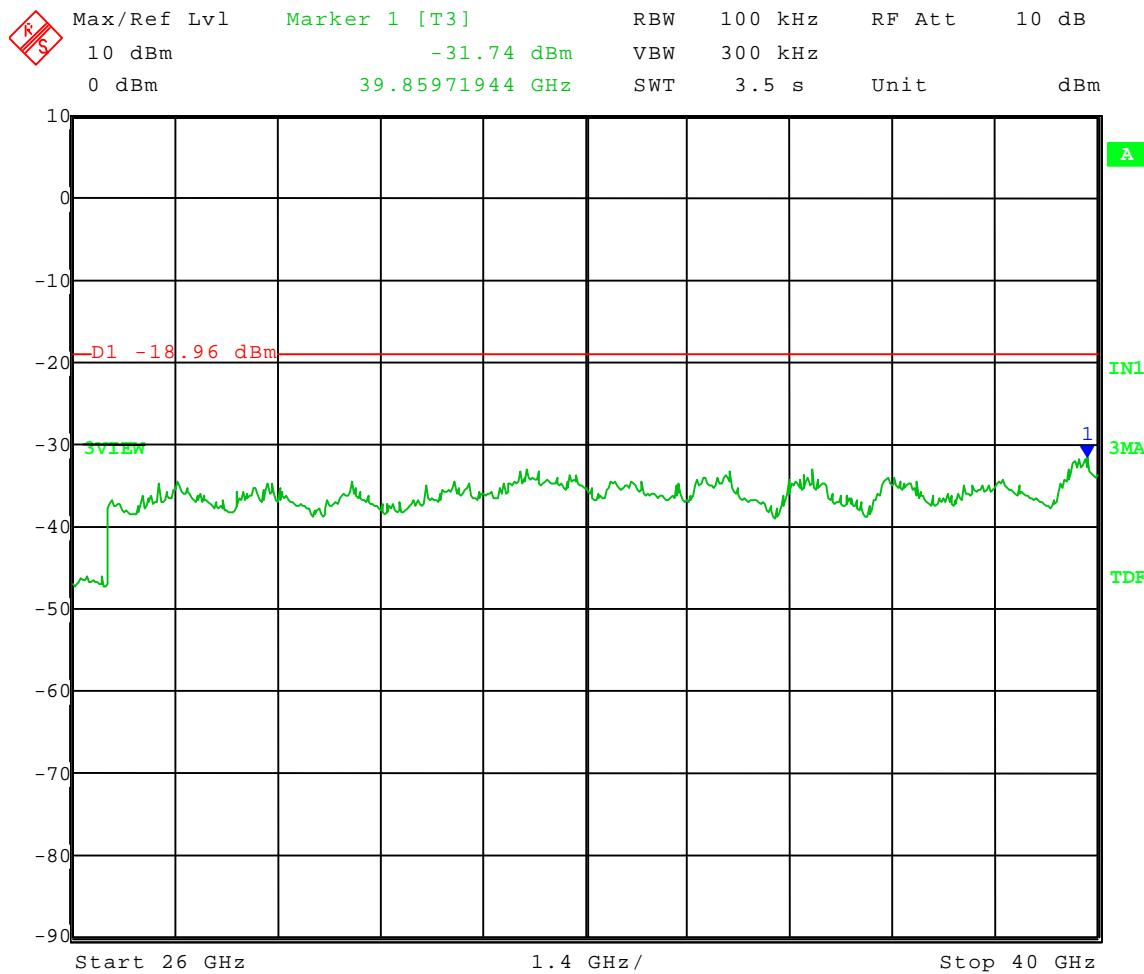

Date: 19.OCT.2009 14:52:18



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

MID CHN QPSK



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: **QPSK**

Frequency Range: 30 to 1000 MHz
Limit = -18.06 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

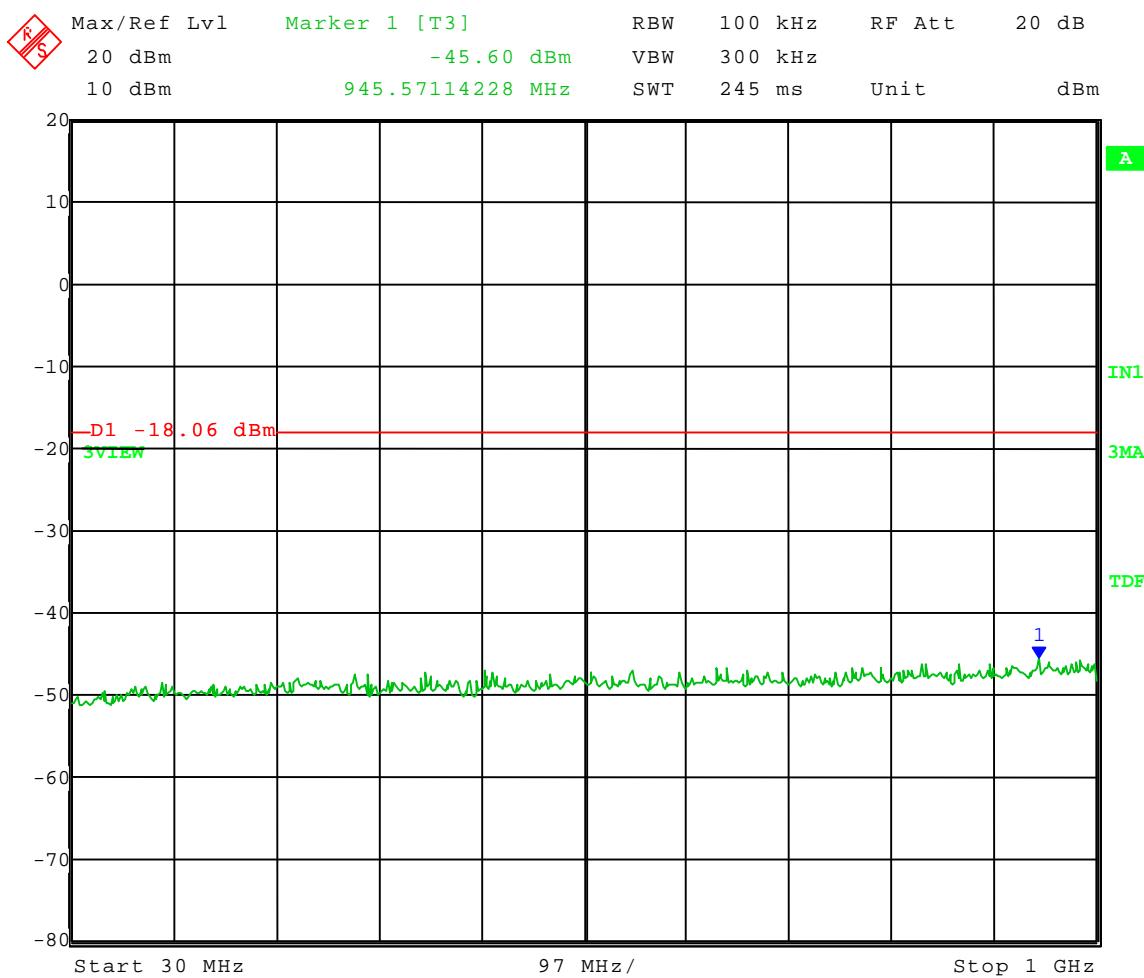

Date: 19.OCT.2009 15:31:26



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: **QPSK**

Frequency Range: 1 to 10 GHz
Limit = -18.06 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

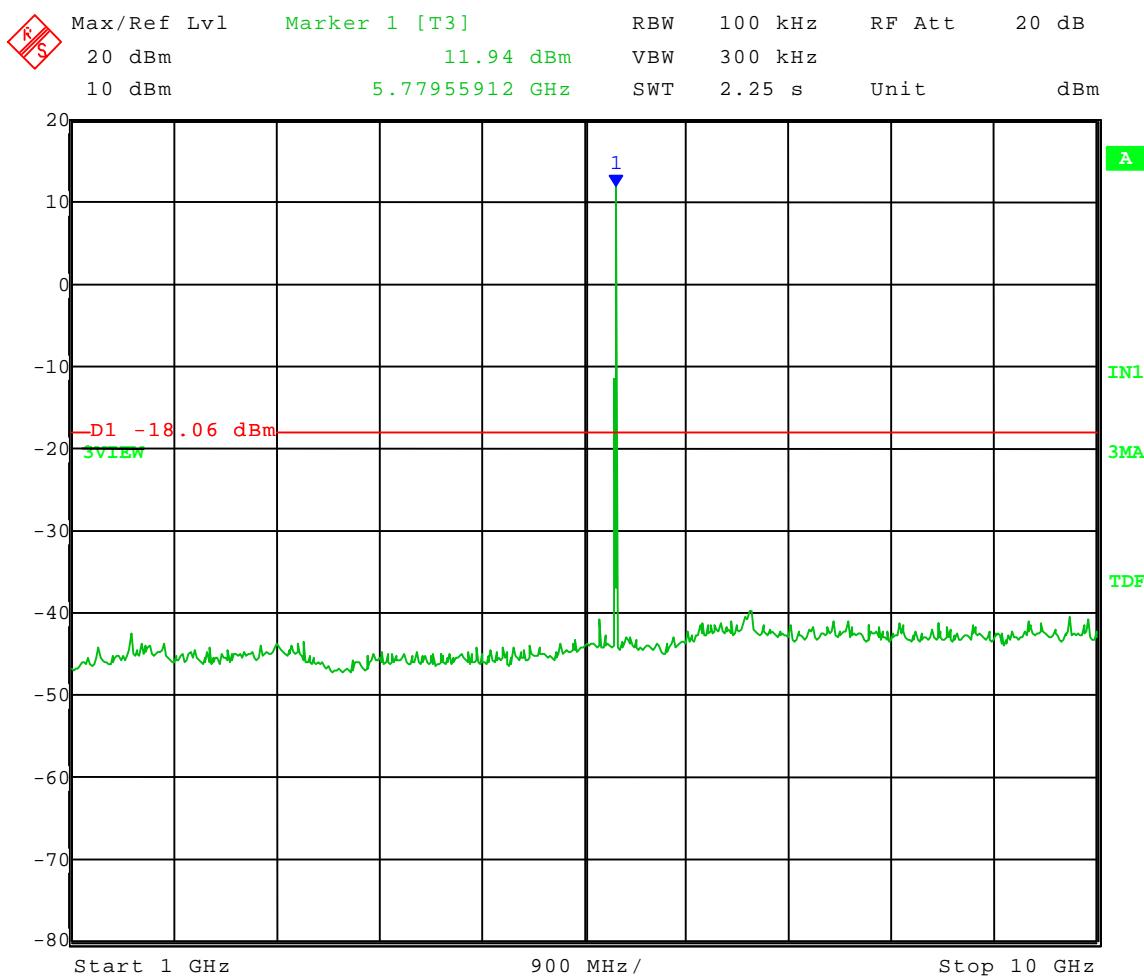

Date: 19.OCT.2009 15:26:58



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: **QPSK**

Frequency Range: 10 to 18 GHz
Limit = -18.06 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

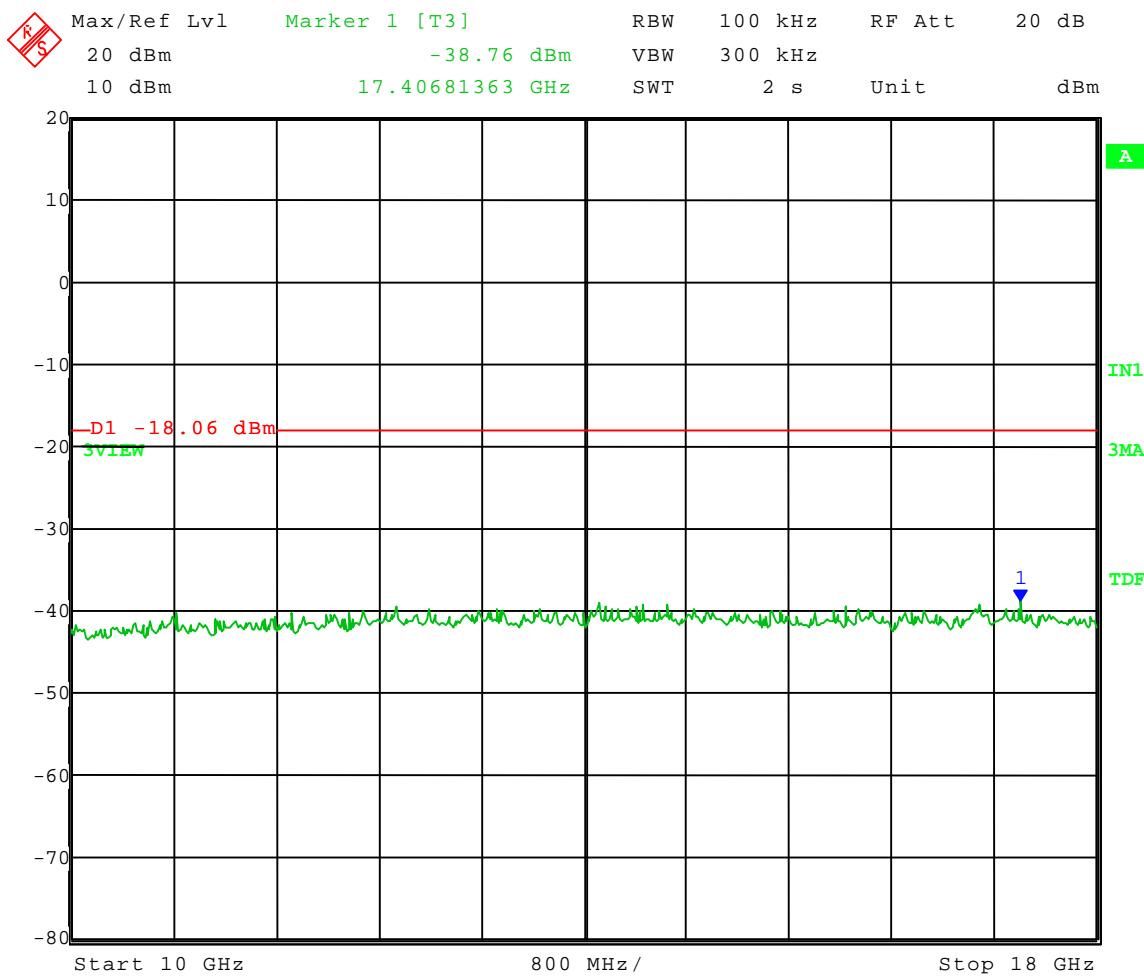

Date: 19.OCT.2009 15:27:59



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: **QPSK**

Frequency Range: 18 to 26 GHz
Limit = -18.06 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

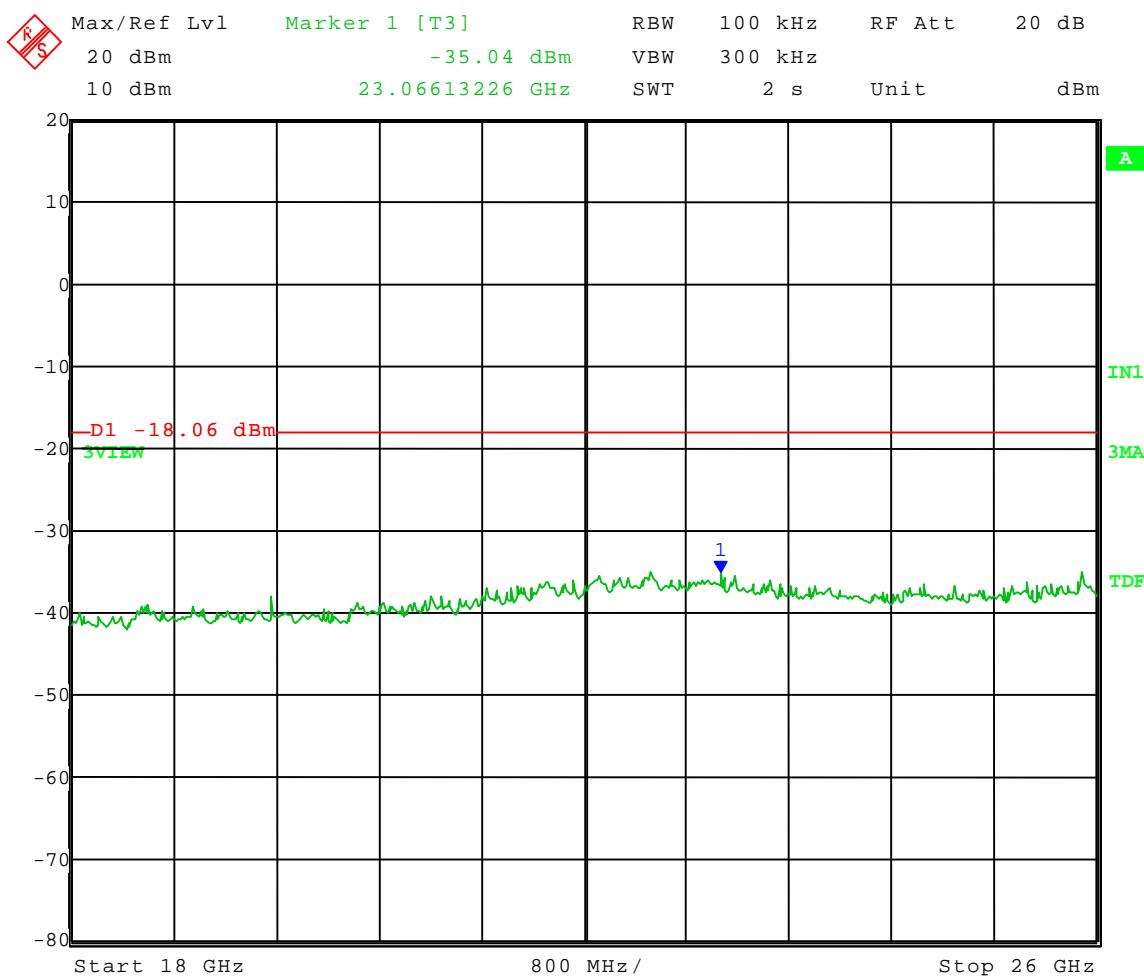

Date: 19.OCT.2009 15:28:56



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: **QPSK**

Frequency Range: 26 to 40 GHz
Limit = -18.06 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

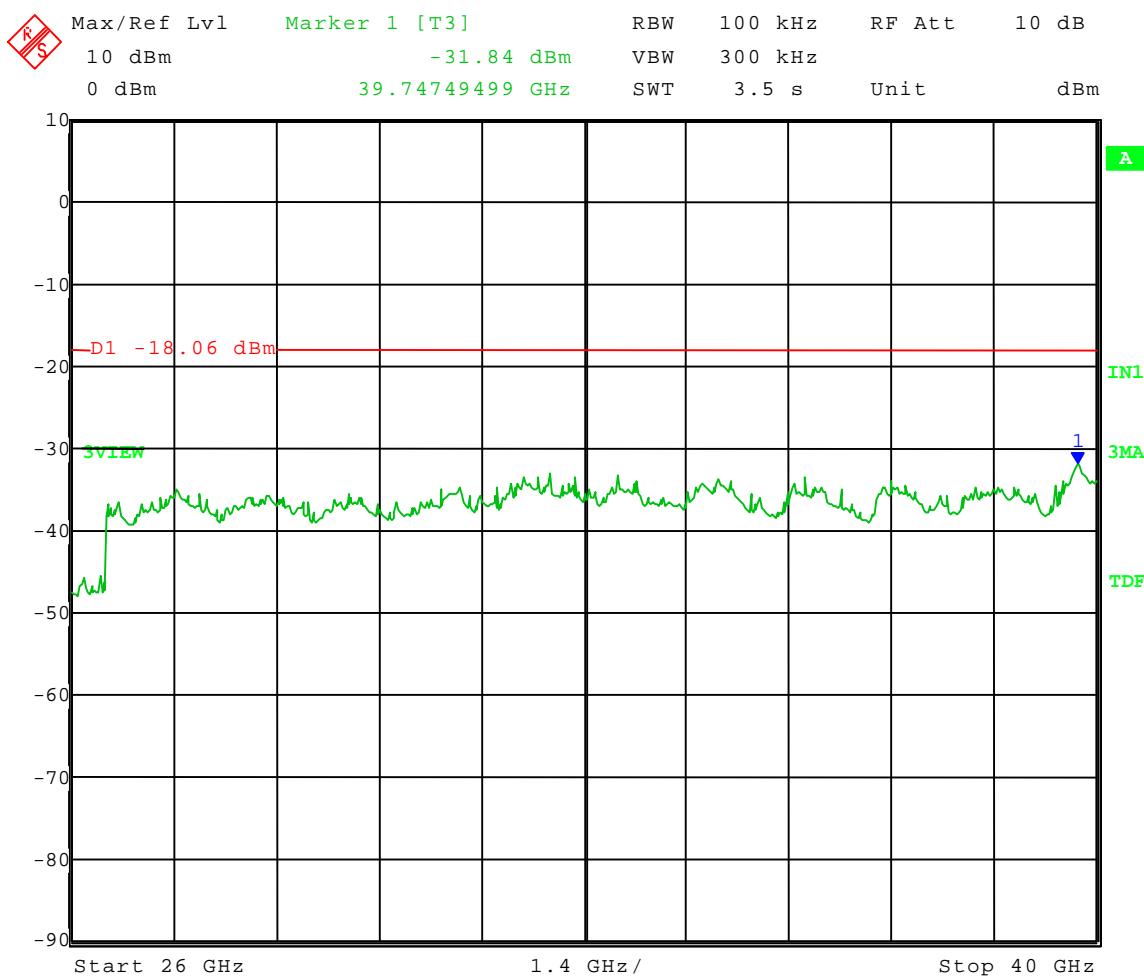

Date: 19.OCT.2009 15:29:58



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

HIGH CHN QPSK



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6D
Modulation: **QPSK**

Frequency Range: 30 to 1000 MHz
Limit = -17.16 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

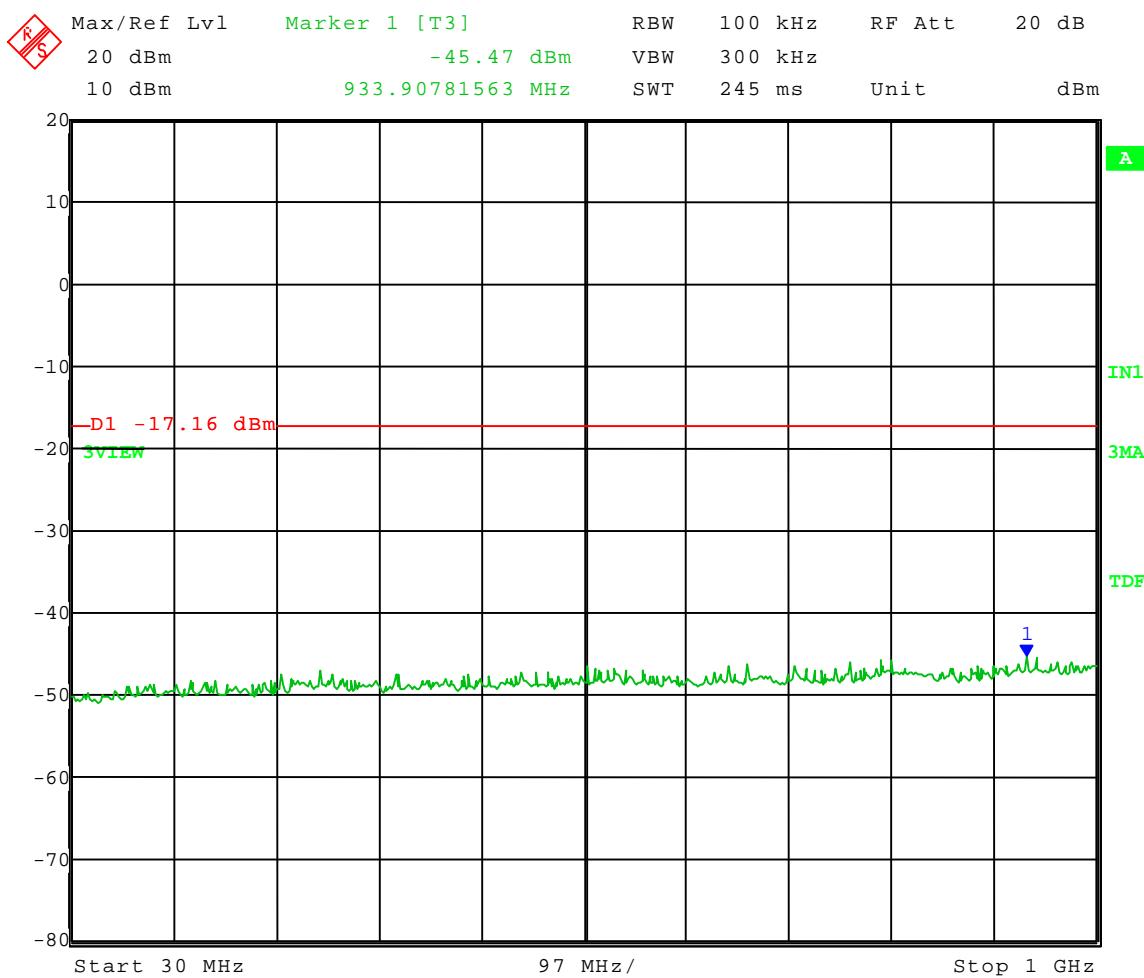

Date: 19.OCT.2009 15:58:28



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6D
Modulation: QPSK

Frequency Range: 1 to 10 GHz
Limit = -17.16 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

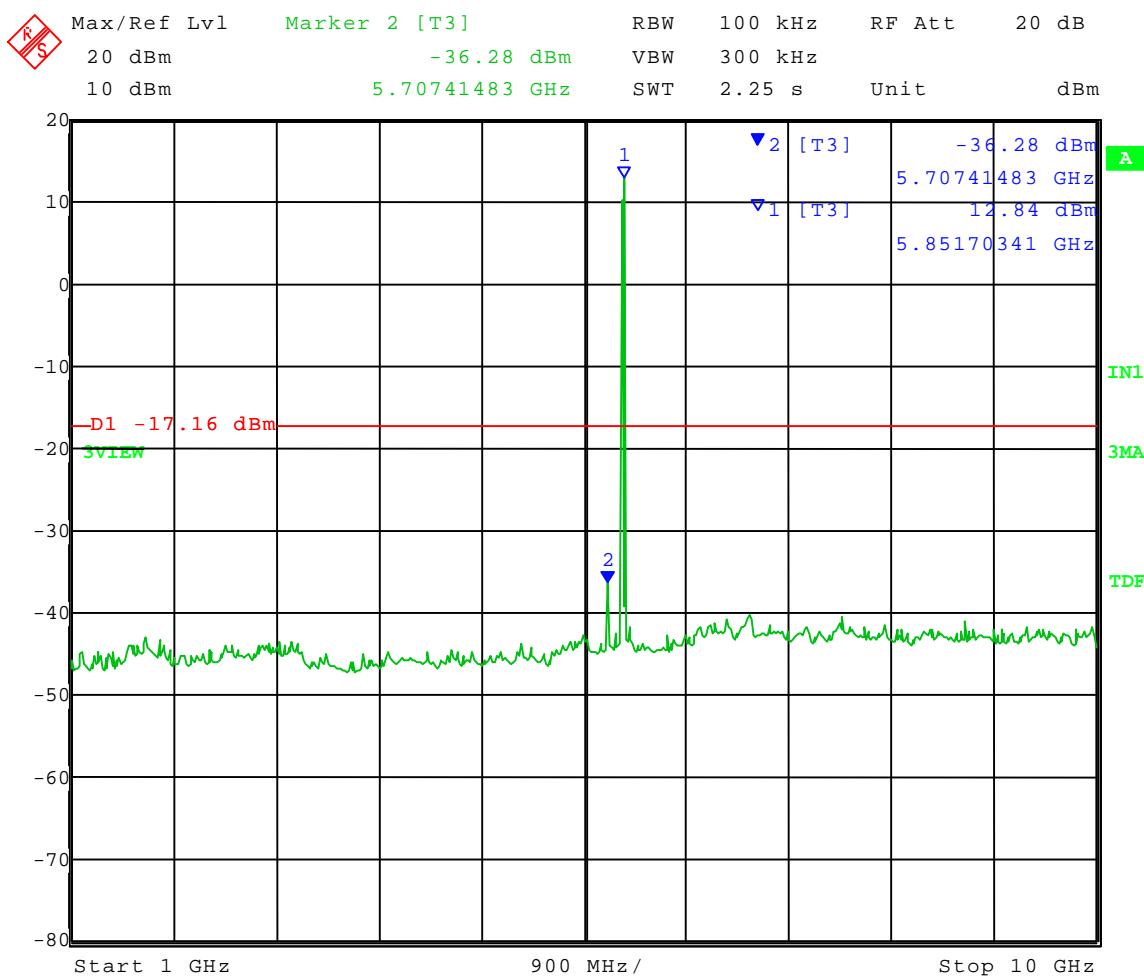

Date: 19.OCT.2009 15:53:24



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6D
Modulation: **QPSK**

Frequency Range: 10 to 18 GHz
Limit = -17.16 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

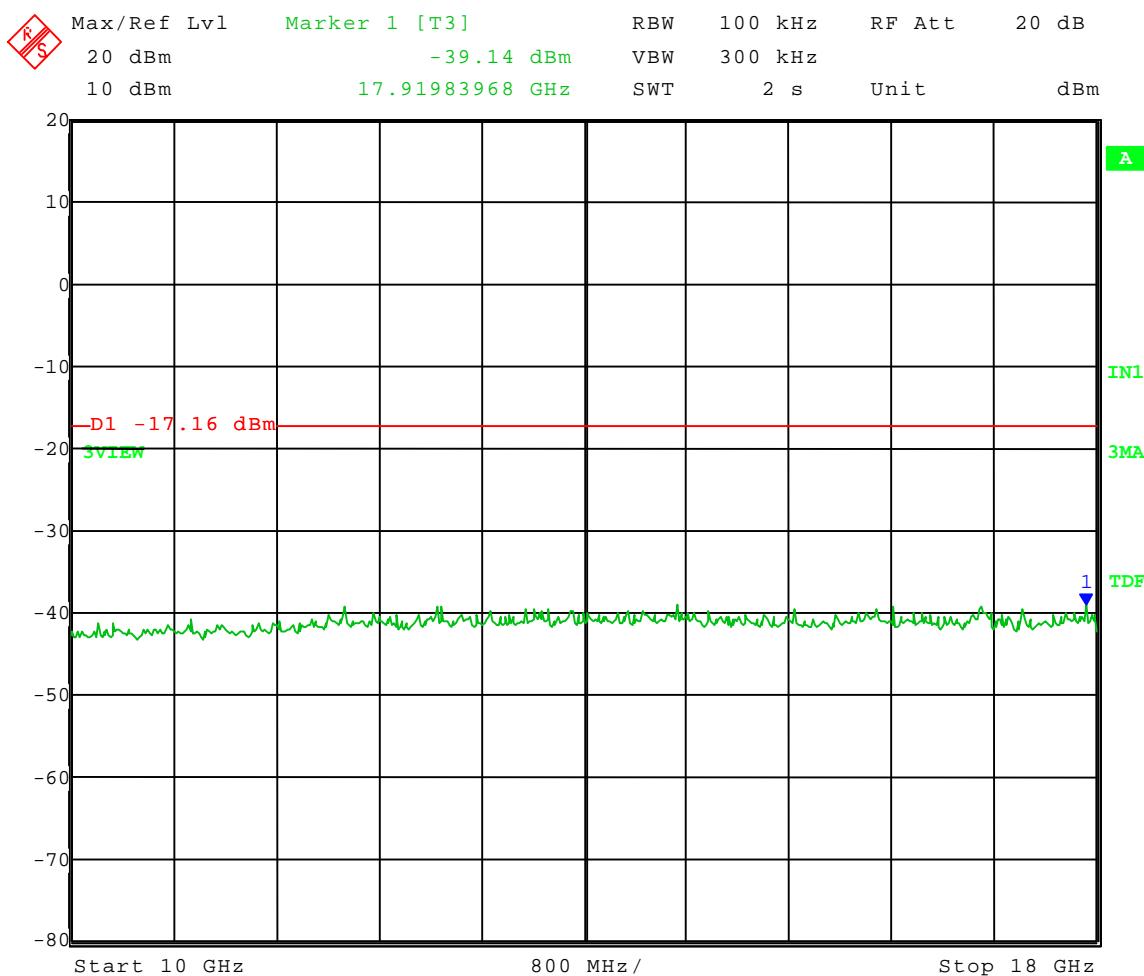

Date: 19.OCT.2009 15:54:52



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6D
Modulation: **QPSK**

Frequency Range: 18 to 26 GHz
Limit = -17.16 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

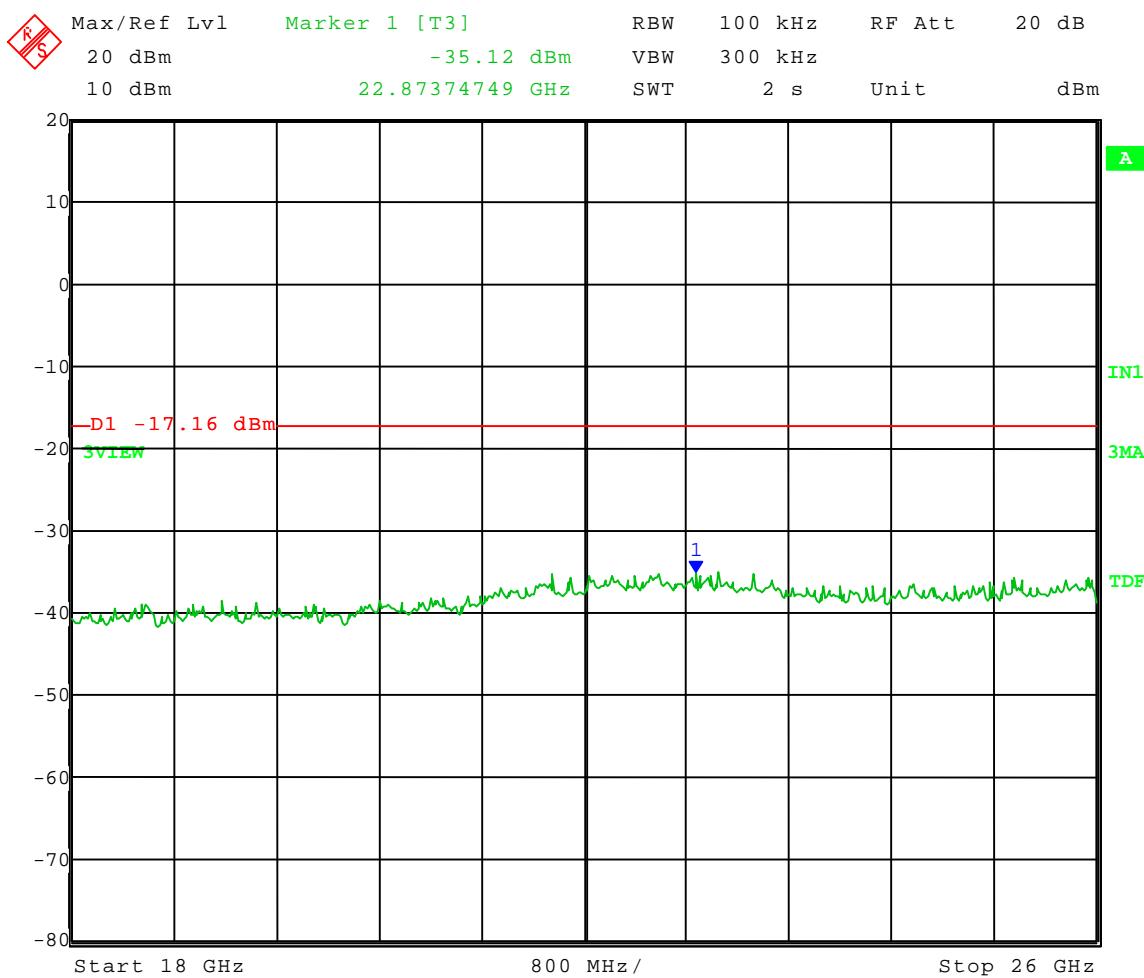

Date: 19.OCT.2009 15:55:58



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6D
Modulation: **QPSK**

Frequency Range: 26 to 40 GHz
Limit = -17.16 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

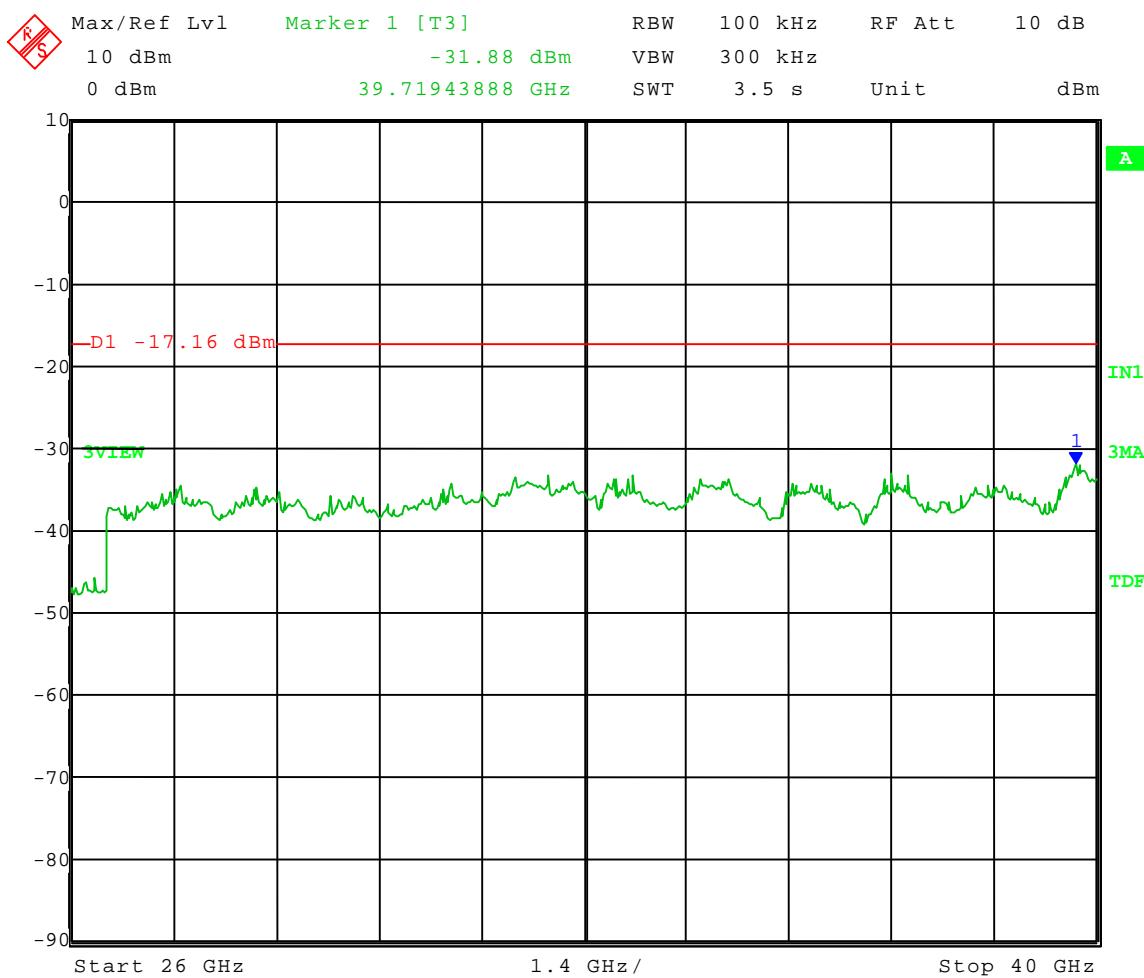

Date: 19.OCT.2009 15:57:14



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

LOW CHN 16QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: 16 QAM

Frequency Range: 30 to 1000 MHz
Limit = -18.23 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

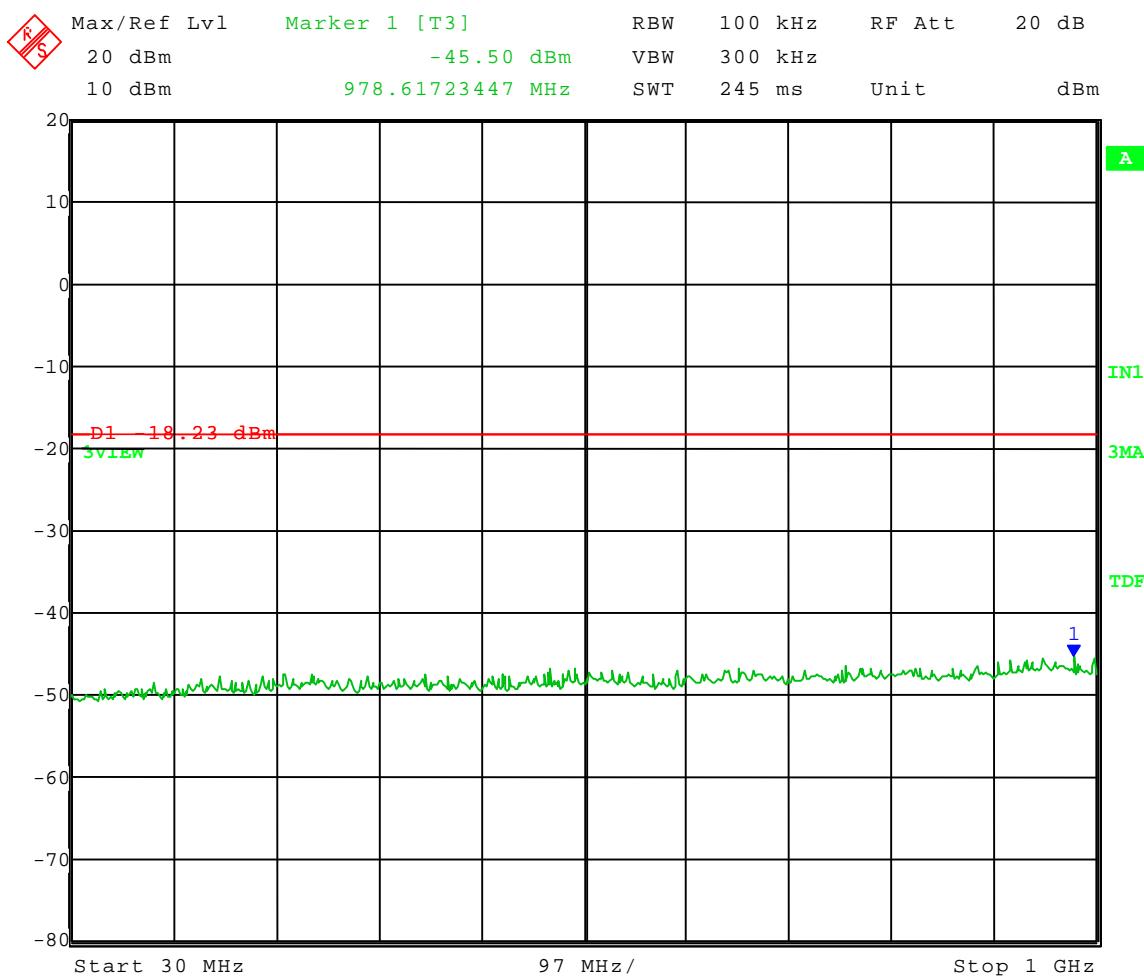

Date: 19.OCT.2009 14:43:24



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: 16 QAM

Frequency Range: 1 to 10 GHz
Limit = -18.23 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

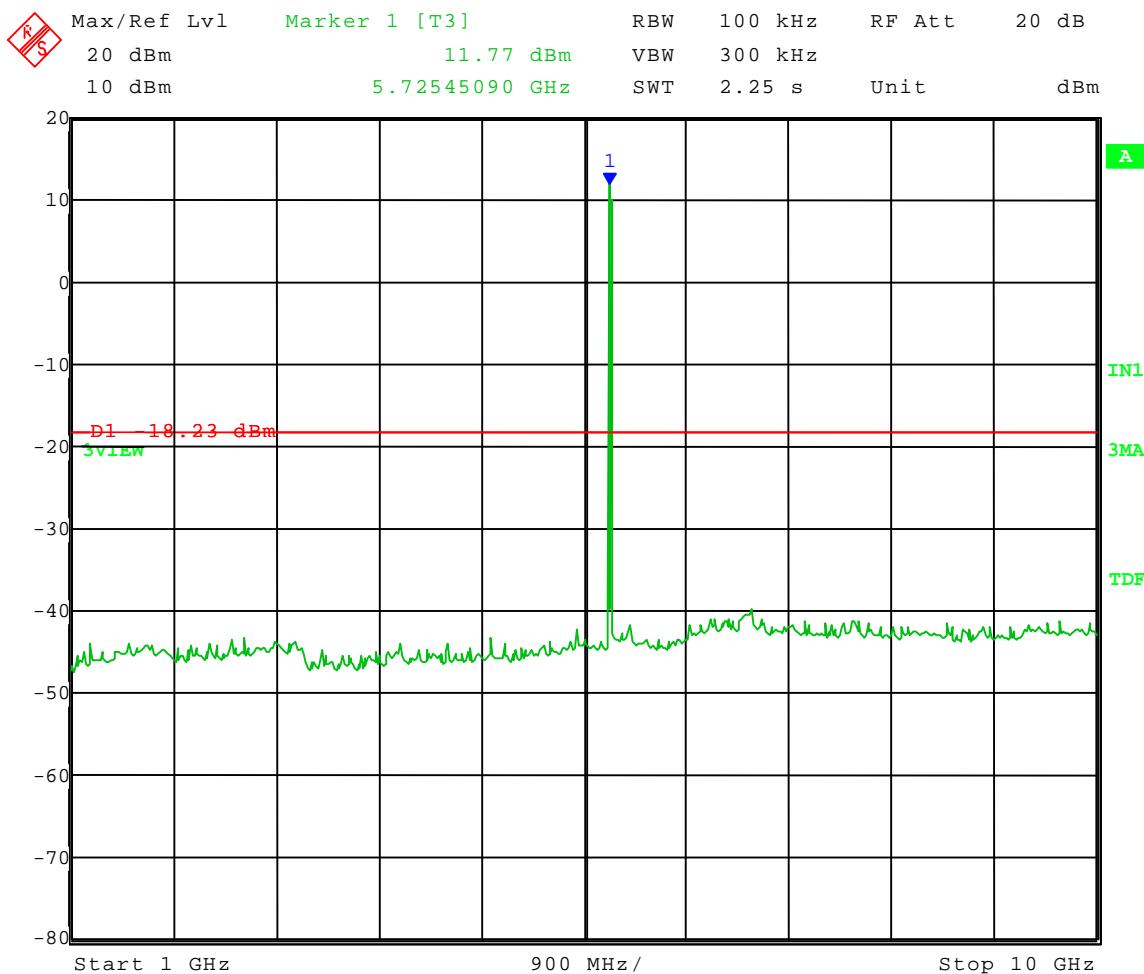

Date: 19.OCT.2009 14:38:01



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: 16 QAM

Frequency Range: 10 to 18 GHz
Limit = -18.23 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

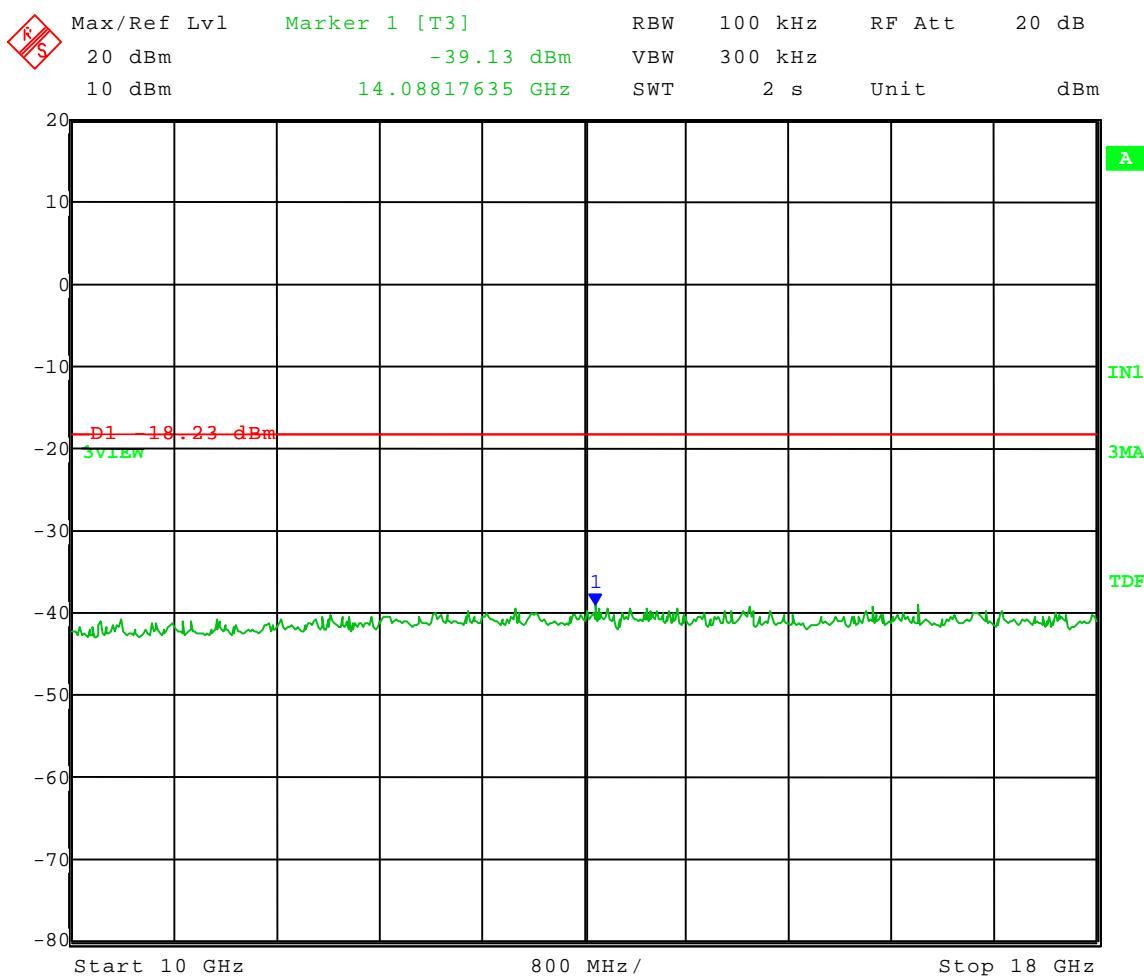

Date: 19.OCT.2009 14:39:21



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: 16 QAM

Frequency Range: 18 to 26 GHz
Limit = -18.23 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

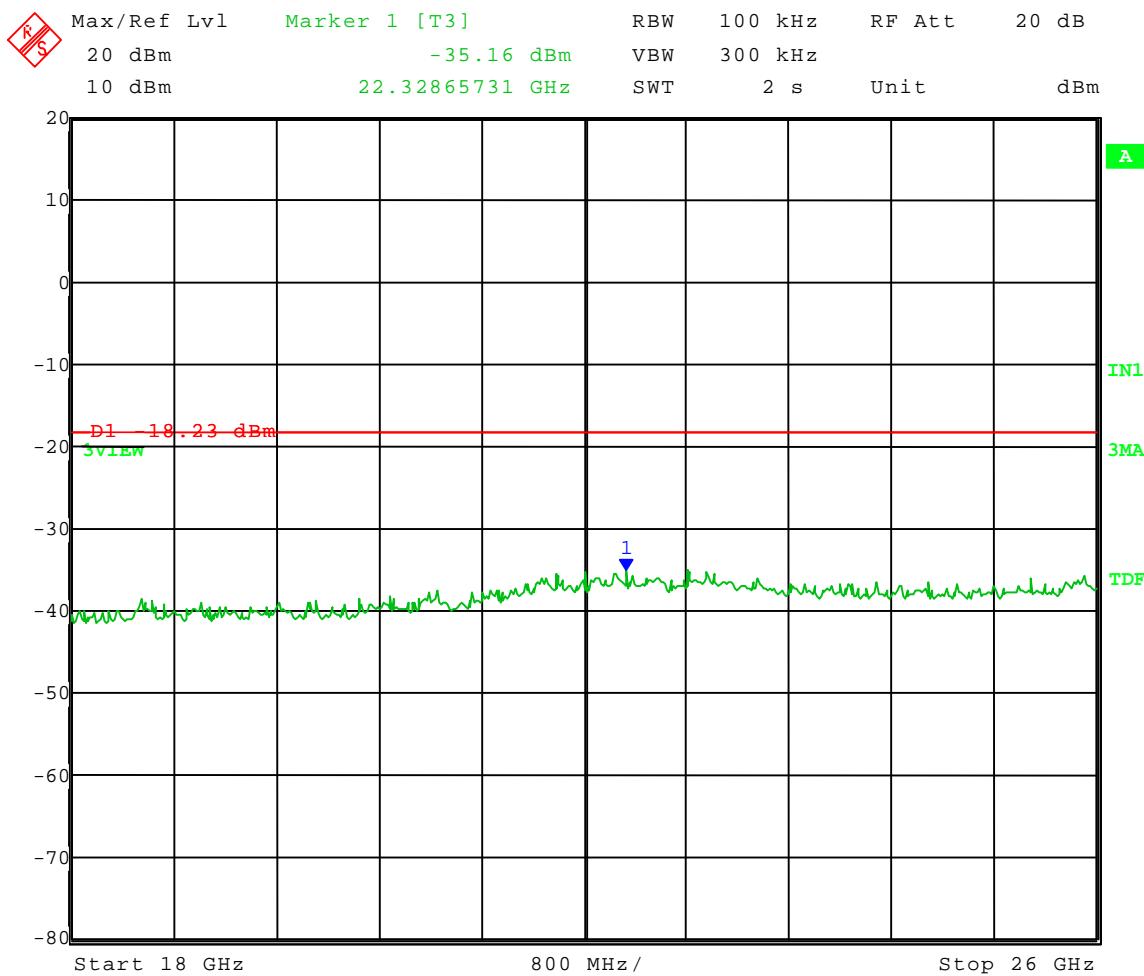

Date: 19.OCT.2009 14:40:39



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6A
Modulation: 16 QAM

Frequency Range: 26 to 40 GHz
Limit = -18.23 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

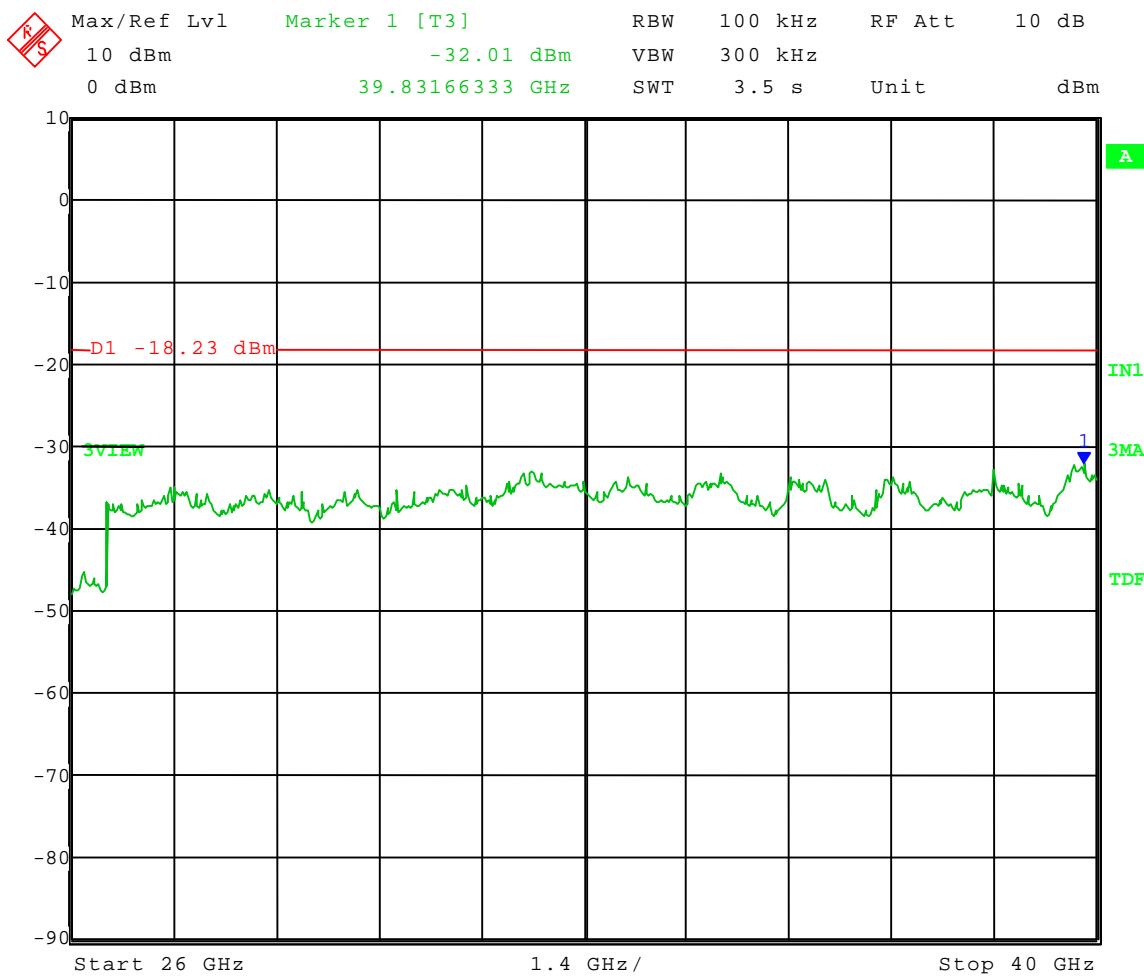

Date: 19.OCT.2009 14:41:57



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

MID CHN 16QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: 16 QAM

Frequency Range: 30 to 1000 MHz
Limit = -17.71 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

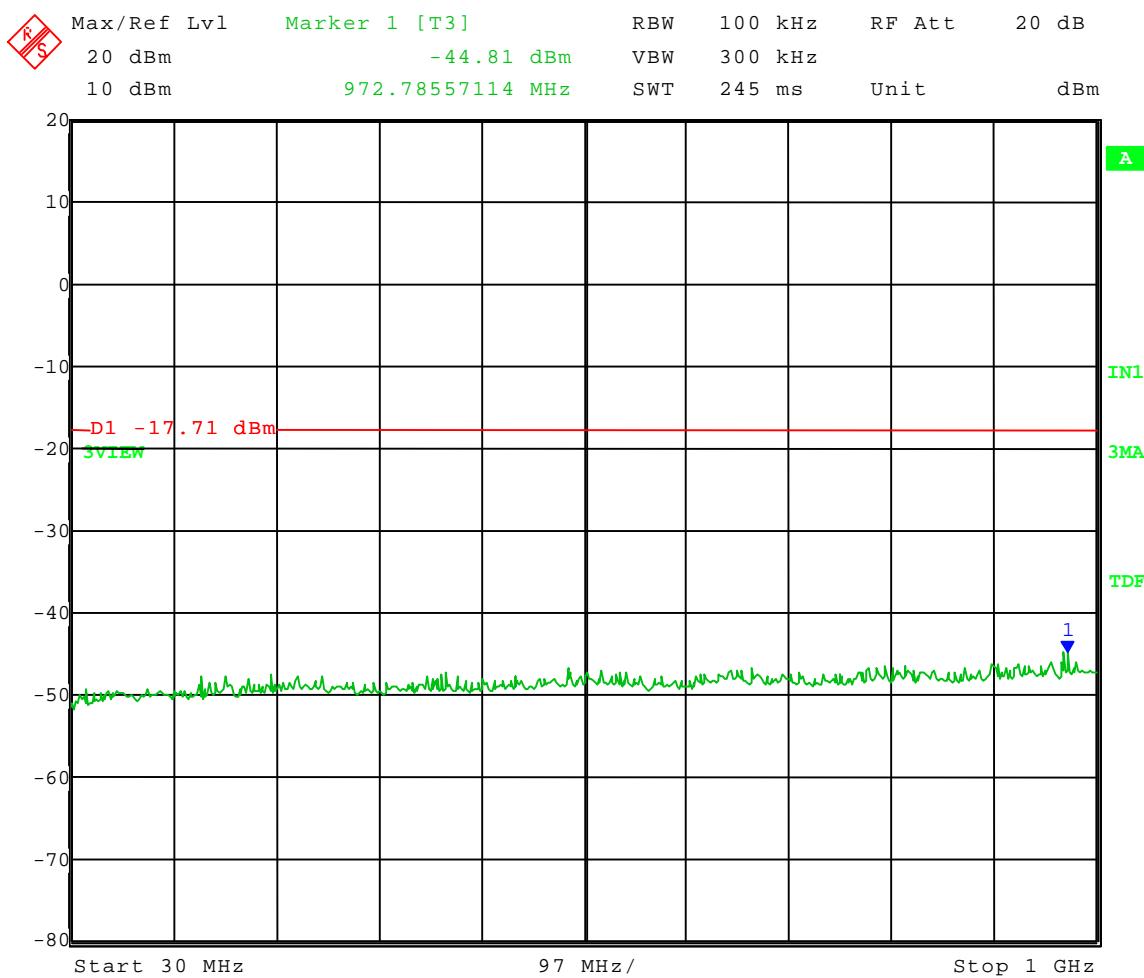

Date: 19.OCT.2009 15:23:00



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: 16 QAM

Frequency Range: 1 to 10 GHz
Limit = -17.71 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

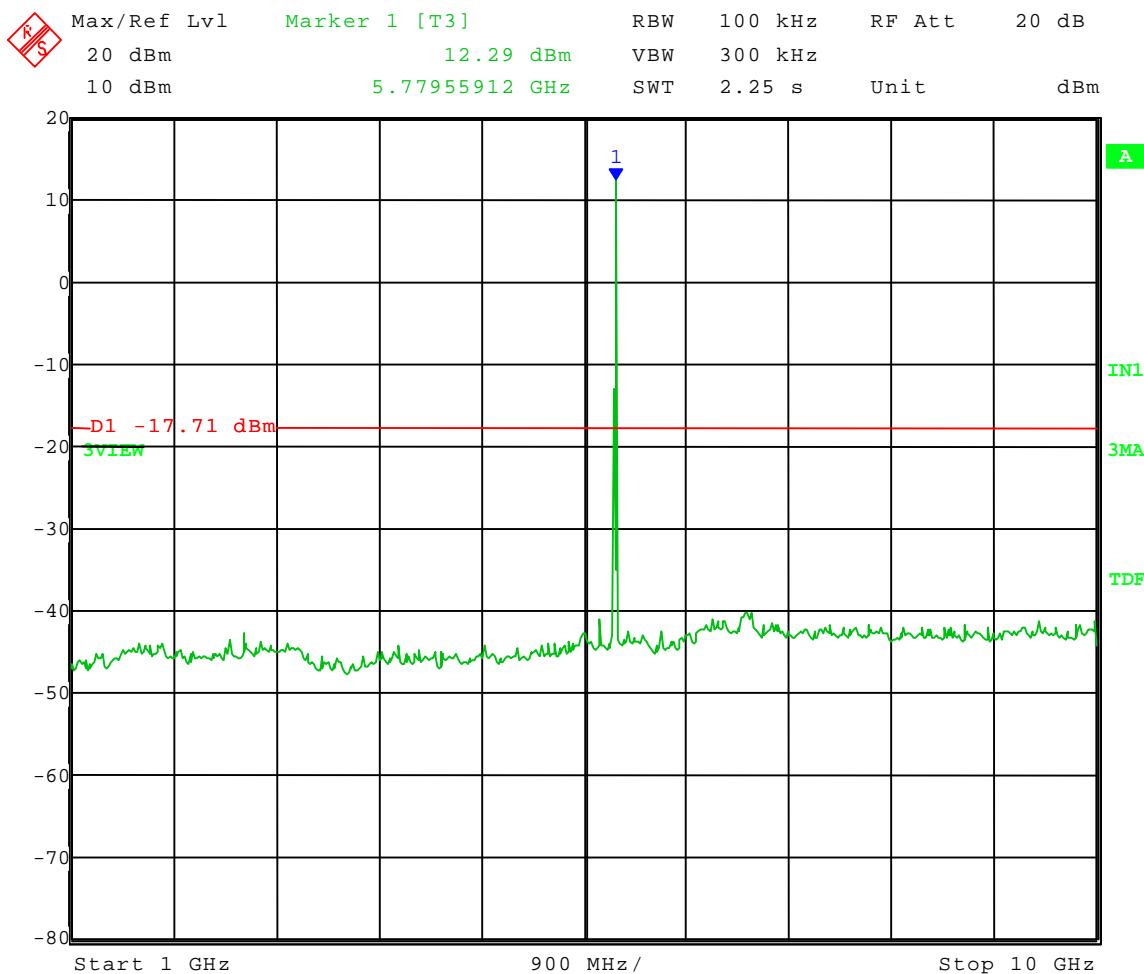

Date: 19.OCT.2009 15:18:04



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: 16 QAM

Frequency Range: 10 to 18 GHz
Limit = -17.71 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

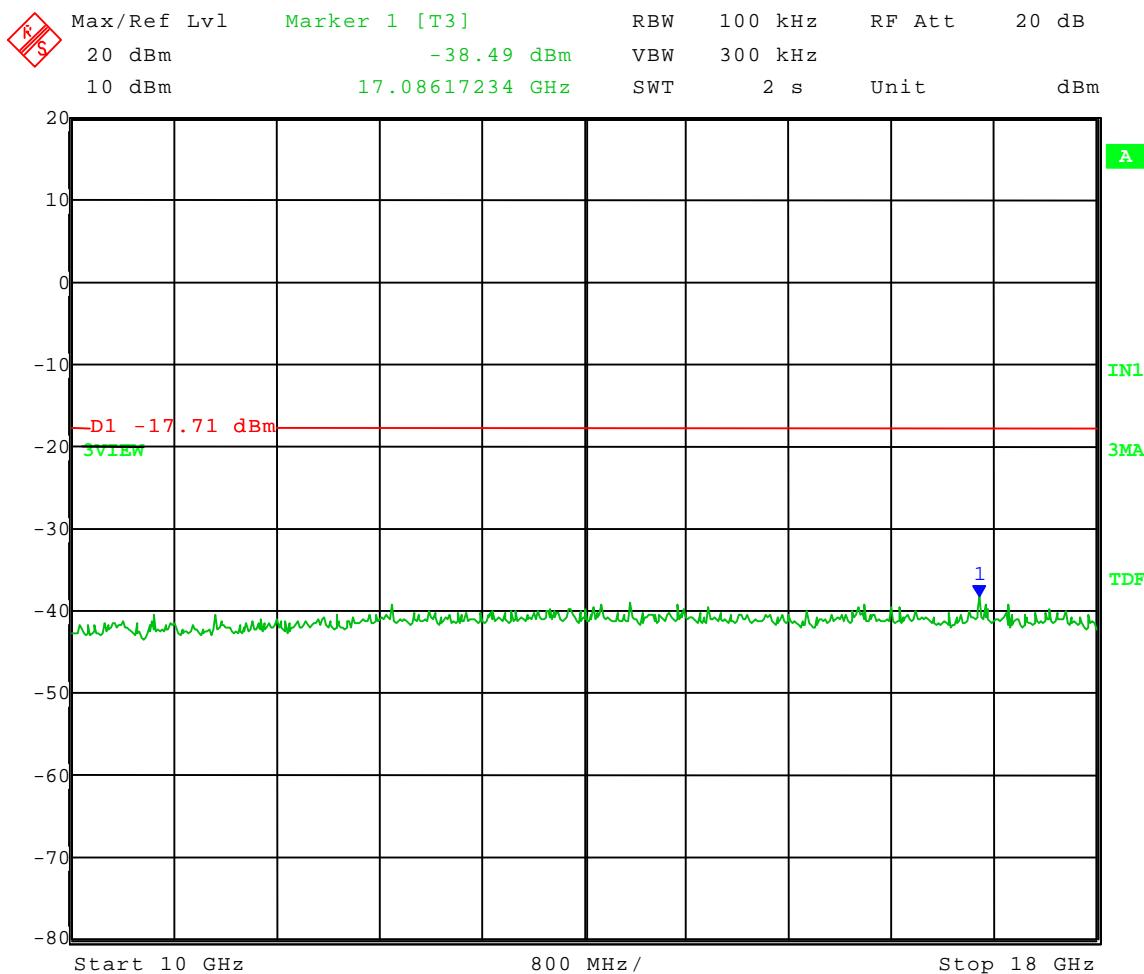

Date: 19.OCT.2009 15:19:20



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: 16 QAM

Frequency Range: 18 to 26 GHz
Limit = -17.71 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

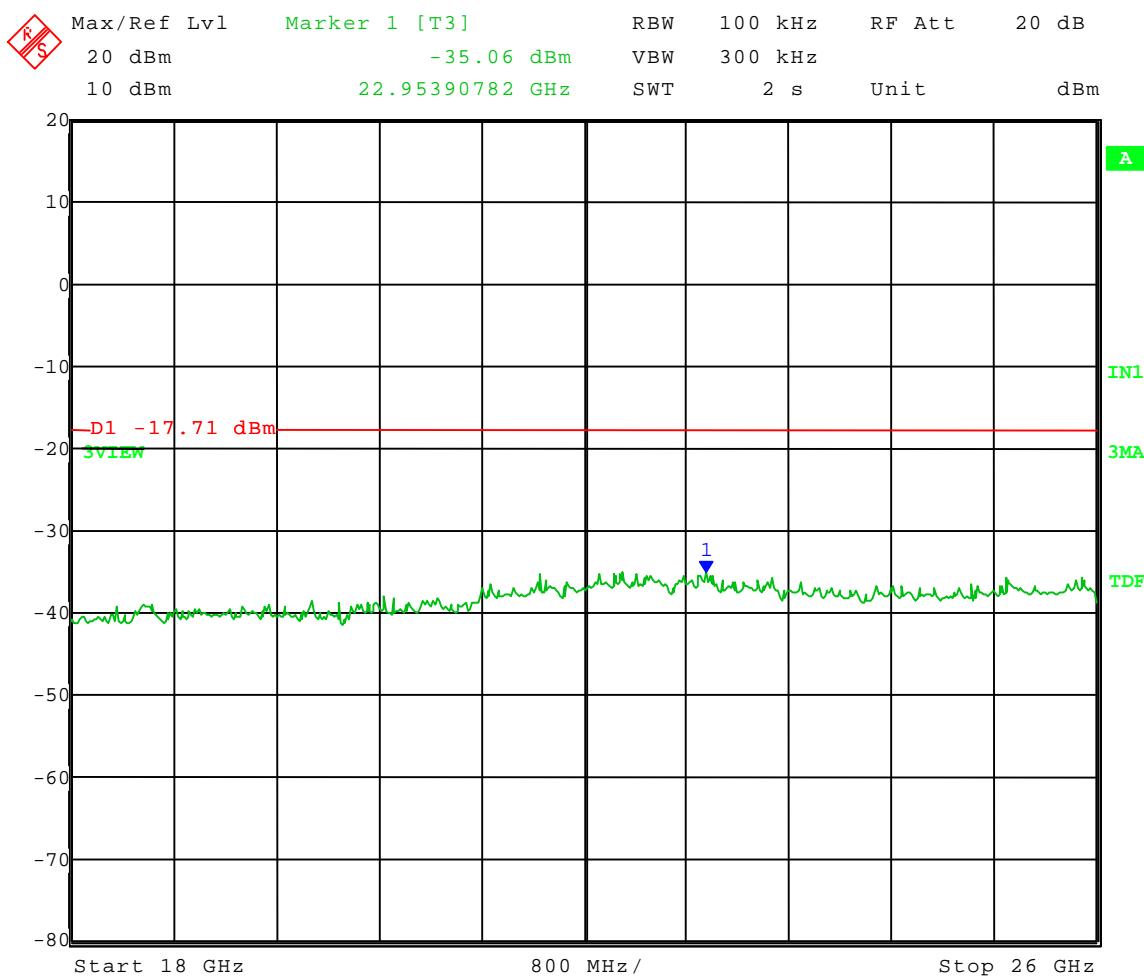

Date: 19.OCT.2009 15:20:28



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6B
Modulation: 16 QAM

Frequency Range: 26 to 40 GHz
Limit = -17.71 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

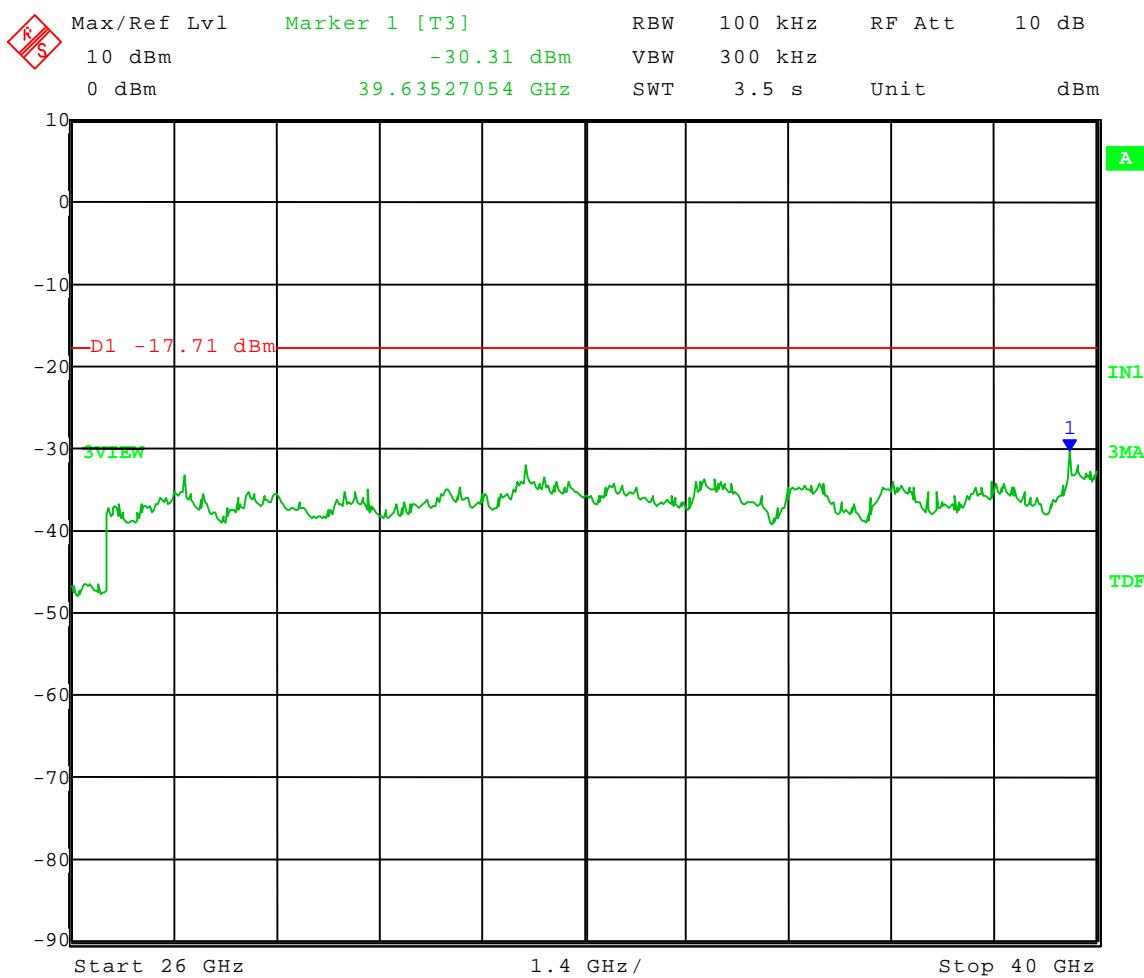

Date: 19.OCT.2009 15:21:52



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

HIGH CHN 16QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6C
Modulation: 16 QAM

Frequency Range: 30 to 1000 MHz
Limit = -18.26 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

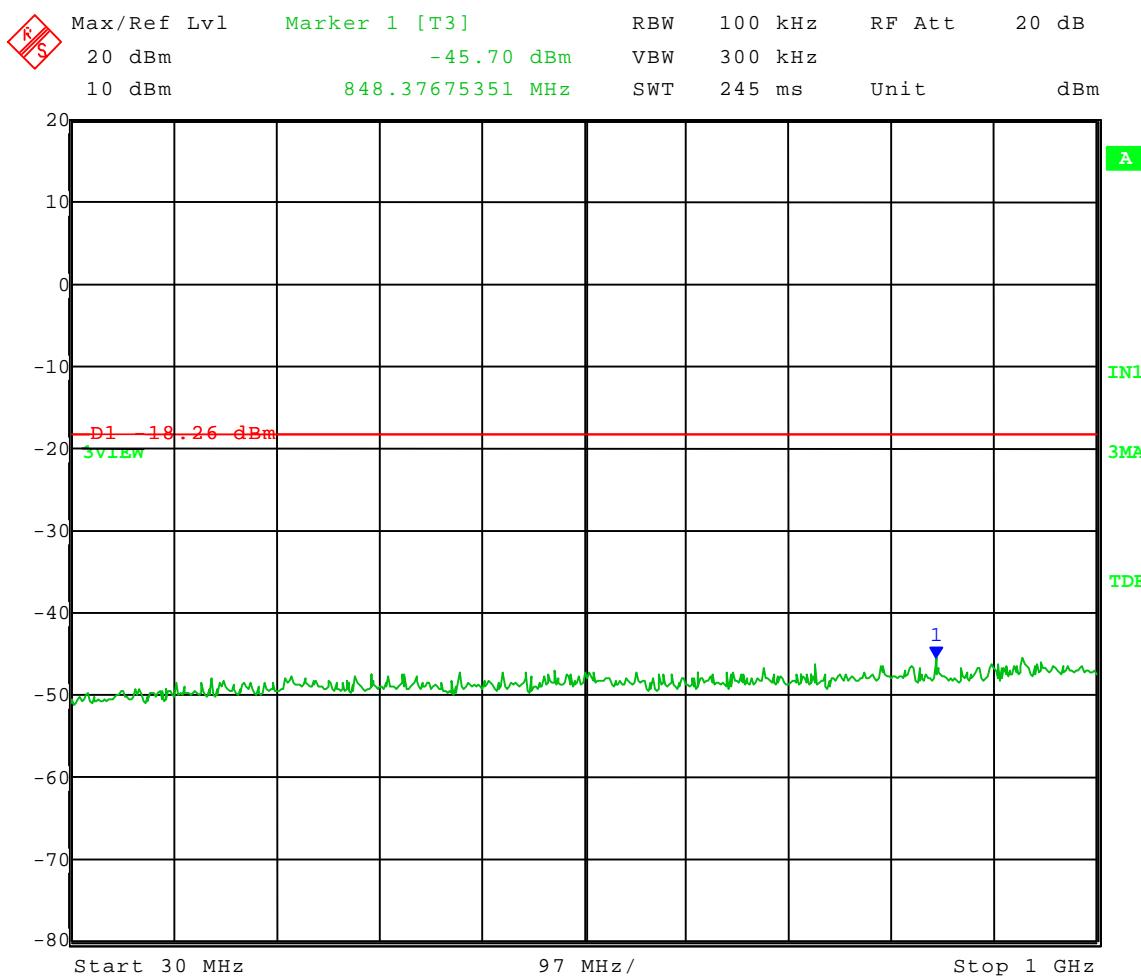

Date: 19.OCT.2009 15:49:49



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6C
Modulation: 16 QAM

Frequency Range: 1 to 10 GHz
Limit = -18.26 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

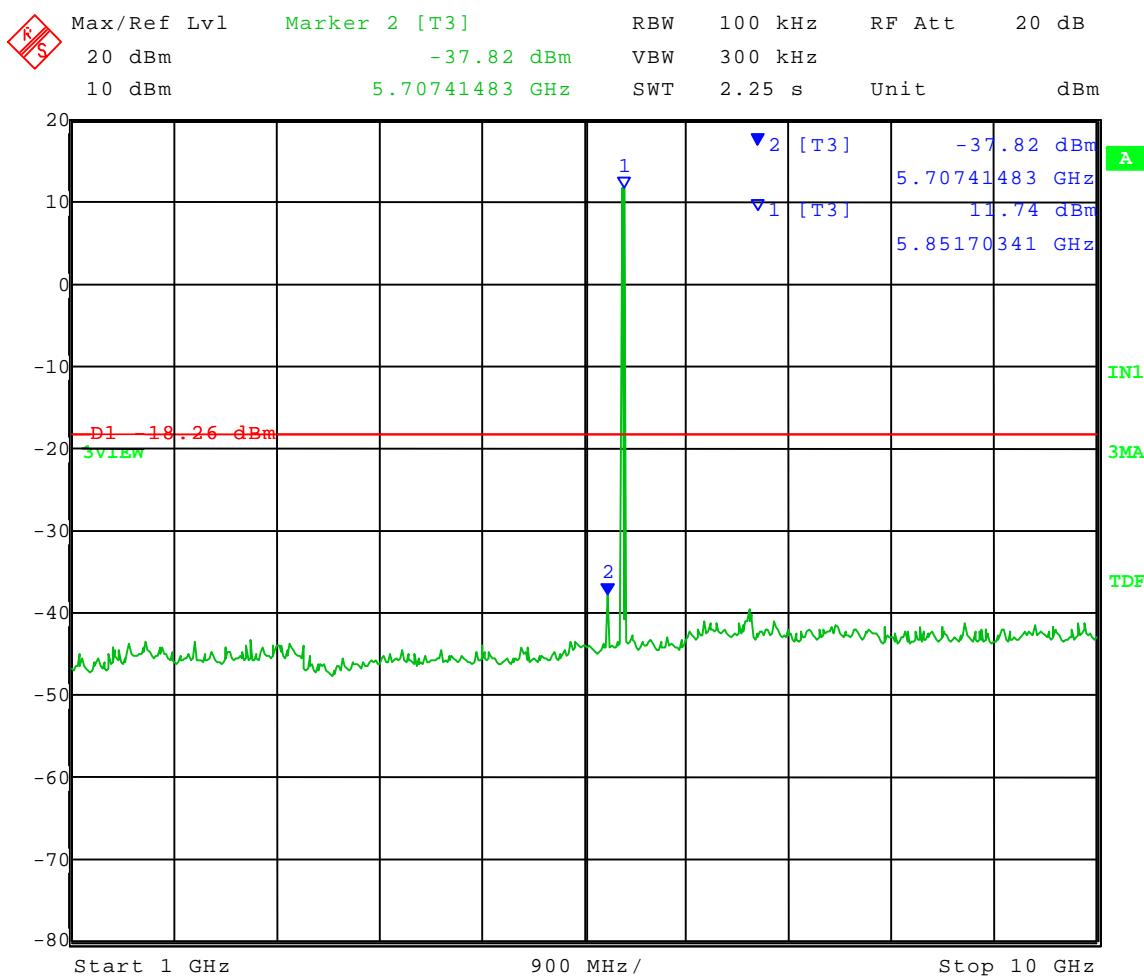

Date: 19.OCT.2009 15:44:12



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 6C
Modulation: 16 QAM

Frequency Range: 10 to 18 GHz
Limit = -18.26 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [*EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247*]

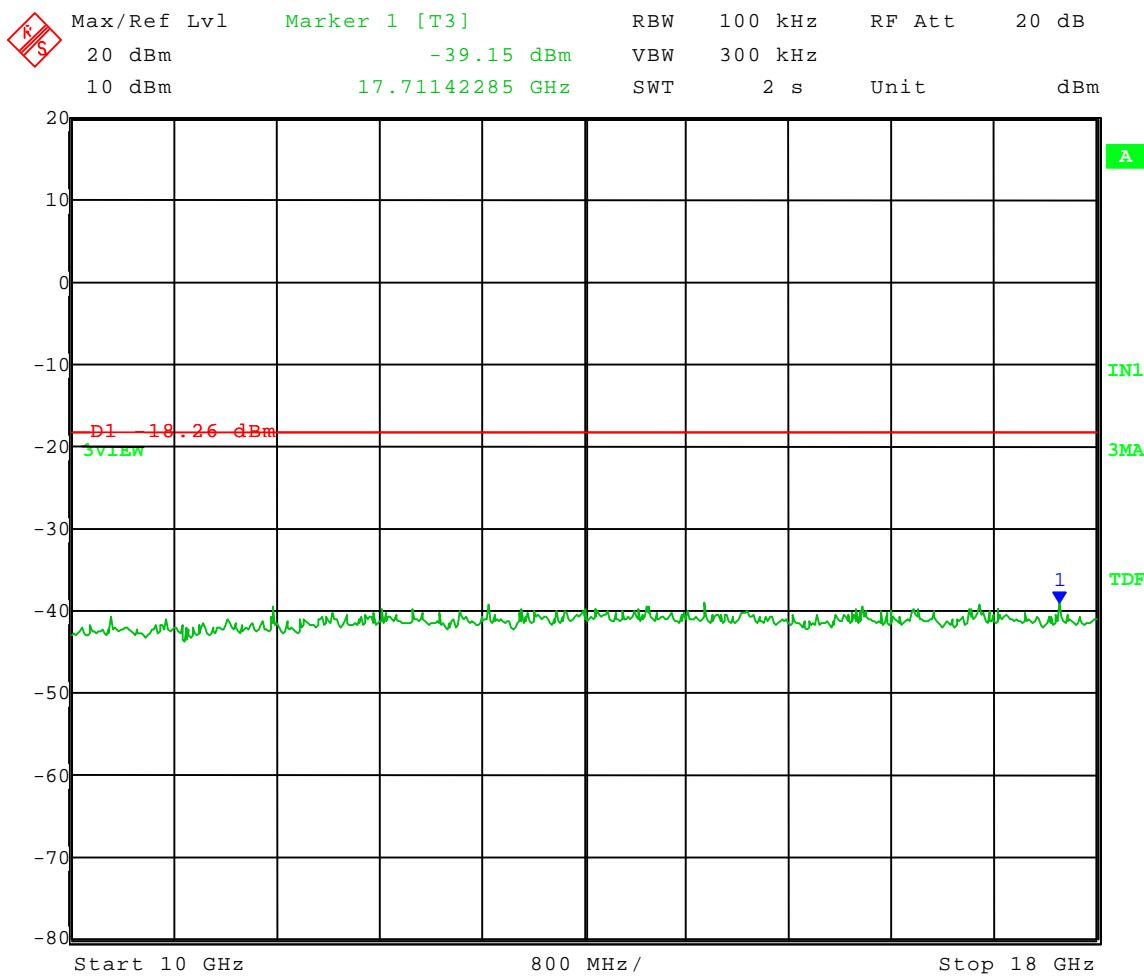

Date: 19.OCT.2009 15:45:48



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 6C
Modulation: 16 QAM

Frequency Range: 18 to 26 GHz
Limit = -18.26 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

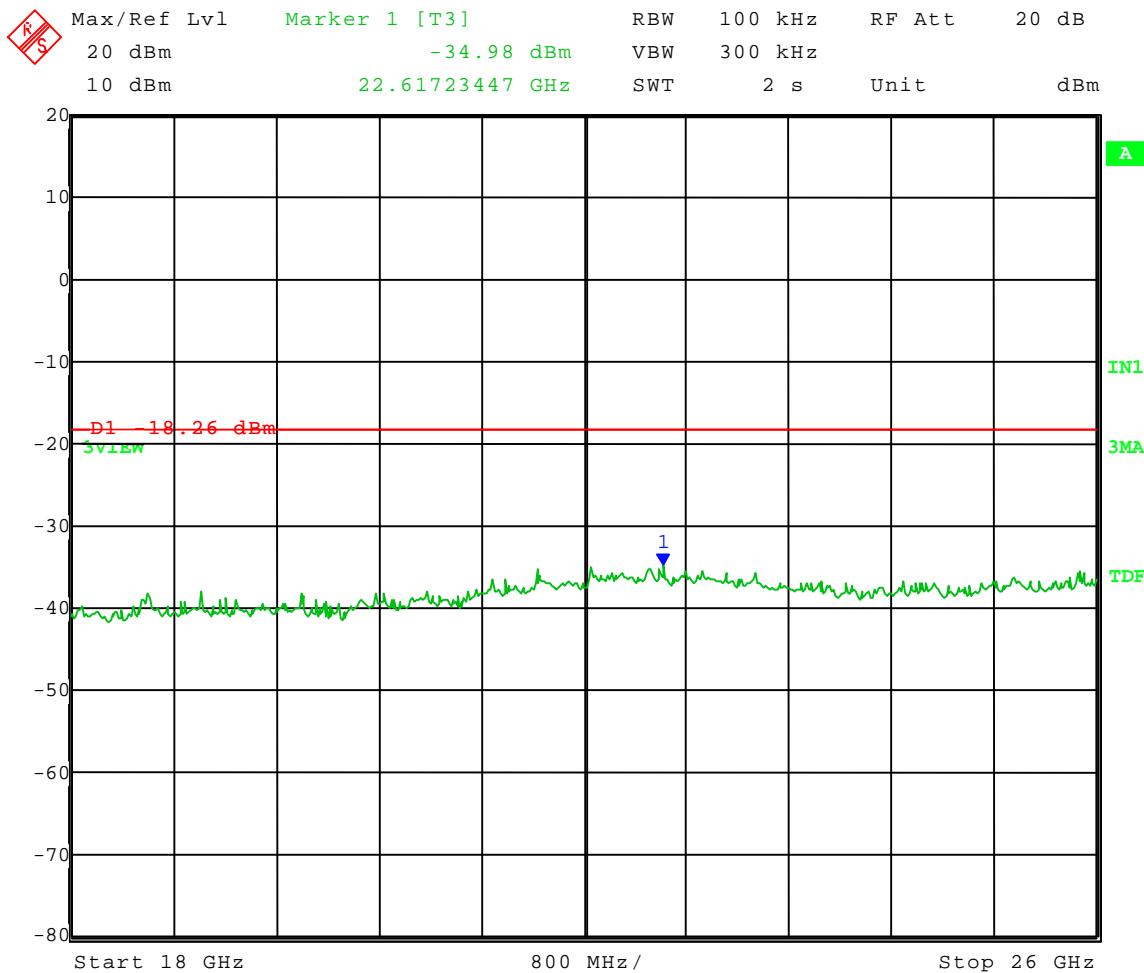

Date: 19.OCT.2009 15:46:49



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6C
Modulation: 16 QAM

Frequency Range: 26 to 40 GHz
Limit = -18.26 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

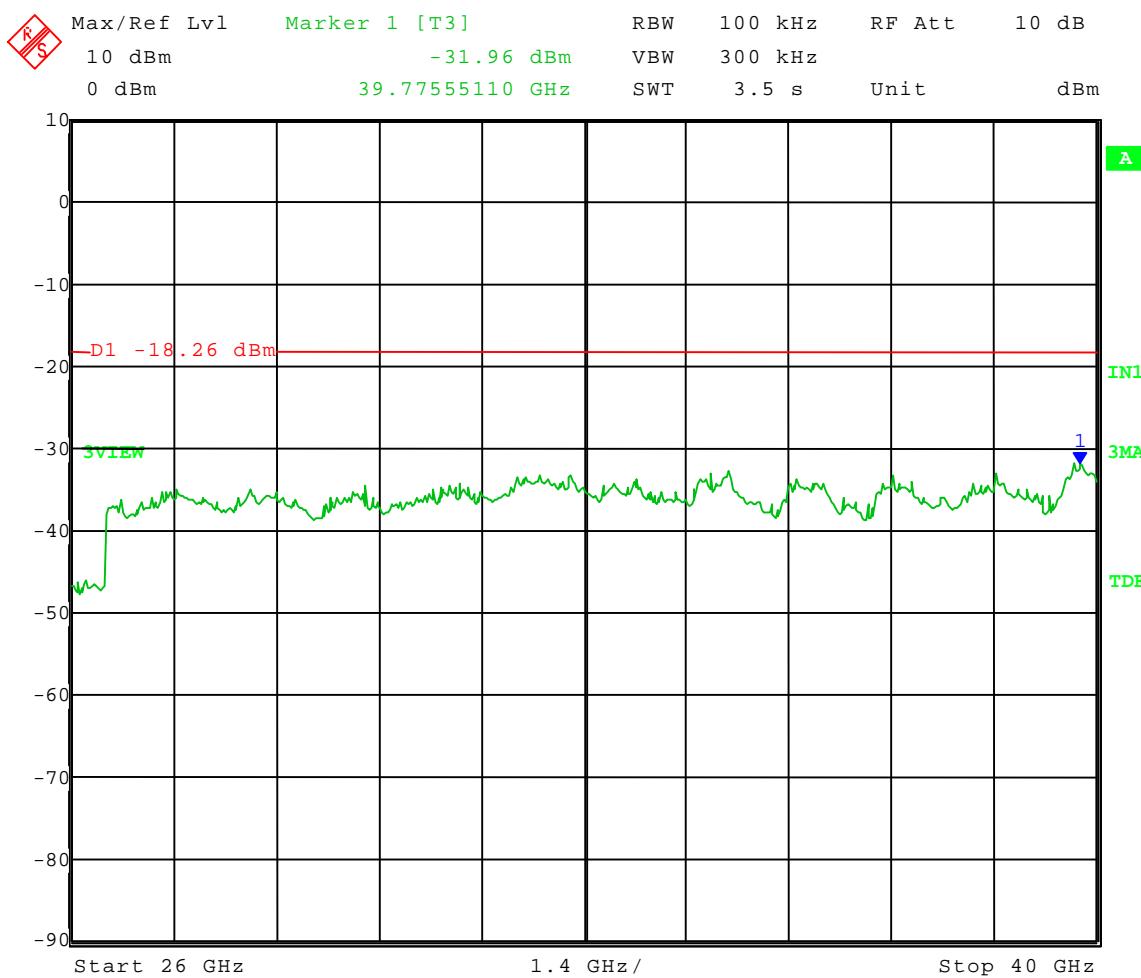

Date: 19.OCT.2009 15:48:30



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

LOW CHN 64QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6E
Modulation: 64 QAM

Frequency Range: 30 to 1000 MHz
Limit = -17.92 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

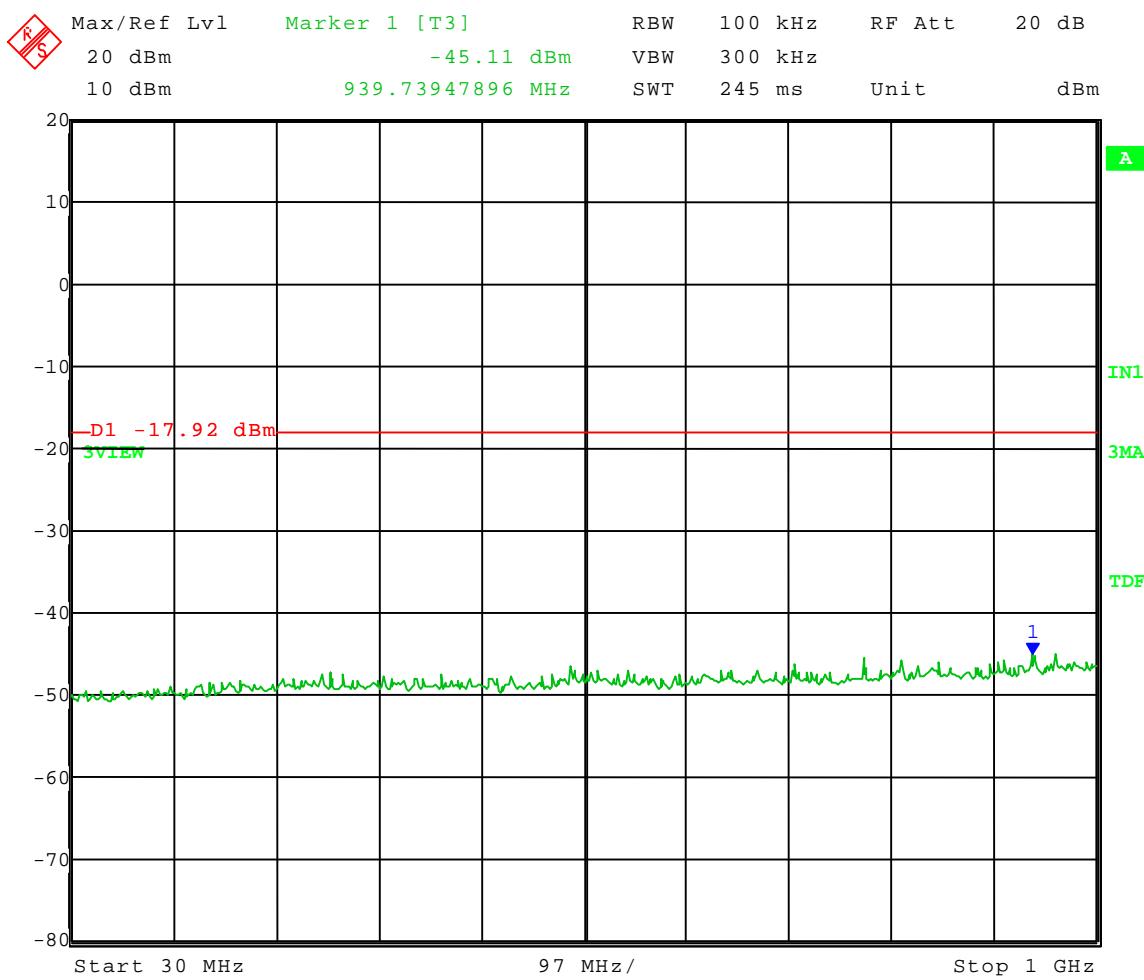

Date: 19.OCT.2009 14:33:16



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6E
Modulation: 64 QAM

Frequency Range: 1 to 10 GHz
Limit = -17.92 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

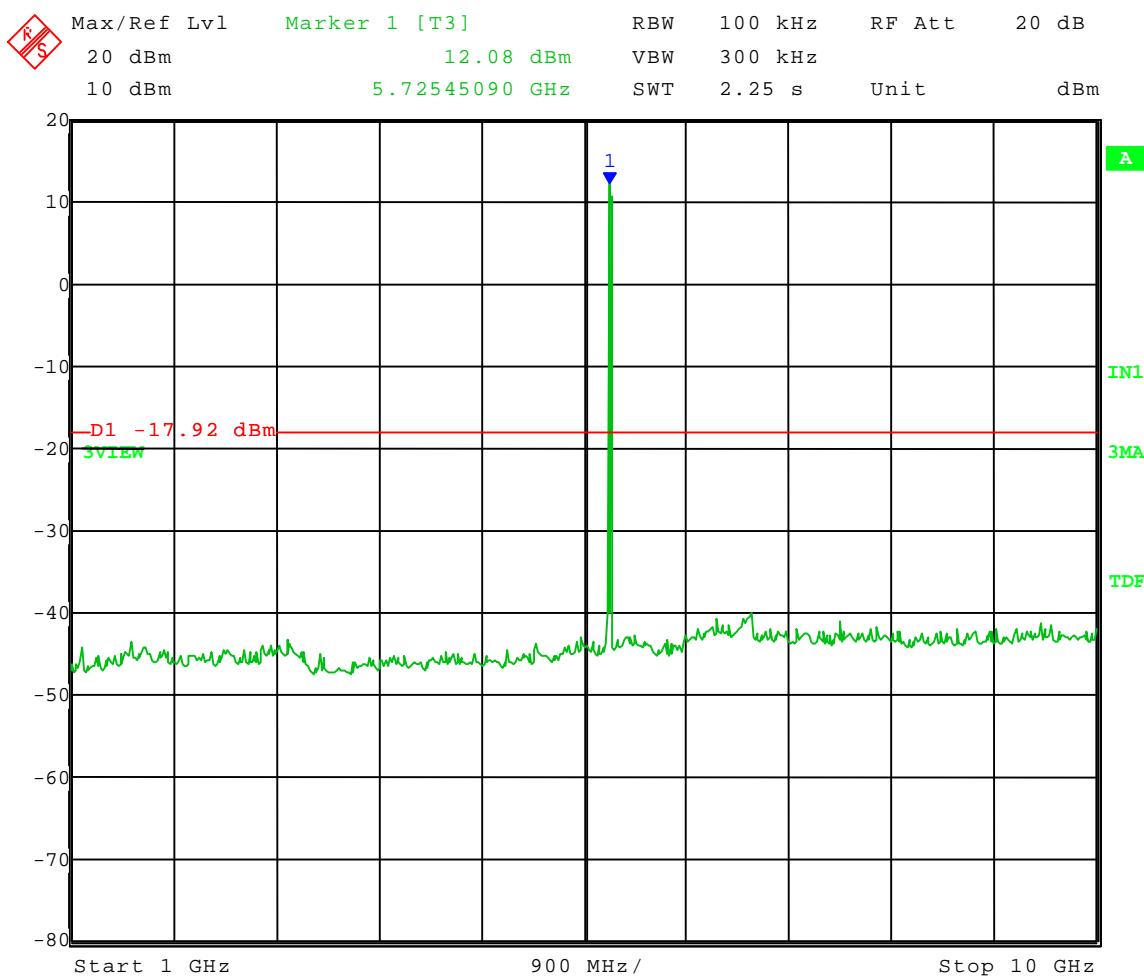

Date: 19.OCT.2009 14:27:58



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6E
Modulation: 64 QAM

Frequency Range: 10 to 18 GHz
Limit = -17.92 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

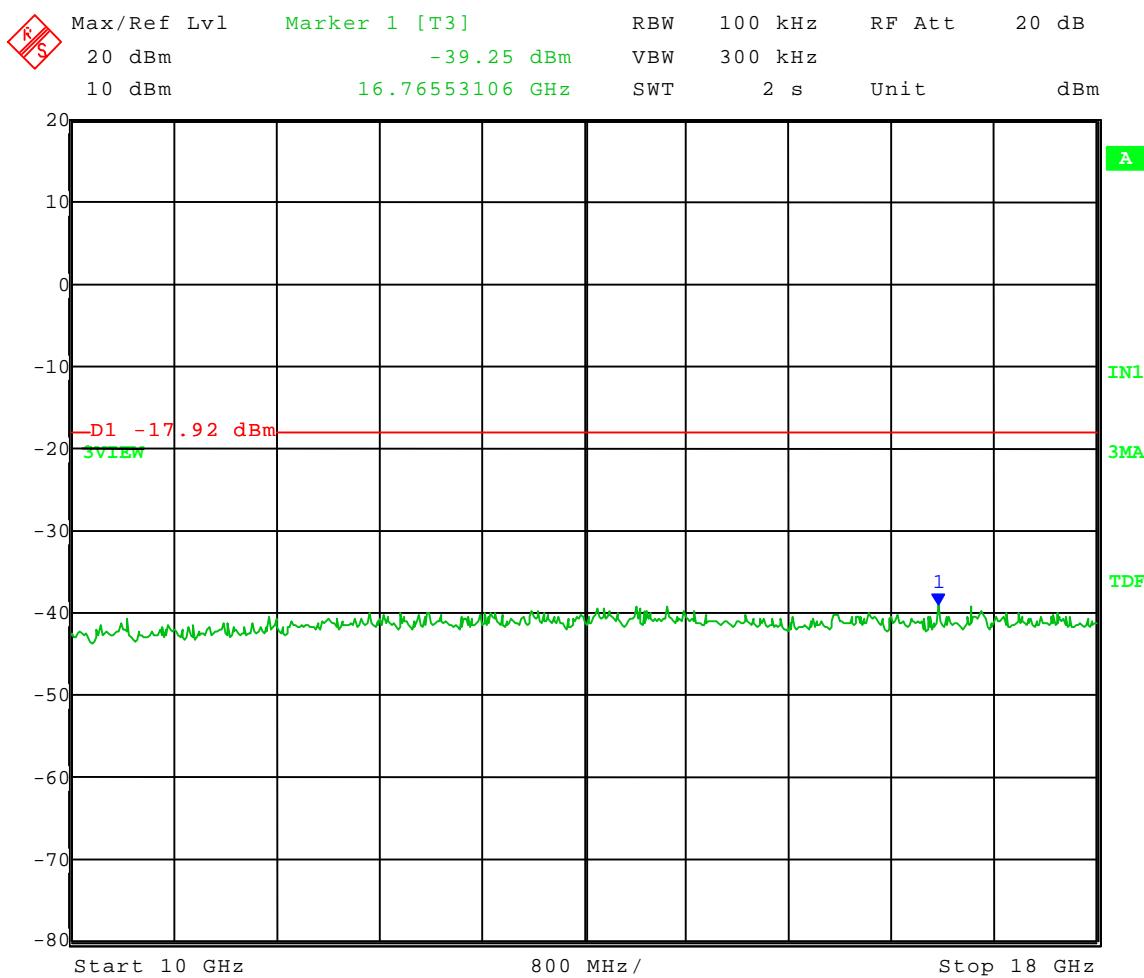

Date: 19.OCT.2009 14:29:25



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6E
Modulation: 64 QAM

Frequency Range: 18 to 26 GHz
Limit = -17.92 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

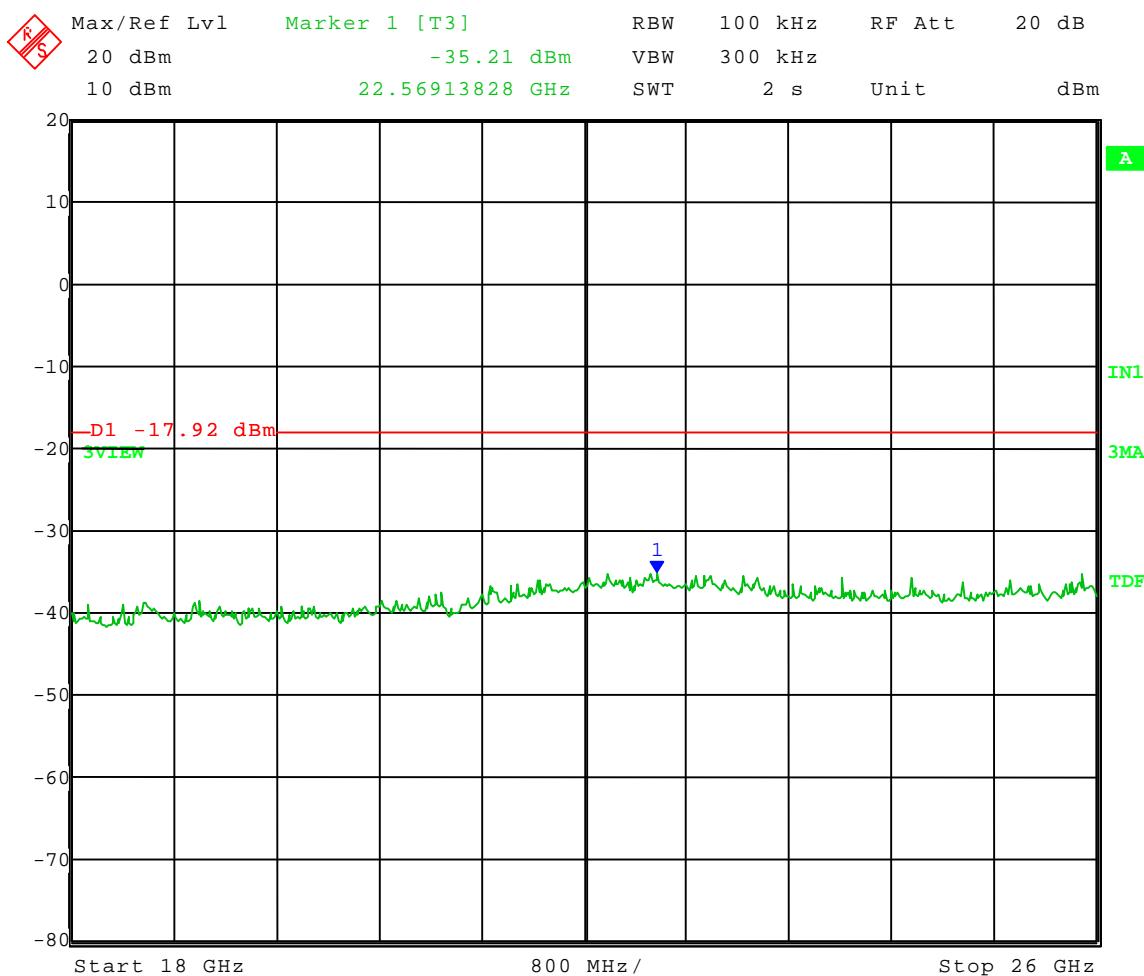

Date: 19.OCT.2009 14:30:28



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: Low Channel: Frequency – 5.730 GHz
Power setting: 6E
Modulation: 64 QAM

Frequency Range: 26 to 40 GHz
Limit = -17.92 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

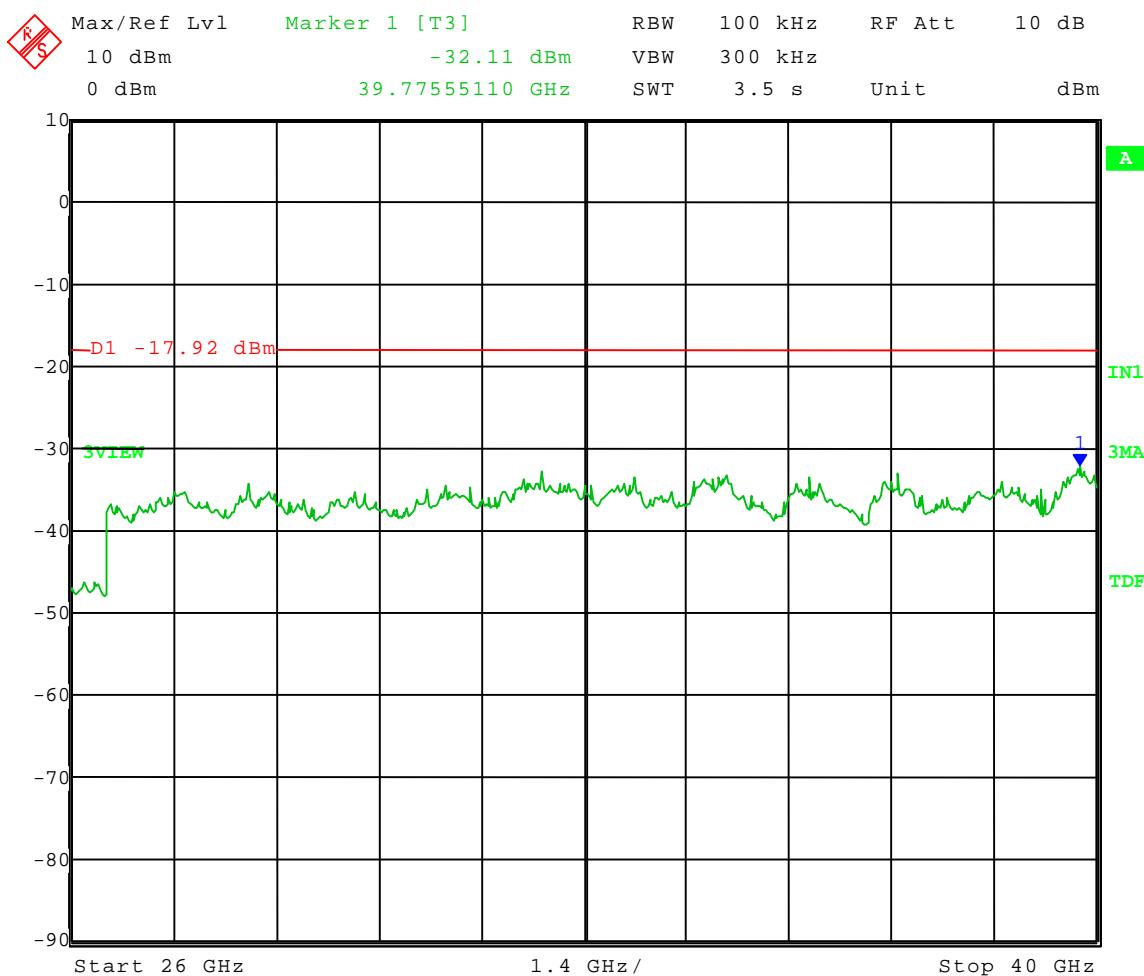

Date: 19.OCT.2009 14:31:46



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

MID CHN 64QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 30 to 1000 MHz
Limit = -17.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

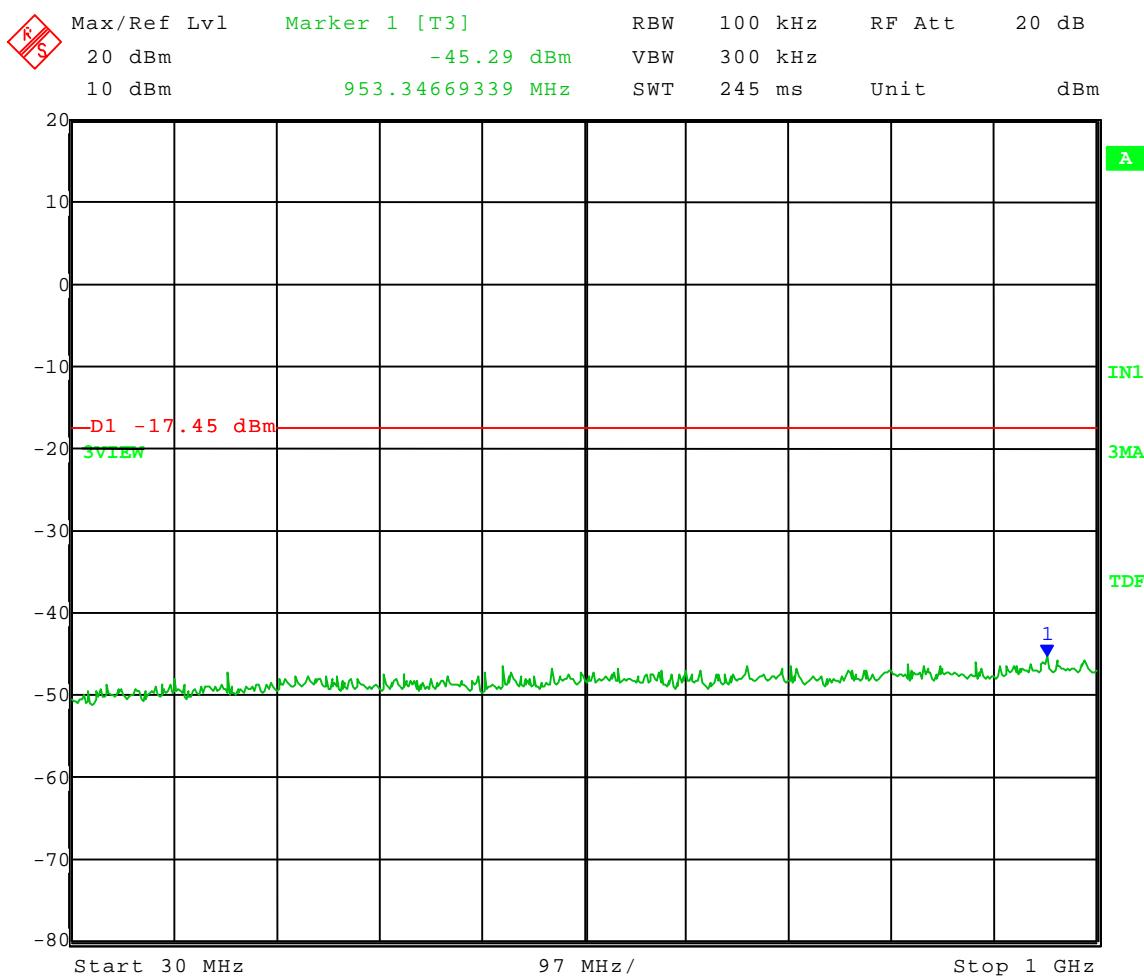

Date: 19.OCT.2009 15:03:34



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 1 to 10 GHz
Limit = -17.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

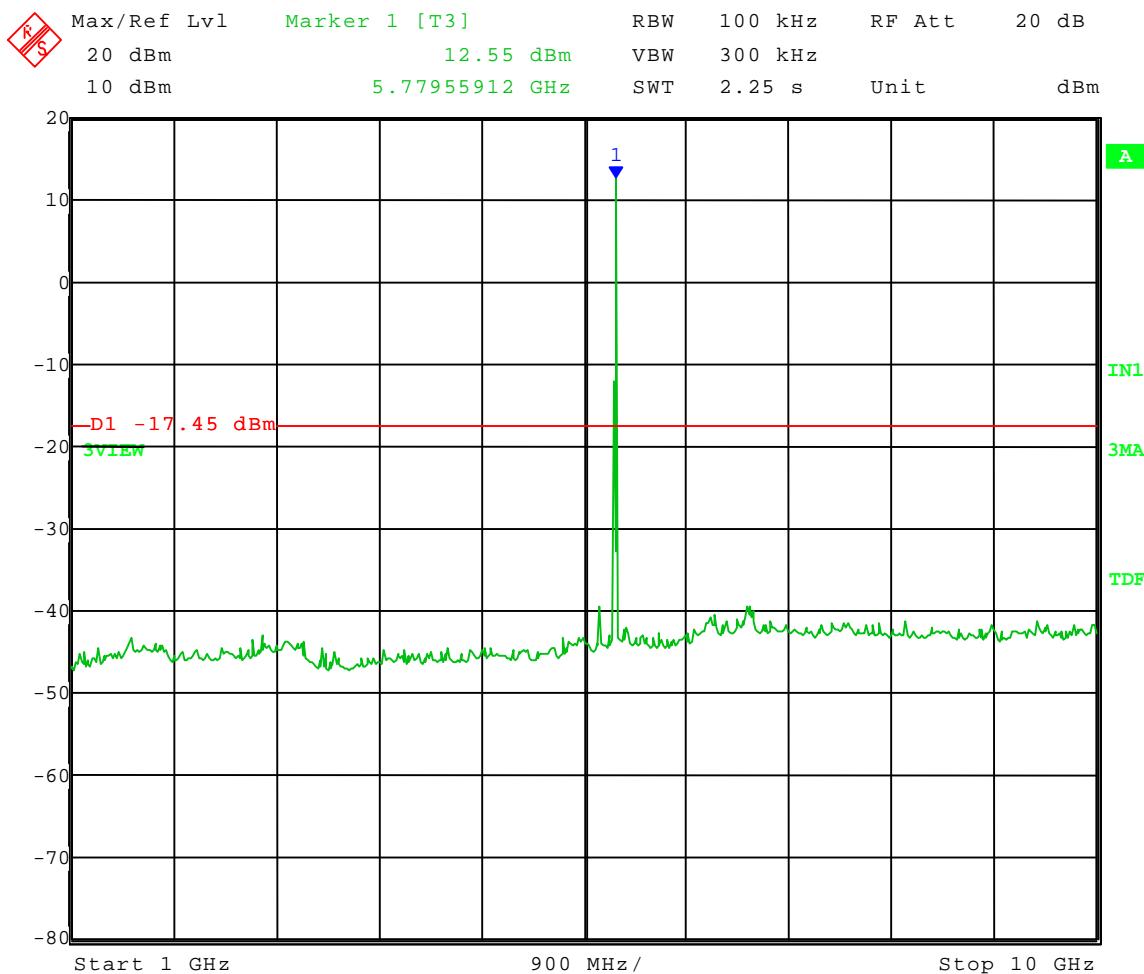

Date: 19.OCT.2009 14:57:40



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 10 to 18 GHz
Limit = -17.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

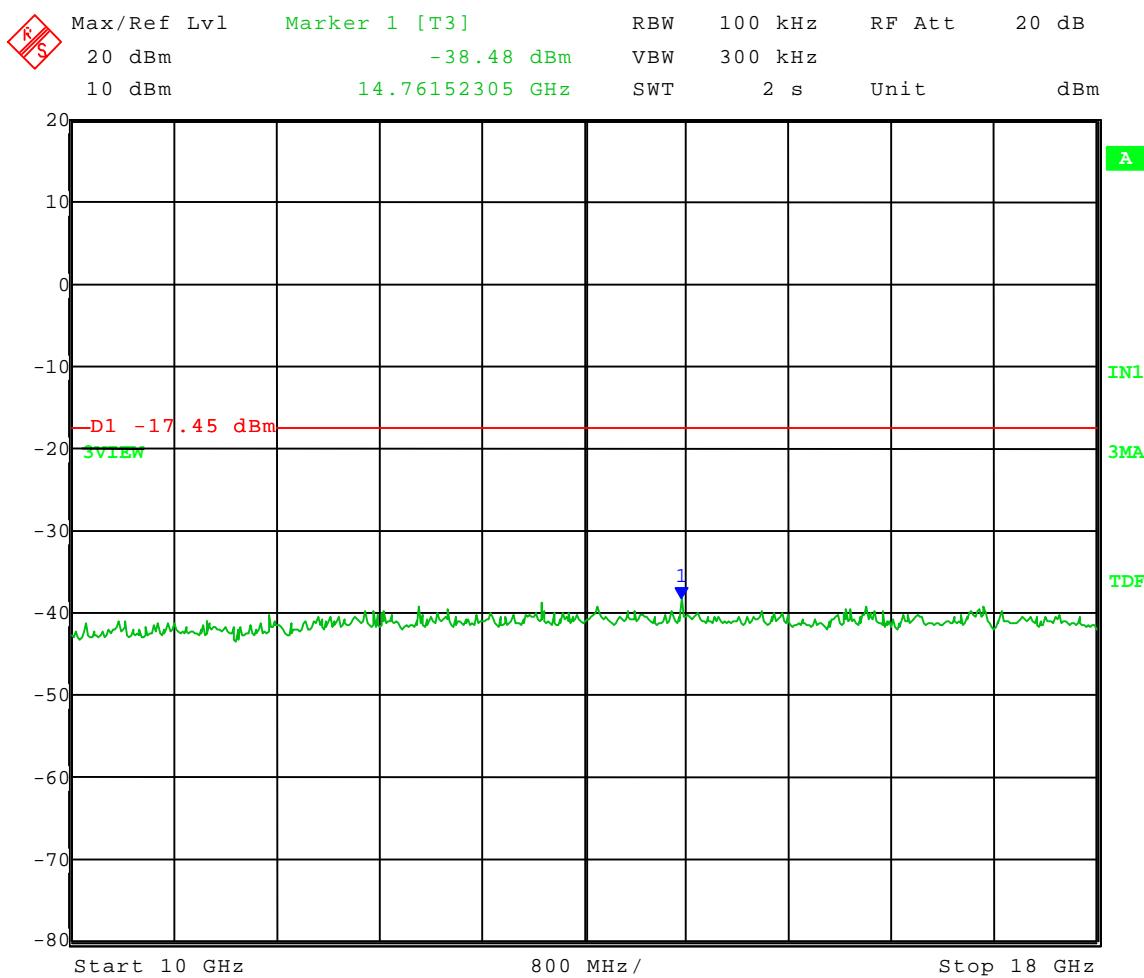

Date: 19.OCT.2009 14:59:47



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 18 to 26 GHz
Limit = -17.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

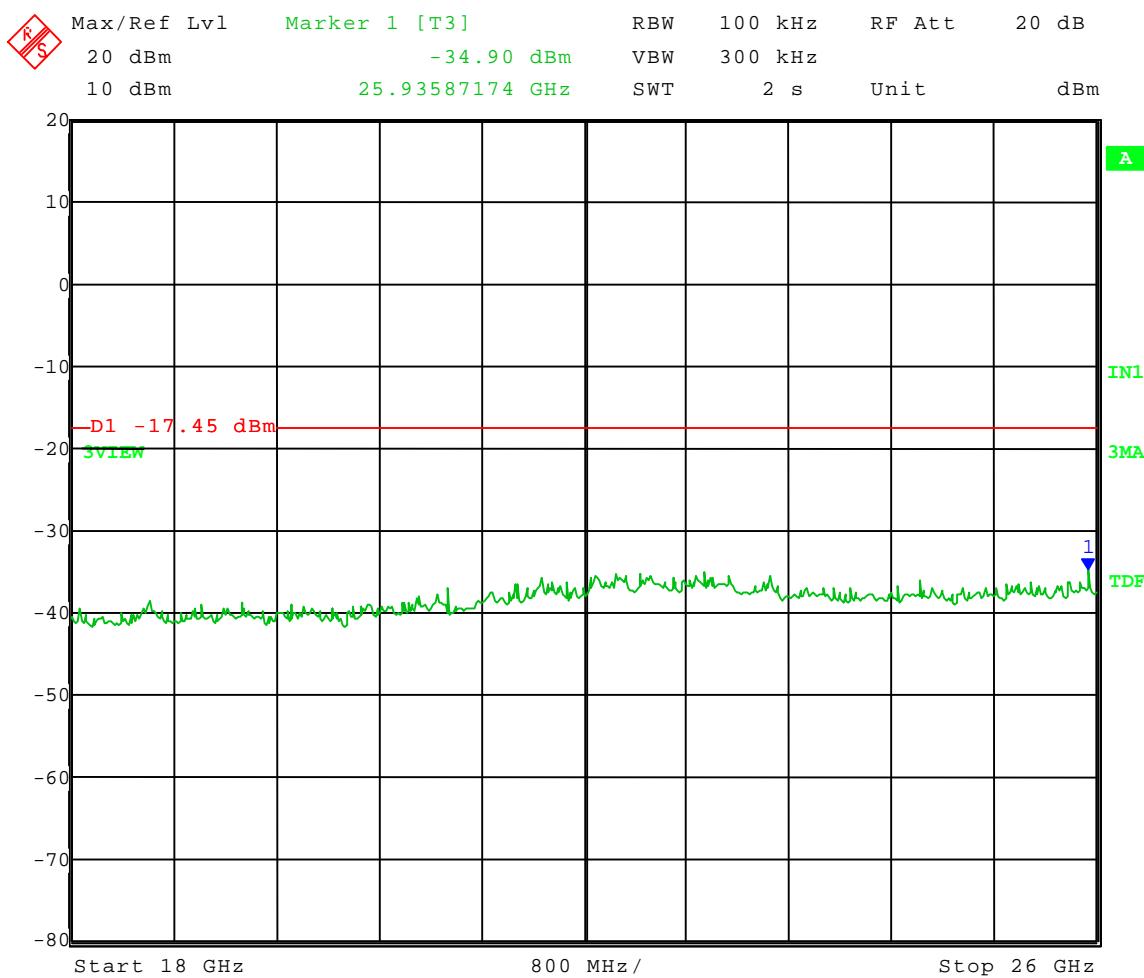

Date: 19.OCT.2009 15:01:00



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 26 to 40 GHz
Limit = -17.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

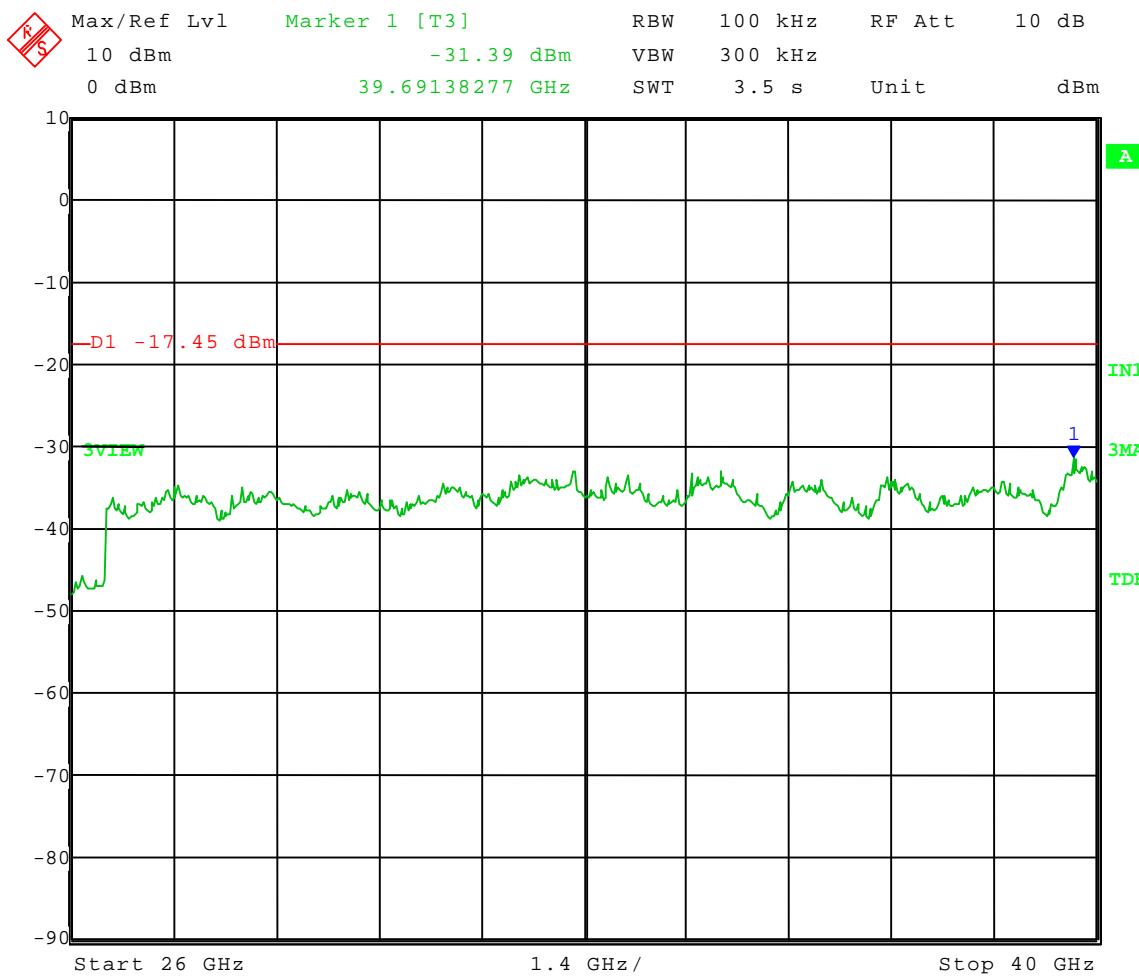

Date: 19.OCT.2009 15:02:21



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RF CONDUCTED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS MADE

AT THE ANTENNA TERMINALS

PART 15.247(d)

HIGH CHN 64QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 30 to 1000 MHz
Limit = -18.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

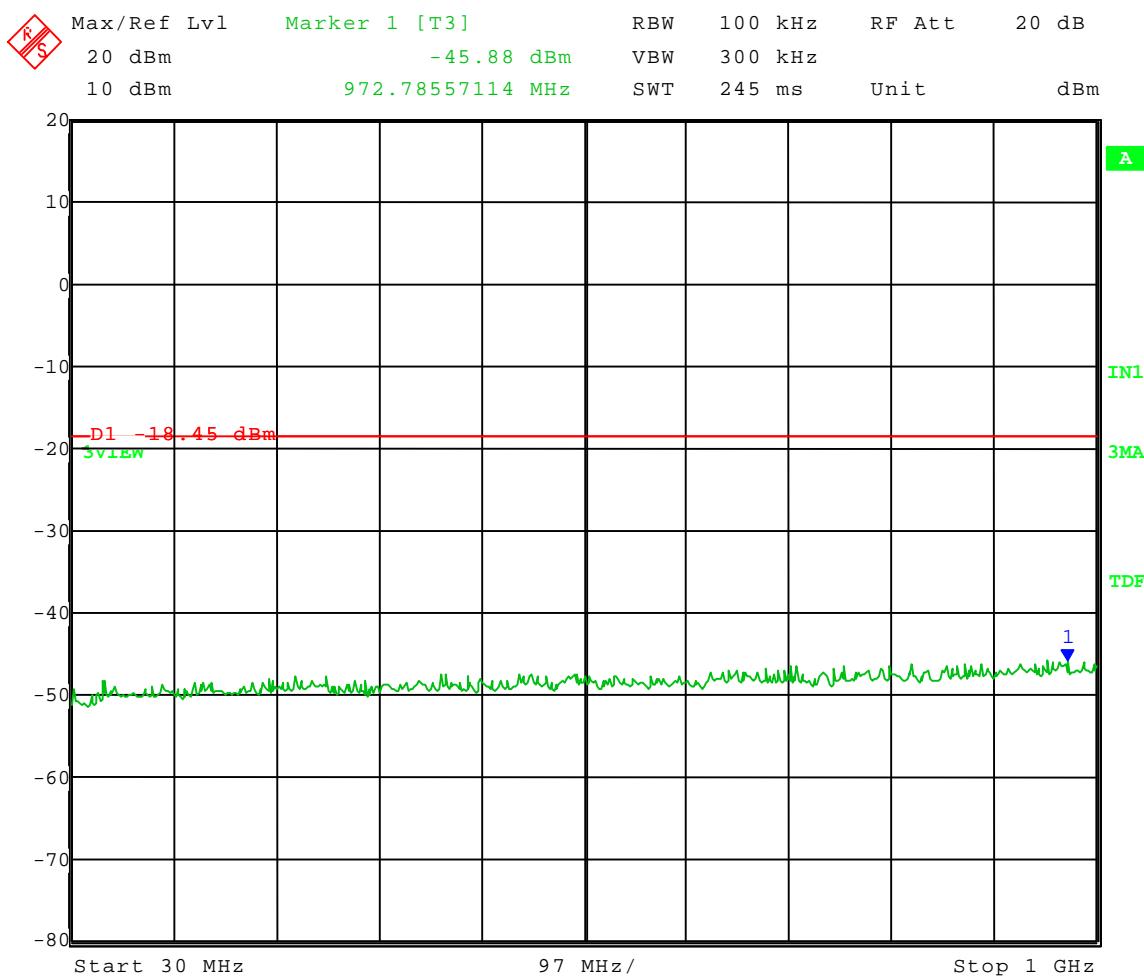

Date: 19.OCT.2009 15:40:22



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 1 to 10 GHz
Limit = -18.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

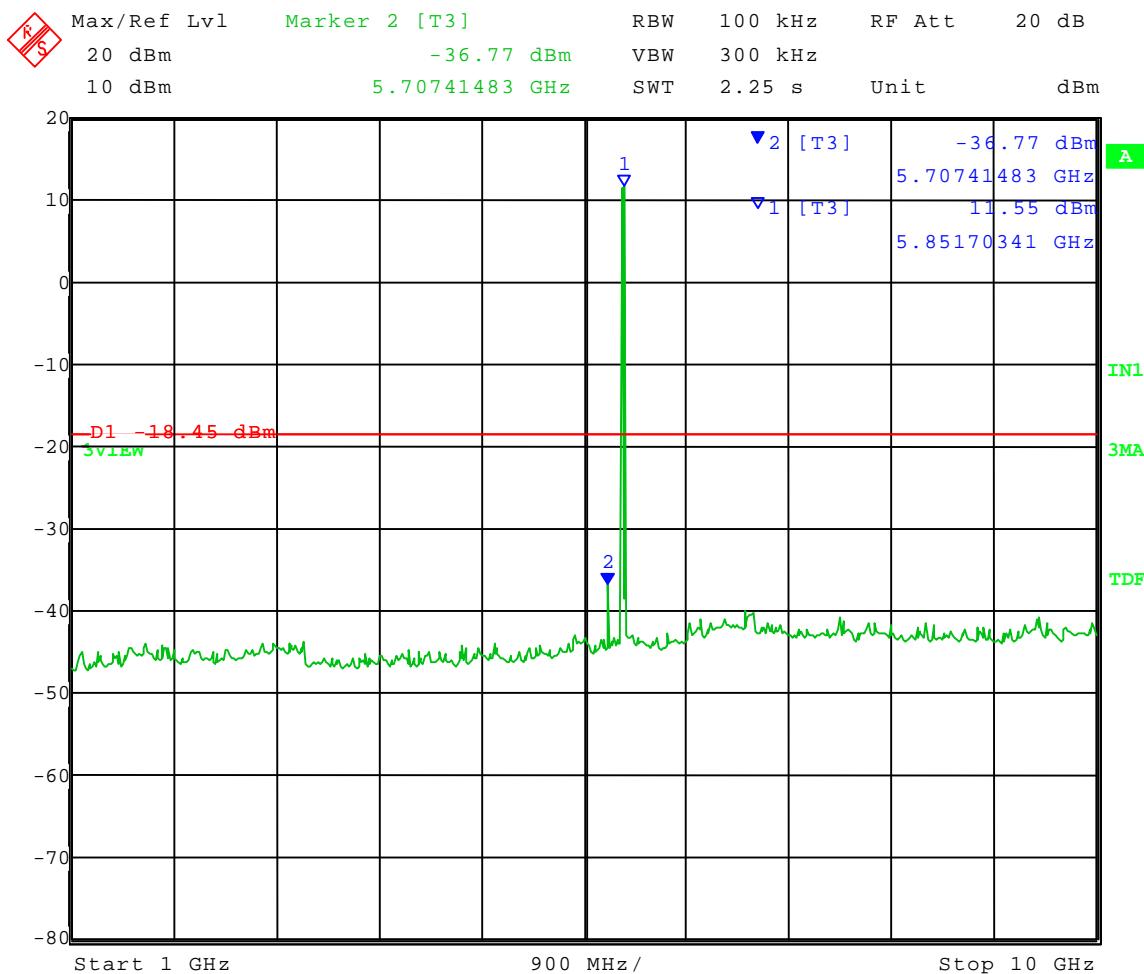

Date: 19.OCT.2009 15:35:41



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 10 to 18 GHz
Limit = -18.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

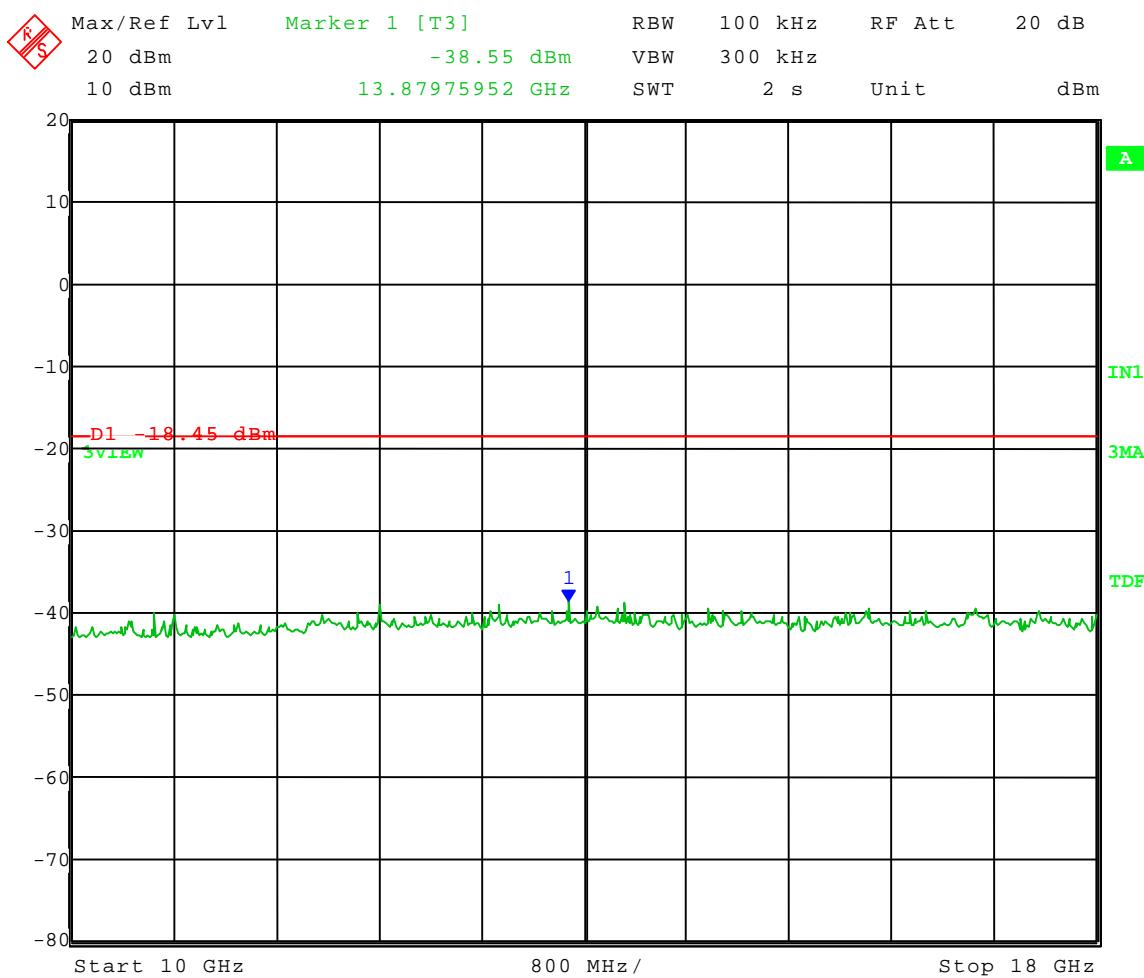

Date: 19.OCT.2009 15:36:56



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 18 to 26 GHz
Limit = -18.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

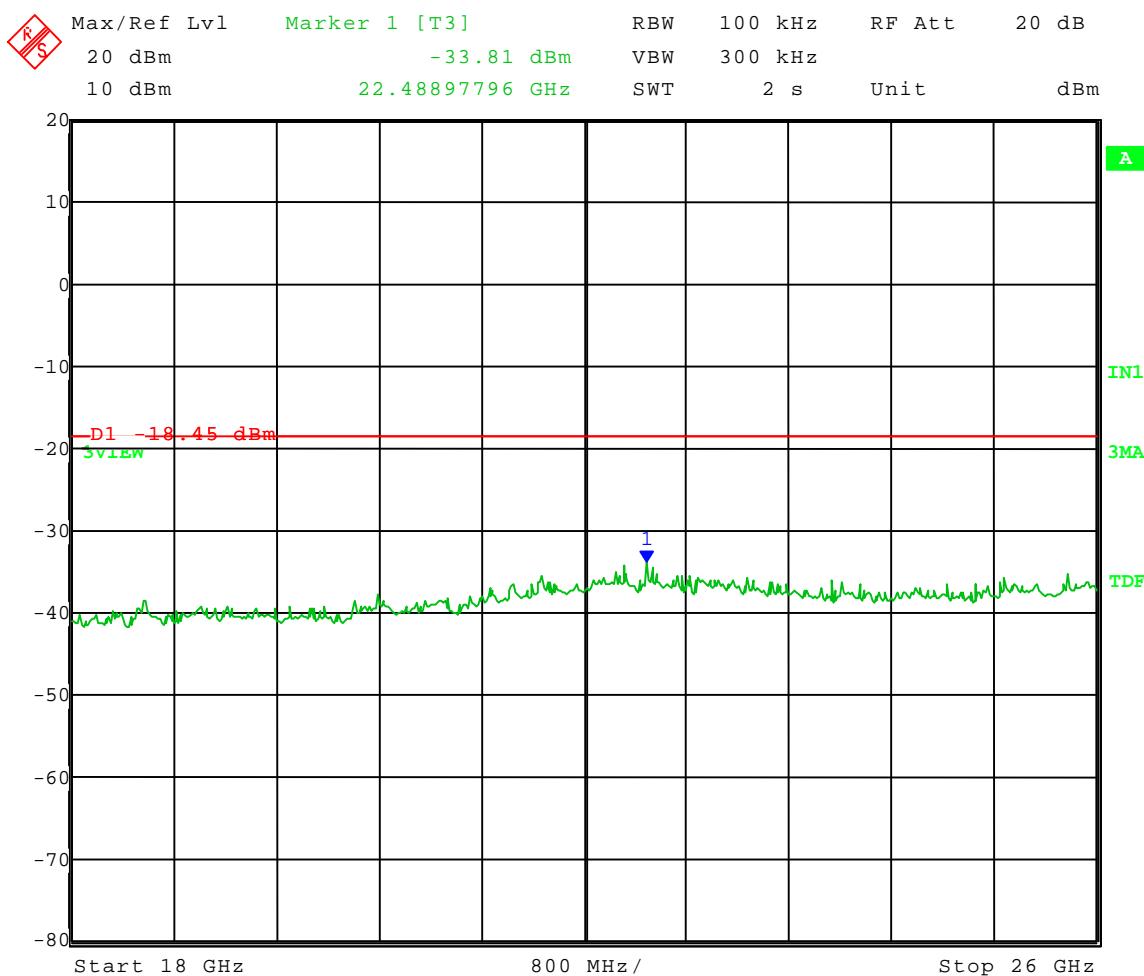

Date: 19.OCT.2009 15:38:00



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Spurious Emissions - Conducted - FCC 15.247(d)
Operator: Craig B
Comment: **High Channel:** Frequency – 5.845 GHz
Power setting: 6F
Modulation: 64 QAM

Frequency Range: 26 to 40 GHz
Limit = -18.45 dBm

All Spurious Emissions at Least **30** dB Below Peak In-Band Emission [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

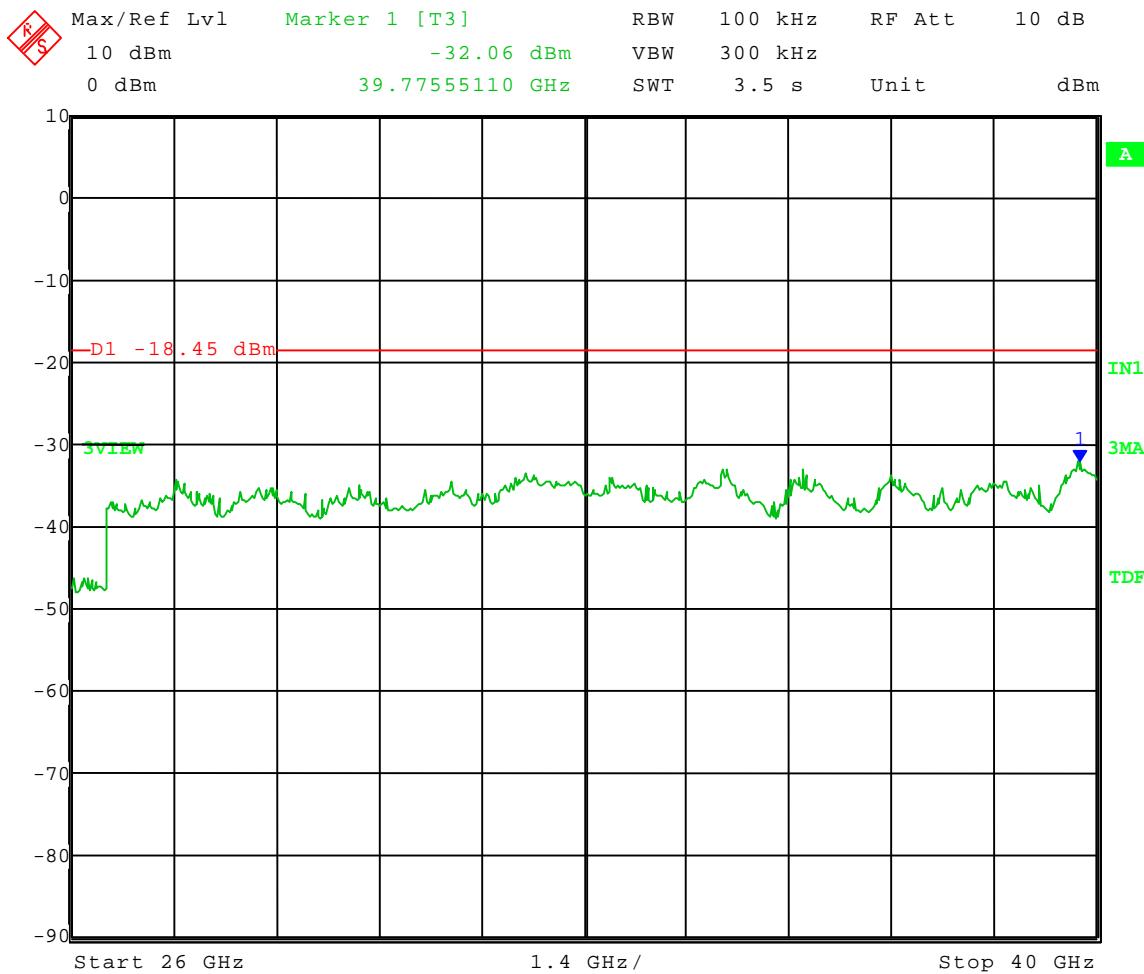

Date: 19.OCT.2009 15:39:11



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

2.0 RF CONDUCTED EMISSIONS (ANTENNA TERMINAL) PHOTOS TAKEN DURING TESTING



RF Conducted Output Power



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

3.0 RESTRICTED BANDS

As stated in Section 15.205a, the fundamental emission from the OFDM Access Point - CAP58430 shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

NOTE:

The noise floor within the Restricted Bands for the EMC Receiver will typically lay 20 dB below the limit.

4.0 RESTRICTED BAND AND BAND EDGE COMPLIANCE

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the attenuation below the general limits specified in 15.209 is not required.

The field strength of any **radiated emissions** which fall within the restricted bands shall not exceed the general radiated emissions limits as stated Section 15.209.

NOTE: See the following page(s) for the graph(s) made showing compliance for Restricted Band and Band Edge Compliance:



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

DATA AND GRAPH(S) TAKEN SHOWING

THE RESTRICTED BAND COMPLIANCE

PART 15.247(d) & 15.205



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Radiated Spurious Emissions in Restricted Bands - 1 GHz to 40 GHz

1 GHz to 40 GHz: Tested at a 1 Meter Distance

EUT: OFDM Access point CAP 58430 Model: 5780APUS
Manufacturer: Motorola
Operating Condition: 70 deg F; 40% R.H.
Test Site: Site 2
Operator: Craig B
Test Specification: FCC Part 15.247(d) and FCC Part 15.205
Comment: Continuous transmit.
Date: 10/20/2009

Notes: (1) Peak measurements were taken with RBW = 1 MHz, VBW = 3 MHz
(2) Average measurements were taken with RBW = 1 MHz, VBW = 10 Hz
(3) All other restricted band emissions at least 20 dB under the limit.
(4) Tested with 64-QAM modulation. Each type of modulation was looked at and 64-QAM was found to be worst-case.

Low Channel (5730 MHz)



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Radiated Spurious Emissions in Restricted Bands - 1 GHz to 40 GHz

1 GHz to 40 GHz: Tested at a 1 Meter Distance

EUT: OFDM Access point CAP 58430 Model: 5780APUS
Manufacturer: Motorola
Operating Condition: 70 deg F; 40% R.H.
Test Site: Site 2
Operator: Craig B
Test Specification: FCC Part 15.247(d) and FCC Part 15.205
Comment: Continuous transmit.
Date: 10/20/2009

Notes:

- (1) Peak measurements were taken with RBW = 1 MHz, VBW = 3 MHz
- (2) Average measurements were taken with RBW = 1 MHz, VBW = 10 Hz
- (3) All other restricted band emissions at least 20 dB under the limit.
- (4) Tested with 64-QAM modulation. Each type of modulation was looked at and 64-QAM was found to be worst-case.

Mid Channel (5775 MHz)



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Radiated Spurious Emissions in Restricted Bands - 1 GHz to 40 GHz

1 GHz to 40 GHz: Tested at a 1 Meter Distance

EUT: OFDM Access point CAP 58430 Model: 5780APUS
Manufacturer: Motorola
Operating Condition: 70 deg F; 40% R.H.
Test Site: Site 2
Operator: Craig B
Test Specification: FCC Part 15.247(d) and FCC Part 15.205
Comment: Continuous transmit.
Date: 10/20/2009

Notes:

- (1) Peak measurements were taken with RBW = 1 MHz, VBW = 3 MHz
- (2) Average measurements were taken with RBW = 1 MHz, VBW = 10 Hz
- (3) All other restricted band emissions at least 20 dB under the limit.
- (4) Tested with 64-QAM modulation. Each type of modulation was looked at and 64-QAM was found to be worst-case.

High Channel (5845 MHz)



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE CONDUCTED COMPLIANCE

PART 15.247

QPSK

NOTE:

Using FCC Guidance Document "**Measurement of Digital Transmission Systems Operating under Section 15.247** - March 23, 2005".



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Low Band-Edge Compliance - Conducted – FCC Part 15.247(d)
Operator: Craig B

Comment: Band-Edge Frequency = 5.725 GHz
Band-Edge > 30 dB Below Peak In-Band Emission [EUT complies with conducted power limits
based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

Low Channel: Frequency – 5.730 GHz

Modulation: QPSK

Power Setting: 6A

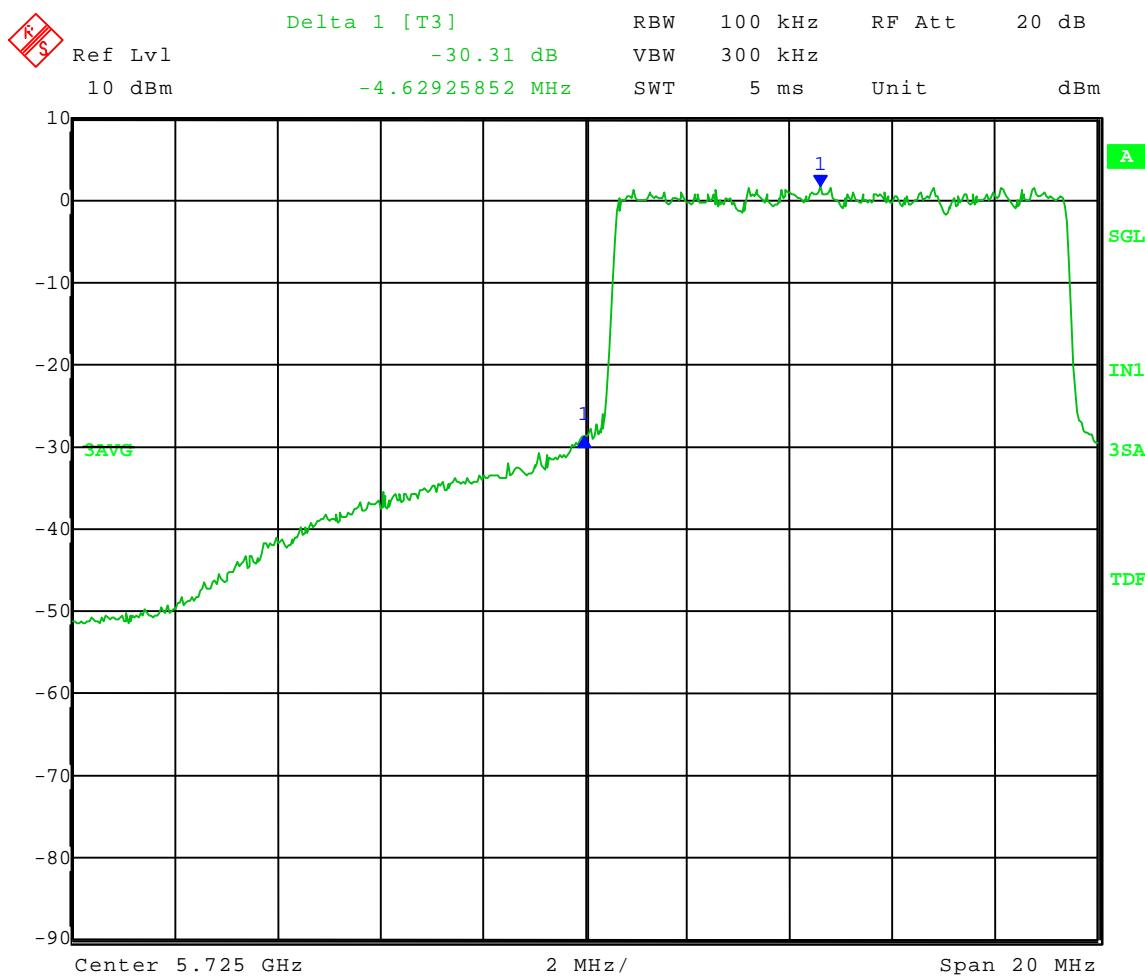



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Upper Band-Edge Compliance - Conducted – FCC Part 15.247(d)
Operator: Craig B

Comment: Band-Edge Frequency = 5.850 GHz
Band-Edge > 30 dB Below Peak In-Band Emission [EUT complies with conducted power limits
based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

High Channel: Frequency – 5.845 GHz

Modulation: QPSK

Power Setting: 6D

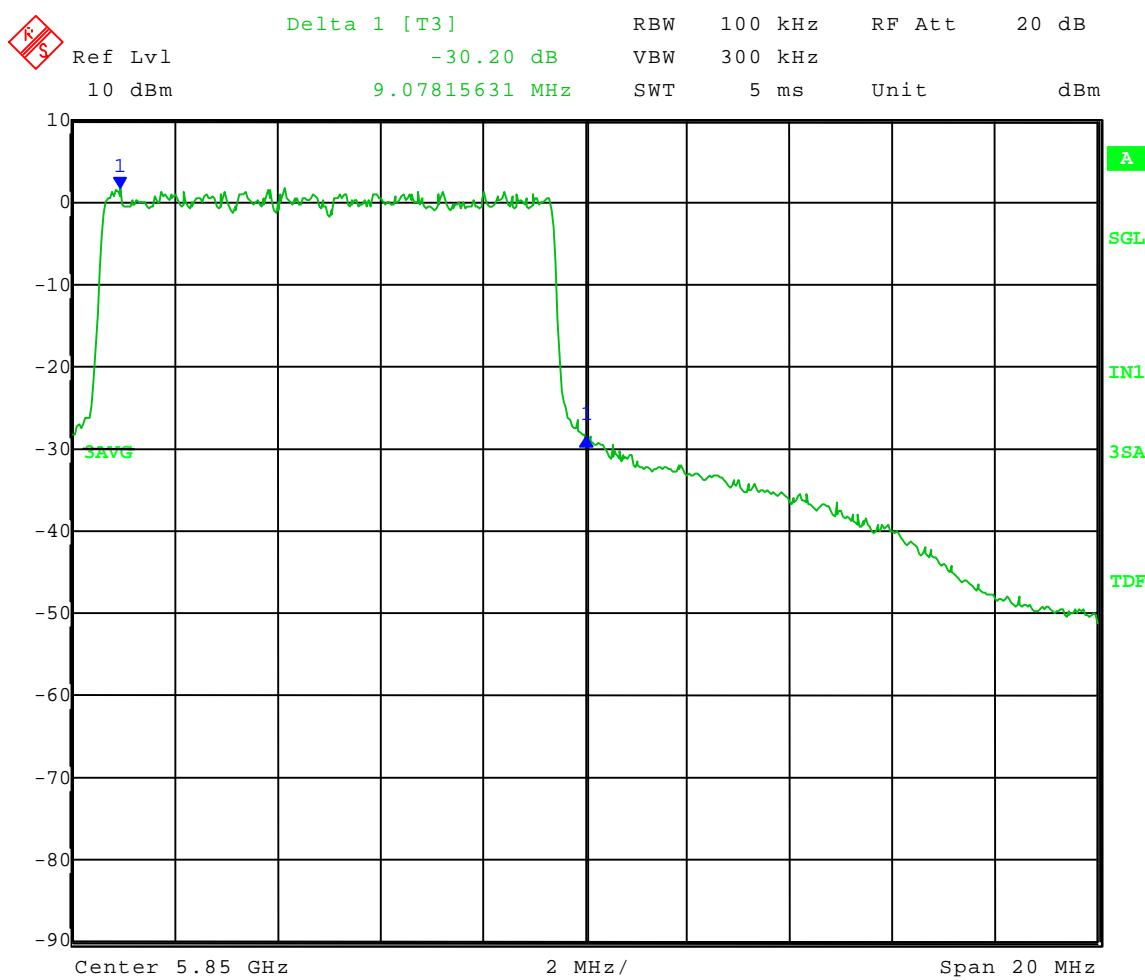



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE CONDUCTED COMPLIANCE

PART 15.247

16QAM

NOTE:

Using FCC Guidance Document "**Measurement of Digital Transmission Systems Operating under Section 15.247** - March 23, 2005".



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Low Band-Edge Compliance - Conducted – FCC Part 15.247(d)
Operator: Craig B

Comment: Band-Edge Frequency = 5.725 GHz
Band-Edge > 30 dB Below Peak In-Band Emission [EUT complies with conducted power limits
based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

Low Channel: Frequency – 5.730 GHz

Modulation: 16 QAM

Power Setting: 6A

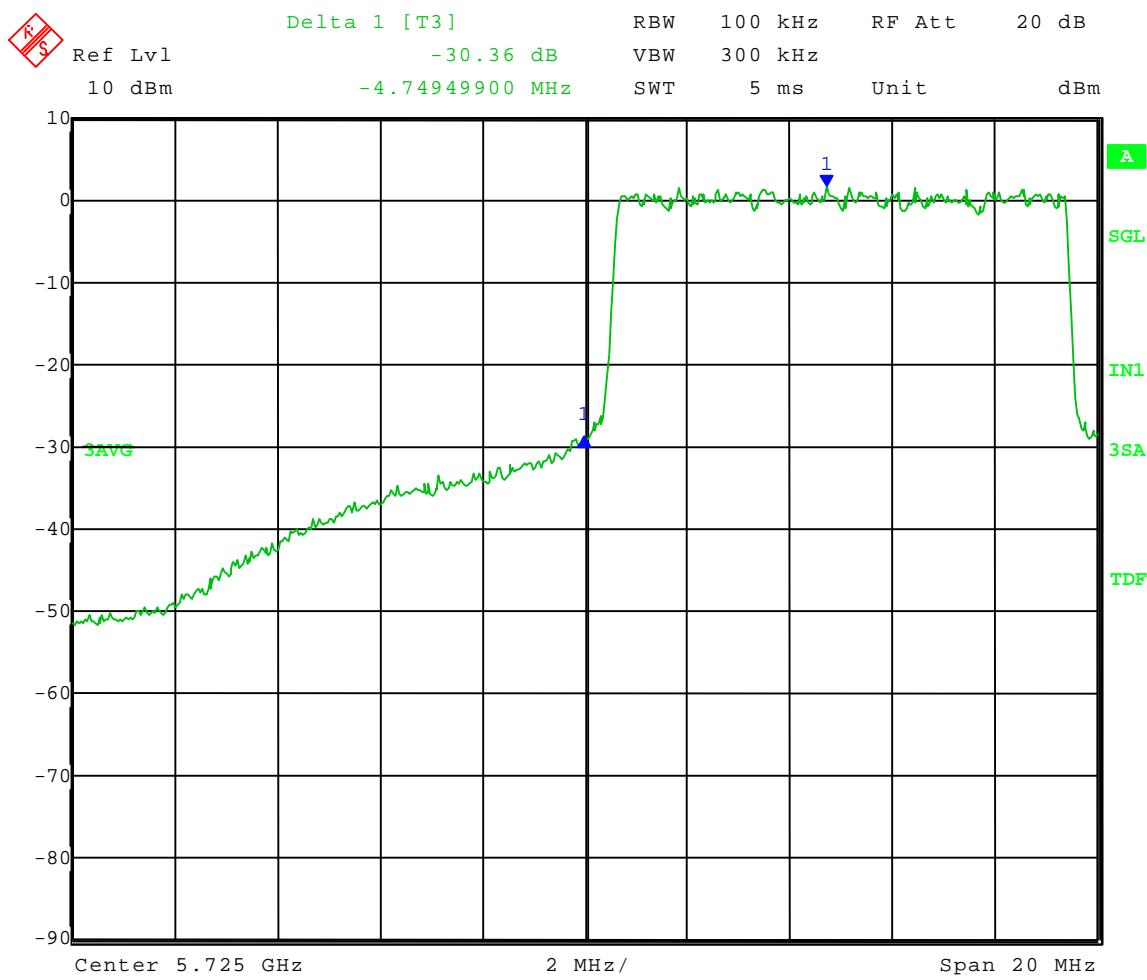

Date: 19.OCT.2009 10:21:22



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Upper Band-Edge Compliance - Conducted – FCC Part 15.247(d)
Operator: Craig B

Comment: Band-Edge Frequency = 5.850 GHz
Band-Edge > 30 dB Below Peak In-Band Emission [EUT complies with conducted power limits
based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

High Channel: Frequency – 5.845 GHz

Modulation: 16 QAM

Power Setting: 6C

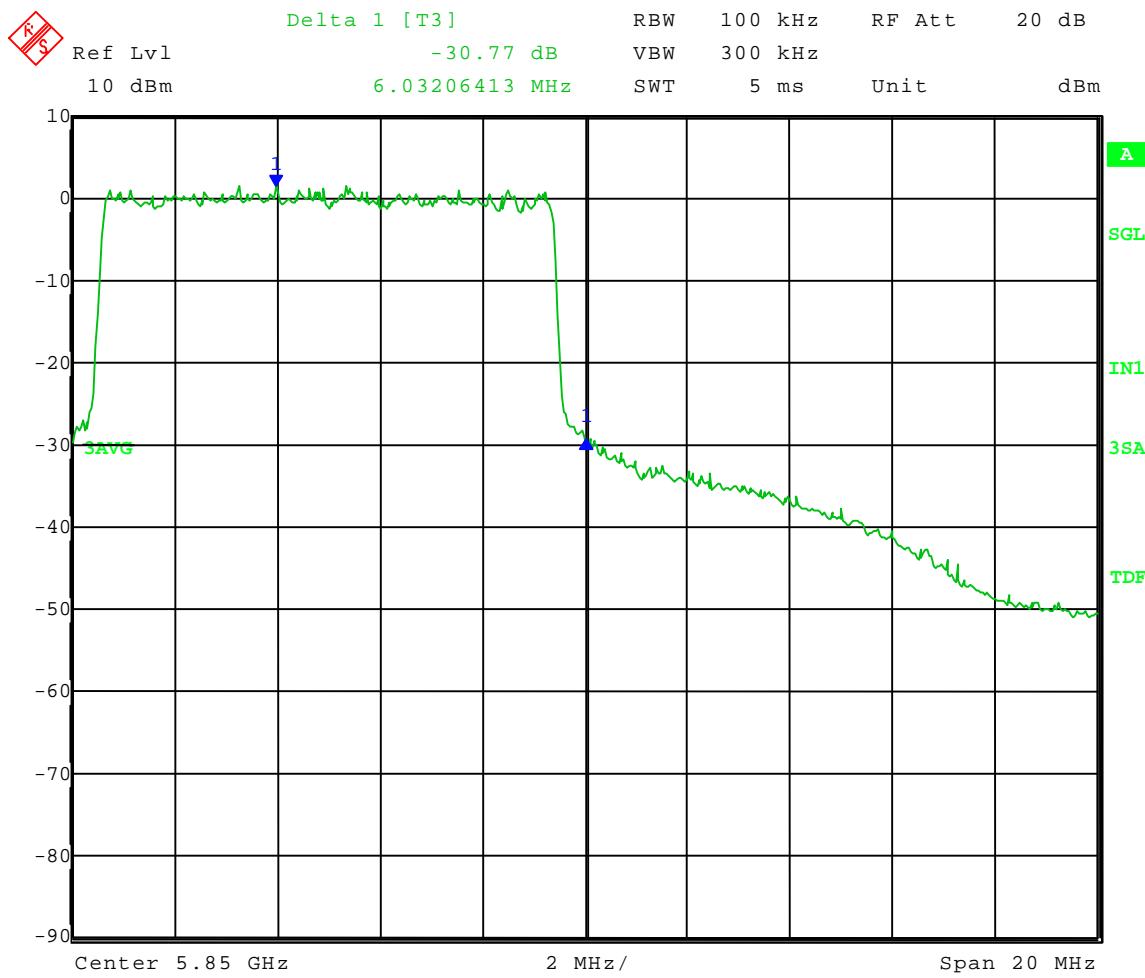



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE CONDUCTED COMPLIANCE

PART 15.247

64QAM

NOTE:

Using FCC Guidance Document "**Measurement of Digital Transmission Systems Operating under Section 15.247** - March 23, 2005".



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Low Band-Edge Compliance - Conducted – FCC Part 15.247(d)
Operator: Craig B

Comment: Band-Edge Frequency = 5.725 GHz
Band-Edge > 30 dB Below Peak In-Band Emission [EUT complies with conducted power limits
based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

Low Channel: Frequency – 5.730 GHz

Modulation: 64 QAM

Power Setting: 6E

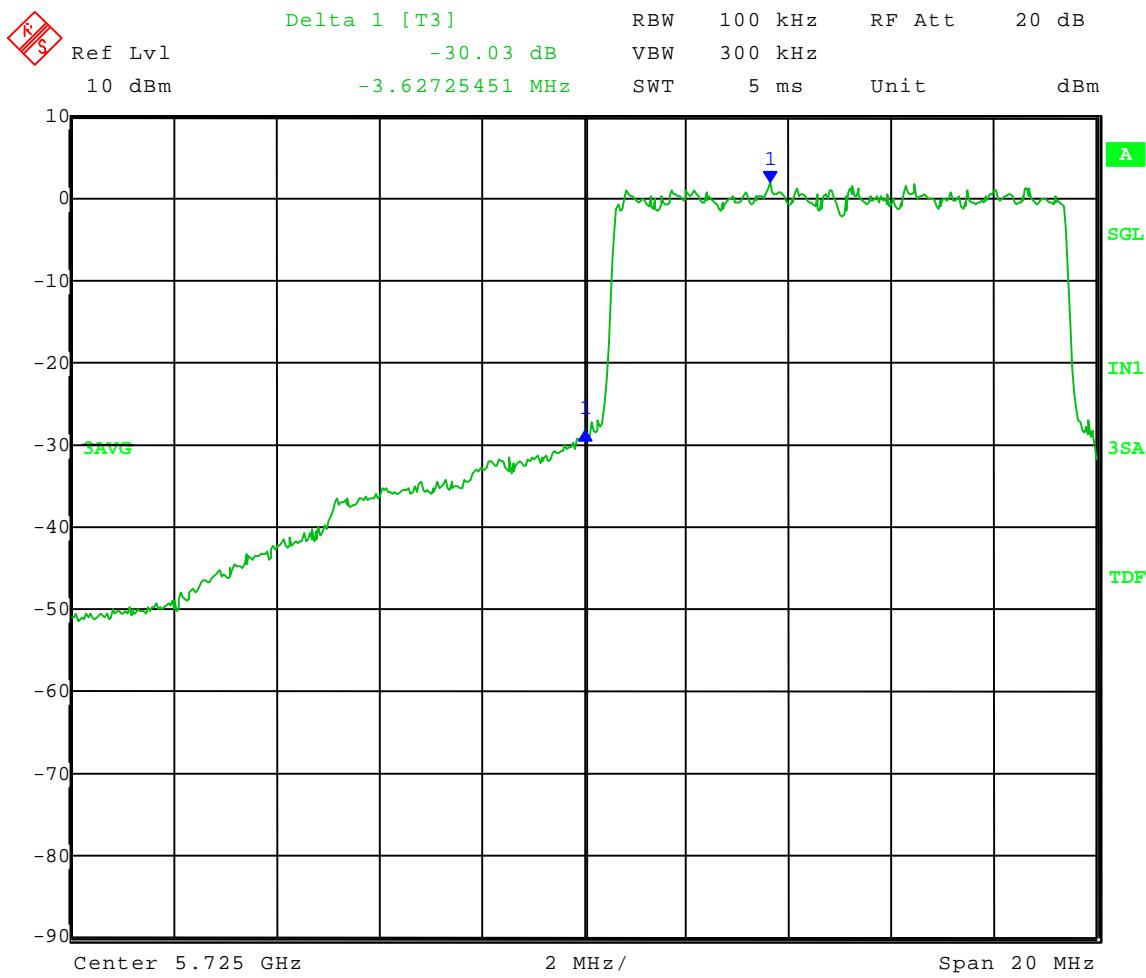

Date: 19.OCT.2009 10:12:04



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Upper Band-Edge Compliance - Conducted – FCC Part 15.247(d)
Operator: Craig B

Comment: Band-Edge Frequency = 5.850 GHz
Band-Edge > 30 dB Below Peak In-Band Emission [EUT complies with conducted power limits
based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

High Channel: Frequency – 5.845 GHz

Modulation: 64 QAM

Power Setting: 6F

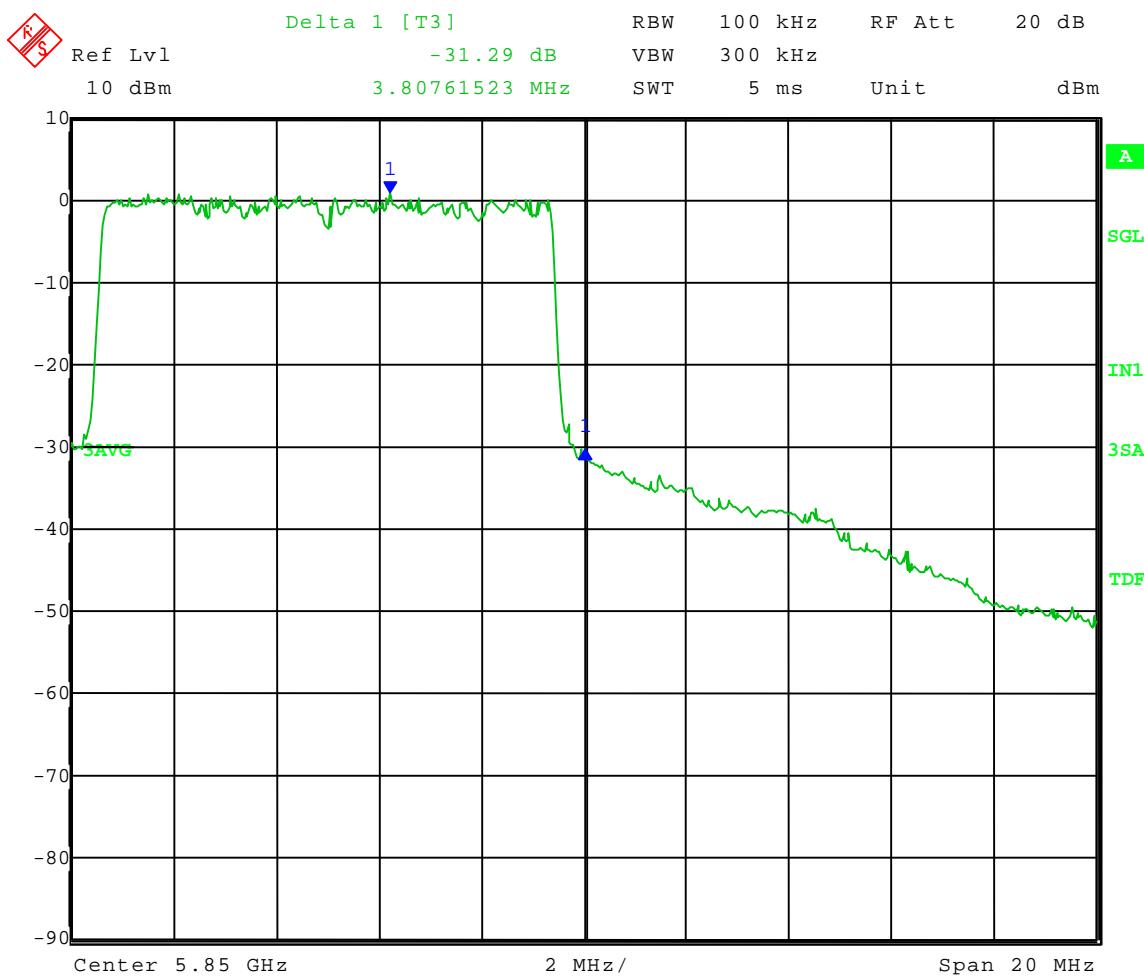



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

5.0 FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSION MEASUREMENTS

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the OFDM Access Point - CAP58430, Model Number: 5780APUS, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the OFDM Access Point - CAP58430 were made up to 40000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of 5730 - 5845 MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.247 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, limits were extrapolated using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 25 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2003, Clauses 6 & 8, Test procedures for the radiated field strength of spurious emissions is per FCC Guidance Document "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005". Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

5.0 FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSION MEASUREMENTS (CON'T)

As stated in Section 15.247(b) the allowed maximum peak output power of the transmitter shall not exceed 1 Watt. In any 100 kHz bandwidth outside these frequency bands (the power that is produced by the modulation products of the spreading sequence), the information sequence and the carrier frequency shall be either at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in 15.209 is not required.

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

NOTE:

All radiated emissions measurements were made at a test room temperature of 72°F at 41% relative humidity.



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

RADIATED DATA AND GRAPH(S) TAKEN FOR FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSION MEASUREMENTS

PART 15.247

30 MHz – 1000 MHz

NOTE:

Per FCC Guidance Document "Measurement of Digital Transmission Systems Operating under Section 15.247 - March 23, 2005".

Electric Field Strength

EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Manufacturer: Motorola
Operating Condition: 72 deg. F; 41% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Transmit, Receive, and Standby; Low, Mid, and High channels
Comment: Powered from remote CMM4
Date: 10-20-2009

TEXT: "Site 2 MidV 3M"


Short Description: Test Set-up Vert30-1000MHz
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010

Antennas ---
Biconical -- EMCO 3104C SN: 0005-4892
Log Periodic -- Electro Metrics LPA-25 SN: 1205

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/004

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Level [dB μ V/m]

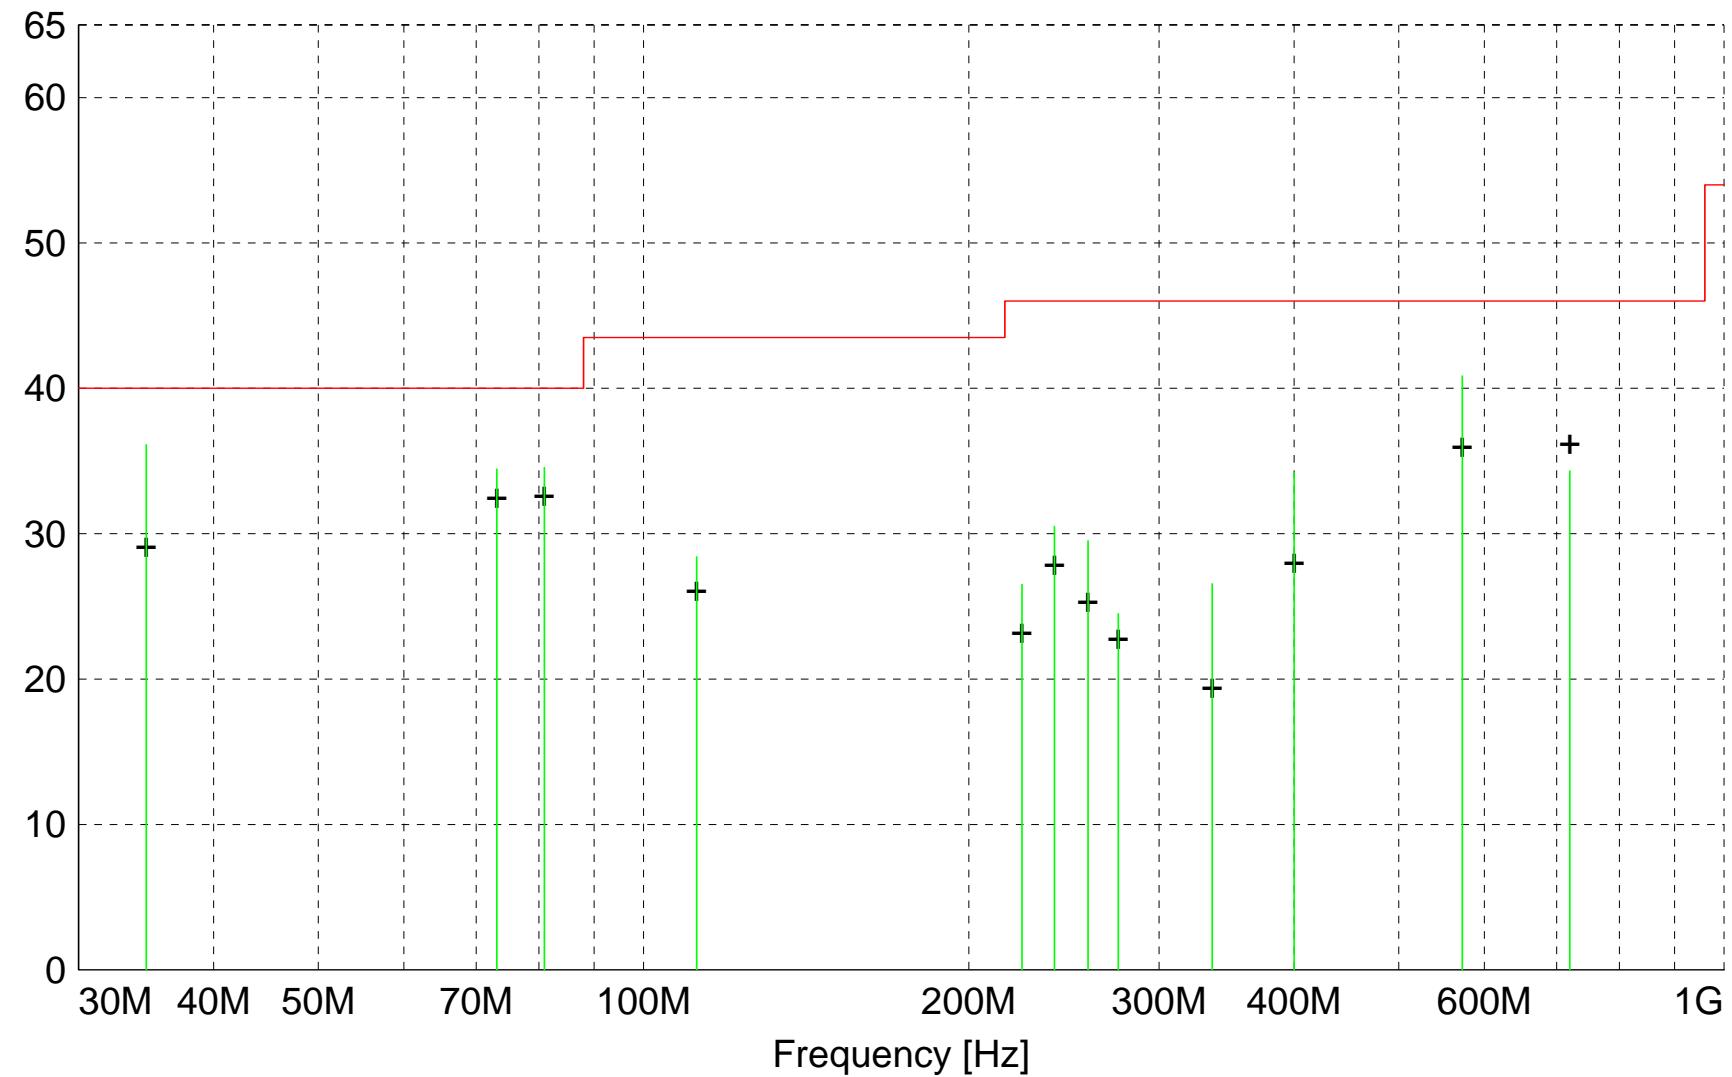

||||| MES AHPR1_F1V_Quasi-Peak
+ + · MES AHPR1_F1V_Peak_List
— LIM FCC Class B 3m

Quasi-Peak Limit @ 3 Meters

MEASUREMENT RESULT: "AHPRI_F1V_Final"

10/20/2009 2:33PM

Frequency MHz	Level dB μ V	Antenna Factor dB μ V/m	System Loss dB	Total Level dB μ V/m	Limit dB μ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
34.650000	48.63	11.87	-24.4	36.1	40.0	3.9	1.00	135	QUASI-PEAK	None
572.300000	42.64	18.70	-20.5	40.9	46.0	5.1	1.00	45	QUASI-PEAK	None
80.940000	51.27	6.97	-23.7	34.6	40.0	5.4	1.00	125	QUASI-PEAK	None
73.150000	51.85	6.39	-23.8	34.4	40.0	5.6	1.00	45	QUASI-PEAK	None
720.000000	32.79	21.23	-19.7	34.3	46.0	11.7	1.00	0	QUASI-PEAK	None
400.000000	39.95	15.67	-21.4	34.2	46.0	11.8	2.10	355	QUASI-PEAK	None
112.005000	38.91	12.70	-23.2	28.4	43.5	15.1	1.00	100	QUASI-PEAK	None
240.020000	40.99	11.83	-22.3	30.5	46.0	15.5	1.00	10	QUASI-PEAK	None
257.840000	39.11	12.63	-22.2	29.5	46.0	16.5	1.00	15	QUASI-PEAK	None
336.000000	33.38	14.88	-21.7	26.6	46.0	19.4	1.30	340	QUASI-PEAK	None
224.000000	37.71	11.21	-22.4	26.5	46.0	19.5	1.00	20	QUASI-PEAK	None
275.000000	33.34	13.27	-22.1	24.5	46.0	21.5	1.00	20	QUASI-PEAK	None

Electric Field Strength

EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Manufacturer: Motorola
Operating Condition: 72 deg. F; 41% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Transmit, Receive, and Standby; Low, Mid, and High channels
Comment: Powered from remote CMM4
Date: 10-20-2009

TEXT: "Site 2 MidH 3M"


Short Description: Test Set-up Horz30-1000MHz
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010

Antennas ---
Biconical -- EMCO 3104C SN: 0005-4892
Log Periodic -- Electro Metrics LPA-25 SN: 1205

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/004

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Level [dB μ V/m]

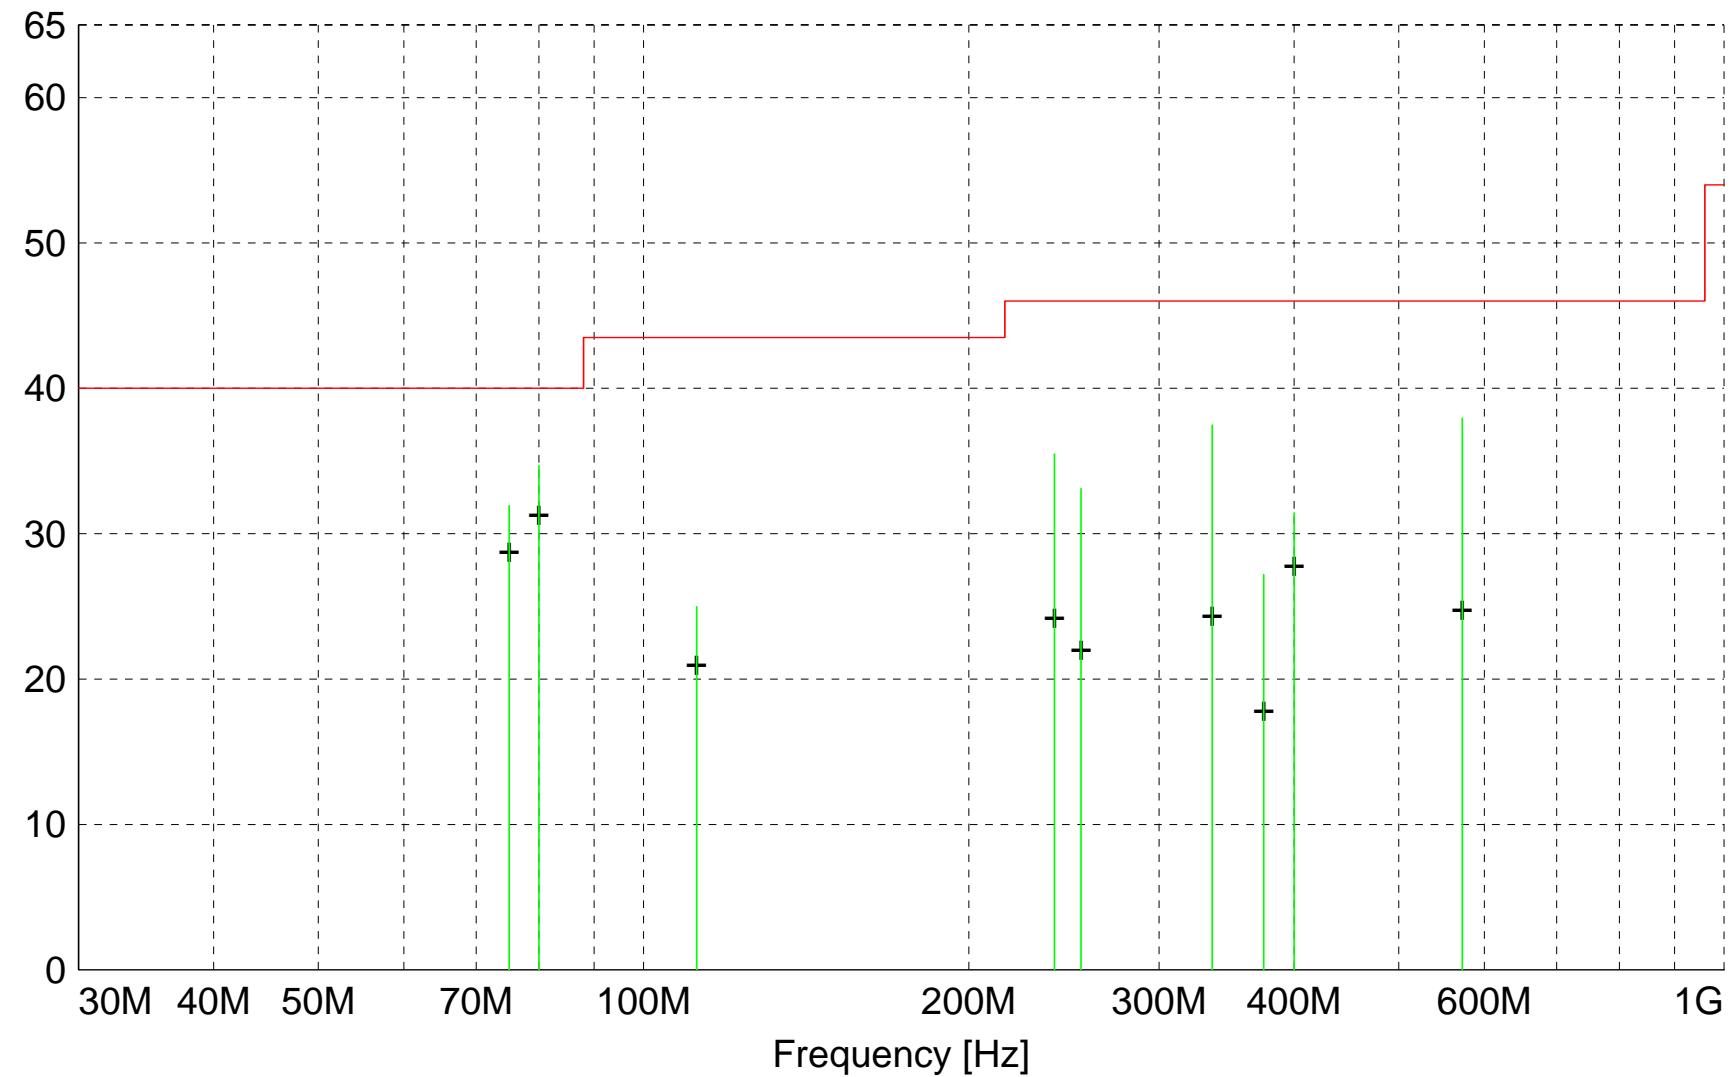

||||| MES AHPR1_F1H_Quasi-Peak
+ + · MES AHPR1_F1H_Peak_List
— LIM FCC Class B 3m

Quasi-Peak Limit @ 3 Meters

MEASUREMENT RESULT: "AHPRI_F1H_Final"

10/20/2009 2:34PM

Frequency MHz	Level dB μ V	Antenna Factor dB μ V/m	System Loss dB	Total Level dB μ V/m	Limit dB μ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
80.020000	51.58	6.81	-23.7	34.7	40.0	5.3	2.20	10	QUASI-PEAK	None
572.310000	39.73	18.70	-20.5	37.9	46.0	8.1	2.20	0	QUASI-PEAK	None
75.085000	49.51	6.19	-23.8	31.9	40.0	8.1	3.20	330	QUASI-PEAK	None
336.000000	44.30	14.88	-21.7	37.5	46.0	8.5	2.30	5	QUASI-PEAK	None
240.020000	45.98	11.83	-22.3	35.5	46.0	10.5	1.80	0	QUASI-PEAK	None
254.000000	42.40	12.94	-22.2	33.1	46.0	12.9	1.10	0	QUASI-PEAK	None
400.000000	37.16	15.67	-21.4	31.4	46.0	14.6	1.80	310	QUASI-PEAK	None
112.000000	35.48	12.70	-23.2	25.0	43.5	18.5	3.60	0	QUASI-PEAK	None
375.000000	33.63	15.16	-21.6	27.2	46.0	18.8	2.20	350	QUASI-PEAK	None



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

TRANSMITTER DUTY CYCLE GRAPHS

PART 15.35(c)




Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-21-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Duty Cycle – Transmit Max Duty Cycle (used for testing)
Operator: Craig B

Comment: Modulation QPSK
Duty Cycle = 100%

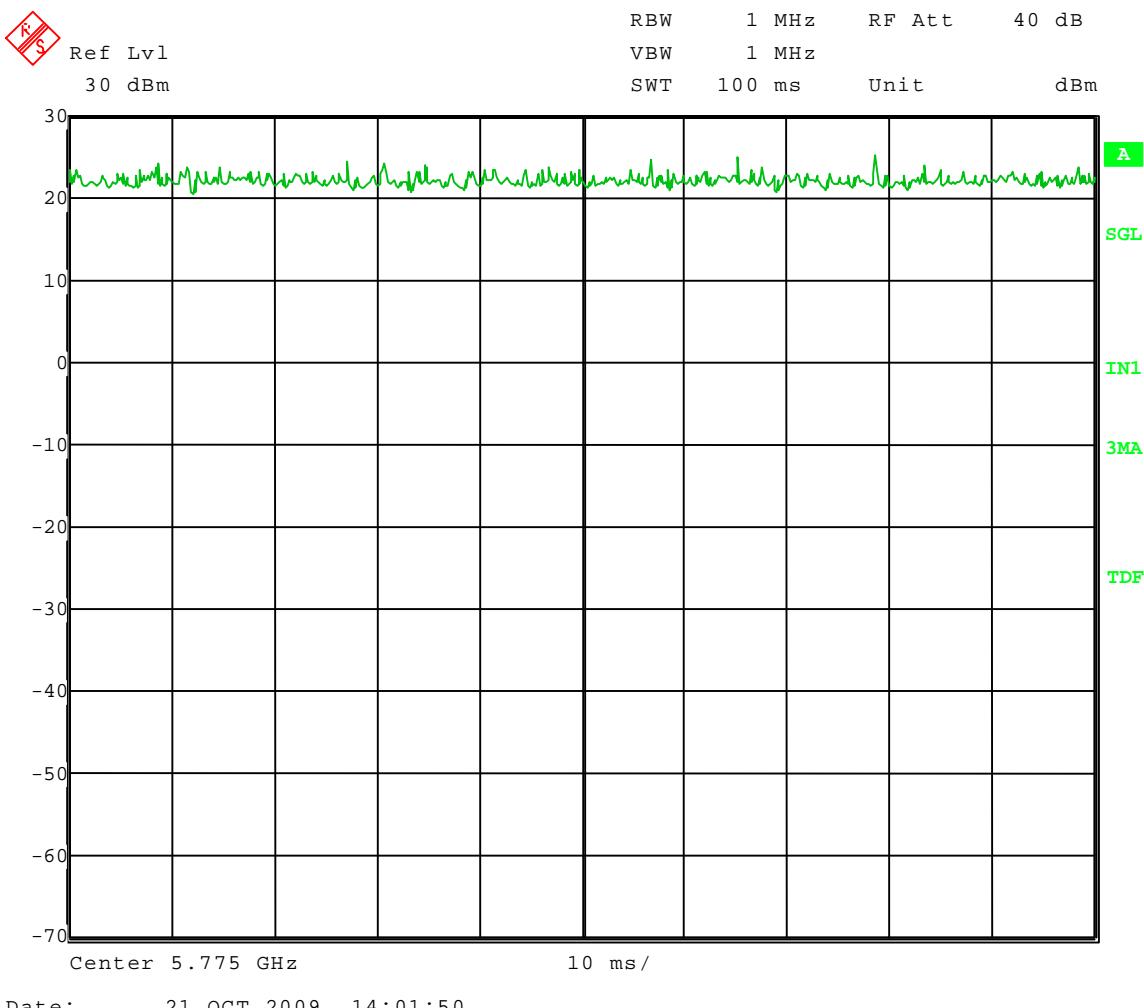




Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-21-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Duty Cycle – Transmit Max Duty Cycle (used for testing)
Operator: Craig B

Comment: Modulation 16 QAM
Duty Cycle = 100%

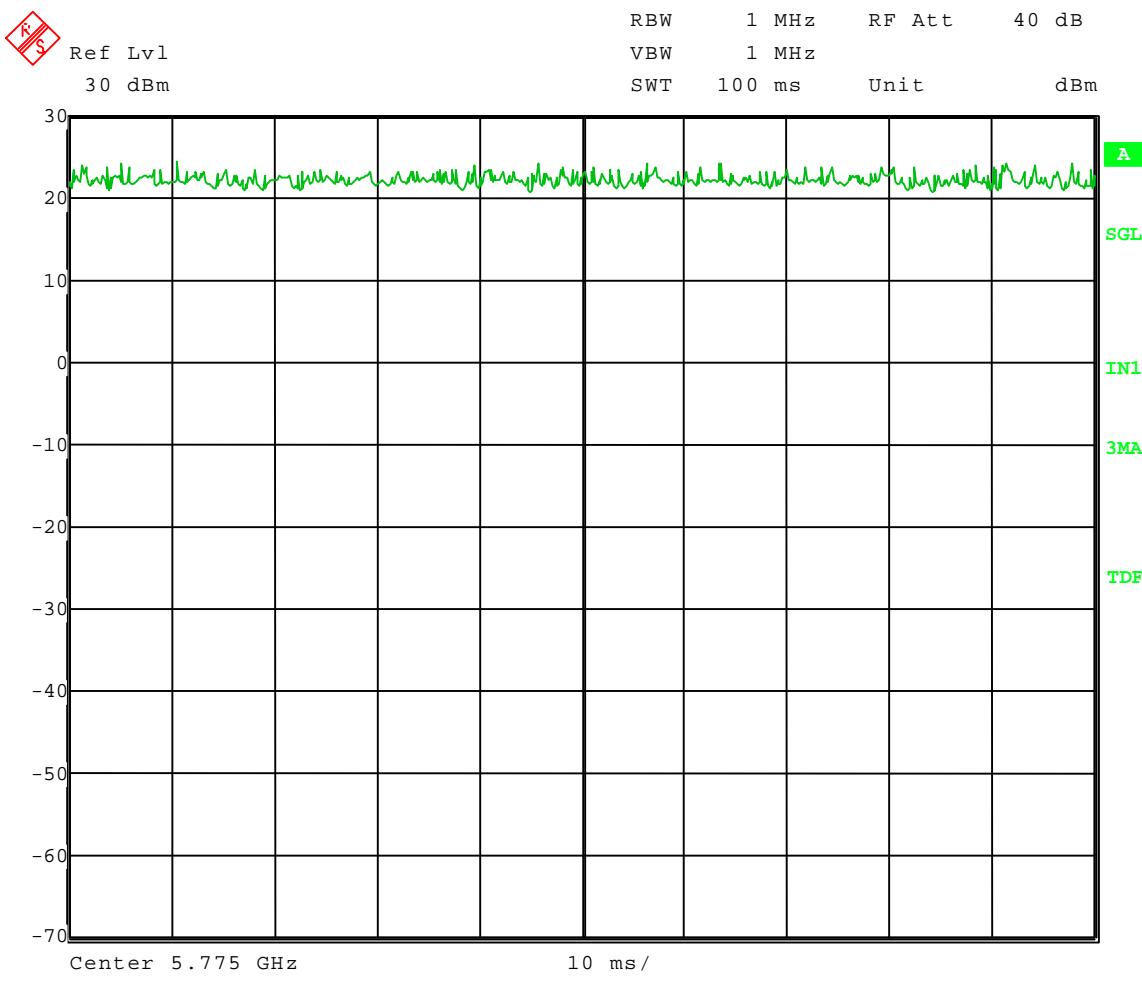




Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-21-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Duty Cycle – Transmit Max Duty Cycle (used for testing)
Operator: Craig B

Comment: Modulation 64 QAM
Duty Cycle = 100%

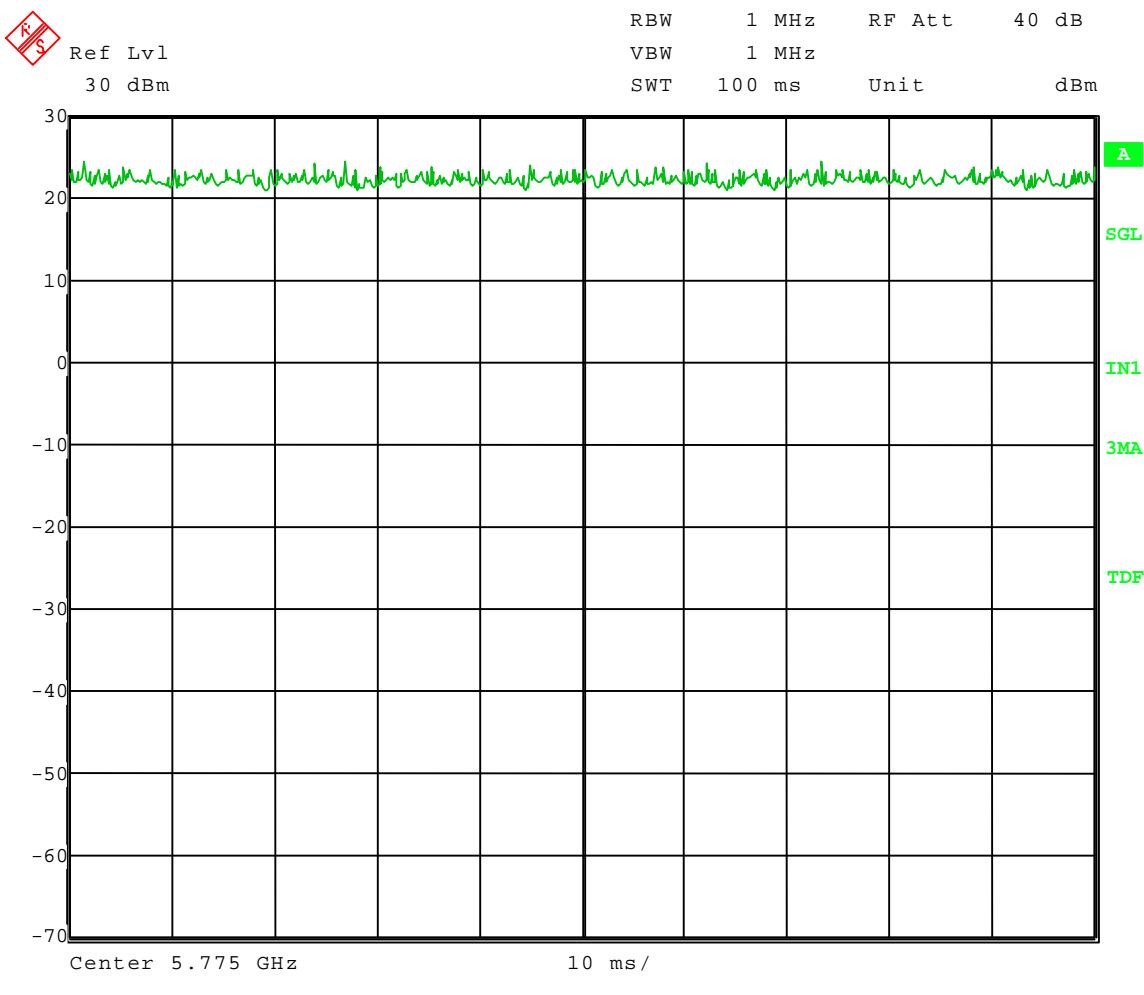

Date: 21.OCT.2009 13:56:37



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

6 dB BANDWIDTH GRAPHS

QPSK

PART 15.247



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

Low Channel: Frequency – 5.730 GHz

Modulation: QPSK

Power Setting: 6A

6 dB Bandwidth = 8.88 MHz

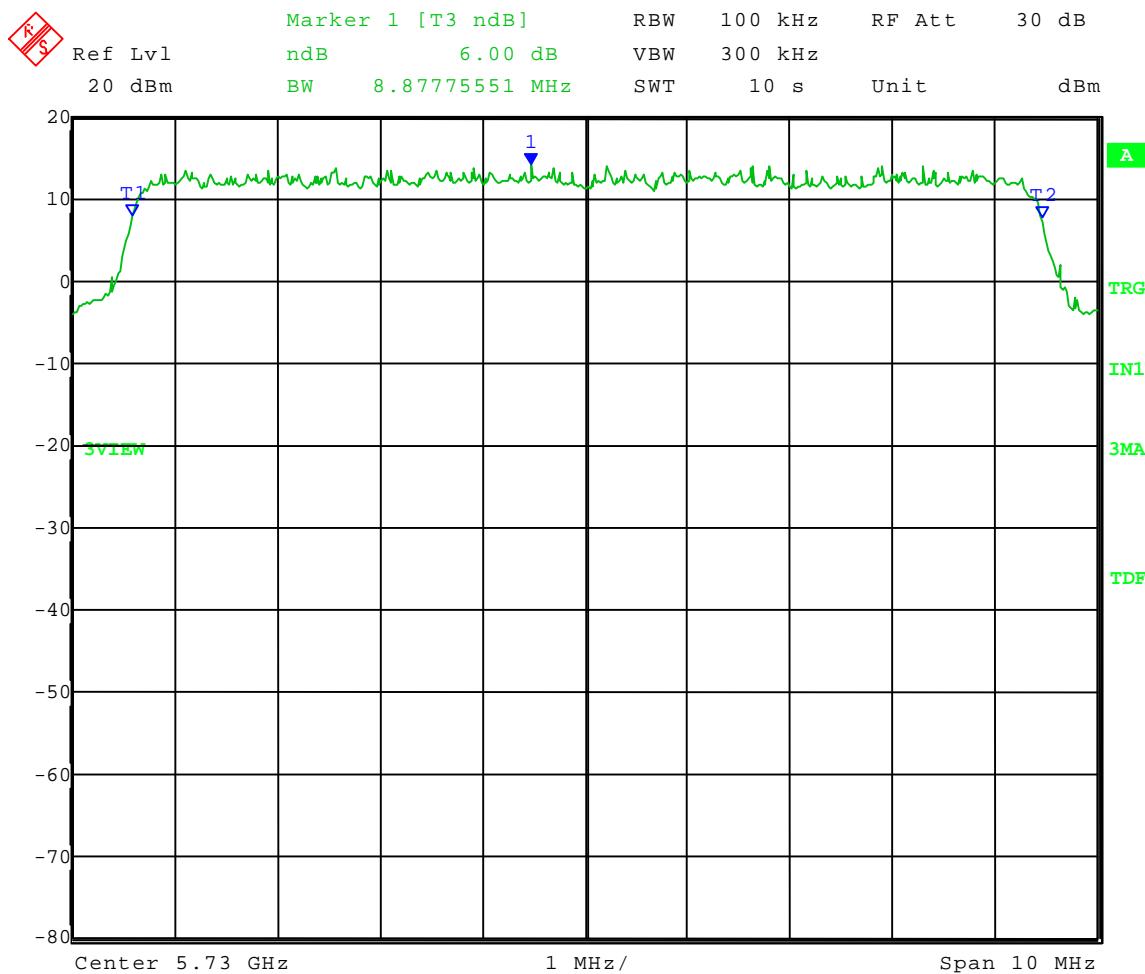

Date: 19.OCT.2009 14:06:45



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

Mid Channel: Frequency – 5.775 GHz

Modulation: QPSK

Power Setting: 6B

6 dB Bandwidth = 8.84 MHz

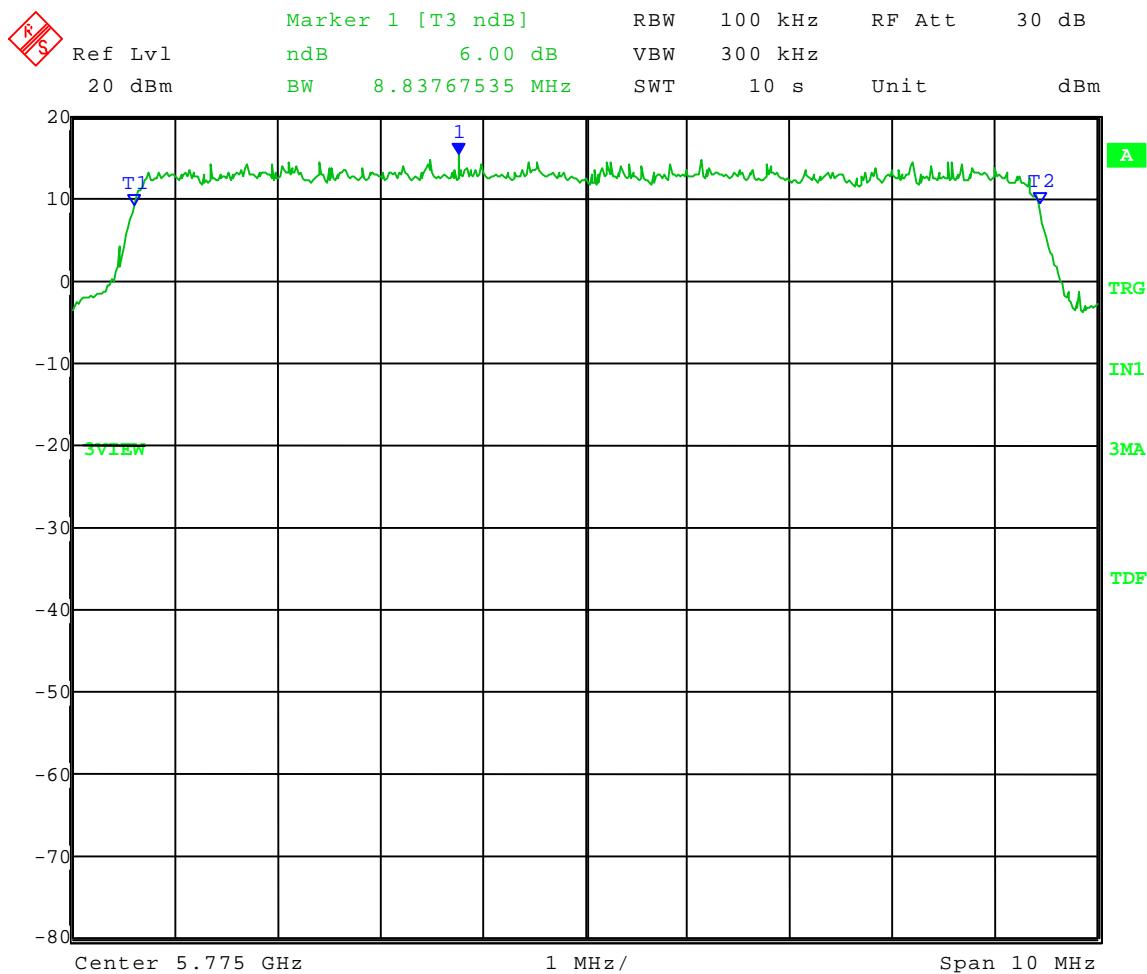

Date: 19.OCT.2009 14:19:02



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

High Channel: Frequency – 5.845 GHz

Modulation: QPSK

Power Setting: 6D

6 dB Bandwidth = 8.84 MHz

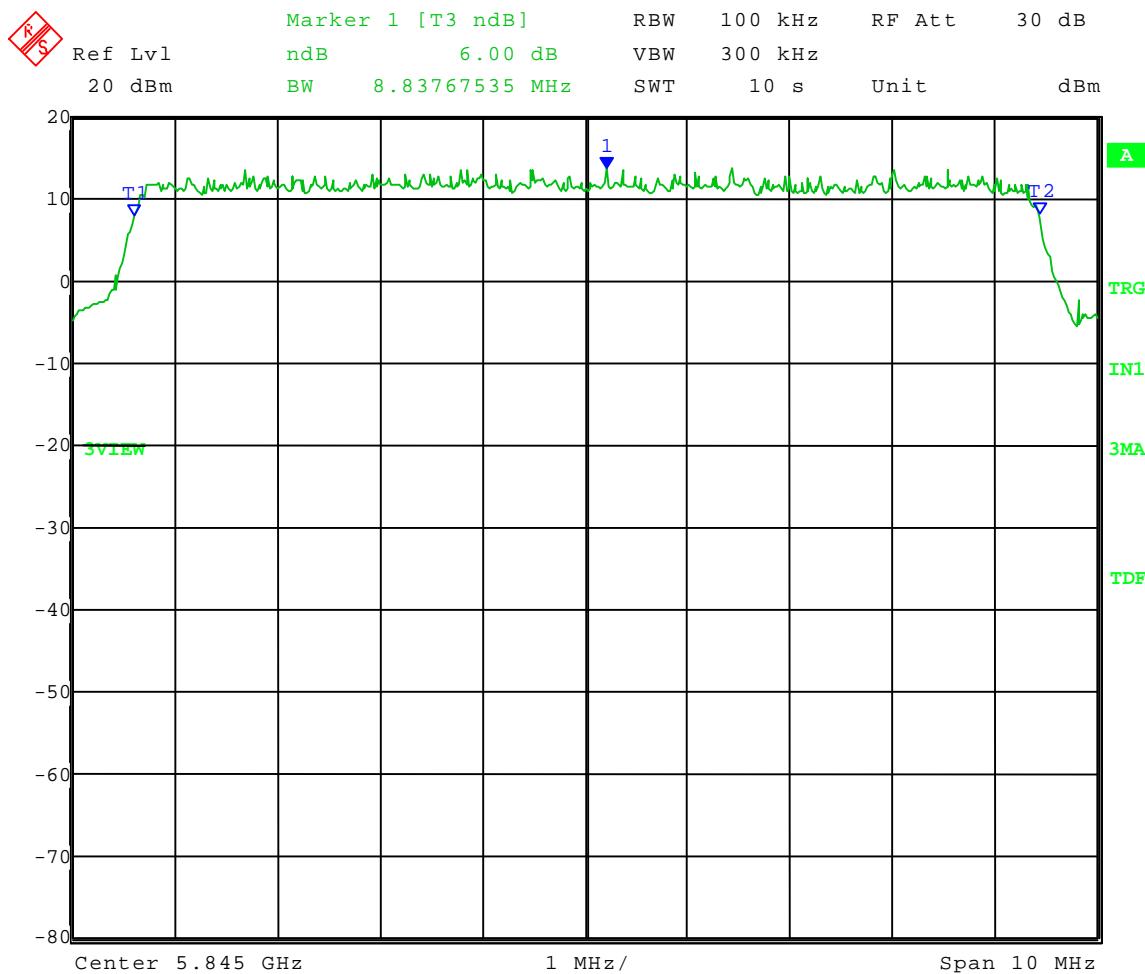

Date: 19.OCT.2009 13:45:27



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

6 dB BANDWIDTH GRAPHS

16QAM

PART 15.247



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

Low Channel: Frequency – 5.730 GHz

Modulation: 16 QAM

Power Setting: 6A

6 dB Bandwidth = 8.84 MHz

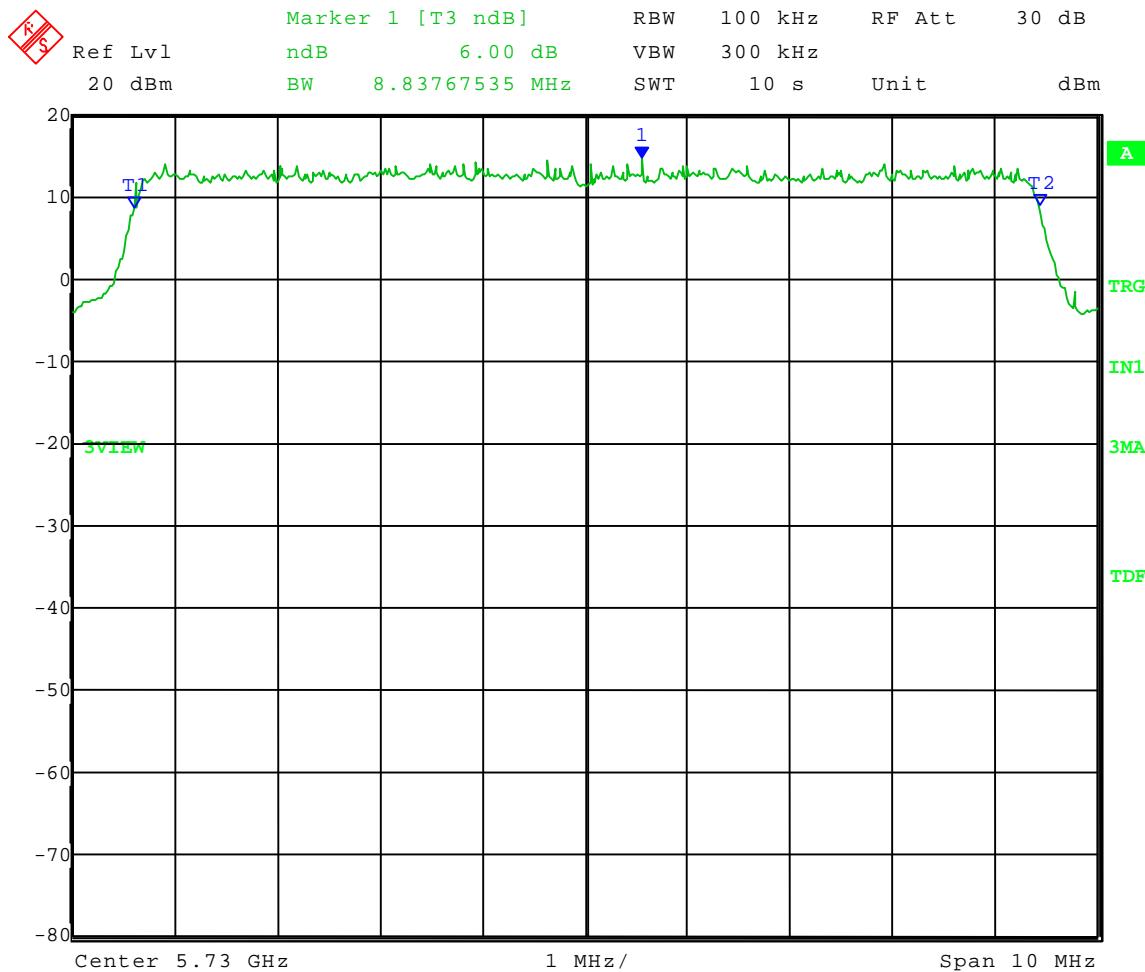

Date: 19.OCT.2009 14:02:44



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

Mid Channel: Frequency – 5.775 GHz

Modulation: 16 QAM

Power Setting: 6B

6 dB Bandwidth = 8.86 MHz

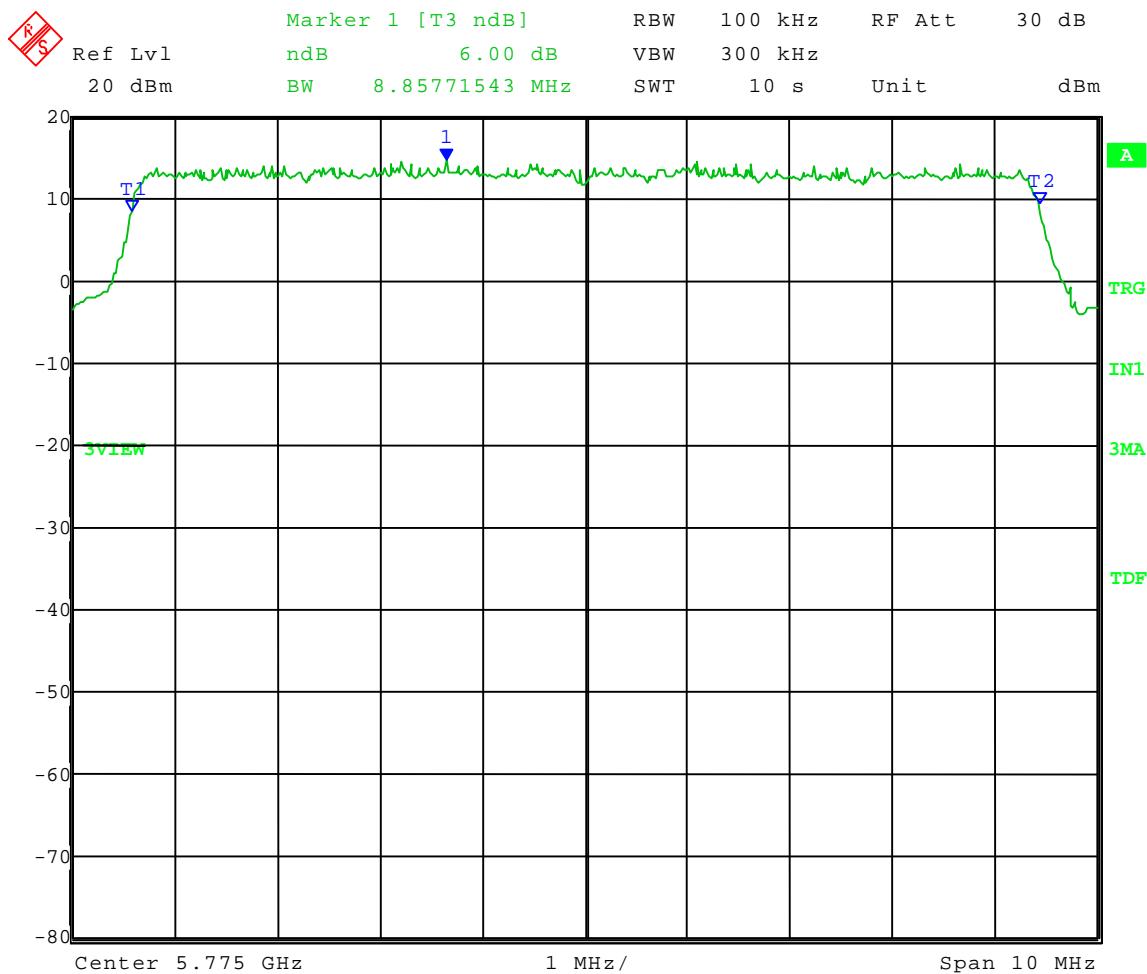

Date: 19.OCT.2009 14:15:10



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

High Channel: Frequency – 5.845 GHz

Modulation: 16 QAM

Power Setting: 6C

6 dB Bandwidth = 8.86 MHz

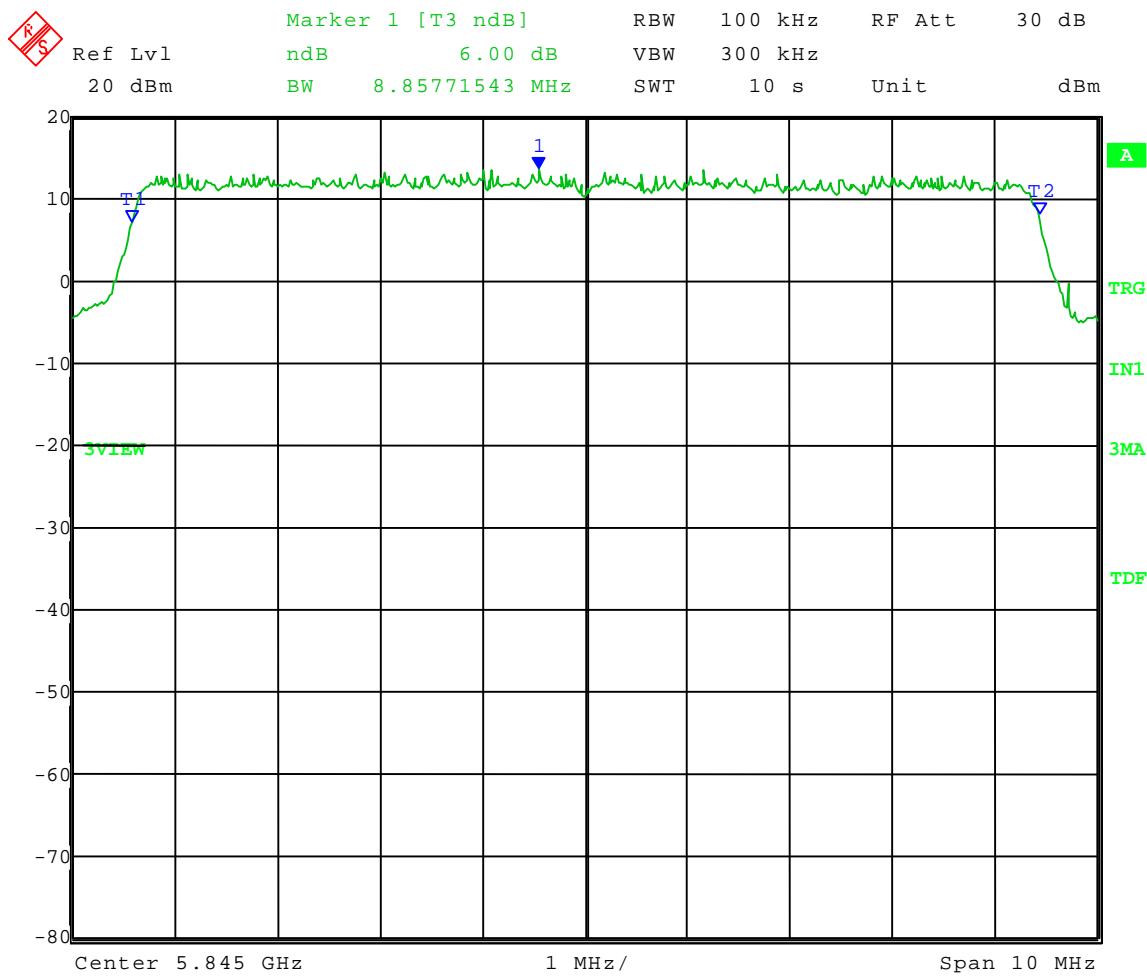

Date: 19.OCT.2009 13:50:54



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

6 dB BANDWIDTH GRAPHS

64QAM

PART 15.247



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

Low Channel: Frequency – 5.730 GHz

Modulation: 64 QAM

Power Setting: 6E

6 dB Bandwidth = 8.92 MHz

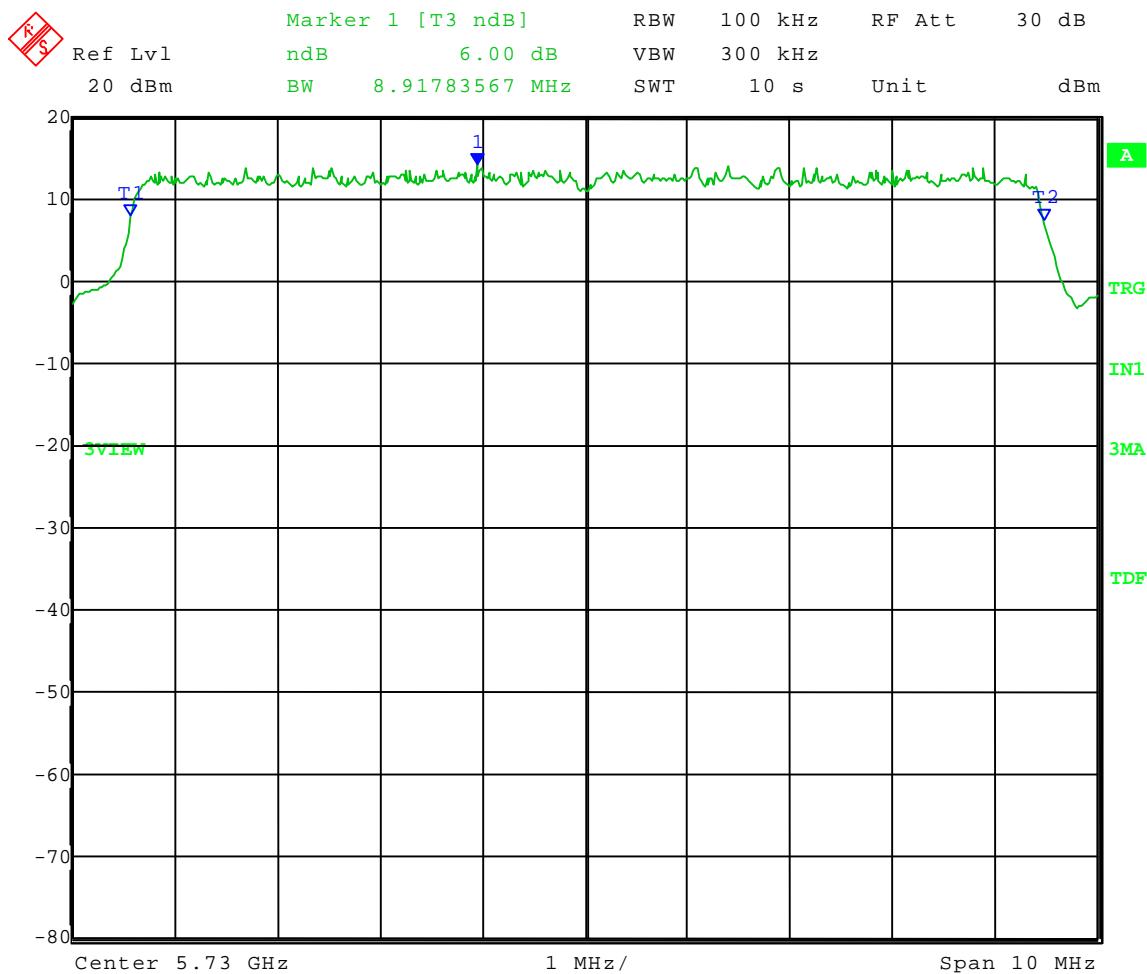

Date: 19.OCT.2009 13:59:03



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

Mid Channel: Frequency – 5.775 GHz

Modulation: 64 OAM

Power Setting: 6F

6 dB Bandwidth = 8.88 MHz

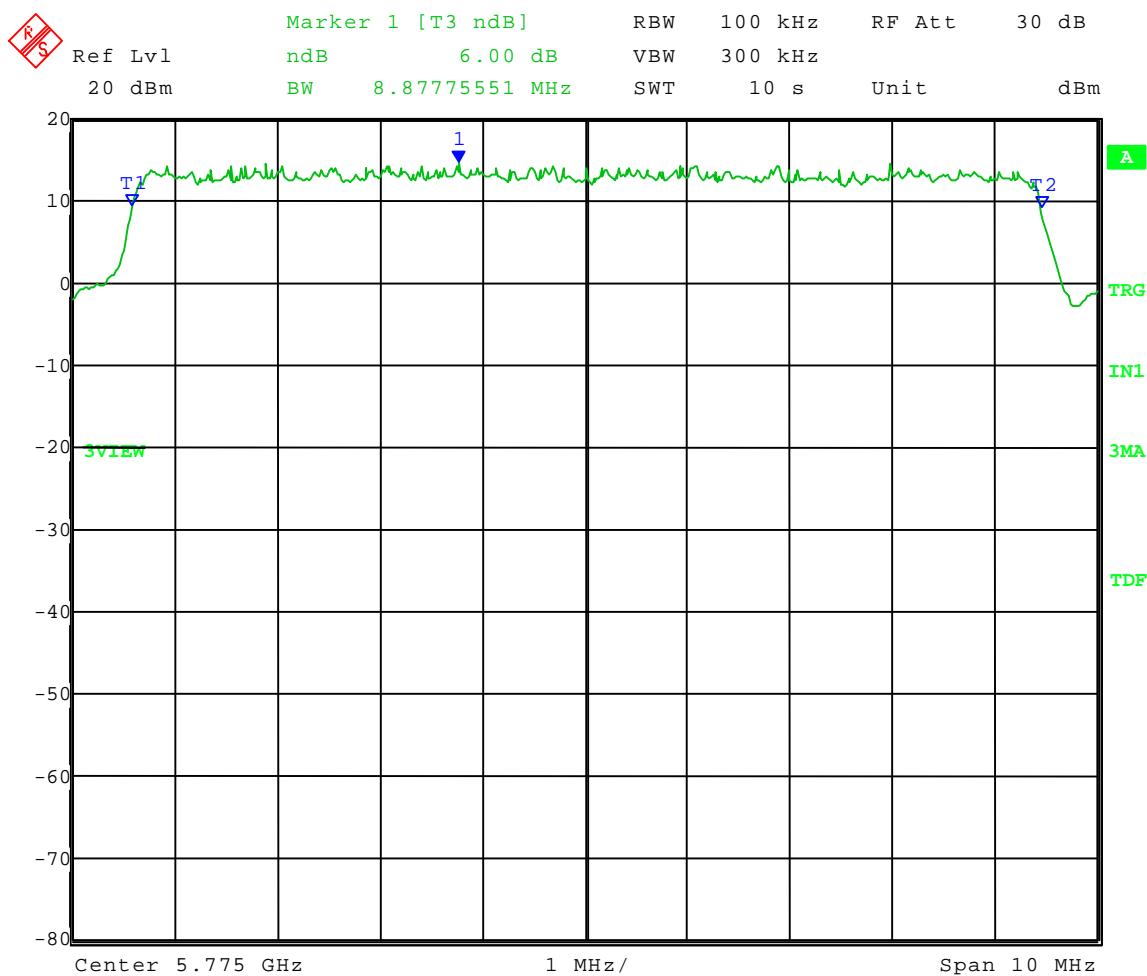

Date: 19.OCT.2009 14:11:24



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B


Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: 6 dB Bandwidth - Conducted - FCC Part 15.247(a)(2)
Operator: Craig B

High Channel: Frequency – 5.845 GHz

Modulation: 64 QAM

Power Setting: 6F

6 dB Bandwidth = 8.92 MHz

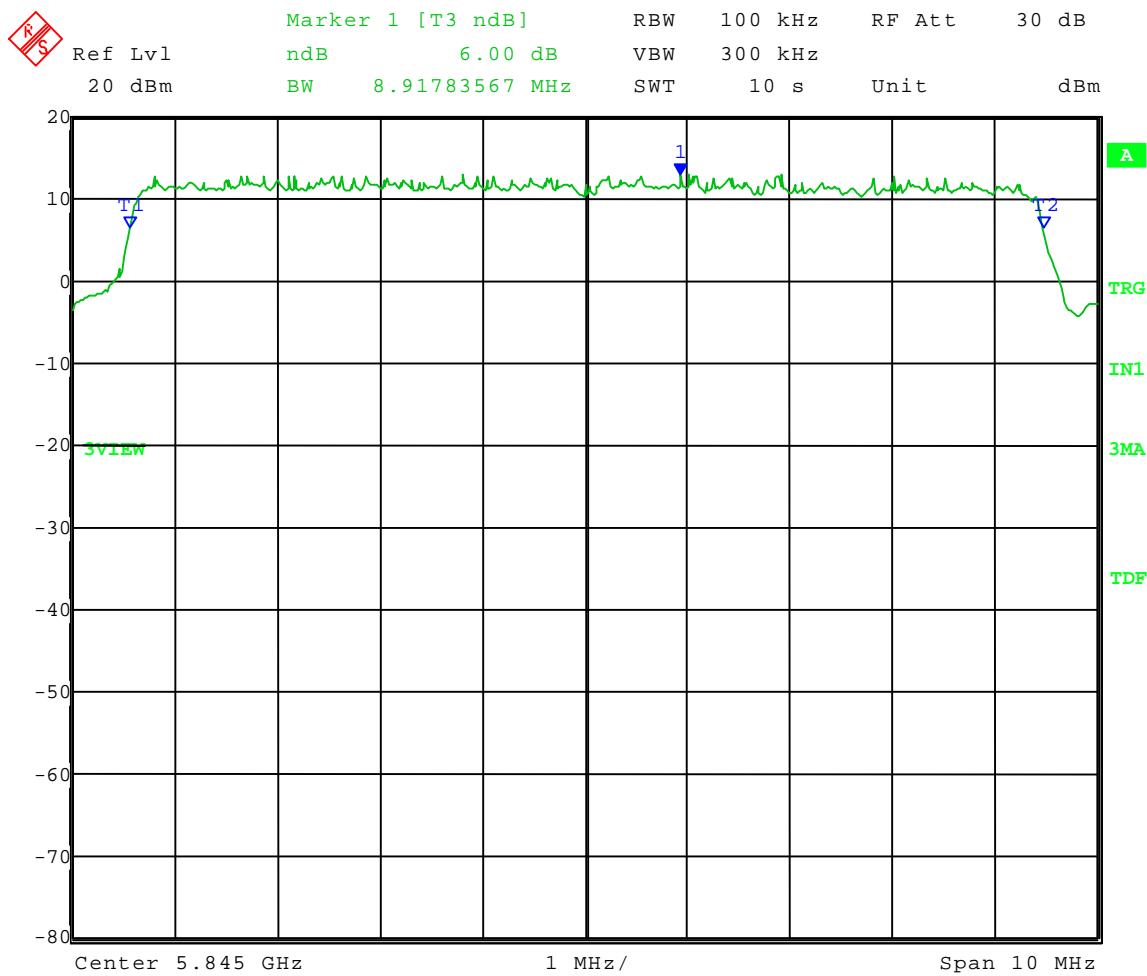

Date: 19.OCT.2009 13:54:32



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

CONDUCTED PEAK OUTPUT POWER GRAPHS

PART 15.247

QPSK



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **Low Channel:** Frequency – 5.730 GHz
Power setting: 62
Modulation: **QPSK**
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

$$\begin{aligned}\text{Averaged Output Power} &= 18.71 \text{ dBm} + 1 \text{ dB} \text{ (Motorola cable from N-type connector to circuit board)} = \\ &= 19.71 \text{ dBm} \\ &= \mathbf{93.5 \text{ mW}}\end{aligned}$$

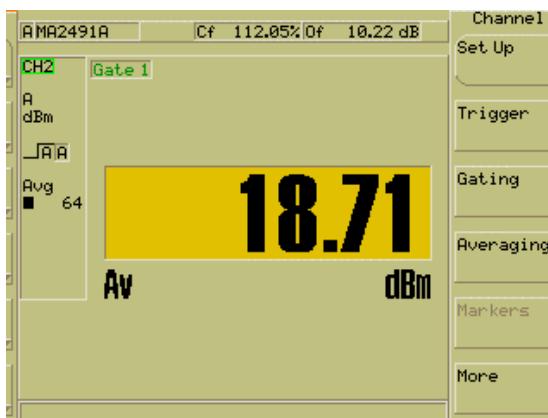



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 62
Modulation: **QPSK**
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

$$\begin{aligned}\text{Averaged Output Power} &= 18.53 \text{ dBm} + 1 \text{ dB} \text{ (Motorola cable from N-type connector to circuit board)} = \\ &= 19.53 \text{ dBm} \\ &= \mathbf{89.7 \text{ mW}}\end{aligned}$$

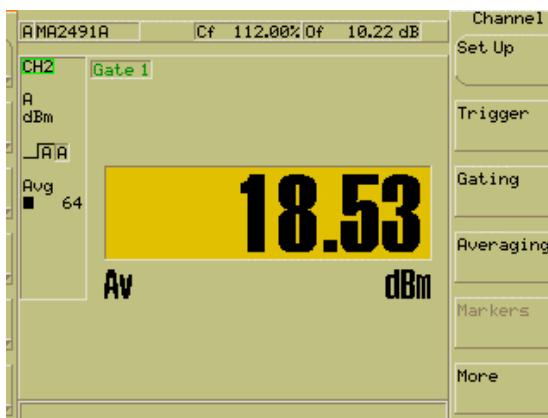



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 66
Modulation: **QPSK**
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

Averaged Output Power = 18.90 dBm + 1 dB (Motorola cable from N-type connector to circuit board) =
19.90 dBm
= **97.7 mW**

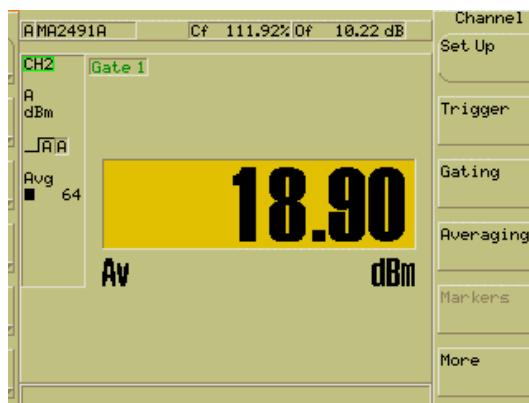



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

CONDUCTED PEAK OUTPUT POWER GRAPHS

PART 15.247

16QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **Low Channel:** Frequency – 5.730 GHz
Power setting: 62
Modulation: 16 QAM
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

$$\begin{aligned}\text{Averaged Output Power} &= 18.69 \text{ dBm} + 1 \text{ dB} \text{ (Motorola cable from N-type connector to circuit board)} = \\ &= 19.69 \text{ dBm} \\ &= \mathbf{93.1 \text{ mW}}\end{aligned}$$

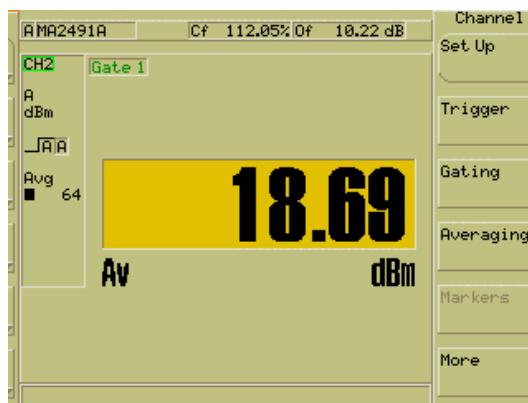



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B

Comment: **Mid Channel:** Frequency – 5.775 GHz


Power setting: 62

Modulation: 16 QAM

Antenna gain: 16 dBi

RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

Averaged Output Power = 18.56 dBm + 1 dB (Motorola cable from N-type connector to circuit board) =
19.56 dBm
= **90.4 mW**

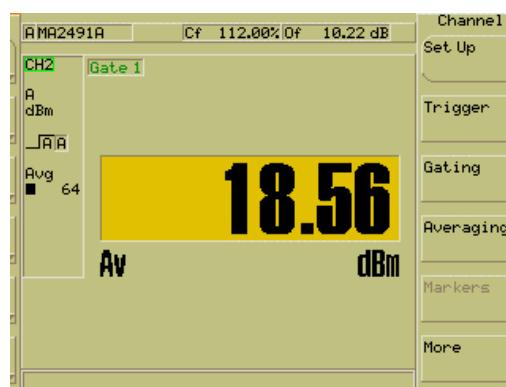



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 66
Modulation: 16 QAM
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

$$\begin{aligned}\text{Averaged Output Power} &= 18.92 \text{ dBm} + 1 \text{ dB} \text{ (Motorola cable from N-type connector to circuit board)} = \\ &= 19.92 \text{ dBm} \\ &= \mathbf{98.2 \text{ mW}}\end{aligned}$$

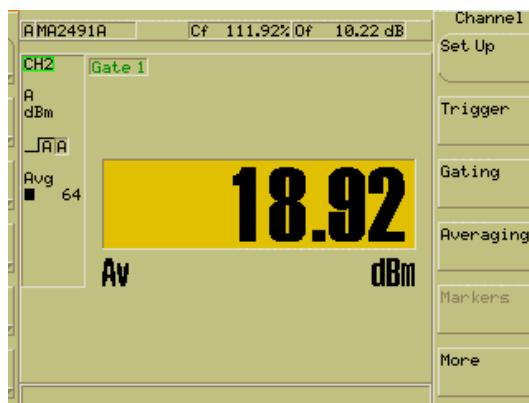



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

CONDUCTED PEAK OUTPUT POWER GRAPHS

PART 15.247

64QAM



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **Low Channel:** Frequency – 5.730 GHz
Power setting: 66
Modulation: 64 QAM
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

Averaged Output Power = 18.87 dBm + 1 dB (Motorola cable from N-type connector to circuit board) =
19.87 dBm
= **97.1 mW**

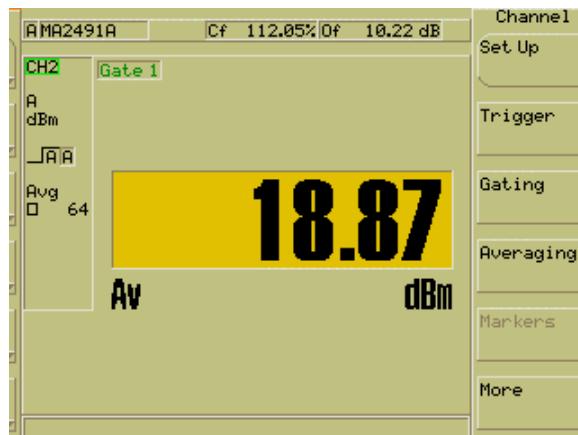



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **Mid Channel**: Frequency – 5.775 GHz
Power setting: 66
Modulation: 64 QAM
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

Averaged Output Power = 18.63 dBm + 1 dB (Motorola cable from N-type connector to circuit board) =
19.63 dBm
= **91.8 mW**

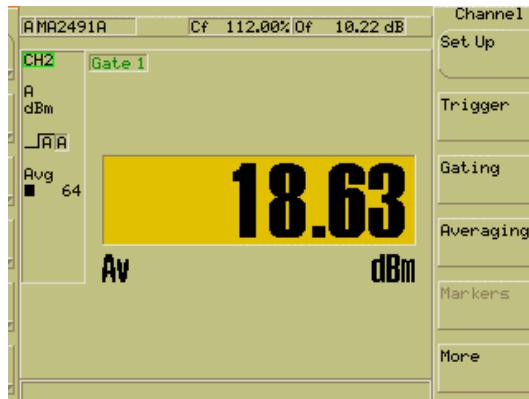



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-22-2009
Company: Motorola
EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Test: Maximum Conducted Power Averaged - FCC 15.247(b)(3) and (4)

Operator: Craig B
Comment: **High Channel**: Frequency – 5.845 GHz
Power setting: 69
Modulation: 64 QAM
Antenna gain: 16 dBi
RF Conducted Limit: 30 dBm - 10 dB (amount antenna gain is over 6 dBi) = 20 dBm.

$$\begin{aligned}\text{Averaged Output Power} &= 18.74 \text{ dBm} + 1 \text{ dB} \text{ (Motorola cable from N-type connector to circuit board)} = \\ &= 19.74 \text{ dBm} \\ &= \mathbf{94.2 \text{ mW}}\end{aligned}$$

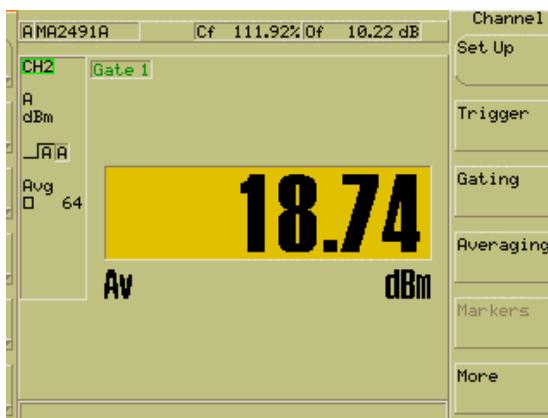



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

PEAK POWER SPECTRAL DENSITY GRAPHS

QSPK

PART 15.247



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


Low Channel: Frequency – 5.730 GHz

Modulation: QPSK

Power Setting: 6A

Limit: +8 dBm

Average Power Spectral Density = -1.13 dBm

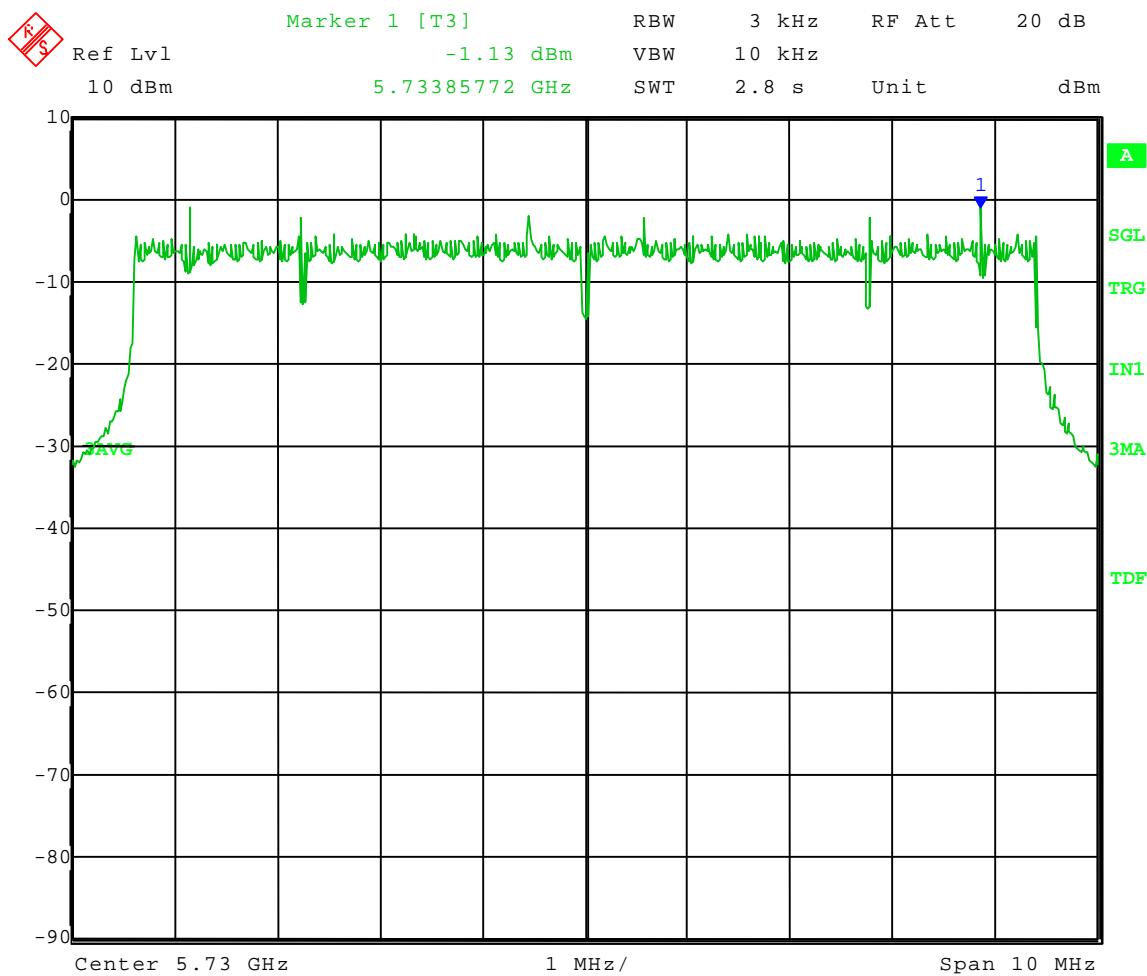

Date: 19.OCT.2009 13:00:22



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


Mid Channel: Frequency – 5.775 GHz

Modulation: QPSK

Power Setting: 6B

Limit: +8 dBm

Average Power Spectral Density = -0.35 dBm

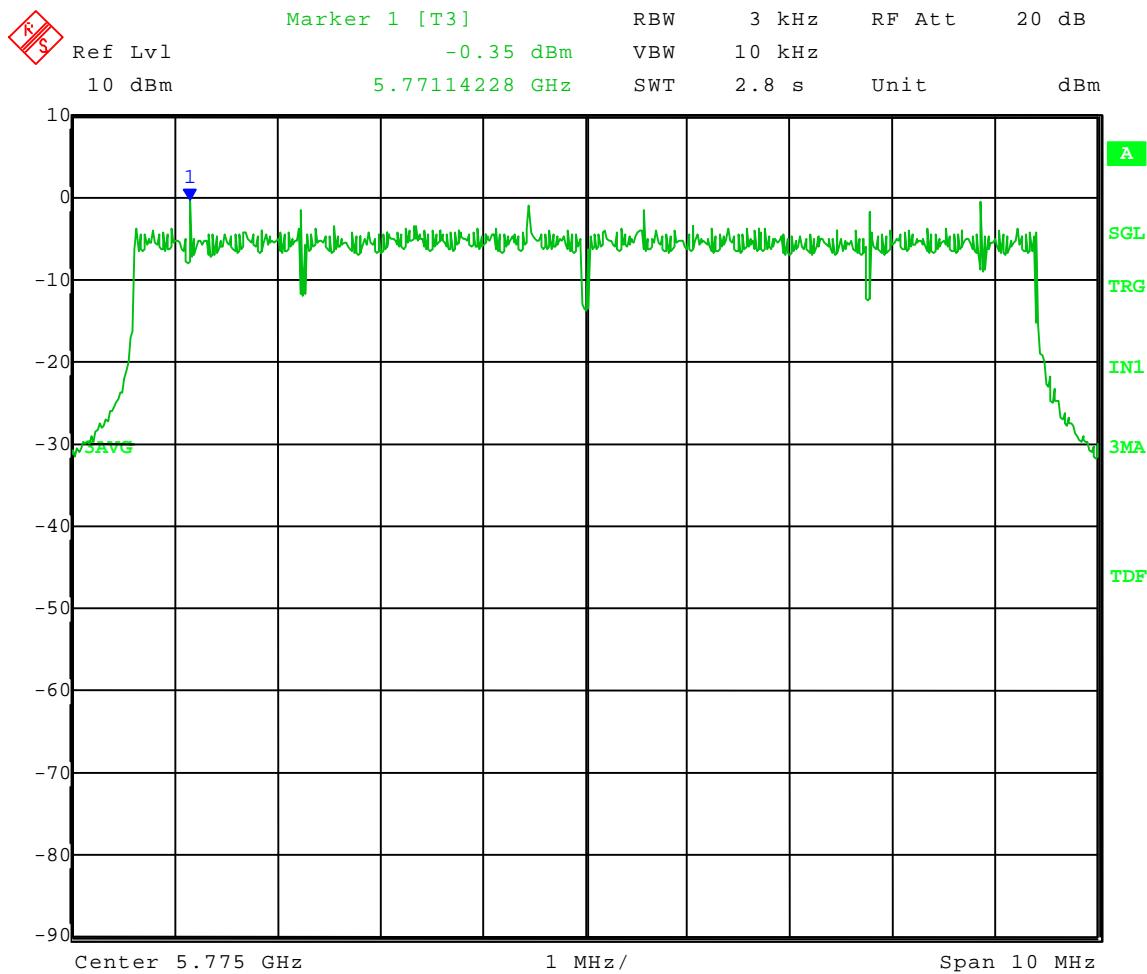



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


High Channel: Frequency – 5.845 GHz

Modulation: QPSK

Power Setting: 6D

Limit: +8 dBm

Average Power Spectral Density = -1.00 dBm

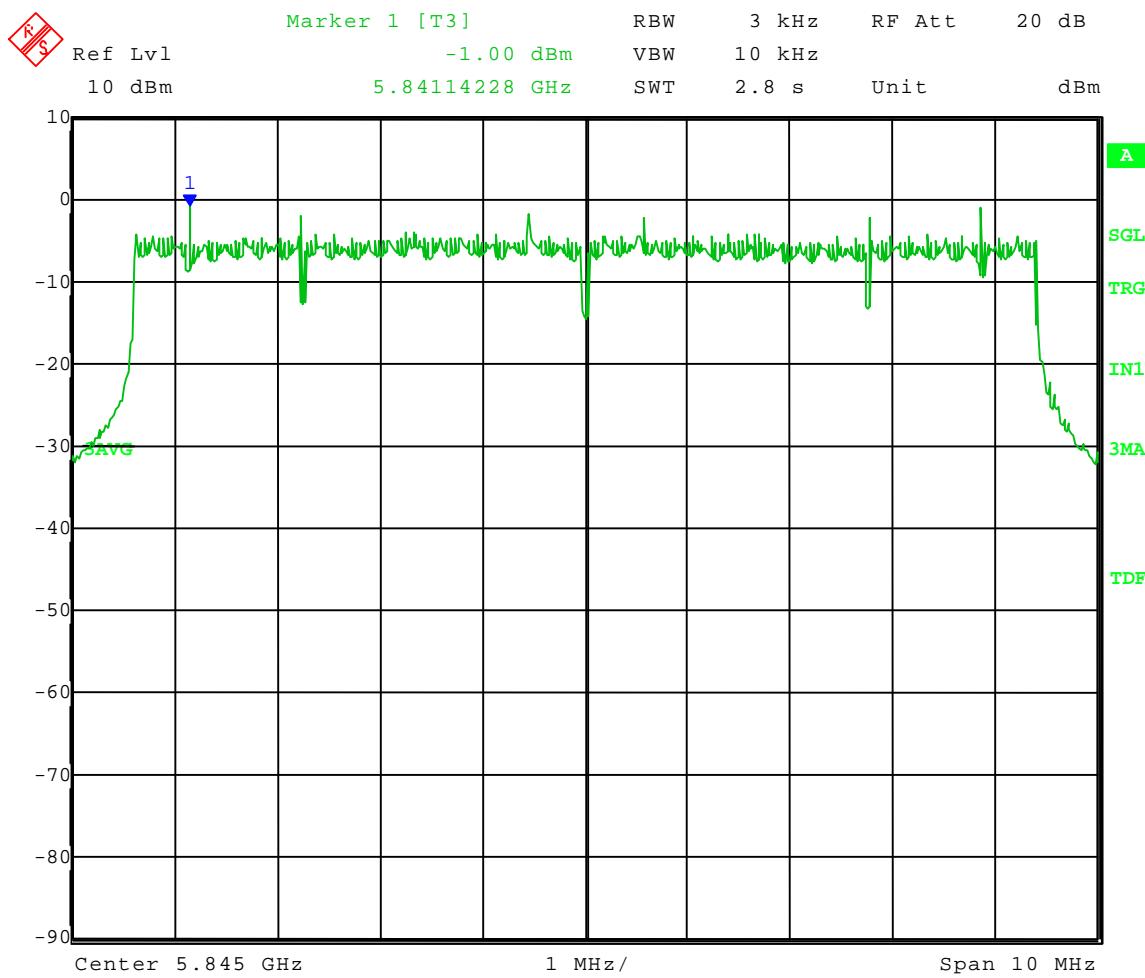

Date: 19.OCT.2009 13:34:08



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

PEAK POWER SPECTRAL DENSITY GRAPHS

16QAM

PART 15.247



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


Low Channel: Frequency – 5.730 GHz

Modulation: 16 QAM

Power Setting: 6A

Limit: +8 dBm

Average Power Spectral Density = -1.01 dBm

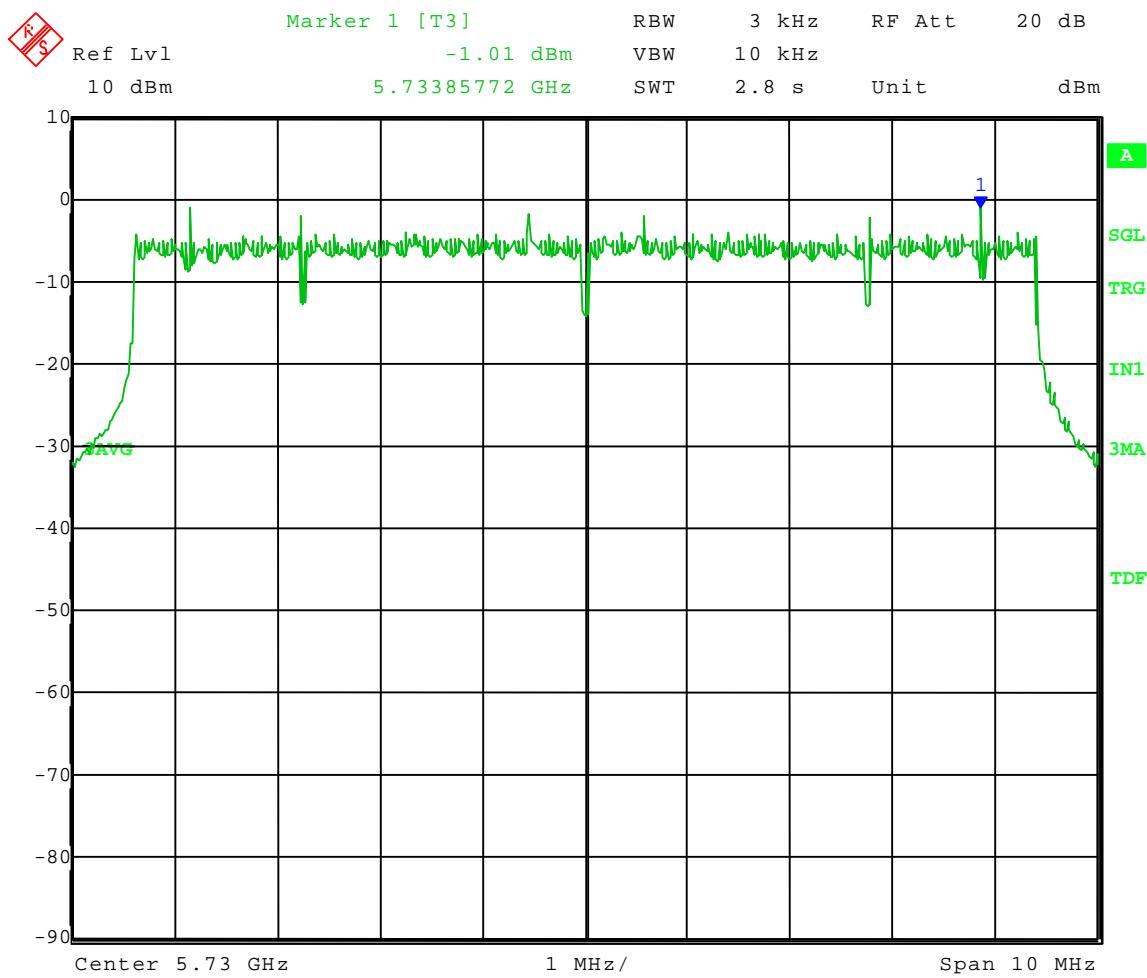

Date: 19.OCT.2009 12:51:34



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


Mid Channel: Frequency – 5.775 GHz

Modulation: 16 QAM

Power Setting: 6B

Limit: +8 dBm

Average Power Spectral Density = -0.33 dBm

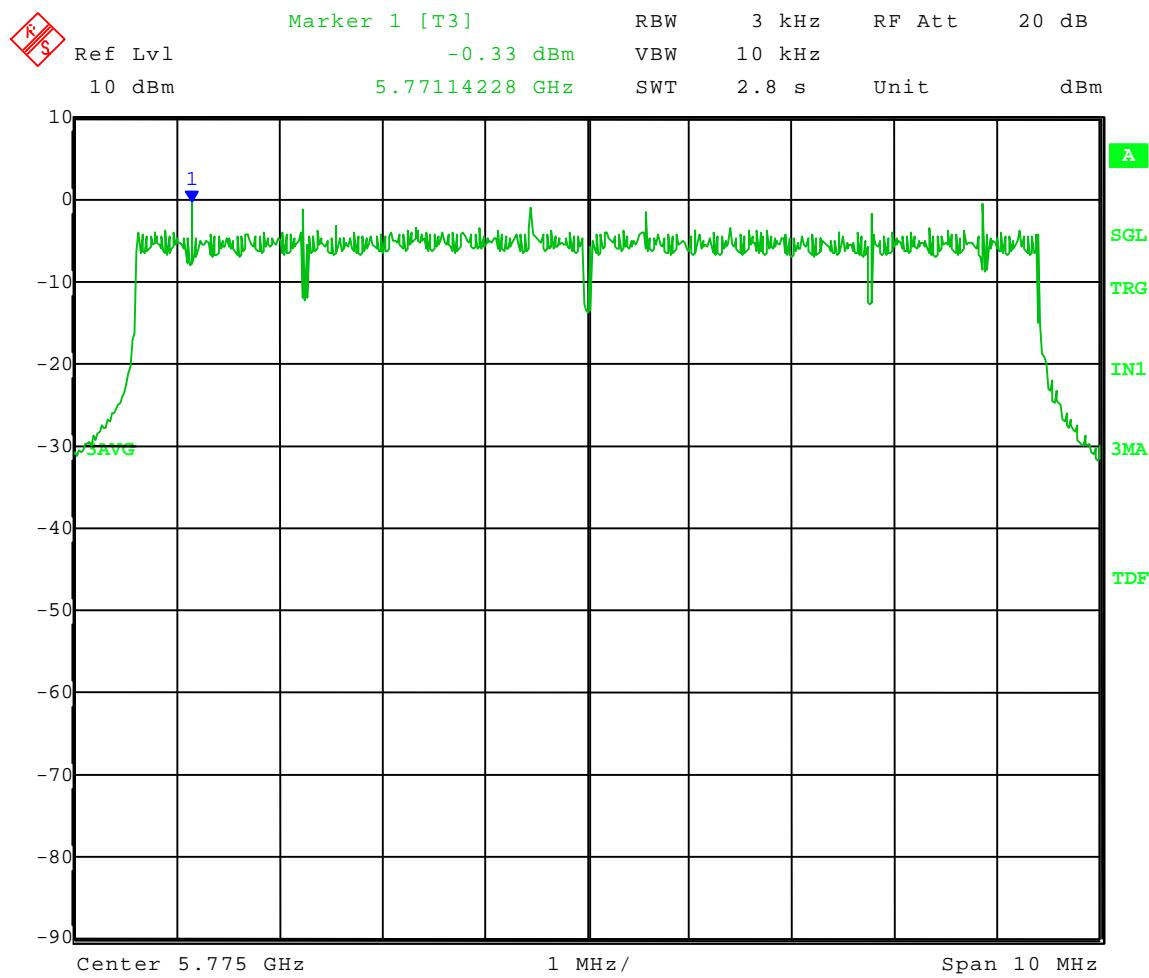

Date: 19.OCT.2009 11:38:48



Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX B

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


High Channel: Frequency – 5.845 GHz

Modulation: 16 QAM

Power Setting: 6C

Limit: +8 dBm

Average Power Spectral Density = -1.41 dBm

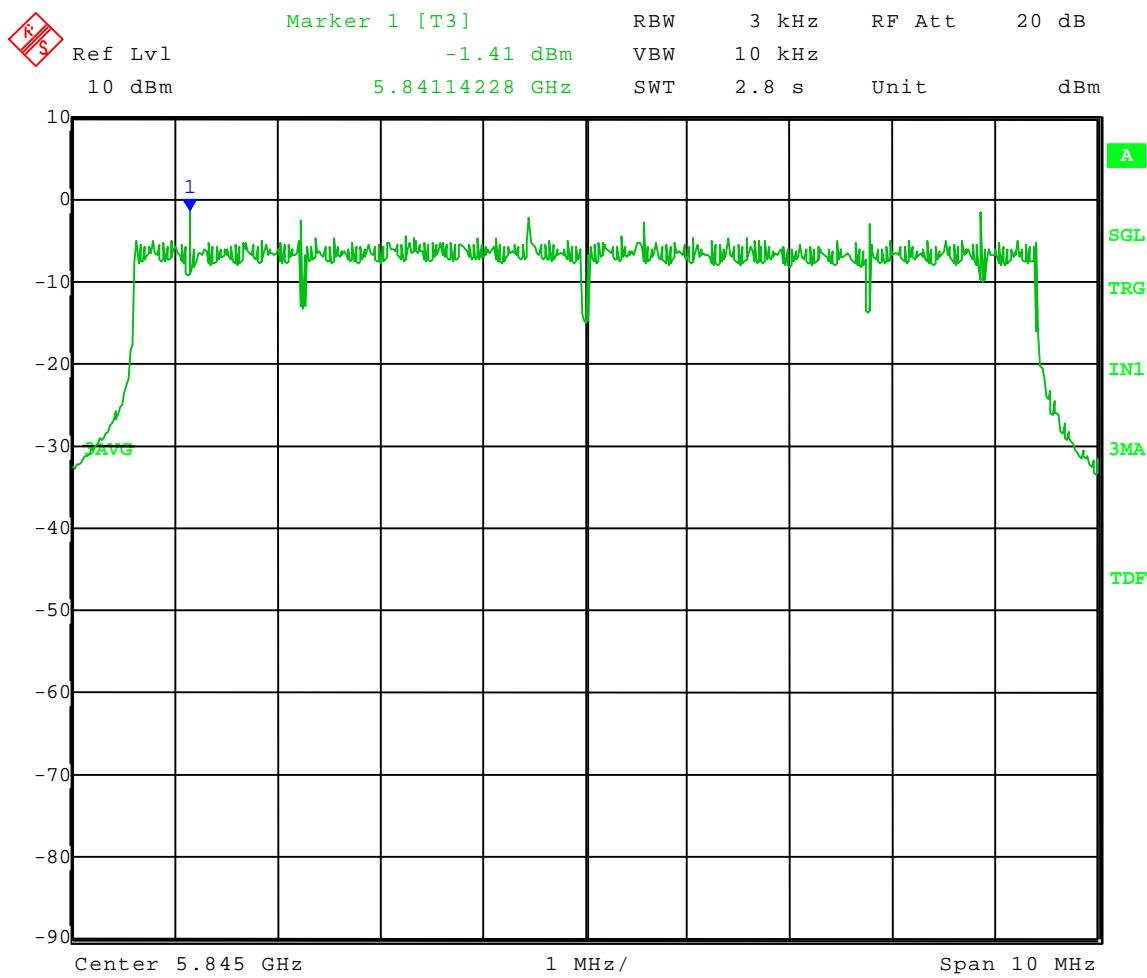

Date: 19.OCT.2009 13:26:11



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

PEAK POWER SPECTRAL DENSITY GRAPHS

64QAM

PART 15.247



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


Low Channel: Frequency – 5.730 GHz

Modulation: 64 QAM

Power Setting: 6E

Limit: +8 dBm

Average Power Spectral Density = -0.82 dBm

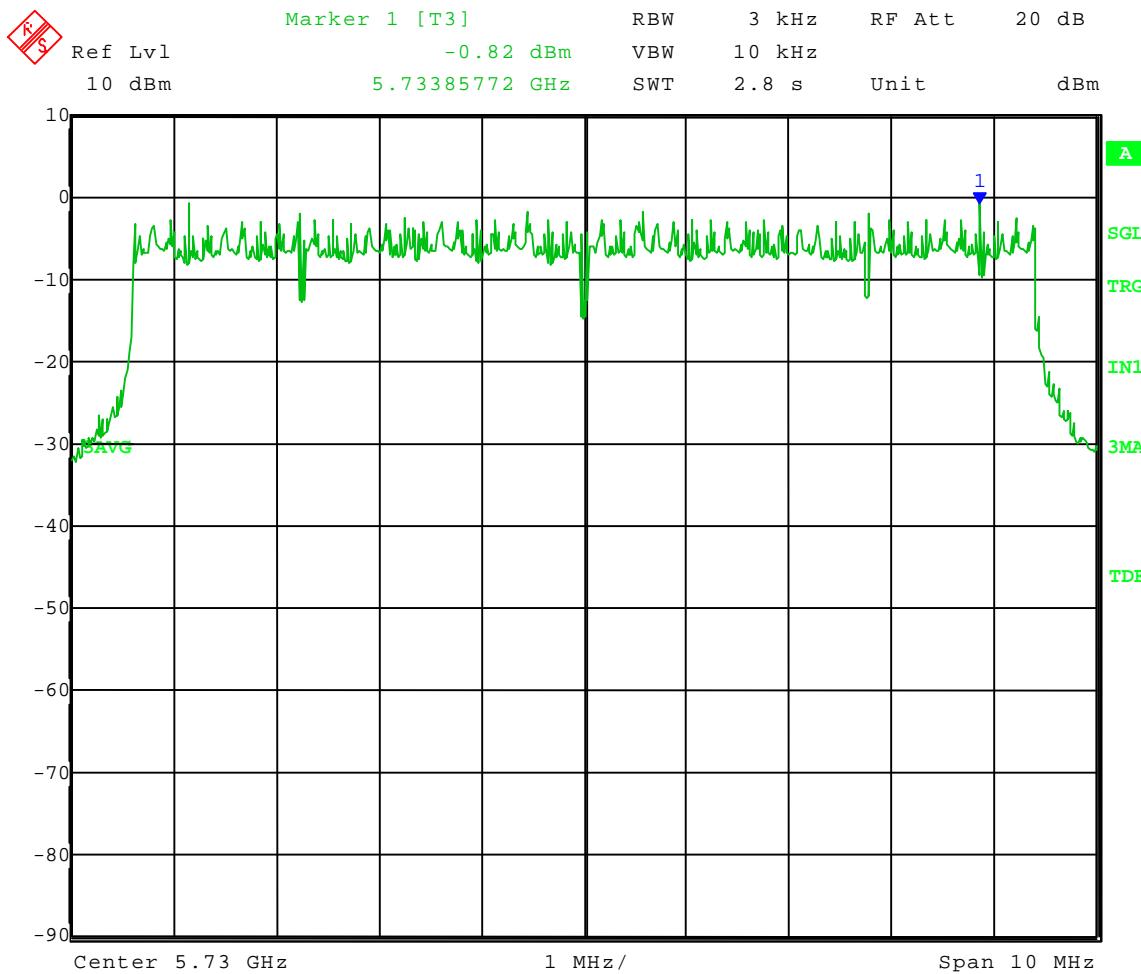



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]


Mid Channel: Frequency – 5.775 GHz

Modulation: 64 QAM

Power Setting: 6F

Limit: +8 dBm

Average Power Spectral Density = -0.24 dBm

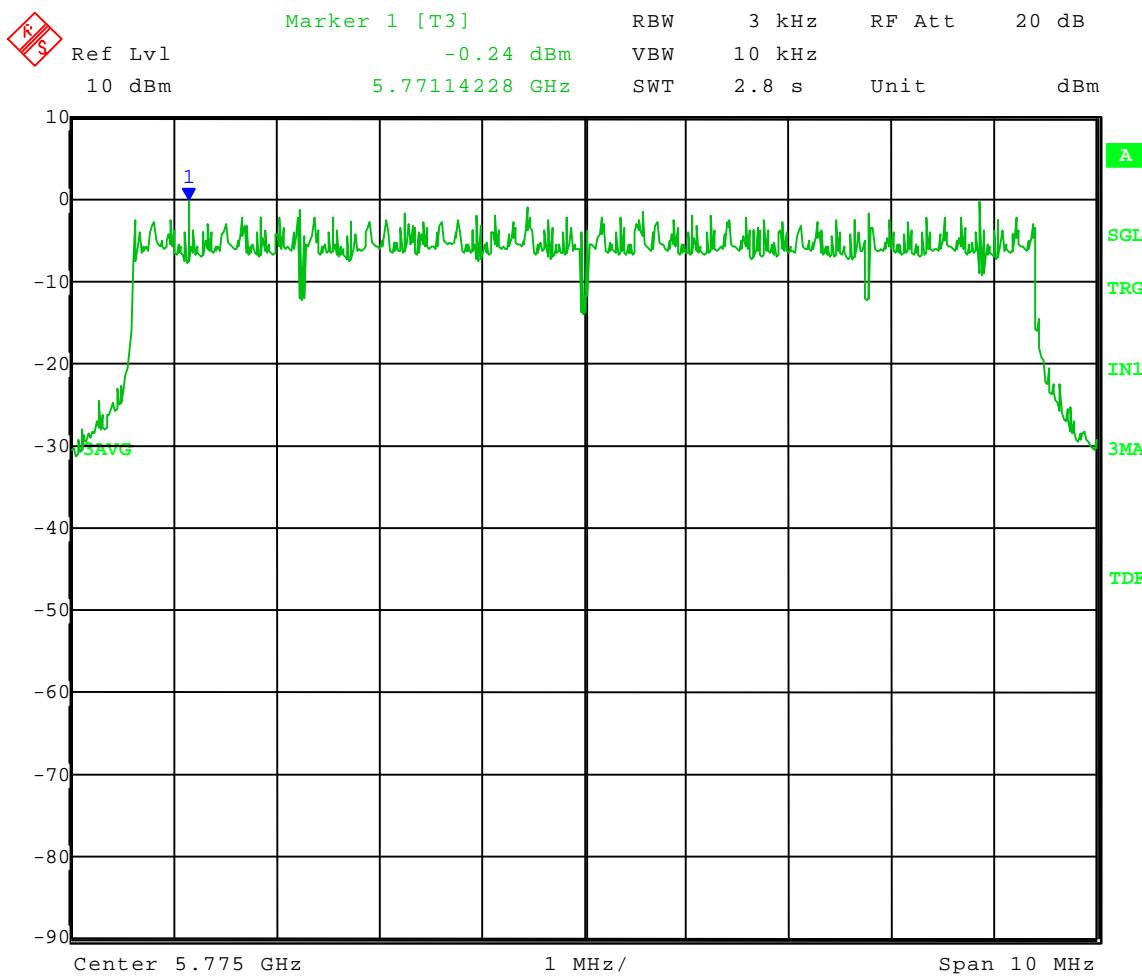



1250 Peterson Dr., Wheeling, IL 60090

Company: Motorola
Model Tested: 5780APUS
Report Number: 15749

Test Date: 10-19-2009
Company: Motorola
EUT: OFDM Access point CAP 58430 Model: 5780APUS
Test: Power Spectral Density - Conducted - FCC 15.247(e)
Operator: Craig B

Comment: Trace Averaged with Peak Detector [EUT complies with conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247]

High Channel: Frequency – 5.845 GHz

Modulation: 64 QAM

Power Setting: 6F

Limit: +8 dBm

Average Power Spectral Density = -2.02 dBm

