


FCC Part 15 Class B

Voltage Mains Test

EUT: OFDM Access Point CAP 58430 Model: 5780APUS
Manufacturer: Motorola
Operating Condition: 70 deg. F, 45% R.H.
Test Site: DLS O.F. Screenroom
Operator: Craig B
Test Specification: Line 2; 120 V 60 Hz
Comment: Powered from CMM4 using Power-One Aspiro 4R +56V DC power supply
Date: 10-28-2009

SCAN TABLE: "Line Cond Scrn RmFin"

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 150.0 kHz	Frequency 30.0 MHz	Width 4.0 kHz	QuasiPeak CISPR AV	2.0 s	9 kHz	LISN DLS#128

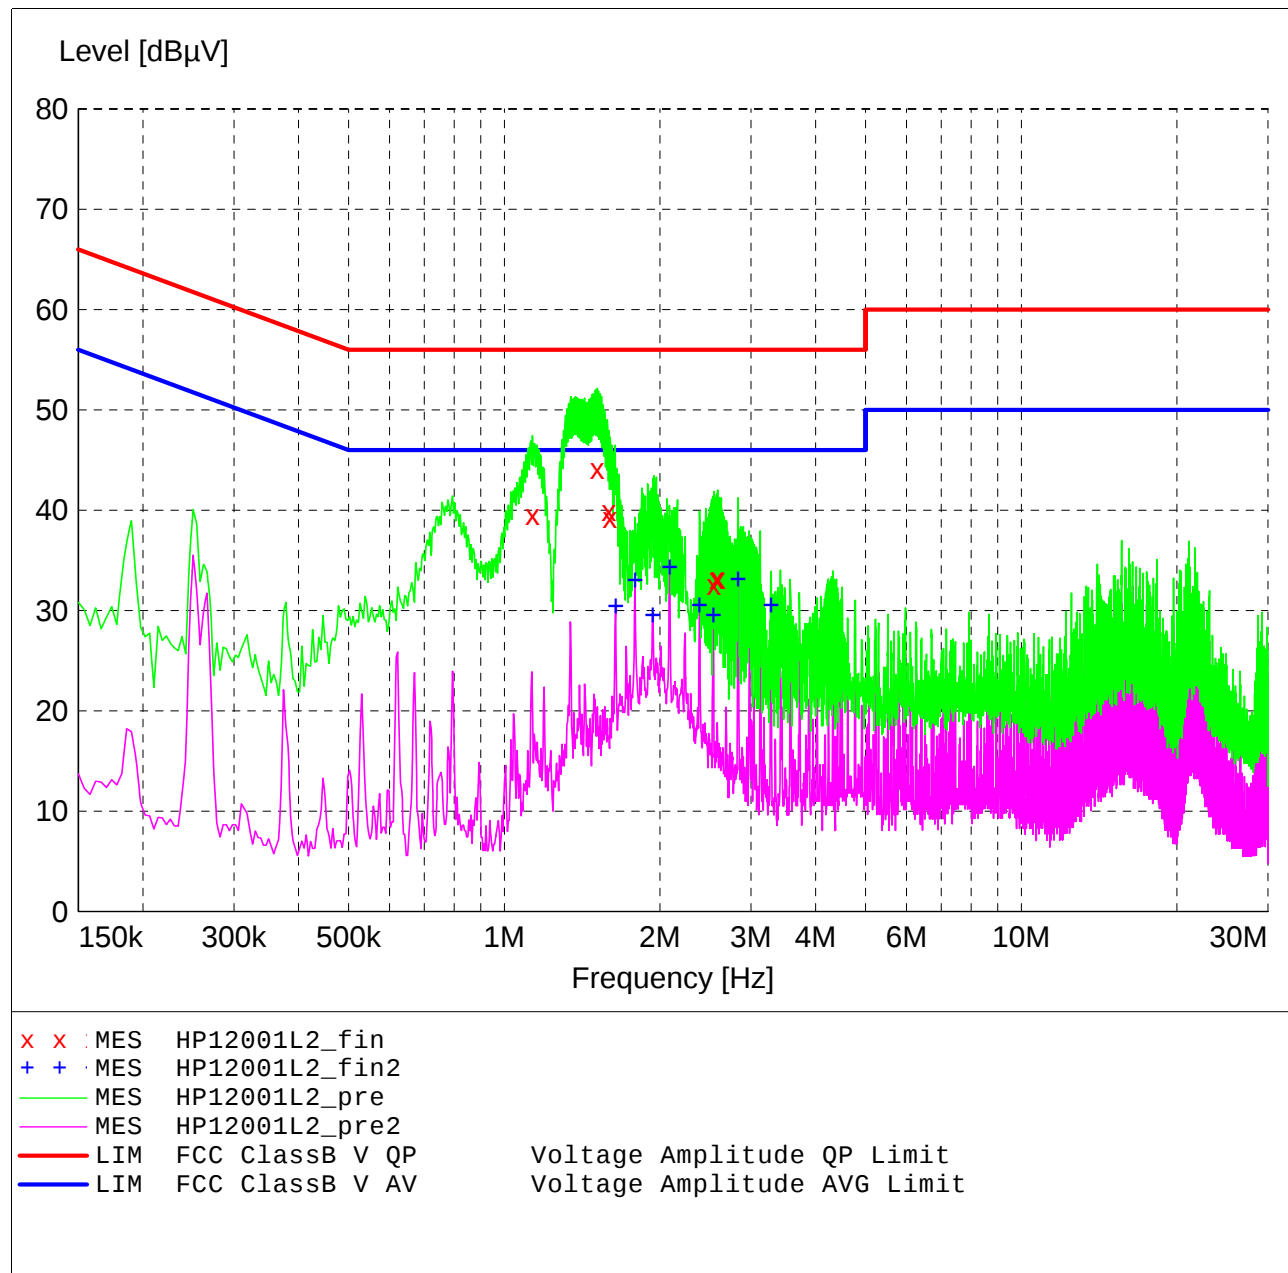

MEASUREMENT RESULT: "HP12001L2_fin"

10/28/2009 11:50AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.134000	39.50	10.0	56	16.5	QP	---	---
1.514000	44.10	10.0	56	11.9	QP	---	---
1.594000	40.00	10.0	56	16.0	QP	---	---
1.602000	39.30	10.0	56	16.7	QP	---	---
2.542000	32.60	10.1	56	23.4	QP	---	---
2.574000	33.20	10.1	56	22.8	QP	---	---
2.586000	33.30	10.1	56	22.7	QP	---	---
2.594000	33.20	10.1	56	22.8	QP	---	---

MEASUREMENT RESULT: "HP12001L2_fin2"

10/28/2009 11:50AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.642000	30.50	10.0	46	15.5	CAV	---	---
1.790000	33.10	10.0	46	12.9	CAV	---	---
1.938000	29.60	10.0	46	16.4	CAV	---	---
2.090000	34.40	10.0	46	11.6	CAV	---	---
2.386000	30.60	10.0	46	15.4	CAV	---	---
2.538000	29.60	10.1	46	16.4	CAV	---	---
2.834000	33.20	10.1	46	12.8	CAV	---	---
3.282000	30.60	10.1	46	15.4	CAV	---	---